


FCC Part 15 Class B

Voltage Mains Test

EUT: 9000 SM
Manufacturer: Motorola
Operating Condition: 73 deg. F, 70% R.H.
Test Site: DLS OF Screen Room
Operator: Craig Brandt
Test Specification: 120 VAC, 60 Hz
Comment: Line 2 transmit mode
Date: 6/7/04

SCAN TABLE: "FCC ClassB Voltage"

Short Description:				FCC Class B Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN	DLS#128
				Average			

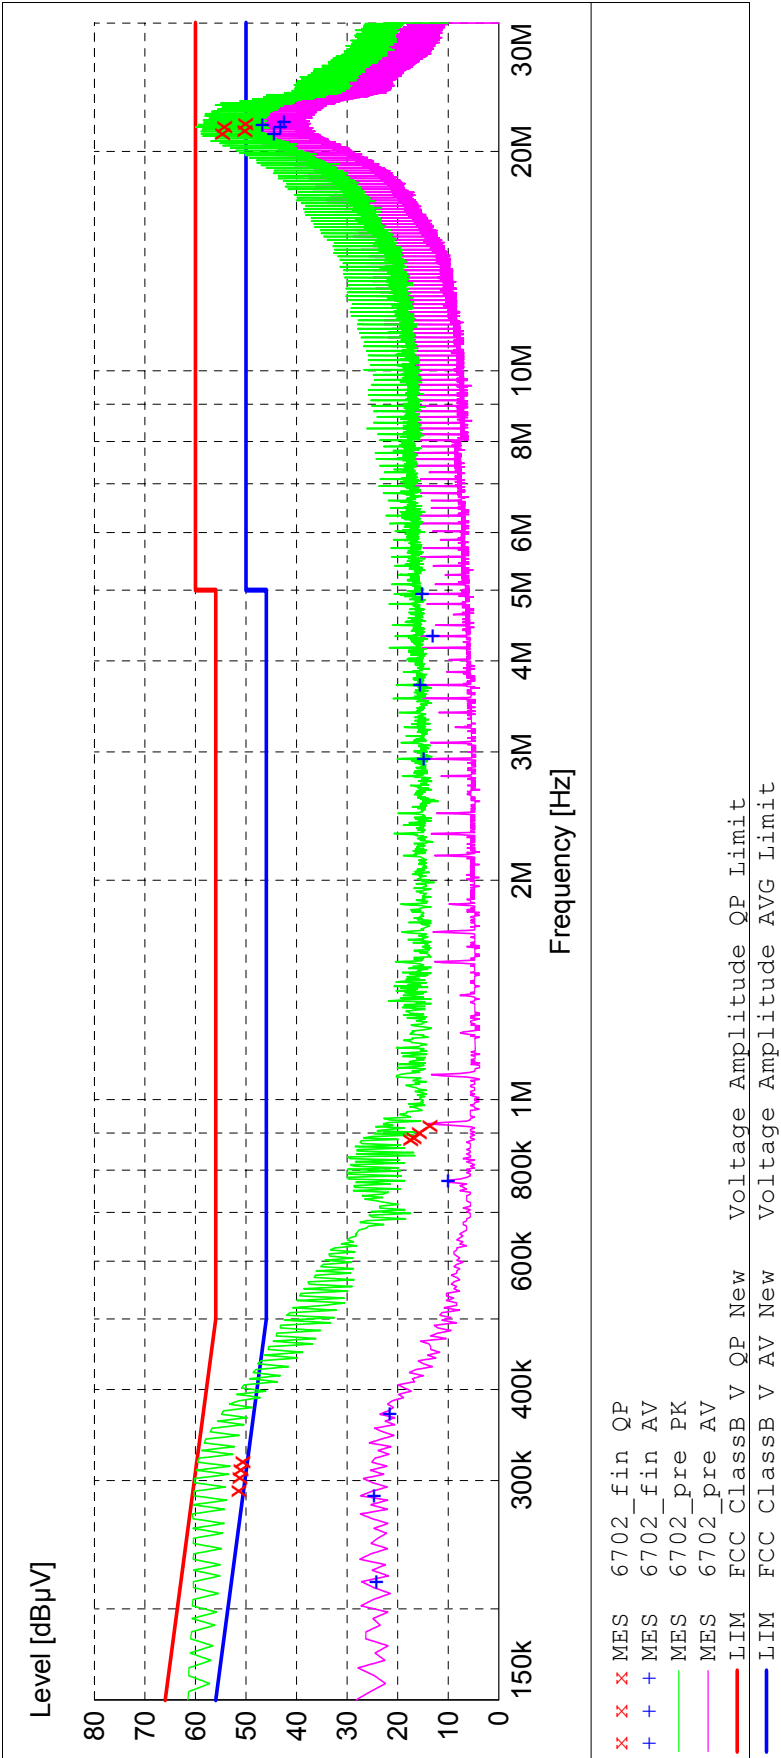

MEASUREMENT RESULT: "6702_fin QP"

6/7/2004 4:02PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.290000	51.80	10.6	61	8.7	1	---
0.302000	51.60	10.6	60	8.6	1	---
0.310000	51.40	10.5	60	8.6	1	---
0.318000	51.00	10.5	60	8.7	1	---
0.878000	17.80	10.3	56	38.2	1	---
0.886000	17.20	10.3	56	38.8	1	---
0.898000	16.10	10.3	56	39.9	1	---
0.918000	14.00	10.3	56	42.0	1	---
21.146000	55.00	11.6	60	5.0	1	---
21.302000	50.60	11.6	60	9.4	1	---
21.610000	54.60	11.7	60	5.4	1	---
21.766000	50.50	11.7	60	9.5	1	---

MEASUREMENT RESULT: "6702_fin AV"

6/7/2004 4:02PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.218000	24.20	10.8	53	28.7	1	---
0.286000	24.60	10.6	51	26.1	1	---
0.370000	21.50	10.4	49	27.0	1	---
0.774000	10.00	10.3	46	36.0	1	---
2.934000	14.80	10.1	46	31.2	1	---
3.706000	15.50	10.3	46	30.5	1	---
4.326000	13.00	10.4	46	33.0	1	---
4.942000	15.10	10.6	46	30.9	1	---
21.146000	44.40	11.6	50	5.6	1	---
21.610000	43.10	11.7	50	6.9	1	---
21.762000	46.70	11.7	50	3.3	1	---
21.918000	42.40	11.7	50	7.6	1	---