

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guro-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	--	---	--

## Test Report for FCC

FCC ID : QT2M-CODE9YOUNG

Report Number		ESTF150809-001							
Applicant	Company name	Young Electronics Corp.							
	Address	#396-18, CHEONG CHEON-DONG, BUPYEONG-GU, INCHEON, KOREA							
	Telephone	82-32-505-5347, FAX) 82-32-505-5349							
Product	Product name	ACCESS-9 Transmitter							
	Model No.	M-CODE9_318	Manufacturer	Young Electronics Corp.					
	Serial No.	NONE	Country of origin	KOREA					
Test date	2008-9-08 ~ 2008-09-11		Date of issue	2008-09-11					
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea								
Standard	FCC PART 15.231 Subpart C(2007) , ANSI C 63.4 2003								
Test item	Conducted Emission	Class A	Class B	Test result	N/A				
	Radiated Emission	Class A	Class B	Test result	OK				
Measurement facility registration number		94696							
Tested by	Senior Engineer J.H.Kim 								
Reviewed by	Manager Engineer J.M.Yang 								
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable								
<p>* Note</p> <ul style="list-style-type: none"> <li>- This test report is not permitted to copy partly without our permission</li> <li>- This test result is dependent on only equipment to be used</li> <li>- This test result based on a single evaluation of one sample of the above mentioned</li> </ul>									



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. Measurement of radiated emission .....	8
5.1 Measurement equipment .....	8
5.2 Environmental conditions .....	8
5.3 Test data .....	9
6. Measurement of Occupied Bandwidth.....	10
6.1 Measurement equipment .....	10
6.2 Measurement result .....	10
6.3 Test data .....	11
7. Photographs of test setup .....	12
8. Photographs of EUT .....	14

Appendix 1. Test data for Duty Cycle

Appendix 2. Test data for Less than 5 seconds

 <p><b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Geumcheon-gu, Seoul, 158-803, Korea</p>	   	<p><b>Electromagnetic Interference Test Report</b></p>
--	--	--

## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea  
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea  
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

### 1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



**ESTECH Co., Ltd.**

8m 1015, World Venture Center II,  
426-5 Gasan-dong, Gwacheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product Name : ACCESS-9 Transmitter

Model Number : M-CODE9\_318

Serial Number : NONE

Manufacturer : Young Electronics Corp.

Country of origin : KOREA

Rating : INPUT:9Vdc

Receipt Date : 2008-08-13

Output Power : -11.8dBm

Freq. Range : CH1:318MHz

Oscillator(s) : 318MHz

	<b>ESTECH Co., Ltd.</b> B# 1015, World Venture Center II, 426-5 Gasan-dong, Guro-gu, Seoul, 158-803, Korea	   	<b>Electromagnetic Interference Test Report</b>
---	---	--	---

### 3. Test Standards

#### Test Standard : FCC PART 15 (2007)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

 <p><b>ESTECH Co., Ltd.</b> Bm 1015, World Venture Center II, 426-5 Gasan-dong, Guro-gu, Seoul, 158-803, Korea</p>	   	<p><b>Electromagnetic Interference Test Report</b></p>
---	--	--

## 4. Measurement Condition

### 4.1 EUT Operation.


- \* The EUT was in the following operation mode during all testing
- \* The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- \* The EUT is a one-channel wireless transmitter operating at 318MHz

Tx Freq. Range : 318MHz

No. of Channels : 1

Antenna : Built-in internal pattern antenna on-board

### 4.2 Configuration and Peripherals

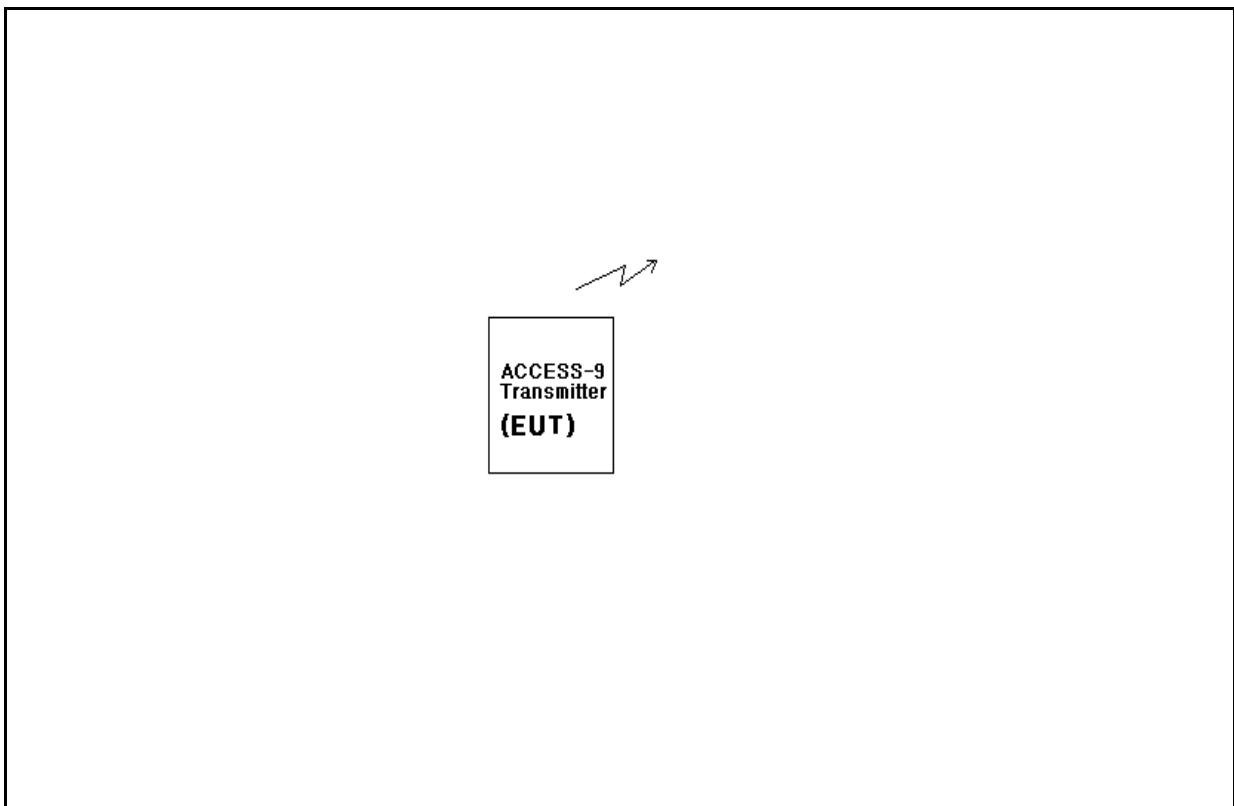



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guro-gu,  
Seoul, 158-803, Korea



FC

# Electromagnetic Interference Test Report

## 4.3 EUT and Support equipment

## 4.4 Cable Connecting

 <b>ESTECH Co., Ltd.</b> Bm 1015, World Venture Center II, 426-5 Gasan-dong, Gumcheon-gu, Seoul, 158-803, Korea	   	<b>Electromagnetic Interference Test Report</b>
---	--	---

## 5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2007) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2007) & ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test set-up.

### 5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Horn antenna	BBHA 9120 D	Schwarzbeck	352	2009. 6. 13
Spectrum Analyzer	R3261C	ADVANTEST	61720116	2009. 4. 22
Logbicon Antenna	VULB 9160	Schwarzbeck	3142	2009. 5. 15
Test receiver	ESPI7	Rohde & Schwarz	100185	2009. 8. 27
Amplifier	8447F	HP	2805A02972	2009. 6. 26
PREAMPLIFIER	8449B	Agilent	3008A00595	2008. 12. 28
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

### 5.2 Environmental Condition

Test Place : Open site(3m)  
 Temperature (°C) : 21  
 Humidity (%) : 44 %

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guroheon-gu, Seoul, 158-803, Korea			<b>Electromagnetic Interference Test Report</b>
---	---	---	--	---

### 5.3 Test data 30MHz ~ 3.5GHz Radiated Emissions

Test Date : 10-Sep-08

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Result Value																								
				Ant Factor (dB)	Cable (dB)	Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)																						
Fundamental and Harmonic(Peak Value)																														
317.83	47.83	V	1.5	13.60	3.1	75.8	64.52	-11.27																						
635.67	18.15	V	1.5	19.44	5.0	55.8	42.60	-13.19																						
1864.00	37.98	V	1.4	25.21	-32.1	55.8	31.13	-24.67																						
Fundamental and Harmonic(Qpeas - peak Value)																														
317.83	47.57	V	1.5	13.60	3.1	75.8	64.26	-11.53																						
635.67	16.76	V	1.5	19.44	5.0	55.8	41.21	-14.58																						
1864.00	32.97	V	1.4	25.21	-32.1	55.8	26.12	-29.68																						
Other Emission(Qpeak Value)																														
43.58	23.02	V	1.0	12.70	1.0	40.0	36.75	-3.25																						
Remark	<p>TEST MODE : BUTTON 1 (CH1)  H : Horizontal, V : Vertical</p> <ol style="list-style-type: none"> <li>The EUT were investigated at X,Y,Z Axis and the worst-case is reported</li> <li>The EUT was tested with a new battery</li> <li>Radiated Limis per § 15.231 :</li> </ol> <table> <thead> <tr> <th>Fund. Freq.(MHz)</th> <th>F/S (<math>\mu</math>V/m)</th> <th>F/S Spurious(<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>40.66 ~ 40.70</td> <td>2250</td> <td>225</td> </tr> <tr> <td>70 ~ 130</td> <td>1250</td> <td>125</td> </tr> <tr> <td>130 ~ 174</td> <td>1250 ~ 3750</td> <td>125 ~ 375</td> </tr> <tr> <td>174 ~ 260</td> <td>3750</td> <td>375</td> </tr> <tr> <td>260 ~ 470</td> <td>3750 ~ 12500</td> <td>375 ~ 1250</td> </tr> <tr> <td>470 &amp; above</td> <td>12500</td> <td>1250</td> </tr> </tbody> </table> <p>4. * Note : These frequencies fall under restricted bands according to §15.205. The field strength of emissions at these frequencies does not exceed the limits specified in § 15.205</p>									Fund. Freq.(MHz)	F/S ( $\mu$ V/m)	F/S Spurious( $\mu$ V/m)	40.66 ~ 40.70	2250	225	70 ~ 130	1250	125	130 ~ 174	1250 ~ 3750	125 ~ 375	174 ~ 260	3750	375	260 ~ 470	3750 ~ 12500	375 ~ 1250	470 & above	12500	1250
Fund. Freq.(MHz)	F/S ( $\mu$ V/m)	F/S Spurious( $\mu$ V/m)																												
40.66 ~ 40.70	2250	225																												
70 ~ 130	1250	125																												
130 ~ 174	1250 ~ 3750	125 ~ 375																												
174 ~ 260	3750	375																												
260 ~ 470	3750 ~ 12500	375 ~ 1250																												
470 & above	12500	1250																												

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guro-gu, Seoul, 158-803, Korea	   	<b>Electromagnetic Interference Test Report</b>
---	---	--	---

## 6. Occupied Bandwidth Measurement

According to §15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

### 6.1 Test instruments and measurement setup

The spectrum analyzer is set to as following.

- . RBW= 10KHz
- . VBW= 30KHz
- . Span= 500KHz
- . Sweep= suitable duration based on the EUT specification.

#### 20dB Bandwidth Test Instruments

Description	Model	Serial Number	Next Calibration date
Spectrum Analyzer	E4407B	US42041281	10 - Sep - 08
RF Cable	Length: 49cm	-	
- Spectrum Analyzer <=> EUT	Loss: 1.5dB	-	

### 6.2 Measurement results

EUT	ACCESS-9 Transmitter	MODEL	M-CODE9_318	
MODE	ASK	ENVIRONMENTAL CONDITION	25 , 40%RH	
INPUT POWER	DC 9V			
CHANNEL	Channel Frequency (MHz)	Bandwidth at 20dB below(kHz)	Limit (kHz)	PASS/FAIL
1	317.857	41.2	< 775	PASS



ESTECH Co., Ltd.

Room 1015, World Venture Center 11,  
426-5 Gasan-dong, Gwacheon-gu,  
Seoul, 158-803, Korea



MIC



KOLAS



VCCI




FCC

Electromagnetic  
Interference  
Test Report

## 6.3 Trace data

### 20dB bandwidth

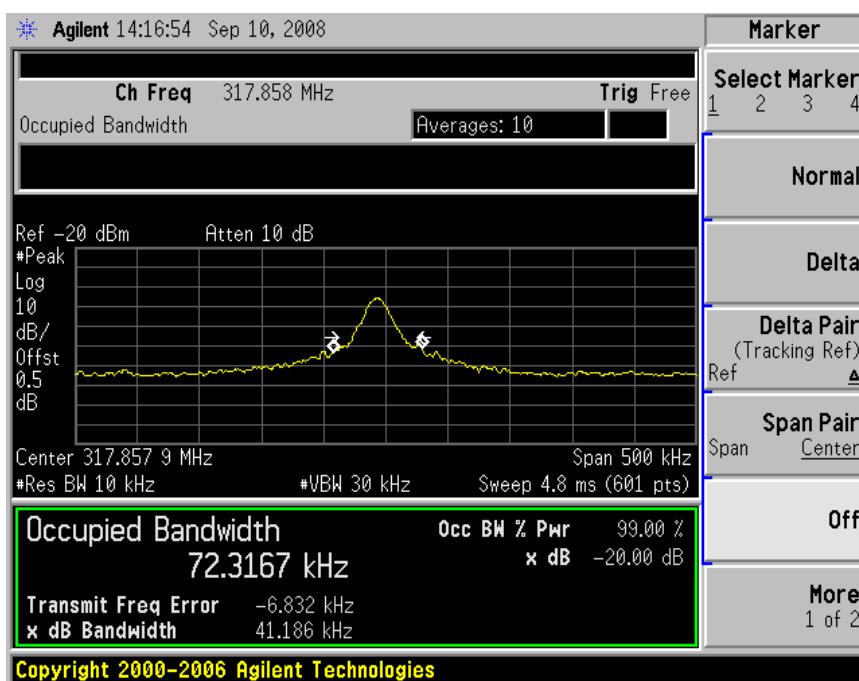



ESTECH Co., Ltd.

B# 1015, World Venture Center II,  
426-5 Gasan-dong, Guro-gu,  
Seoul, 158-803, Korea



Electromagnetic  
Interference  
Test Report

## 7. Photographs of test setup

### 7.1 Setup for Radiated Test : 30 ~ 1000 MHz

[ Front ]




[ Rear ]





**ESTECH Co., Ltd.**


Room 1015, World Venture Center 11,  
426-5 Gasan-dong, Gumcheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## 7.2 Setup for Radiated Test :Above 1000 MHz

[ Front ]

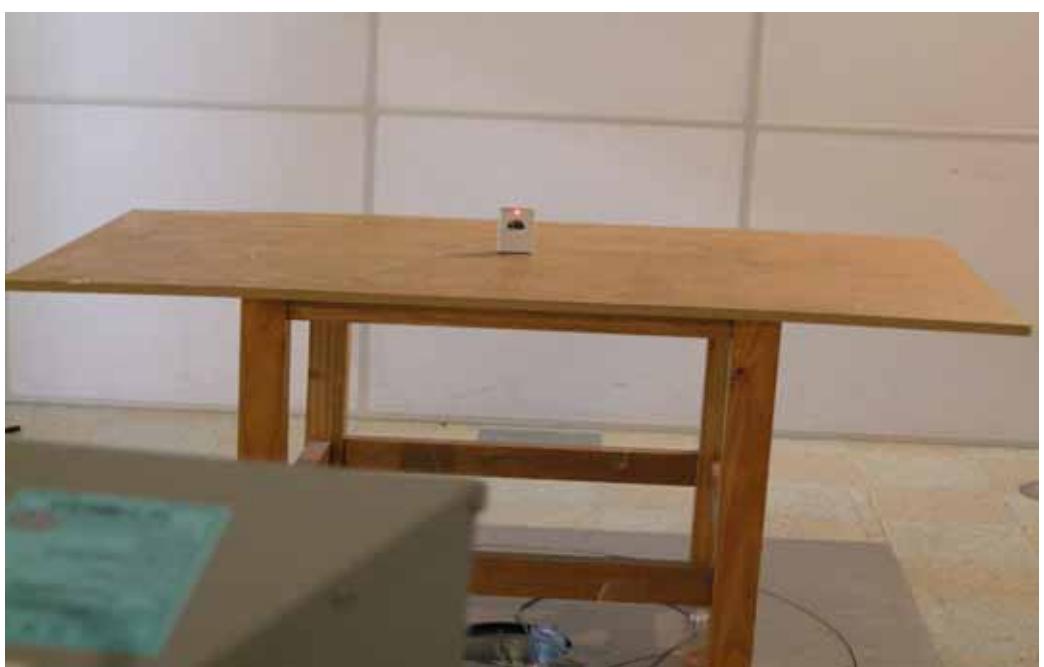



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guro-gu,  
Seoul, 158-803, Korea



Electromagnetic  
Interference  
Test Report

## 8. Photographs of EUT

[ Front ]



[ Rear ]







ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



Electromagnetic  
Interference  
Test Report

## Appendix 1. Test data for Duty Cycle

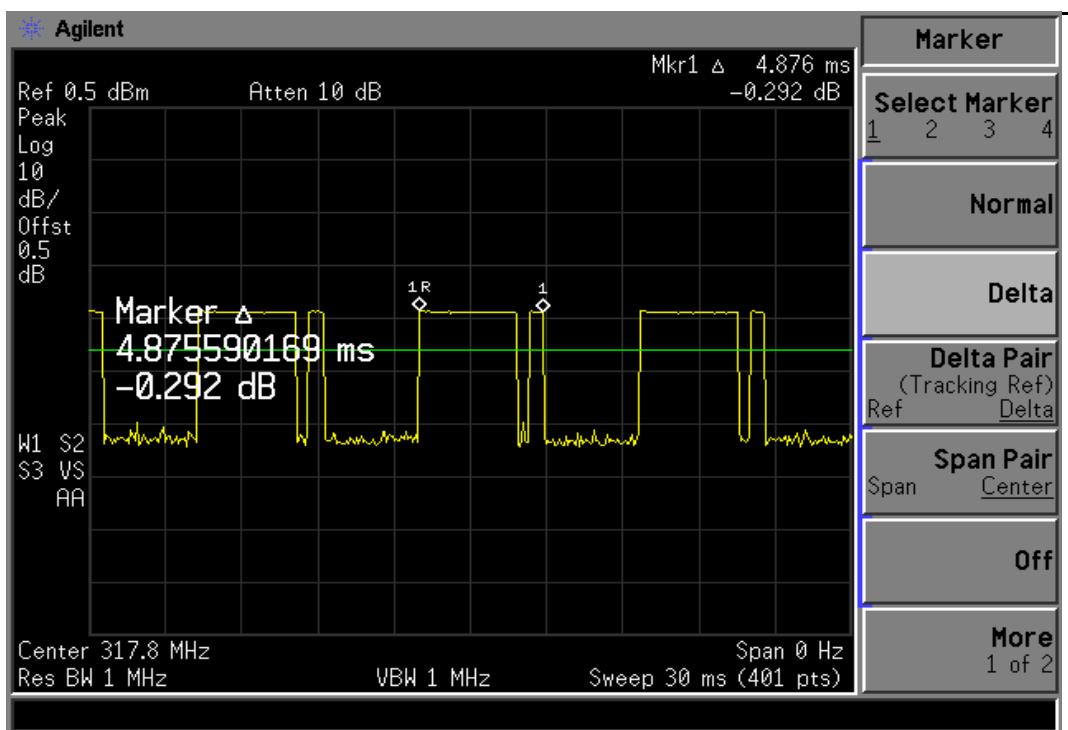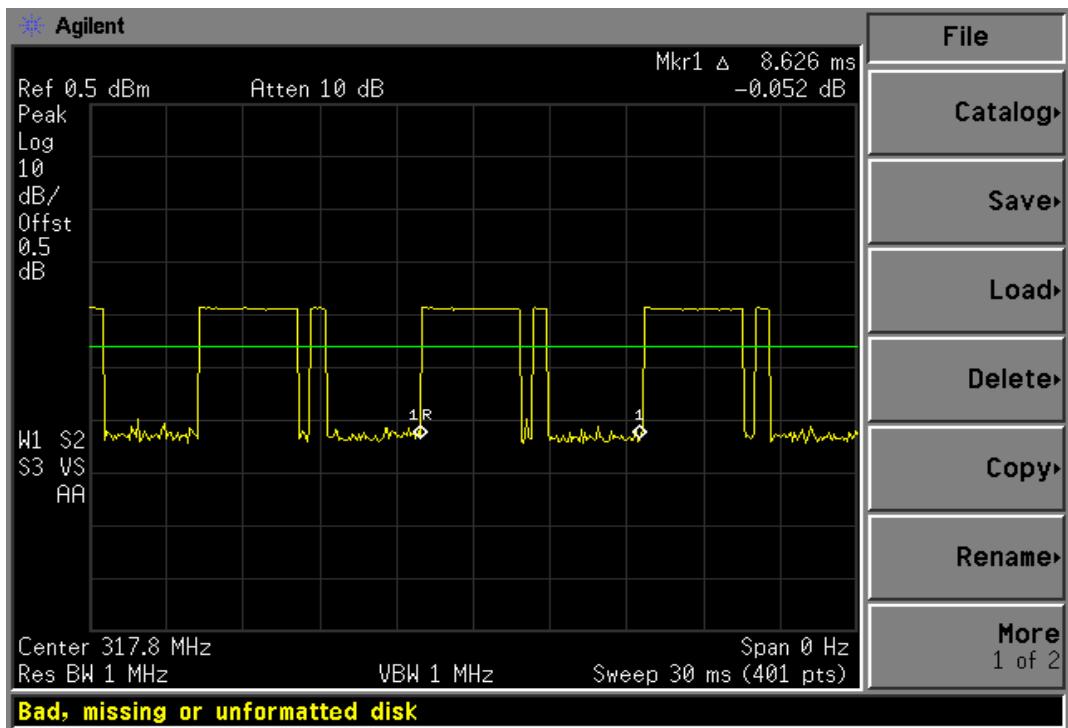

$$\text{Duty Cycle : } 4.876/8.626 * 100 = 56.53\%$$



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



Electromagnetic  
Interference  
Test Report

## Appendix 2. Test data for Less than 5 seconds

