



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 1 of 15
Date: Jan. 14, 2003

Product Name: PC System
Model Number: CUATRO 11
Applicant: Advance Creative Computer Corp. (DTK Computer Taiwan)
2F, No. 28, Lane 80, Nangang Road, Sec. 3, Taipei 115,
Taiwan, R.O.C.
Date of Receipt: Sep. 11, 2002
Finished date of Test: Oct. 07, 2002
Applicable Standards: 47 CFR Part 15, Subpart B, Class B
ANSI C63.4:1992

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : W. Huang, Date: Jan 14, 2003
(Wolfgang Huang)

Approved By : J. Ho, Date: 1/14/2003
(Johnson Ho, Director)

NVLAP[®]
Lab Code: 200099-0



Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1 DOCUMENT POLICY	3
1.2 TEST STATEMENT.....	3
2. DESCRIPTION OF EUT AND TEST MODE	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3 DESCRIPTION OF TEST MODE	4
2.4 DESCRIPTION OF SUPPORT UNIT	5
3. DESCRIPTION OF APPLIED STANDARDS	5
4. CONDUCTED EMISSION TEST.....	6
4.1 CONDUCTED EMISSION LIMIT.....	6
4.2 TEST EQUIPMENT.....	6
4.3 TEST SETUP	7
4.4 TEST PROCEDURE	7
4.5 EUT OPERATING CONDITION	7
4.6 TEST RESULT	8
5. RADIATED EMISSION TEST.....	9
5.1 RADIATED EMISSION LIMIT.....	9
5.2 TEST EQUIPMENT.....	10
5.3 TEST SET-UP	11
5.4 TEST PROCEDURE	12
5.5 EUT OPERATING CONDITION	12
5.6 RADIATED EMISSION TEST RESULT.....	13
6. TERMS OF ABRIVATION.....	15

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	TEST REPORT	Reference No.:A03011306 Report No.: FCBA02091101-01 Page: 3 of 15 Date: Jan. 14, 2003
---	--------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A03011306 Report No.: FCBA02091101-01 Page: 4 of 15 Date: Jan. 14, 2003
---	----------------------	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PC System
MODEL NO.	CUATRO 11
POWER SUPPLY	DC from PC
CABLE	N/A

NOTE : For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
CPU	INTEL	PENTIUM 4 (2G)	N/A	N/A
POWER	ENLIGHT EN-8201931	SI-C200M2	DOC	N/A
FDD	SAMSUNG	SFD-321B	N/A	N/A
HDD	SEAGATE	ST3408/0A	N/A	N/A
M/B	DTK	MS-6526	DOC	N/A
CD-ROM	SAMSUNG	SC-152	DOC	N/A

2.3 DESCRIPTION OF TEST MODE

The EUT was pre-tested under the following operation mode:

VGA Resolution :800 x 600、1024x 768、2048 x 1536

The higher emission were found under VGA Resolution : 2048 x 1536 and therefore the configuration was chosen for emission final test.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<p>TEST REPORT</p>	<p>Reference No.:A03011306 Report No.: FCBA02091101-01 Page: 5 of 15 Date: Jan. 14, 2003</p>
---	---------------------------	--

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4 and CISRP22. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID / DOC	CABLE
1	MONITOR	SAMSUNG	PG17IS	N/A	1.8m unshielded power cord 1.5m shielded data cable
2	PRINTER	EPSON	STYLUS C20SX	N/A	1.6m unshielded power cord 1.5m shielded data cable
3	MODEM	SMARTTEAM	103/212A	EF56A5103/212A	1.5m unshielded DC power cable 1.5m shielded data cable
4	MICROPHONE	TAKY	UDM-606	N/A	1.8m unshielded data cable
5	JOYSTICK	LOGITECH	J-YG8	N/A	1.8m unshielded data cable
6	WALKMAN	AIWA	HS-P102	N/A	1.6m unshielded data cable
7	SPEAKER	JS	J-205A	N/A	1.8m unshielded power cord 1.6m unshielded data cable
8	KEYBOARD	ACER	6311-TA	N/A	1.6m unshielded data cable
9	MOUSE (PS2)	LOGITECH	M-S34	DZL211029	1.6m unshielded data cable
10	MOUSE (USB)*2	LOGITECH	M-BE58	DOC	1.6m unshielded data cable

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15 Subpart B, Class B

All tests have been performed and recorded as per the above standards.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 6 of 15
Date: Jan. 14, 2003

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE :

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	JUL. 2003 R&S
LISN	50 μ H, 50 ohm	SOLAR ELECTRONICS	8012-50-R-24-BNC / 924839	JUN. 2003 ETC
LISN	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2003 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

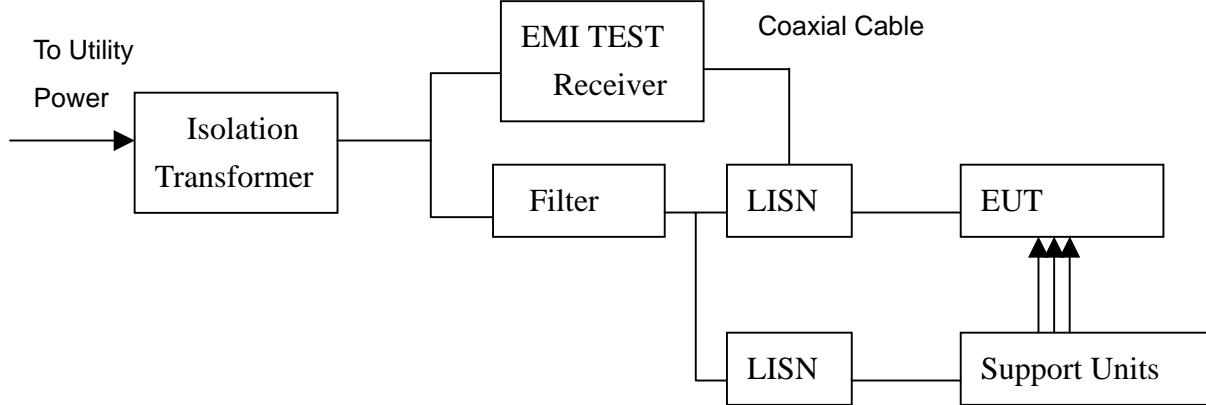

NOTE :

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2m*2m)
2. For the actual test configuration, please refer to the photos of testing.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4 and CISRP22. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50µH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.5 EUT OPERATING CONDITION

1. Under Windows XP ran "EMI TEST" and "WINFCC" program.
And PC sent "H" pattern or accessed the following peripherals :
 - Color Monitor
 - RS232
 - Keyboard
 - Mouse
 - Printer
 - FDD
 - HDD



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 8 of 15
Date: Jan. 14, 2003

4.6 TEST RESULT

Temperature:	26 °C	Humidity:	65 %RH
Ferquency Range:	0.15 – 30 MHz	Test Mode	N/A
Receiver Detector:	Q.P. and AV.	Tested By:	Joey Chen

Power Line Measured : Line

Frequency (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.169	0.20	44.5	-	44.7	-	65.0	55.0	-20.3	-
0.255	0.20	38.7	-	38.9	-	61.6	51.6	-22.7	-
0.350	0.20	36.7	-	36.9	-	58.9	48.9	-22.0	-
1.900	0.20	36.7	-	36.9	-	56.0	46.0	-19.1	-
2.350	0.20	30.0	-	30.2	-	56.0	46.0	-25.8	-
11.980	0.44	36.5	-	36.9	-	60.0	50.0	-23.1	-

Power Line Measured : Neutral

Frequency (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.169	0.20	46.0	-	46.2	-	65.0	55.0	-18.8	-
0.345	0.20	39.0	-	39.2	-	59.1	49.1	-19.9	-
0.950	0.20	37.0	-	37.2	-	56.0	46.0	-18.8	-
1.900	0.20	36.0	-	36.2	-	56.0	46.0	-19.8	-
2.380	0.20	37.7	-	37.9	-	56.0	46.0	-18.1	-
4.700	0.31	37.1	-	37.4	-	56.0	46.0	-18.6	-

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. **: Measurement does not apply for this frequency.
5. Margin value = Emission level - Limit
6. The emission of other frequencies were very low against the limit.
7. -: The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 9 of 15
Date: Jan. 14, 2003

5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

CISPR 22 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 10m)	
	dB μ V/m		dB μ V/m	
30 – 230	40		30	
230 - 1000	47		37	

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

FCC Part 15, Subpart B limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dB μ V/m) (at 3m)		Class B (dB μ V/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart B limit of radiated emission for open case frequency below 1GHz

FREQUENCY (MHz)	Class B (dB μ V/m) (at 3m)	
	Q.P. or PK.	
30-88	46.0	
88-216	49.5	
216-960	52.0	
Above 960	60.0	

FCC Part 15, Subpart B limit of radiated emission for open case frequency above 1GHz

FREQUENCY (MHz)	Class B (dB μ V/m) (at 3m)	
	PK.	AV.
Above 1000	80.0	60.0

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A03011306 Report No.: FCBA02091101-01 Page: 10 of 15 Date: Jan. 14, 2003
---	----------------------	---

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2003 R&S
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/9701-1124	APR. 2003 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/9012-3619	JAN. 2003 ETC
SPECTRUM ANALYZER	9 kHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2003 ETC
PRE AMPLIFIER	1 GHz TO 26 GHz	HP	8449B/ 3008A01019	NOV. 2002 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	MAY. 2003

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



5.3 TEST SET-UP

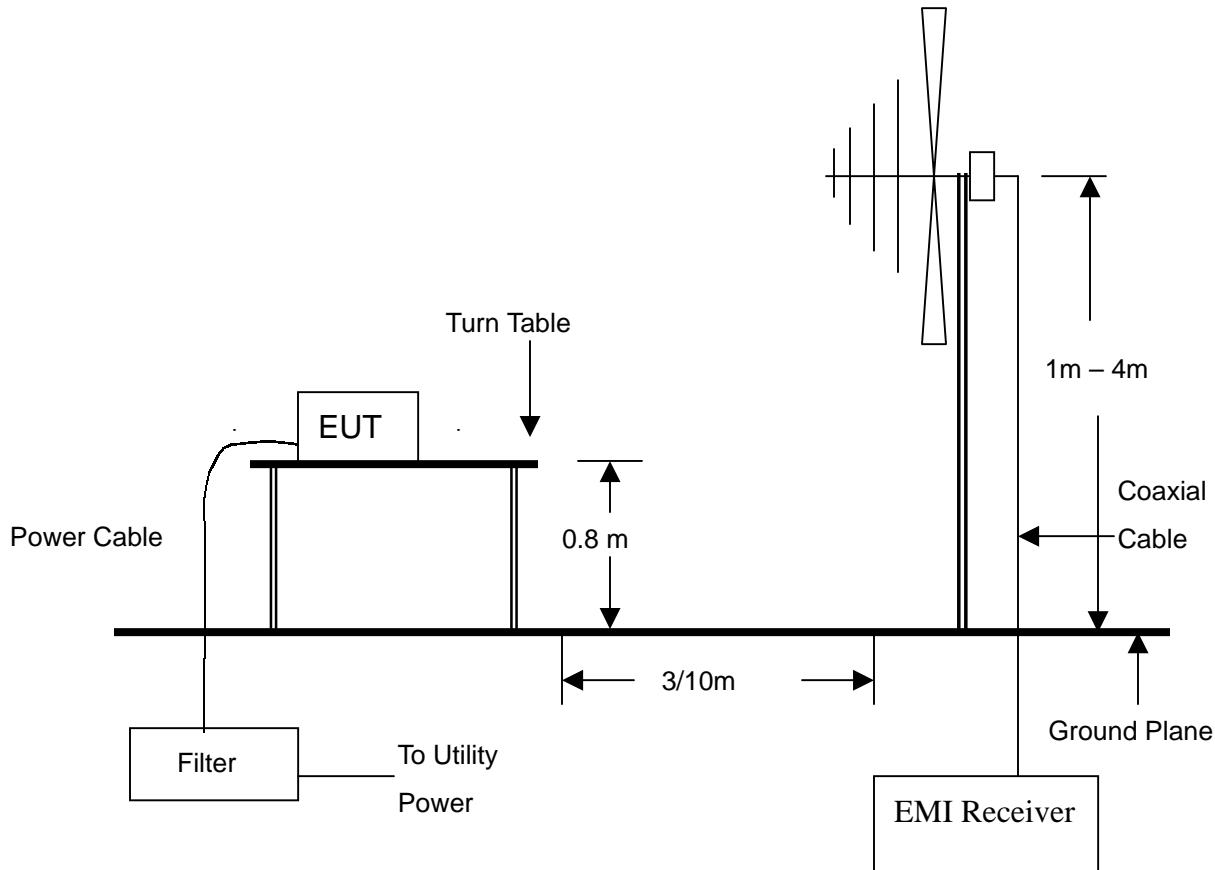

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 12 of 15
Date: Jan. 14, 2003

5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 13 of 15
Date: Jan. 14, 2003

5.6 RADIATED EMISSION TEST RESULT

Temperature:	30 °C	Humidity:	60 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	10m
Receiver Detector:	Q.P.	Tested Mode:	N/A
Tested by:	Jack Wang		

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
66.6180	1.02	7.30	18.2	26.5	30.0	-3.5	276.5	4.0
178.5720	1.61	10.20	10.3	22.1	30.0	-7.9	46.1	3.8
432.1400	2.61	16.65	12.7	32.0	37.0	-5.0	192.3	3.5
552.6080	3.12	19.65	6.4	29.2	37.0	-7.8	182.7	3.0
568.3190	3.25	20.03	6.1	29.4	37.0	-7.6	283.4	3.0
802.4730	3.08	23.04	6.4	32.5	37.0	-4.5	86.3	2.0

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
66.6180	1.02	7.30	17.5	25.8	30.0	-4.2	326.5	1.0
132.2740	1.38	7.36	16.8	25.5	30.0	-4.5	94.6	1.3
190.7130	1.59	10.40	13.4	25.4	30.0	-4.6	85.1	1.5
532.8420	3.15	19.24	9.6	32.0	37.0	-5.0	164.3	2.0
600.3180	2.70	20.80	8.2	31.7	37.0	-5.3	322.6	2.3
866.7840	3.14	23.84	6.0	33.0	37.0	-4.0	318.5	2.5

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 14 of 15
Date: Jan. 14, 2003

Temperature: 30 °C
Frequency Range: 1 GHz-10 GHz
Receiver Detector: PK.or AV.
Tested by: Jack Wang

Humidity: 60 %RH
Measured Distance: 3m
Tested Mode: N/A

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ(°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
1207.82	-33.85	24.82	#	43.2	#	34.2	80.0	60.0	#	-25.8	246.5	2.0
1406.51	-31.46	25.09	#	46.8	#	40.4	80.0	60.0	#	-19.6	273.5	2.0
1814.72	-33.05	26.49	#	48.3	#	41.7	80.0	60.0	#	-18.3	281.4	2.5
1874.26	-32.86	26.72	#	42.7	#	36.6	80.0	60.0	#	-23.4	83.5	2.5
1933.64	-32.53	26.95	#	45.2	#	39.6	80.0	60.0	#	-20.4	94.2	3.0
2168.35	-32.32	27.54	#	42.5	#	37.7	80.0	60.0	#	-22.3	176.5	3.0

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ(°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
1202.84	-33.87	24.64	#	41.8	#	32.6	80.0	60.0	#	-27.4	184.3	1.5
1335.27	-33.09	24.94	#	43.5	#	35.3	80.0	60.0	#	-24.7	26.0	1.5
1406.72	-31.46	25.09	#	46.3	#	39.9	80.0	60.0	#	-20.1	59.0	2.0
1471.28	-30.21	25.24	#	44.7	#	39.7	80.0	60.0	#	-20.3	326.5	2.3
1734.62	-33.00	26.19	#	41.8	#	35.0	80.0	60.0	#	-25.0	311.4	2.5
2270.42	-32.46	27.74	#	40.3	#	35.6	80.0	60.0	#	-24.6	322.7	2.5

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. -: The Peak reading value also meets average limit and measurement with the average detector is unnecessary.
6. #: The AVG. reading value meets average limit and measurement with the Peak detector is unnecessary.
7. The CPU frequency was 2 GHz for the test.



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A03011306
Report No.: FCBA02091101-01
Page: 15 of 15
Date: Jan. 14, 2003

6. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction