

Electromagnetic Emission

F C C M E A S U R E M E N T R E P O R T

VERIFICATION OF COMPLIANCE


FCC Part 15 Certification Measurement

PRODUCT : LCD TV MONITOR
MODEL/TYPE NO : LN170X
FCC ID : QTH170
APPLICANT : T3 DIGITAL CO., LTD.
150-812 3rd Fl, Sungwon bld, 651 Daerim-3Dong,
Youngdungpo-Gu, Seoul, Korea
Attn. : Woo-Jin, Oh / Executive Director
FCC CLASSIFICATION : Part 15 Class B Unintentional Radiators
Computing Device Peripheral (JBP)
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : N/A
TEST REPORT No. : E03.1014. FCC.514N
DATES OF TEST : October 12~14, 2003
DATES OF ISSUE : October 14, 2003
TEST LABORATORY : ETL Inc (FCC Registration Number : 95422)
584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyounggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This LCD TV MONITOR, Model LN170X has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B : Unintentional Radiators.

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Name : Yo han, park

Title : Chief Engineer & Lab.Manager

E-RAE Testing Laboratory Inc.
584 Sangwhal-ri, Kanam-myon,
Yaju-kun, Kyounggi-do,
469-885, Korea



Table of Contents

ATTACHMENT A: COVER LETTER(S)

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User Manual**
- Appendix G. Schematics**

FCC MEASUREMENT REPORT

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name : T3 DIGITAL CO., LTD.
Address : 150-812 3rd Fl, Sungwon bld, 651 Daerim-3Dong, Youngdungpo-Gu, Seoul, Korea
Attention : Woo-Jin, Oh / Executive Director

- **EUT Type :** LCD TV MONITOR
- **Model Number :** LN170X
- **FCC Identifier :** QTH170
- **S/N :** N/A
- **Modulation :** N/A
- **FCC Rule Part(s) :** Part 15 Subpart B Unintentional Radiators
- **Test Procedure :** ANSI C63.4-1992
- **FCC Classification :** Part 15 Class B Unintentional Radiators
Computing Device Peripheral (JBP)
- **Dates of Tests :** October 12~14, 2003
- **Place of Tests :** ETL Inc
EMC Testing Lab (FCC Registration Number : 95422)
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E03.1014.FCC.514N

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the T3 DIGITAL CO., LTD., Model: LN170X

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the T3 DIGITAL CO., LTD. / LCD TV MONITOR/ LN170X

Please refer to Users manual

2.2 General Specification

- Chassis Type : Plastic & Metal Cover
- List of Each OSC. Or X-Tal. Freq. (>=1MHz) : X-TAL – 12.0MHz, 14.31818MHz, 27.0MHz
- Chipset Brand & Part No. : T0947SXH – trumpon, AD9884A – ANALOG DEVICES, K4S161622D – SAMSUNG
: t3810BV – trumpon, STV2310-4 – ST, TEA6425 – ST, TDA7440D – ST
- Number of Layers : Main board – 4Layers, Inverter board – 4 Layers, Front board – 2 Layers
- Visible Screen size : 337.92mm (H) X 270.336mm (V)
- Pixel Range : 0.264(H) X 0.264(V)
- Number of Pixel : 1280 X 1024 Pixels
- Luminance of White : 270 cd / m²
- Type : a-si TFT-LCD (Liquid Crystal Display)
- Viewing Angle : Hor (L:70, R:70), Ver (L:60, R:60)
- H. V Frequency : H - 30~79.98KHz (Auto set), V – 56~75Hz (Auto set)
- Displayable color : 16.2M Color
- Input signal : Analog 0.7Vpp Positive (75)
- Video signal : NTSC, PAL/SECAM
- Audio signal : MONO
- Video type : CVBS, S-VHS, COMPOSITE VIDEO
- Separate Sync Signal : TTL Level Positive or Negative
- Composite Sync Signal : TTL Level Positive or Negative
- Green Video+Composite : Composite Sync: Vp-p Negative (Video 0.7Vp-p positive)
- Voltage Use : Flow 100-240V, 60Hz/50Hz DC 12V/3.5A
- On Working regularity : Maximum 45W
- At safe mode : Under 3W

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from the another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test receiver ESHS 30 to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the EMI Test receiver ESHS 30 was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

The EUT was connected as user's guide. And during the test executed test program for EMI Test Program with "H" Pattern display on LCD TV Monitor.

Operating Mode	Worst case
Stand by	X
TV Receiving	X
" H " Pattern Display	O

Resolution	Frequency	Worst case
640 X 480	37.5Kz / 75.0Hz	X
800 X 600	46.9KHz / 75.0Hz	X
1024 X 768	60KHz / 75.0Hz	X
1152 X 960	60KHz / 60.0Hz	X
1280 x 1024	79.98KHz / 75.0Hz	O

O: Worst case investigated during the Test

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – LCD TV MONITOR (T3 DIGITAL CO., LTD.)

FCC ID : QTHLN170X
Model Name : LN170X
Serial No. : N/A
Manufacturer : T3 DIGITAL CO., LTD.
Power Supply Type : Switching, DC 12V/3.5A of AC/DC Adapter
Power Cord : Non-shielded, Detachable:1.2m
Port : DC IN:1, D-SUB IN: 1, AUDIO IN: 2, S-VIDEO:; 1, VIDEO IN: 1, H/P OUT: 1, PC AUDIO IN: 1, COMPOSITE: 5, ANTENNA IN: 1

Support Unit 1 – PC (DELL)

FCC ID : DOC
Model Name : MMP
Serial No. : BK1W31S
Manufacturer : DELL
Power Supply Type : Switching
Power Cord : Non-Shielded, Detachable, 1.2m
Port : RGB IN:1, Parallel:1, RS-232:2, PS/2: 2, USB: 2, RJ-45:1
: Audio in:1, Audio out:1, MIC IN:1

Support Unit 2 – Keyboard (DELL)

FCC ID : DOC
Model Name : SK-8000
Serial No. : MY-0970WY-38843-0CB-3064
Manufacturer : DELL
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded: 1.2m

Support Unit 3 - MOUSE (LOGITECH)

FCC ID : JNZ201213
Model Name : M-S48a
Serial No. : HCA13711225
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.2m

Support Unit 5 – USB MOUSE (LOGITECH)

FCC ID : JNZ211360
Model Name : M-U48a
Serial No. : N/A
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.0m

Support Unit 6 – Serial Mouse (INFO)

FCC ID	: EMJMUSOG
Model Name	: MUSOG
Serial No.	: Q36E
Manufacturer	: INFO
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Un-Shielded, 1.2m

Support Unit 7 – Printer (SINDORICO)

FCC ID	: N/A
Model Name	: Colorcab330
Serial No.	: 11-03098
Manufacturer	: LEXMARK INTERNATIONAL INC.
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable, 1.2m
Data Cable	: Shielded, 1.5m

Support Unit 8 – EAR MIC (DAWA)

FCC ID	: N/A
Model Name	: NCD-4JV
Serial No.	: N/A
Manufacturer	: DAWA
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Non-Shielded, 1.0m

Support Unit 9 – DVD PLAYER (ALPHACAST)

FCC ID	: N/A
Model Name	: DVD-M100
Serial No.	: N/A
Manufacturer	: ALPHACAST
Power Supply Type	: Supply from AC/DC Adapter of DC 12V/ 3.0A
Power Cord	: N/A
Data Port	: Audio out: 6, Component Video: 3, RCA: 3 S-VHS: 1, COAXIAL: 1, Remote: 1, DC IN: 1

5. TEST RESULTS

5.1 Summary of Test Results


This equipment is Power Supply system from DC12V of AC/DC Adapter, The Conducted Test data is AC/DC Adapter Power Test data

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.


Test Rule Parts	Measurement Required	Result
15.107	Conducted Emissions Measurement	Passed by – 11.48 dB
15.109	Radiated Emissions Measurement	Passed by – 4.73 dB

The data collected shows that the T3 DIGITAL CO., LTD., LCD TV MONITOR, LN170X complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits.


The equipment modified, mechanical or circuits to improve EMI status during a measurement.
No EMI suppression device(s) was added and/or modified during testing.

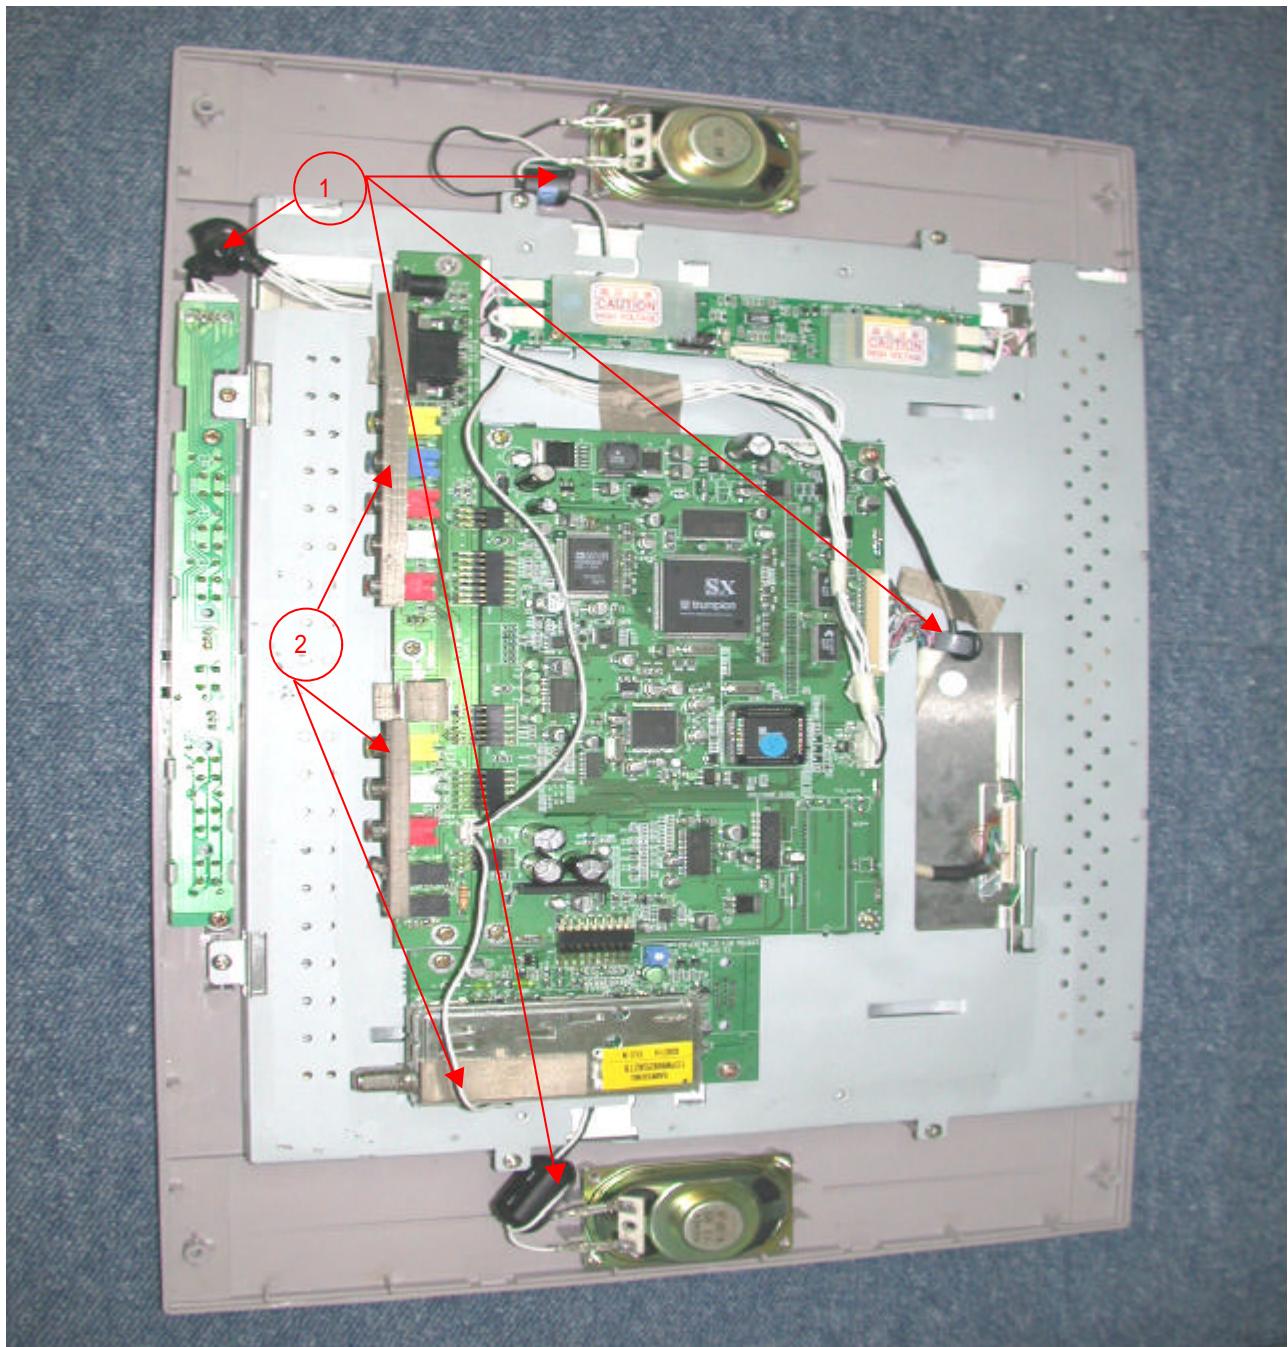

1. Ferrite core added in Front connector, Speaker & LCD panel connector cable
2. EMI Gasket added in Rear connector board & Tuner board

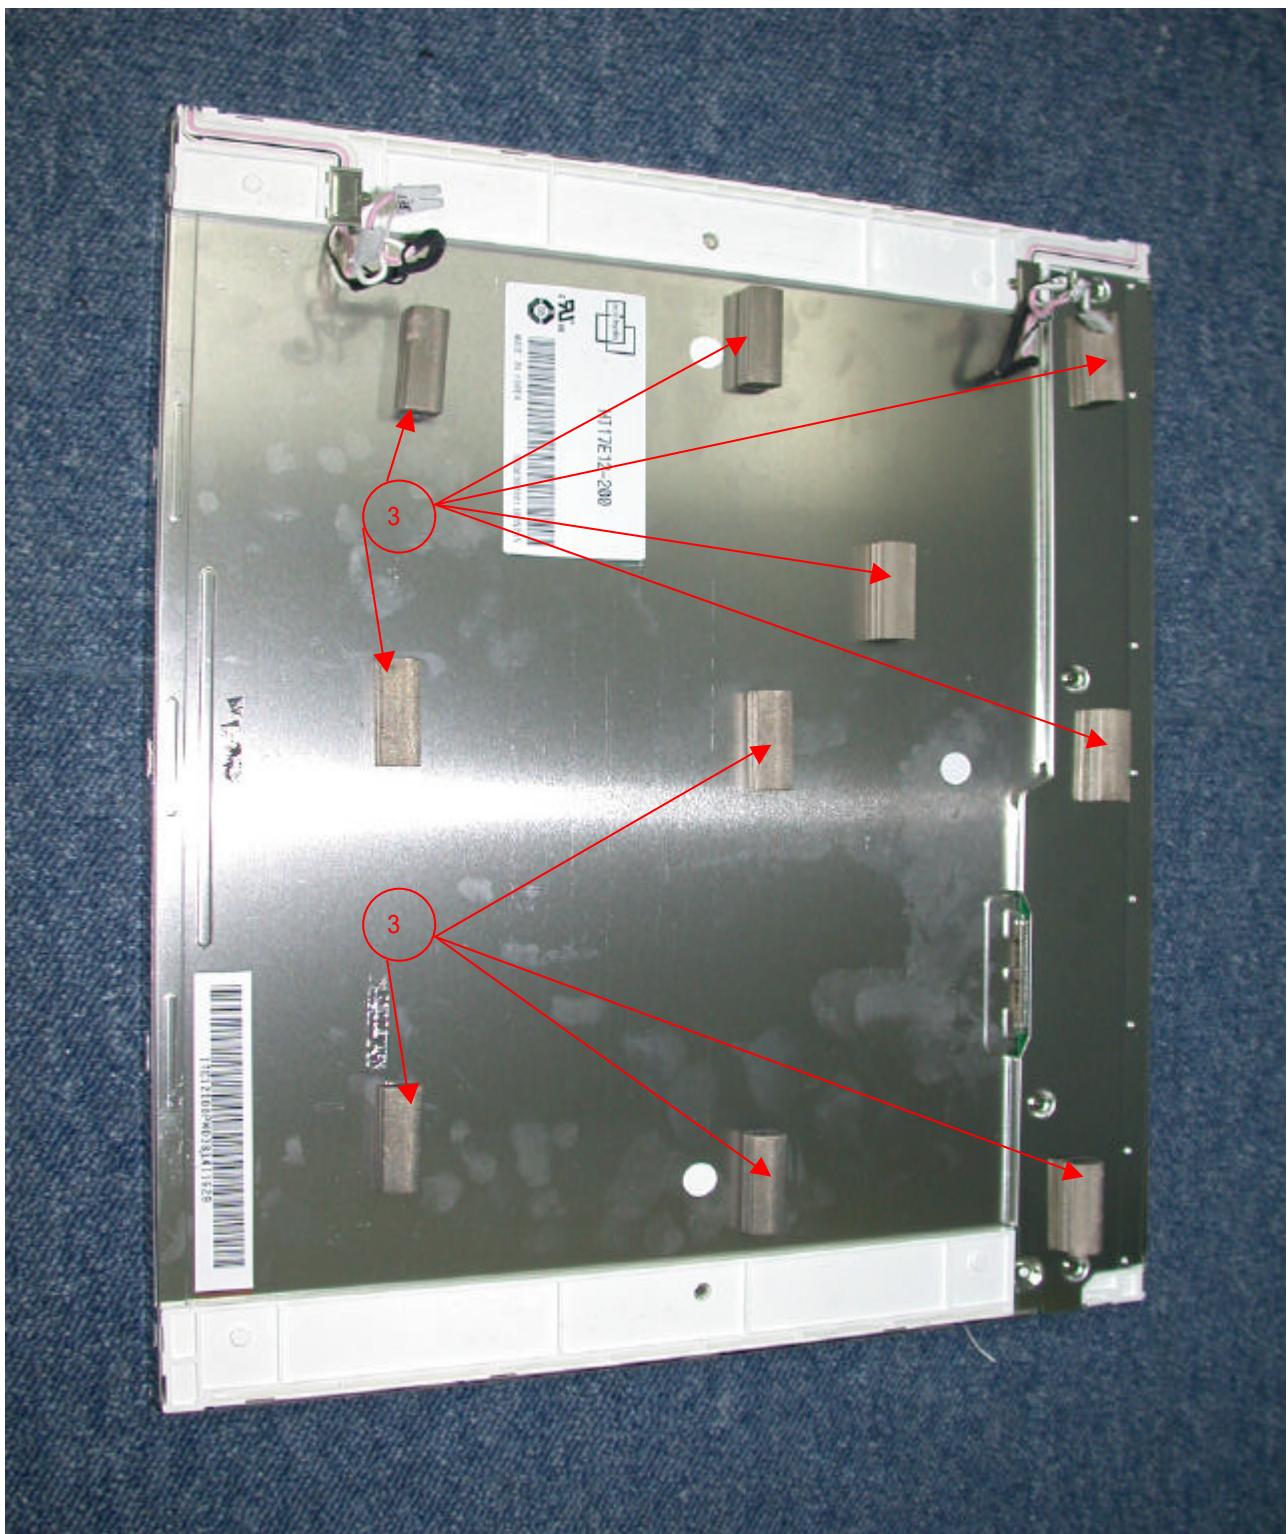

3. EMI Gasket added in LCD Panel

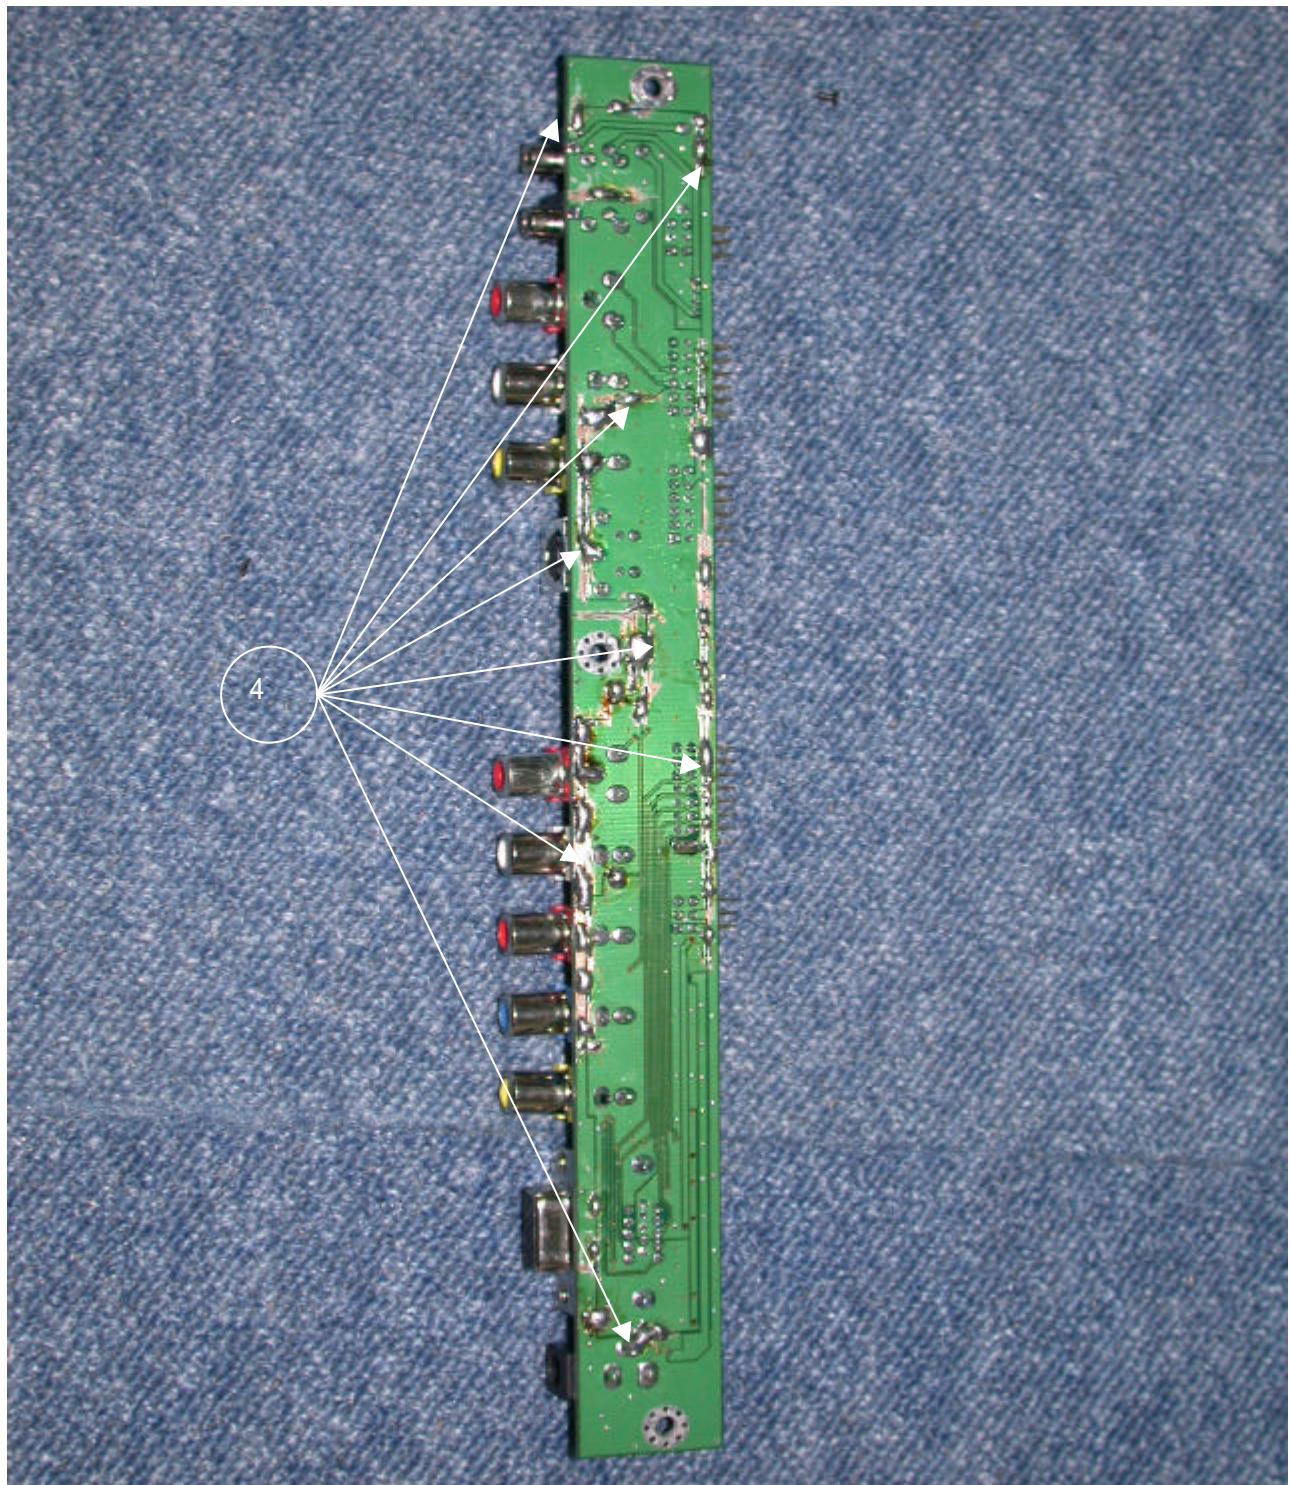

4. Ground added in Rear connector board

5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	LCD TV MONITOR / LN170X (SN:N/A)		
Limit apply to	15.107 Class B		
Test Date	October 13, 2003		
Operating Condition	"H" Pattern display Mode, Resolution 1280 X 1024 79.98KHz/75.0Hz		
Environment Condition	Humidity Level : 40 %RH, Temperature : 20		
Result	Passed by – 11.48dB		

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of live and neutral line.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 9 KHz)

Frequency [MHz]	Reading [dB μ V]		Phase (*H/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.P. Peak	Average
0.160	53.98	35.23	H	65.46	55.46	11.48	20.23
0.211	50.11	35.57	H	63.17	53.17	13.06	17.60
0.317	42.85	-	N	59.79	49.79	16.94	-
2.757	32.29	-	N	56.00	46.00	23.71	-
5.835	33.20	-	H	60.00	50.00	26.80	-
11.35	37.28	-	N			22.72	-
15.06	33.34	-	N			26.66	-
16.55	32.88	-	N			27.12	-
26.95	33.02	-	H			26.98	-

NOTES :

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Reading
3. Measurement were performed at the AC/DC Adapter Power Inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15.107 Class B
4. If the Reading Quasi-Peak value is bellowed the Average Limit, Do not test Average Mode.

Test Engineer : C. S. Kim

5. TEST RESULTS

Line: HOT Line


ETL EMC Laboratory

Conducted Emission Test Result

EUT: LN170X
 Manuf: T3 DIGITAL CO., LTD.
 Op Cond:
 Operator: CHON SIK, KIM
 Test Spec:
 Comment: Hot

Result File: t3 #1.dat : LN170X HOT

Scan Settings		(3 Ranges)			Receiver Settings				
		Frequencies				M-Time	Atten	Preamp	OpRge
Start	Stop	Step	IF BW	Detector					
150kHz	5MHz	1000Hz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
5MHz	10MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
10MHz	30MHz	10kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	1	9kHz	30MHz	Factor					
Prescan Measurement:		Detectors:	X PK / + AV						
		Meas Time:	see scan settings						
		Peaks:	16						
		Acc Margin:	10 dB						

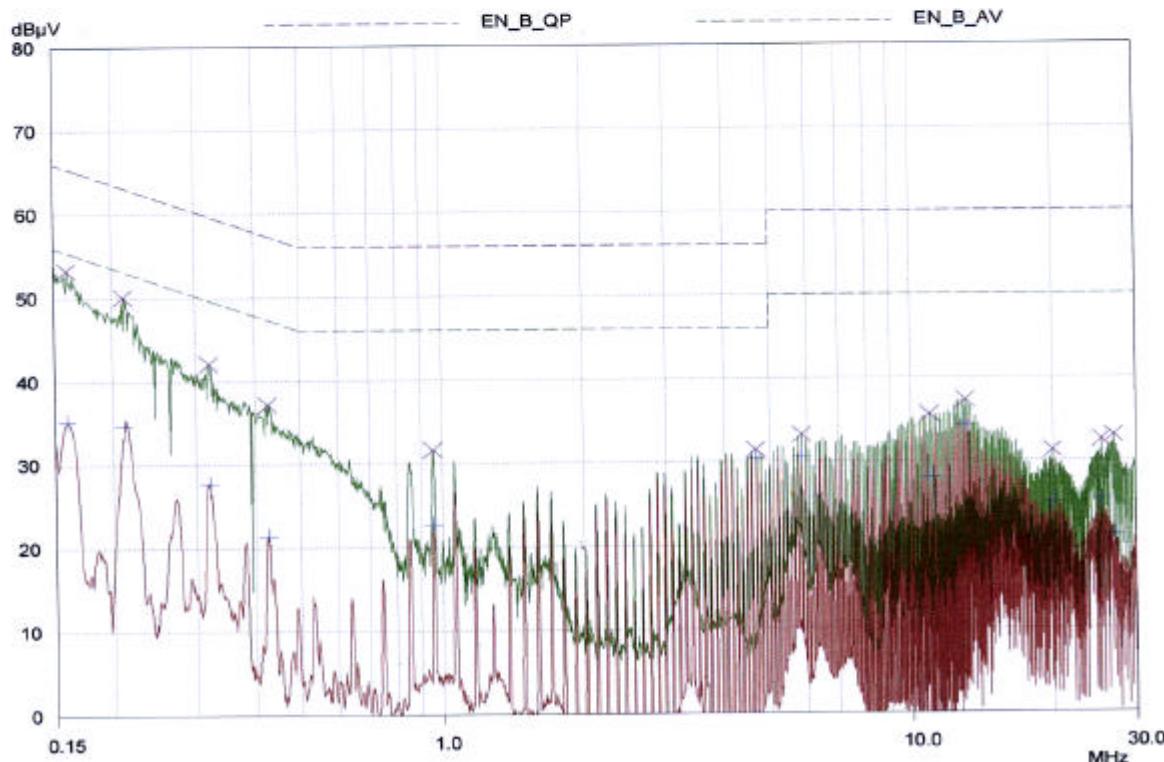

5. TEST RESULTS

Line: Neutral Line


ETL EMC Laboratory

Conducted Emission Test Result

EUT: LN170X
Manuf: T3 DIGITAL CO., LTD.
Op Cond:
Operator: CHON SIK, KIM
Test Spec:
Comment: Neutral

Result File: t3 #2.dat : LN170X NEUTRAL

Scan Settings		(3 Ranges)			Receiver Settings				
		Frequencies				M-Time	Atten	Preamp	OpRge
Start	Stop	Step	IF BW	Detector					
150kHz	5MHz	1000Hz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
5MHz	10MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
10MHz	30MHz	10kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	1	9kHz	30MHz	Factor					
Prescan Measurement:		Detectors:	X PK / + AV						
		Meas Time:	see scan settings						
		Peaks:	16						
		Acc Margin:	10 dB						

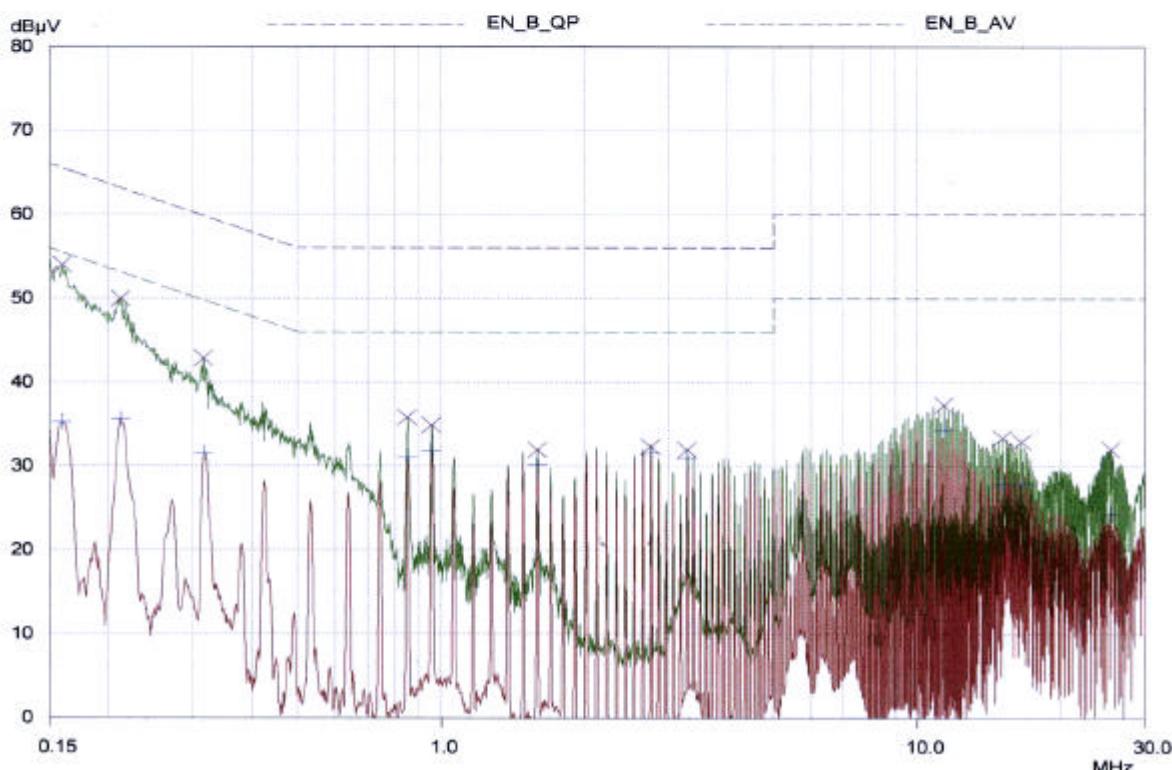

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	LCD TV MONITOR / LN170X (SN:N/A)	
Limit apply to	15.109, Class B	
Test Date	October 13, 2003	
Operating Condition	" H " Pattern display Mode Resolution 1280 X 1024 79.98KHz/75.0Hz	
Environment Condition	Humidity Level : 40 %RH, Temperature : 20	
Result	Passed by - 4.73dB	

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Measurement Distance : 10 meters

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
108.00	11.44	H	10.81	3.02	25.27	30.0	4.73
162.00	7.90	H	13.61	3.44	24.95		5.05
175.52	5.33	H	14.74	3.73	23.80		6.20
202.51	9.96	H	9.38	3.85	23.18		6.82
216.00	9.94	H	10.00	4.10	24.04		5.96
229.54	9.49	H	11.37	4.17	25.04		4.96
243.00	11.04	H	11.82	4.25	27.11	37.0	9.89
270.00	9.68	H	12.78	4.47	26.93		10.07
297.27	9.13	H	13.62	4.78	27.53		9.47
363.75	9.87	H	14.77	5.51	30.15		6.85

NOTES :

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the CISPR 22 Class B

Test Engineer : C. S. Kim

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V /m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example 1 : @ 0.160 MHz

Class B Limit	=	1874.99 uV	=	65.46 dBuV
Reading	=	53.98 dBuV		
Convert to uV	=	500.03 uV		
Margin	=	53.98 - 65.46	=	-11.48
			=	-11.48 dB below Limit

Example 2 : @ 108.0 MHz

Class B Limit	=	31.62 uV	=	30.0 dBuV/m
Reading	=	11.44 dBuV		
Antenna Factor + Cable Loss	=	13.83 dB		
Total	=	25.27 dBuV/m		
Margin	=	25.27 - 30.0	=	-4.73
			=	-4.73 dB below Limit

7. TEST EQUIPMENT LIST

List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	02-10-21
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	02-03-21
<input checked="" type="checkbox"/>	Receiver	ESHS30	R & S	84190/002	02-01-24
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7402A	HP	US39110107	03-05-21
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	02-12-27
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	02-01-10
<input checked="" type="checkbox"/>	Preamplifier	HP8447D	HP	2944A07626	03-01-10
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	03-05-23
<input type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarz Beck	3082	03-06-19
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9165	Schwarz Beck	2023	03-05-28
<input checked="" type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	03-05-09
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	02-07-03
<input checked="" type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	02-07-03
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	03-05-09
<input type="checkbox"/>	Broad-band Horn Antenna	3115	EMCO	9809-2334	02-09-20
<input type="checkbox"/>	Magnetic Loop Antenna	6502	EMCO	9810-2111	02-12-11
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input checked="" type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	03-01-10
<input checked="" type="checkbox"/>	BaroMeter	-	Regulus	-	-