

CETECOM ICT Services GmbH

Radio Satellite Communication
Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of 138 Pages

Page 1 (138)

Recognized by the
Federal Communications Commission
FCC-Identification Number: 90462
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2_3448-01-01/03
FCC Part 24/22/15
RH-28
FCC ID: QTKRH-28
IC: 661AD-RH28

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

Table of Contents**1 General information**

- 1.1 Notes**
- 1.2 Testing laboratory**
- 1.3 Details of applicant**
- 1.4 Application details**
- 1.5 Test item**
- 1.6 Test standards**

2 Technical test

- 2.1 Summary of test results**
- 2.2 Test report**

1 General information**1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telefone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-081/94-D0

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Nokia Corp. / TCC Salo
Street : P.O. Box 86 (Joensuunkatu 7 E)
City : FIN-24101 Salo
Country : Finland
Telephone : +358 (0) 50 3687 123
Telefax : +358 (0) 7180 45220
Contact : Mr. Jarkko Luoma
Telephone : +358 (0) 7180 42913
e-mail : Jarkko.Luoma@nokia.com

1.4 Application details

Date of receipt of application : 2003-11-08
Date of receipt of test item : 2003-11-12
Date of test : 2003-11-13/14/17/18
re-issue :

1.5 Test item

Type of equipment : **Triple Band GSM Mobile Phone (PCS 850/1800/1900 MHz with Bluetooth™)**
Type designation : RH-28
Manufacturer : Nokia Corporation
Street : Keilalahdentie 4
City : FIN-02150 Espoo
Country : Finland
Serial numbers : IMEI : 004400.25.172111.2 (radiated tests);
IMEI : 004400.25.172178.5 (conducted tests)

Additional information

Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Type of modulation : 300KGXW
Number of channels : 300 (PCS1900) and 125 (PCS850)
Antenna : Integral antenna
Power supply : 3,7V DC Li-ion Battery
Output power GSM 850 : cond.: 32.8 dBm Peak , ERP: 25.1 dBm (Burst);
EIRP: 27.2 dBm (Burst)
Output power GSM 1900 : cond : 30.4 dBm Peak , ERP: 28.4 dBm (Burst);
EIRP: 30.5 dBm (Burst)
Type of equipment : Temperature range : -30°C - +60°C
FCC – ID : QTKRH-28
IC : 661AD-RH28
Hardware : 0403
Software : 1.92

1.6 Test standards:

FCC Part 24, 22
FCC Part 15

2 Technical test

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link).

Remarks:

There were no differences in the RF-behavior between the two covers.

We made additional measurements for unwanted radiated emissions according to Part15 and Part24.

For AC-conducted measurements we used an AC charger ACP-12E.

Test setups :

Radiated measurements : Charger ACP-12E and Mobile (IMEI: 004400.25.172111.2)

Conducted measurements: Mobile (IMEI : 004400.251.72178.5)

Idle mode measurements were done with : Laptop computer (Sony VAJO), Printer, serial device, Data cable DKU-2 and charger ACP-12E

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing :

2003-11-19 RSC 8411 Berg M.

Date Section Name

Signature



Technical responsibility for area of testing :

2003-11-19 RSC8412 Hausknecht D.

Date Section Name

Signature



2.2 Test report

TEST REPORT

Test report no. : 2_3448-01-01/03

TEST REPORT REFERENCE**LIST OF MEASUREMENTS**

PARAMETER TO BE MEASURED	PAGE
<u>Part PCS 1900</u>	
POWER OUTPUT SUBCLAUSE § 24.232	7
FREQUENCY STABILITY SUBCLAUSE § 24.235	9
AFC FREQ ERROR vs. VOLTAGE	10
AFC FREQ ERROR vs. TEMPERATURE	10
EMISSIONS LIMITS §24.238	12
CONDUCTED SPURIOUS EMISSIONS	28
BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F	37
OCCUPIED BANDWIDTH §2.989	49
CONDUCTED EMISSIONS § 15.107/207	56
<u>PART PCS 850</u>	
POWER OUTPUT SUBCLAUSE § 22.913	58
FREQUENCY STABILITY SUBCLAUSE § 22.355	60
AFC FREQ ERROR vs. VOLTAGE	61
AFC FREQ ERROR vs. TEMPERATURE	61
EMISSIONS LIMITS §22.917	63
CONDUCTED SPURIOUS EMISSIONS	79
OCCUPIED BANDWIDTH §2.989	96
EMISSION LIMITATIONS FOR CELLULAR §22.917(F)	103
ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT PART 15.109	111
CONDUCTED EMISSIONS § 15.107/207	121
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	123
Test site	125
Photographs of the equipment	129

POWER OUTPUT**SUBCLAUSE § 24.232****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	30.4	30.3
1851.4		30.4	30.3
1880.0	0	29.6	29.5
1908.6		29.6	29.4
1909.8	0	29.6	29.5
Measurement uncertainty		±0.5 dB	

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.1 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{ dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements (Radiated)

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	30.3	28.2	24.3	22.2
1851.4	0	30.4	28.3	24.4	22.3
1880.0	0	30.5	28.4	24.5	22.4
1908.6	0	30.3	28.2	24.3	22.2
1909.8	0	30.0	27.9	24.0	21.9
Measurement uncertainty		$\pm 3\text{ dB}$			

FREQUENCY STABILITY**SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

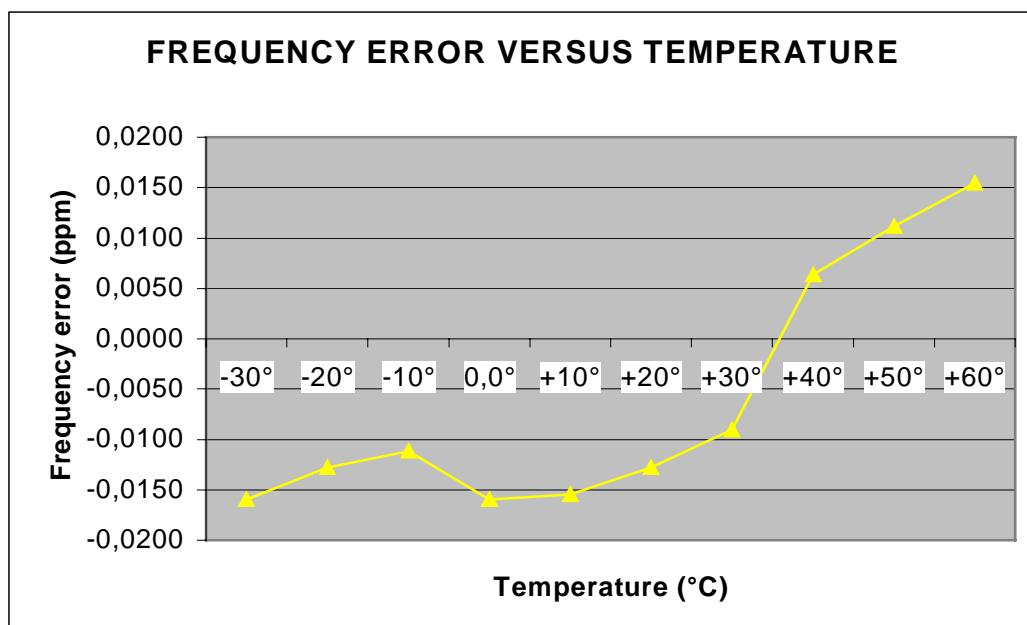
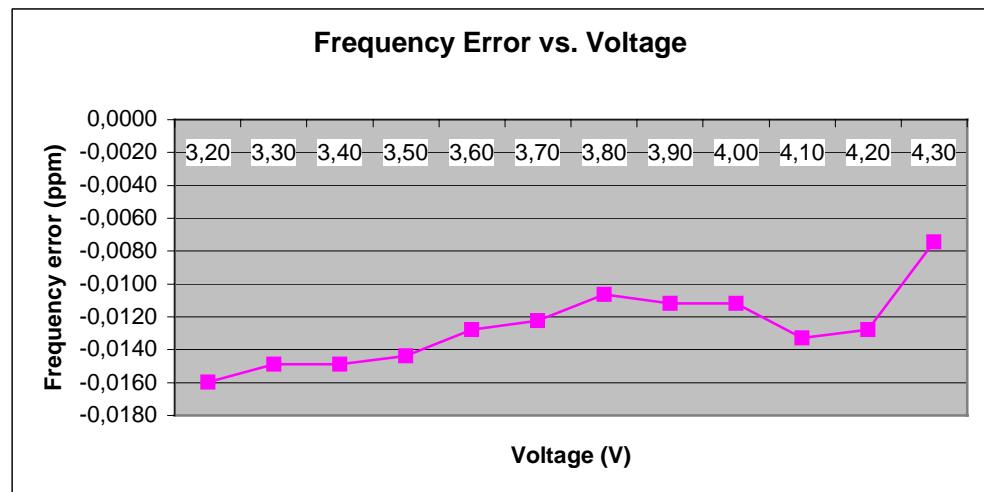
According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.6 V dc.

AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	-30	-0,00000160	-0,0160
3.4	-28	-0,00000149	-0,0149
3.5	-28	-0,00000149	-0,0149
3.6	-27	-0,00000144	-0,0144
3.7	-24	-0,00000128	-0,0128
3.8	-23	-0,00000122	-0,0122
3.9	-20	-0,00000106	-0,0106
4.0	-21	-0,00000112	-0,0112
4.1	-21	-0,00000112	-0,0112
4.2	-25	-0,00000133	-0,0133
4.3	-24	-0,00000128	-0,0128
4.4	-14	-0,00000074	-0,0074

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-30	-0,00000160	-0,0160
-20	-24	-0,00000128	-0,0128
-10	-21	-0,00000112	-0,0112
±0.0	-30	-0,00000160	-0,0160
+10	-29	-0,00000154	-0,0154
+20	-24	-0,00000128	-0,0128
+30	-17	-0,00000090	-0,0090
+40	+12	0,00000064	0,0064
+50	+21	0,00000112	0,0112
+60	+29	0,00000154	0,0154



EMISSIONS LIMITS**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots show the worst case.
As can be seen from this data, the emissions from the test item were within the specification limit.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

EMISSION LIMITATIONS						
f (MHz)	amplitude of emission EIRP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results		
CH 512						
1850.2	30.3	-13.0 (43.3 dBc)		carrier		
no traceable signal found				complies		
CH 661						
1880.0	30.5	-13.0 (43.5 dBc)		carrier		
no traceable signal found				complies		
CH 810						
1909.8	30.0	-13.0 (43.0 dBc)		carrier		
no traceable signal found				complies		
Measurement uncertainty		$\pm 0.5\text{dB}$				

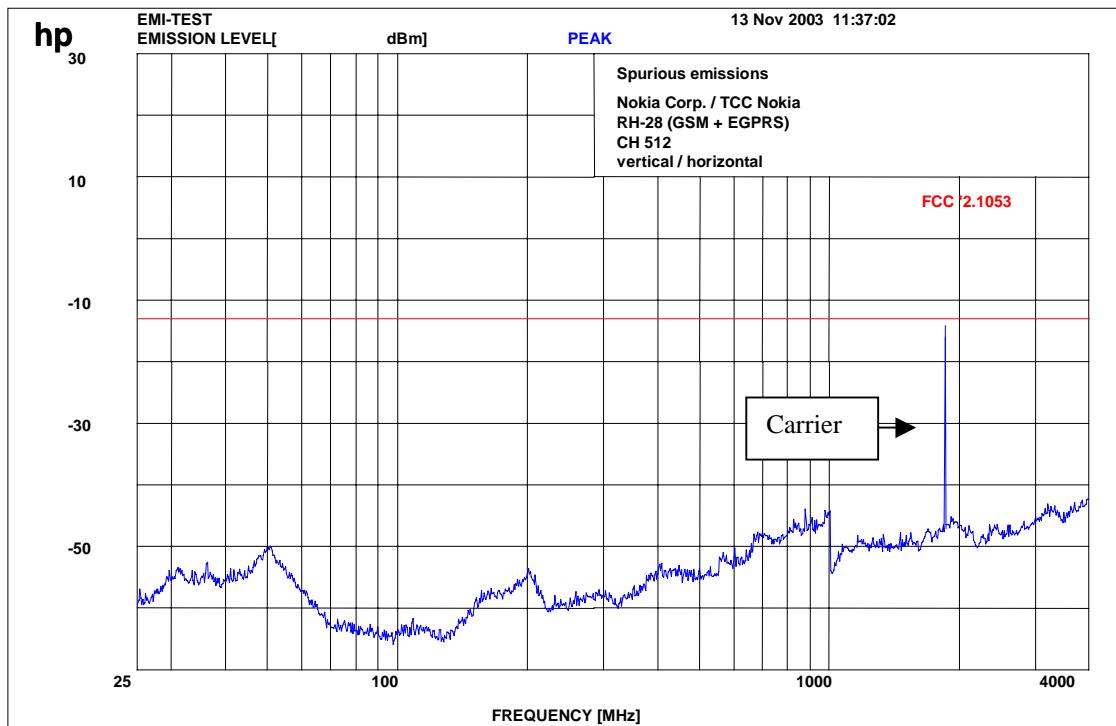
Sample calculation:

Freg	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	ERIP Result			
MHz	dBμV	dBm	dBi	dBd	dB	dBm			
1880.0	128.0	25.4	8.4	0.0	3.33	30.5			

$$\text{EIRP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dBi)}$$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 512 (up to 4 GHz)

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

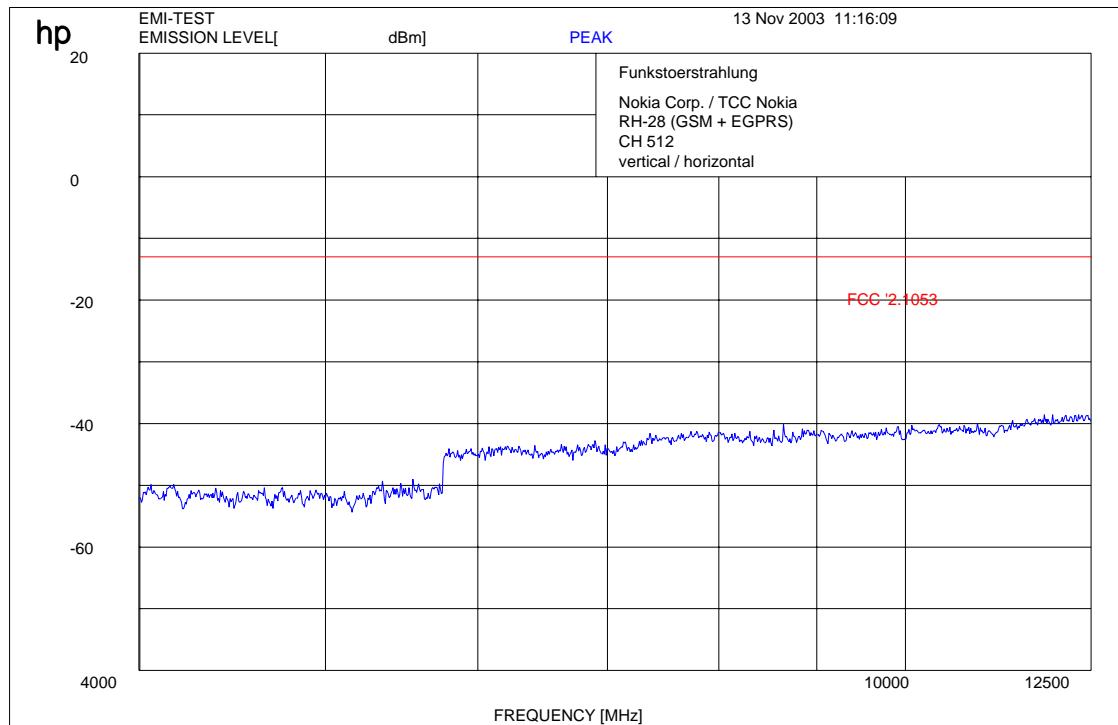
$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

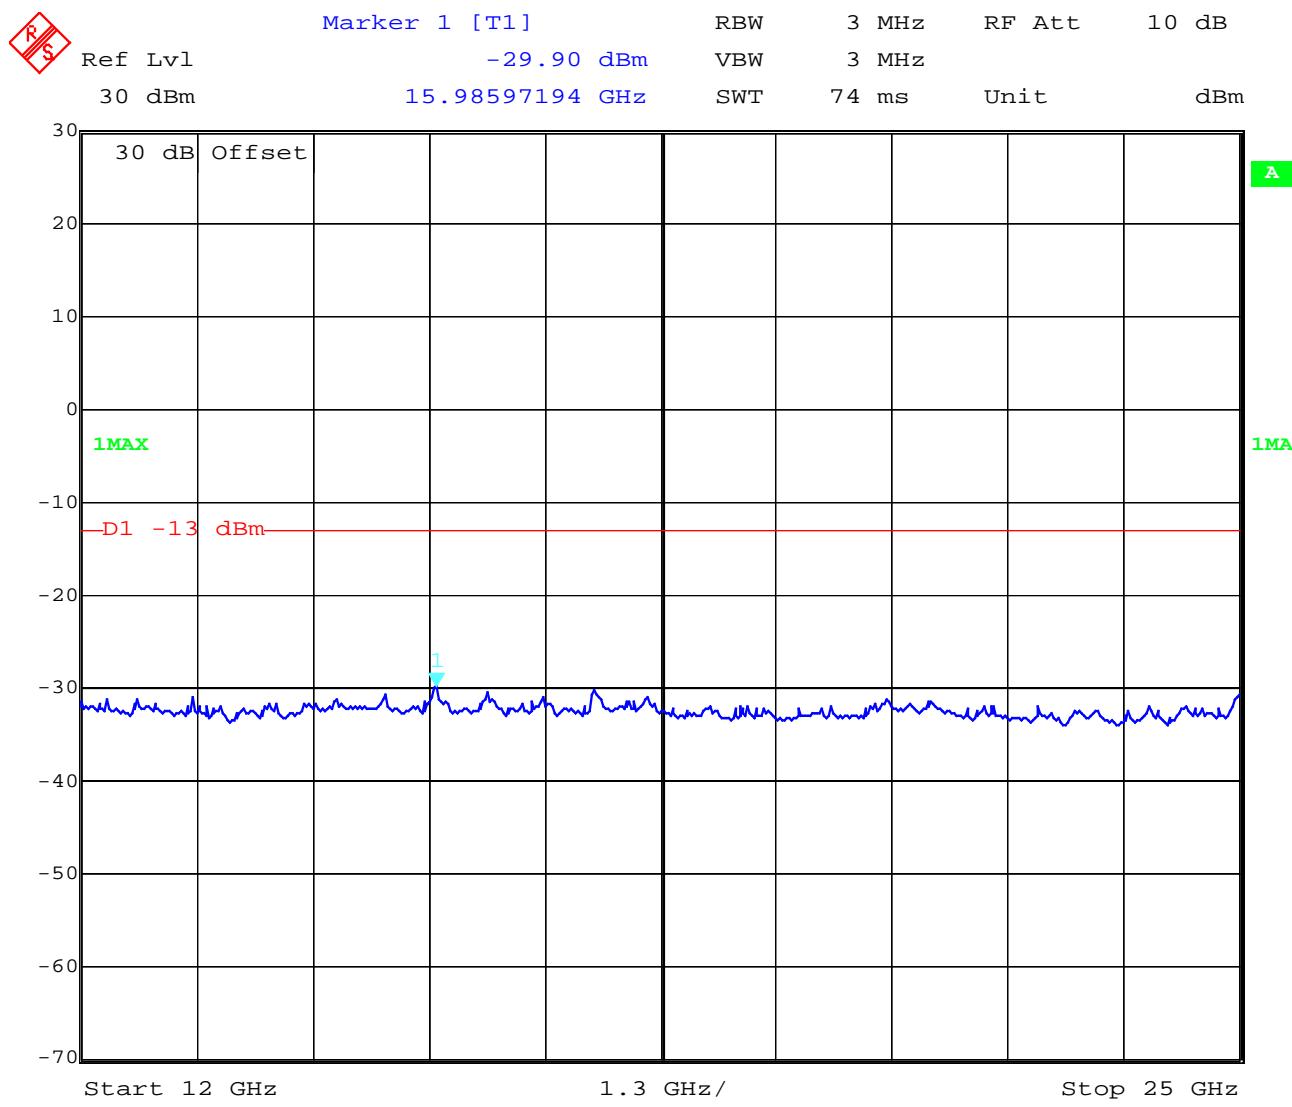
17 – 24; 64

Channel 512 (up to 12 GHz)**f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW / VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

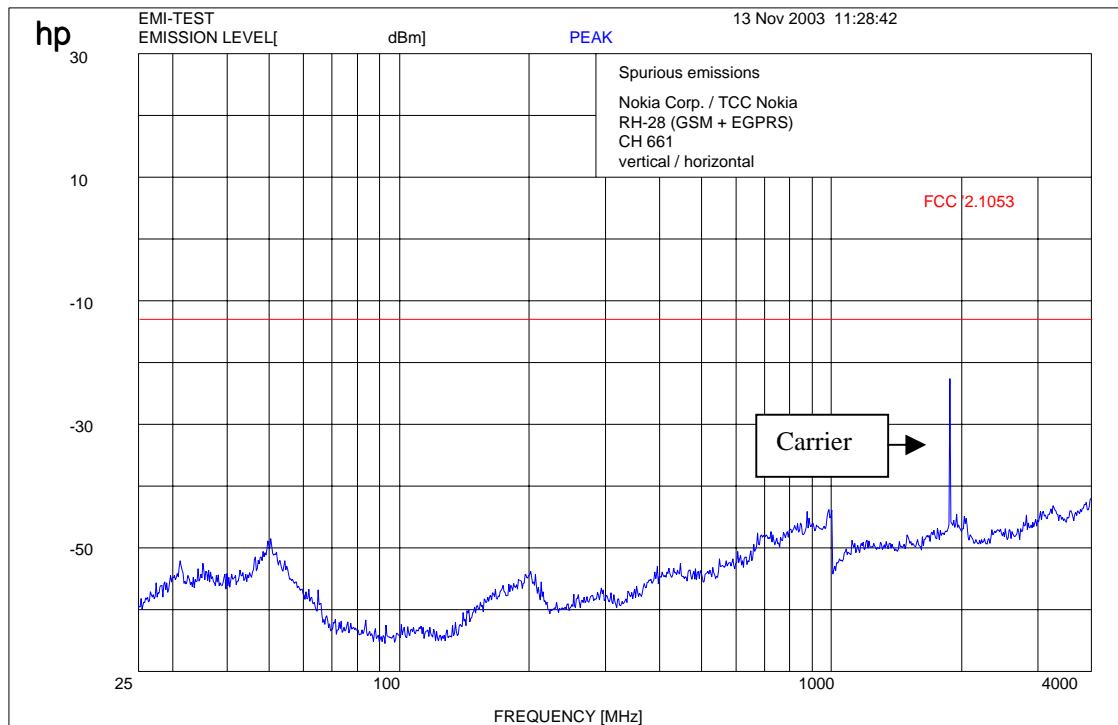
Channel 512 :- 25 GHz



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24; 64

Channel 661 (up to 4 GHz)

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

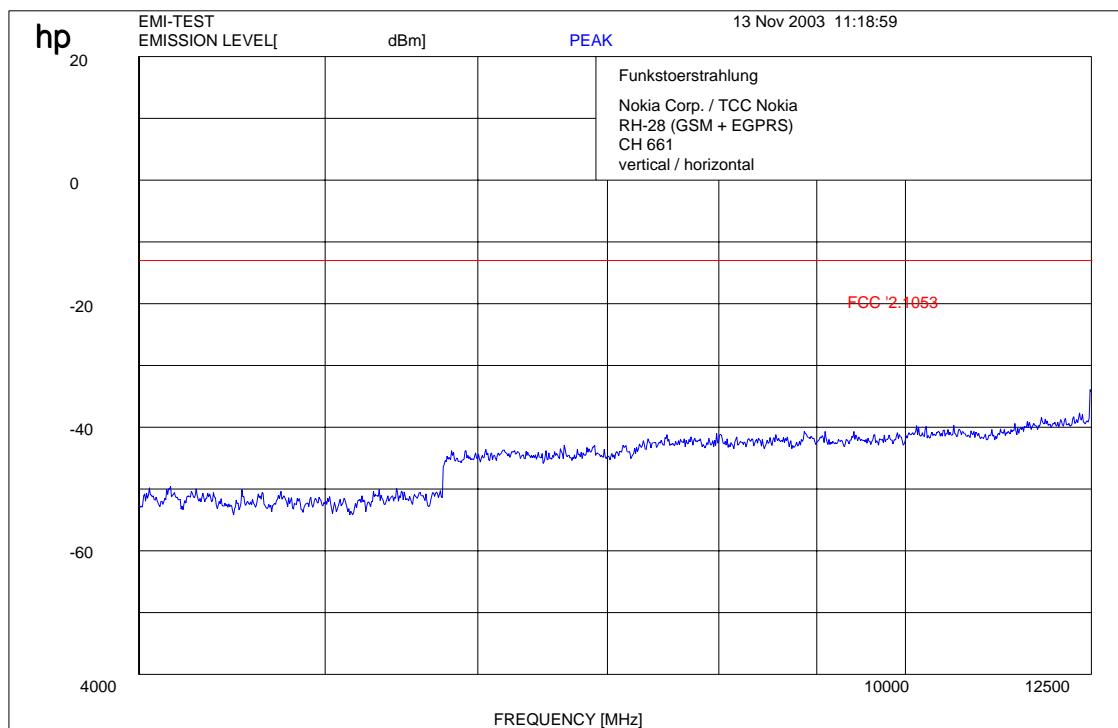
$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

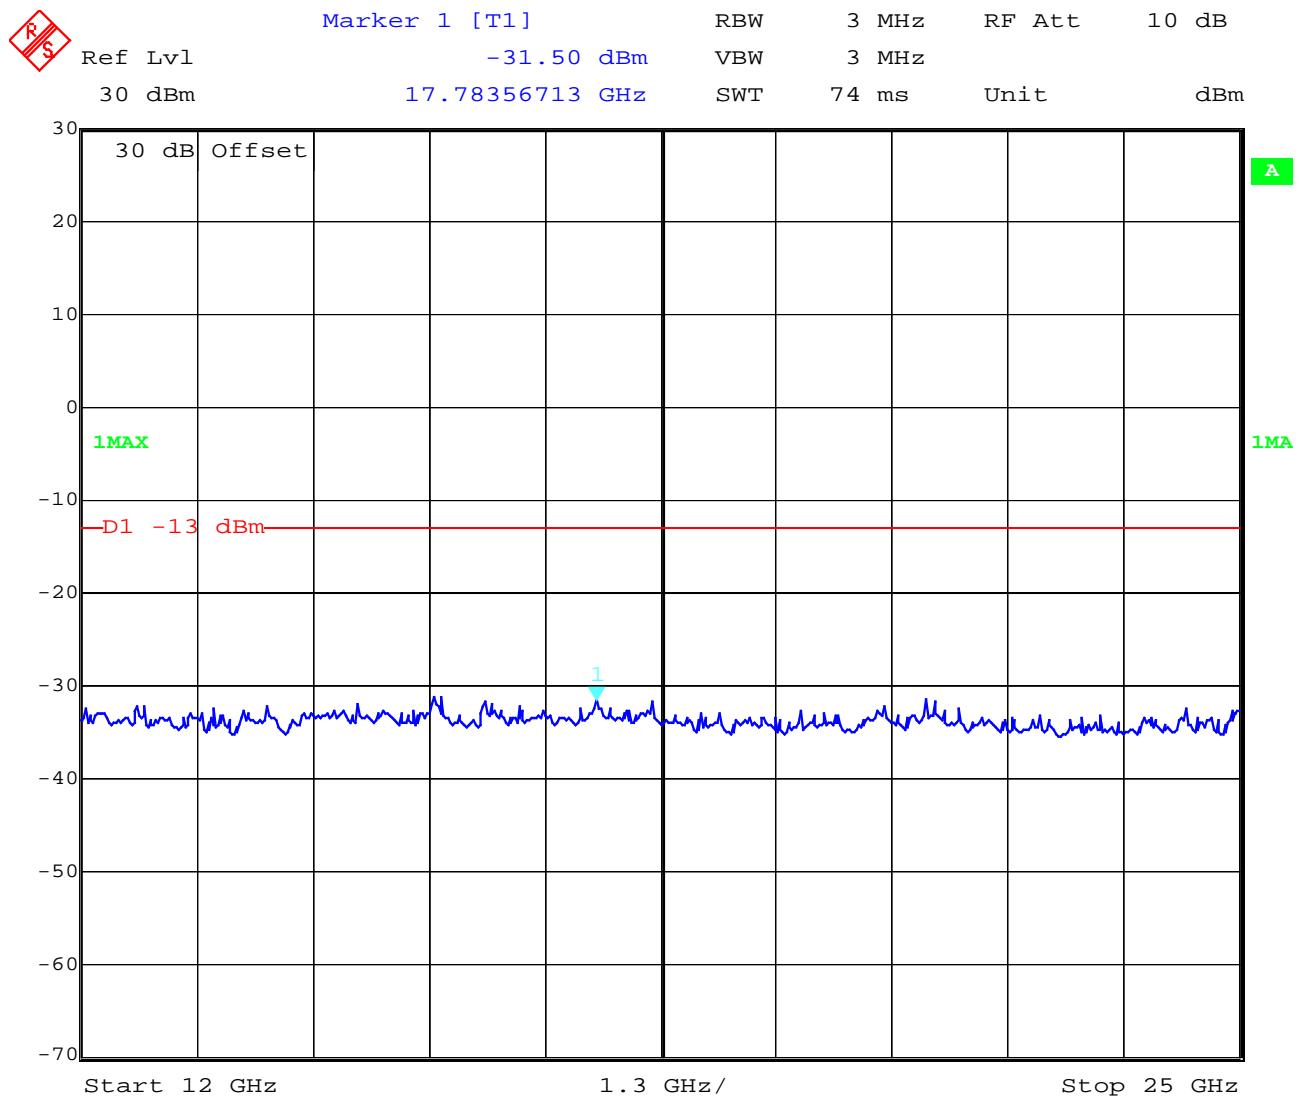
(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 12 GHz)**f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW / VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

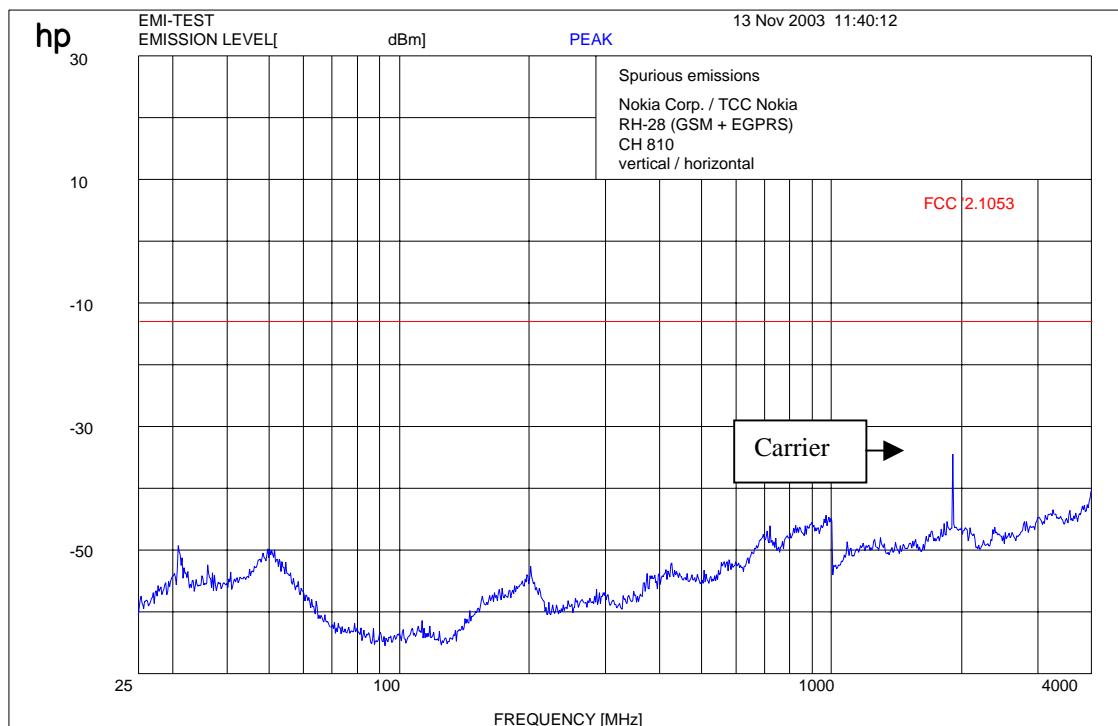
(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 : -25 GHz**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24; 64

Channel 810 up to 4 GHz

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

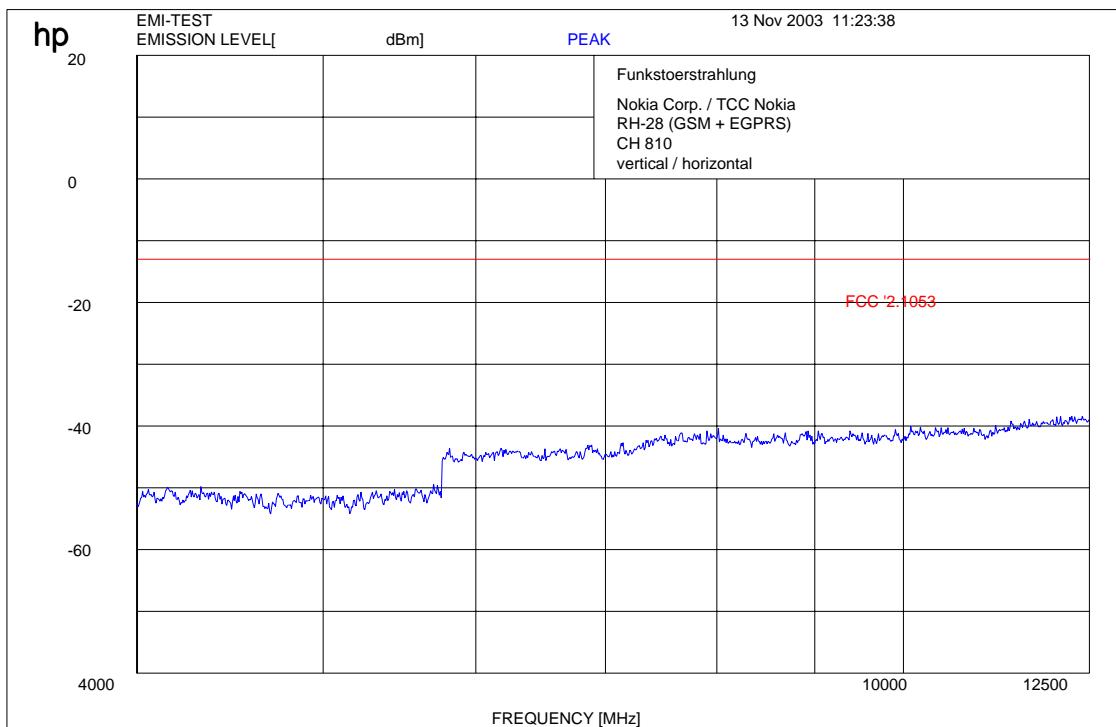
$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

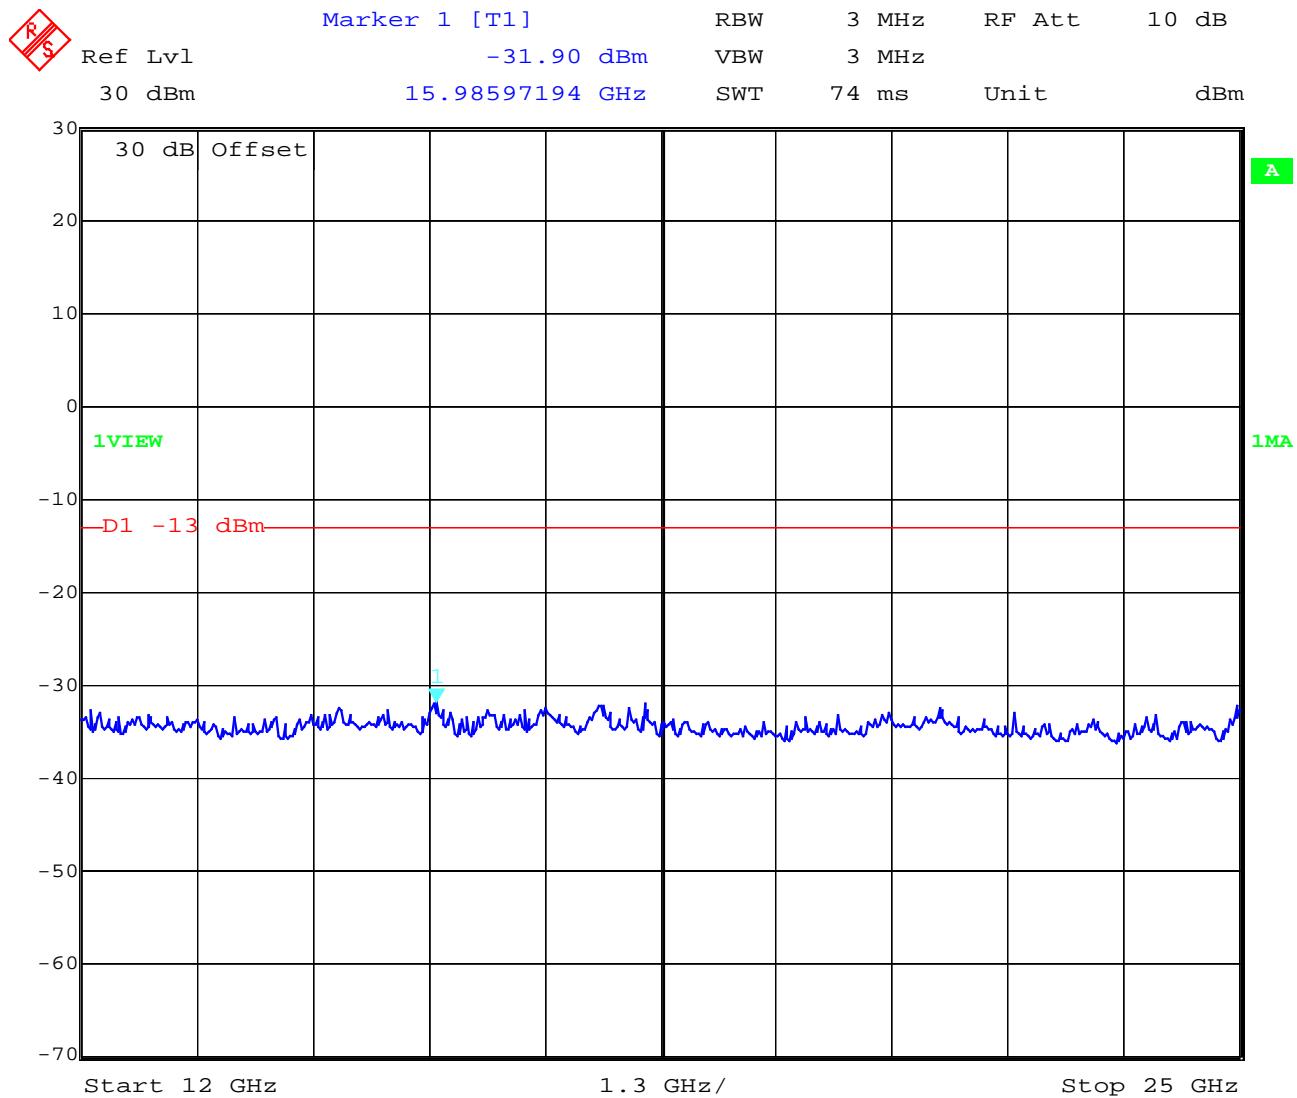
(for reference numbers see test equipment listing)

17 – 24, 64

Channel 810 up to 12 GHz**f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 810 : -25 GHz**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

Idle-Mode**RECEIVER SPURIOUS RADIATION****§ 15.109****Radiated**

These measurements were done with a Laptop computer (Sony VAJO, Printer, serial device, Data cable DKU-2 and charger ACP-12E)

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
33.41	QP	25.4						
49.63	QP	14.8						
149.81	QP	48.4						
260.26	QP	81.3						
621.25	QP	26.3						
Measurement uncertainty			$\pm 3 \text{ dB}$					

f < 1 GHz : RBW/VBW: 100 kHz

f \geq 1 GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table**Limits****SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

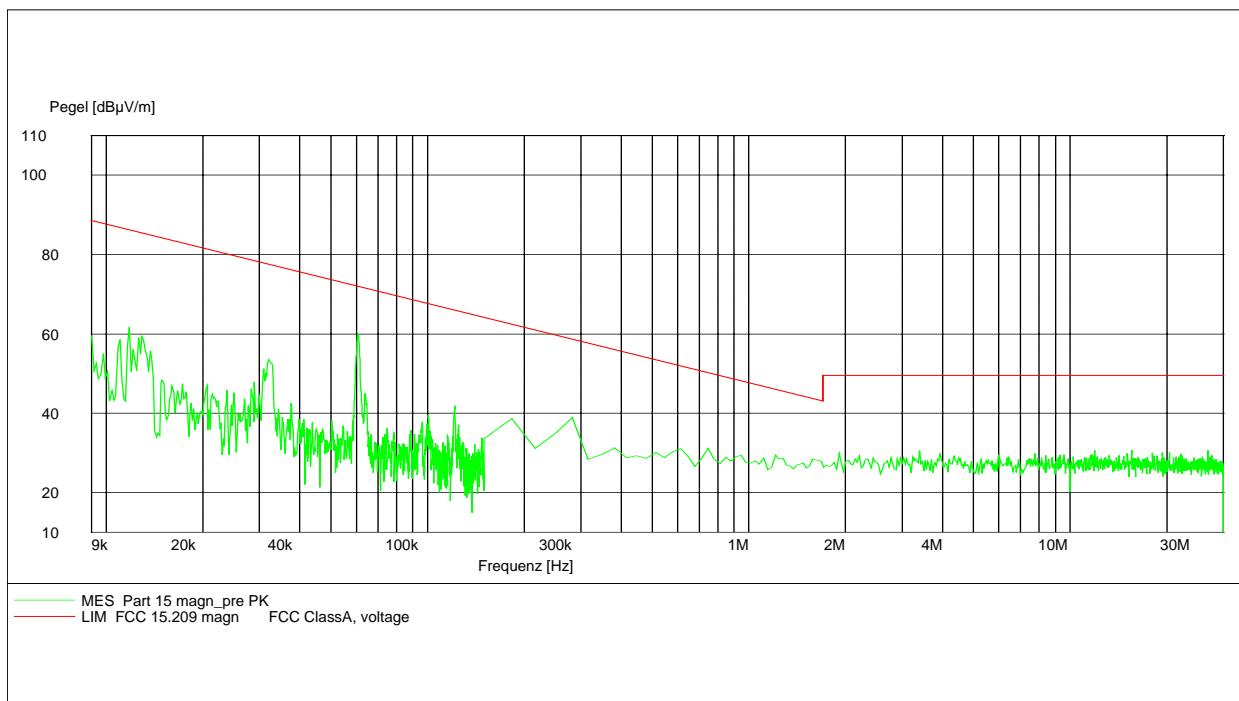
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

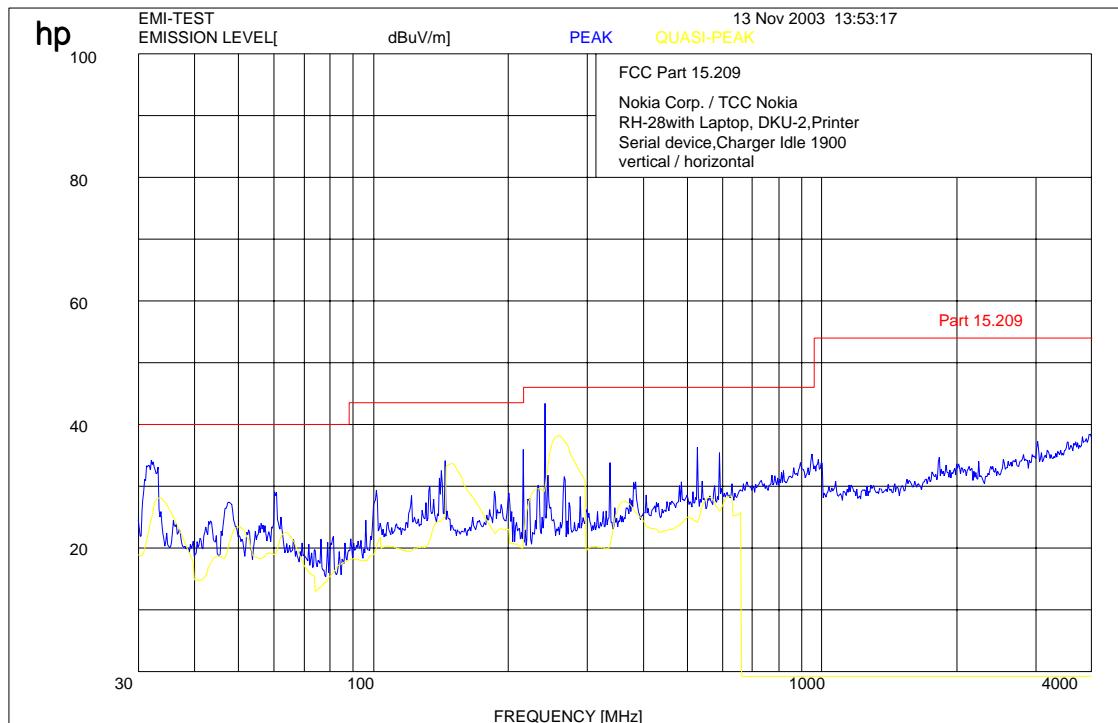
(for reference numbers see test equipment listing)

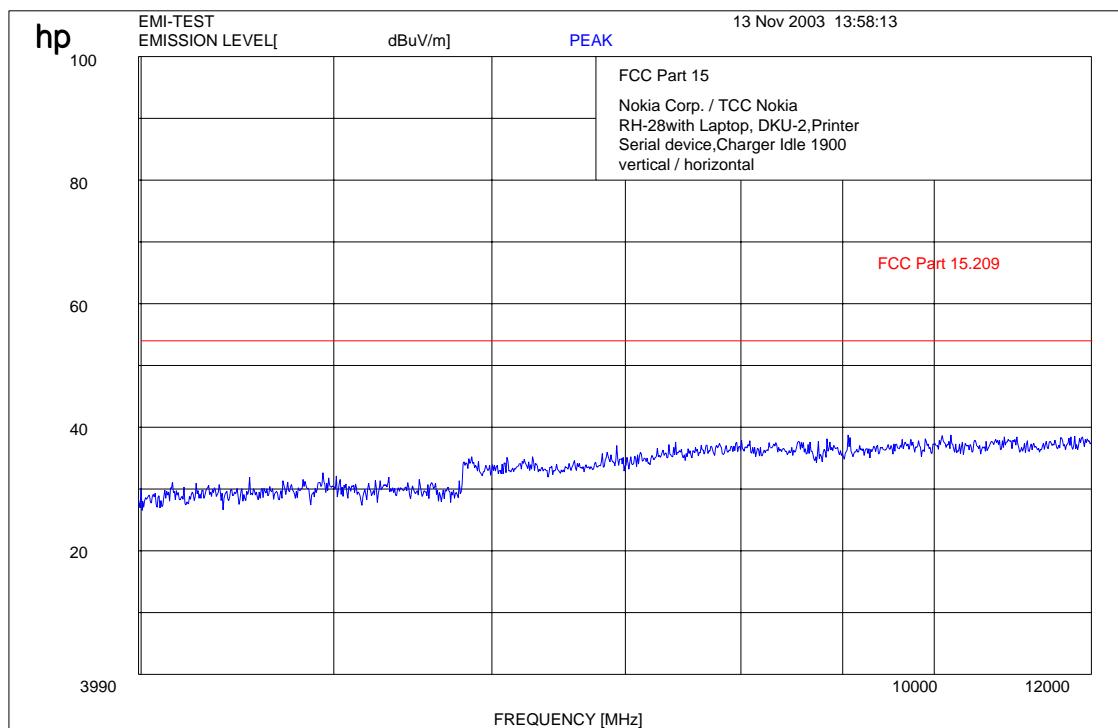
17 – 24, 64

Channel 661 (this is valid for all 3 channels and up to 30 MHz)**Idle-Mode**

EUT: RH-28 with charger, Laptop, Printer , serial device
Manufacturer: Nokia Corp / TCC Nokia
Operating Condition: GSM 1900 Rx mode and Bluetooth Rx-mode
Test Site: Cetecon, Room 6
Operator: Berg M
Test Specification:
Comment: 115 V / 60 Hz
Start of Test: 14.11.03 / 12:06:00

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24, 64**

**Channel 661 (this is valid for all 3 channels and up to 4 GHz)
Idle-Mode****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz**

**Channel 661 (this is valid for all 3 channels and up to 12 GHz)
Idle-Mode**

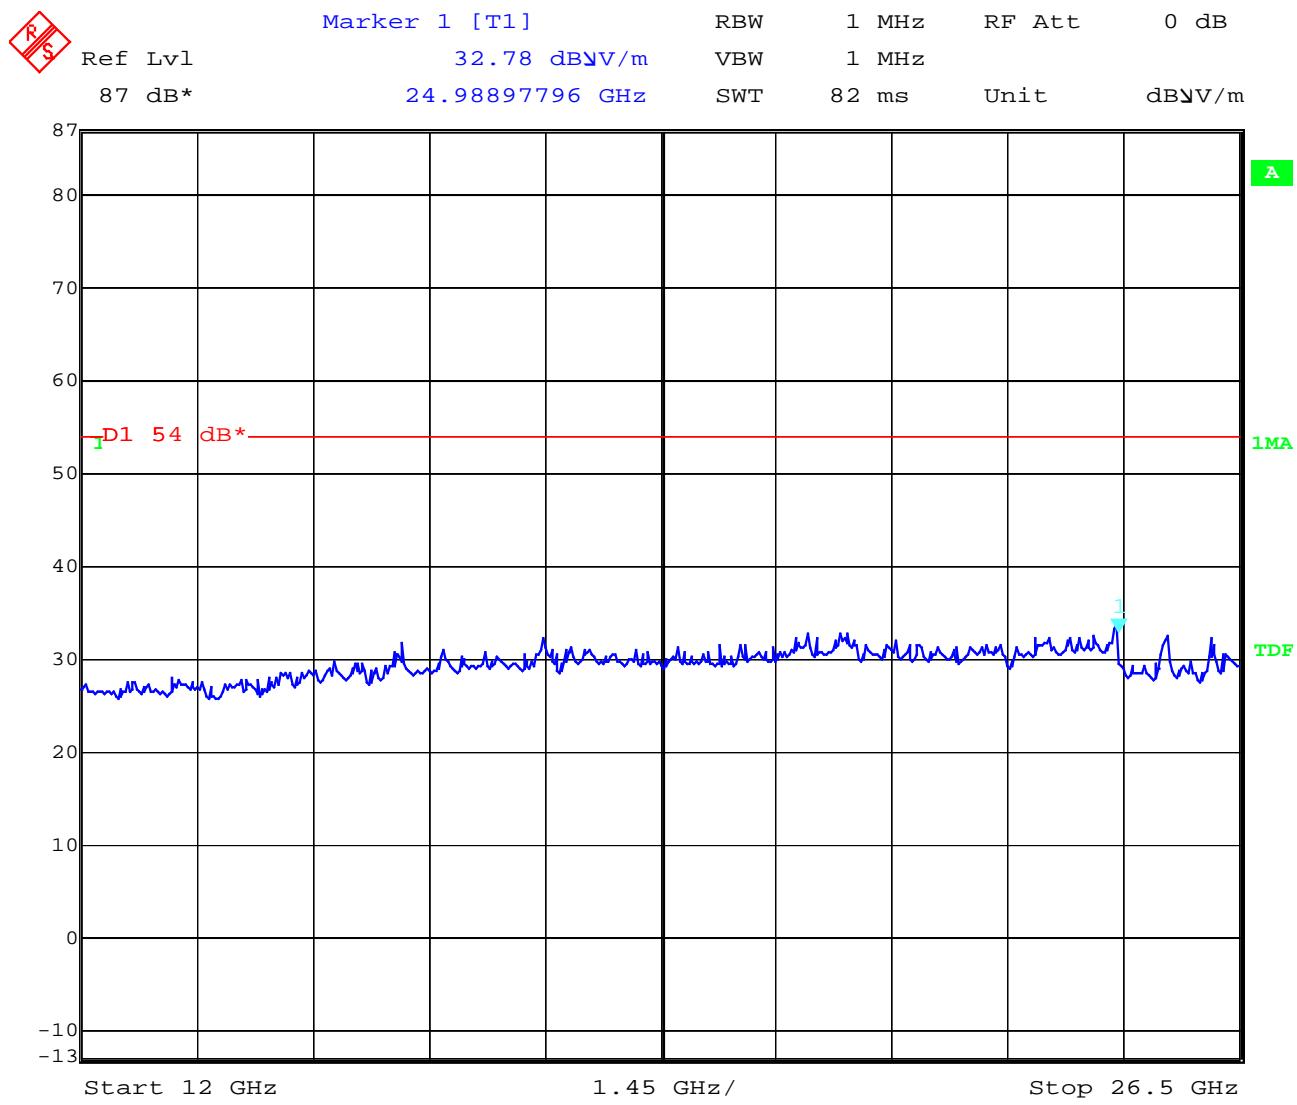
f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 661 (this is valid for all 3 channels and up to 25 GHz)
Idle-Mode

Date: 17.NOV.2003 07:30:26

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

CONDUCTED SPURIOUS EMISSIONS**Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter**Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

Measurement Limit:

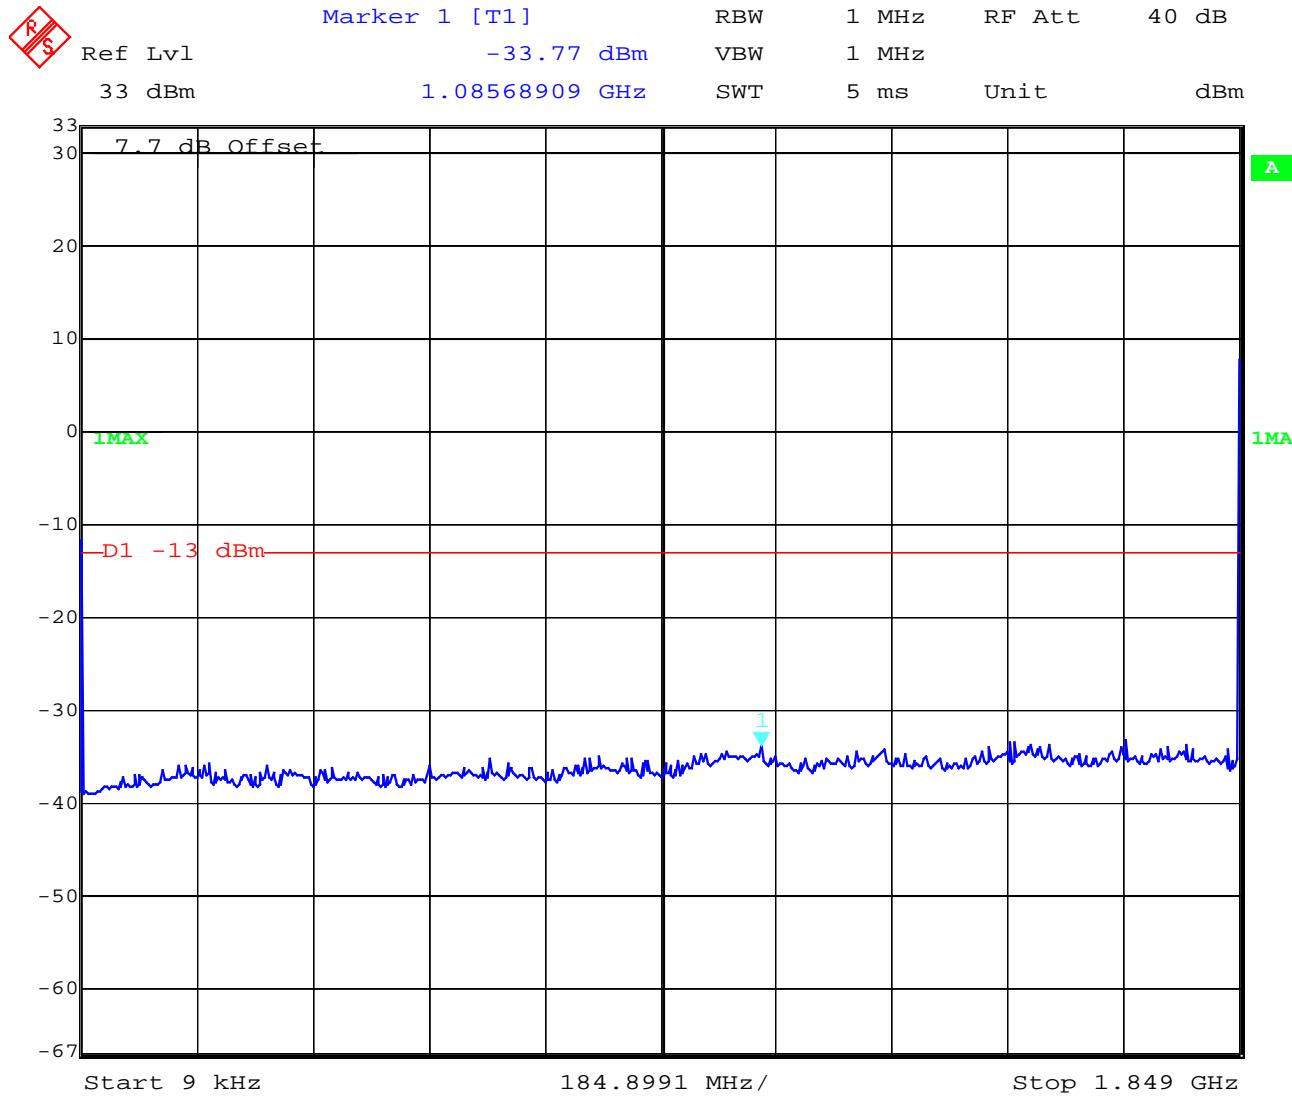
Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

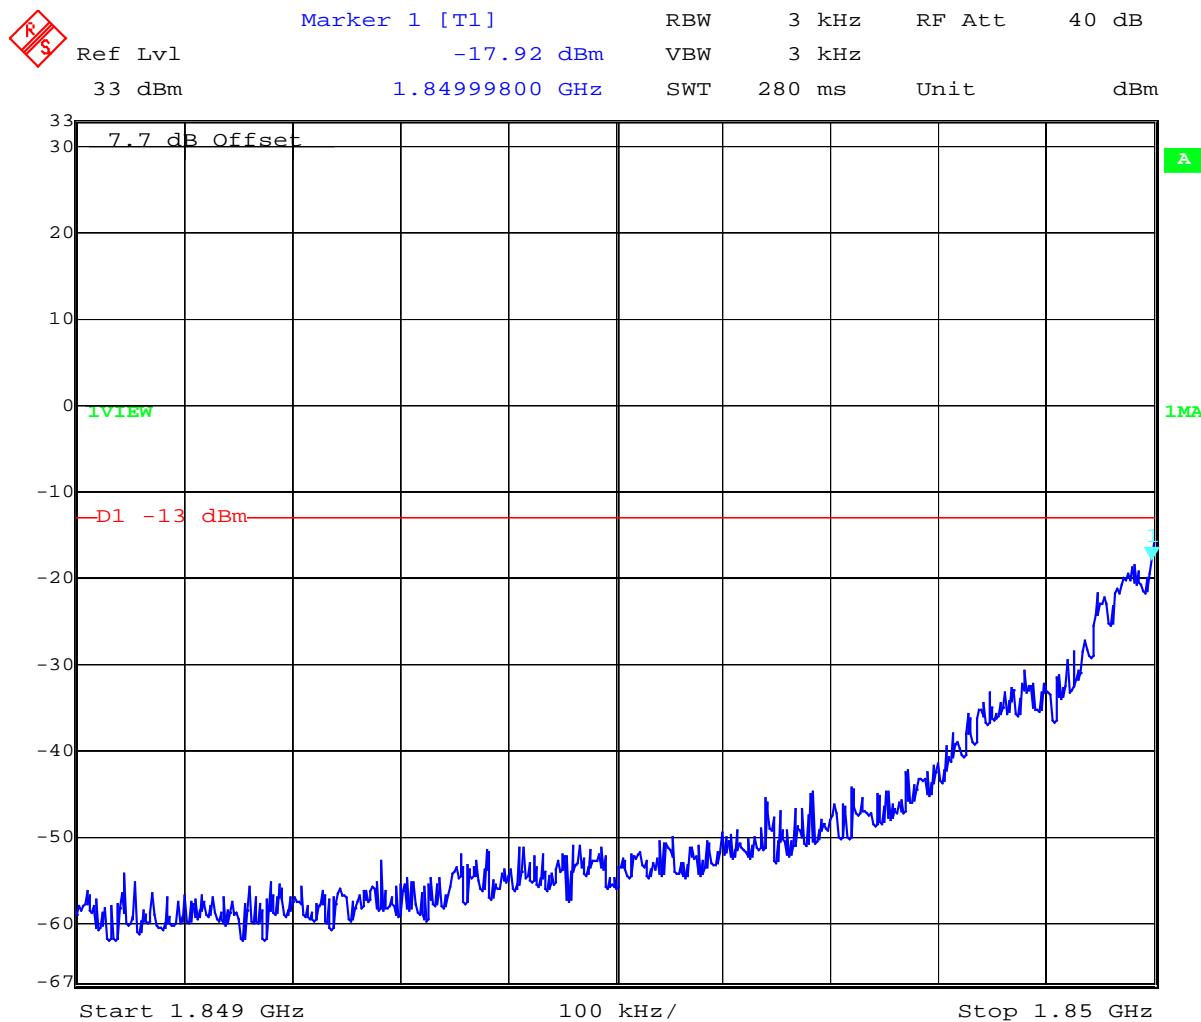
EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		30.4	-13.0		carrier
1849.998		-17.92	(43.4 dBc)	48.32	complies
CH 661					
1880.0		29.6	-13.0		carrier
no traceable peak found			(42.6 dBc)		complies
CH 810					
1909.8		29.6	-13.0		carrier
1495.975		-33.15	(42.6 dBc)	62.75	complies
1910.006		-15.70		45.3	complies
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

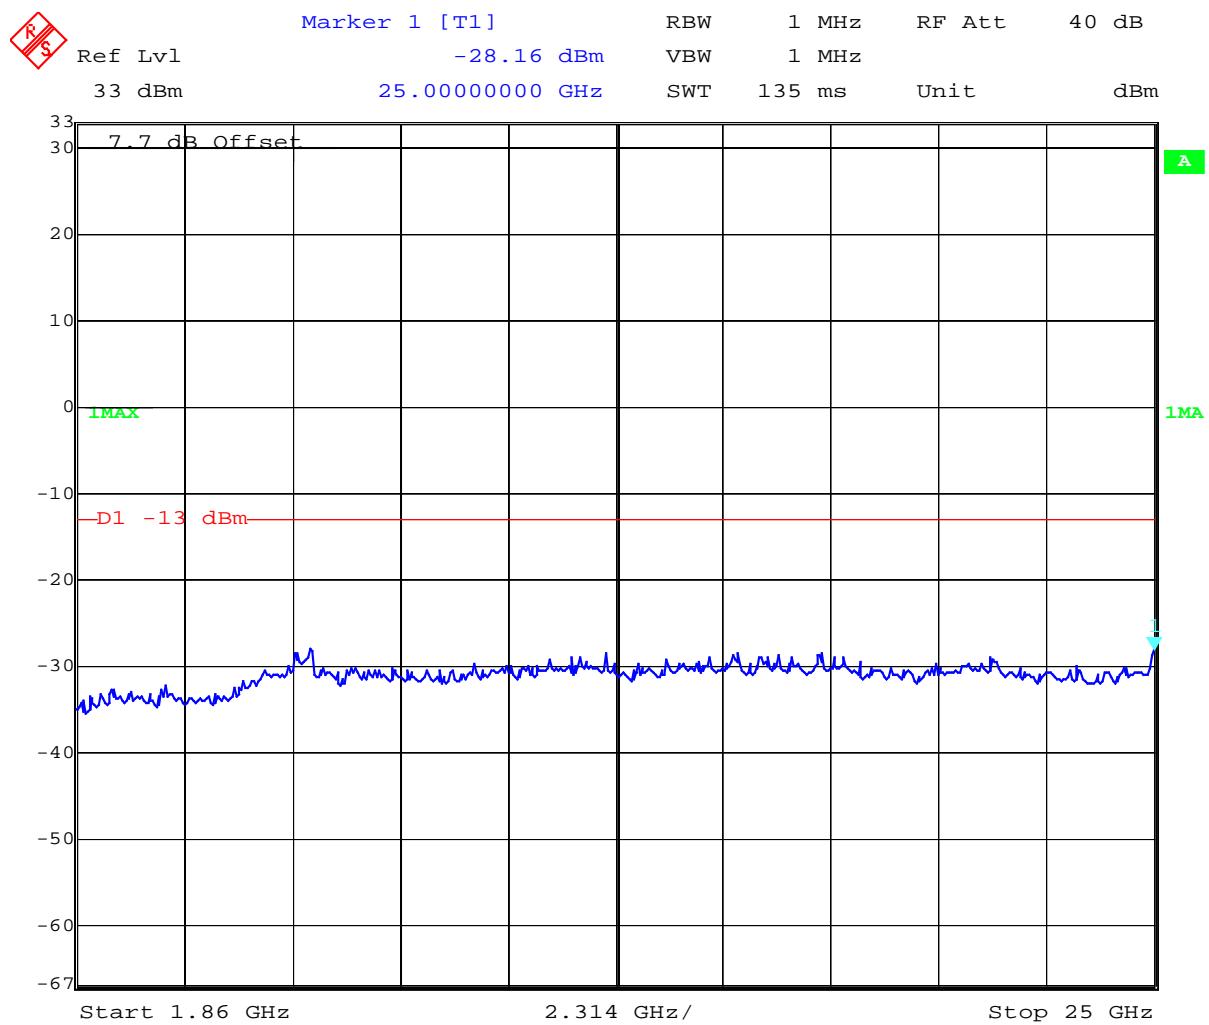
Measurements:**Channel: 512**

Date: 18.NOV.2003 10:44:09

Channel 512

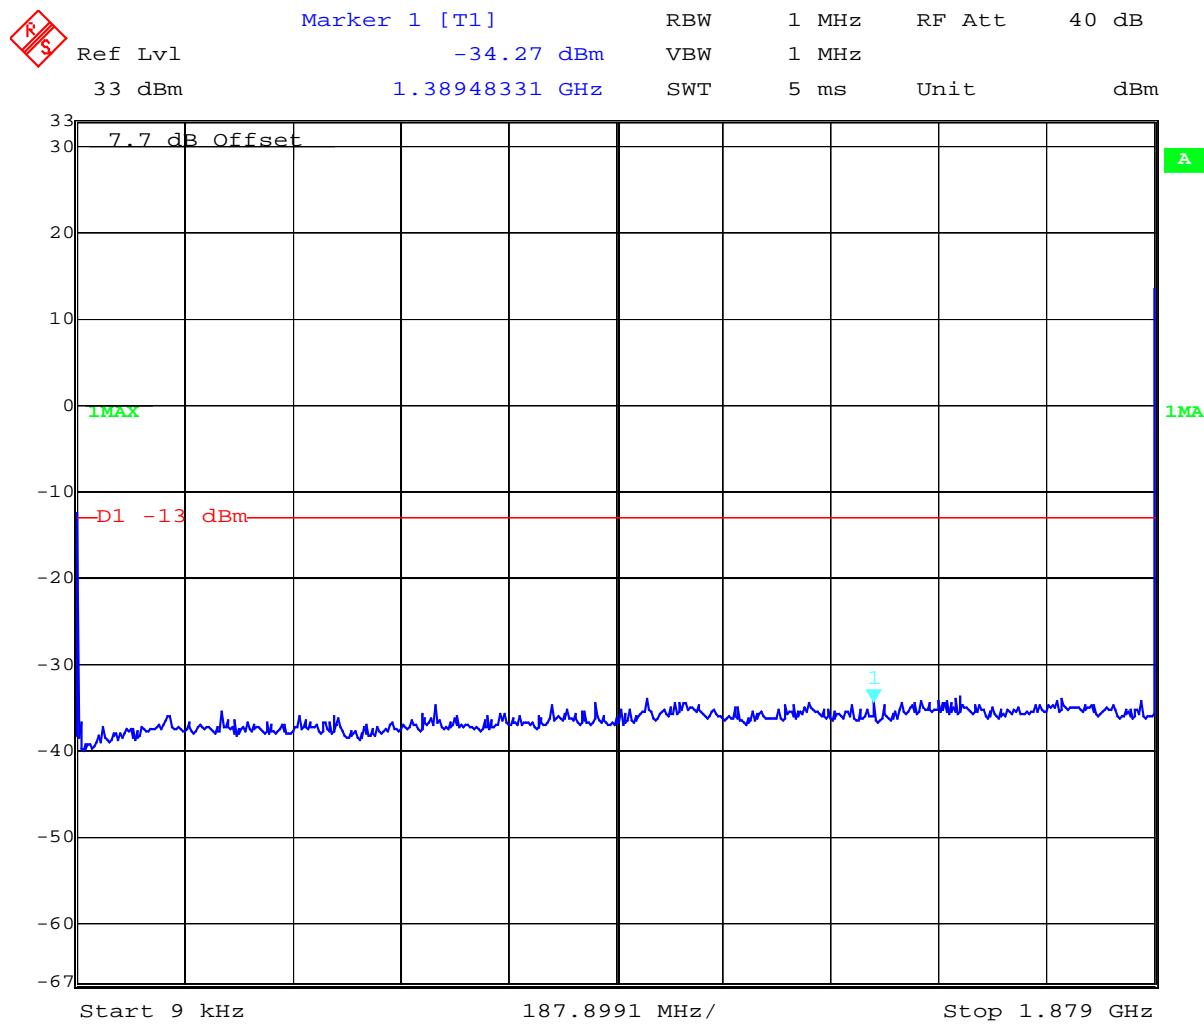
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512



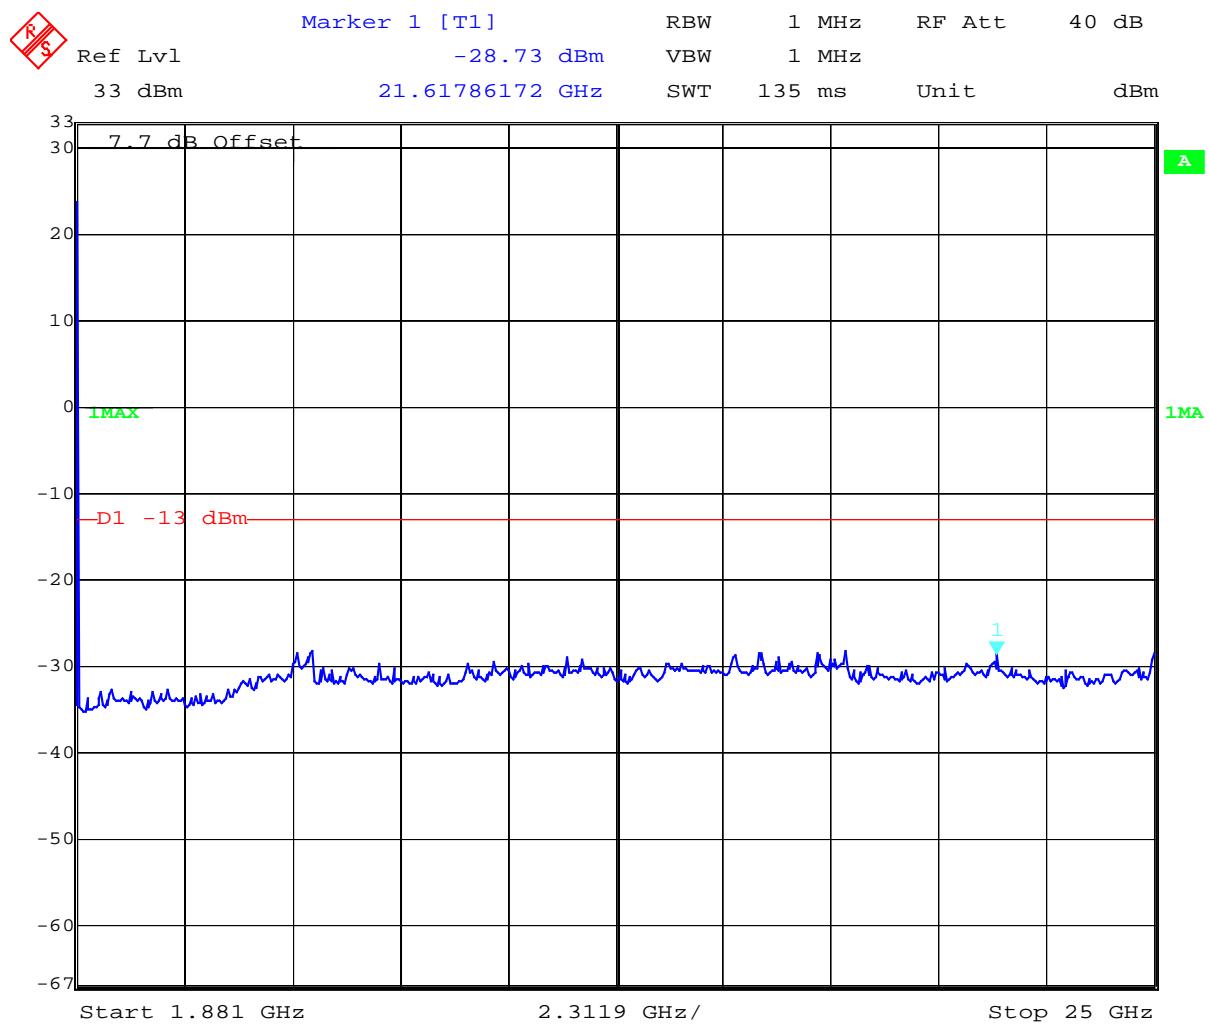
Date: 18.NOV.2003 10:46:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661

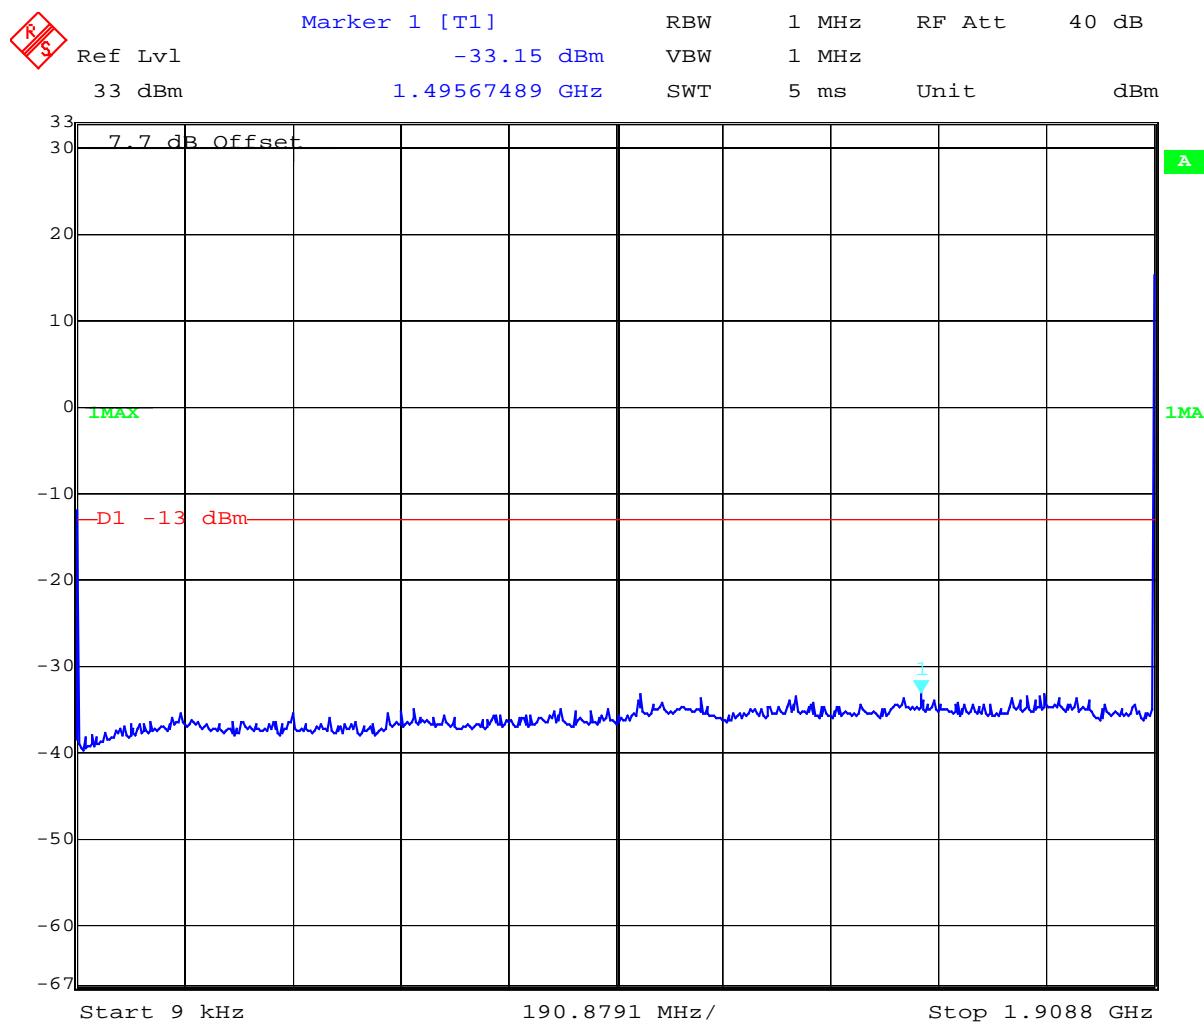
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661



Date: 18.NOV.2003 10:48:54

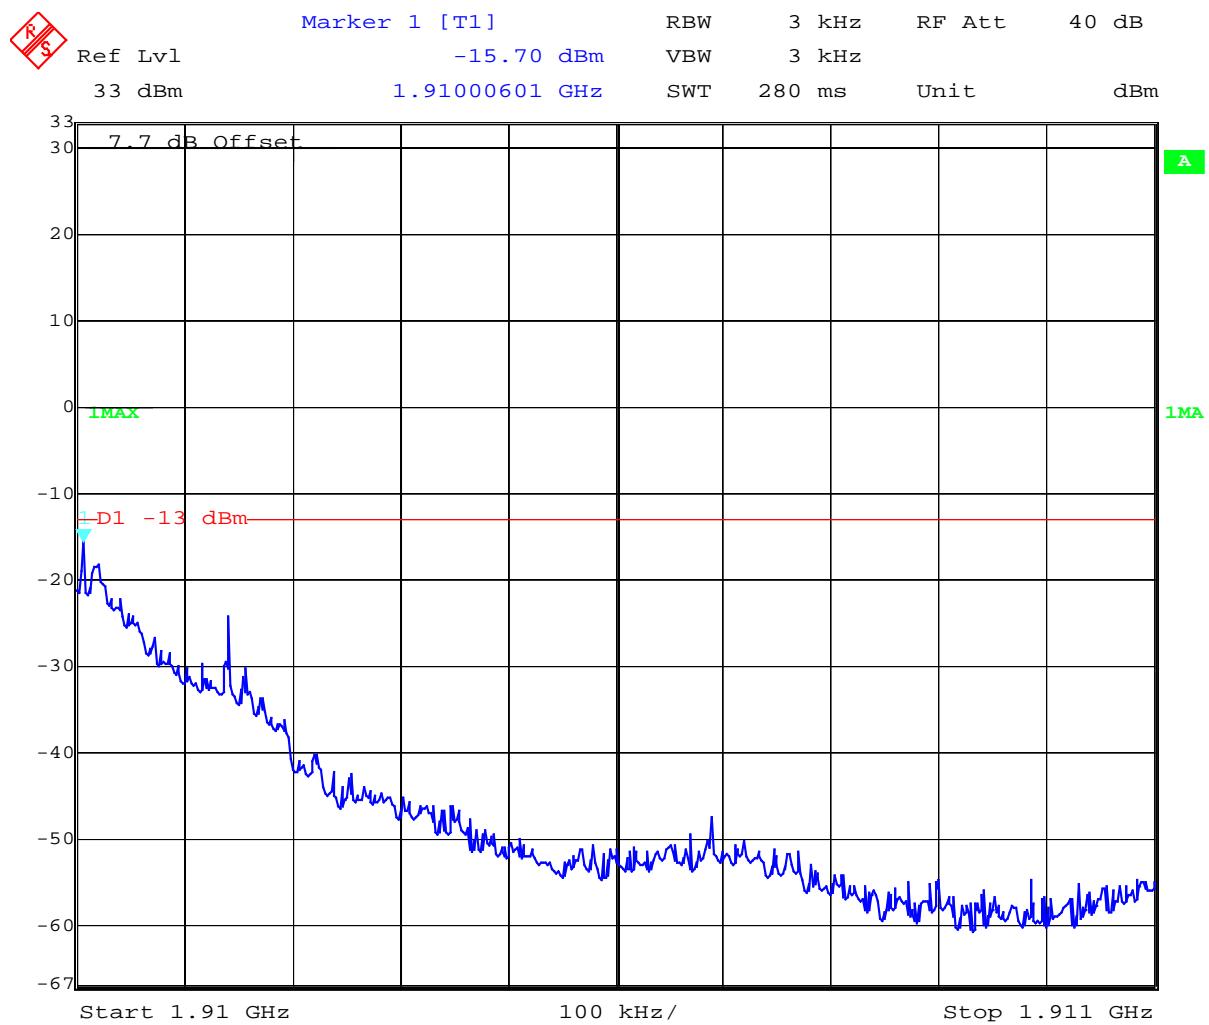
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810

Date: 18.NOV.2003 10:51:08

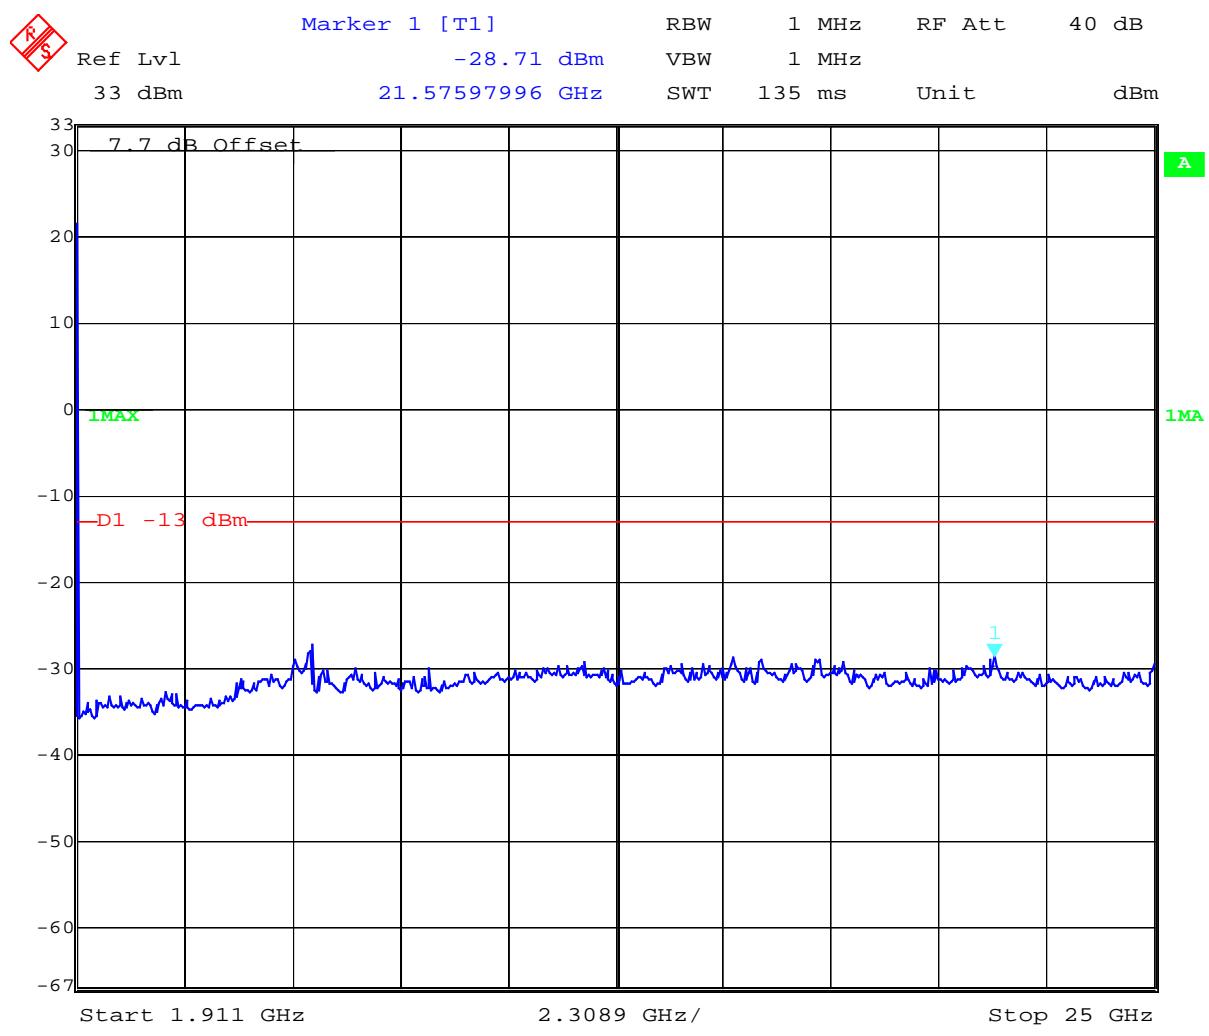
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810

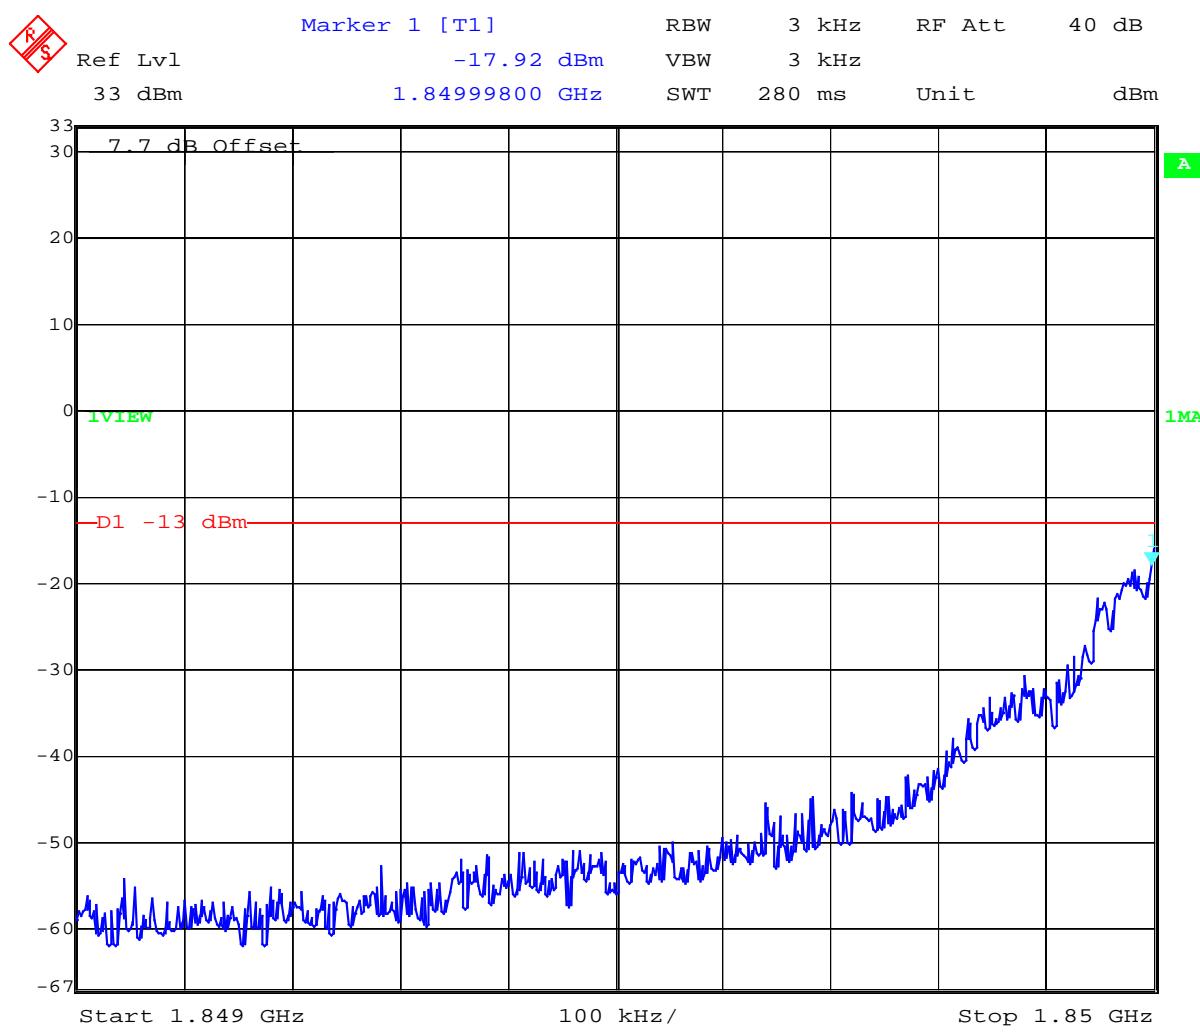


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F**Measurement Limit:**

Sec. 24.238 Emission Limits.

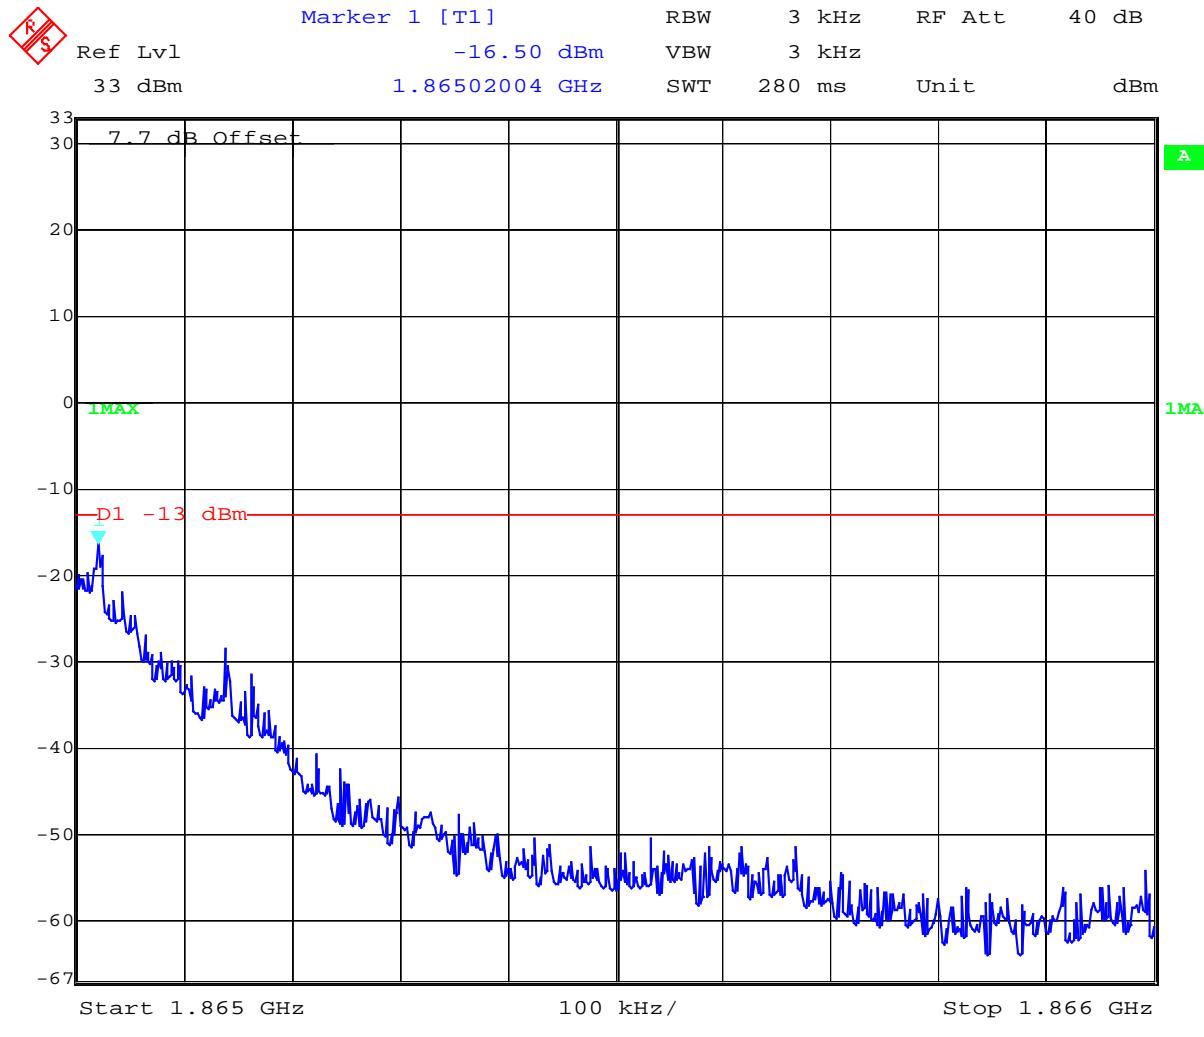
(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Measurements:**Block A Channel 512**

Date: 18.NOV.2003 10:45:20

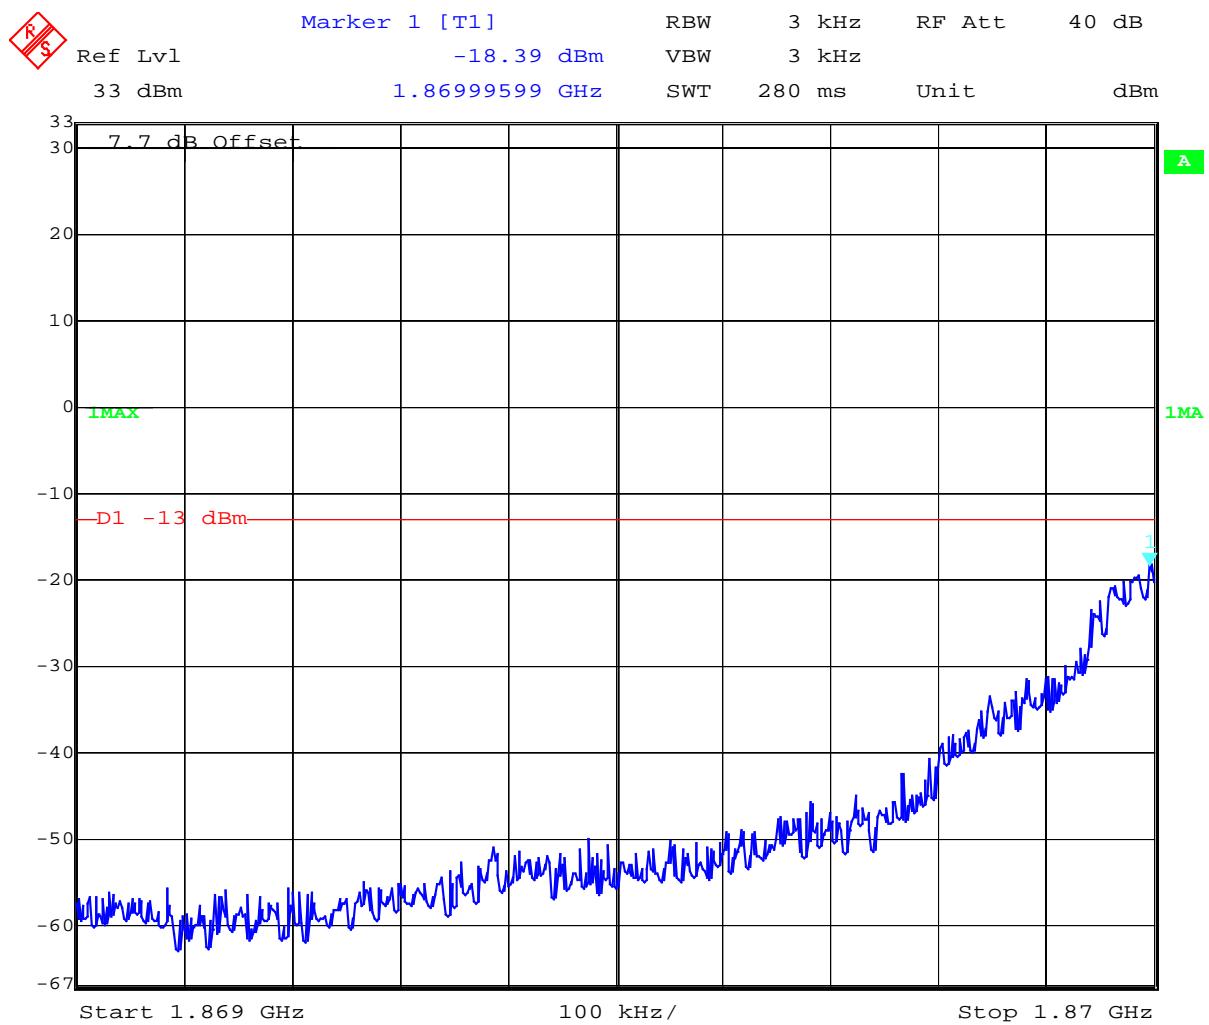
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Block A Channel 585

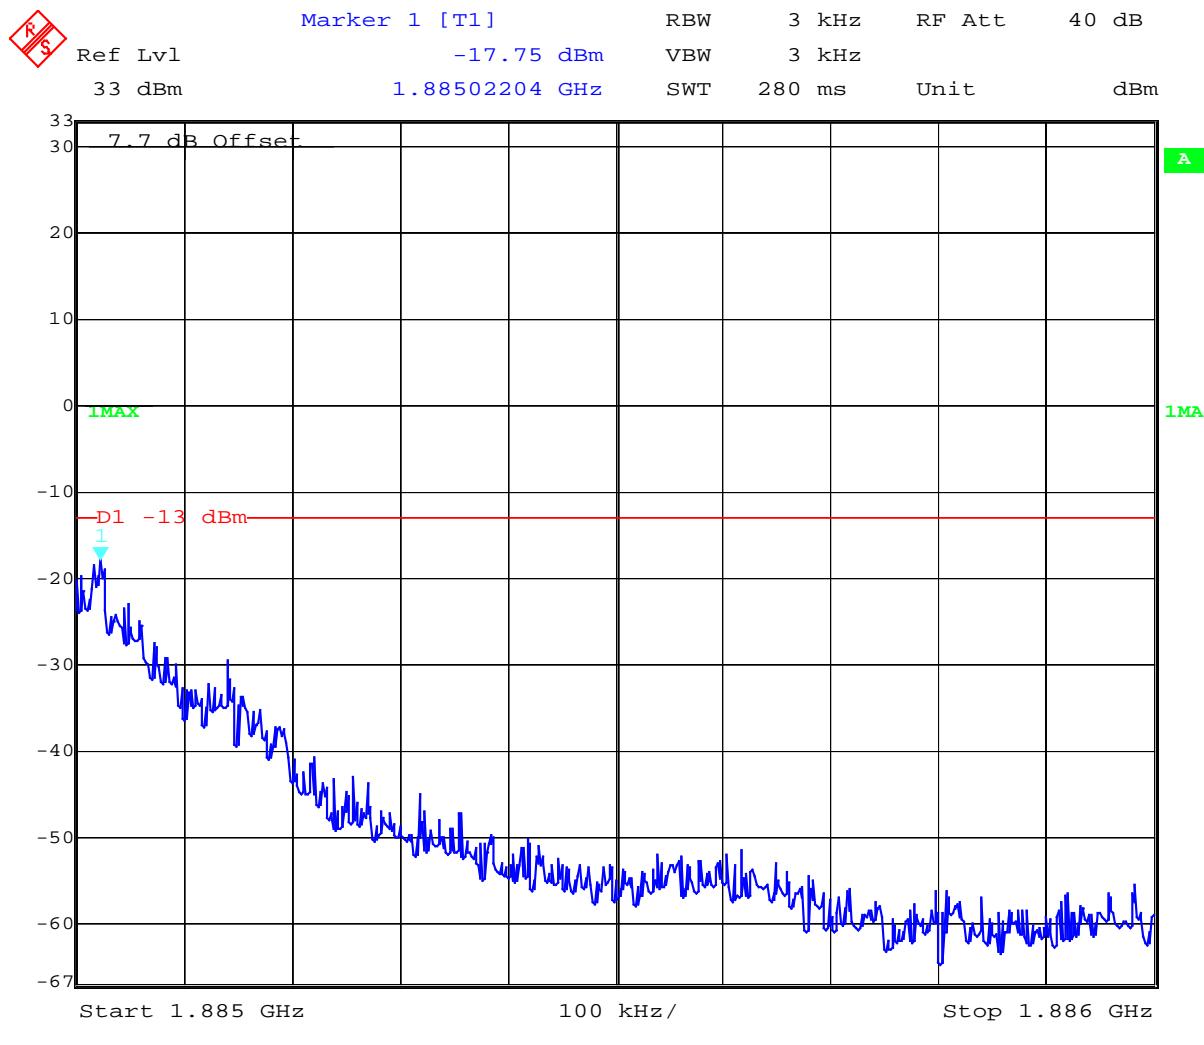
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block B Channel 612



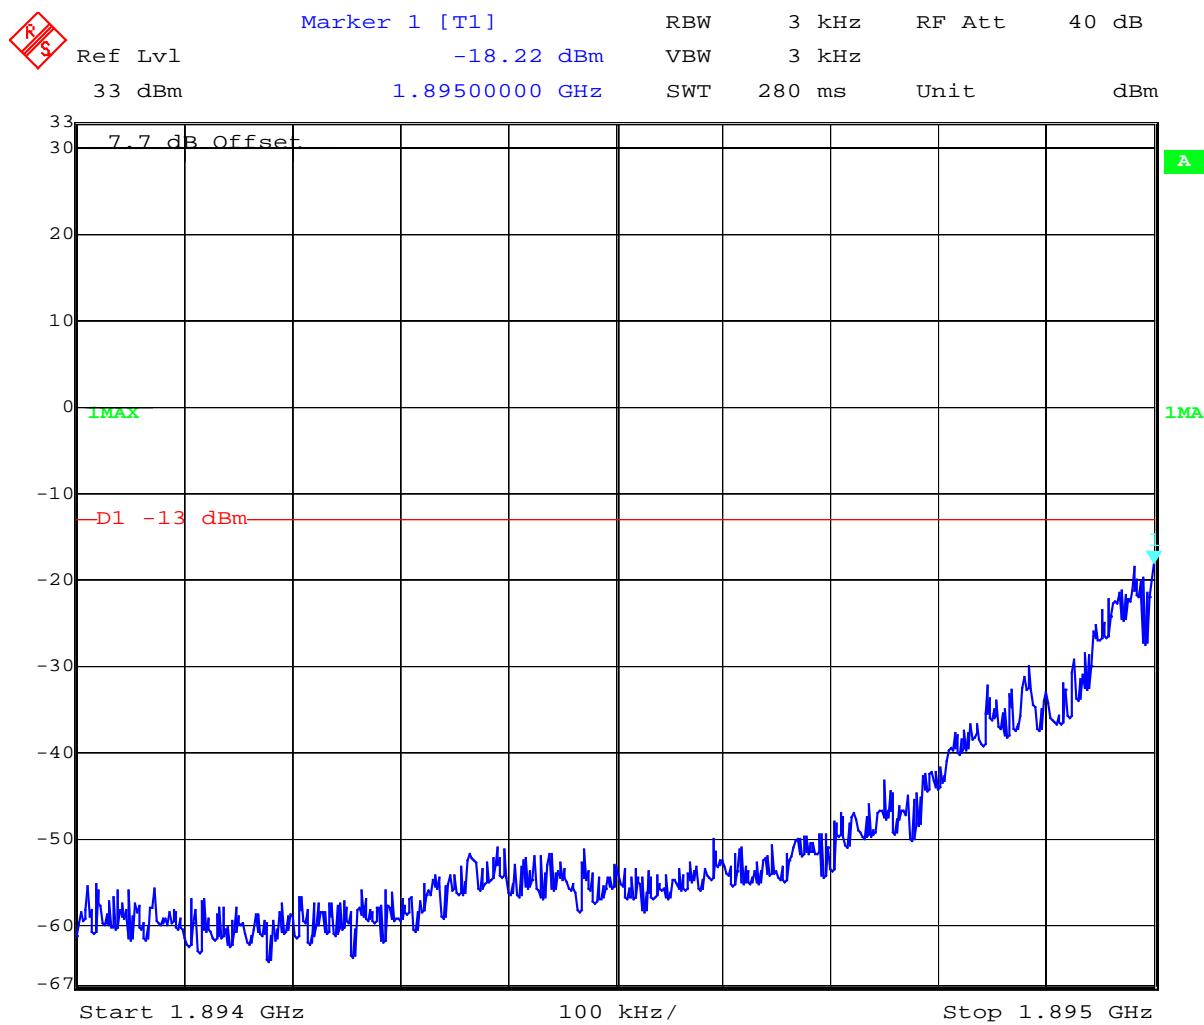
Date: 18.NOV.2003 10:57:01

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block B Channel 685

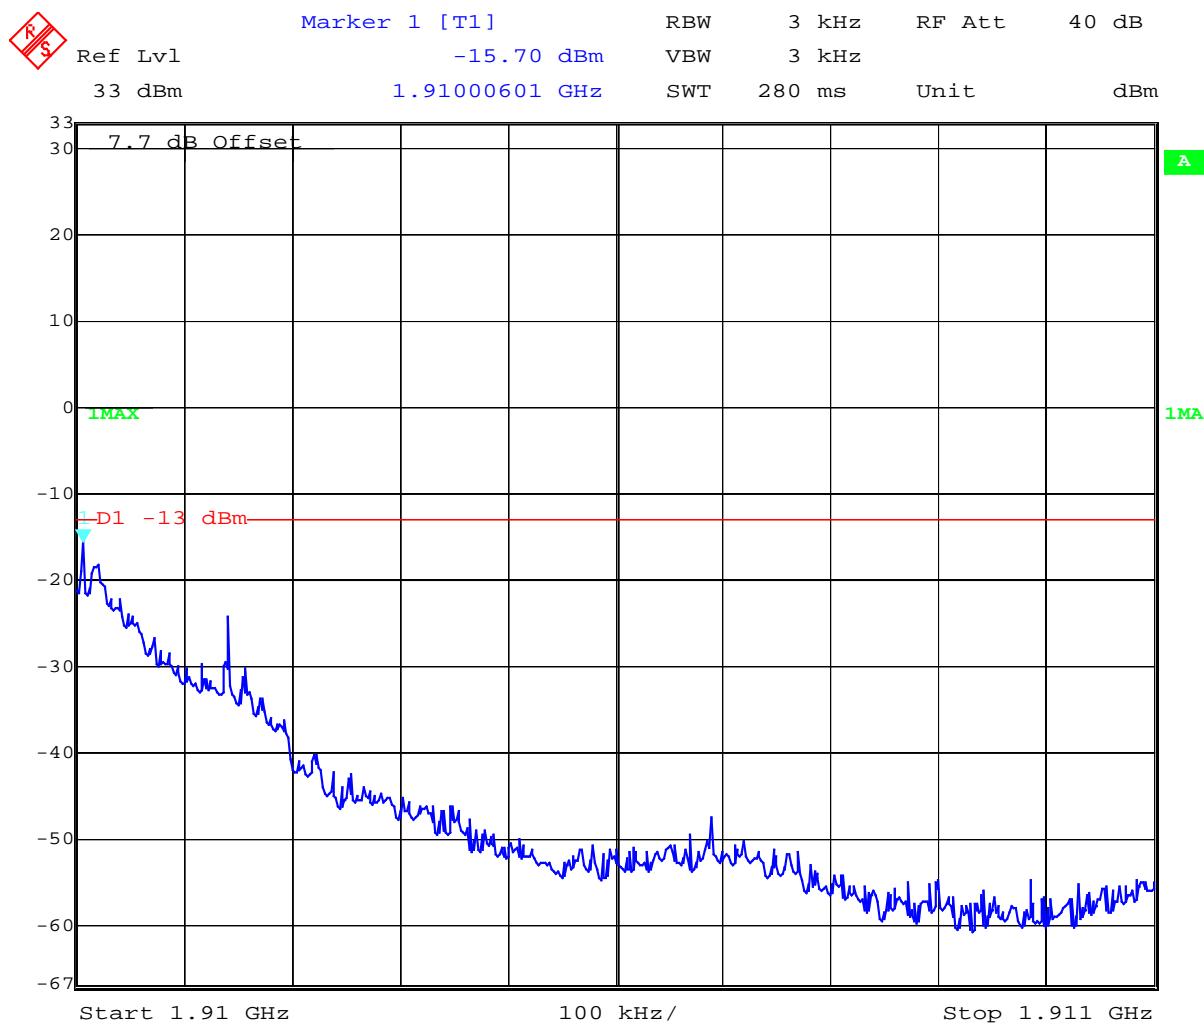
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block C Channel 737

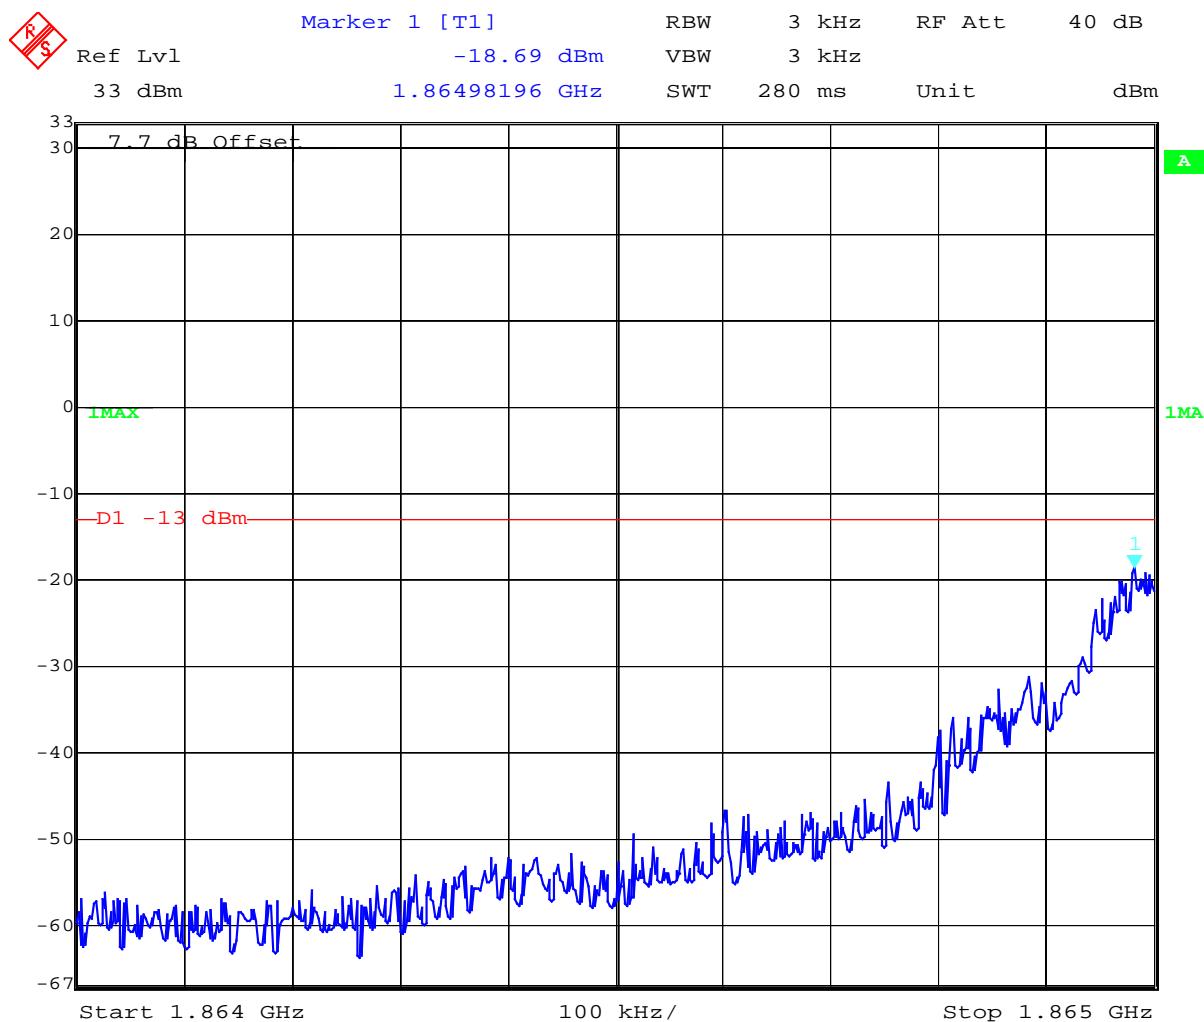


Date: 18.NOV.2003 10:58:25

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

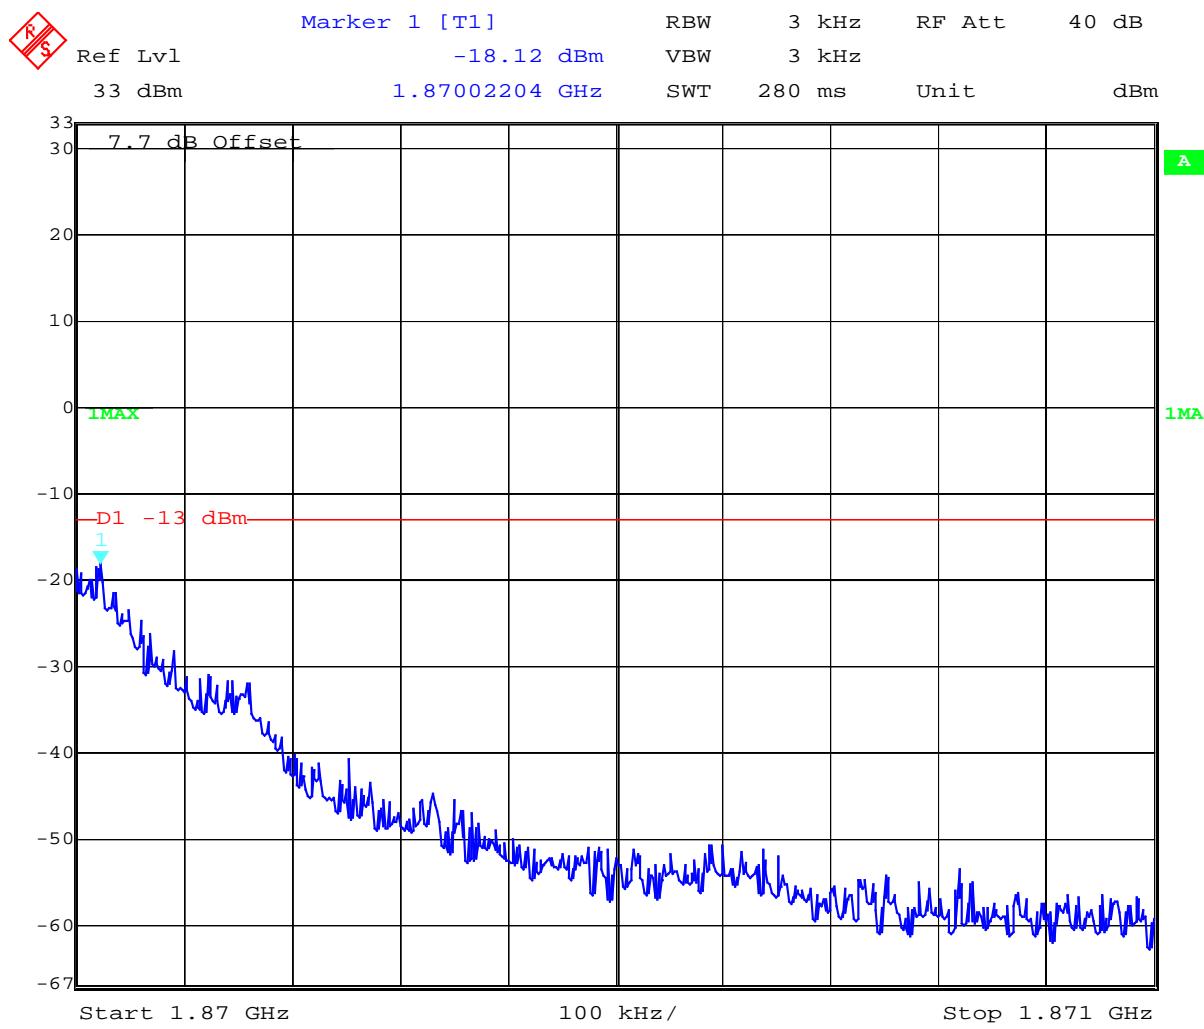
Block C Channel 810

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block D Channel 587

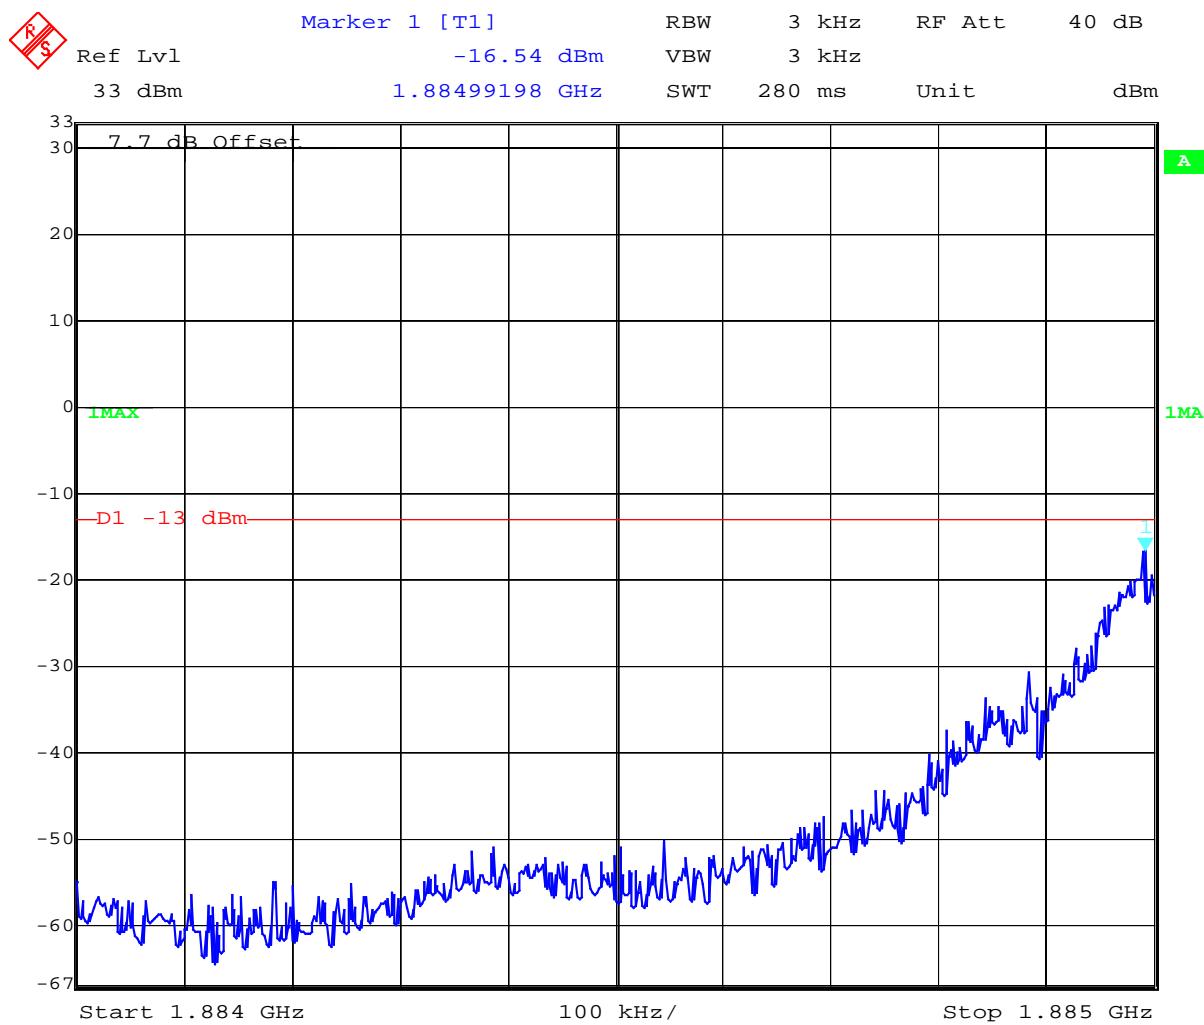
Date: 18.NOV.2003 10:59:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Block D Channel 610

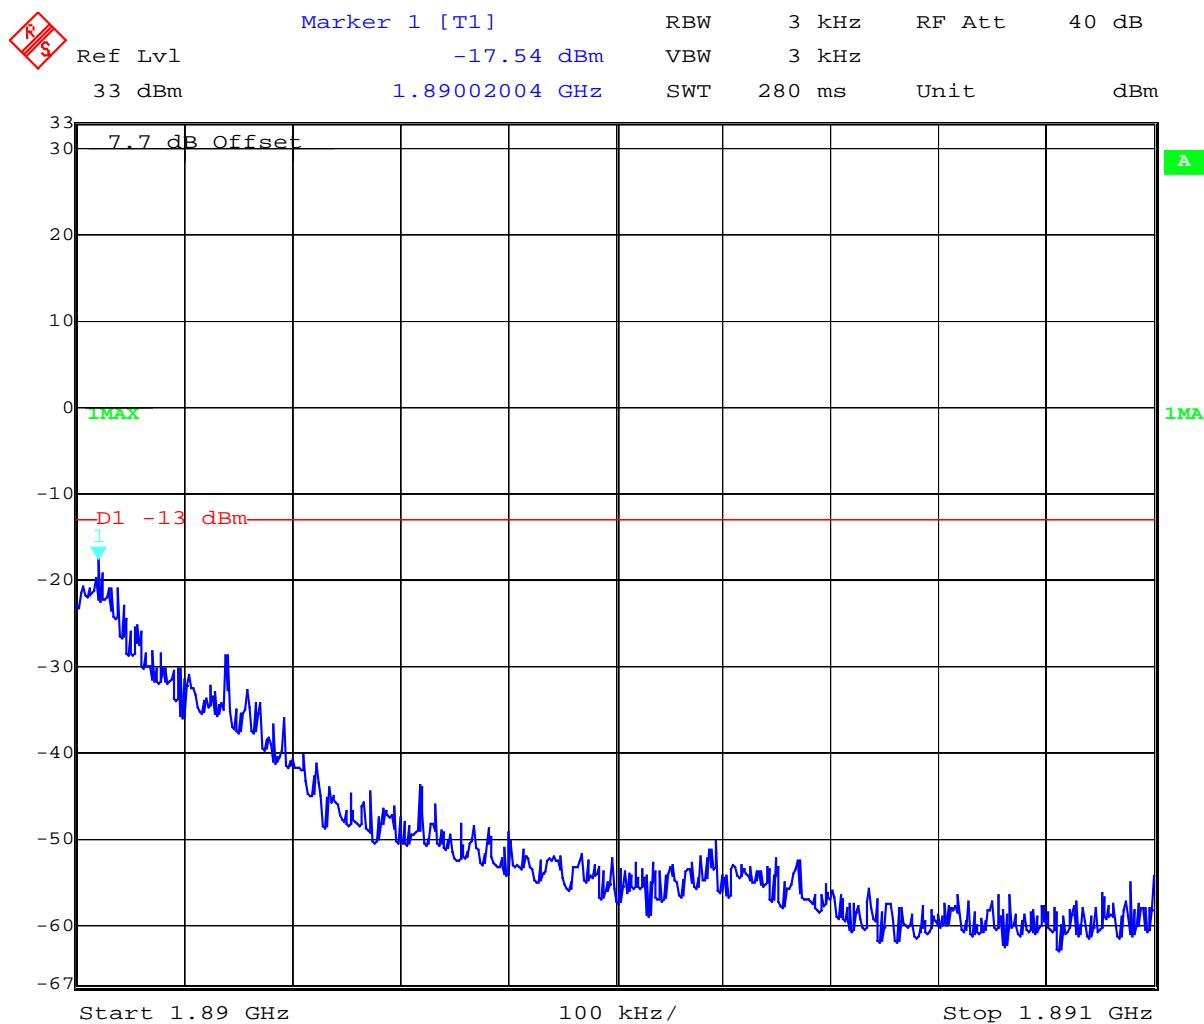
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block E Channel 687



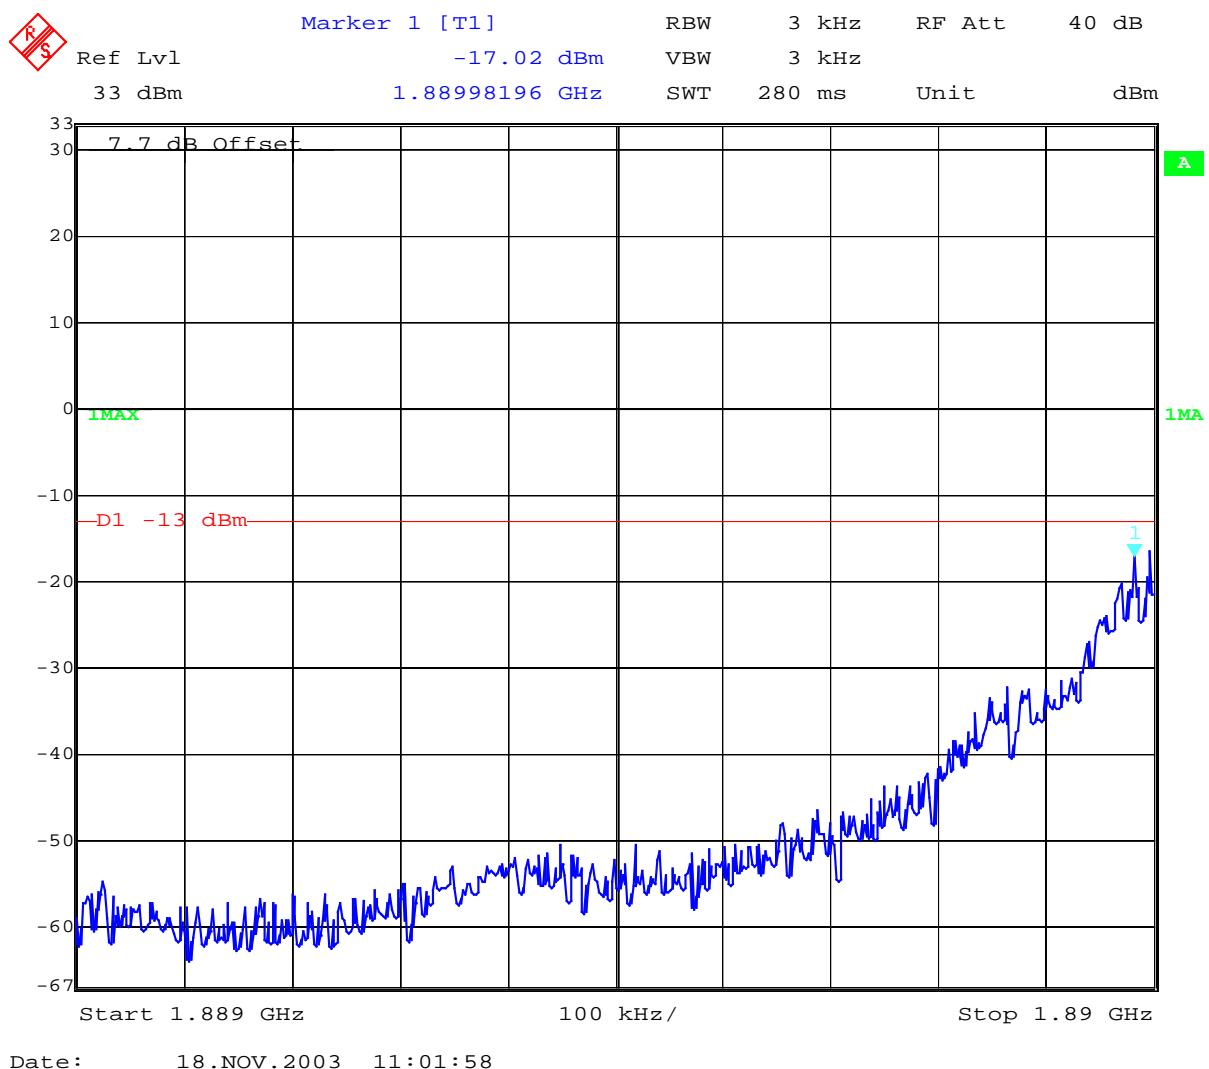
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block E Channel 710



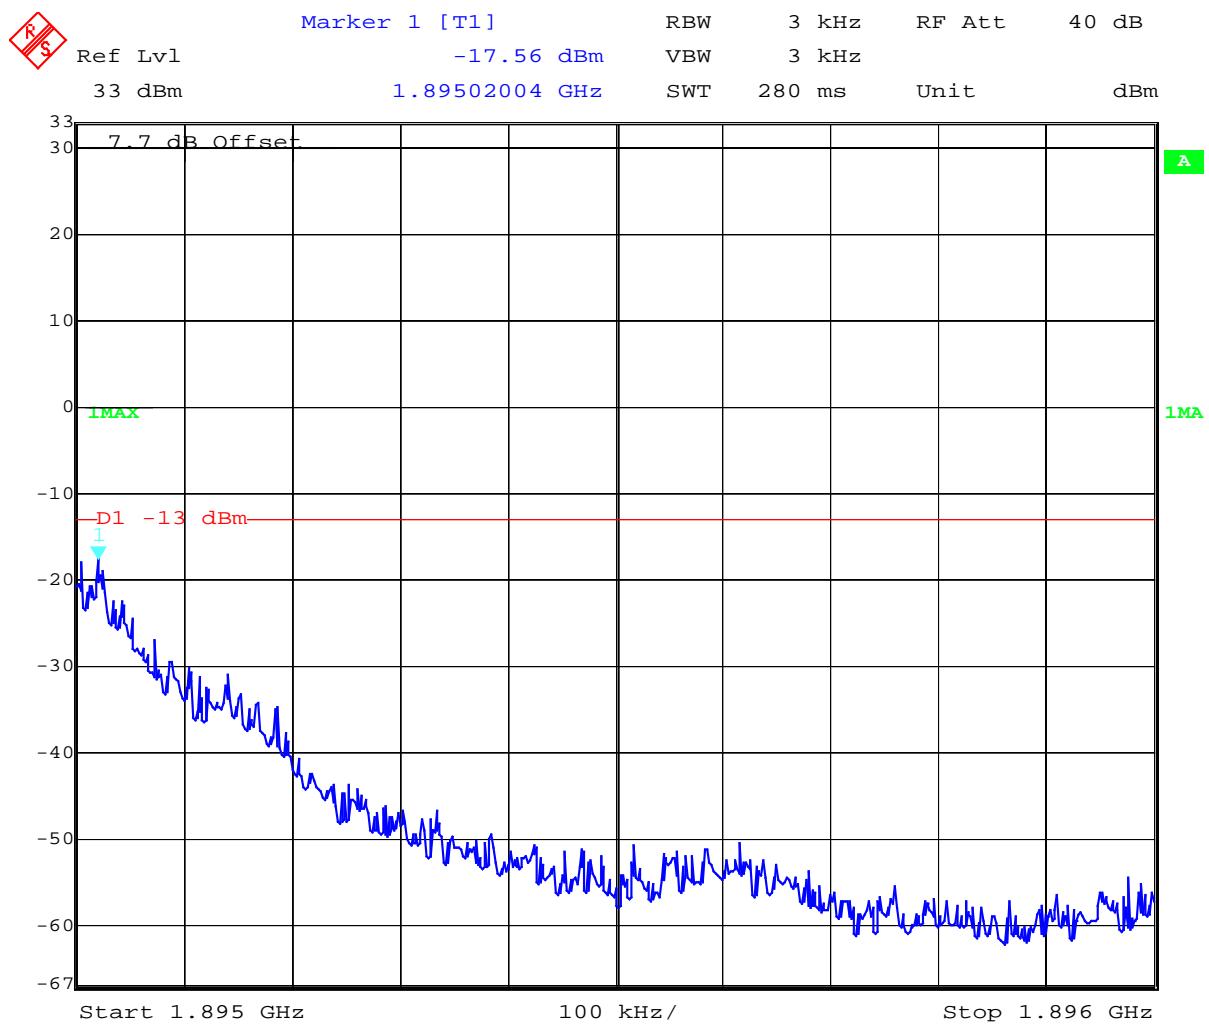
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block F Channel 712



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block F Channel 735



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

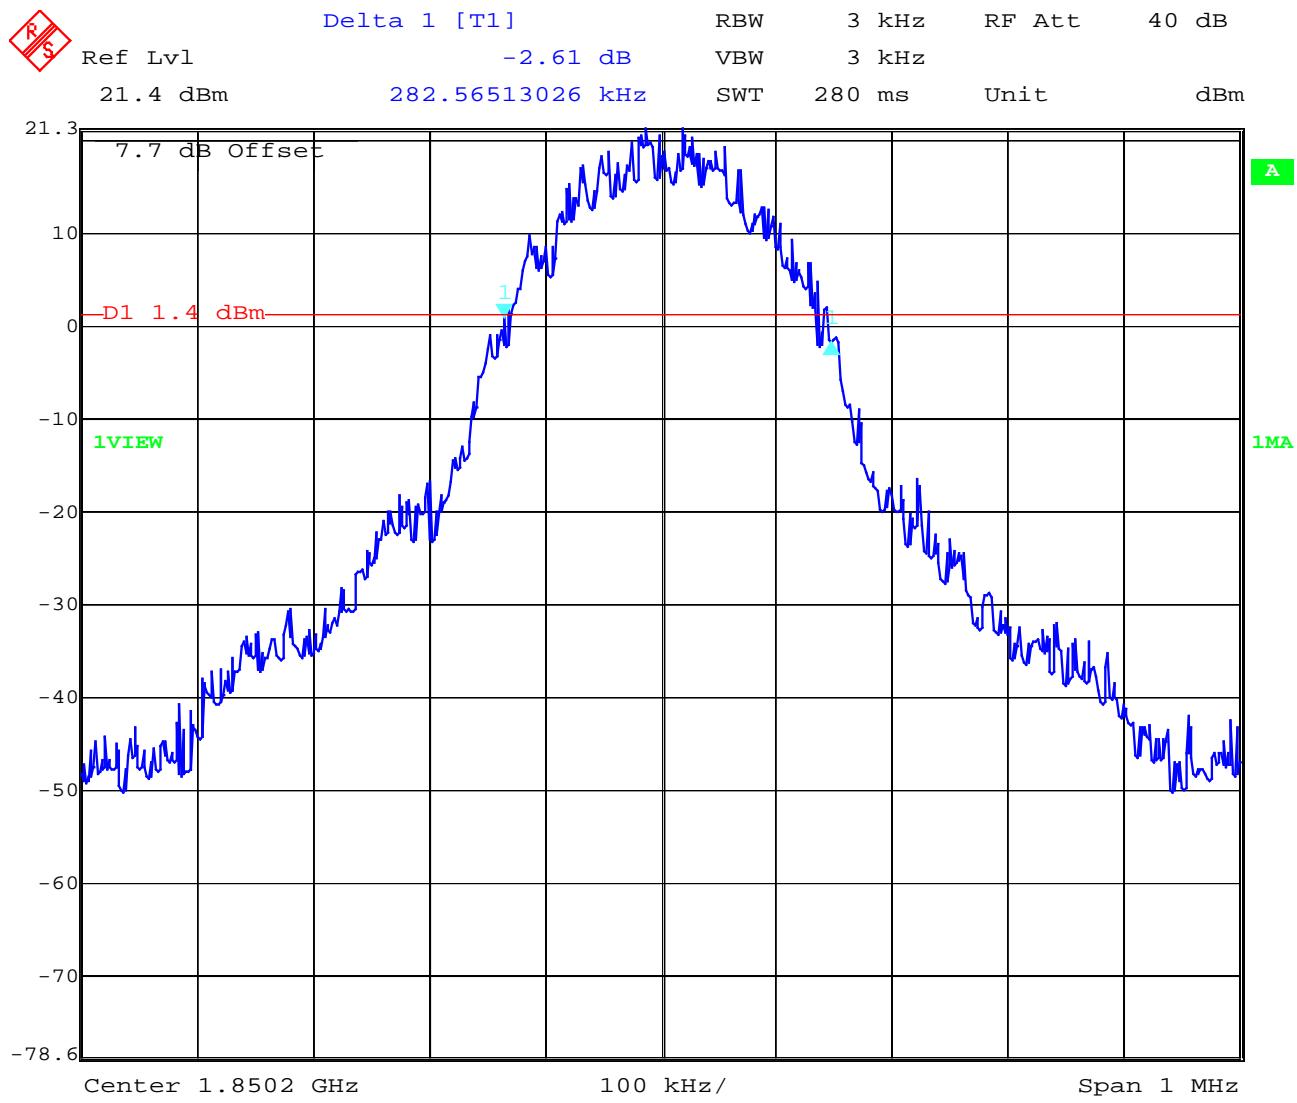
OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	282.565	310.621
1880.0 MHz	262.525	308.617
1909.8 MHz	280.561	314.629

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 283 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

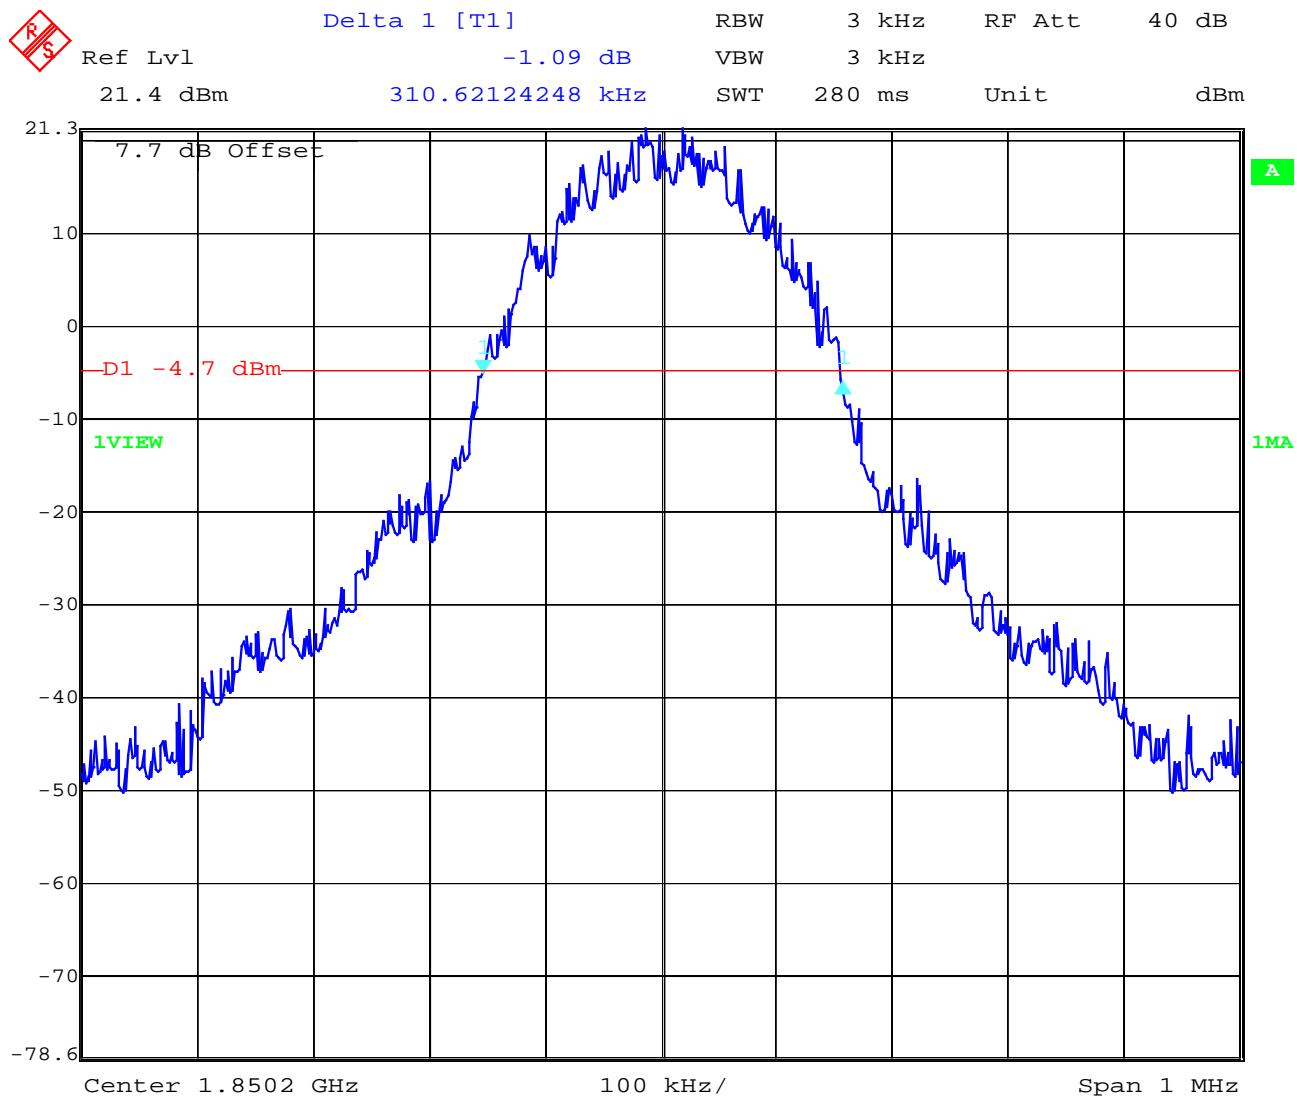
Channel 512
99% Occupied Bandwidth



Date: 18.NOV.2003 11:05:05

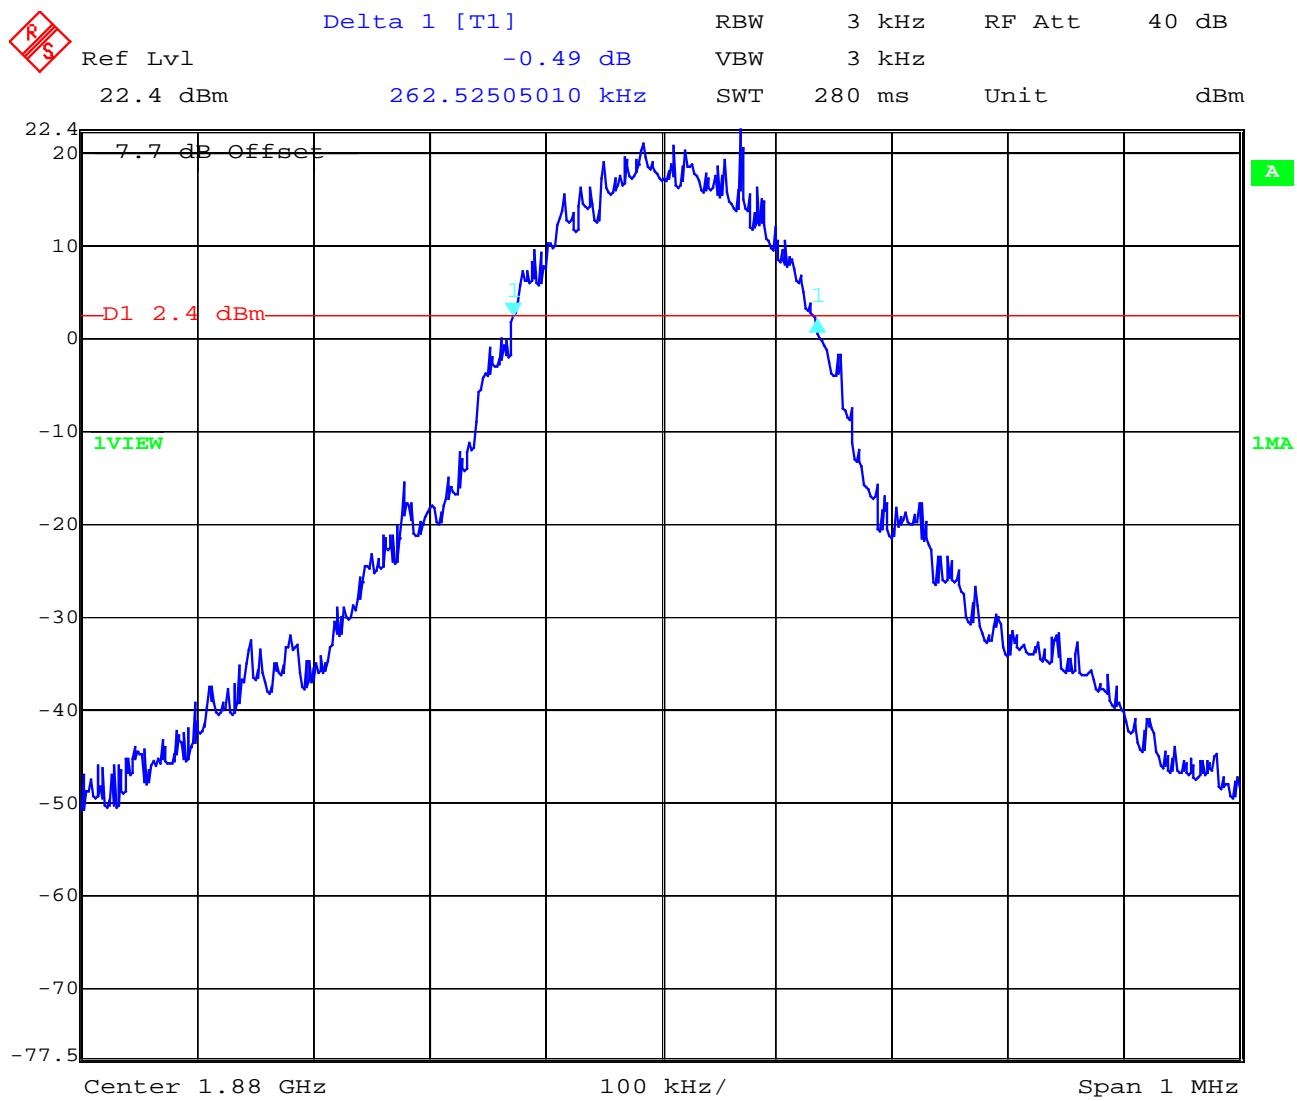
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 512
-26 dBc Bandwidth



Date: 18.NOV.2003 11:05:44

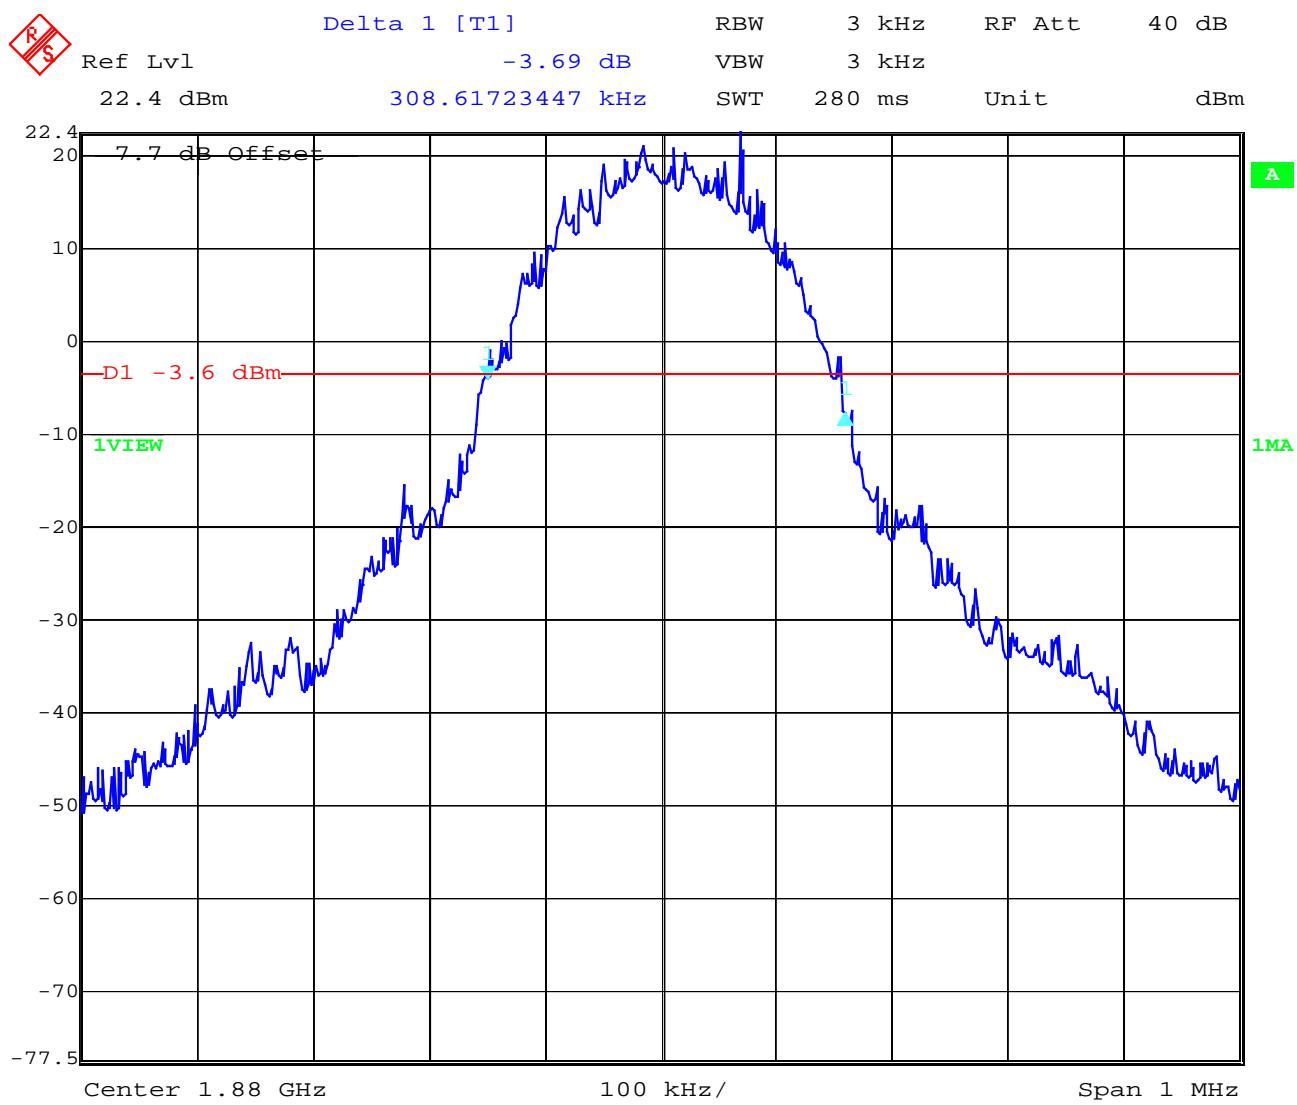
Channel 661
99% Occupied Bandwidth



Date: 18.NOV.2003 11:06:57

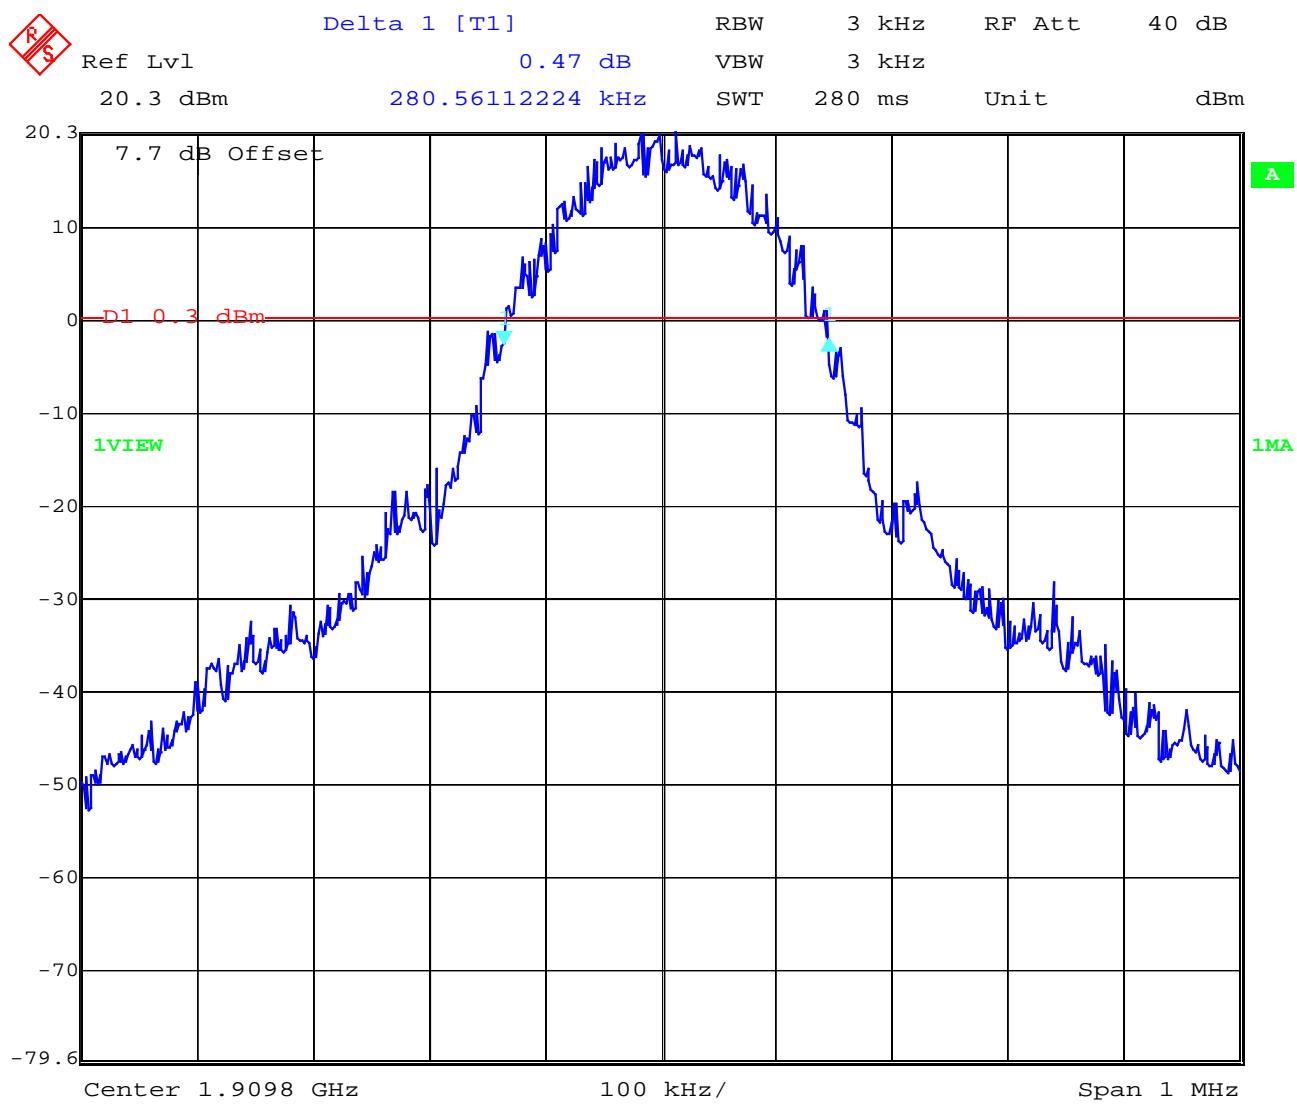
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 661
-26 dBc Bandwidth



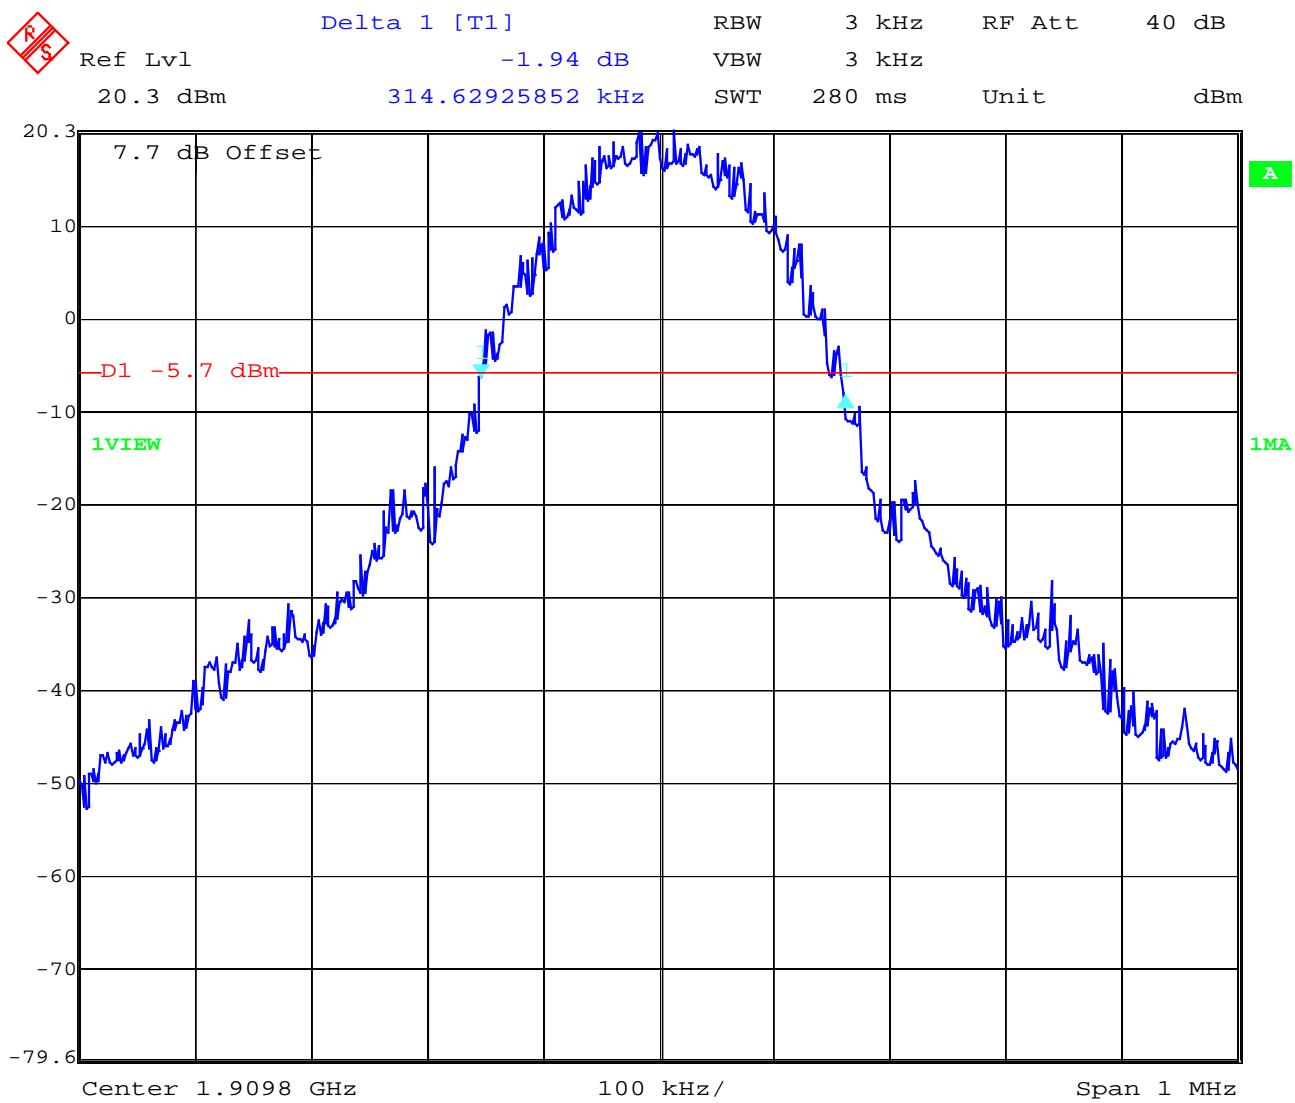
Date: 18.NOV.2003 11:07:32

Channel 810
99% Occupied Bandwidth



Date: 18.NOV.2003 11:09:09

Channel 810
-26 dBc Bandwidth



Date: 18.NOV.2003 11:09:41

CONDUCTED EMISSIONS**§ 15.107/207****EN 55022 / CISPR 22**

EUT: RH-28

Manufacturer:

Operating Condition: With charging unit ACP-12E, idle mode

Test Site: Room 006

Operator: Berg M.

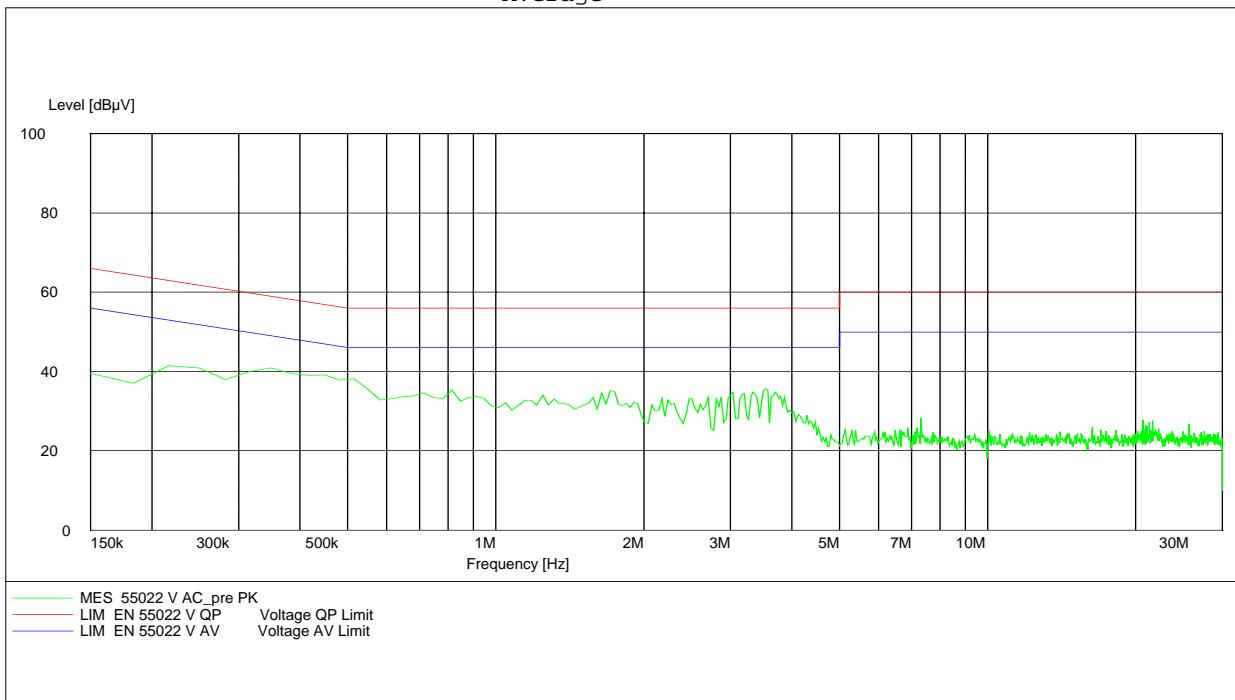
Test Specification: EN 55022

Comment: 115 V / 60 Hz

Start of Test: 14.11.03 / 12:13:58

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage Mains	1.60	Detector	Meas.	IF	Transducer
Start	Stop	Step	Width		Time		Bandw.	
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5	L1	1458
			Average					

**Limit § 15.207**

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

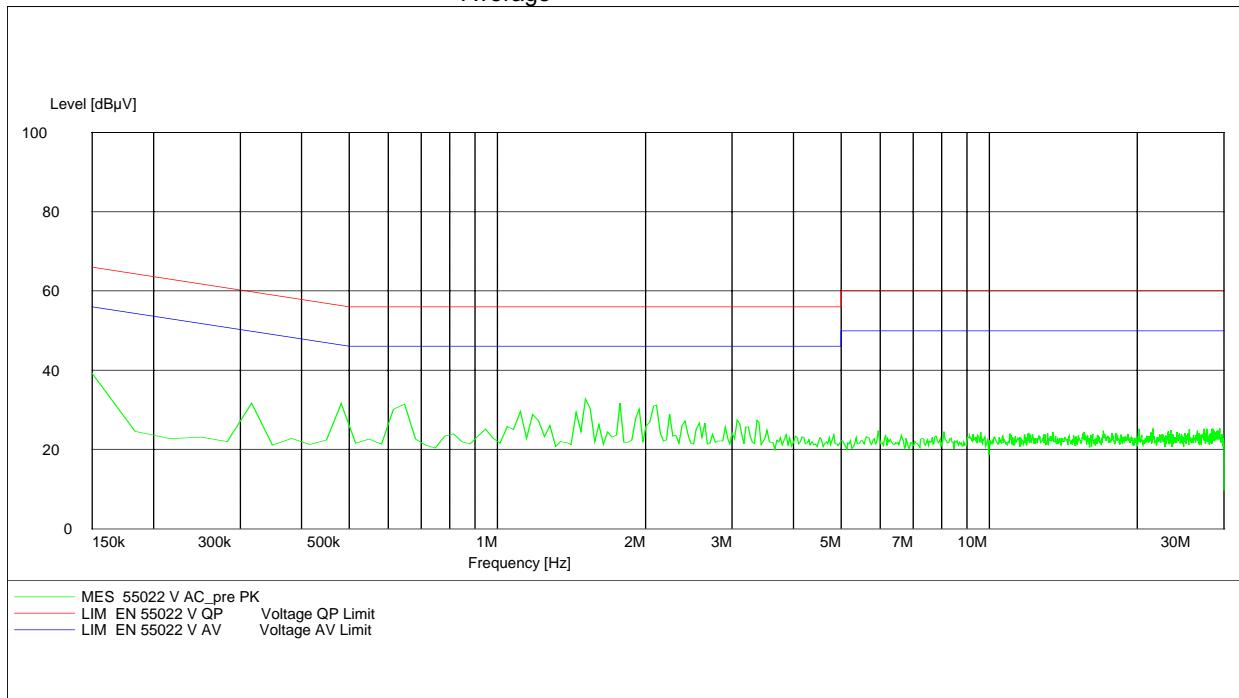
17 – 24; 64

EN 55022 / CISPR 22

EUT: RH-28
 Manufacturer: Nokia
 Operating Condition: With charging unit ACP-12E, Traffic mode
 Test Site: Room 006
 Operator: Berg M.
 Test Specification: EN 55022
 Comment: 115 V / 60 Hz
 Start of Test: 14.11.03 / 12:29:27

SCAN TABLE: "EN 55022 V"

Short Description:	Voltage Mains 1.60					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak Average	100.0 ms	10 kHz	ESH3-Z5 L1 1458

**Limit § 15.207**

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

PART PCS850**POWER OUTPUT****SUBCLAUSE § 22.913****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

Power Measurements:**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	32.9	32.8
825.0	5	32.9	32.8
836.4	5	32.8	32.7
836.6	5	32.8	32.7
848.0	5	32.8	32.7
848.8	5	32.7	32.6
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.1 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 5).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 22.913 (a). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{ dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements (Radiated)

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	5	26.7	24.6	20.7	18.6
825.0	5	27.0	24.9	21.0	18.9
836.4	5	26.8	24.7	20.8	18.7
836.6	5	27.2	25.1	21.2	19.1
848.0	5	26.5	24.4	20.5	18.4
848.8	5	26.5	24.4	20.5	18.4
Measurement uncertainty		$\pm 3\text{ dB}$			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

FREQUENCY STABILITY**SUBCLAUSE § 22.355****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 22.355, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.3	-13	-0,00000069	-0,0069
3.4	-10	-0,00000053	-0,0053
3.5	-11	-0,00000059	-0,0059
3.6	-9	-0,00000048	-0,0048
3.7	-8	-0,00000043	-0,0043
3.8	-7	-0,00000037	-0,0037
3.9	-7	-0,00000037	-0,0037
4.0	-5	-0,00000027	-0,0027
4.1	-6	-0,00000032	-0,0032
4.2	-5	-0,00000027	-0,0027
4.3	-7	-0,00000037	-0,0037
4.4	-8	-0,00000043	-0,0043

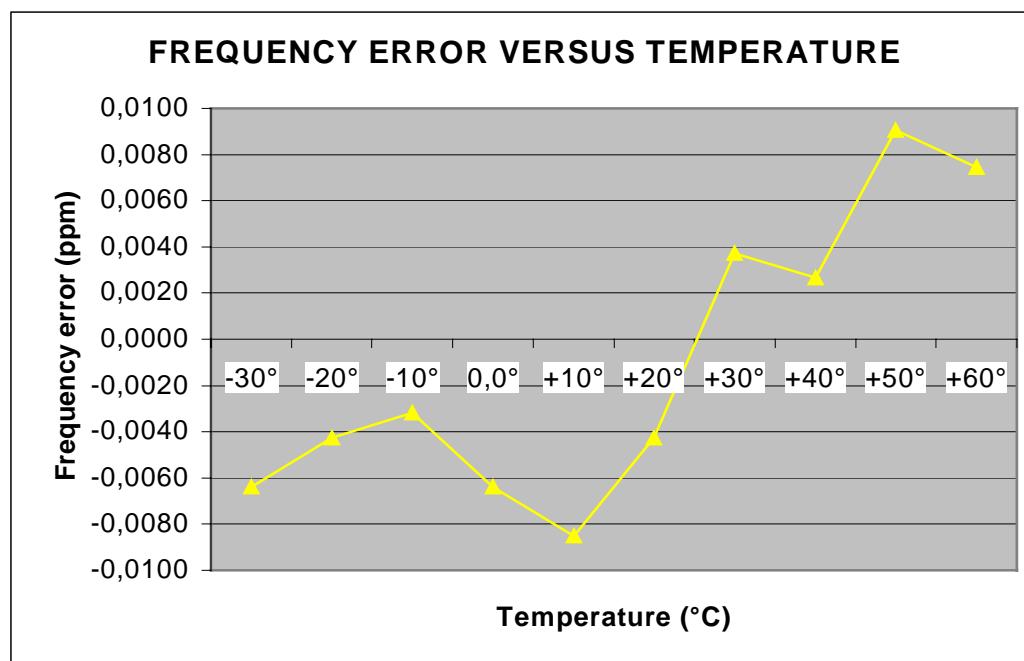
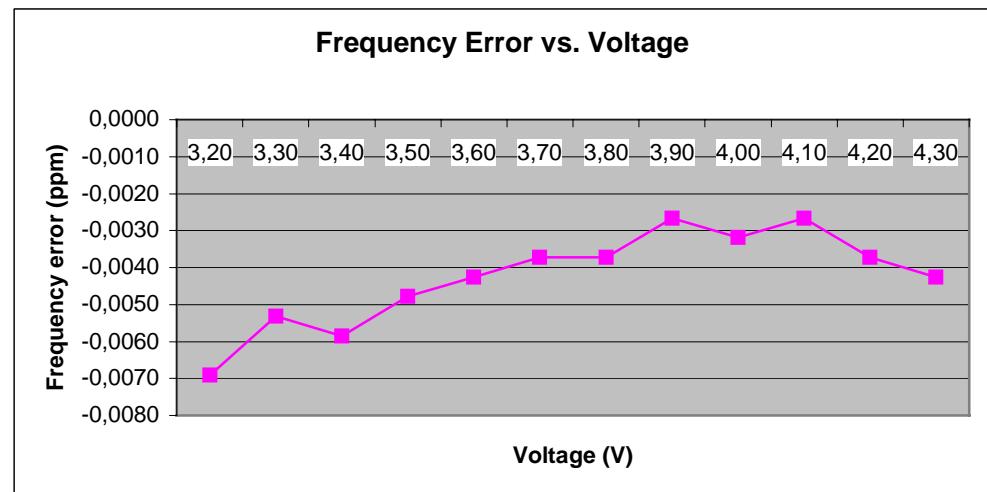
AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-12	-0,00000064	-0,0064
-20	-8	-0,00000043	-0,0043
-10	-6	-0,00000032	-0,0032
±0.0	-12	-0,00000064	-0,0064
+10	-16	-0,00000085	-0,0085
+20	-8	-0,00000043	-0,0043
+30	+7	0,00000037	0,0037
+40	+5	0,00000027	0,0027
+50	+17	0,00000090	0,0090
+60	+14	0,00000074	0,0074

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64



EMISSIONS LIMITS**§22.917****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

Measurement Limit:

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-22:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission ERP (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 128					
824,2		24.6	-13.0 (37.6 dBc)		carrier
no traceable peak found					complies
CH 189					
836,4		24.7	-13.0 (37.7 dBc)		carrier
no traceable peak found					complies
CH 251					
848,8		24.4	-13.0 (37.4 dBc)		carrier
no traceable peak found					complies
Measurement uncertainty		± 0.5dB			

Sample calculation:

Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result	ERP	Substitution Antenna
MHz	dB μ V	dBm	dBi	dBd	dB	dBm	dBm	
836.4	122.0	35.9		-10.50	1.67	24.70		UHAP chwarzbeck S/N 460

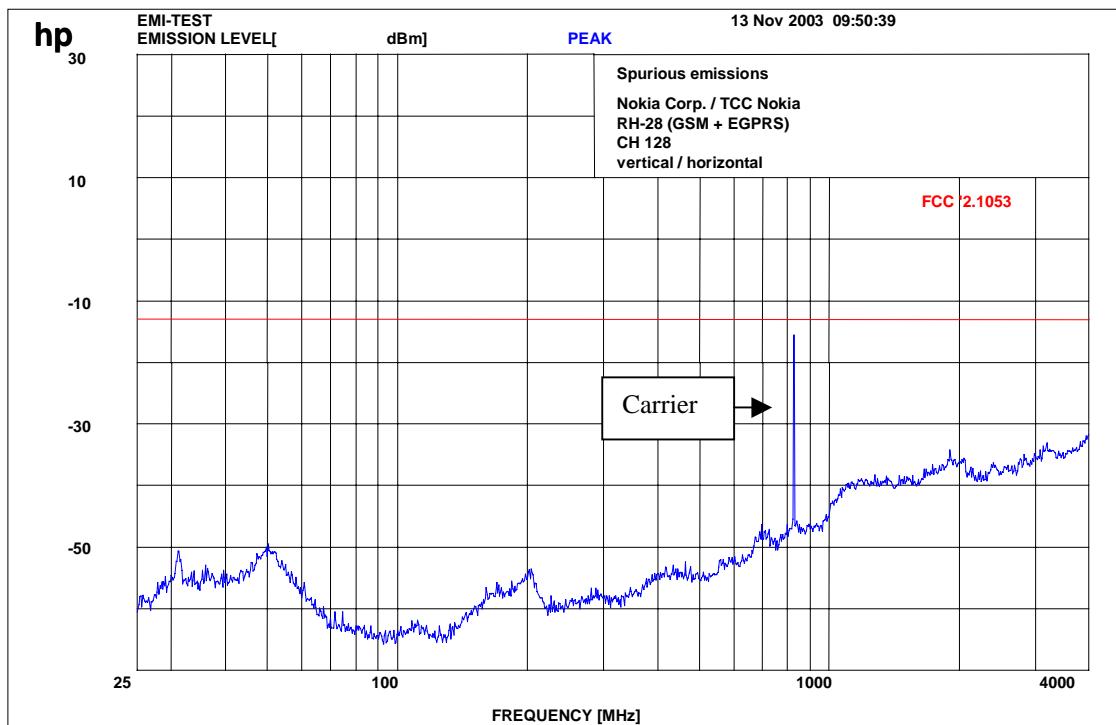
$$\text{ERP} = \text{SG (dBm)} - \text{Cable Loss (dB)} + \text{Ant. gain (dB)}$$

*ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.1\text{dBi}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 128 (up to 4 GHz)

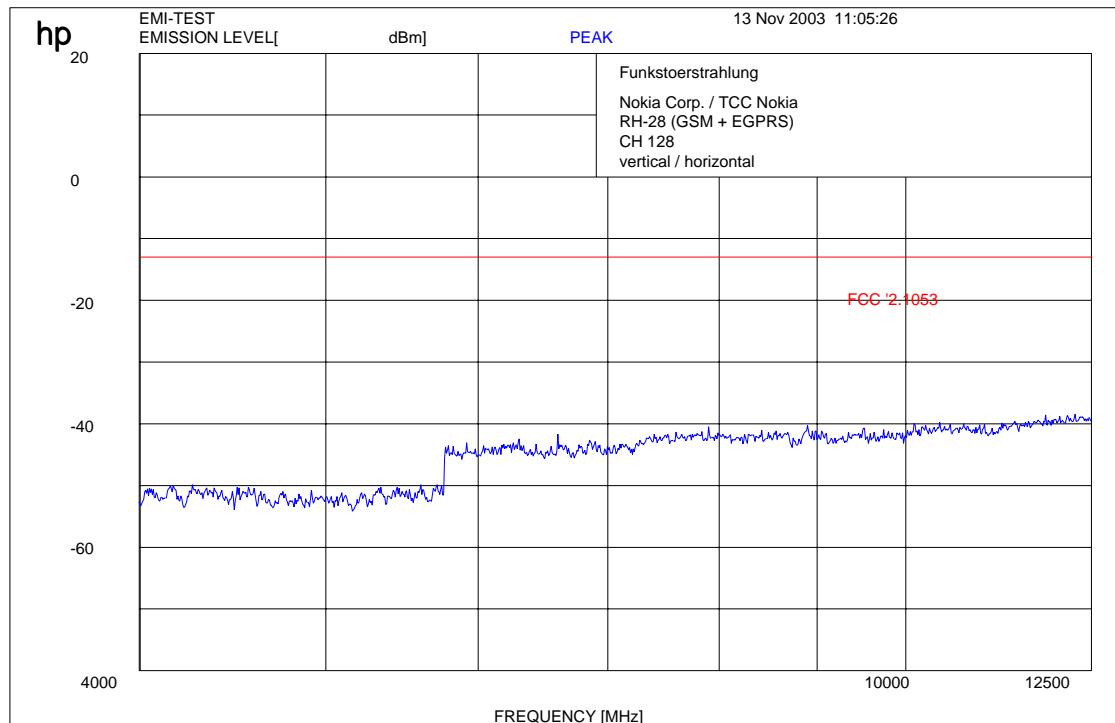


$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 128 (up to 12 GHz)

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

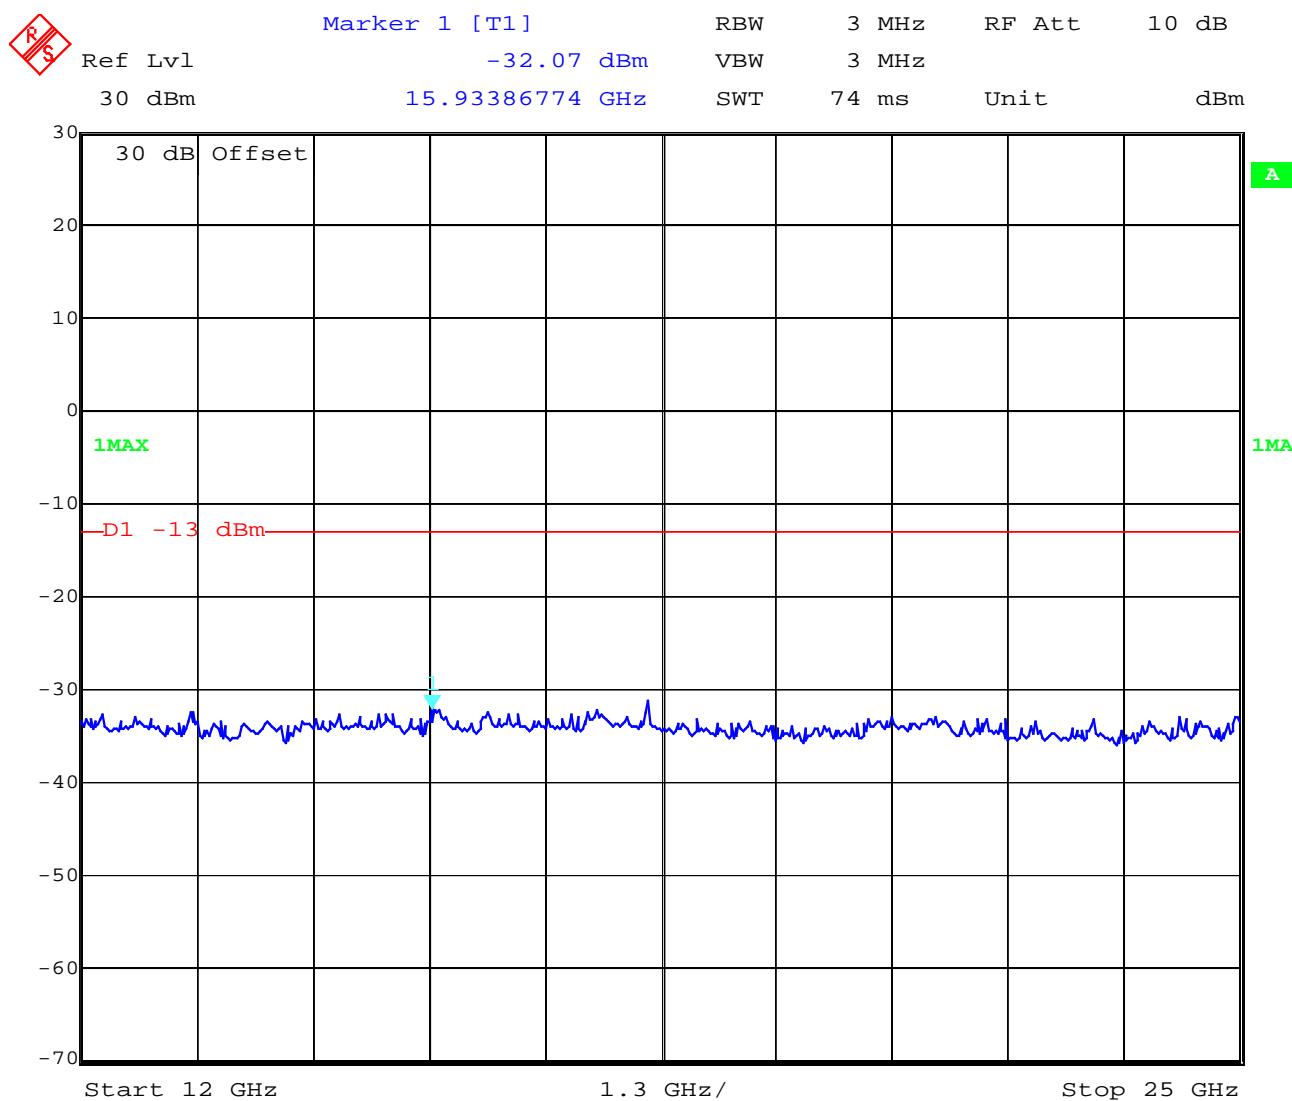
$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

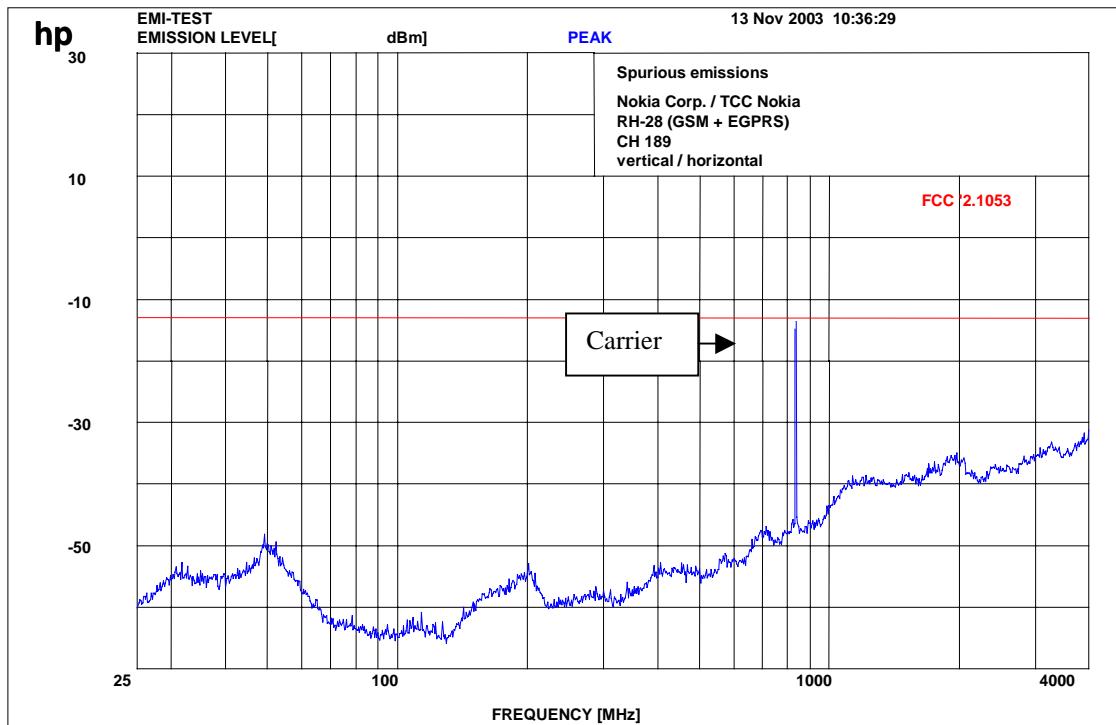
(for reference numbers see test equipment listing)

Channel 128 :- 25 GHz



Date: 17.NOV.2003 07:53:00

Channel 189 (up to 4 GHz)



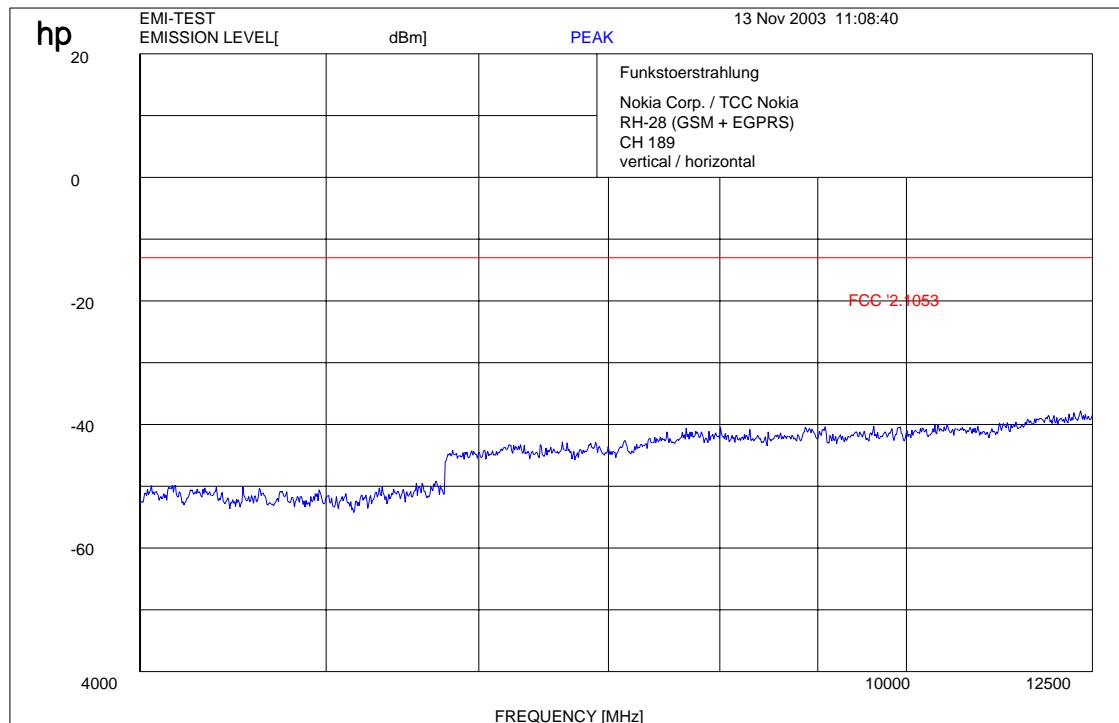
$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 189 (up to 12 GHz)

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

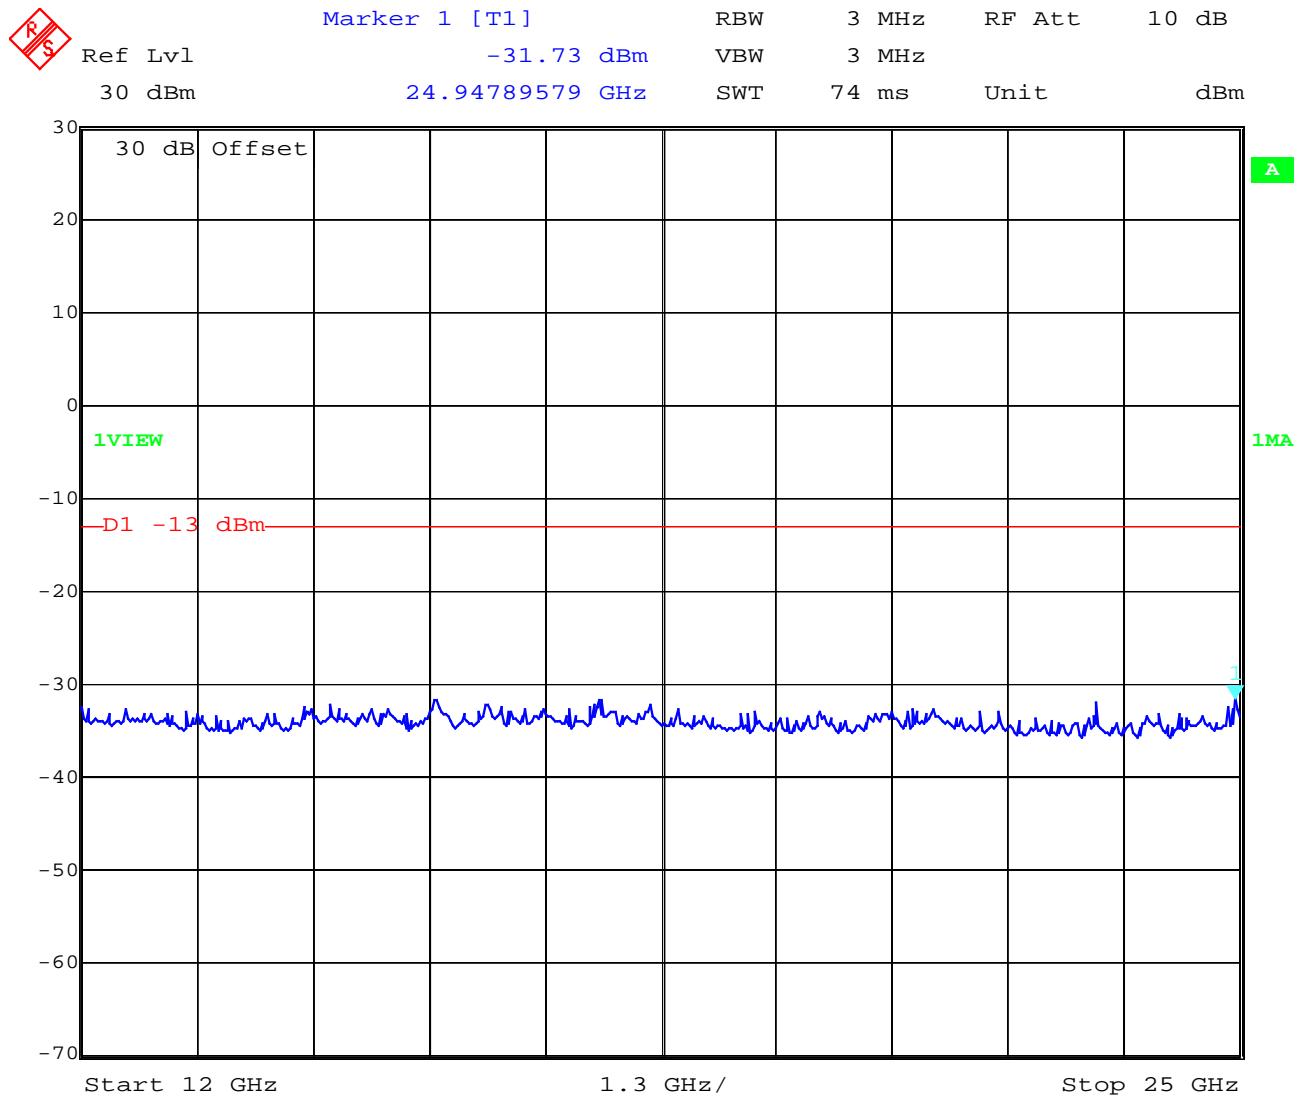
$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

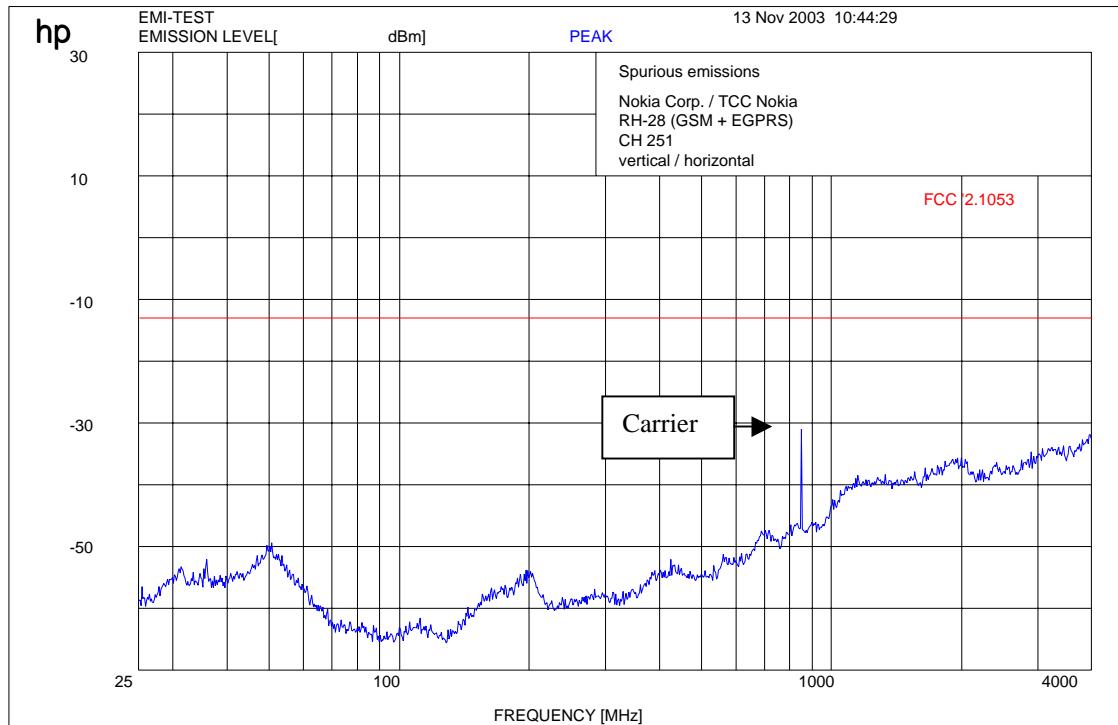
Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 189 : -25 GHz

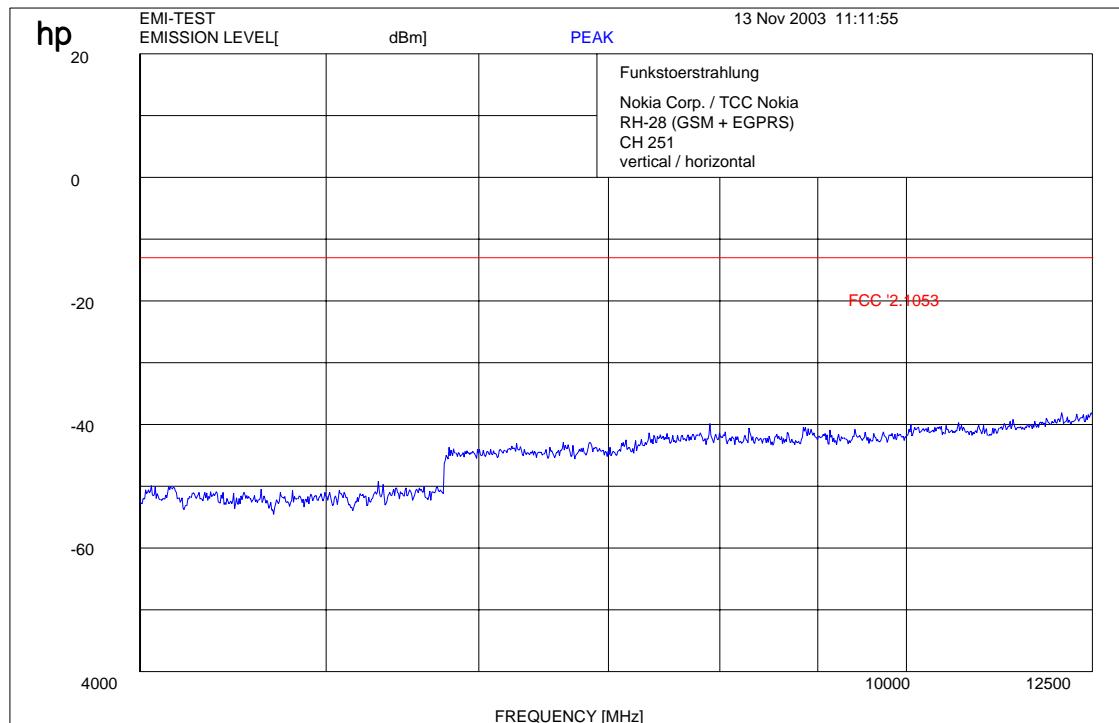


Channel 251 up to 4 GHz

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

Channel 251 up to 12 GHz

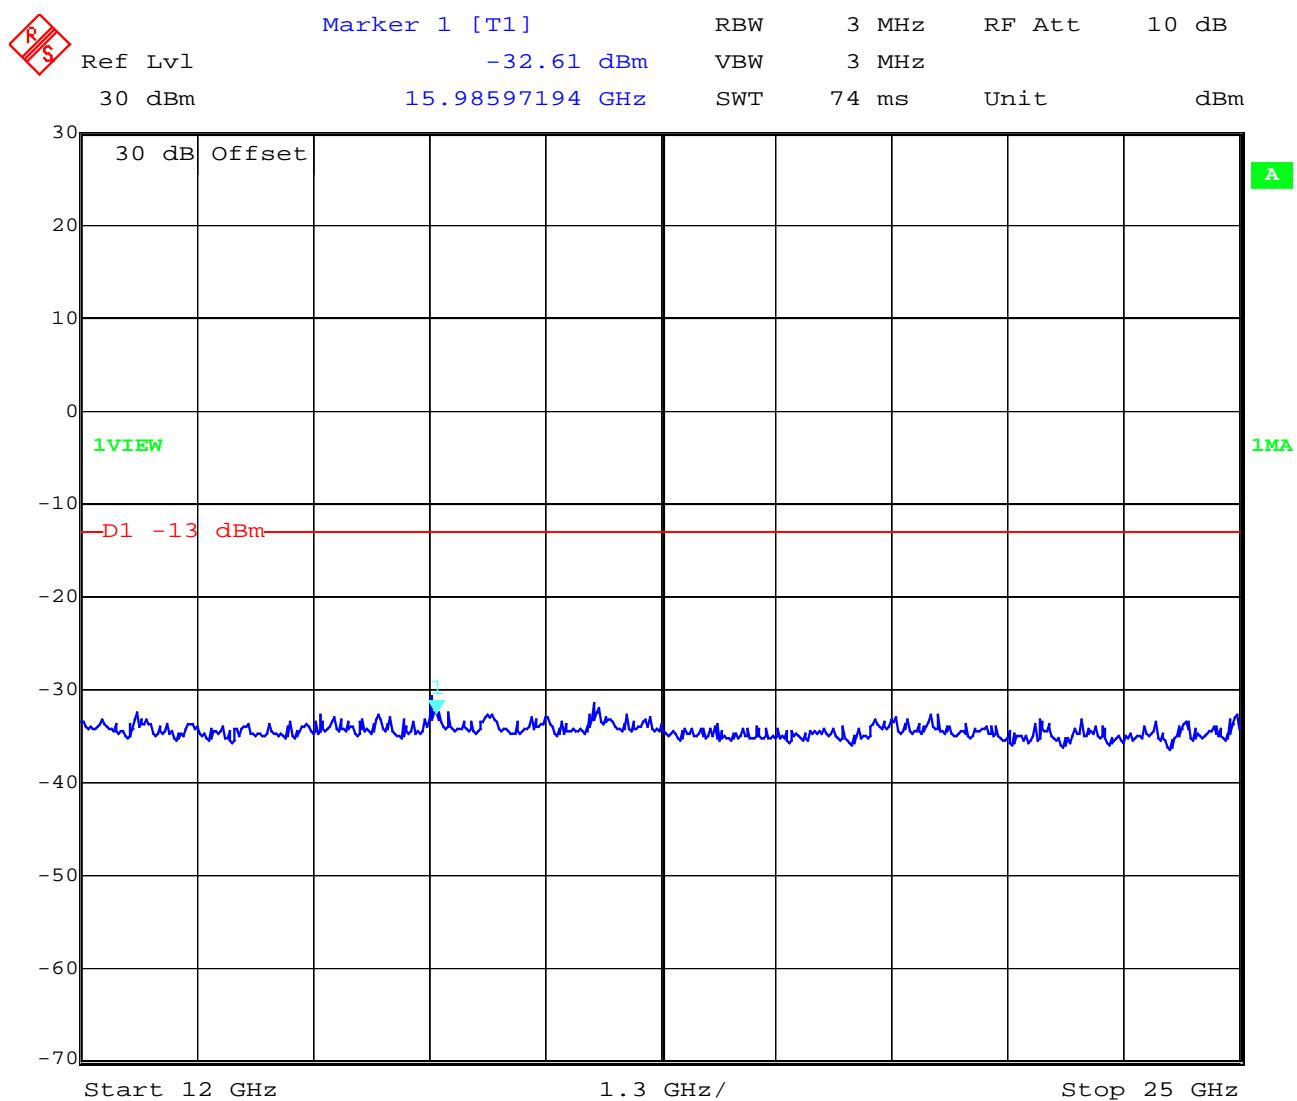
$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 251 : -25 GHz

Date: 17.NOV.2003 07:52:31

Idle-Mode**RECEIVER SPURIOUS RADIATION****§ 15.109****Radiated**

These measurements were done with a Laptop computer (Sony VAJO, Printer, serial device, Data cable DKU-2 and charger ACP-12E)

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
33.41	QP	25.7						
49.63	QP	14.6						
151.28	QP	28.2						
257.73	QP	80.4						
621.25	QP	27.2						
Measurement uncertainty			$\pm 3 \text{ dB}$					

f < 1 GHz : RBW/VBW: 100 kHz

f \geq 1 GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table**Limits****SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

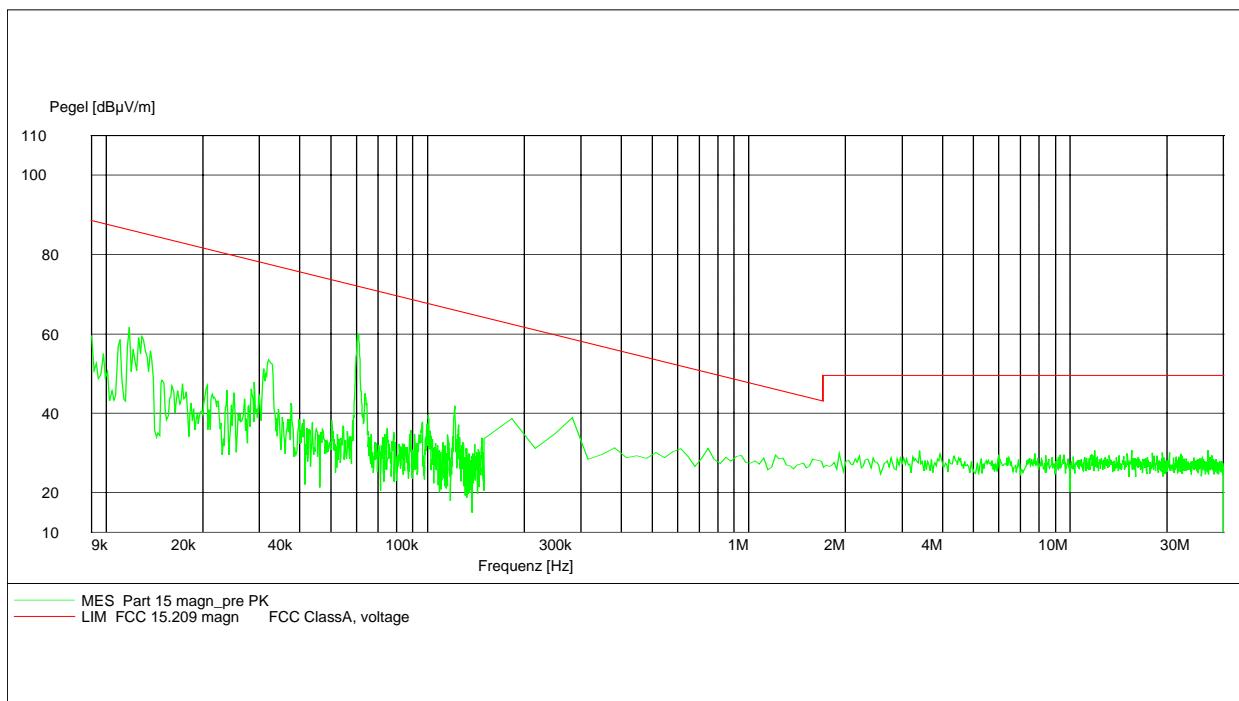
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

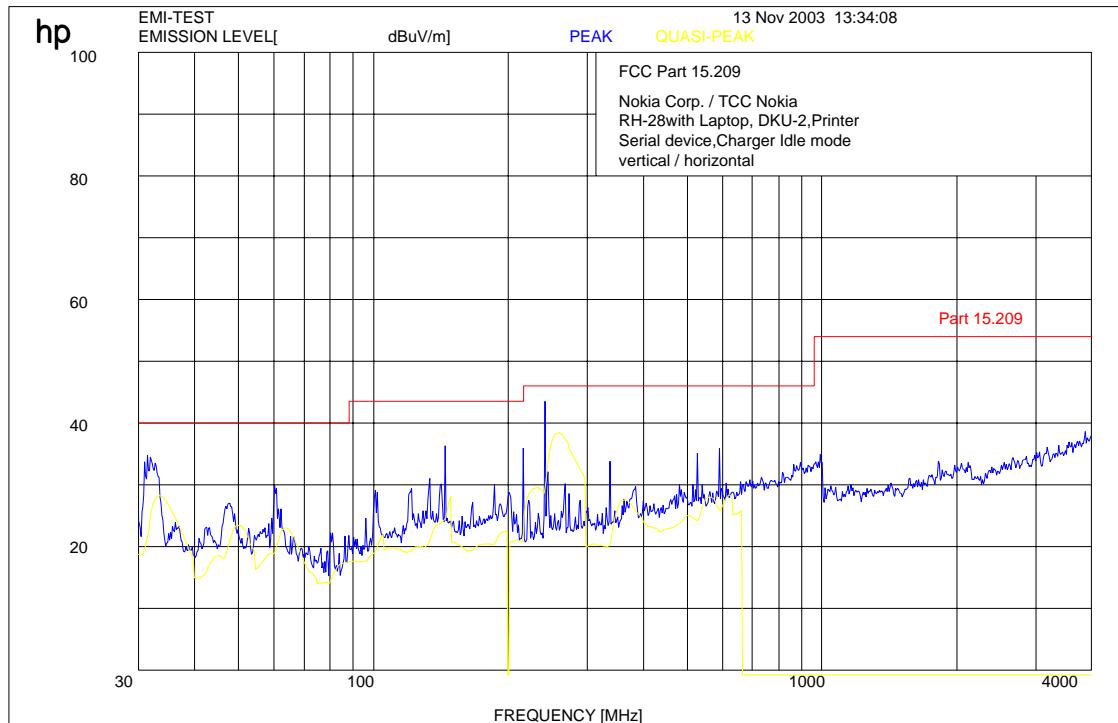
(for reference numbers see test equipment listing)

17 – 24, 64

Channel 189 (this is valid for all 3 channels and up to 30 MHz)**Idle-Mode**

EUT: RH-28 with charger, Laptop, Printer , serial device
Manufacturer: Nokia Corp / TCC Nokia
Operating Condition: GSM 850 Rx mode and Bluetooth Rx-mode
Test Site: Cetecon, Room 6
Operator: Berg M
Test Specification:
Comment: 115 V / 60 Hz
Start of Test: 14.11.03 / 12:19:31

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24, 64**

**Channel 189 (this is valid for all 3 channels and up to 4 GHz)
Idle-Mode**

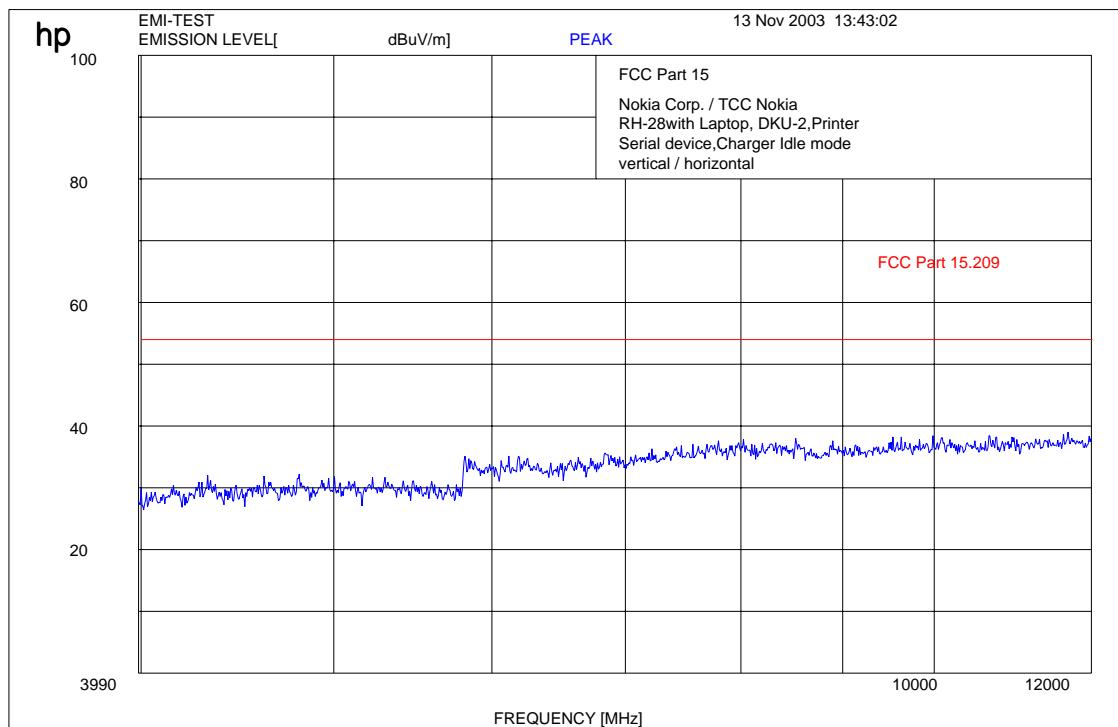
$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

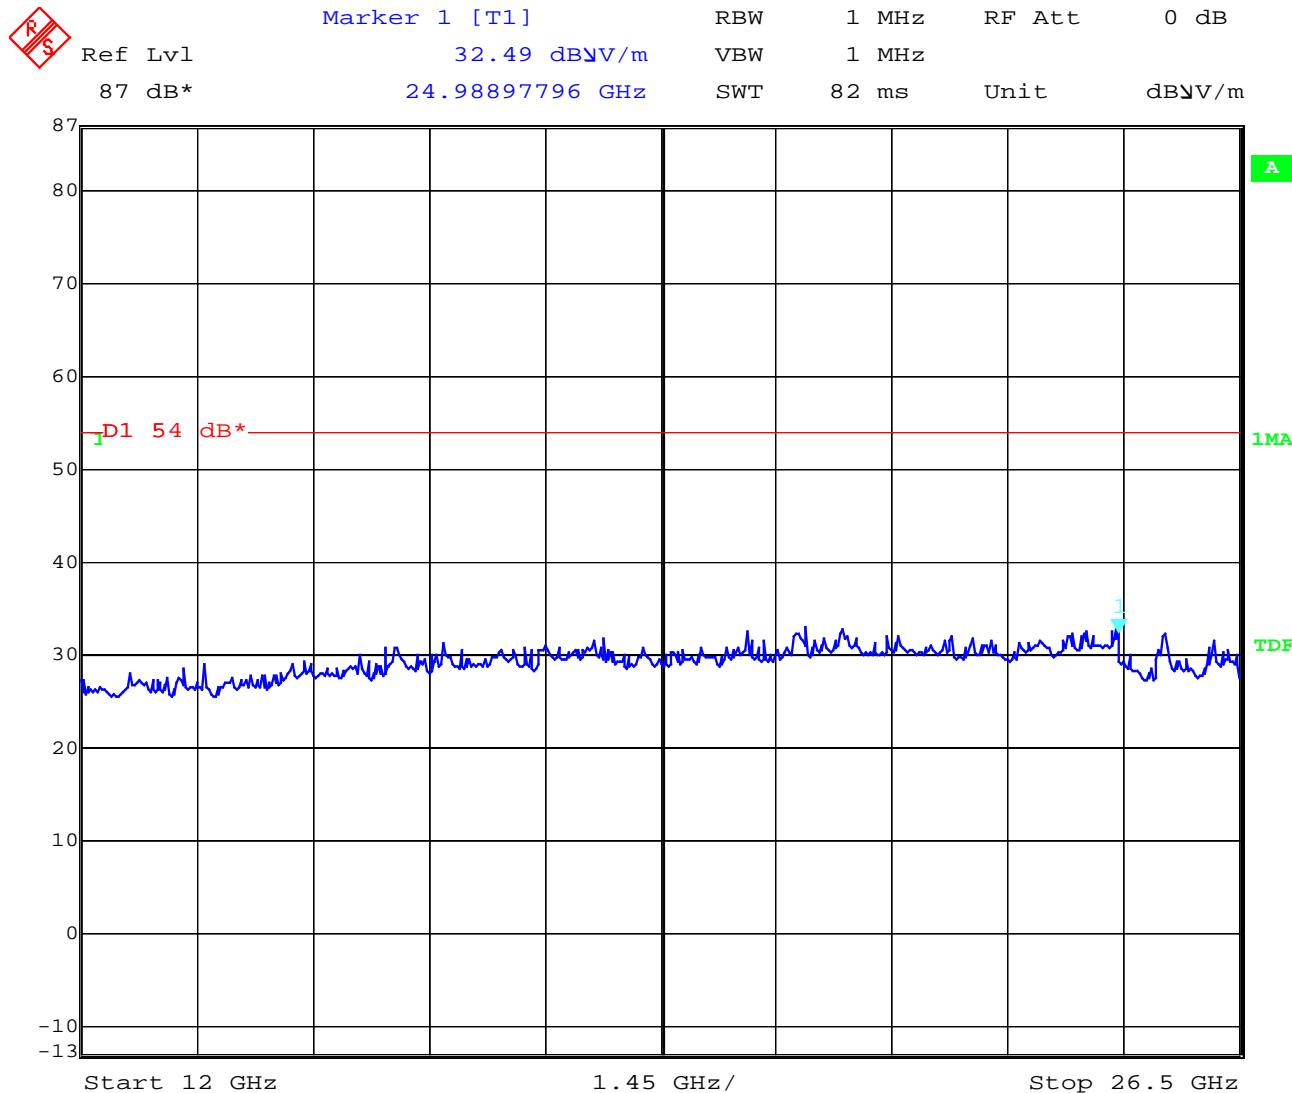
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

**Channel 189 (this is valid for all 3 channels and up to 12 GHz)
Idle-Mode****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24, 64**

Channel 189 (this is valid for all 3 channels and up to 25 GHz)



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

CONDUCTED SPURIOUS EMISSIONS**Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter**Channel Frequency**

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

Measurement Limit:

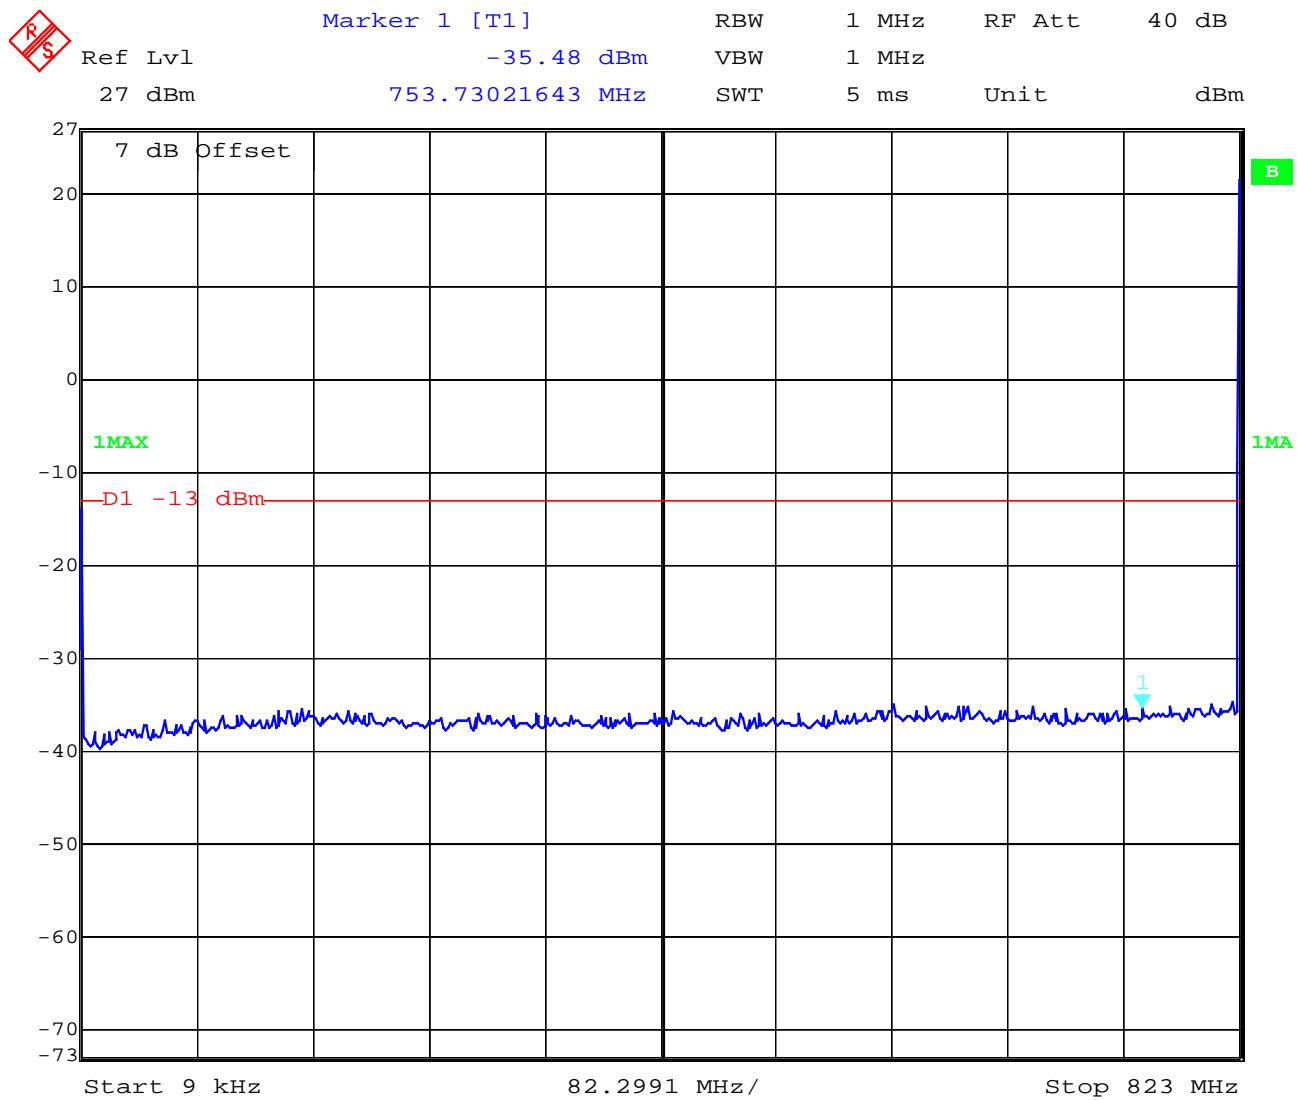
Sec. 22.917 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

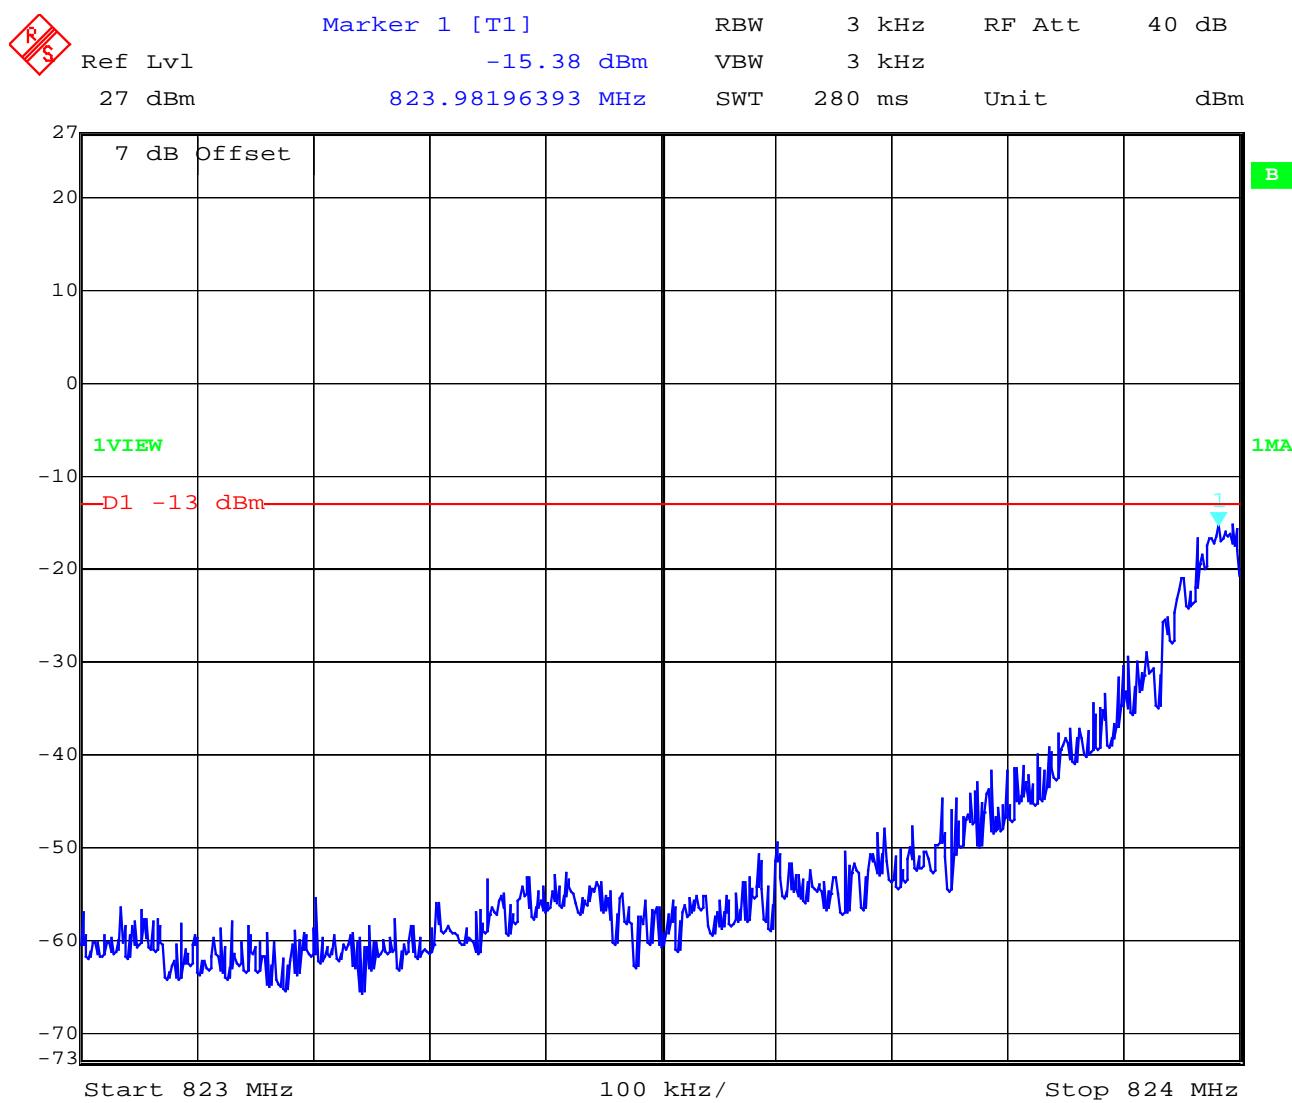
EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 128					
824,2		32.9	-13.0 (45.9 dBc)		carrier
753.730		-35.48		68.38	complies
823.982		-15.38		48.28	complies
CH 189					
836,4		32.8	-13.0 (45.8 dBc)		carrier
694.440		-35.46		68.26	complies
2870.76		-32.49		65.29	complies
CH 251					
848,8		32.7	-13.0 (45.7 dBc)		carrier
702.773		-35.93		68.63	complies
849.016		-13.78		46.48	complies
2592.28		-32.14		64.84	complies
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Measurements:**Channel: 128**

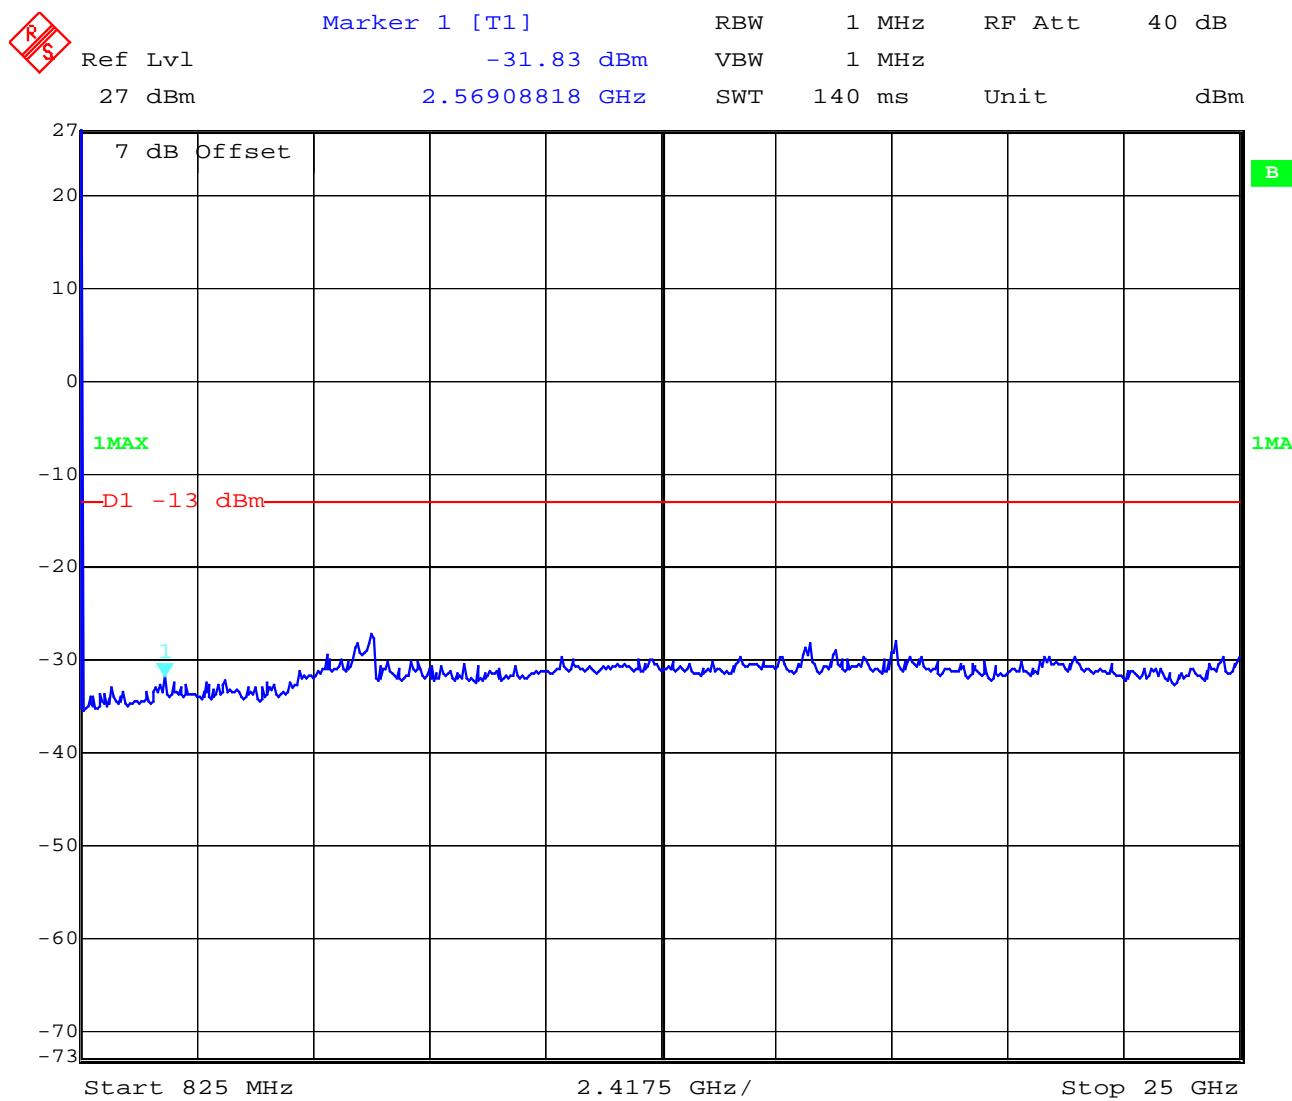
Channel 128



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

Channel 128

Date: 18.NOV.2003 09:08:54

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

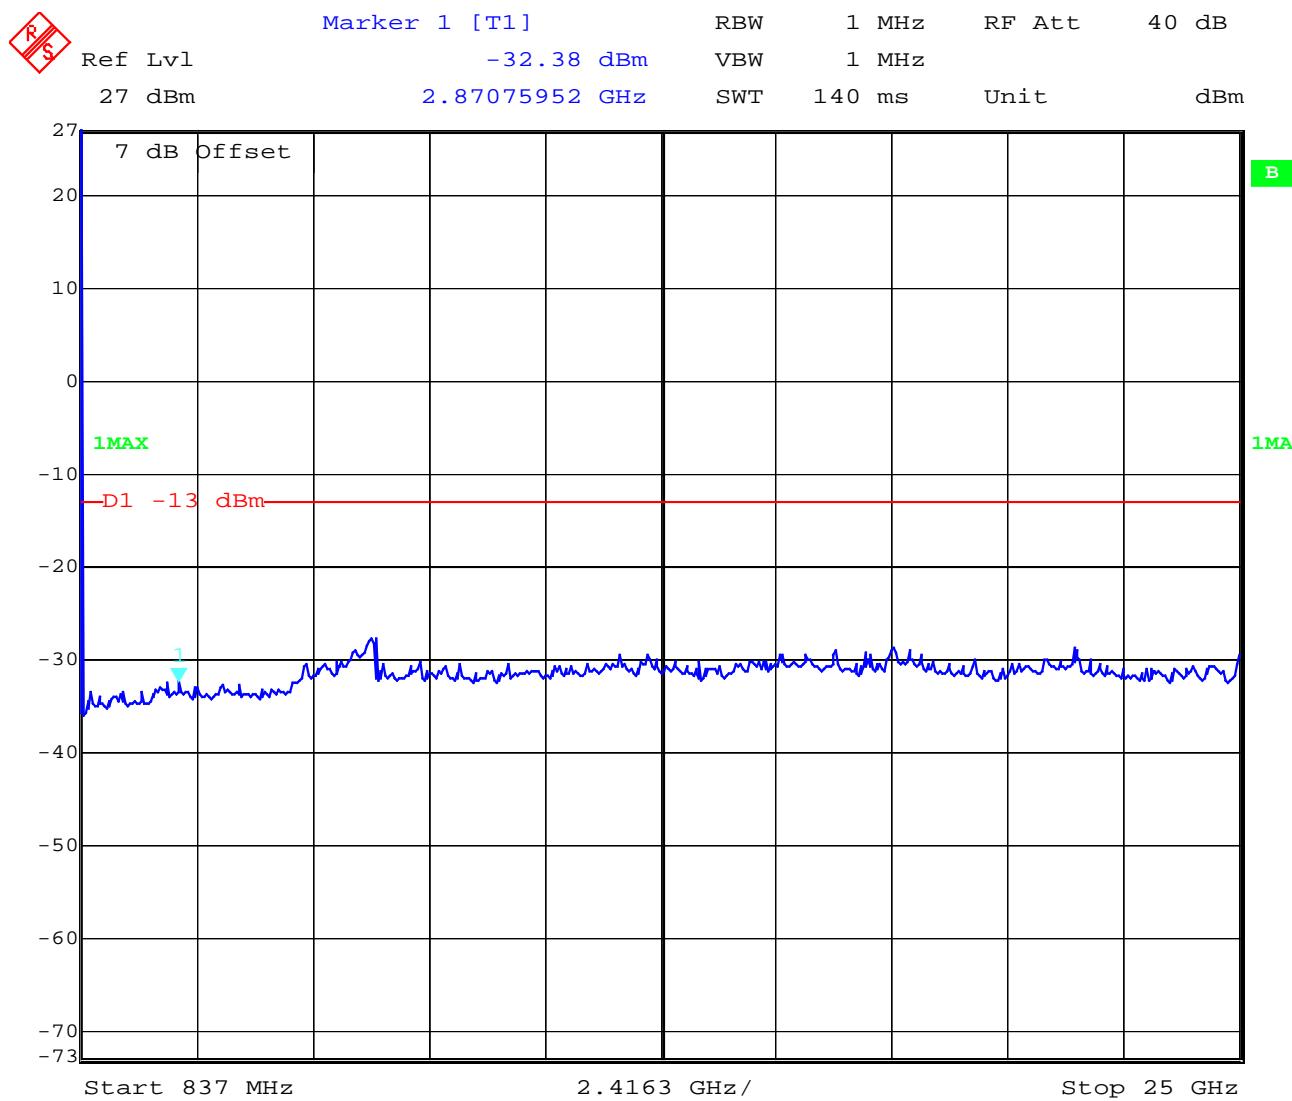
(for reference numbers see test equipment listing)

17 - 24, 64

Channel 189**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

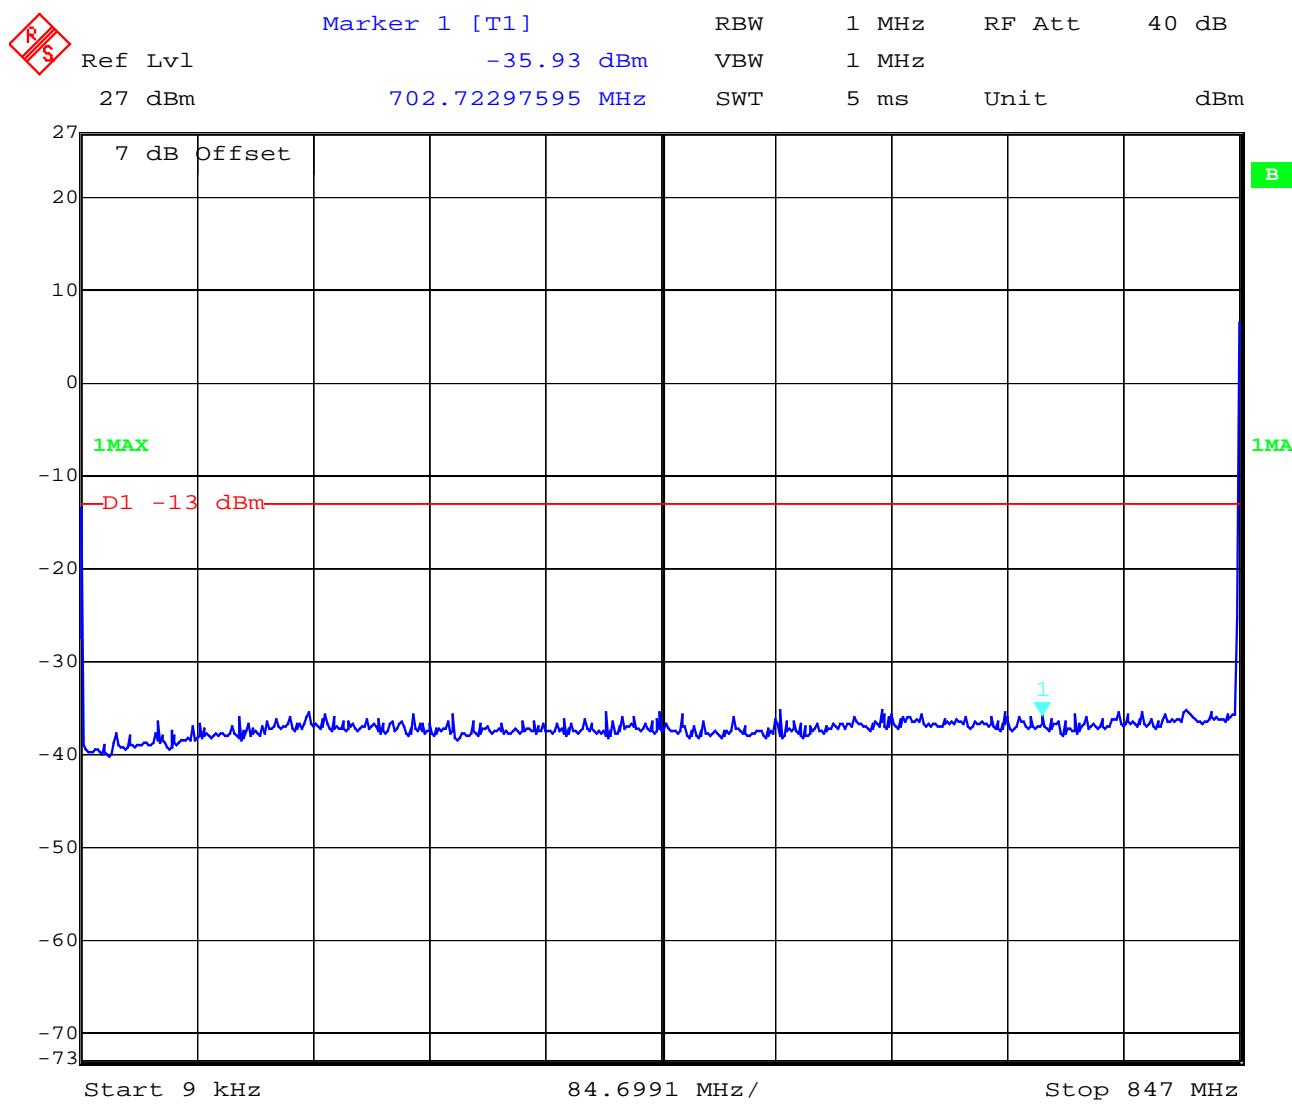
(for reference numbers see test equipment listing)

17 - 24, 64

Channel 189**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

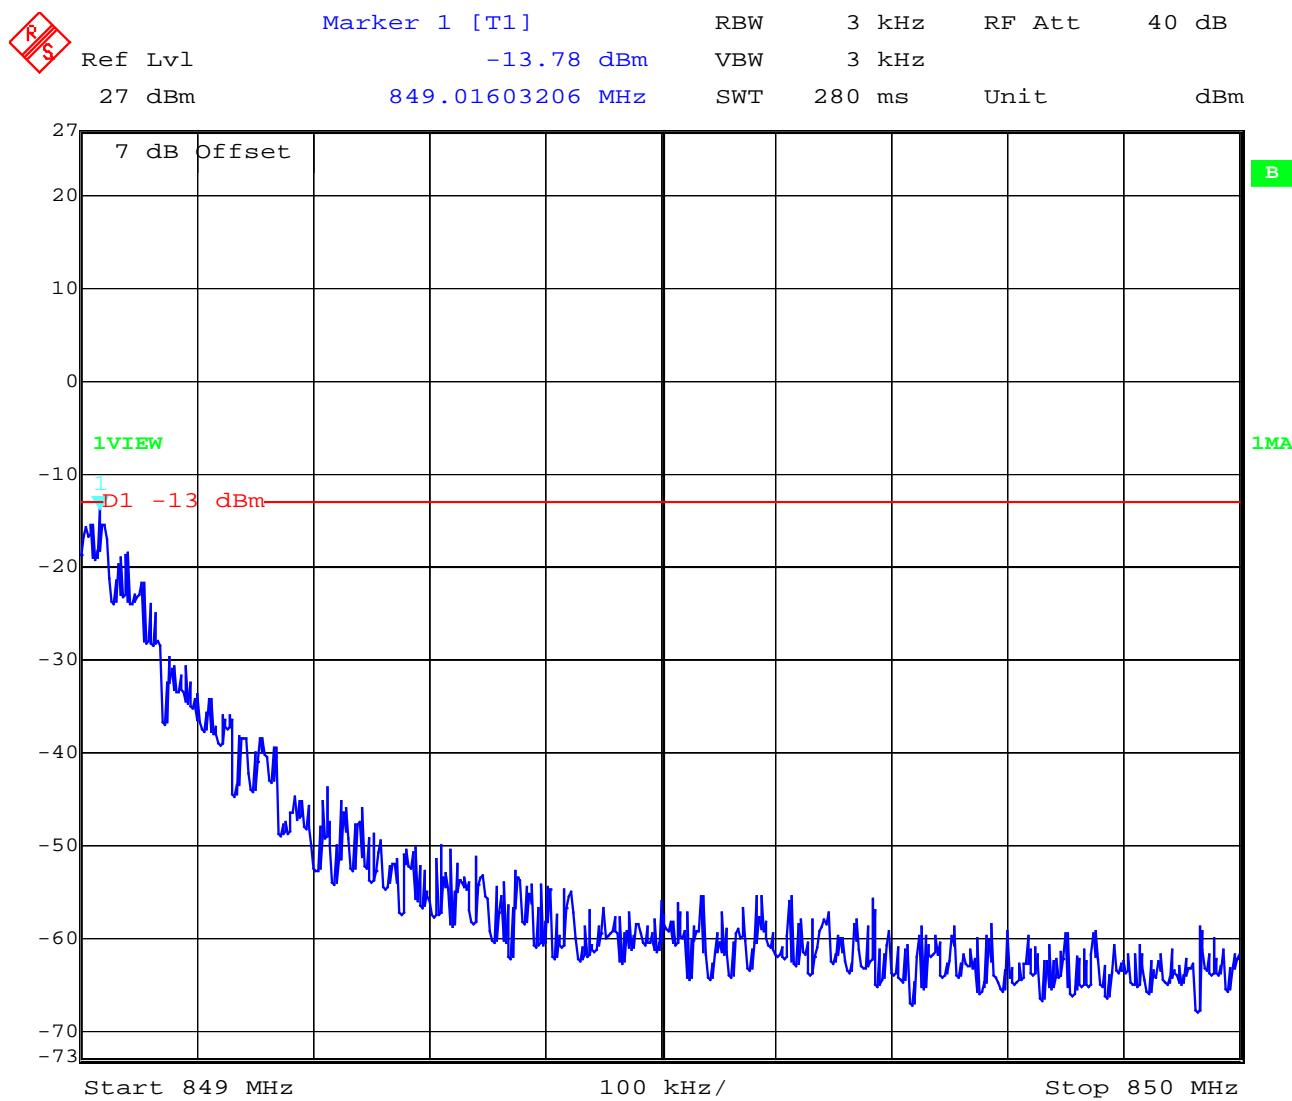
(for reference numbers see test equipment listing)

17 - 24, 64

Channel 251**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

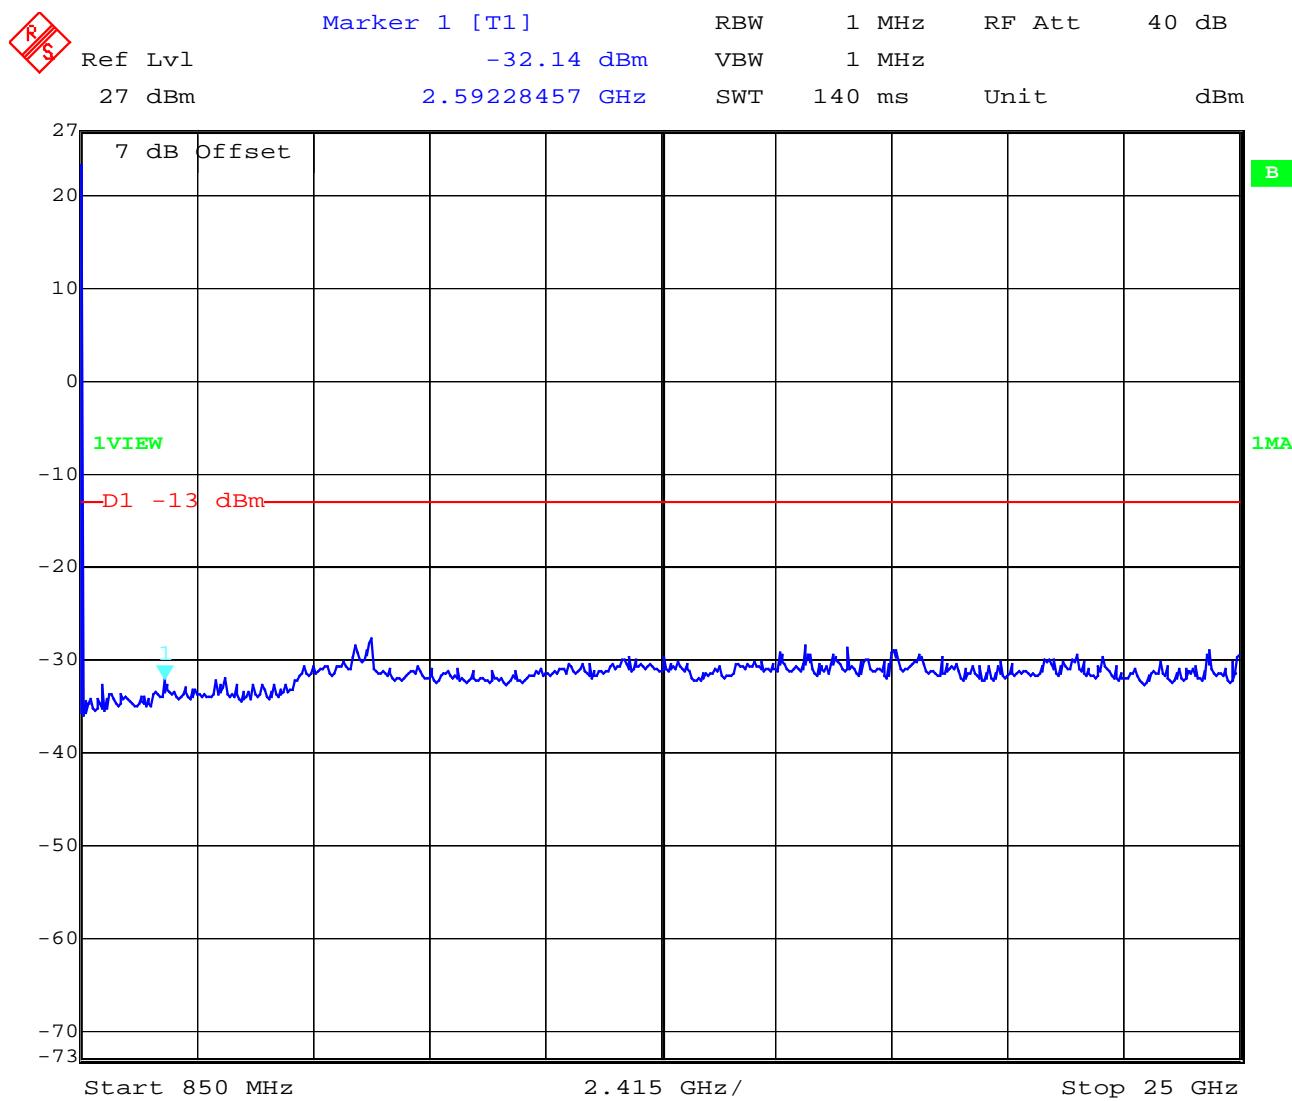
Channel 251

Date: 18.NOV.2003 09:18:55

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

Channel 251

Date: 18.NOV.2003 09:20:13

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

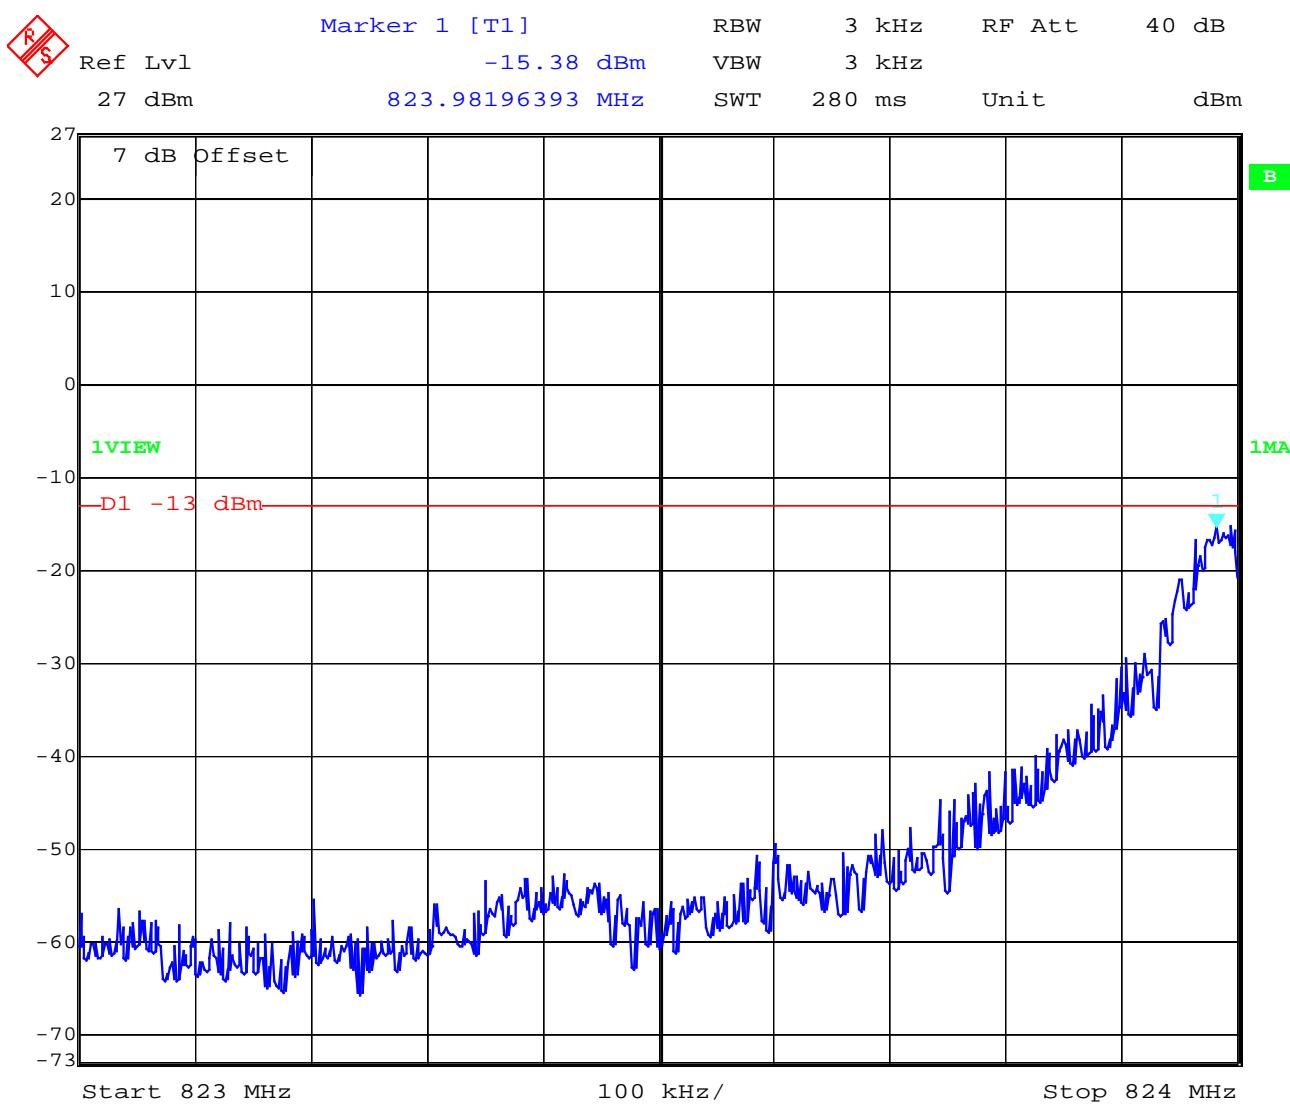
(for reference numbers see test equipment listing)

17 - 24, 64

BLOCK EDGE REQUIREMENTS FOR BLOCK 1 TO BLOCK 4**Measurement Limit:**

Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

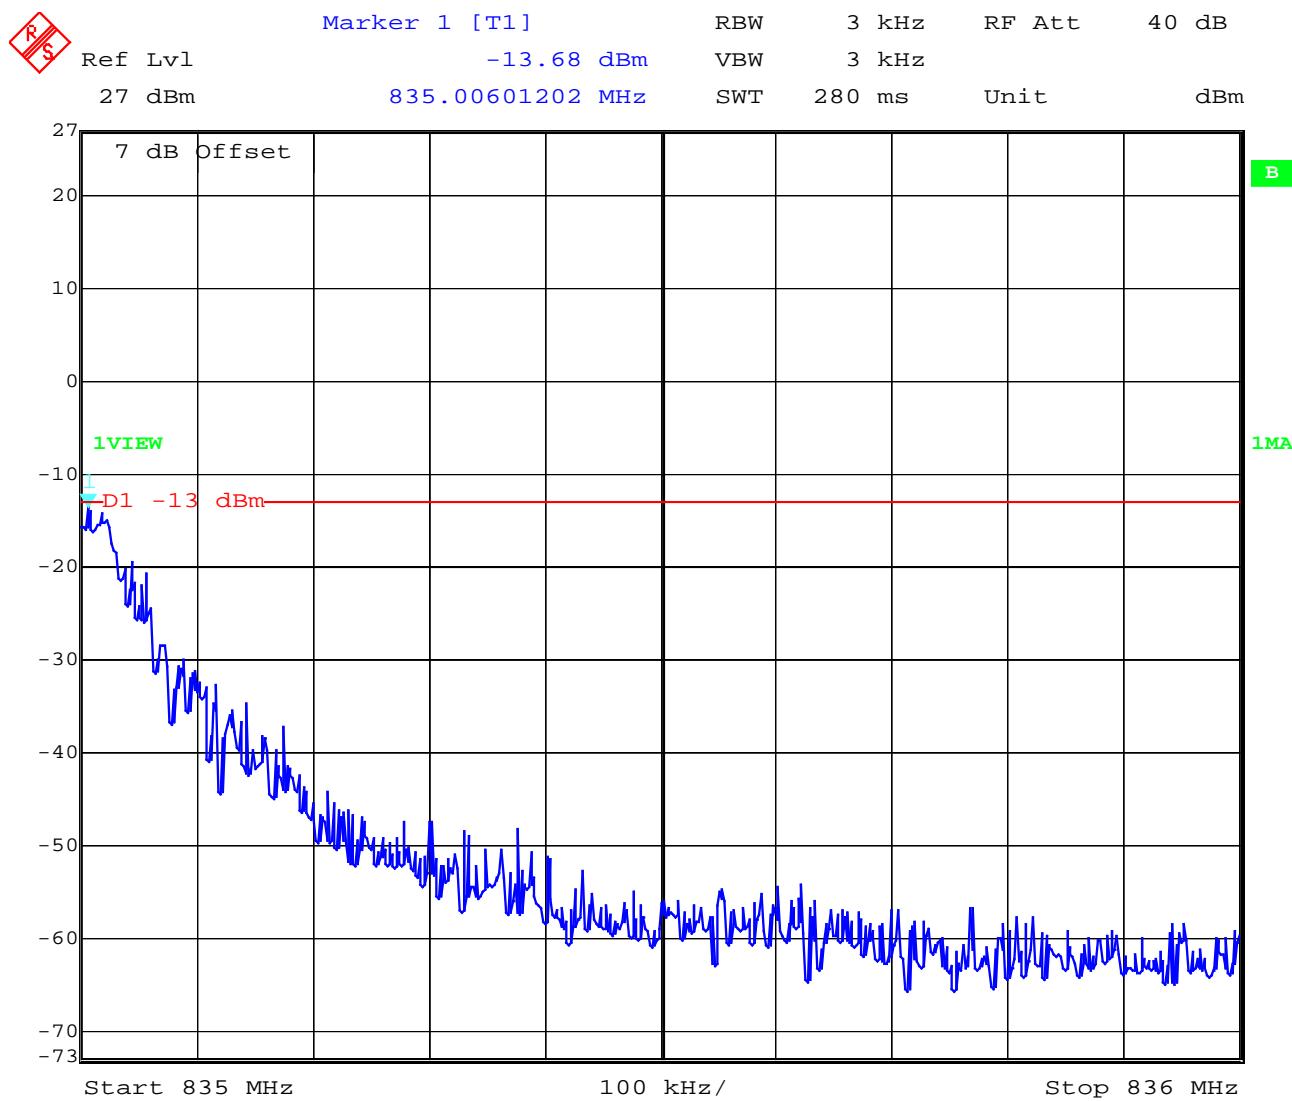
Measurements:**Block 1 Channel 128**

Date: 18.NOV.2003 09:07:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

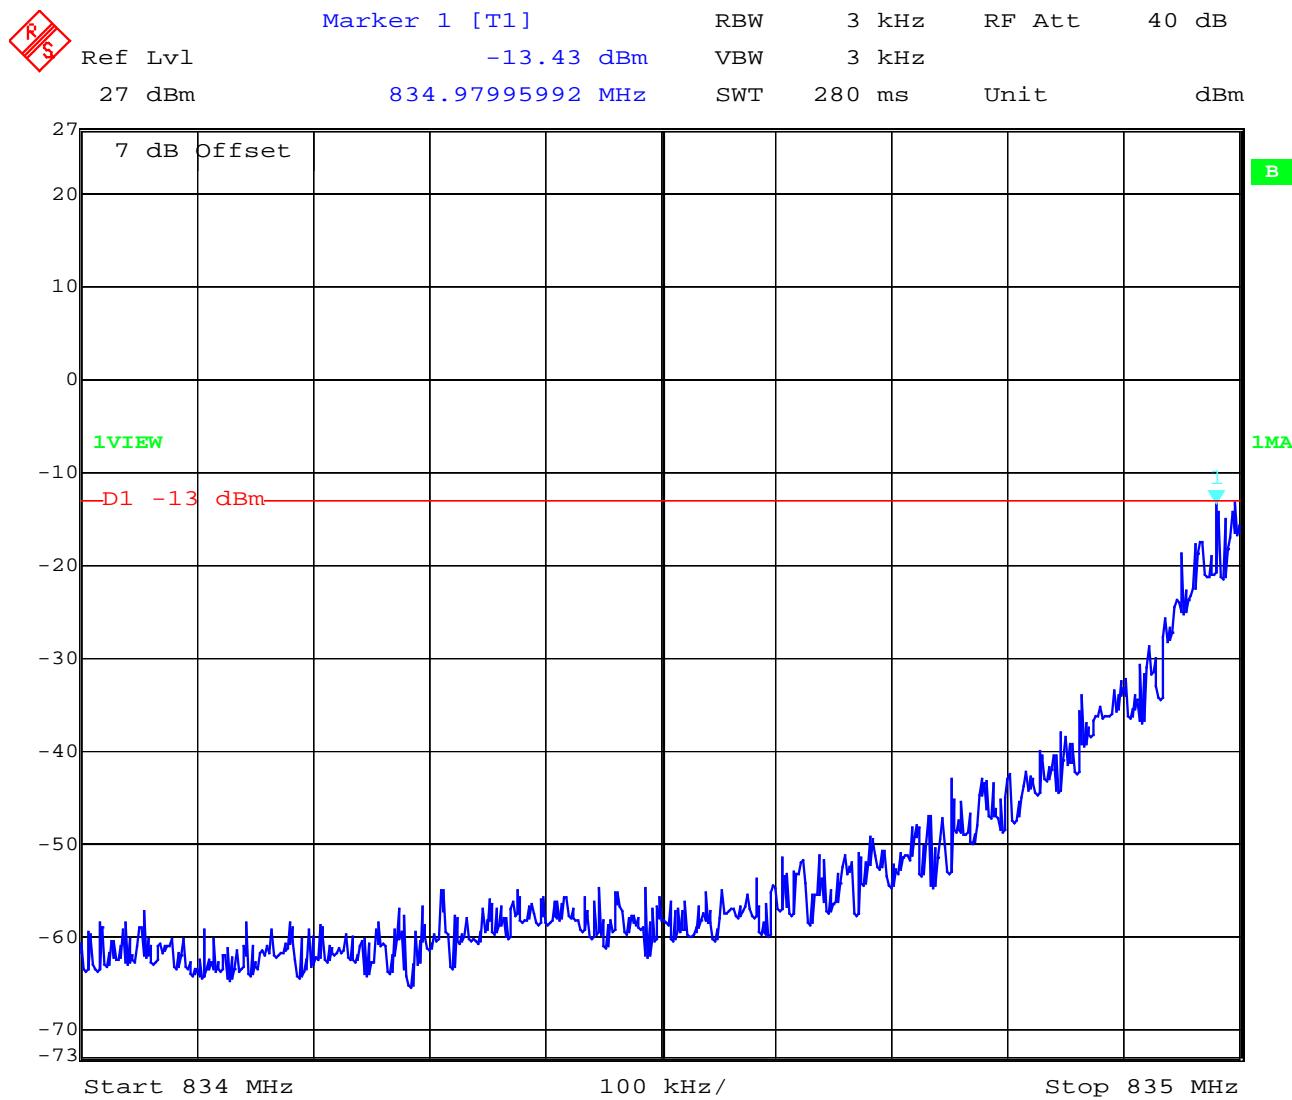
Block 1 Channel 181

Date: 18.NOV.2003 09:48:13

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

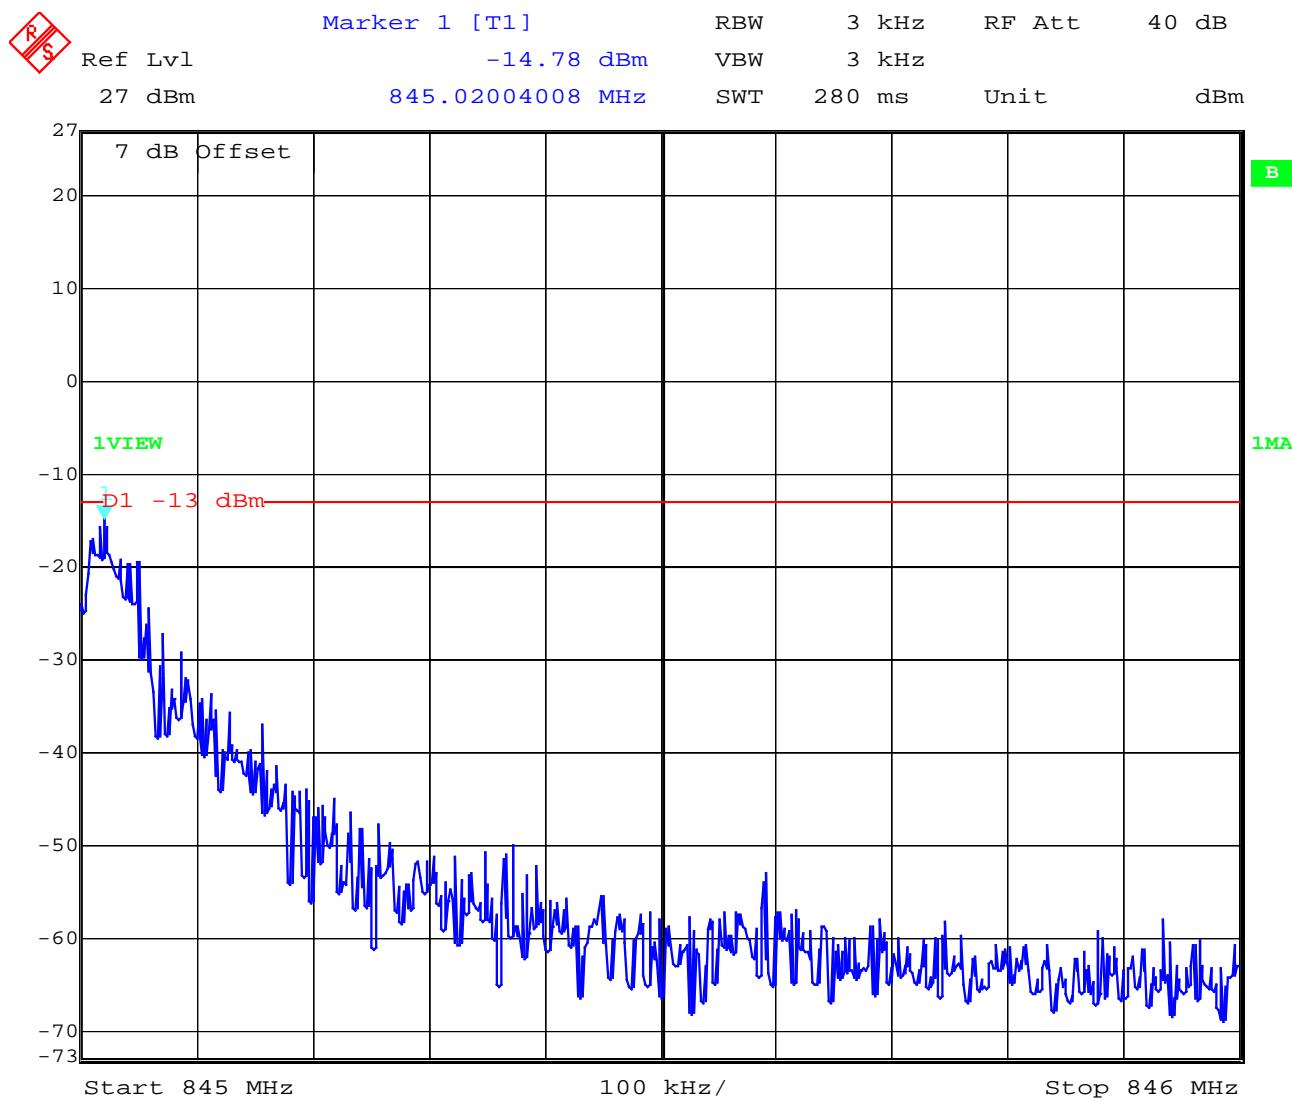
Block 2 Channel 183

Date: 18.NOV.2003 09:48:54

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

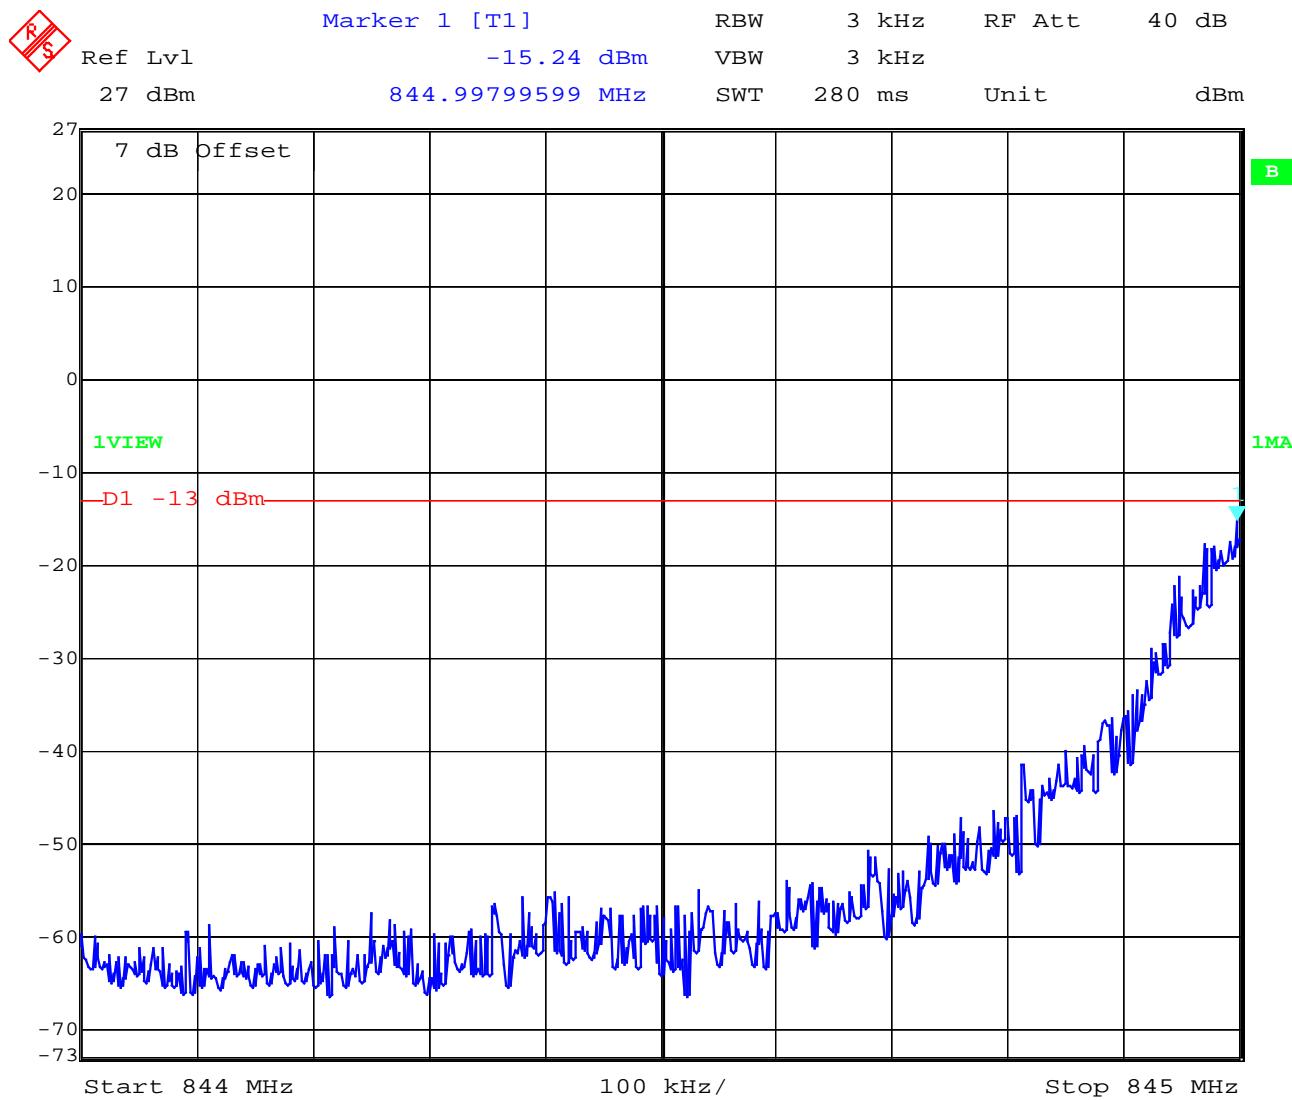
Block 2 Channel 231

Date: 18.NOV.2003 09:49:36

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

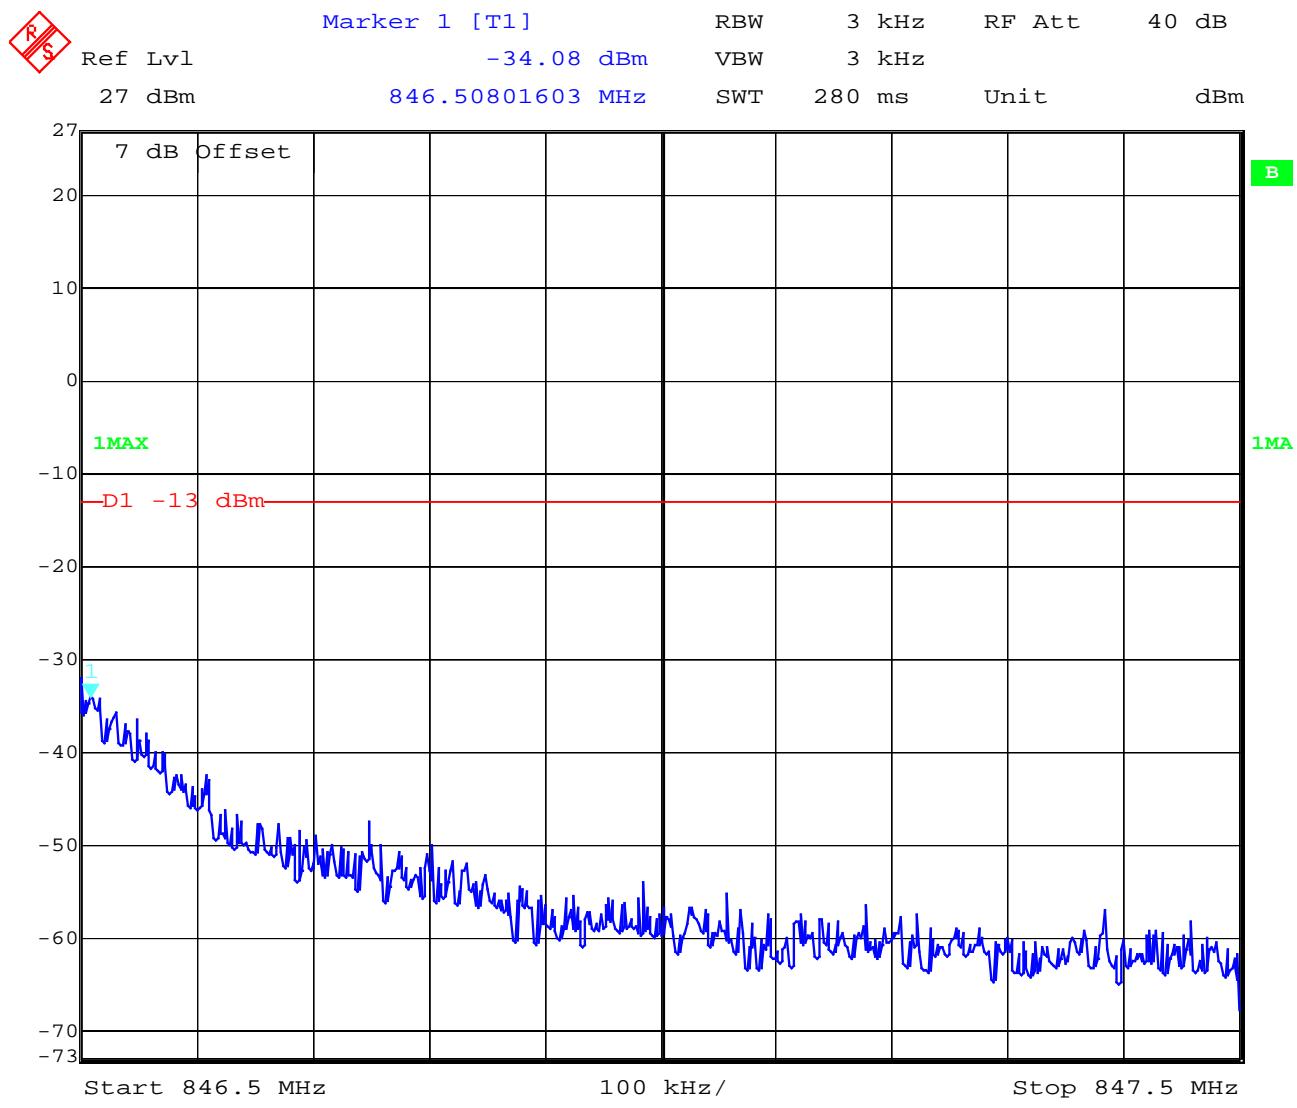
(for reference numbers see test equipment listing)

17 - 24, 64

Block 3 Channel 233**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

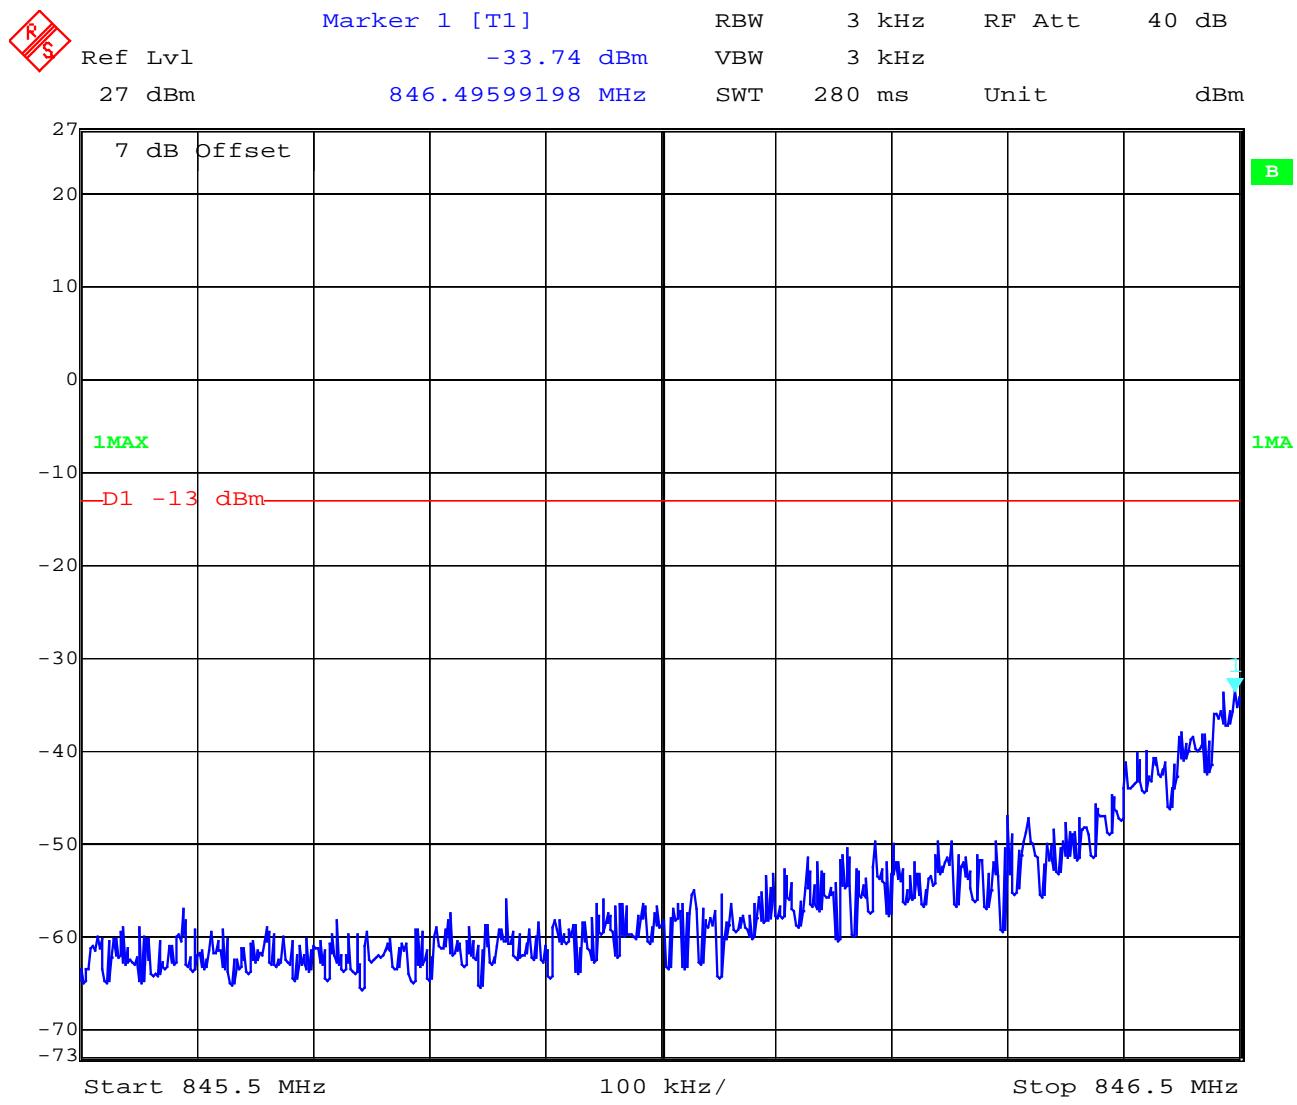
(for reference numbers see test equipment listing)

17 - 24, 64

Block 3 Channel 238**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

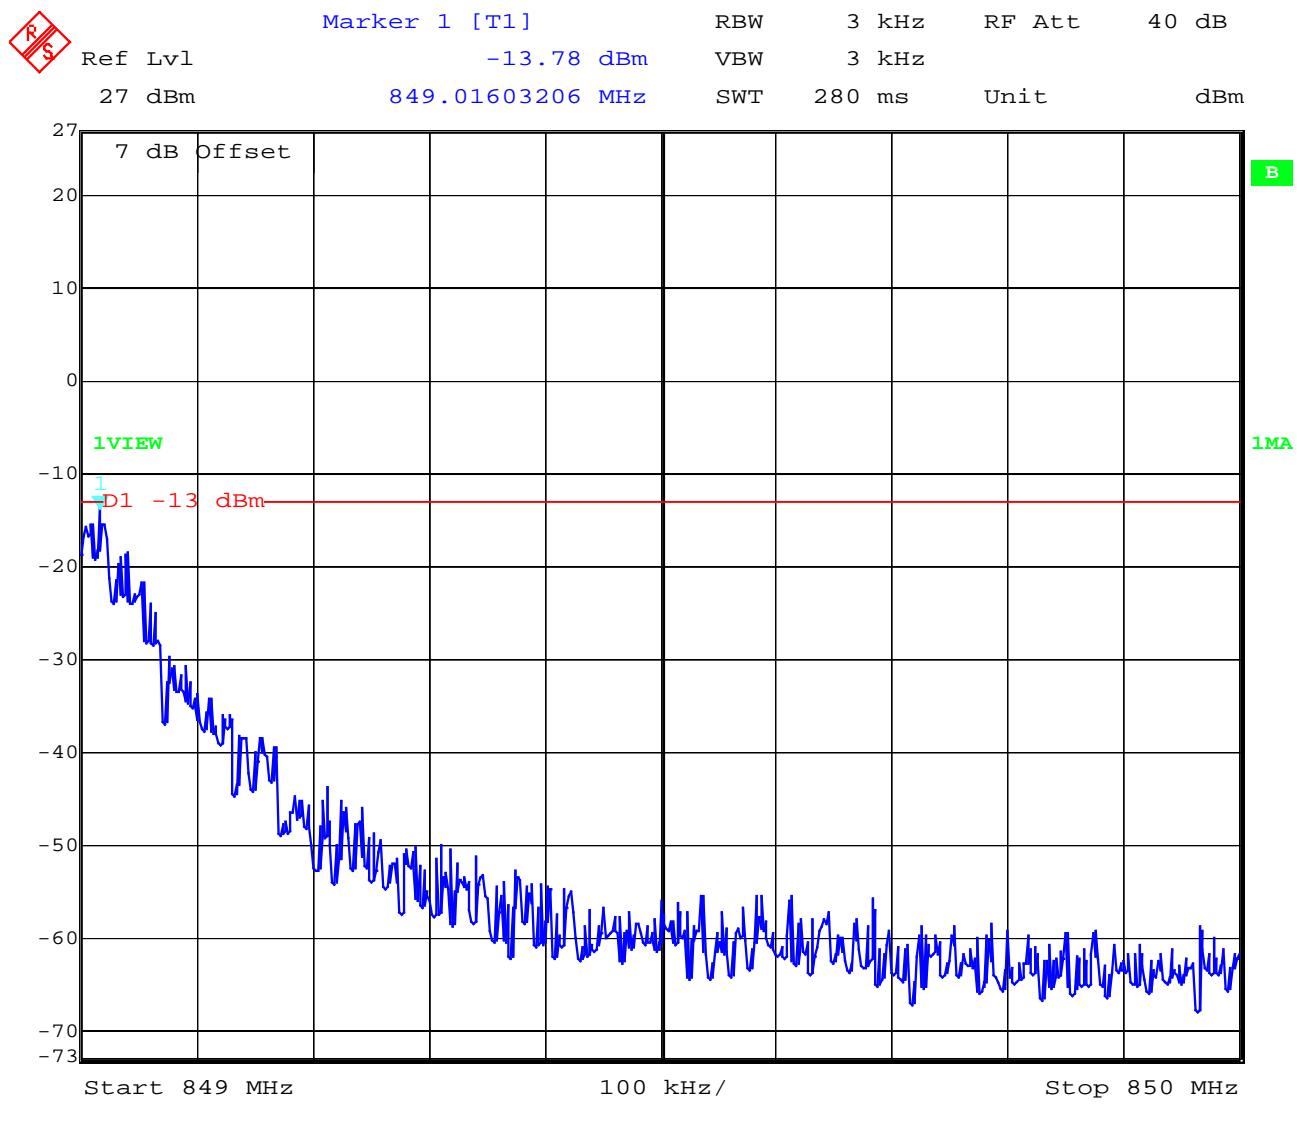
(for reference numbers see test equipment listing)

17 - 24, 64

Block 4 Channel 241**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

Block 4 Channel 251

Date: 18.NOV.2003 09:18:55

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

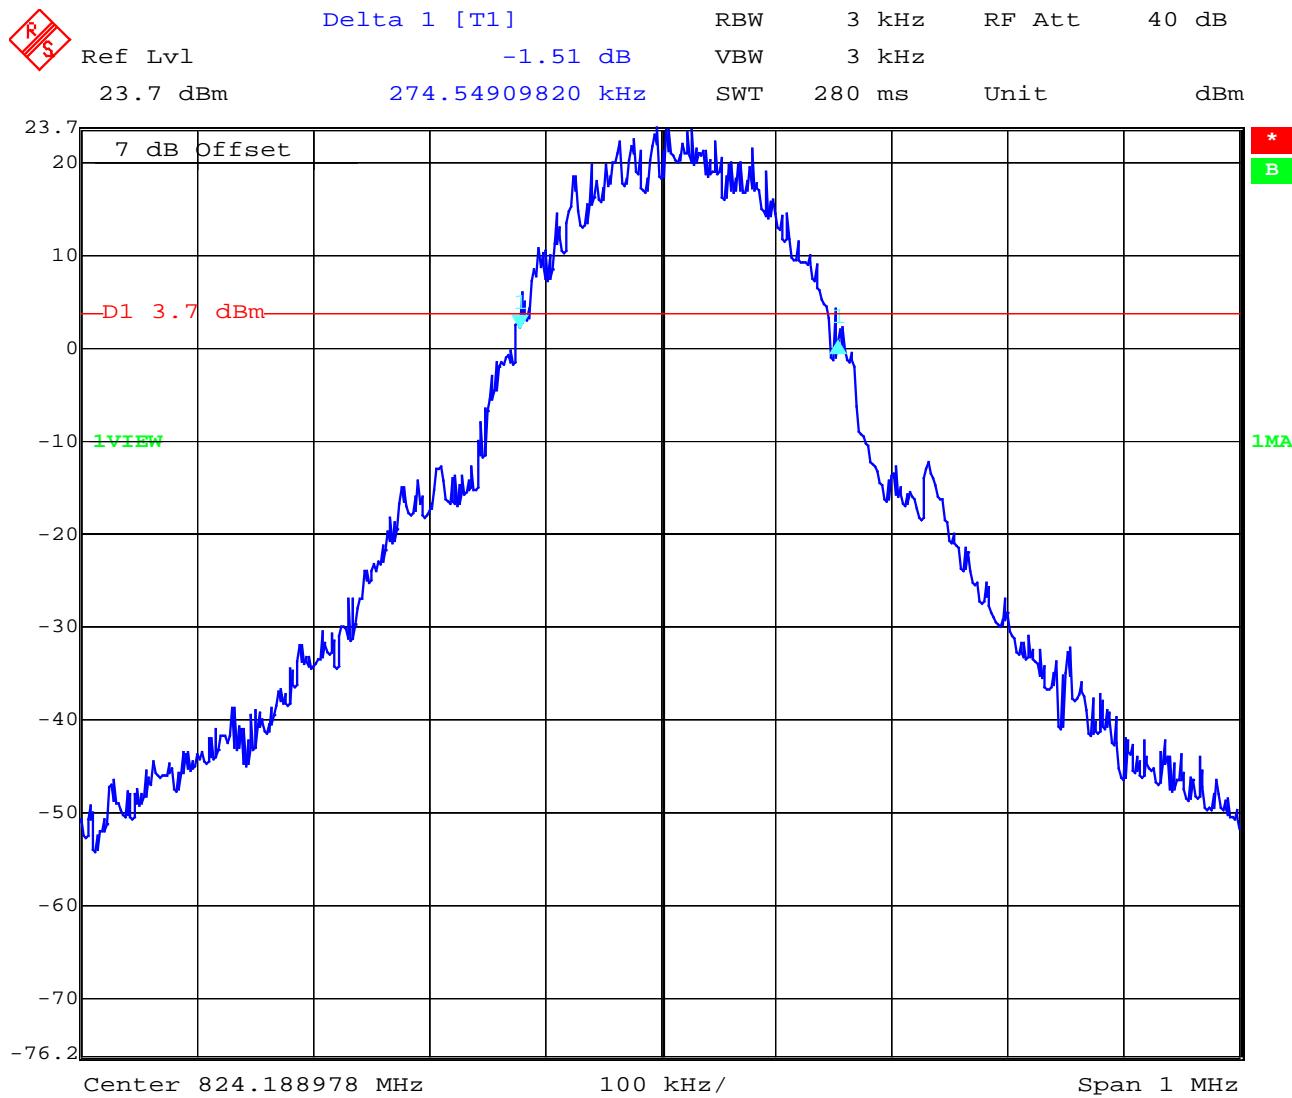
OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
824.2 MHz	274.549	310.621
836.4 MHz	268.537	308.617
848.8 MHz	272.545	312.625

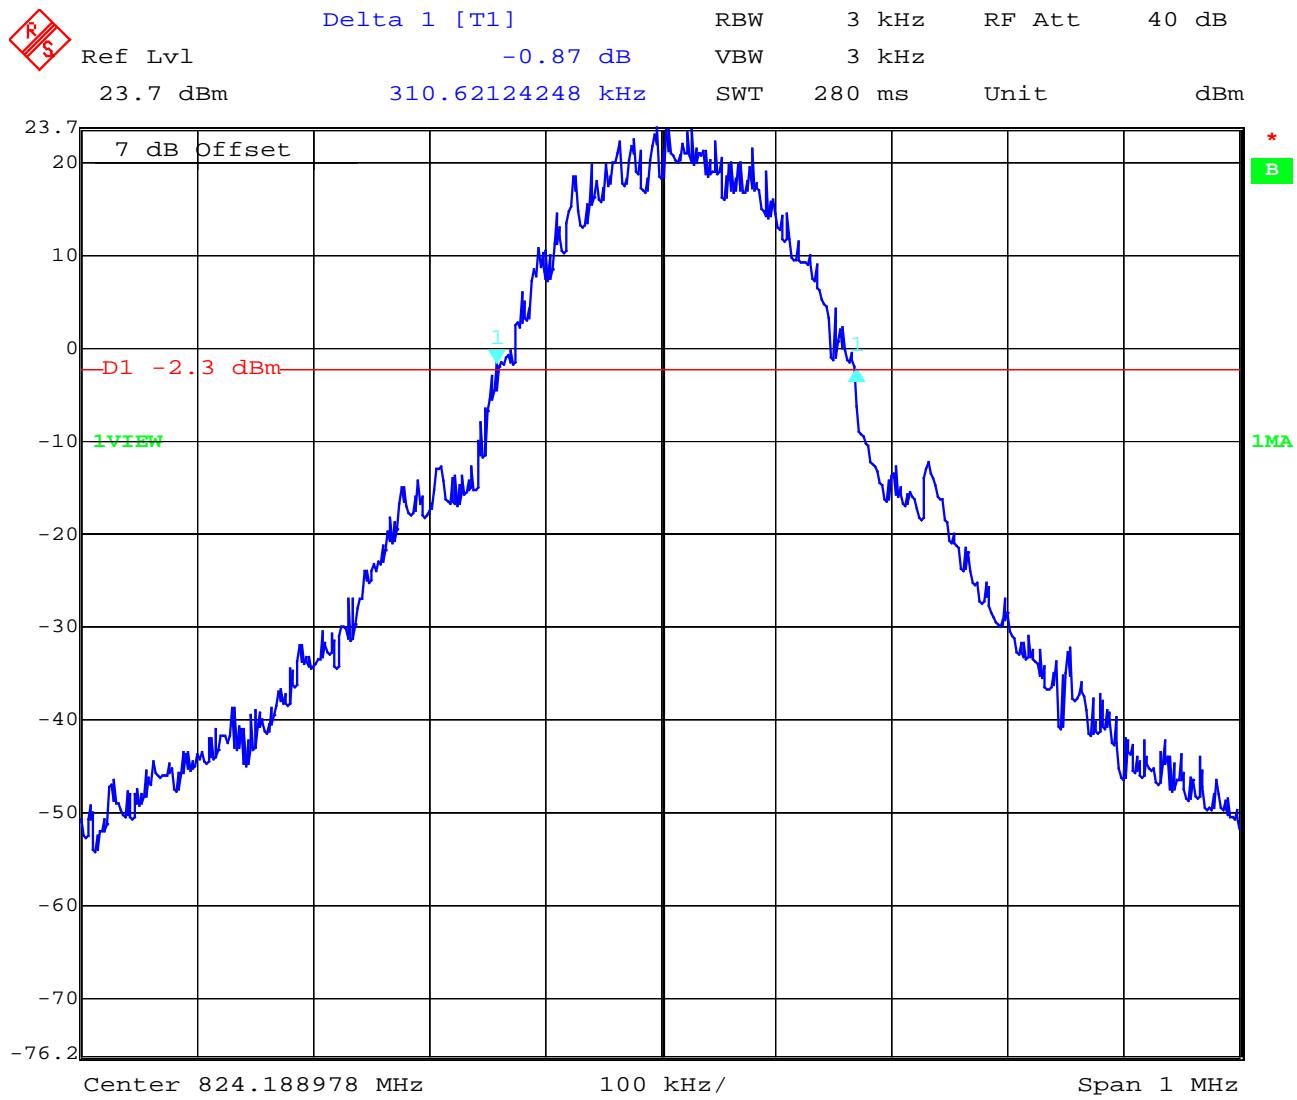
Part 22.901 (d) (24.238 (a)) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 275 kHz, this equates to a resolution bandwidth of at least 2.8 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

Channel 128
99% Occupied Bandwidth



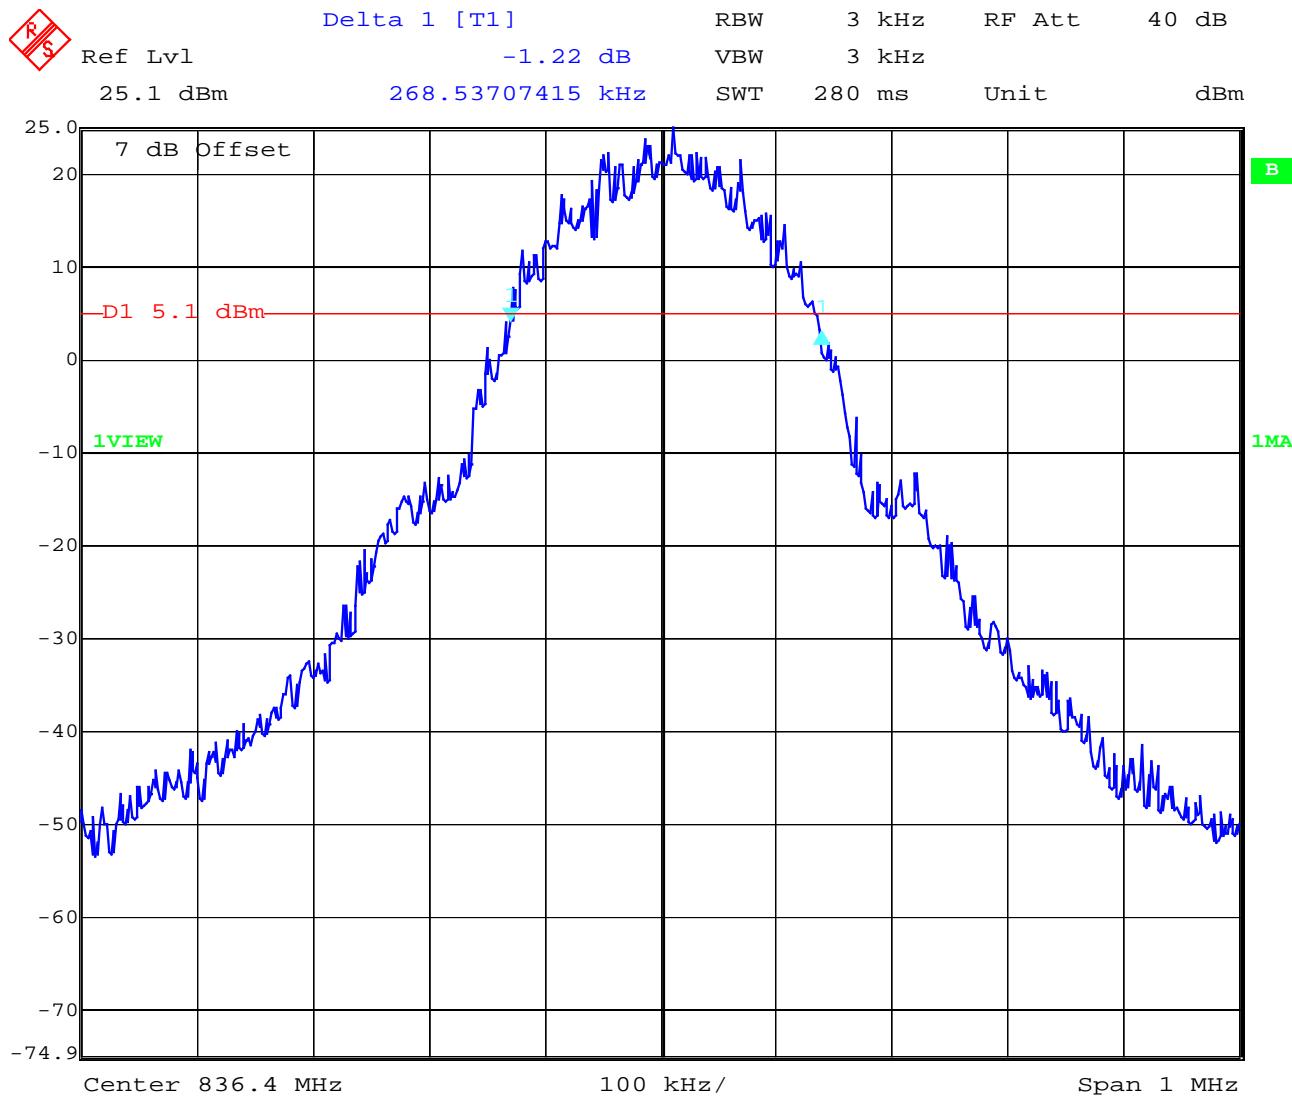
Date: 18.NOV.2003 09:57:20

Channel 128
-26 dBc Bandwidth



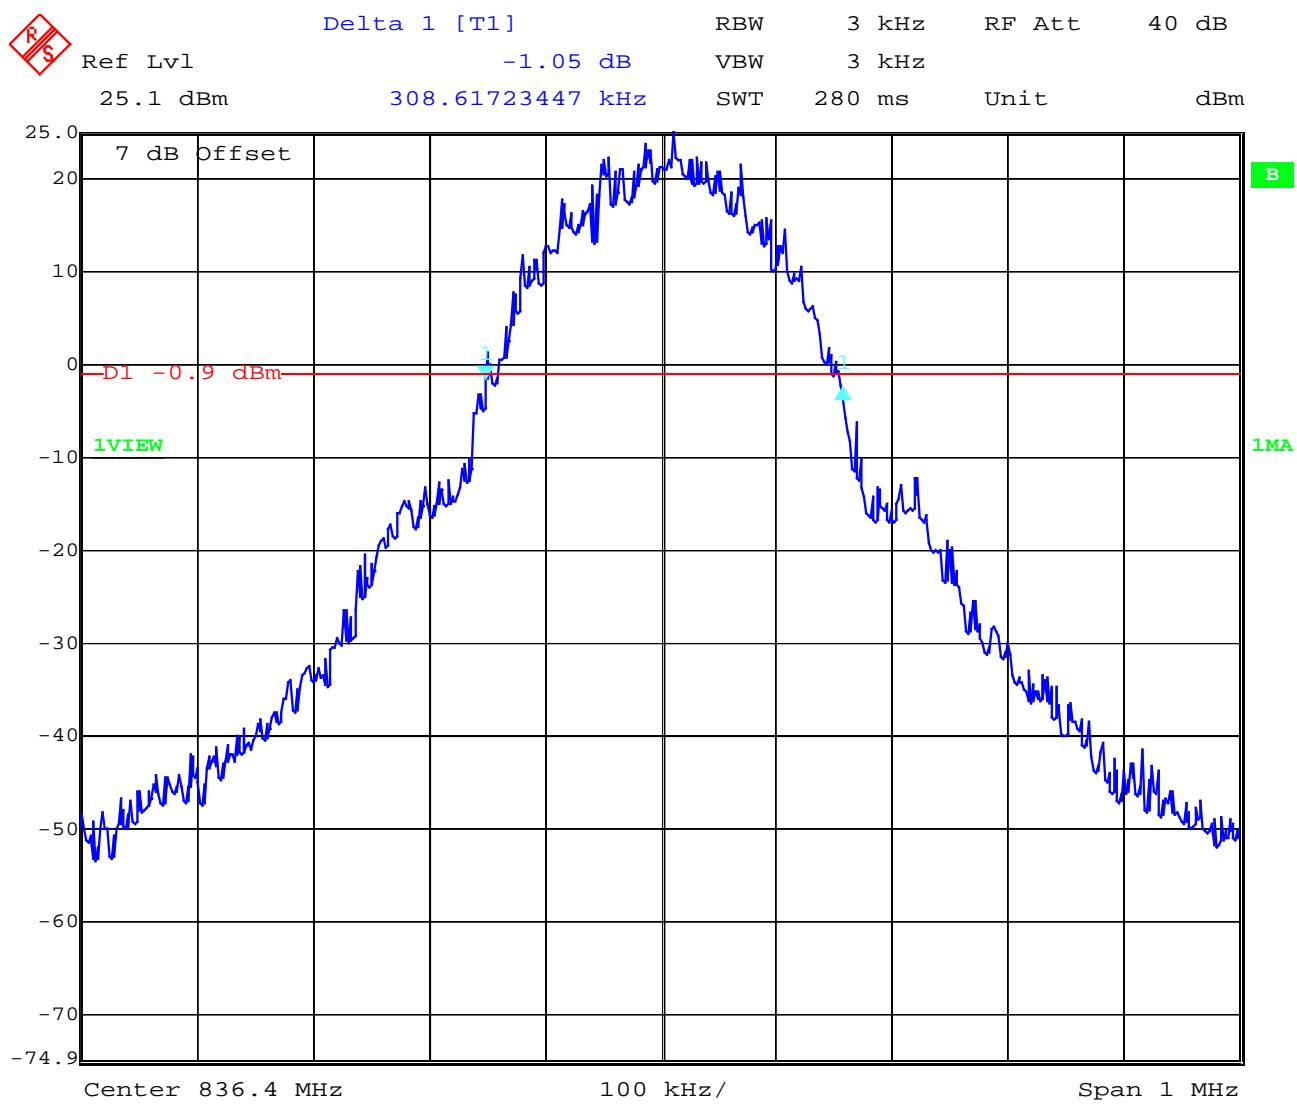
Date: 18.NOV.2003 09:58:08

Channel 189
99% Occupied Bandwidth



Date: 18.NOV.2003 09:59:14

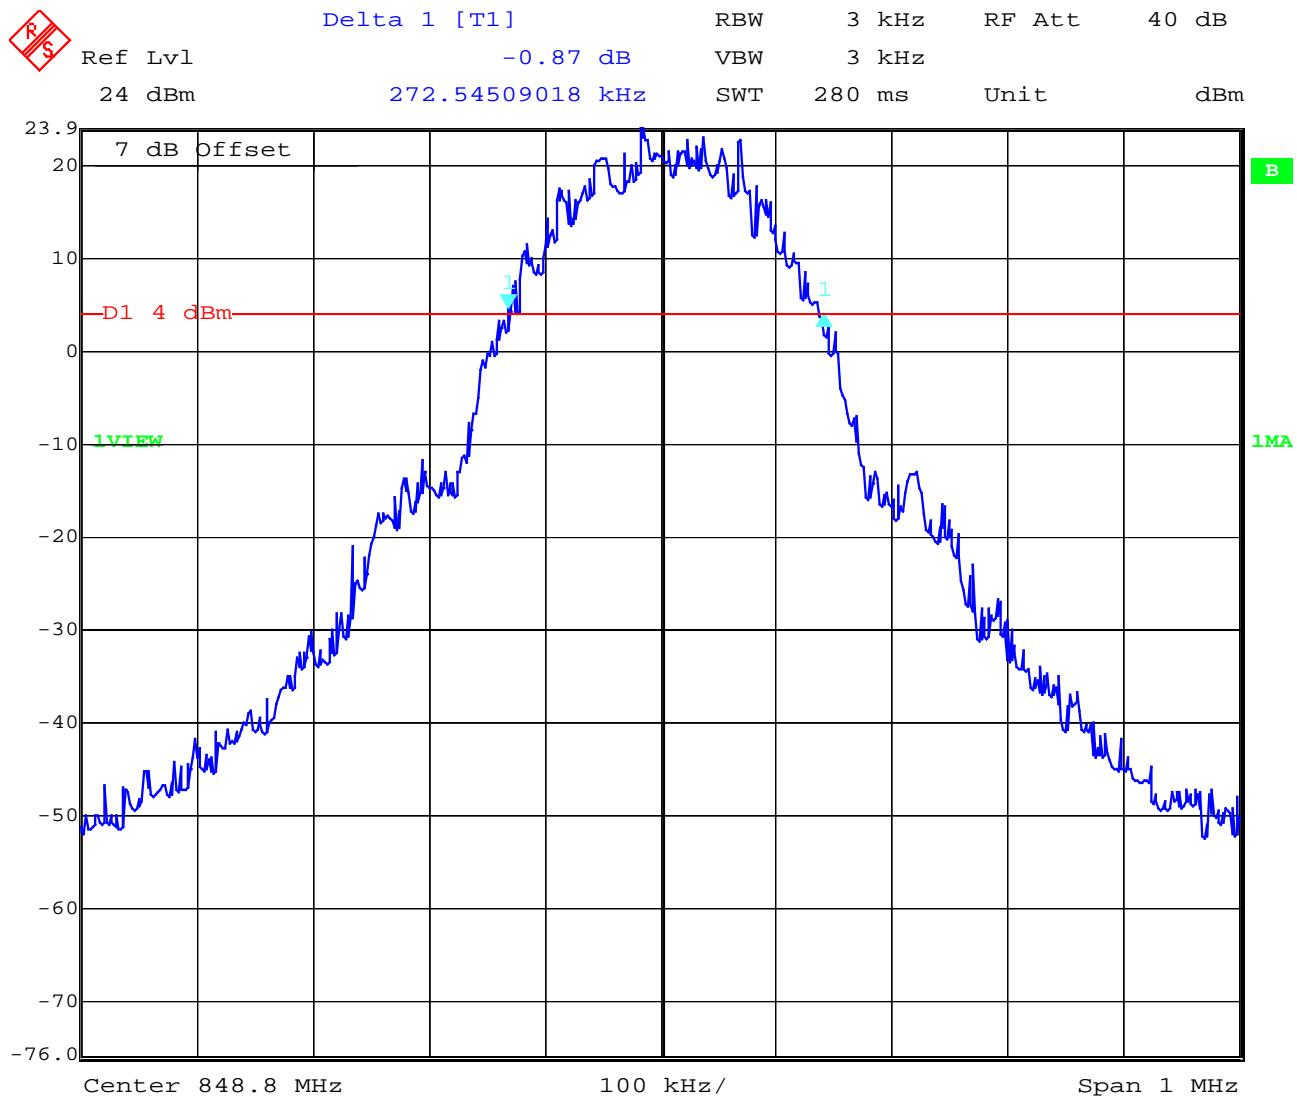
Channel 189
-26 dBc Bandwidth



Date: 18.NOV.2003 09:59:39

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

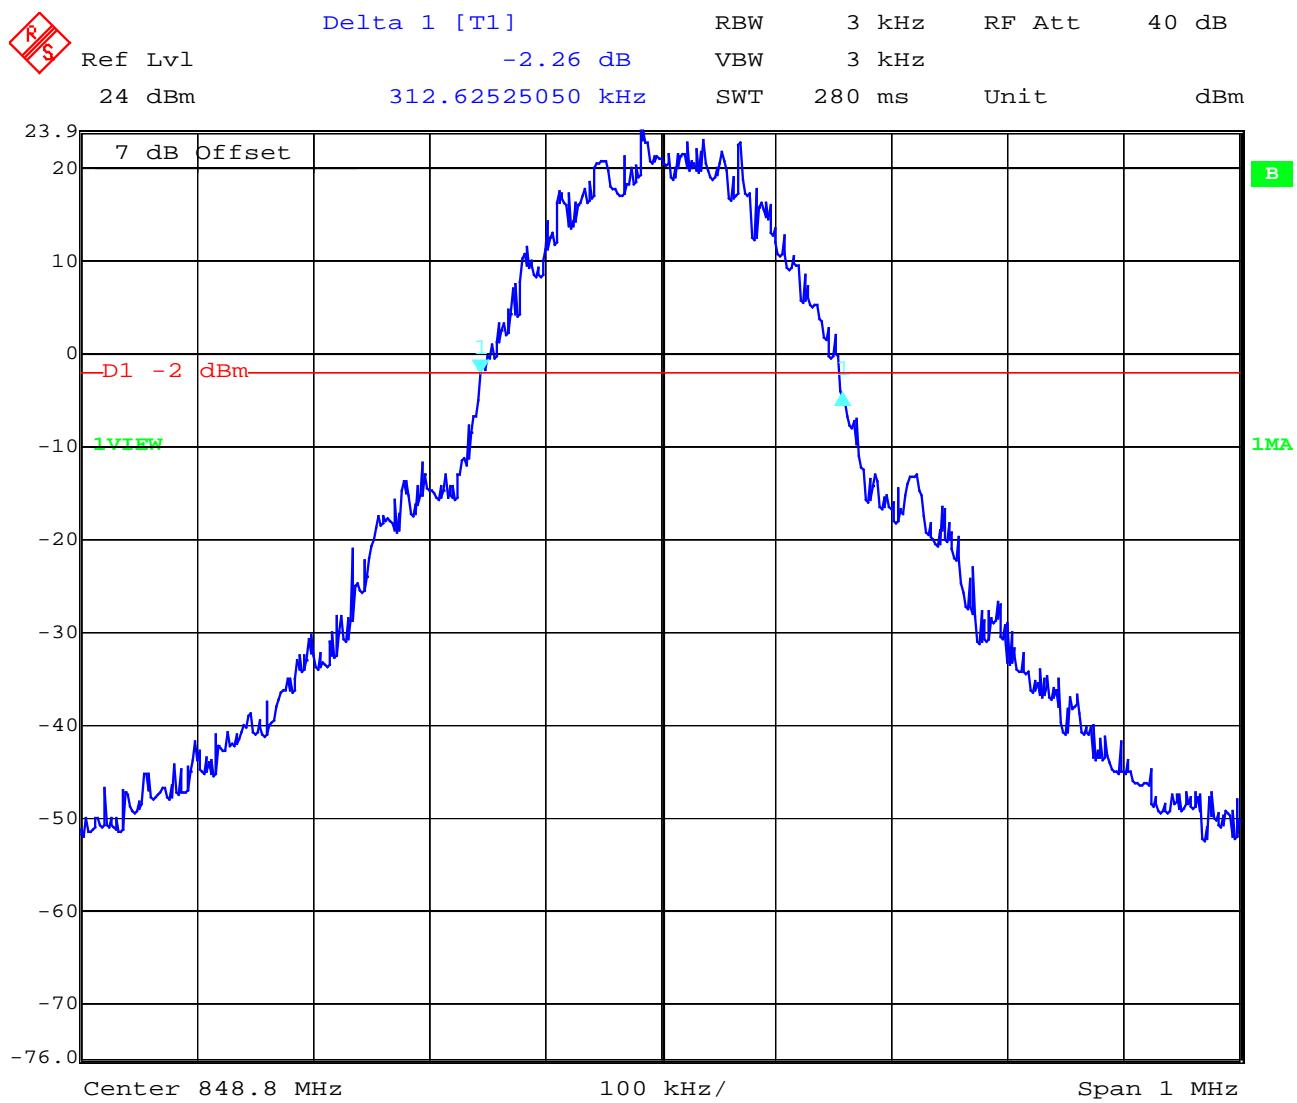
Channel 251
99% Occupied Bandwidth



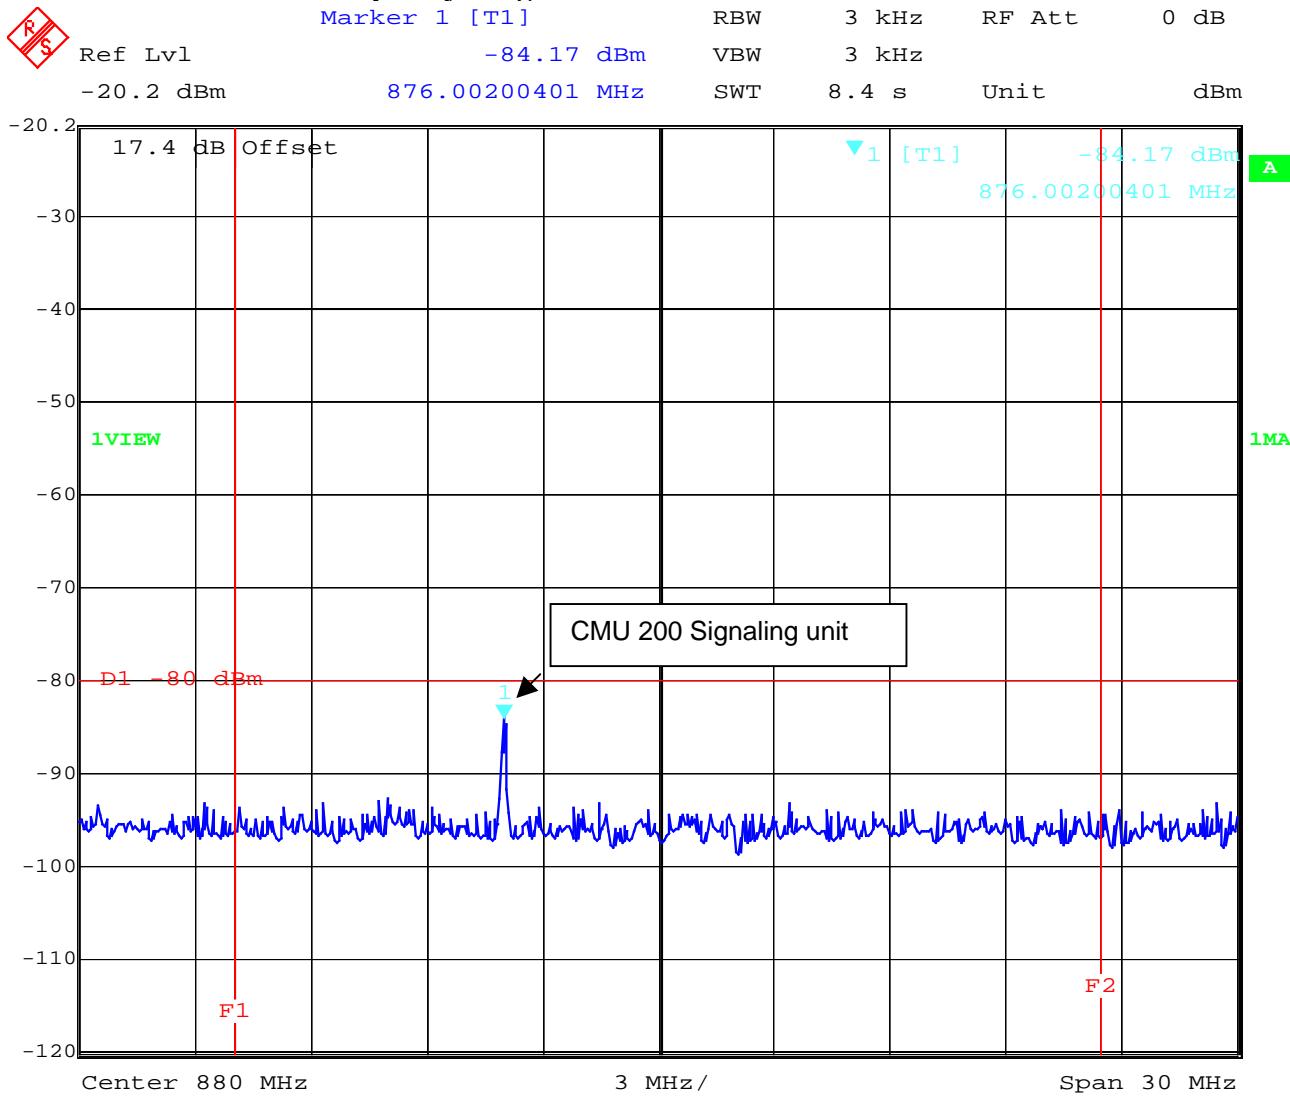
Date: 18.NOV.2003 10:01:01

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251
-26 dBc Bandwidth



Date: 18.NOV.2003 10:01:30

EMISSION LIMITATIONS FOR CELLULAR §22.917(F)**Mobile emissions in the base frequency range****As you can see in the following plots, all peaks are below -80 dBm in the base frequency range.****Idle Mode base station frequency range A**

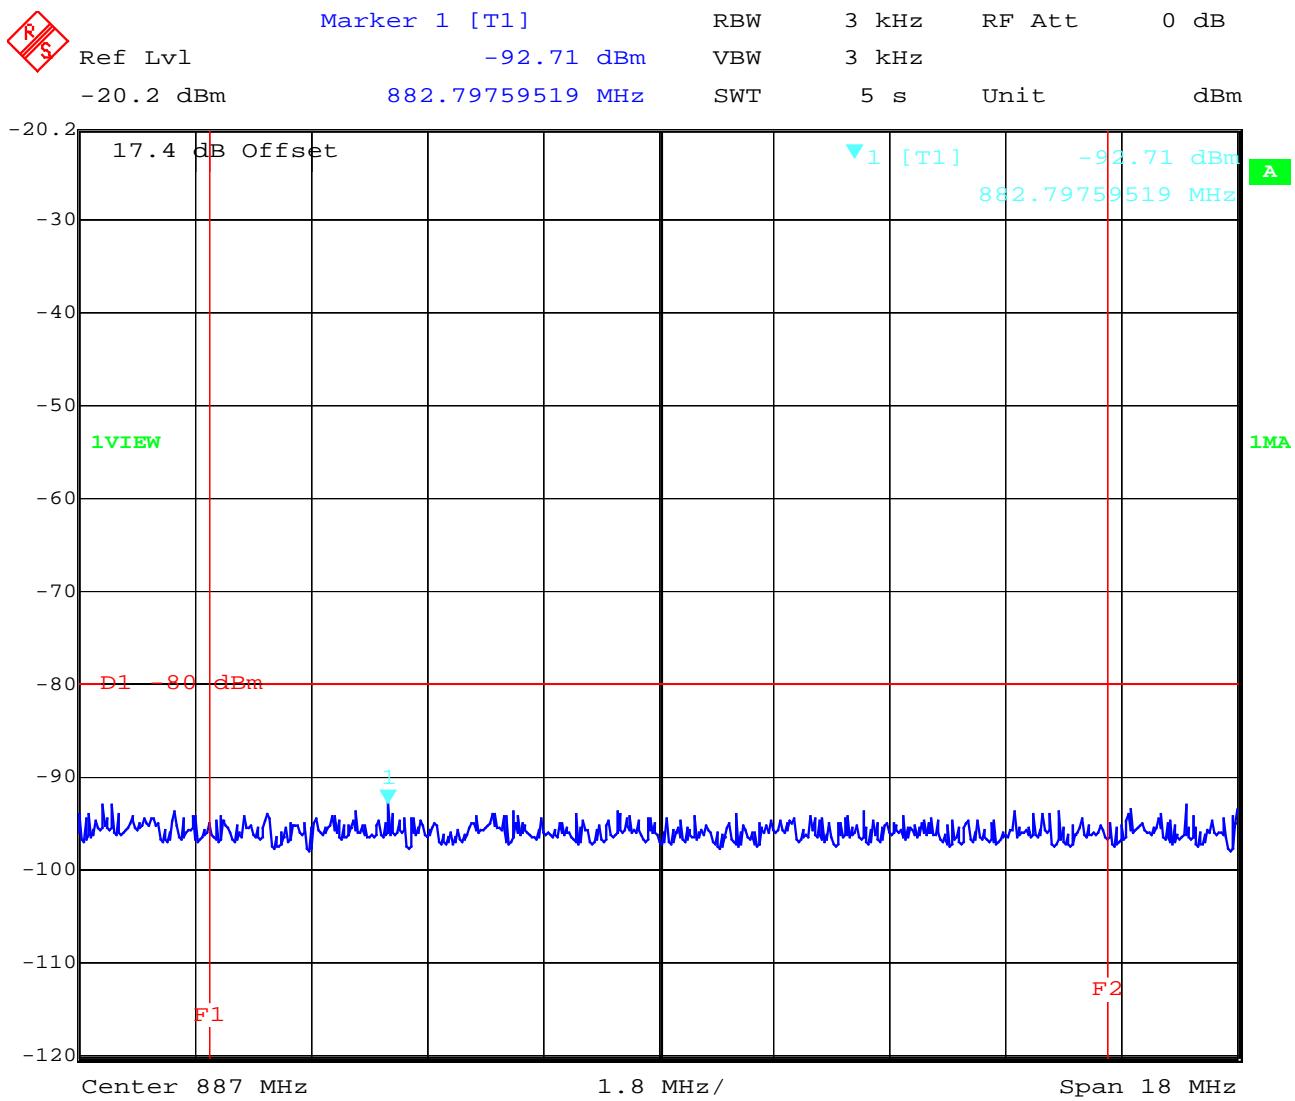
Date: 18.NOV.2003 10:15:36

LIMITS**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

Idle Mode base station frequency range B



Date: 18.NOV.2003 10:16:37

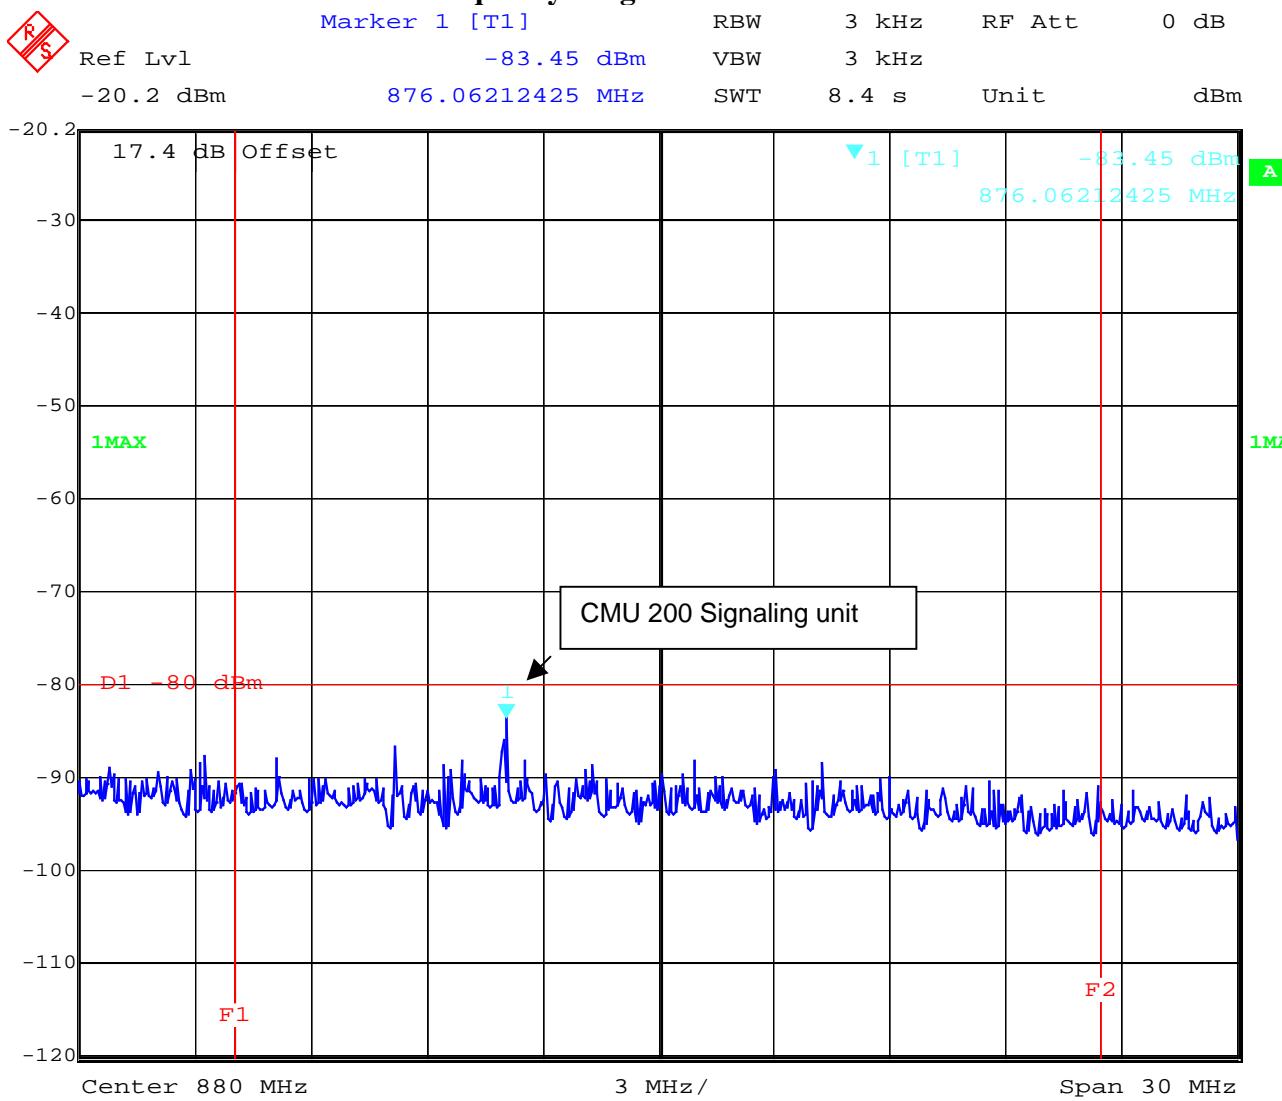
LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

TX Mode CH 128 base station frequency range A



Date: 18.NOV.2003 10:18:25

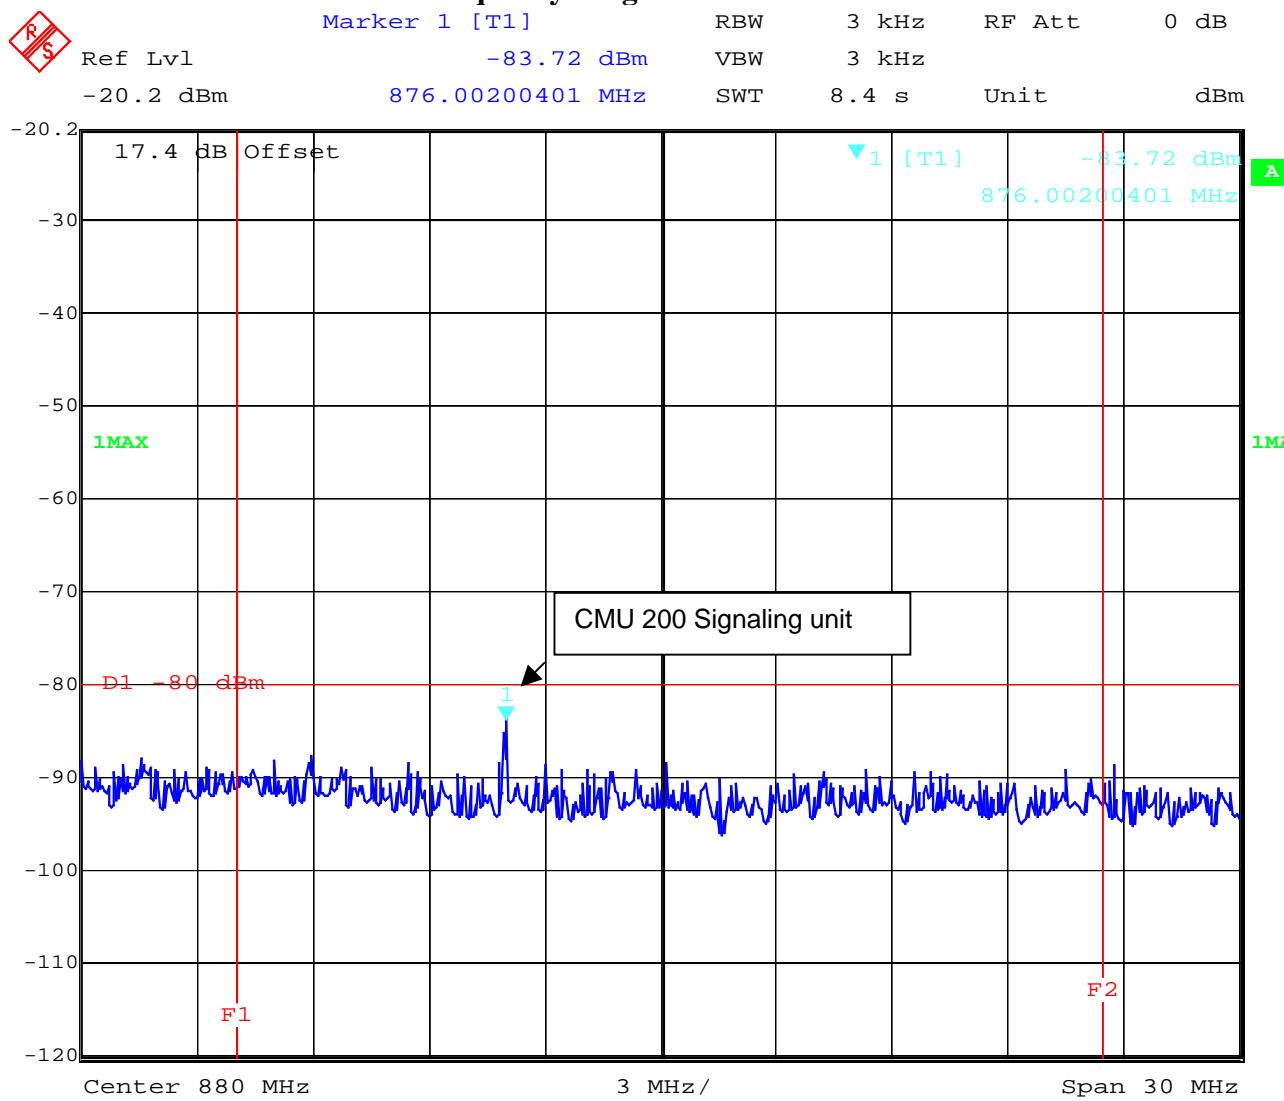
LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

TX Mode CH 189 base station frequency range A



Date: 18.NOV.2003 10:20:11

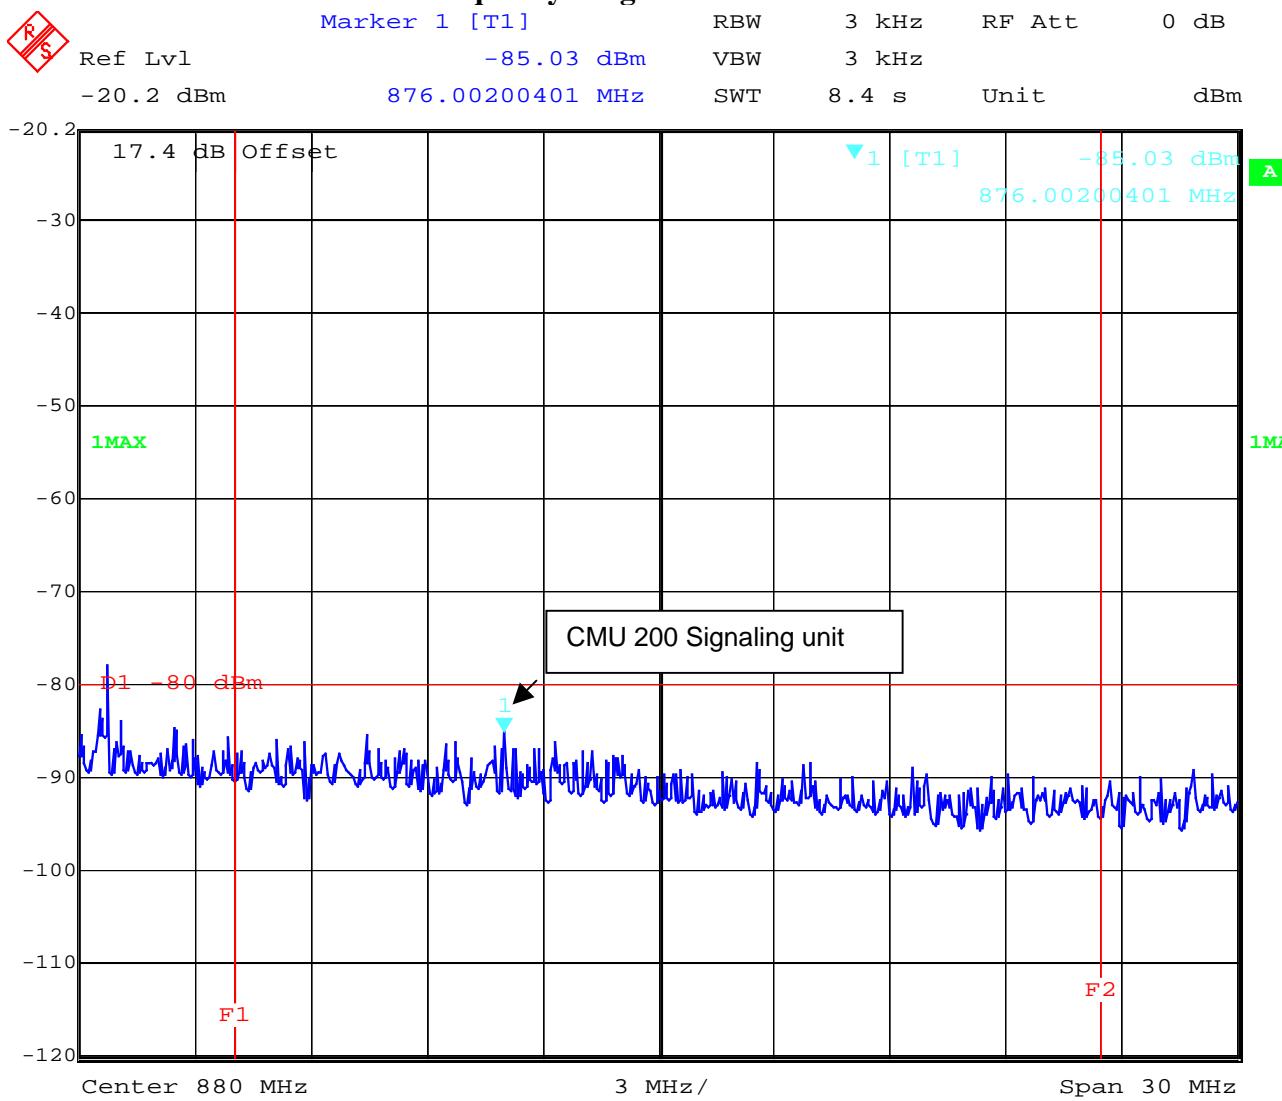
LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

TX Mode CH 251 base station frequency range A



Date: 18.NOV.2003 10:24:22

LIMITS

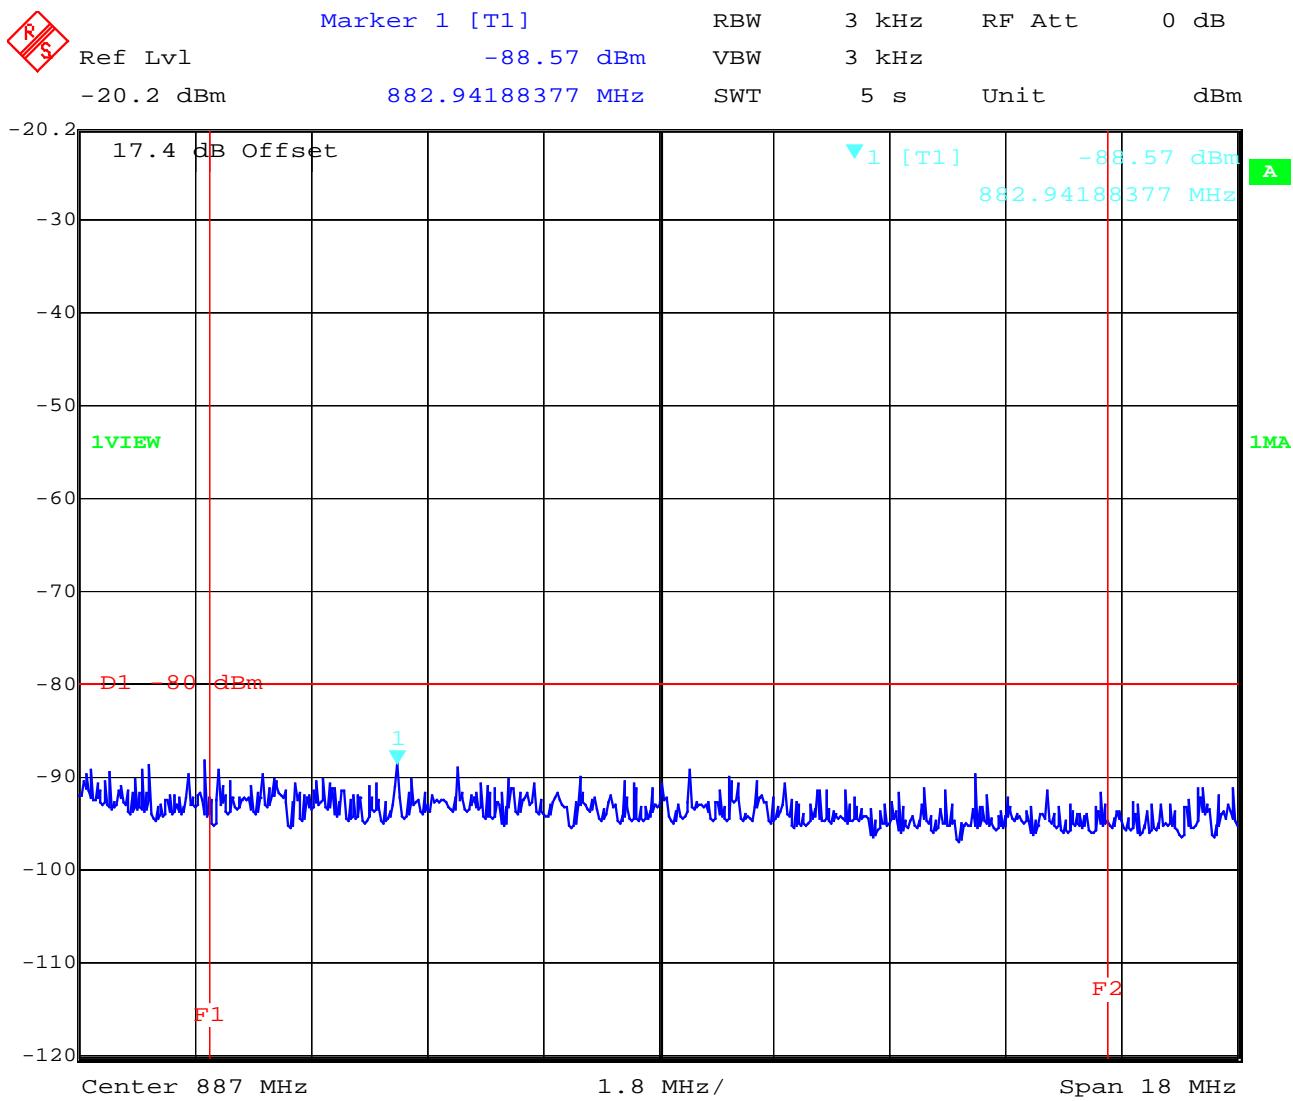
§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 128 base station frequency range B

Date: 18.NOV.2003 10:17:38

LIMITS

§22.917(f)

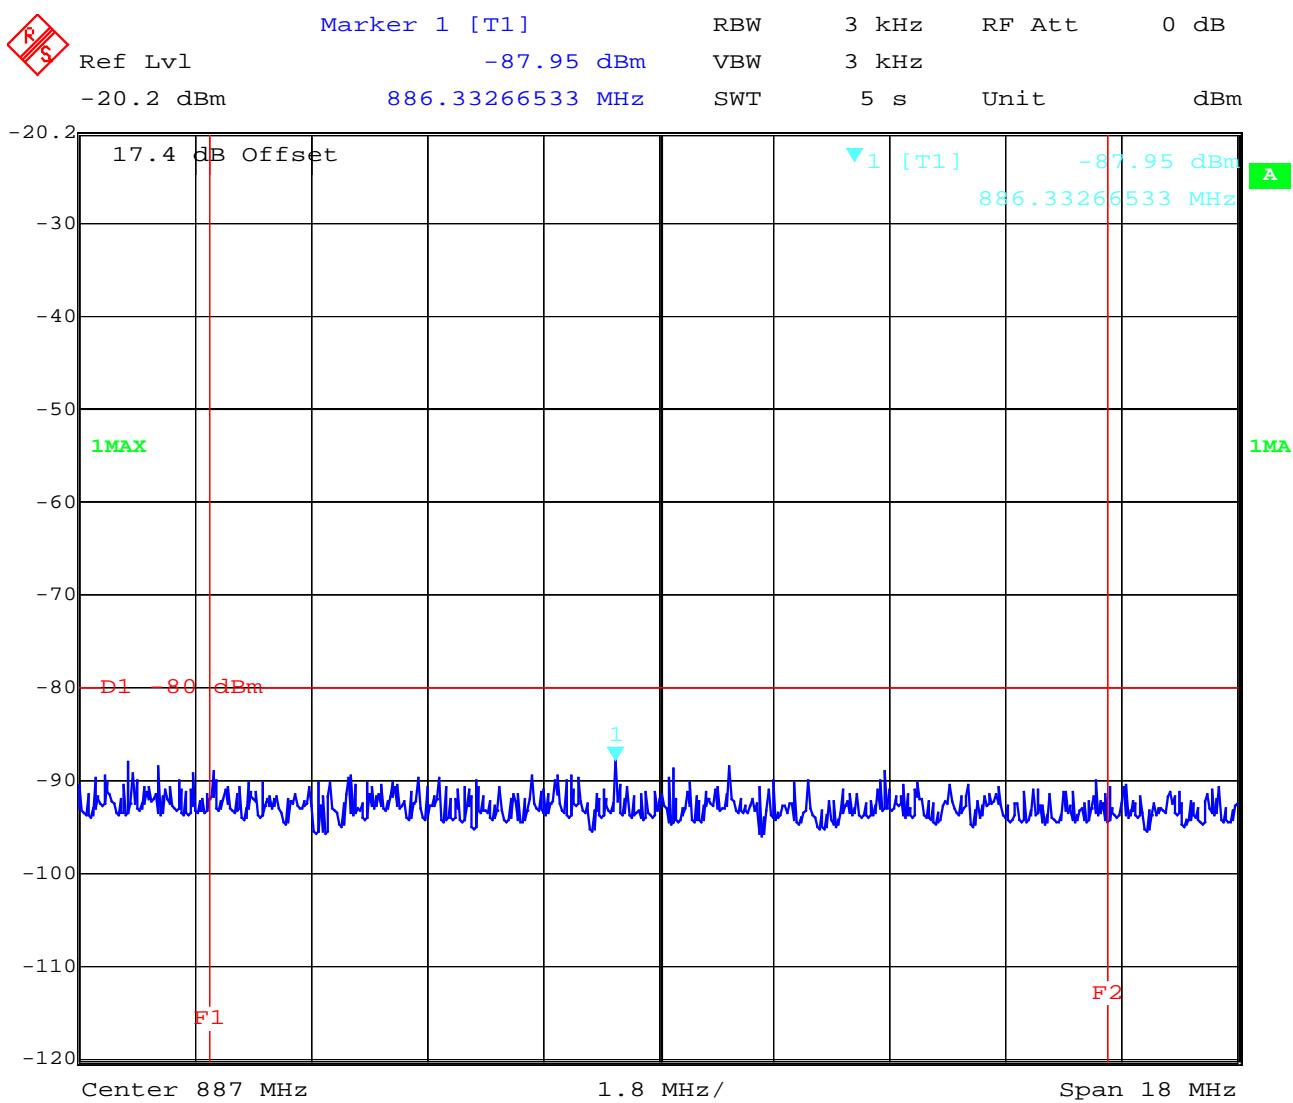
The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 189 base station frequency range B



Date: 18.NOV.2003 10:21:02

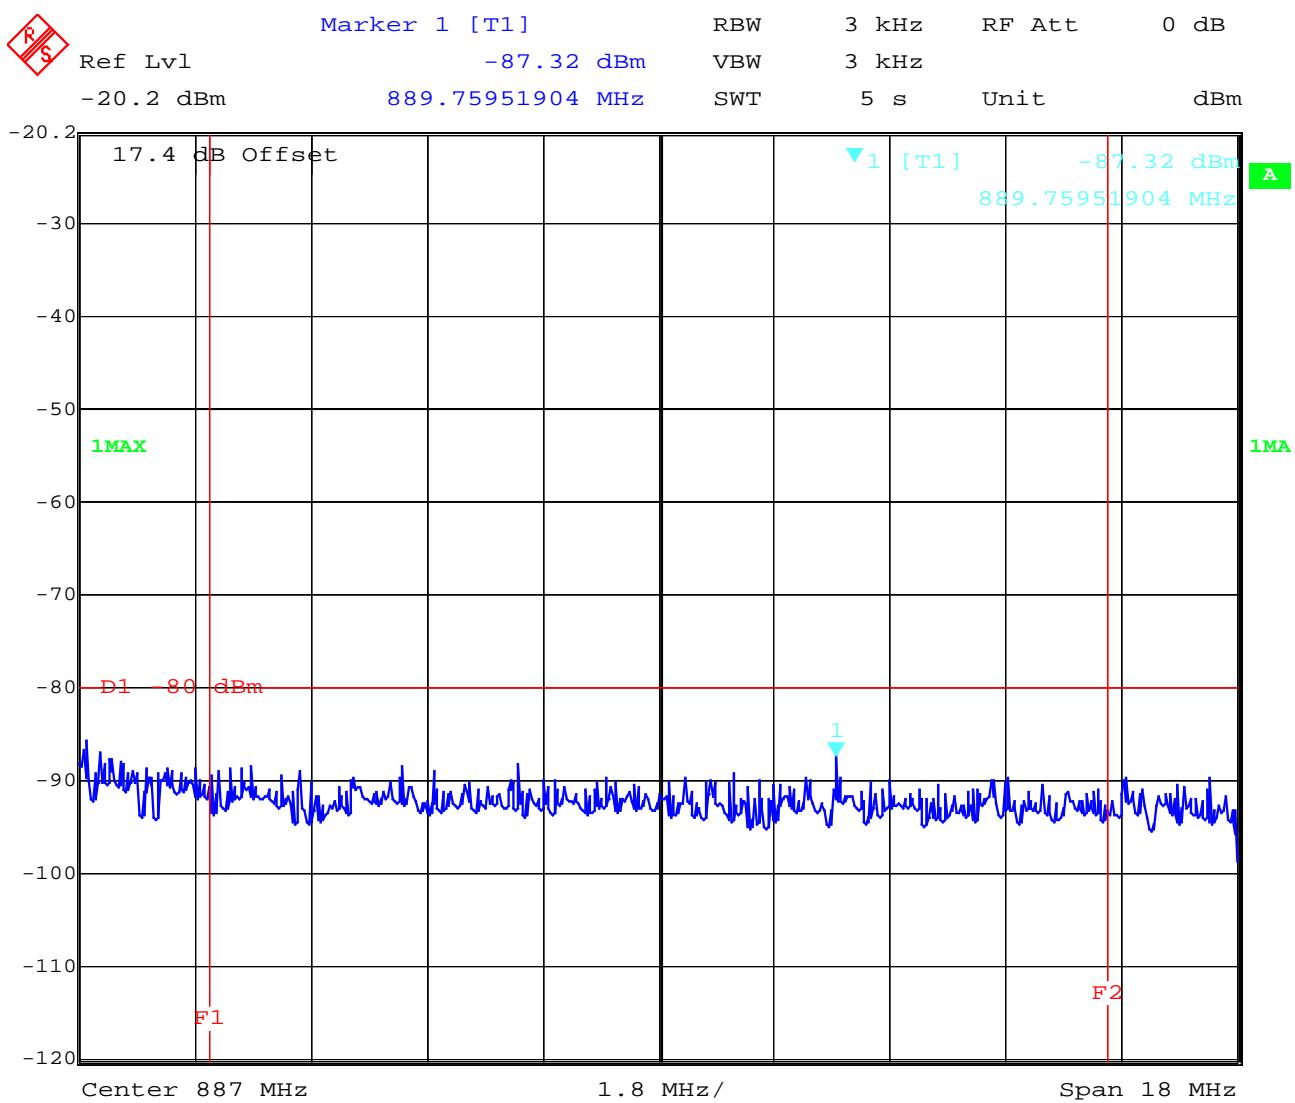
LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

TX Mode CH 251 base station frequency range B



Date: 18.NOV.2003 10:23:33

LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT**PART 15.109**

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

Ancillary equipment : AC/DC Adapter/Charger Model : ACP-12E;

These measurements were done with simultaneously PCS 1900 and Bluetooth™ in traffic and Idle/Rx-mode.

Spurious Emissions

SPURIOUS EMISSIONS LEVEL (μ V/m)								
CH 661 and BT 2441 MHz				Idle mode(850/1900) and BT				
f (MHz)	Detector	Level (μ V/m)	f (MHz)	Detector	Level (μ V/m)	f (MHz)	Detector	Level (μ V/m)
32.44	QP	44.7				32.44	QP	55.6
3760	PK	416.9						
5640	PK	213.8						
Measurement uncertainty		± 3 dB						

f < 1 GHz : RBW/VBW: 100 kHz

f \geq 1GHz : RBW/VBW: 1 MHz**Measurement distance see table****Limits****SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB μ V/m	30
30 - 88	100 / 40 dB μ V/m	3
88 - 216	150 / 43.5 dB μ V/m	3
216 - 960	200 / 46 dB μ V/m	3
above 960	500 / 54 dB μ V/m	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

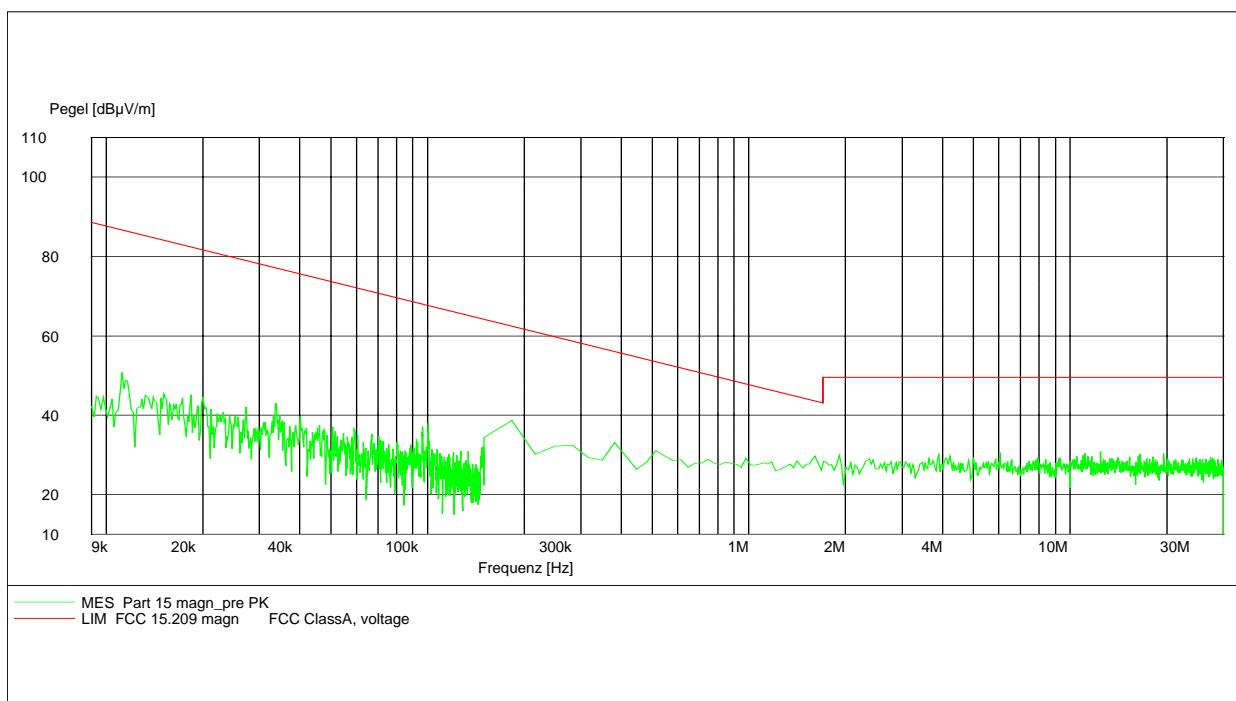
(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION 9kHz – 30 MHz

§ 15.109

EUT: RH-28
 Manufacturer: Nokia Corp. / TCC Nokia
 Operating Condition: Traffic mode and BT TX mode
 Test Site: Cetecom, Room 6
 Operator: Berg M.
 Test Specification: 15.109
 Comment: 115 V / 60 Hz
 Start of Test: 14.11.03 / 12:27:381



Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB μ V/m	30

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

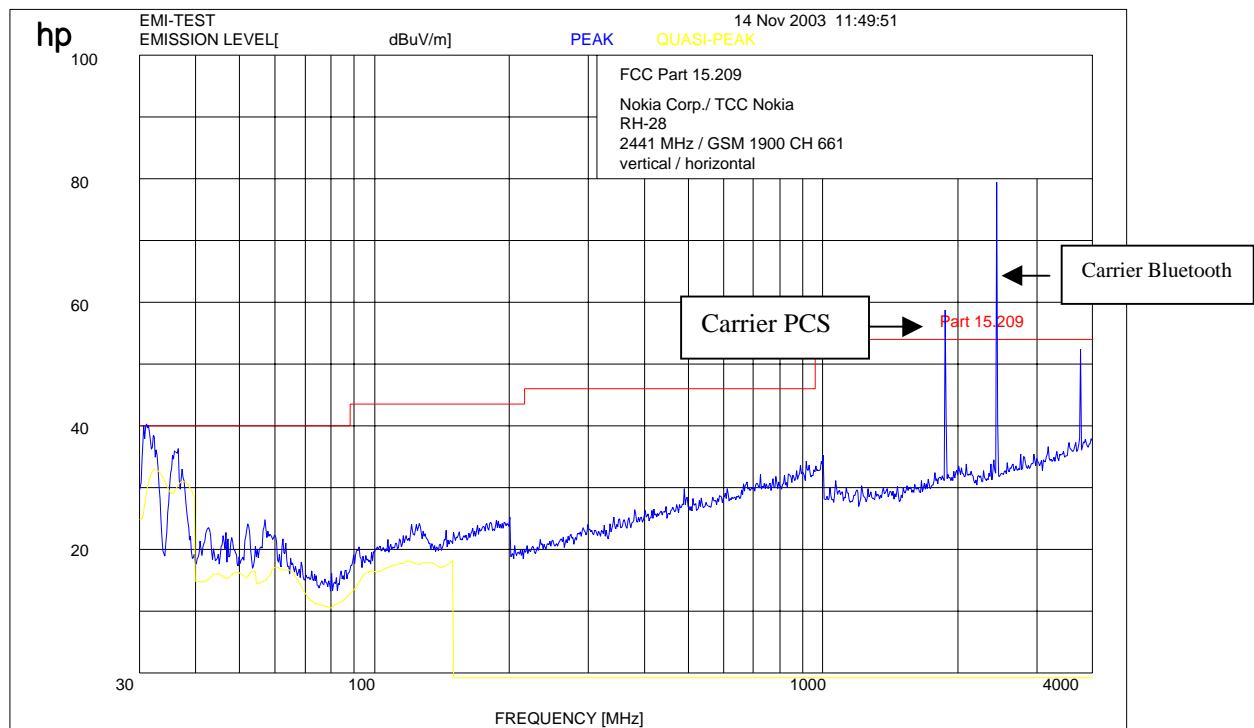
(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 661 and Bluetooth 2441 MHz up to 4 GHz

 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

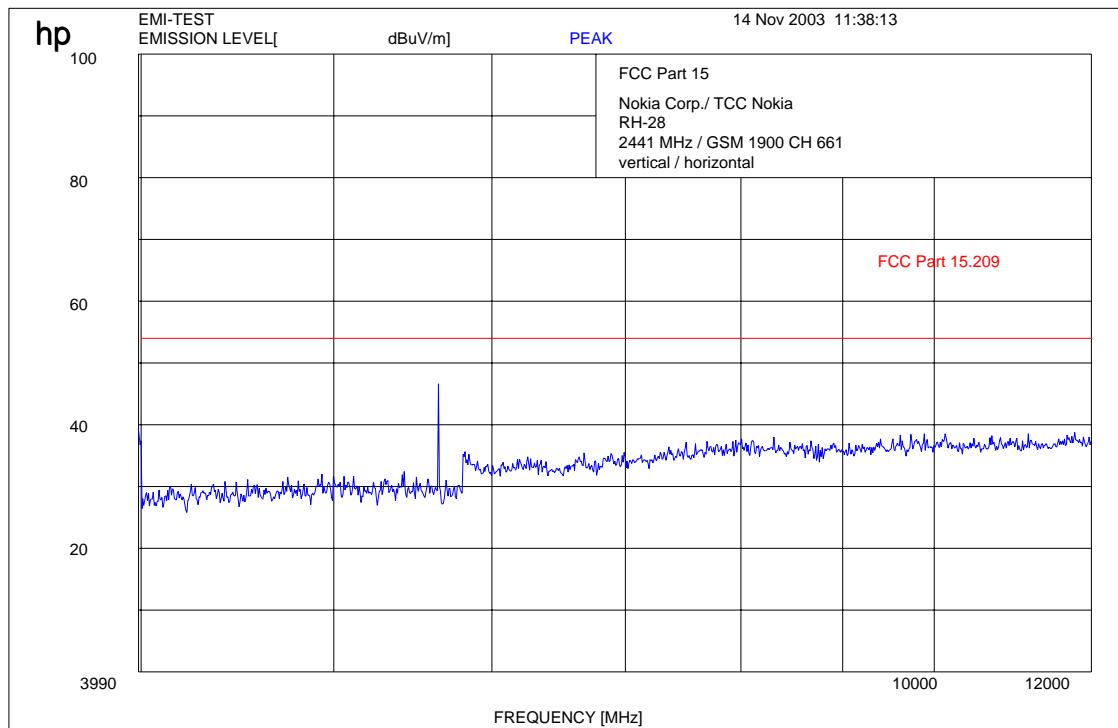
(for reference numbers see test equipment listing)

17 - 24, 64

SPURIOUS RADIATION

§ 15.109

CH 661 and Bluetooth 2441 MHz up to 12 GHz



$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

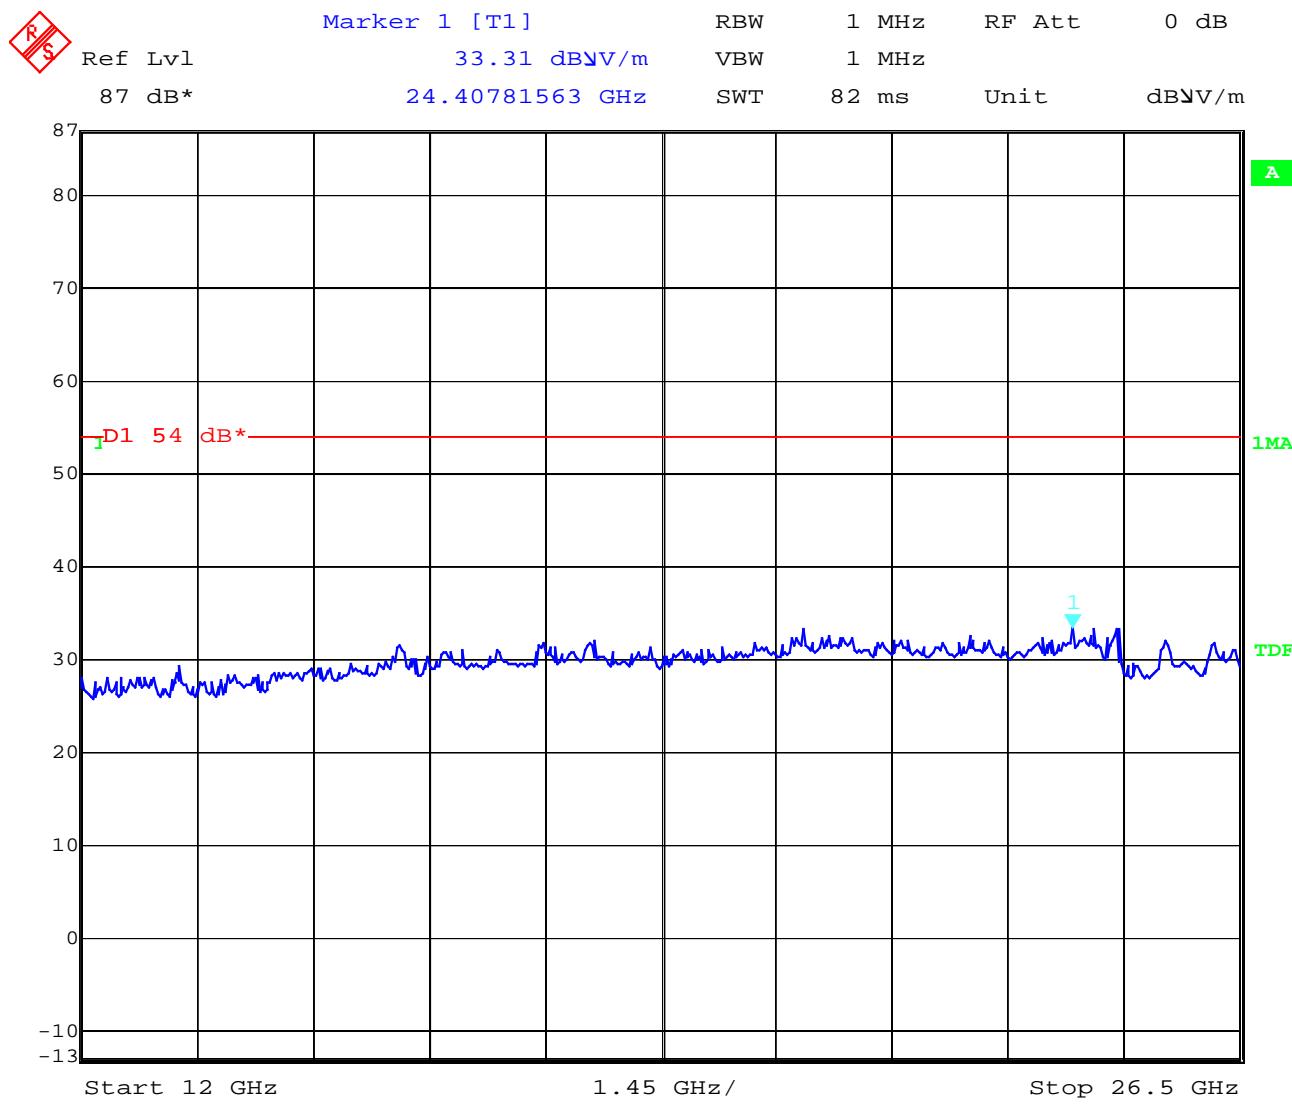
(for reference numbers see test equipment listing)

17 – 24, 64

SPURIOUS RADIATION

§ 15.109

CH 661 and Bluetooth 2441 MHz up to 25 GHz



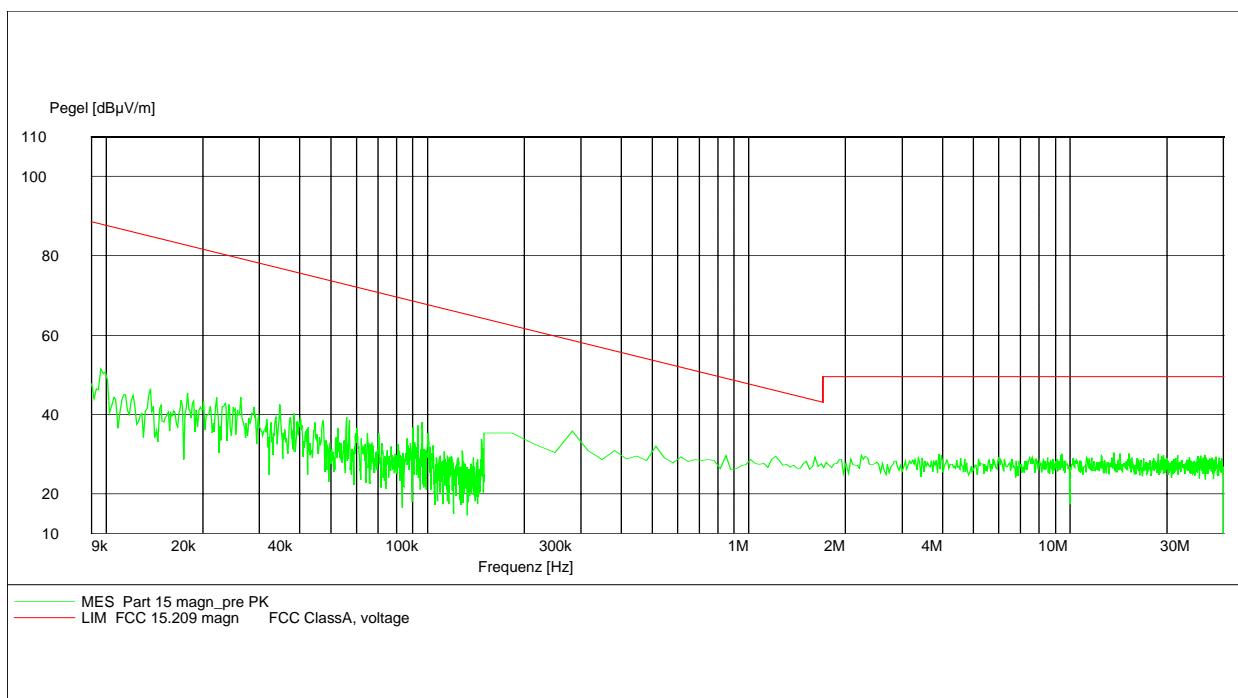
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

SPURIOUS RADIATION**§ 15.109****Idle mode up to 30 MHz (valid for Idle and Bluetooth™ RX-mode)**

EUT: RH-28 with ACP-12E,
 Manufacturer: Nokia Corp. / TCC Nokia
 Operating Condition: Idle mode and Bluetooth RX-mode
 Test Site: Cetecom, Room 6
 Operator: Berg
 Test Specification: 15.109
 Comment: 115V / 60 Hz
 Start of Test: 14.11.03 / 12:06:00

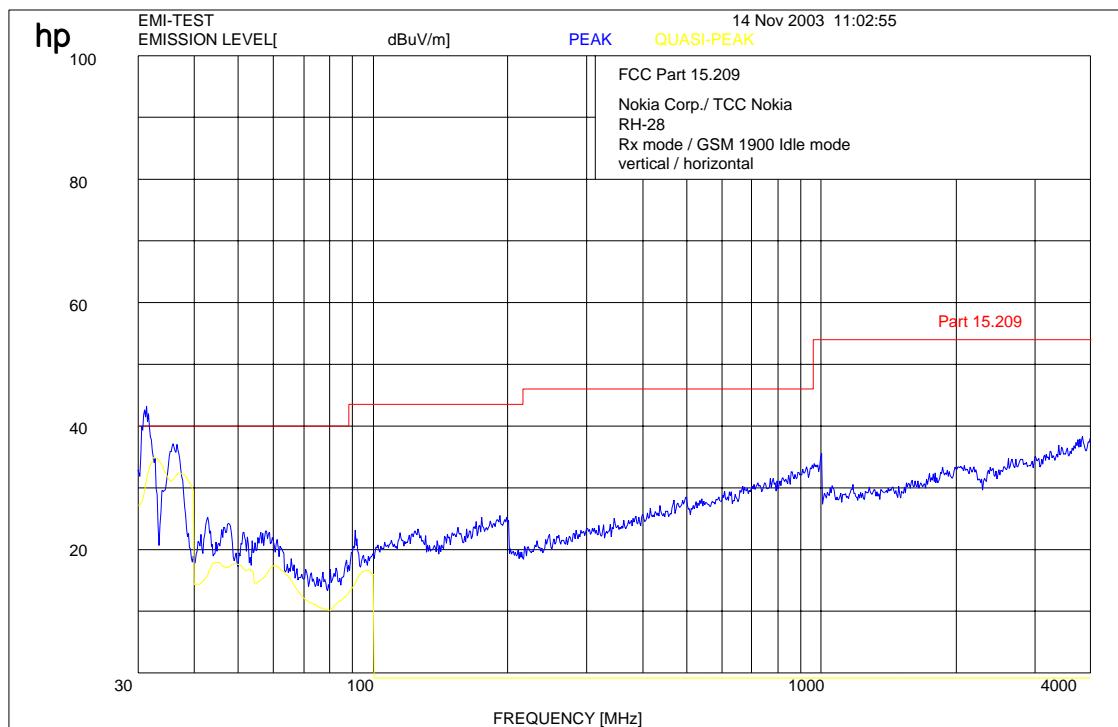
**Limits****SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBμV/m	30

SPURIOUS RADIATION

§ 15.109

Idle mode up to 4 GHz (valid for Idle and Bluetooth™ RX-mode)

 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

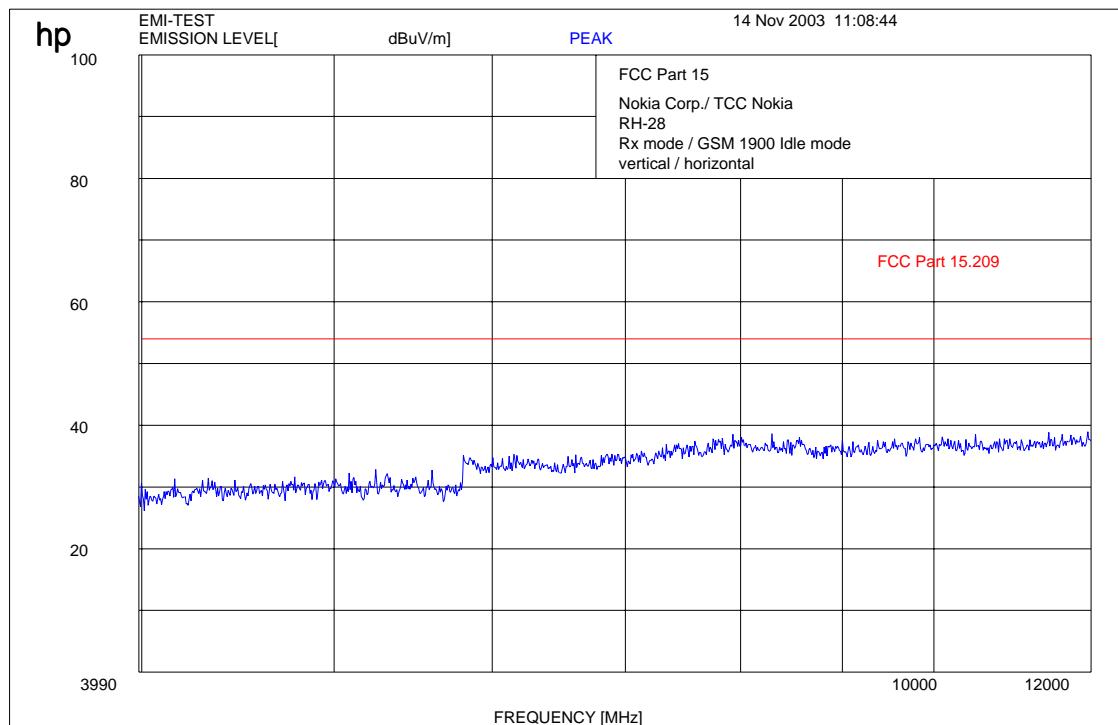
REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

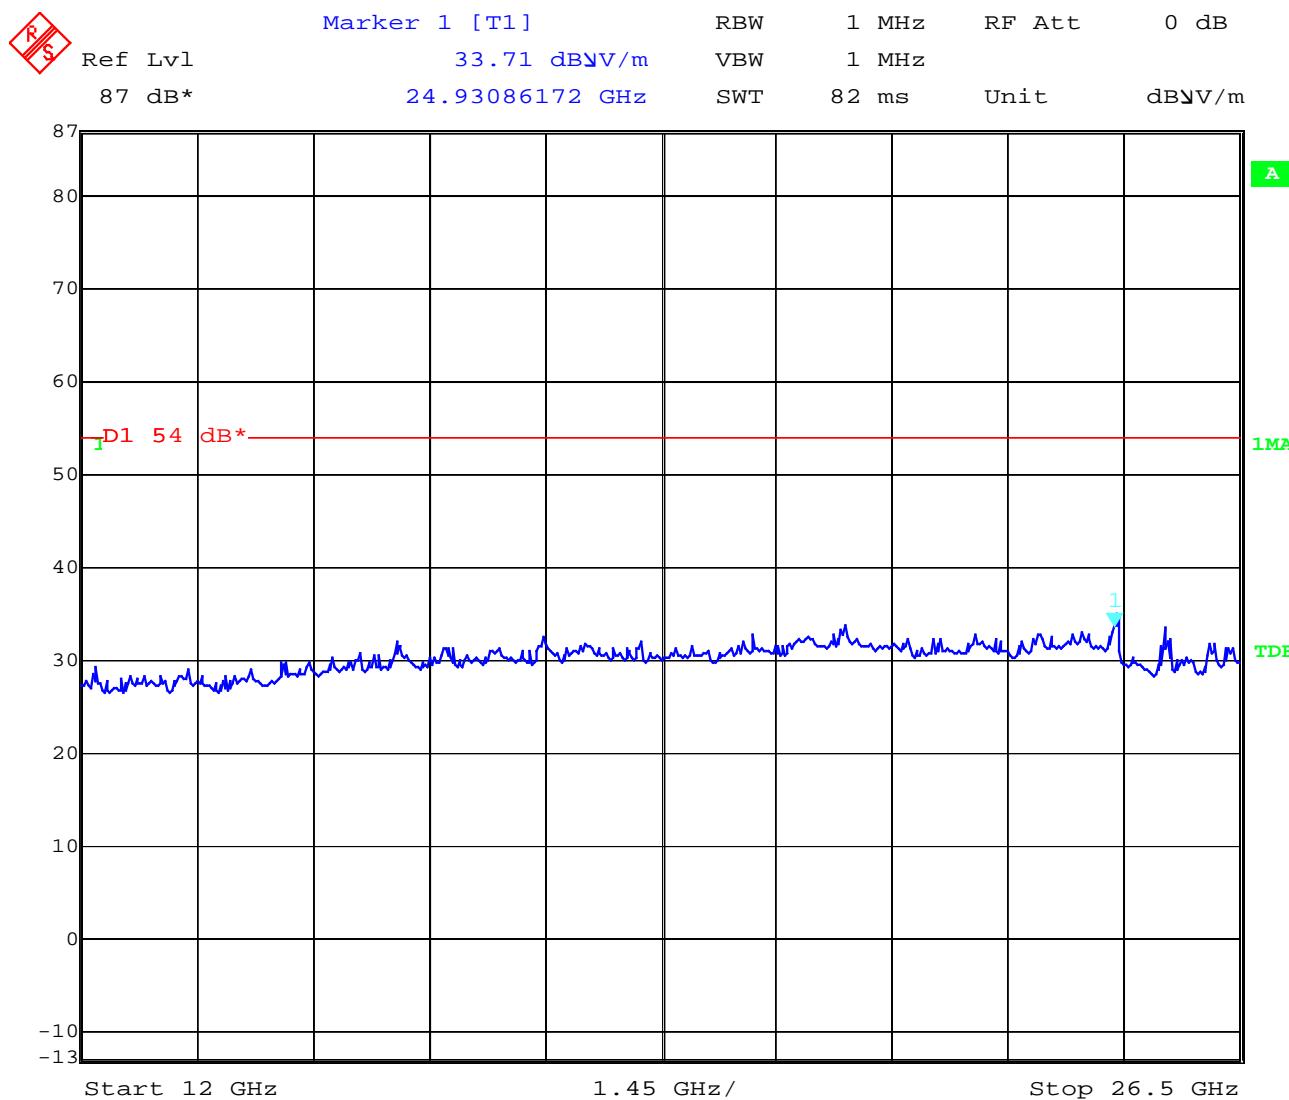
Idle mode up to 12 GHz (valid for Idle and Bluetooth™ RX-mode)

 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

SPURIOUS RADIATION

§ 15.109

Idle mode up to 25 GHz (valid for Idle and Bluetooth™ RX-mode)



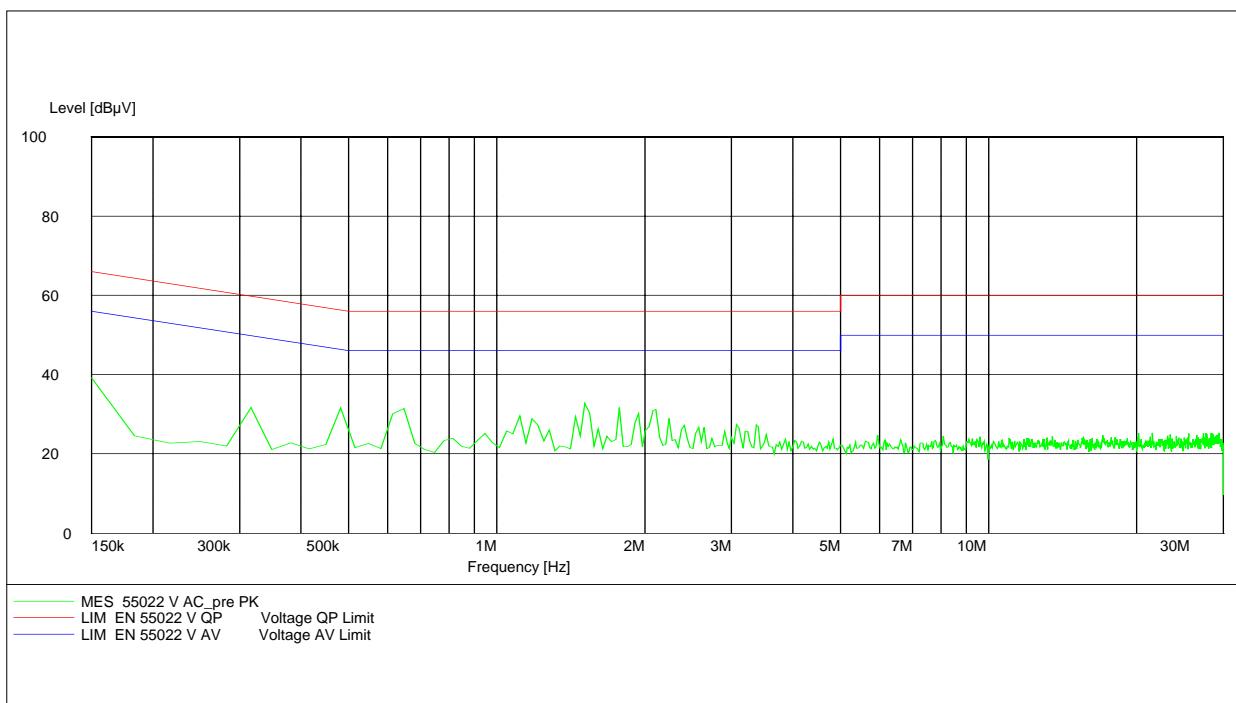
Date: 17.NOV.2003 07:33:11

CONDUCTED EMISSIONS**§ 15.107/207****CISPR 22**

EUT: RH-28
 Manufacturer: Nokia
 Operating Condition: With charging unit, Traffic mode and Bluetooth 2441 MHz
 Test Site: Room 006
 Operator:
 Test Specification: EN 55022
 Comment: 115 V / 60 Hz
 Start of Test: 14.11.03 / 12:29:27

SCAN TABLE: "EN 55022 V"

Short Description:	Voltage Mains 1.60					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458

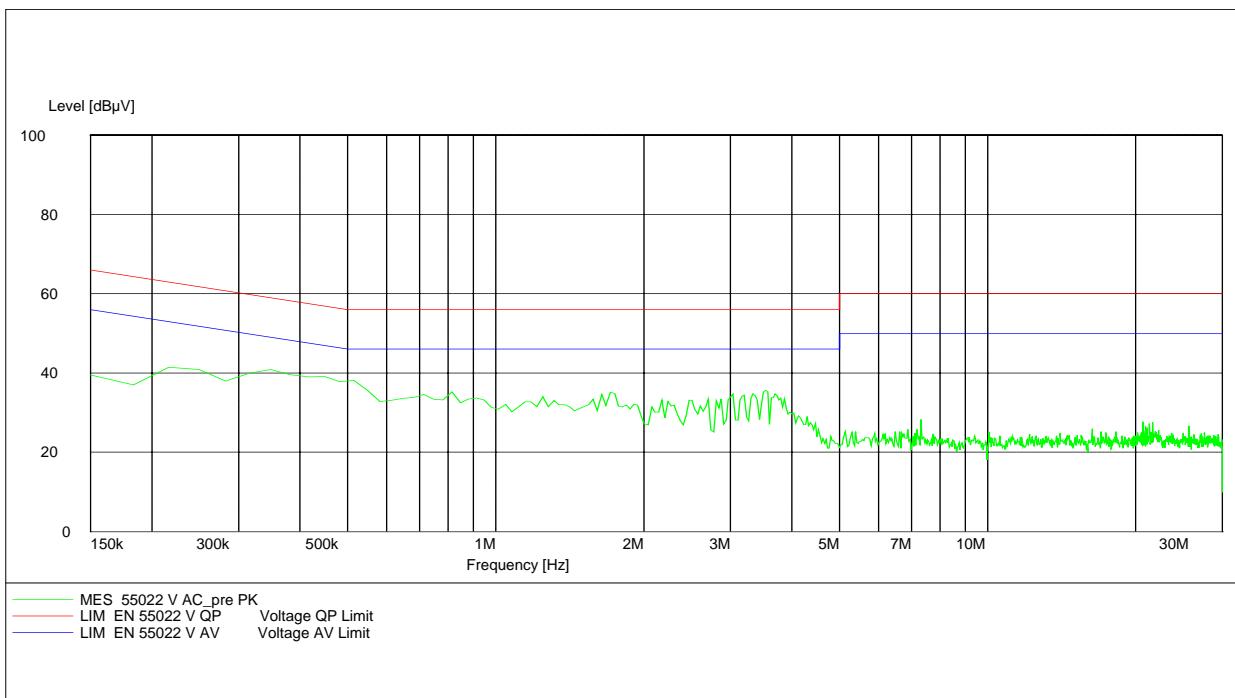


CISPR 22

EUT: RH-28
Manufacturer: Nokia
Operating Condition: With charging unit, Idle mode and Bluetooth RX-mode
Test Site: Room 006
Operator:
Test Specification: EN 55022
Comment: 115 V / 60 Hz
Start of Test: 14.11.03 / 12:13:58

SCAN TABLE: "EN 55022 V"

Short Description:	Voltage Mains 1.60					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458



TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257	Yes
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860	Yes
03	Oscilloscope	7633	Tektronix	230054	Yes
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010	Yes
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027	Yes
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867	Yes
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012	Yes
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032	Yes
09	Regulating Transformer	MPL	Erfi	91350	n.a.
10	LISN	NNLA 8120	Schwarzbeck	8120331	Yes
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020	Yes
12	Power-Meter	436 A	Hewlett-Packard	2101A12378	Yes
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156	Yes
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616	Yes
15	Modulation Meter	9008	Racal-Dana	2647	Yes
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899	Yes
17	Anechoic Chamber	---	MWB	87400/002	Yes
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306	Yes
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541	Yes
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131	Yes
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768	Yes
22	Biconical Antenna	3104	Emco	3758	Yes
23	Log. Per. Antenna	3146	Emco	2130	Yes
24	Double Ridged Horn	3115	Emco	3088	Yes
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013	Yes
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008	Yes
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013	Yes
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002	Yes
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002	Yes
30	Highpass	HM985955	FSY Microwave	001	n.a.
31	Amplifier	P42-GA29	Tron-Tech	B 23602	Yes
32	Anechoic Chamber		Frankonia		Yes
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004	Yes
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010	Yes
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010	Yes

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
36	Control Computer	HD 100	Deisel	100/322/93	n.a.
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003	Yes
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008	Yes
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001	Yes
40	Power Supply	6032A	Hewlett Packard	2846A04063	Yes
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006	n.a.
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002	Yes
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005	Yes
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011	Yes
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010	Yes
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461	Yes
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002	Yes
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002	Yes
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696	Yes
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105	Yes
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04	Yes
52	Controler	PSM 7	Rohde & Schwarz	883 086/026	Yes
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005	Yes
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012	Yes
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014	Yes
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019	Yes
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007	Yes
58	Power Supply	6032A	Rohde & Schwarz	2933A05441	Yes
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021	Yes
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026	n.a.
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002	Yes
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029	Yes
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007	Yes
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27	Yes
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773	Yes
68					

Test site



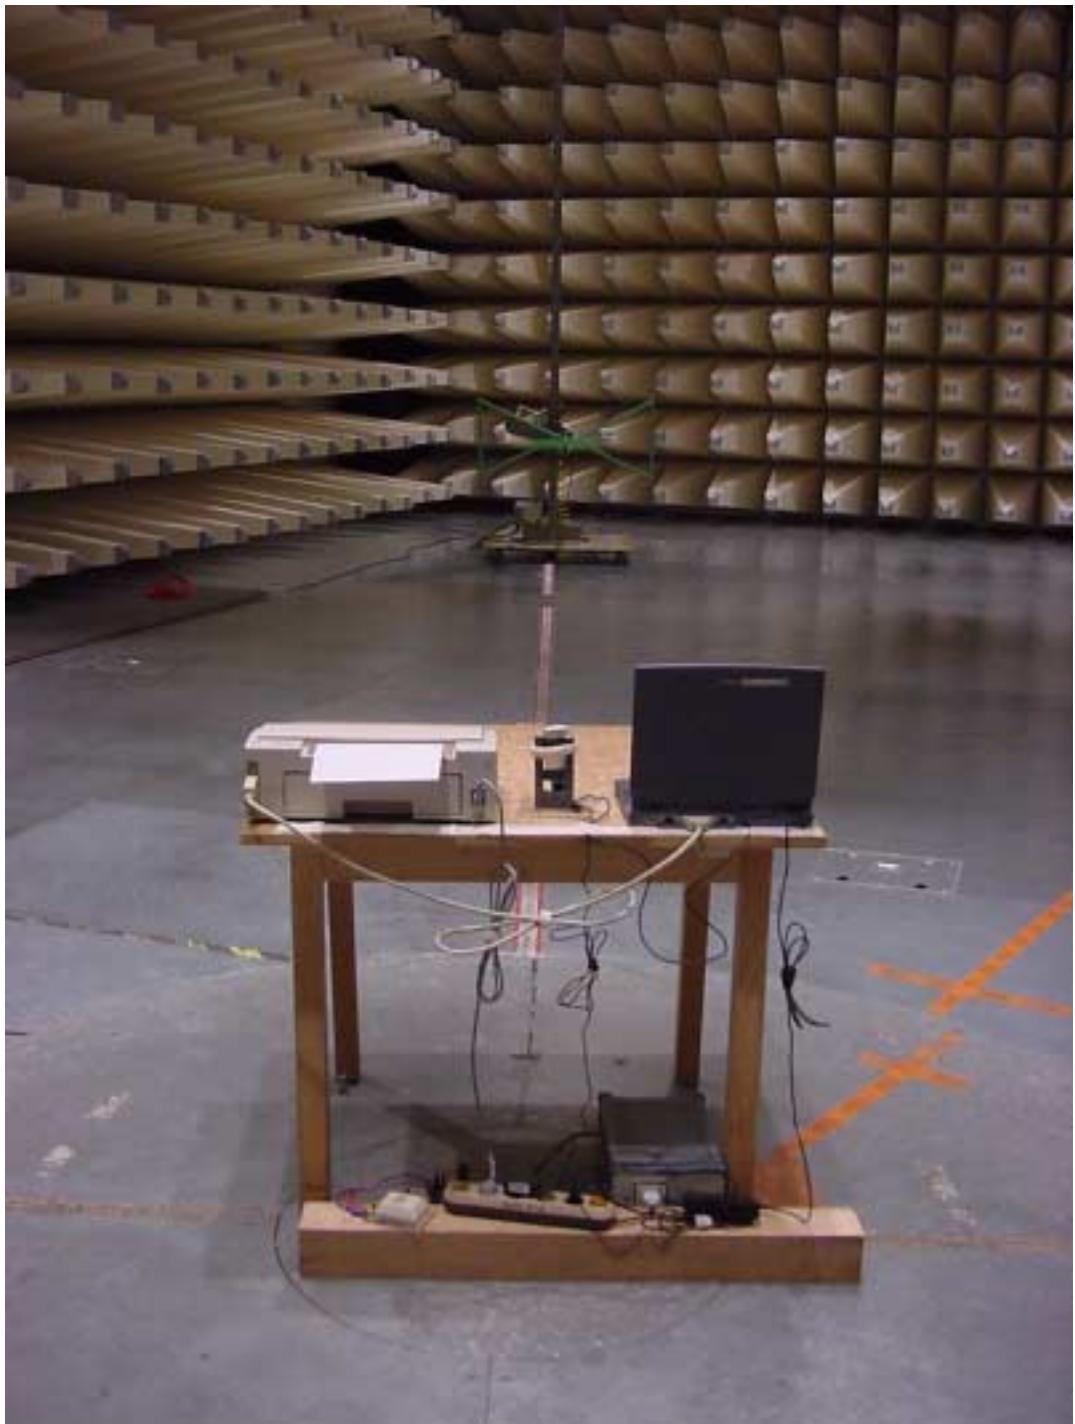
Test site

Test setup “Idle mode”

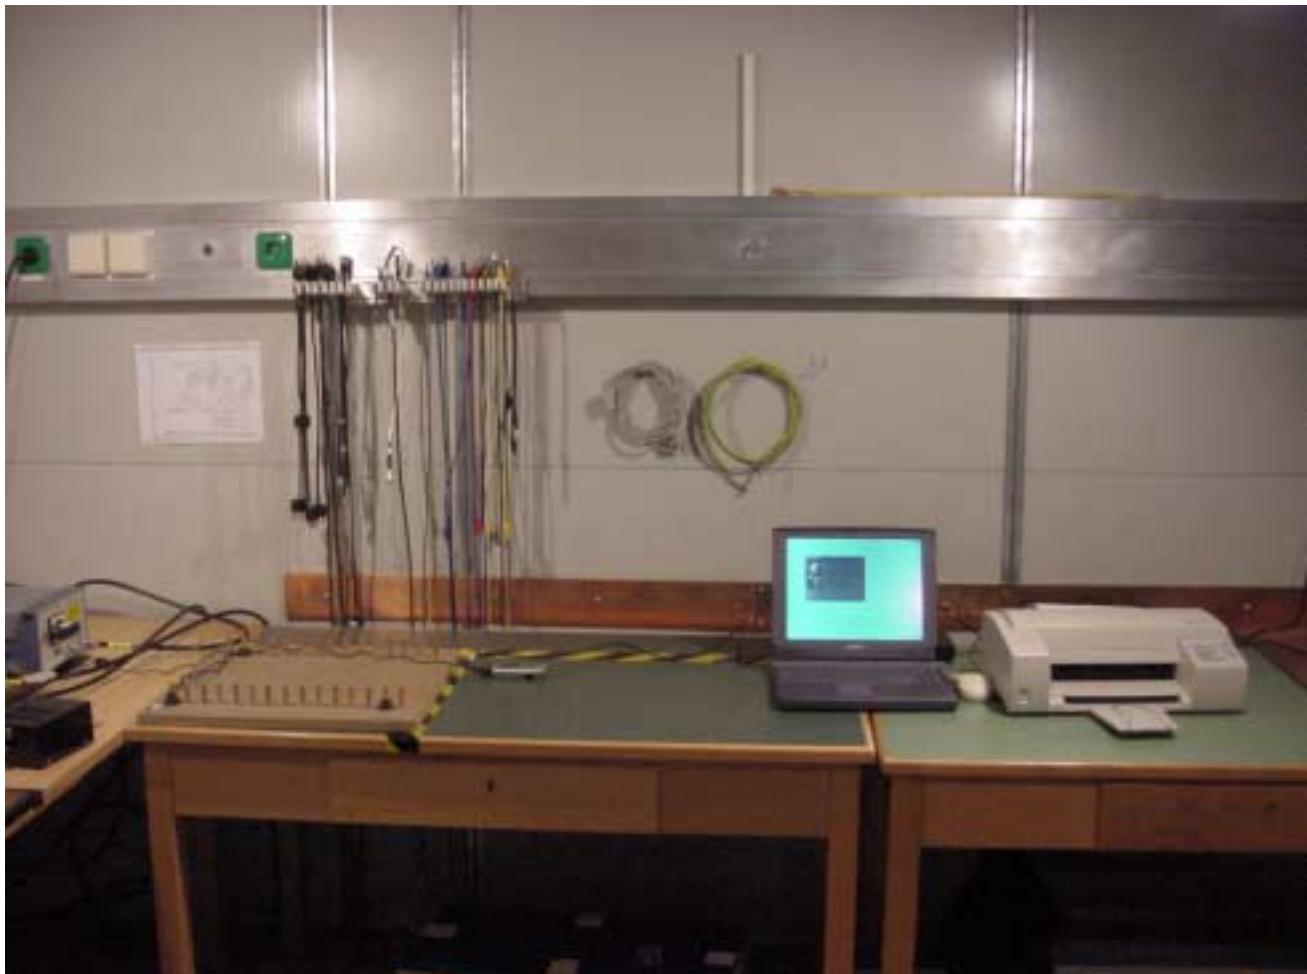


Test site

Test setup “Idle mode”



Test site



Photographs of the equipment



PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



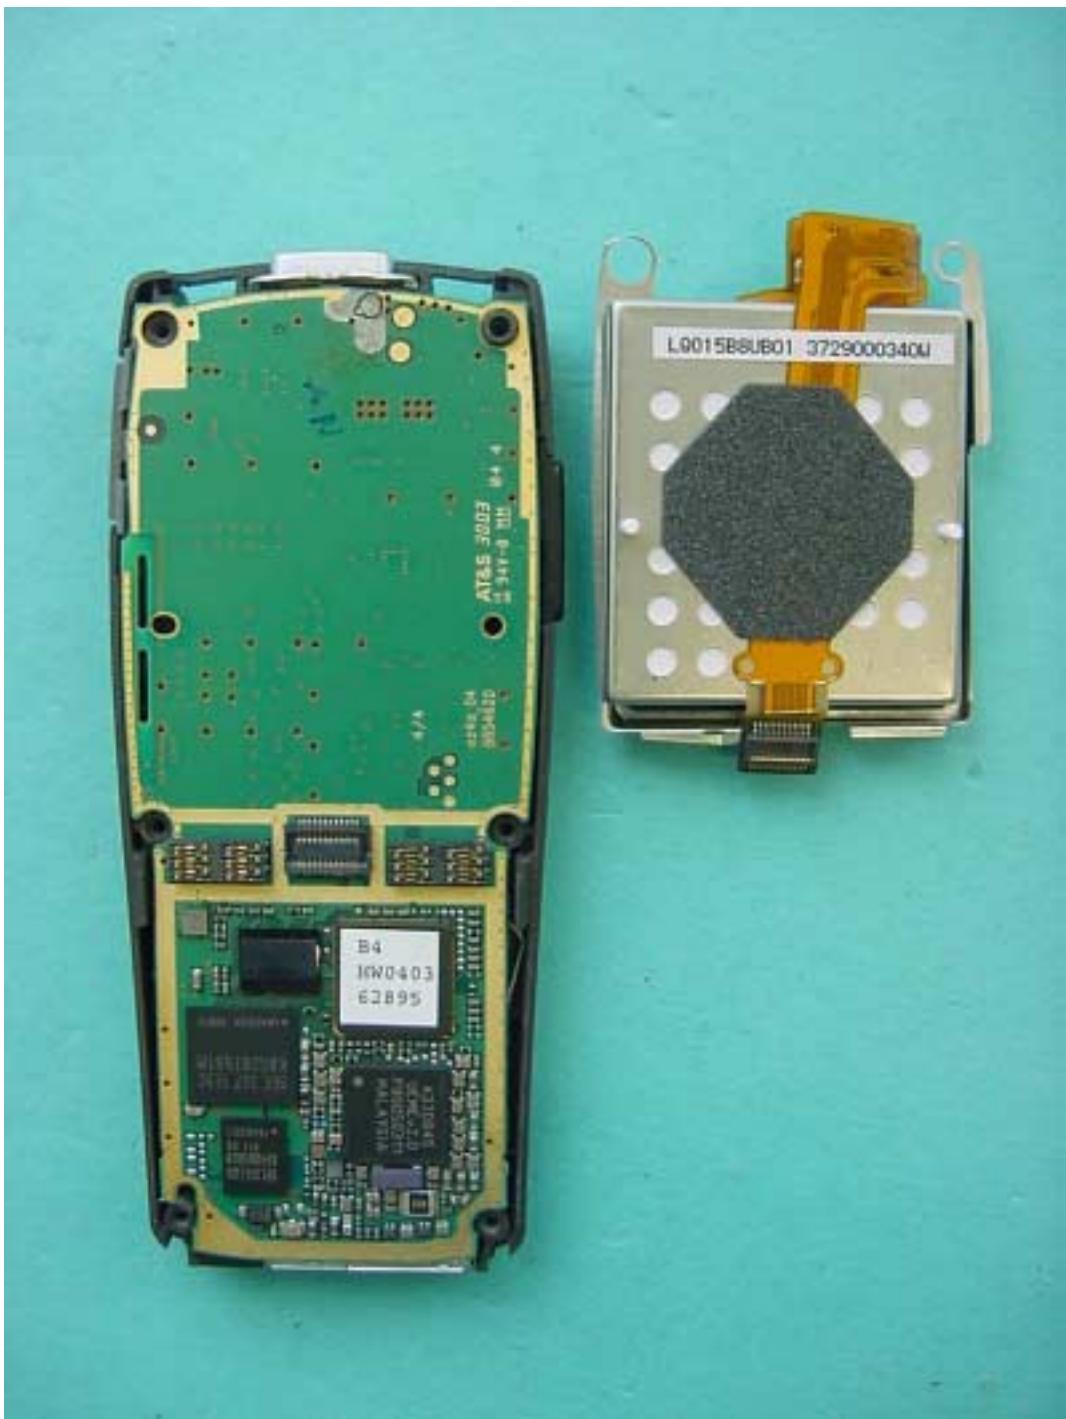
PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT



Photographs of the equipment

