

FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0633_09.doc	Date of Report:	25-08-2006
Number of pages:	17	Customer's Contact person:	Ole Sørensen
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-140 (HW 0330) & Battery; BP-5M & Headset; HS-60 & AC Charger; AC-3E		
FCC ID:	QTKRM-140	IC:	661AD-RM140
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	31-07-2006
Testing completed	19-08-2006
The customer's contact person	Ole Sørensen
Test Plan referred to	\EMC\TESTPLAN\
Notes	None
Document name	T:\Projects\RM-140\EMC\Results\FCC\Cph_FCC_0633_09.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-140	004400/97/170280/6	0330	-	Vp 03.14	28502
Phone	RM-140	004400/97/170381/2	0330	-	Vp03.14	29074
Battery	BP-5M	393213N172110102532;0670509	-	-	-	28507
Battery	BP-5M	393213N172110102527;0670509	-	-	-	29075
Headset	HS-60	-	-	-	-	29077
AC Charger	AC-3E	1103336133141301706;0675370	-	-	-	29076

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	Passed
§2.1049(h)	5.6	99 % occupied bandwidth	NP
§24.238(a)	6.3	Band edge compliance	Passed
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	Passed
§2.1055(a)	7	Frequency stability, temperature variation	NP
§2.1055(d)	7	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 1900 Test results	5
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 1900 Test results	9
4. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	13
4.1. Test setup	13
4.2. Test method and limit	13
4.3. GSM 1900 Test results	14
5. Test Equipment.....	16
5.1. Conducted measurements	16
5.2. Radiated measurements	16

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)

EUT with DUT number	RM-156 Dut#28502
Accessories with DUT numbers	BP-5M Dut#28507
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23 / 55 / 1023
Date of measurements	19-08-2006
Measured by	Christian Andersen

2.1. Test setup

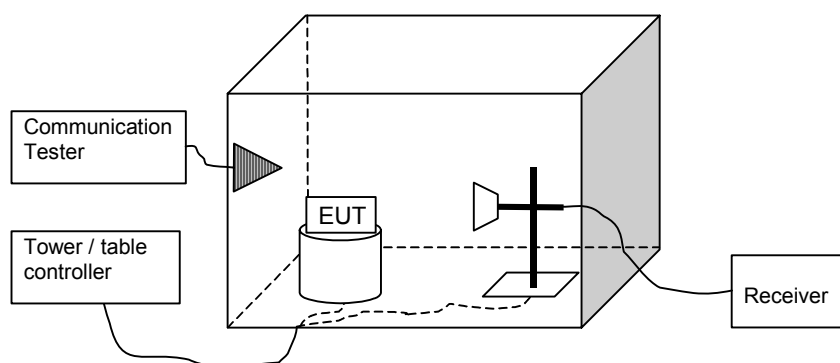

2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$P_{EIRP[W]} = \frac{10^{(P_{Subst_TX[dBm]} + (P_{EUT[dBm]} - P_{Subst_RX[dBm]}) + G_{Substitute_antenna[dBi]} - L_{Cable[dB]}))}}{1000}$$

Where the variables are as follows:

PEUT [dBm] Measured power level from the EUT
 PSubst_TX [dBm] Signal Generator Power
 PSubst_RX [dBm] Power received with the spectrum analyzer
 GSubstitute_antenna [dBi] Gain of the substitutive antenna over isotropic radiator
 LCable [dB] Loss of the cable between signal generator and the substituting antenna.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1850 - 1910	2	33

2.3. GSM 1900 Test results

2.3.1 Phone flip open

GSM mode

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-14.92	10.7	-32.68	10.7	12.5	30.26	1.062	125	Hor	Passed
661/1880.0	-15.92	10.8	-33	10.8	12.5	29.58	0.908	125	Hor	Passed
810/1909.8	-17.06	10.9	-33.2	10.9	12.5	28.64	0.731	125	Hor	Passed

GPRS mode, 2 TX Slots

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-16.93	10.7	-32.68	10.7	12.5	28.25	0.668	125	Hor	Passed
661/1880.0	-18.45	10.8	-33	10.8	12.5	27.05	0.507	125	Hor	Passed
810/1909.8	-19.61	10.9	-33.2	10.9	12.5	26.09	0.406	125	Hor	Passed

GPRS mode, 3 TX Slot

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-19.4	10.7	-32.68	10.7	12.5	25.78	0.378	125	Hor	Passed
661/1880.0	-19.89	10.8	-33	10.8	12.5	25.61	0.364	125	Hor	Passed
810/1909.8	-21.28	10.9	-33.2	10.9	12.5	24.42	0.277	125	Hor	Passed

EGPRS mode, 1 TX Slot

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-16.95	10.7	-32.68	10.7	12.5	28.23	0.665	125	Hor	Passed
661/1880.0	-17.52	10.8	-33	10.8	12.5	27.98	0.628	125	Hor	Passed
810/1909.8	-17.82	10.9	-33.2	10.9	12.5	27.88	0.614	125	Hor	Passed

2.3.2 Phone flip closed

GSM mode

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-15.77	10.7	-32.68	10.7	12.5	29.41	0.873	352	Ver	Passed
661/1880.0	-16.65	10.8	-33	10.8	12.5	28.85	0.767	352	Ver	Passed
810/1909.8	-18.16	10.9	-33.2	10.9	12.5	27.54	0.568	352	Ver	Passed

GPRS mode, 2 TX Slots

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-17.44	10.7	-32.68	10.7	12.5	27.74	0.594	352	Ver	Passed
661/1880.0	-18.13	10.8	-33	10.8	12.5	27.37	0.546	352	Ver	Passed
810/1909.8	-20.2	10.9	-33.2	10.9	12.5	25.5	0.355	352	Ver	Passed

GPRS mode, 3 TX Slot

EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-19.82	10.7	-32.68	10.7	12.5	25.36	0.344	352	Ver	Passed
661/1880.0	-20.35	10.8	-33	10.8	12.5	25.15	0.327	352	Ver	Passed
810/1909.8	-21.9	10.9	-33.2	10.9	12.5	23.8	0.240	352	Ver	Passed

EGPRS mode, 1 TX Slot


EUT Channel / fC [MHz]	P eut [dBm]	P subst TX [dBm]	P subst RX [dBm]	Cable Loss [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [W]	Azimuth [Deg]	Ant pos	Result
512/1850.2	-17.18	10.7	-32.68	10.7	12.5	28	0.631	352	Ver	Passed
661/1880.0	-17.88	10.8	-33	10.8	12.5	27.62	0.578	352	Ver	Passed
810/1909.8	-18.93	10.9	-33.2	10.9	12.5	26.77	0.475	352	Ver	Passed

3. Band edge compliance

(FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-156 Dut#28502
Accessories with DUT numbers	BP-5M Dut#28507
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23 / 55 / 1023
Date of measurements	19-08-2006
Measured by	Christian Andersen

3.1. Test setup

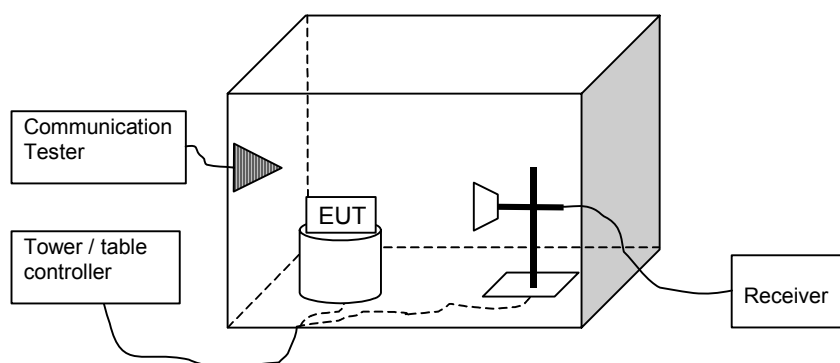

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13

3.3. GSM 1900 Test results


3.3.1 Phone flip open

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-13.39
GSM	810 / 1909.8	-17.04
EGPRS	512 / 1850.2	-16.71
EGPRS	810 / 1909.8	-20.24


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

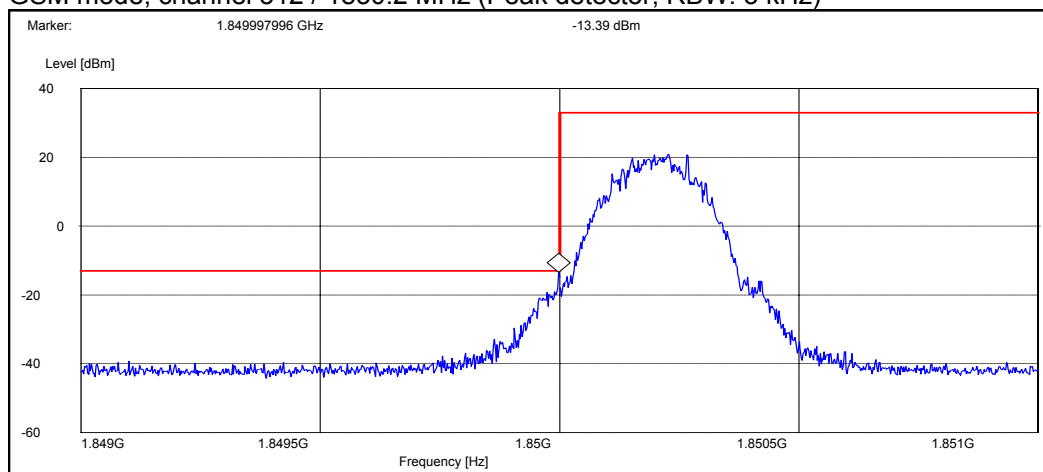


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

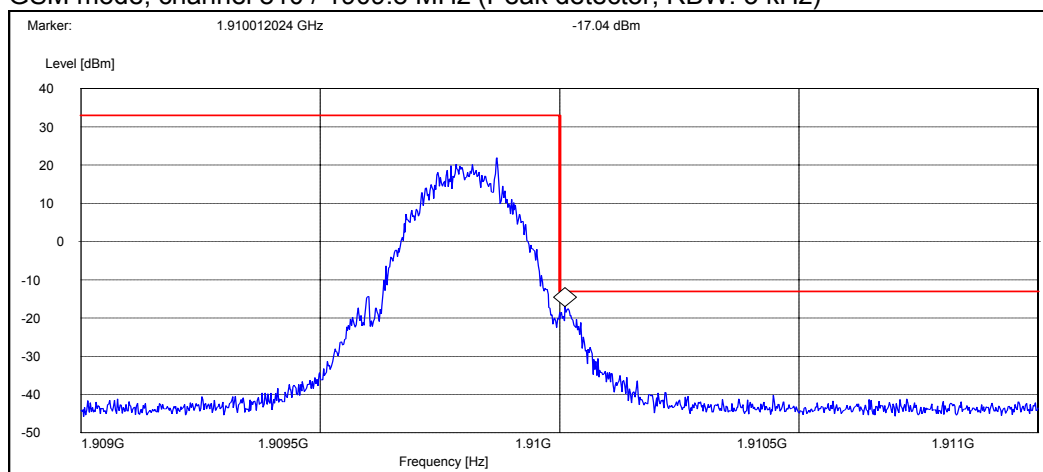

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

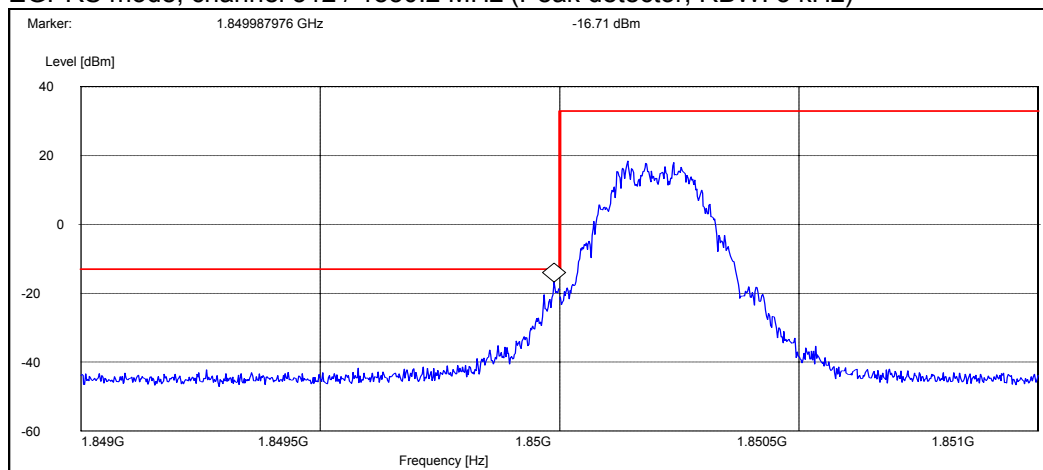


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

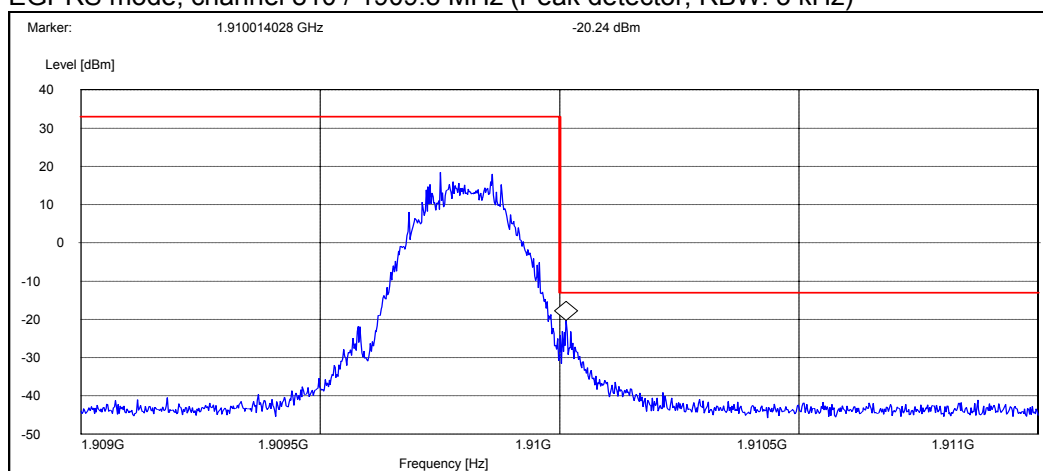


3.3.2 Phone flip closed

Operation mode (TX on)	Channel / f_c [MHz]	Level [dBm]
GSM	512 / 1850.2	-13.31
GSM	810 / 1909.8	-16.01
EGPRS	512 / 1850.2	-19.68
EGPRS	810 / 1909.8	-18.80


GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

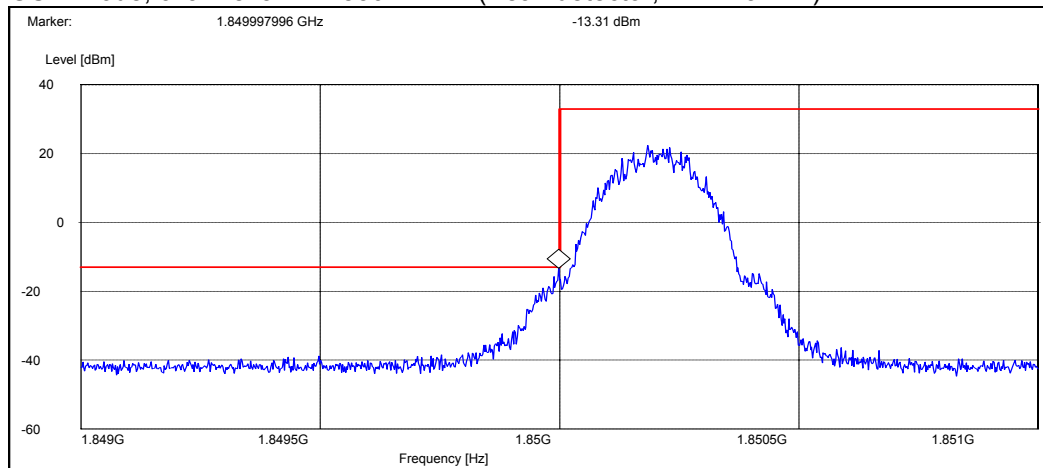


GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

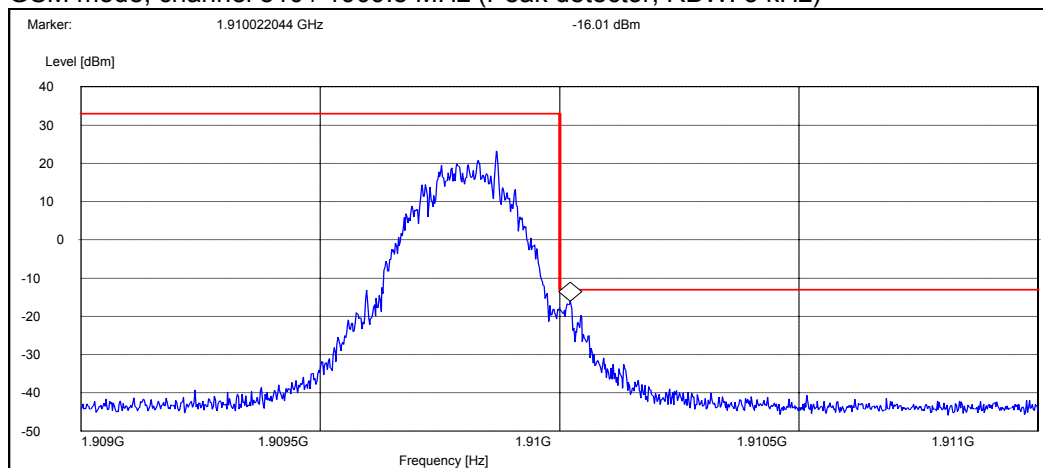

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz)

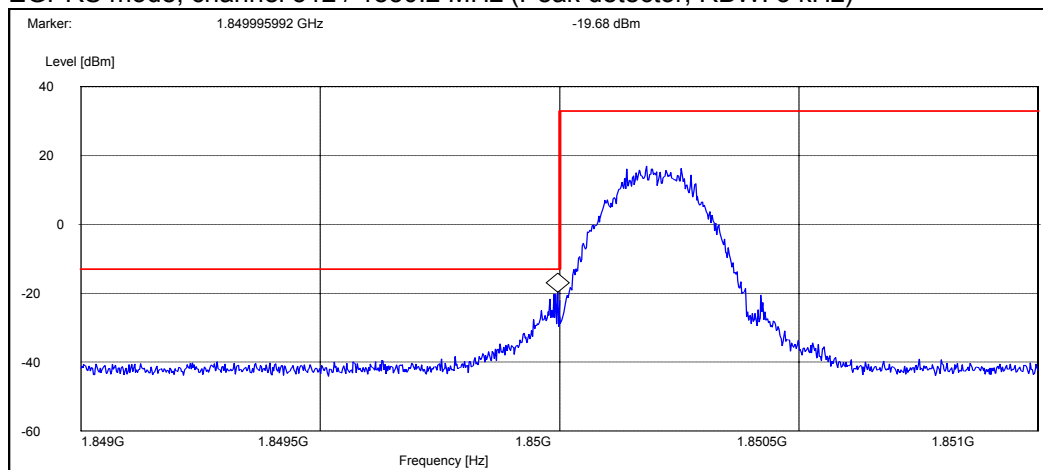

EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz)

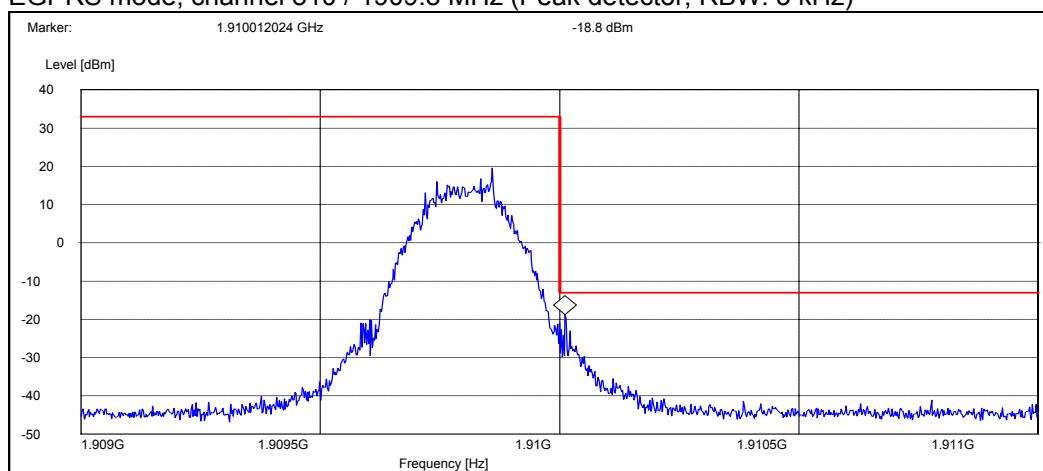


4. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-156 Dut#29074
Accessories with DUT numbers	BP-5M Dut#29075, AC-3E Dut#29076, HS-60 Dut#29077
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 53 / 1023
Date of measurements	10-08-2006
Measured by	Christian Andersen

4.1. Test setup

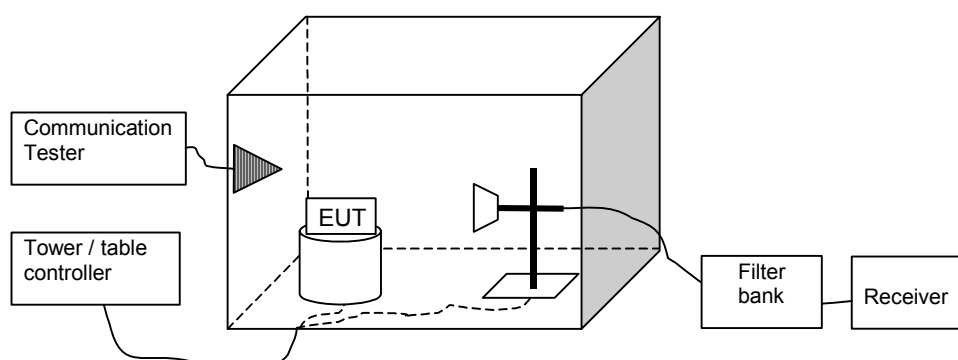

4.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1900	30 - 18000	-13

4.3. GSM 1900 Test results

4.3.1 Phone flip open

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-31.40	0.72444	-40.20	8.80	VERTICAL	Passed
3760.023046	-39.20	0.12023	-45.60	6.40	VERTICAL	Passed
5639.778557	-49.20	0.01202	-57.70	8.50	HORIZONTAL	Passed
5647.802605	-55.70	0.00269	-64.30	8.60	VERTICAL	Passed
7520.042084	-44.20	0.03802	-61.20	17.00	VERTICAL	Passed

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-29.10	1.23027	-37.90	8.80	VERTICAL	Passed
3760.023046	-43.40	0.04571	-49.80	6.40	VERTICAL	Passed
5639.778557	-54.20	0.00380	-62.70	8.50	HORIZONTAL	Passed
5652.802605	-55.70	0.00269	-64.30	8.60	VERTICAL	Passed
7520.042084	-45.00	0.03162	-62.00	17.00	VERTICAL	Passed

4.3.2 Phone flip closed

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-29.80	1.04713	-38.60	8.80	VERTICAL	Passed
3760.023046	-39.80	0.10471	-46.20	6.40	VERTICAL	Passed
5640.282565	-42.10	0.06166	-50.60	8.50	HORIZONTAL	Passed
7520.042084	-41.00	0.07943	-58.00	17.00	VERTICAL	Passed

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-26.00	2.51189	-34.80	8.80	VERTICAL	Passed
3760.023046	-43.20	0.04786	-49.60	6.40	VERTICAL	Passed
5639.782565	-43.40	0.04571	-51.90	8.50	HORIZONTAL	Passed
7520.042084	-41.80	0.06607	-58.80	17.00	VERTICAL	Passed

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	15B,15C,22,24
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz- 4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C