

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	Cph_FCC_0718_04.doc	Date of Report:	09.05.2007
Number of pages:	14	Customer's Contact person:	Ole Soerensen
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone: RM-207 (hw0002), Battery; BL-5C, Headset: HS-47 AC Charger: AC-4E		
FCC ID:	QTKRM-207	IC:	661AD-RM207
Supplement reports:	None		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22, 24 and 27, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jan Engelbrechtsen, Engineer

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	03.05.2007
Testing completed	09.05.2007
The customer's contact person	Ole Soerensen
Test Plan referred to	T:\Projects\RM-207\TestPlan_RS\RS_test_plan_RM-207_CR_HW0002.xls
Notes	None
Document name	T:\Projects\RM-207\EMC\Results\FCC\Cph_FCC_0718_04.doc

1.1. EUT and Accessory Information

The EUT is a 5-band (GSM850/900/1800/1900/IV(1700)) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-207	004401/01/289922/7	0002	-	Vp ws06w47_07w13	27284
Battery	BL-5C	Matsushita 1020maH Proto V106	-	-	-	27285
Headset	HS-47	1016	0.3	0.4	-	27732
AC Charger	AC-4E	3943495502070122522;0675384	-	-	-	27840

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	-
§22.913(a)	4.6, 4.4	Radiated RF output power	-
§2.1049(h)	4.4.1	99 % occupied bandwidth	Passed
§22.917(a)	4.7, 4.5	Band edge compliance	-
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	-
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	-
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	-
§24.232(b)	6.2	Radiated RF output power	-
§2.1049(h)	5.6	99 % occupied bandwidth	Passed
§24.238(a)	6.3	Band edge compliance	-
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238(a), §2.1053	6.3	Spurious radiated emissions	-
§2.1055(a)	7	Frequency stability, temperature variation	Passed
§2.1055(d)	7	Frequency stability, voltage variation	Passed

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-XXX	Name of the test	Result
-------------------	--------------------	------------------	--------

§2.1046(a)	-	Conducted RF output power	-
§27.50(d)(2)	-	Radiated RF output power	-
§2.1049(h)	-	99 % occupied bandwidth	Passed
§27.53(g)	-	Band edge compliance	-
§27.53(g), §2.1051	-	Spurious emissions at antenna terminals	-
§27.53(g), §2.1053	-	Spurious radiated emissions	-
§2.1055(a)	-	Frequency stability, temperature variation	Passed
§2.1055(d)	-	Frequency stability, voltage variation	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)	5
2.1. Test setup	5
2.2. Test method and limit.....	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. WCDMA 1700 Test results.....	8
3. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	9
3.1. Test setup	9
3.2. Test method and limit.....	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	10
3.5. WCDMA 1700 Test results.....	10
4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	11
4.1. Test setup	11
4.2. Test method and limit.....	11
4.3. GSM 850 Test results	12
4.4. GSM 1900 Test results	12
4.5. WCDMA 1700 Test results.....	12
5. Test Equipment.....	13
5.1. Conducted measurements	13
5.2. Radiated measurements	13

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)

EUT with DUT number	RM-207 dut 27284, BL-5C dut 27285
Accessories with DUT numbers	HS-47 dut 27732, AC-4E dut 27840
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.2 / 35.4 101.12
Date of measurements	07.05.2007
Measured by	Jan Engelbrechtsen

2.1. Test setup

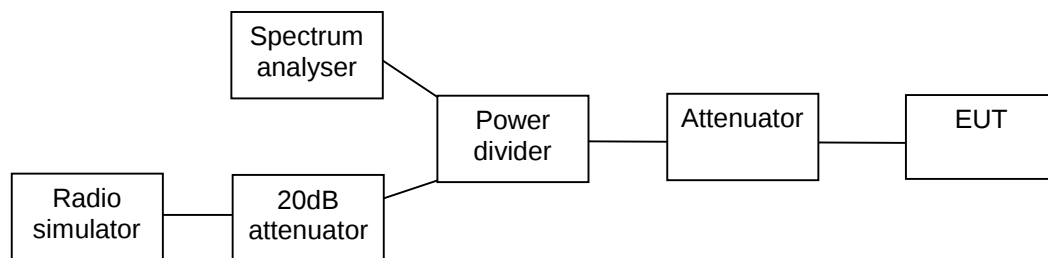

2.2. Test method and limit

The measurement is made according to FCC rules part 22, 24 and 27 and IC standards RSS-GEN and RSS-133.

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	244
EGPRS	242

RBW 3 kHz
 VBW 3 kHz
 SWT 200 ms
 Ref 30 dBm
 Att 50 dB
 Marker 1 [T1]
 836.576000000 MHz
 23.43 dBm
 100 kHz
 Span 1 MHz
 Center 836.6 MHz
 Date: 7.MAY.2007 07:56:50

1 PK VIEW

Ref 30 dBm *Att 50 dB *SWT 200 ms 836.57000000 MHz

OBW242 000000000 kHz
Temp 1 [T1 OBW] 0.65 dBm
836.478000000 MHz
Temp 2 [T1 OBW] 0.65 dBm
836.720000000 MHz


Center 836.6 MHz 100 kHz/ Span 1 MHz

Date: 7.MAY.2007 08:24:21


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	242
EGPRS	242

GSM mode, channel 661 / 1880.0 MHz

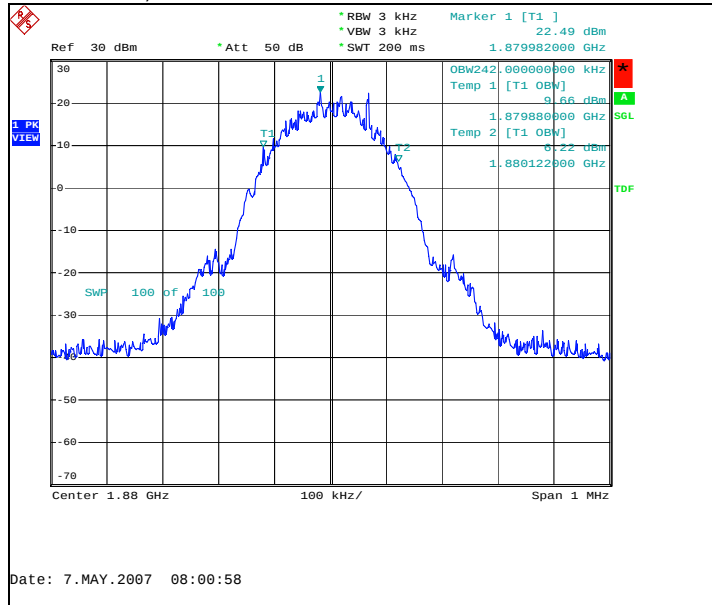


EGPRS mode, channel 661 / 1880.0 MHz

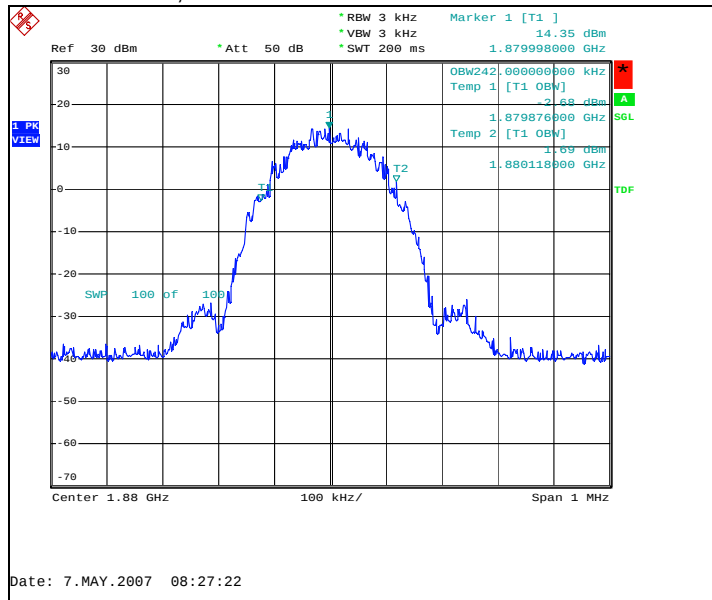

2.5. WCDMA 1700 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4160


Channel 1412 / 1732.4 MHz

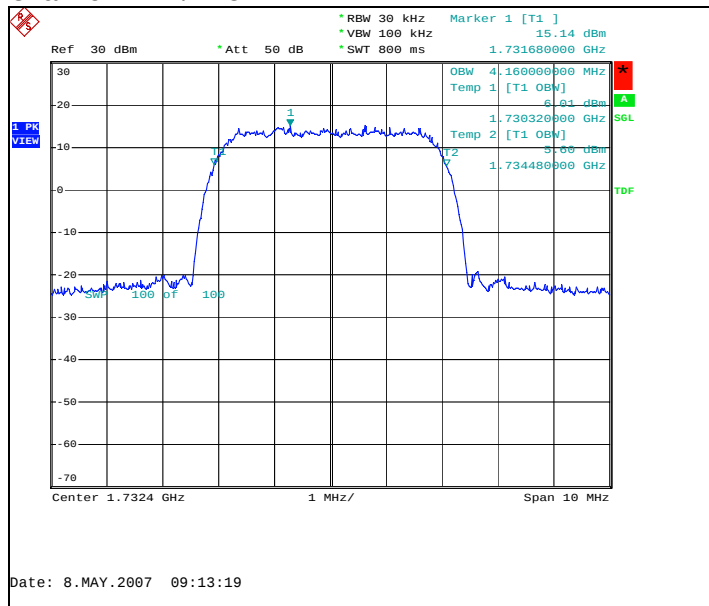

3. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-207 dut 27284, BL-5C dut 27285
Accessories with DUT numbers	HS-47 dut 27732, AC-4E dut 27840
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.2 / 35.4 101.12
Date of measurements	07.05.2007
Measured by	Jan Engelbrechtsen

3.1. Test setup

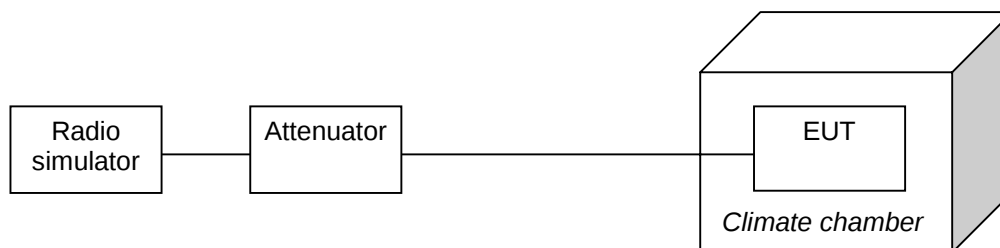

3.2. Test method and limit

The measurement is made according to FCC rules part 22, 24 and 27 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

3.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-10	-0.0120
40	10	0.0120
30	32	0.0383
20	10	0.0120
10	14	0.0167
0	32	0.0383
-10	32	0.0383
-20	32	0.0383
-30	-15	-0.0179

3.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-49	-0.0261
40	-43	-0.0229
30	-42	-0.0223
20	-57	-0.0303
10	-39	-0.0207
0	-51	-0.0271
-10	-57	-0.0303
-20	-47	-0.0250
-30	-39	-0.0207

3.5. WCDMA 1700 Test results


Channel 1412 / 1732.4 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	21	0.0121
40	22	0.0127
30	21	0.0121
20	-21	-0.0121
10	20	0.0115
0	18	0.0104
-10	-19	-0.0109
-20	23	0.0133
-30	21	0.0121

4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-207 dut 27284
Accessories with DUT numbers	Dummy Battery BD-4
Operation Voltage [V] / [Hz]	DC Power supply
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.2 / 35.4 101.12
Date of measurements	07.05.2007
Measured by	Jan Engelbrechtsen

4.1. Test setup



4.2. Test method and limit

The measurement is made according to FCC rules part 22, 24 and 27 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	34	0.0406
Nominal / 4.00	10	0.0120

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-55	-0.0293
Nominal / 4.00	-46	-0.0245

4.5. WCDMA 1700 Test results

Channel 1412 / 1732.4 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-22	-0.127
Nominal / 4.00	21	0.121

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampfier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B