

FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0827_06.doc	Date of Report:	04-Jul-2008
Number of pages:	34	Customer's Contact person:	Shao Xu
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-414 (HW: 0300A), Battery; BL-4U, AC-Charger; AC-6C, USB Charger Cable; CA-100C, Headset; HS-83, Audio Adapter; AD-83		
FCC ID:	QTKRM-414	IC:	661AD-RM414
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 4, February 2008). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Test System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	24-Jun-2008
Testing completed	01-Jul-2008
The customer's contact person	Shao Xu
Test Plan referred to	T:\Projects\RM-414\TestPlan_RS\RS_Testplan_RM-414.xls
Notes	None
Document name	T:\Projects\RM-414\EMC\Results\FCC\Cph_FCC_0827_06.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-414		0300A	-	Vp vs.4.47	29310
Battery	BL-4U	4620407475J10120653;0670560	-	-	-	26976
AC-Charger	AC-6C	3943497355070600232;0675594	2.2	-	-	26737
Charging Data Cable	CA-100C	0730339730111800923	-	-	-	26736
Audio Adapter	AD-83	069430582041A600484	-	-	-	26971
Headset	HS-83	0694739823518600381	-	-	-	26975
Phone	RM-414	004401/10/135153/0	0300A	-	Vp vs.4.47	27476
Battery	BL-4U	4620407517J10120897;0670560	-	-	-	27468
Phone	RM-414	004401/10/135115/9	0300A	-	Vp vs.4.47	26980

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§22.917(a)	4.5	Band edge compliance	Passed
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	Passed
§2.1055(a)	4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§24.238(a)	6.5	Band edge compliance	Passed
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	Passed
§2.1055(a)	6.3	Frequency stability, temperature variation	Passed
§2.1055(d)	6.3	Frequency stability, voltage variation	Passed

WCDMA 850 (Band V):

Section in CFR 47	Section in <i>RSS-GEN</i> or <i>RSS-132</i>	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	Passed
§22.917(a)	4.5	Band edge compliance	Passed
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	Passed
§2.1055(a)	4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.3	Frequency stability, voltage variation	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)	6
2.1. Test setup	6
2.2. Test method and limit	6
2.3. GSM 850 Test results	7
2.4. GSM 1900 Test results	8
2.5. WCDMA 850 Test results	10
3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	11
3.1. Test setup	11
3.2. Test method and limit	11
3.3. GSM 850 Test results	12
3.4. GSM 1900 Test results	13
3.5. WCDMA 850 Test results	14
4. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)	15
4.1. Test setup	15
4.2. Test method and limit	15
4.3. GSM 850 Test results	16
4.4. GSM 1900 Test results	20
4.5. WCDMA 850 Test results	24
5. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)	26
5.1. Test setup	26
5.2. Test method and limit	26
5.3. GSM 850 Test results	27
5.4. GSM 1900 Test results	27
5.5. WCDMA 850 Test results	28
6. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)	29
6.1. Test setup	29
6.2. Test method and limit	29
6.3. GSM 850 Test results	30
6.4. GSM 1900 Test results	30
7. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)	31

7.1.	Test setup	31
7.2.	Test method and limit.....	31
7.3.	GSM 850 Test results	32
7.4.	GSM 1900 Test results	32
8.	Test Equipment.....	33
8.1.	Conducted measurements	33
8.2.	Radiated measurements	33

2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-414 DUT 27476
Accessories with DUT numbers	BL-4U DUT 27468
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 48 / 101.2
Date of measurements	03-Jul-2008
Measured by	Christian Andersen

2.1. Test setup

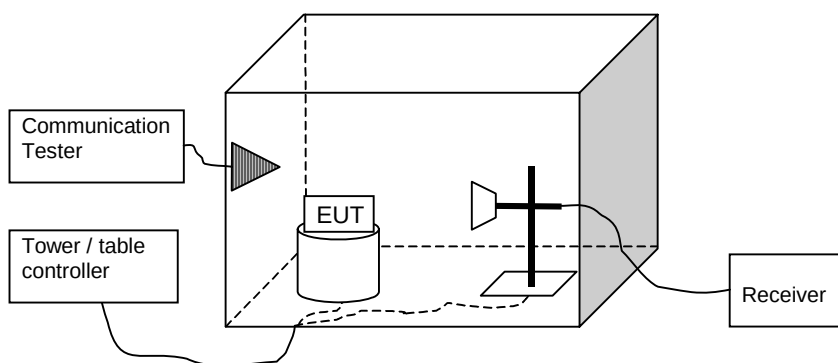

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1850 - 1910	2	33

2.3. GSM 850 Test results

Phone slide open

GSM mode

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	30.80	1.202	-3.90	34.70	HORIZONTAL	Passed
190 / 836.6	30.80	1.202	-3.60	34.40	HORIZONTAL	Passed
251 / 848.8	29.60	0.912	-4.30	33.90	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	29.10	0.813	-5.60	34.70	HORIZONTAL	Passed
190 / 836.6	28.70	0.741	-5.70	34.40	HORIZONTAL	Passed
251 / 848.8	27.20	0.525	-6.70	33.90	HORIZONTAL	Passed

GPRS mode, 3 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	27.60	0.575	-7.10	34.70	HORIZONTAL	Passed
190 / 836.6	27.20	0.525	-7.20	34.40	HORIZONTAL	Passed
251 / 848.8	25.50	0.355	-8.40	33.90	HORIZONTAL	Passed

EGPRS mode, 2 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	24.20	0.263	-10.50	34.70	HORIZONTAL	Passed
190 / 836.6	23.40	0.219	-11.00	34.40	HORIZONTAL	Passed
251 / 848.8	21.80	0.151	-12.10	33.90	HORIZONTAL	Passed

EGPRS mode, 3 TX Slots

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	22.60	0.182	-12.10	34.70	HORIZONTAL	Passed
190 / 836.6	22.40	0.174	-12.00	34.40	HORIZONTAL	Passed
251 / 848.8	20.50	0.112	-13.40	33.90	HORIZONTAL	Passed

Phone slide closed

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	30.00	1.000	-4.70	34.70	HORIZONTAL	Passed
190 / 836.6	29.90	0.977	-4.50	34.40	HORIZONTAL	Passed
251 / 848.8	28.40	0.692	-5.50	33.90	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	28.20	0.661	-6.50	34.70	HORIZONTAL	Passed
190 / 836.6	27.90	0.617	-6.50	34.40	HORIZONTAL	Passed
251 / 848.8	25.80	0.380	-8.10	33.90	HORIZONTAL	Passed

GPRS mode, 3 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	26.70	0.468	-8.00	34.70	HORIZONTAL	Passed
190 / 836.6	26.30	0.427	-8.10	34.40	HORIZONTAL	Passed
251 / 848.8	24.10	0.257	-9.80	33.90	HORIZONTAL	Passed

EGPRS mode, 2 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	23.20	0.209	-11.50	34.70	HORIZONTAL	Passed
190 / 836.6	22.30	0.170	-12.10	34.40	HORIZONTAL	Passed
251 / 848.8	20.70	0.117	-13.20	33.90	HORIZONTAL	Passed

EGPRS mode, 3 TX Slots

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128 / 824.2	21.90	0.155	-12.80	34.70	HORIZONTAL	Passed
190 / 836.6	21.80	0.151	-12.60	34.40	HORIZONTAL	Passed
251 / 848.8	19.30	0.085	-14.60	33.90	HORIZONTAL	Passed

2.4. GSM 1900 Test results

Phone slide open

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.30	0.537	-16.50	43.80	HORIZONTAL	Passed
661 / 1880.0	28.00	0.631	-16.10	44.10	HORIZONTAL	Passed
810 / 1909.8	28.10	0.646	-15.70	43.80	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	24.70	0.295	-19.10	43.80	HORIZONTAL	Passed
661 / 1880.0	25.40	0.347	-18.70	44.10	HORIZONTAL	Passed
810 / 1909.8	25.60	0.363	-18.20	43.80	HORIZONTAL	Passed

GPRS mode, 3 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	23.20	0.209	-20.60	43.80	HORIZONTAL	Passed
661 / 1880.0	23.90	0.245	-20.20	44.10	HORIZONTAL	Passed
810 / 1909.8	24.10	0.257	-19.70	43.80	HORIZONTAL	Passed

EGPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	21.60	0.145	-22.20	43.80	HORIZONTAL	Passed
661 / 1880.0	21.70	0.148	-22.40	44.10	HORIZONTAL	Passed
810 / 1909.8	22.70	0.186	-21.10	43.80	HORIZONTAL	Passed

EGPRS mode, 3 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	19.40	0.087	-24.40	43.80	HORIZONTAL	Passed
661 / 1880.0	20.90	0.123	-23.20	44.10	HORIZONTAL	Passed
810 / 1909.8	20.90	0.123	-22.90	43.80	HORIZONTAL	Passed

Phone slide closed

GSM mode

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.60	0.575	-16.90	44.50	VERTICAL	Passed
661 / 1880.0	28.00	0.631	-16.10	44.10	HORIZONTAL	Passed
810 / 1909.8	28.00	0.631	-15.80	43.80	HORIZONTAL	Passed

GPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	24.80	0.302	-19.70	44.50	VERTICAL	Passed
661 / 1880.0	25.30	0.339	-18.80	44.10	HORIZONTAL	Passed
810 / 1909.8	25.50	0.355	-18.30	43.80	HORIZONTAL	Passed

GPRS mode, 3 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	23.40	0.219	-21.10	44.50	VERTICAL	Passed
661 / 1880.0	23.70	0.234	-20.40	44.10	HORIZONTAL	Passed
810 / 1909.8	24.00	0.251	-19.80	43.80	HORIZONTAL	Passed

EGPRS mode, 2 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	22.80	0.191	-21.70	44.50	VERTICAL	Passed
661 / 1880.0	22.10	0.162	-22.00	44.10	HORIZONTAL	Passed
810 / 1909.8	22.50	0.178	-21.30	43.80	HORIZONTAL	Passed

EGPRS mode, 3 TX Slots

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512 / 1850.2	20.00	0.100	-24.50	44.50	VERTICAL	Passed
661 / 1880.0	20.80	0.120	-23.30	44.10	HORIZONTAL	Passed
810 / 1909.8	20.70	0.117	-23.10	43.80	HORIZONTAL	Passed

2.5. WCDMA 850 Test results

Phone slide open

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
4132 / 826.4	20.50	0.112	-14.40	34.90	HORIZONTAL	Passed
4175 / 835.0	19.90	0.098	-14.20	34.10	HORIZONTAL	Passed
4233 / 846.6	19.00	0.079	-15.00	34.00	HORIZONTAL	Passed


Phone slide closed

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
4132 / 826.4	19.70	0.093	-15.20	34.90	HORIZONTAL	Passed
4175 / 835.0	19.00	0.079	-15.10	34.10	HORIZONTAL	Passed
4233 / 846.6	17.70	0.059	-16.30	34.00	HORIZONTAL	Passed

3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-414 DUT 26980
Accessories with DUT numbers	BL-4U DUT 26976, AC-6C DUT 26737, CA-100C DUT 26736, AD-83 DUT 26971, HS-83 DUT 26975
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 101.2
Date of measurements	03-Jul-2008
Measured by	Allan Henriksen

3.1. Test setup

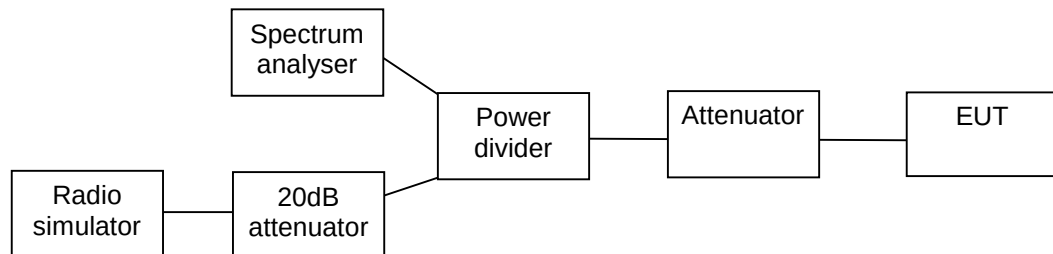


3.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standard RSS-GEN.

3.3. GSM 850 Test results


Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	240.000
EGPRS	240.000

GSM mode, channel 190 / 836.6 MHz

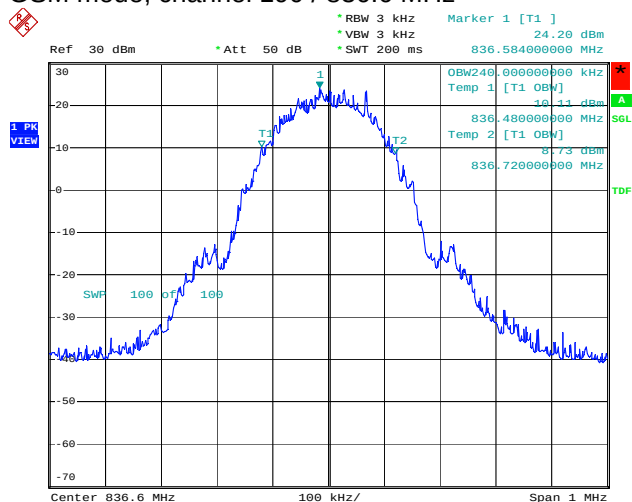

Date: 2.JUL.2008 14:59:44

EGPRS mode, channel 190 / 836.6 MHz

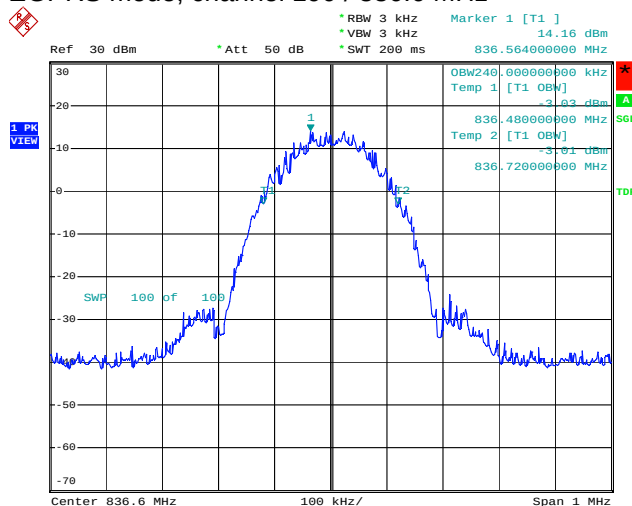


Date: 2.JUL.2008 15:01:01


3.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	240.000
EGPRS	242.000

GSM mode, channel 661 / 1880.0 MHz

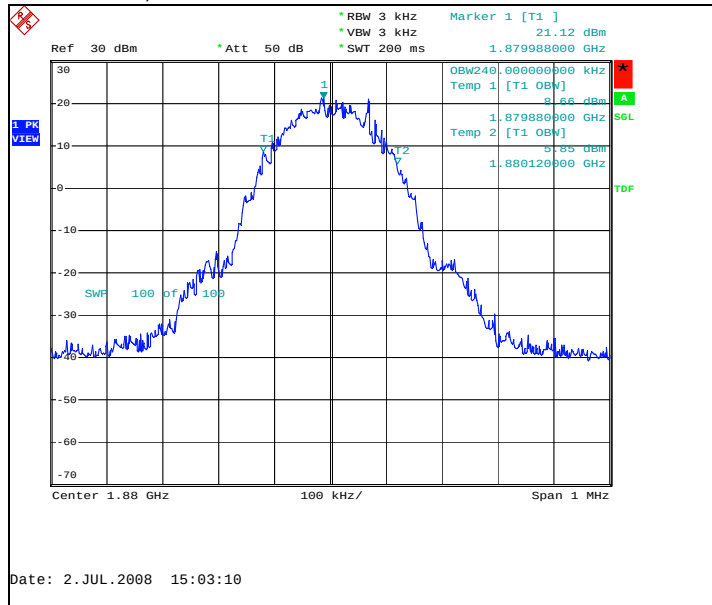


EGPRS mode, channel 661 / 1880.0 MHz

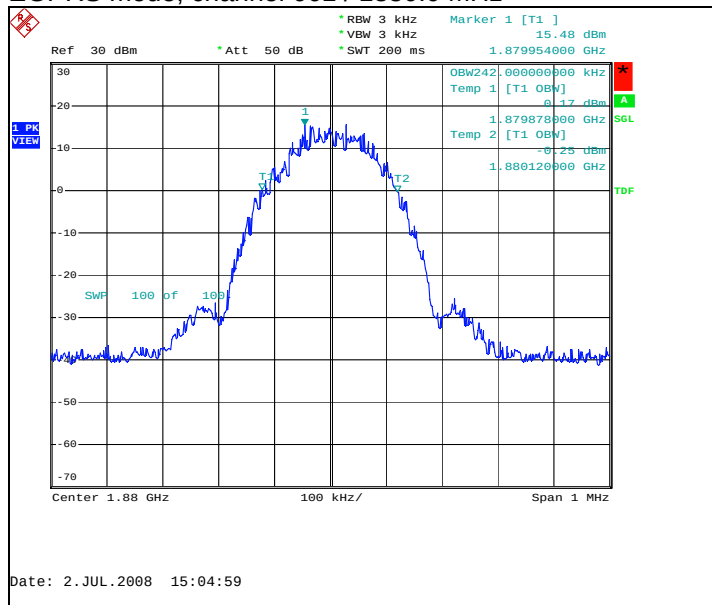

3.5. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4140.000


Channel 4175 / 835.0 MHz

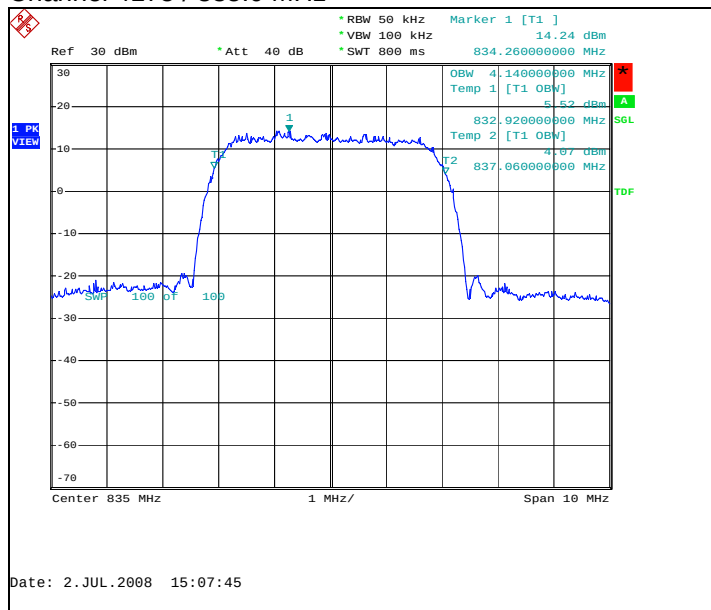

4. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-414 DUT 27476
Accessories with DUT numbers	BL-4U DUT 27468
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 48 / 101.2
Date of measurements	03-Jul-2008
Measured by	Christian Andersen

4.1. Test setup

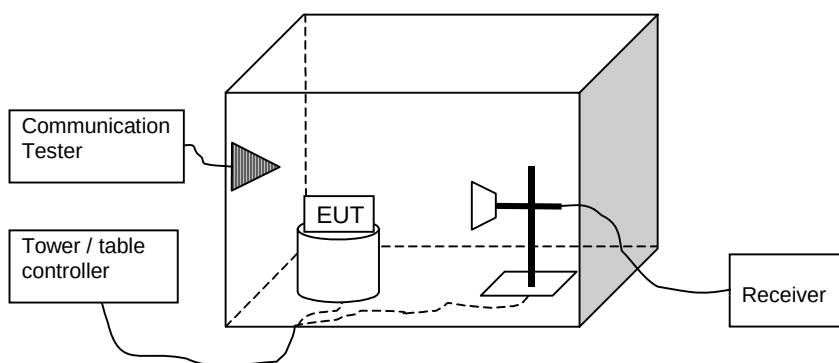

4.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
GSM 1900	Below 1850 and above 1910	-13

4.3. GSM 850 Test results


Phone slide open

GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

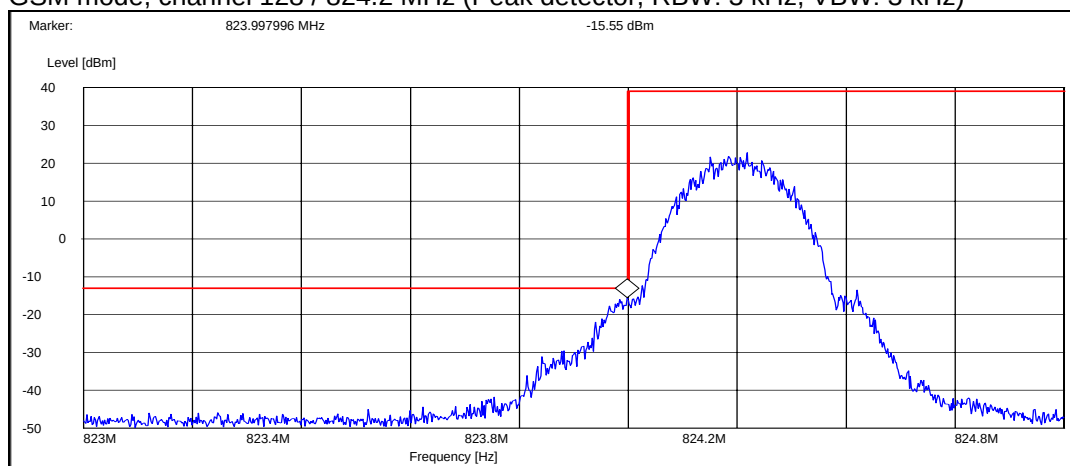


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	128 / 824.2	-15.50

GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

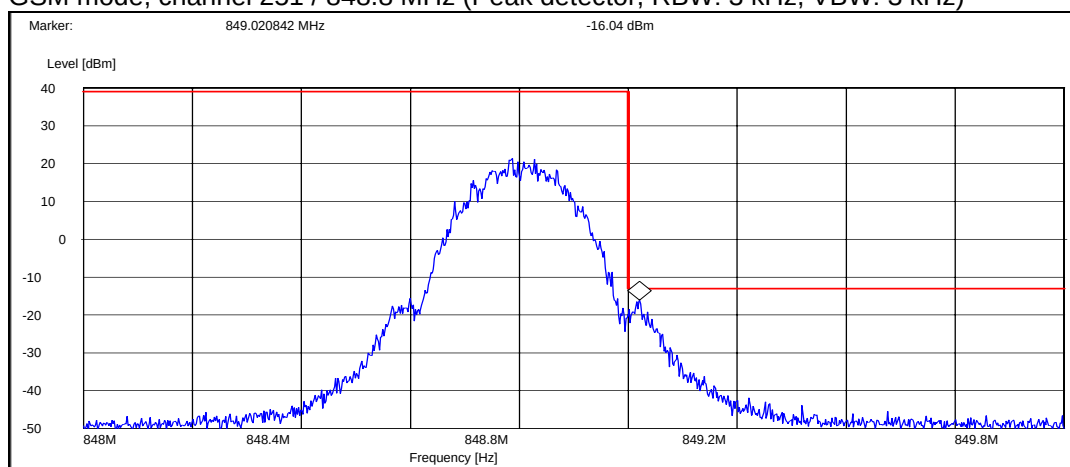


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	251 / 848.8	-16.00

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

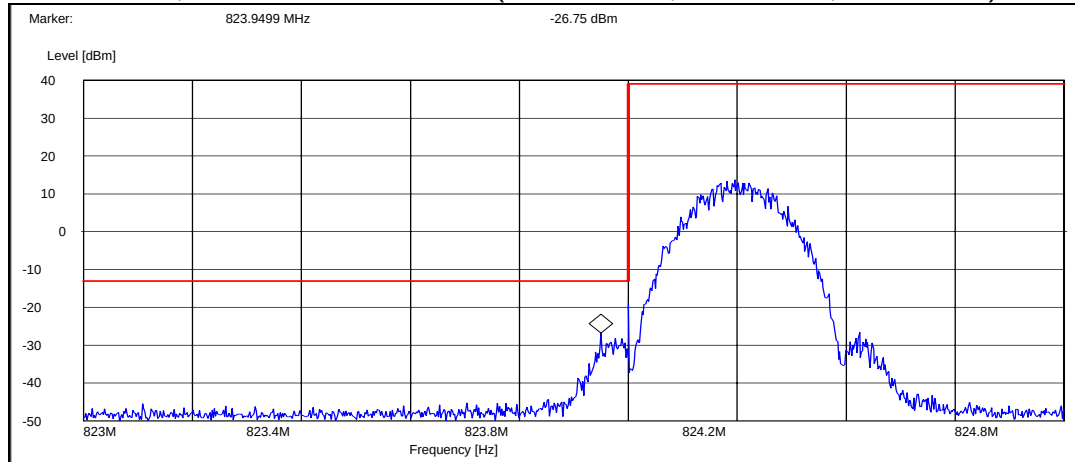

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	128 / 824.2	-26.80


EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

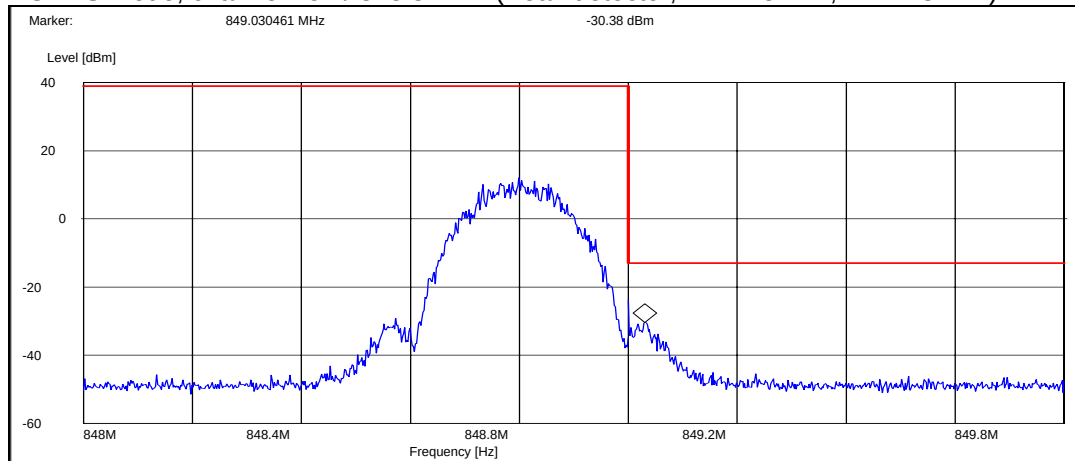

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	251 / 848.8	-30.40


Phone slide closed

GSM mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

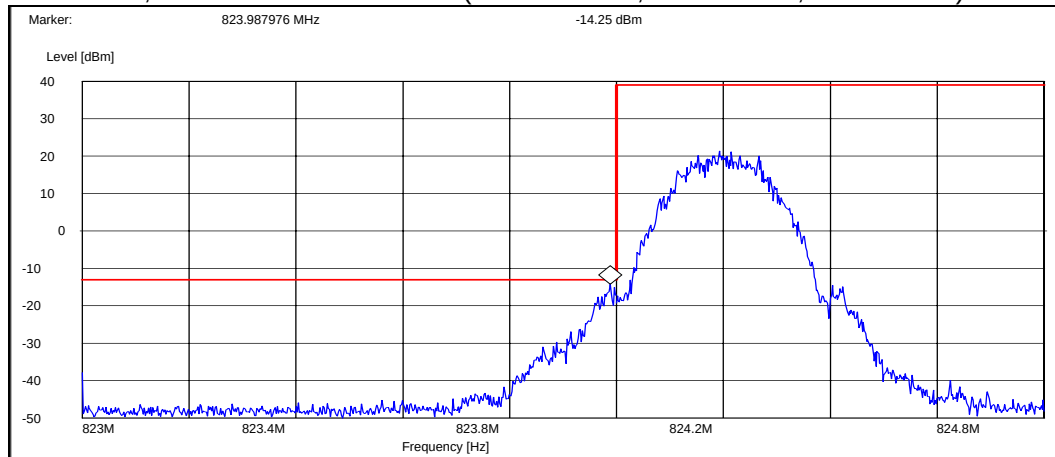


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	128 / 824.2	-14.20

GSM mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

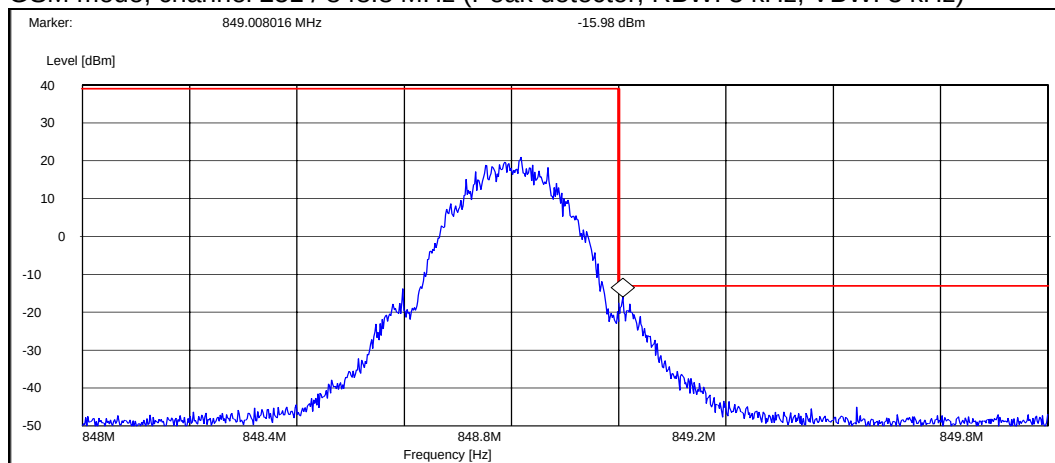


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	251 / 848.8	-16.00

EGPRS mode, channel 128 / 824.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

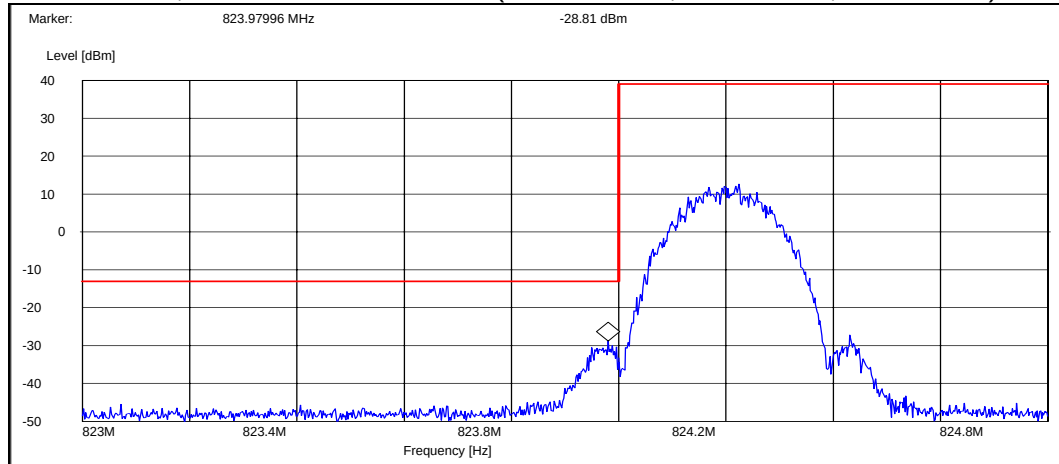

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	128 / 824.2	-28.80

EGPRS mode, channel 251 / 848.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

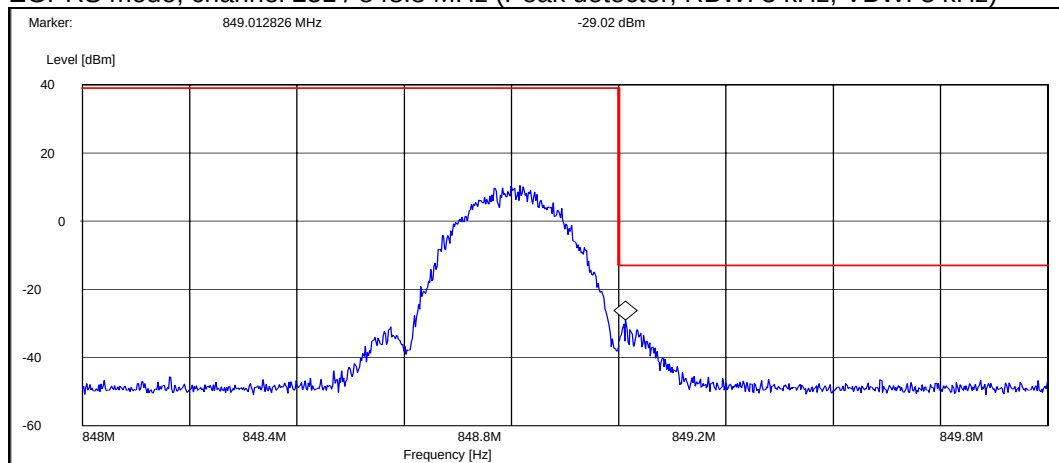


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	251 / 848.8	-29.00

4.4. GSM 1900 Test results


Phone slide open

GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

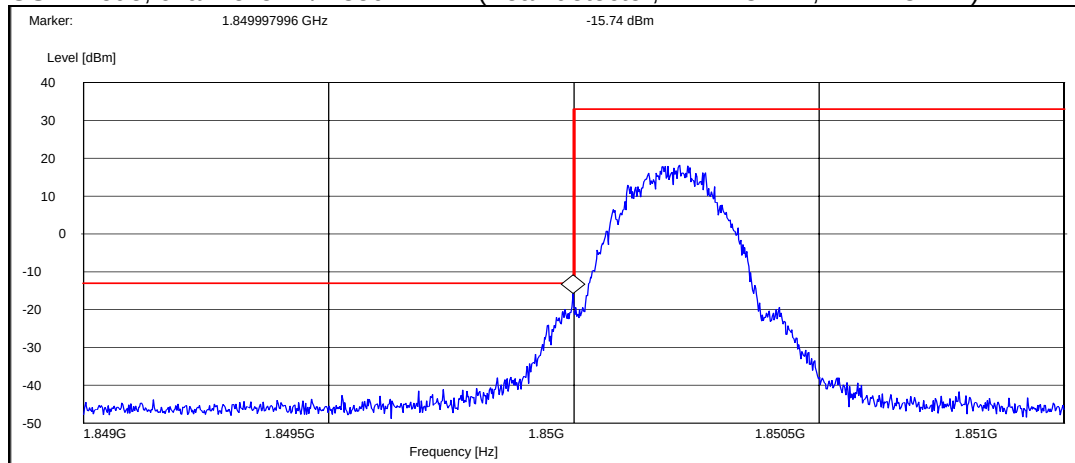


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	512 / 1850.2	-15.70

GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

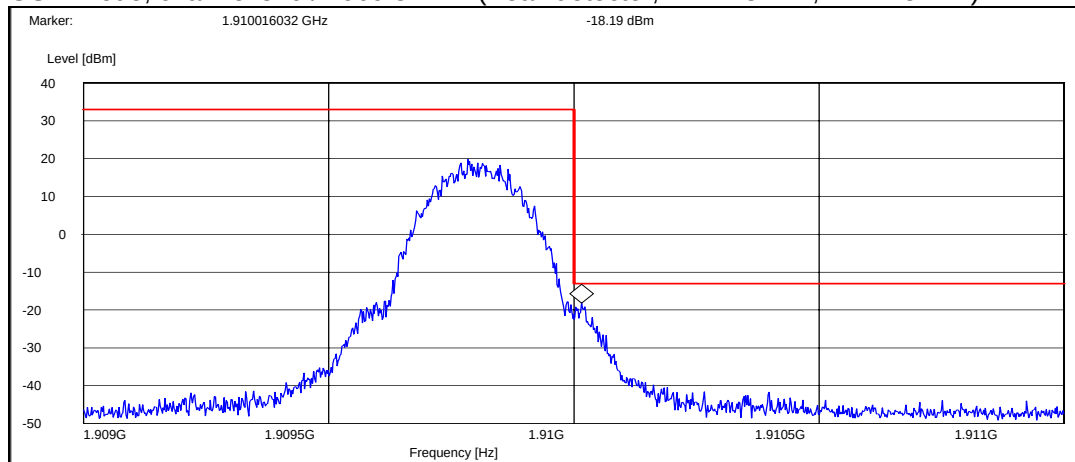


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	810 / 1909.8	-18.20

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

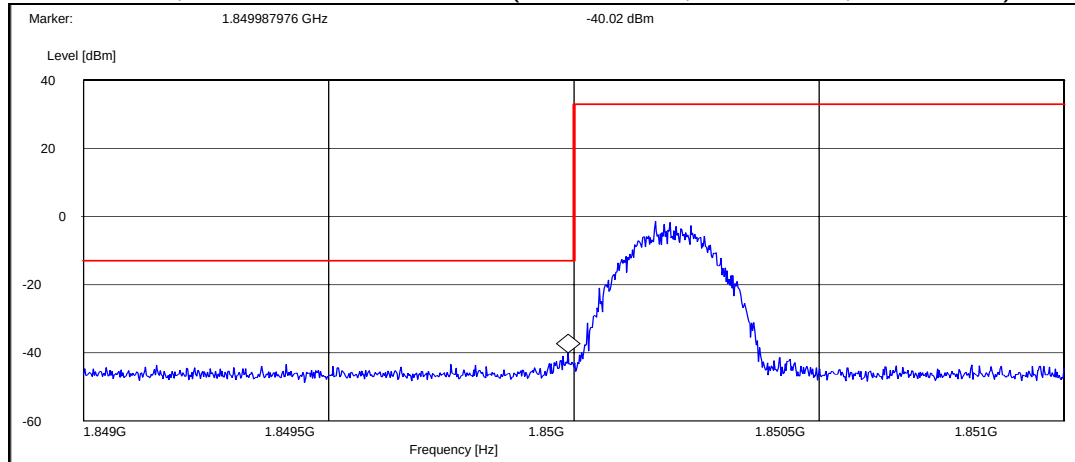

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	512 / 1850.2	-40.00


EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

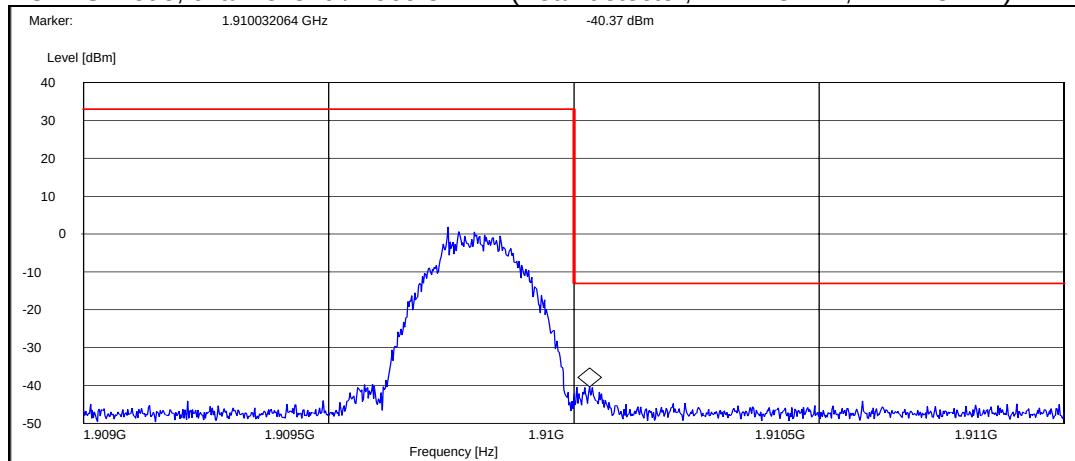

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	810 / 1909.8	-40.40


Phone slide closed

GSM mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

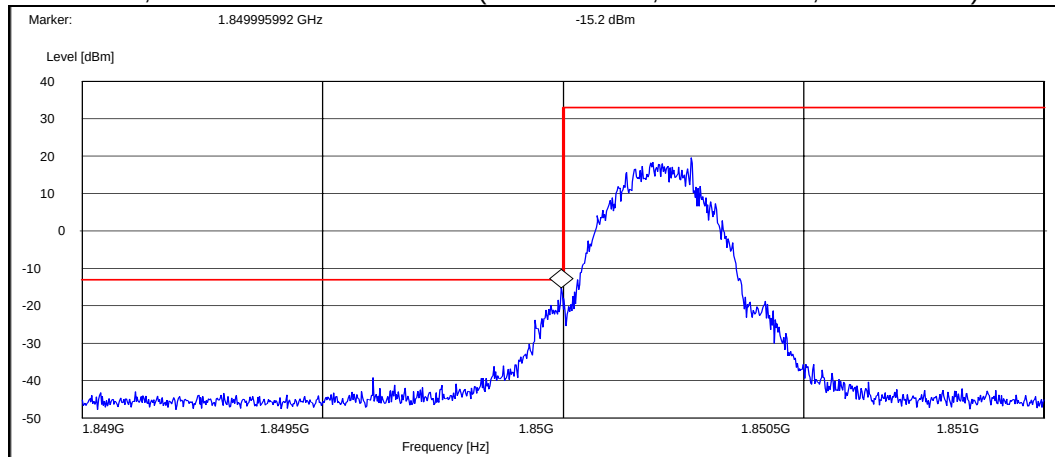


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	512 / 1850.2	-15.20

GSM mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

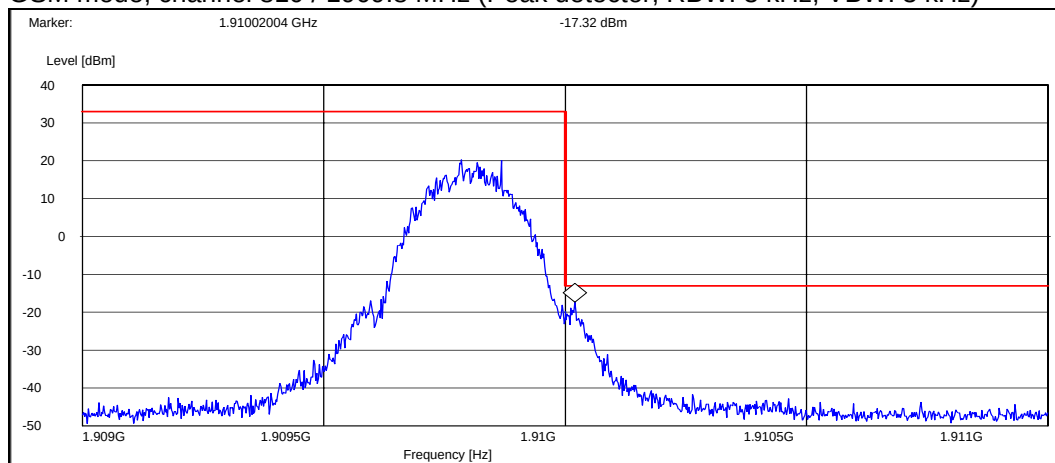


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
GSM	810 / 1909.8	-17.30

EGPRS mode, channel 512 / 1850.2 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

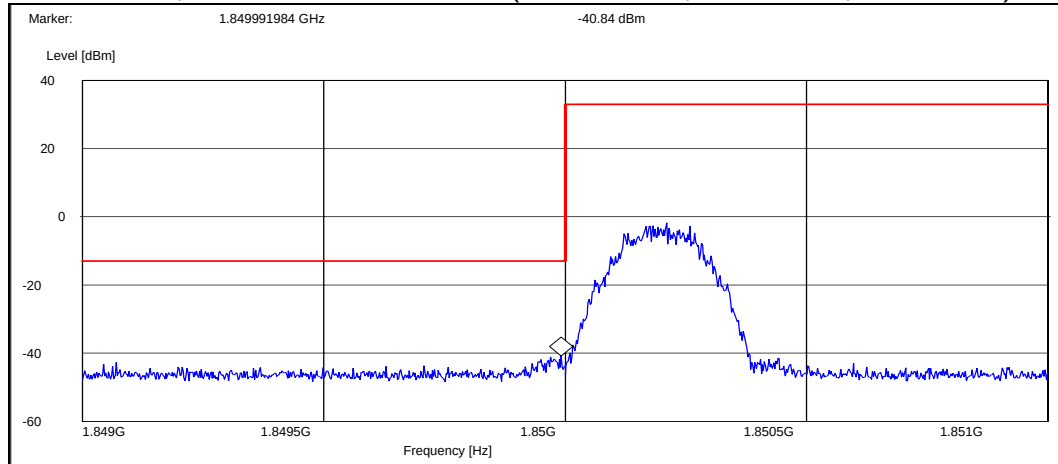

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	512 / 1850.2	-40.80

EGPRS mode, channel 810 / 1909.8 MHz (Peak detector, RBW: 3 kHz, VBW: 3 kHz)

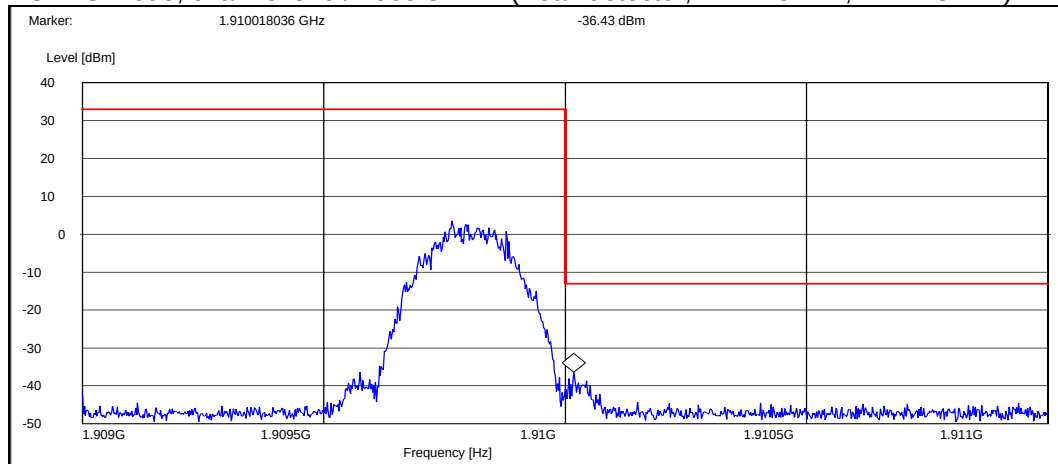


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
EGPRS	810 / 1909.8	-36.40

4.5. WCDMA 850 Test results


Phone slide open

Channel 4132 / 826.4 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

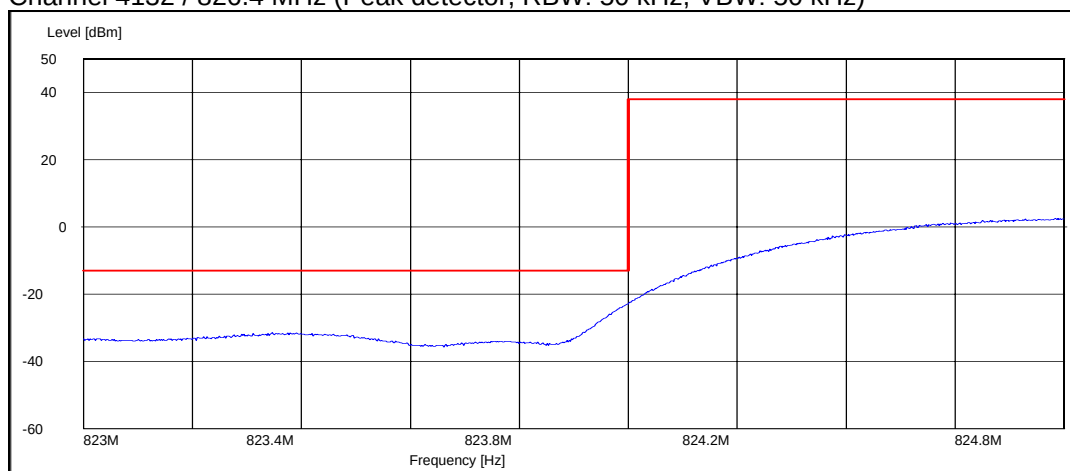

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4132 / 826.4	-22.90


Channel 4233 / 846.6 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

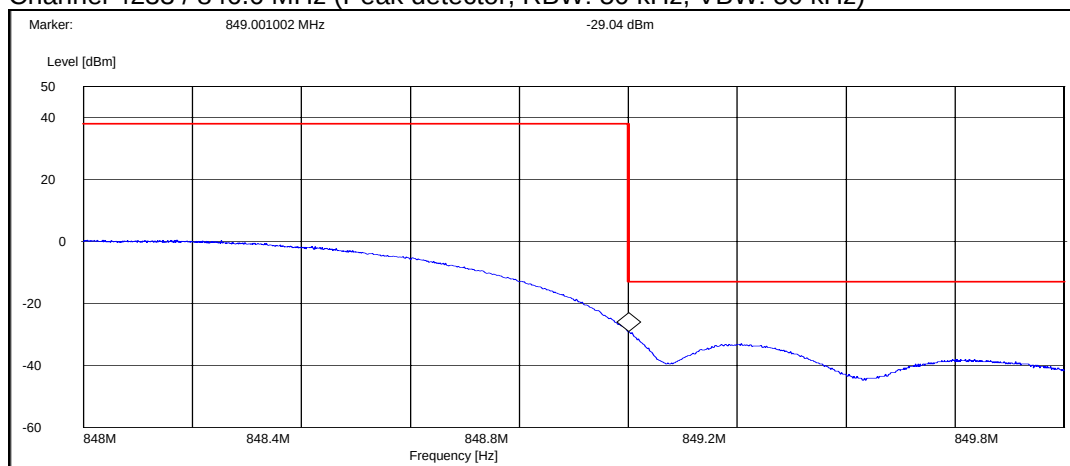

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4233 / 846.6	-29.00


Phone slide closed

Channel 4132 / 826.4 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

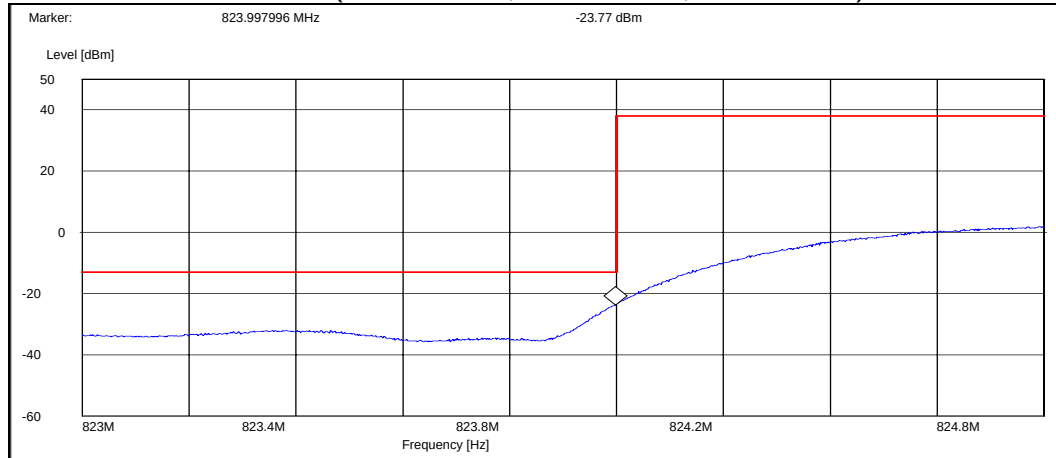

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4132 / 826.4	-23.80

Channel 4233 / 846.6 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

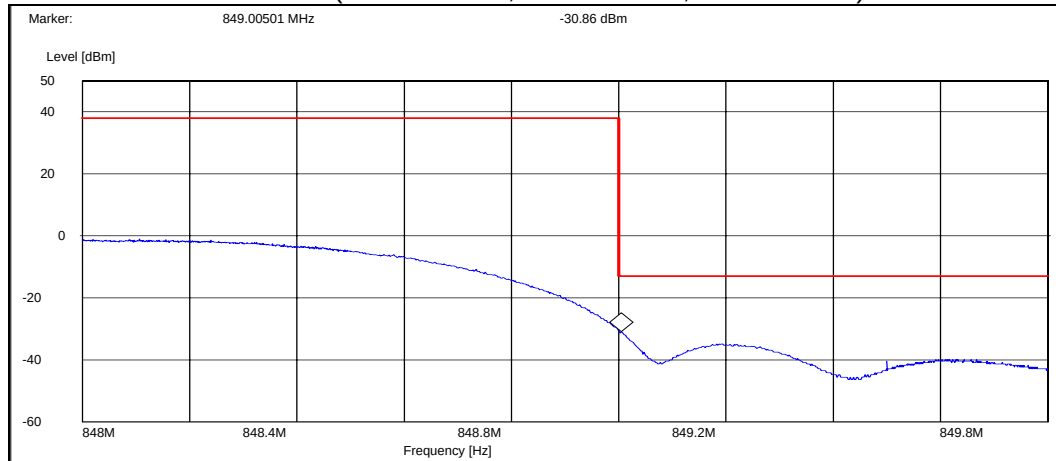


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4233 / 846.6	-30.90

5. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-414 DUT 29310
Accessories with DUT numbers	BL-4U DUT 26976, AC-6C DUT 26737, CA-100C DUT 26736, AD-83 DUT 26971, HS-83 DUT 26975
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 101.0
Date of measurements	26-Jun-2008
Measured by	Christian Andersen

5.1. Test setup

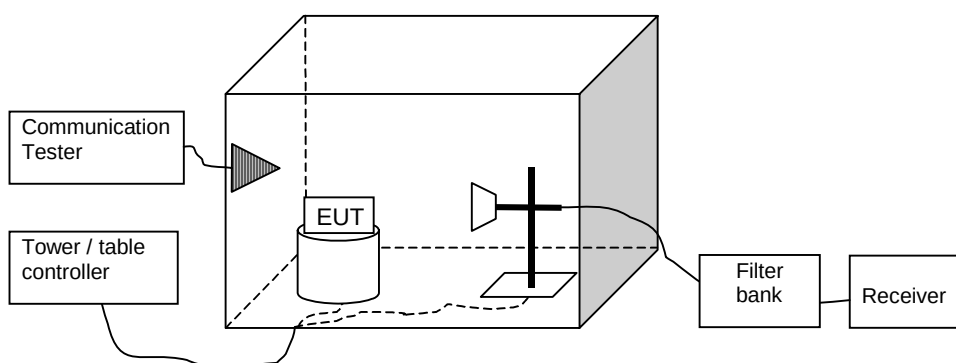

5.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900	30 - 18000	-13

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-41.40	0.07244	-46.80	5.40	HORIZONTAL	Passed
3346.189379	-43.70	0.04266	-49.70	6.00	VERTICAL	Passed

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-48.50	0.01413	-53.90	5.40	HORIZONTAL	Passed
3346.189379	-54.30	0.00372	-60.30	6.00	VERTICAL	Passed

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.023046	-40.70	0.08511	-49.90	9.20	VERTICAL	Passed
5626.246493	-52.60	0.00550	-66.20	13.60	VERTICAL	Passed
5640.282565	-45.20	0.03020	-58.90	13.70	VERTICAL	Passed
7520.034068	-43.30	0.04677	-64.60	21.30	HORIZONTAL	Passed

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.023046	-44.50	0.03548	-53.70	9.20	VERTICAL	Passed
5640.282565	-50.10	0.00977	-63.80	13.70	VERTICAL	Passed
7520.034068	-45.70	0.02692	-67.00	21.30	HORIZONTAL	Passed

5.5. WCDMA 850 Test results


Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1667.732465	-44.40	0.03631	-50.00	5.60	HORIZONTAL	Passed
2508.615230	-48.90	0.01288	-59.60	10.70	VERTICAL	Passed
3336.673347	-59.00	0.00126	-65.40	6.40	HORIZONTAL	Passed

6. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-414 DUT 26980
Accessories with DUT numbers	BL-4U DUT 26976, AC-6C DUT 26737, CA-100C DUT 26736, AD-83 DUT 26971, HS-83 DUT 26975
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 101.2
Date of measurements	03-Jul-2008
Measured by	Allan Henriksen

6.1. Test setup

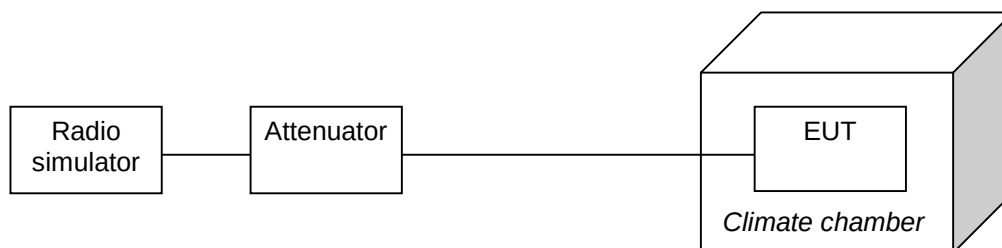

6.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

6.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-17	-0.0203
40	-12	-0.0143
30	15	0.0179
20	15	0.0179
10	13	0.0155
0	20	0.0239
-10	19	0.0227
-20	15	0.0179
-30	26	0.0311

6.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-57	-0.03
40	-51	-0.03
30	-40	-0.02
20	-55	-0.03
10	-35	-0.02
0	-57	-0.03
-10	-48	-0.03
-20	-46	-0.02
-30	-	-

7. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-414 DUT 26980
Accessories with DUT numbers	BL-4U DUT 26976, AC-6C DUT 26737, CA-100C DUT 26736, AD-83 DUT 26971, HS-83 DUT 26975
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 101.2
Date of measurements	03-Jul-2008
Measured by	Allan Henriksen

7.1. Test setup



7.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

7.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.60	13	0.0155
Nominal / 4.18	13	0.0155

7.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.60	-51	-0.0271
Nominal / 4.18	-55	-0.0293

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B