

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0536_02.doc	Date of Report:	21-09-2005
Number of pages:	33	Customer's Contact person:	Ernest Mayer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-78 (HW: 0400), Battery; BP-6M, AC-Charger; AC-4, Headset; HS-23, Multi Media Card; MU-16		
FCC ID:	QTKRM-78	IC:	661AD-RM78
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003) and IC standard RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	05-09-2005
Testing completed	21-09-2005
The customer's contact person	Ernest Mayer
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	T:\Projects\RM-78\EMC\Results\FCC\Cph_FCC_0536_02.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM900/1800/1900 and WCDMA) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-78	004400/74/160103/1	0407	-	Vp03.01.2	28383
Phone	RM-78	004400/74/160069/4	0407	-	Vp03.01.2	28379
Battery	BP-6M	0670467393213M061120140976	-	-	-	28378
Battery	BP-6M	0670467393213M061120140975	-	-	-	28377
Battery	BP-6M	0670467393213M094110111585	-	-	-	28408
AC-Charger	AC-4E	3997915157121100134;0675384	-	-	-	28406
Headset	HS-23	GM2750741D	0.6	1.2	0.2	28404
AC-Charger	AC-4E	3997915036031100023;0675384	1.1	1.0	-	28999
Headset	HS-23	0025	0.5	0.3	0.2	28941
Multi Media Card	MU-16	SDSDM64 ABO04251AJ	-	-	-	28367
Multi Media Card	MU-16	SDSDM64 ABO4251AJ	-	-	-	28410
Phone	RM-78	004400/74/160166/8	0407	-	03.01.2	28380
AC Charger	AC-4E	0675384409049L261R10001709	1.3	0.3	-	28944
Headset	HS-23	GM2750741D	-	-	-	28403

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	6.2.2(o)(a3)	Peak output power	Passed
15.247(c)	6.2.2 (o)(e1)	Band edge compliance of RF emissions	Passed
15.247(c)	6.2.2 (o)(e1)	Spurious RF conducted emissions	Passed
15.247(c), 15.209	6.2.2 (o)(e1)	Spurious radiated emissions	Passed
15.207	6.6	AC powerline conducted emissions	Passed
15.247(a)(1)	6.2.2(o)(a3)	20 dB bandwidth	Passed
15.247(a)(1)	6.2.2(o)(a1)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	Amend I(ii)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	Amend I(ii)	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Spurious radiated emissions test setup	5
3. Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	7
3.2.1 GFSK modulation, PRBS packet type.....	7
4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1)).....	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	10
4.2.1 GFSK modulation, PRBS packet type.....	10
4.2.1.1 Phone slide open	10
4.2.1.2 Phone slide closed	12
5. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))	14
5.1. Test method and limit.....	14
5.2. Bluetooth Test results	15
5.2.1 GFSK modulation, PRBS packet type.....	15
6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 6.2.2(o)(e1)).....	17
6.1. Test method and limit.....	17
6.2. Bluetooth Test results	18
6.2.1 GFSK modulation, PRBS packet type.....	18
6.2.1.1 Phone Slide open	18
6.2.1.2 Phone Slide closed	19
7. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6).....	21
7.1. Test method and limit.....	21
7.2. Bluetooth Test results	22
7.2.1 GFSK modulation, PRBS packet type.....	22
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3)).....	23
8.1. Test method and limit.....	23
8.2. Bluetooth Test results	24
8.2.1 GFSK modulation, PRBS packet type.....	24
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a1)).....	26


9.1.	Test method and limit	26
9.2.	Bluetooth Test results	27
9.2.1	GFSK modulation, PRBS packet type	27
10.	Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))	28
10.1.	Test method and limit	28
10.2.	Bluetooth Test results	29
10.2.1	GFSK modulation, PRBS packet type	29
11.	Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))	30
11.1.	Test method and limit	30
11.2.	Bluetooth test results	31
11.2.1	GFSK modulation, PRBS packet type	31
12.	Test Equipment	32
12.1.	Conducted measurements	32
12.2.	Radiated measurements	32

2. Test setups


2.1. Conducted RF test setup

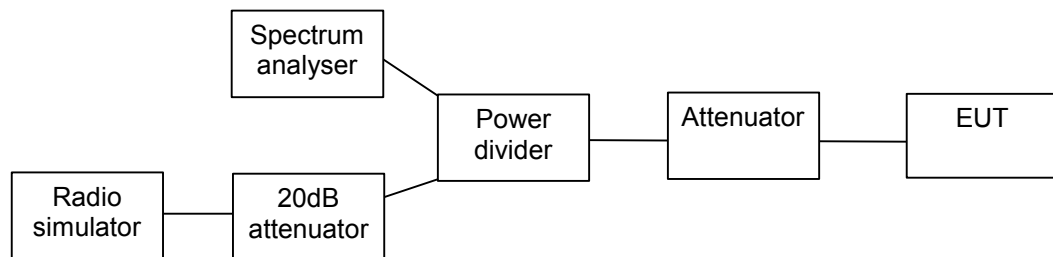

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

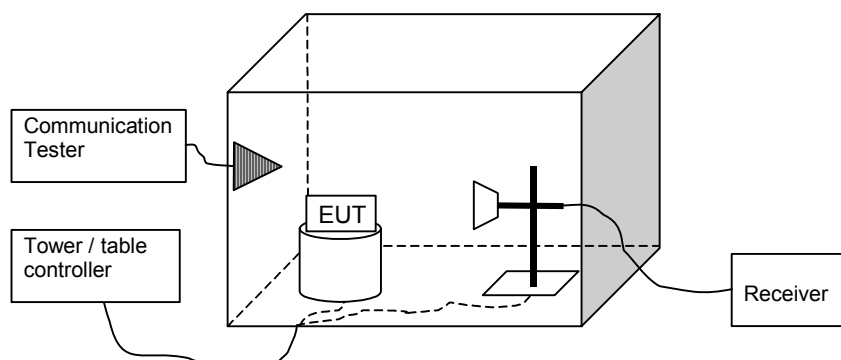

3. Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GSKF modulation, PRBS packet type

Channel	P [dBm]	P [mW]	Result
0	-0.80	0.832	Passed
40	-0.80	0.832	Passed
78	-0.80	0.832	Passed


Channel 0 (Peak detector, RBW: 1 MHz)

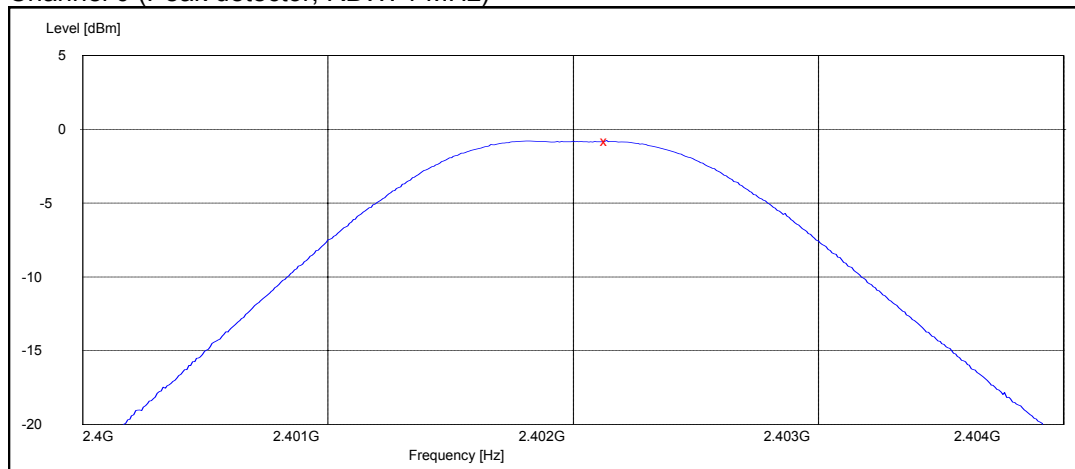

Channel 40 (Peak detector, RBW: 1 MHz)

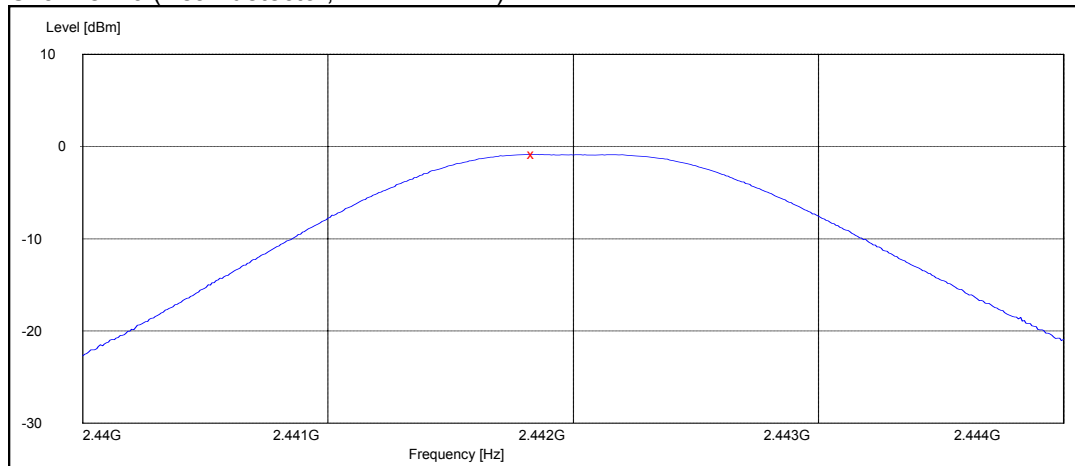

Channel 78 (Peak detector, RBW: 1 MHz)

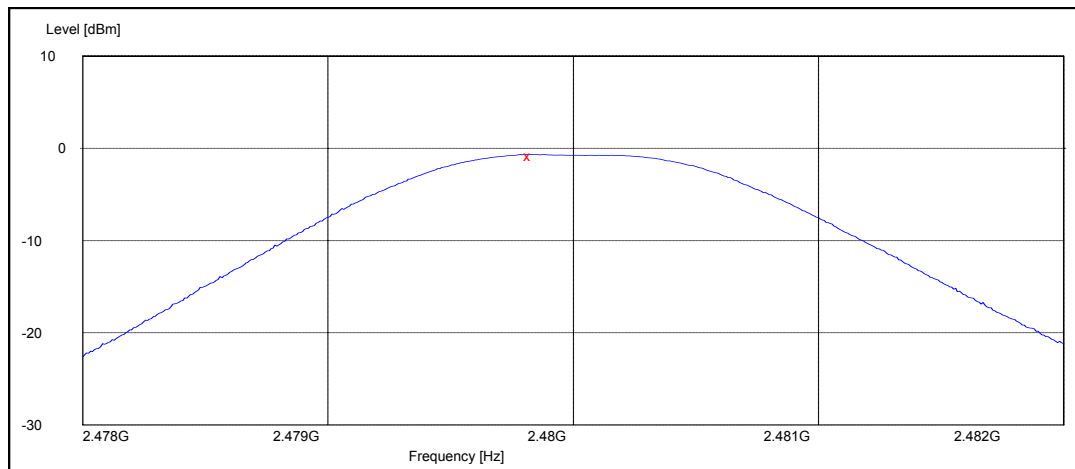

4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-78 Dut#28379
Accessories with DUT numbers	BP-6M Dut#28378, AC-4E Dut#28999, HS-23 Dut#28941, MU-16 Dut#28410
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mbar]	21 / 58 1028
Date of measurements	20-09-2005
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type

4.2.1.1 Phone slide open


Average (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	35.10	Passed
78	39.31	Passed
Hopping on, low end	34.70	Passed
Hopping on, high end	35.86	Passed


Peak (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	48.50	Passed
78	54.36	Passed
Hopping on, low end	47.77	Passed
Hopping on, high end	53.16	Passed


Channel 0

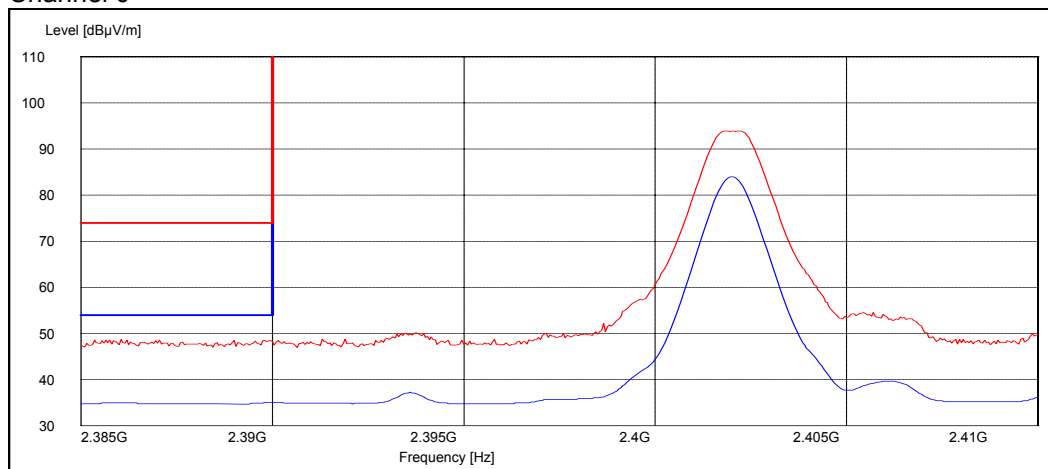


Channel 78

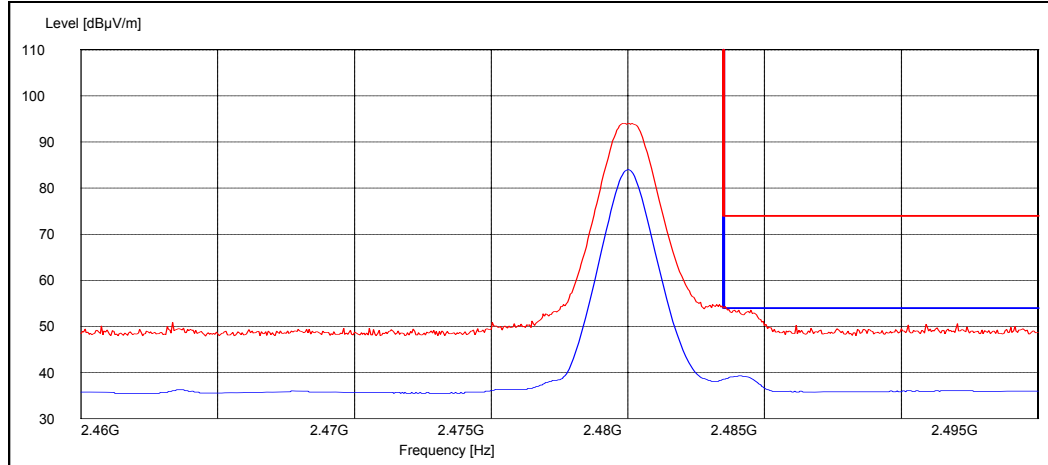

Hopping on, low end

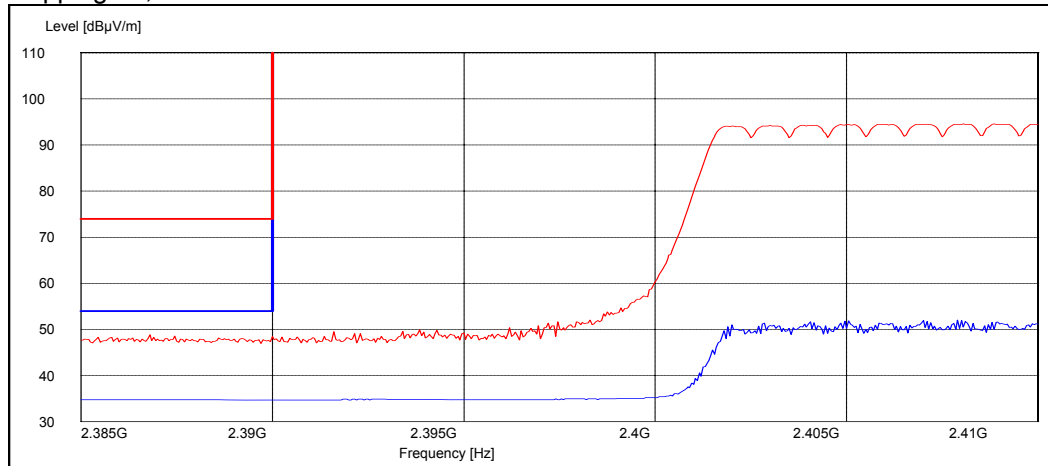

Hopping on, high end

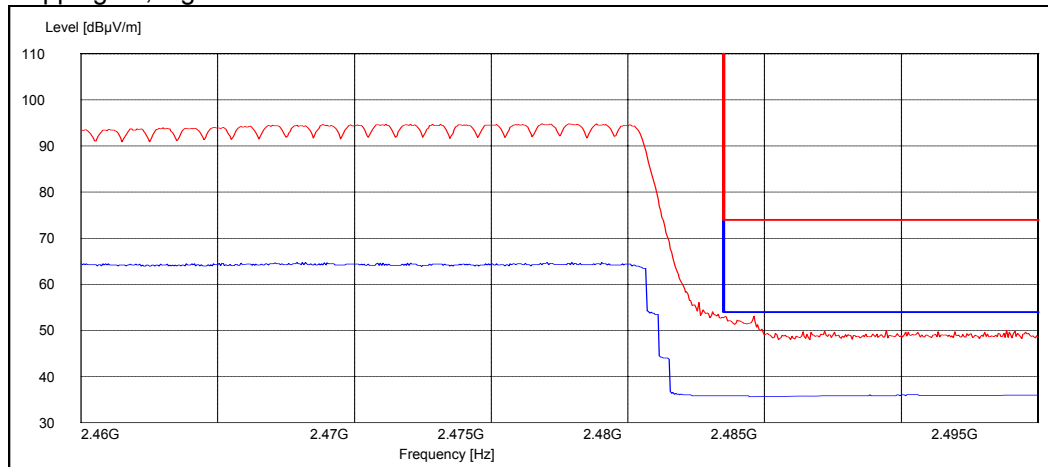

4.2.1.2 Phone slide closed


Average (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	34.90	Passed
78	38.90	Passed
Hopping on, low end	34.70	Passed
Hopping on, high end	35.85	Passed


Peak (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	48.63	Passed
78	53.81	Passed
Hopping on, low end	47.98	Passed
Hopping on, high end	53.15	Passed


Channel 0

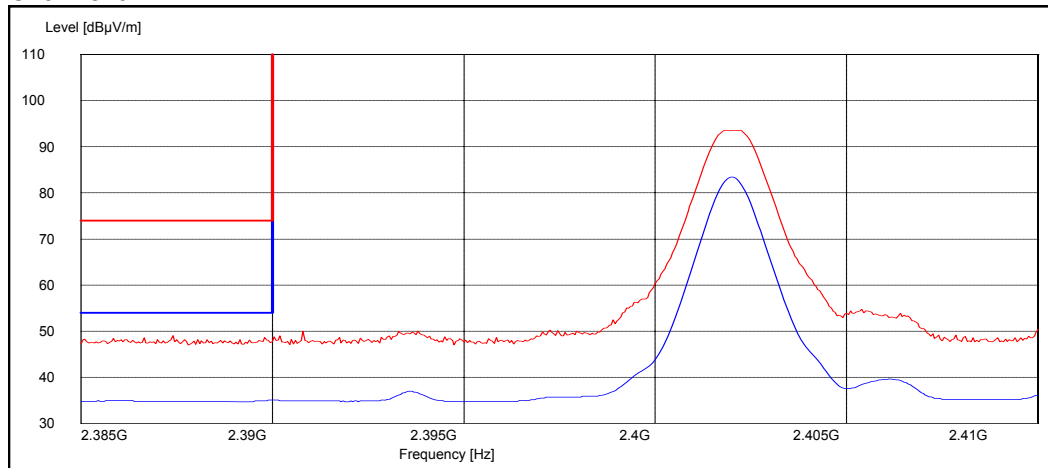


Channel 78

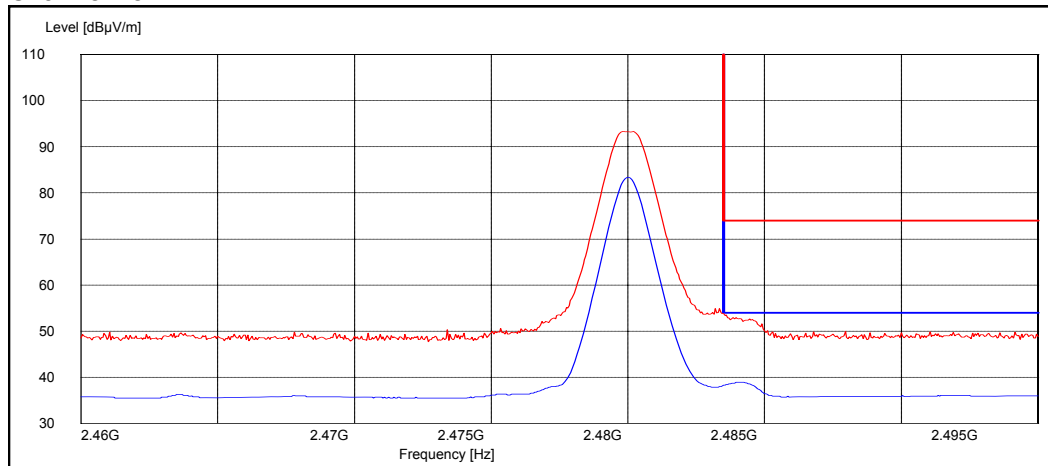

Hopping on, low end

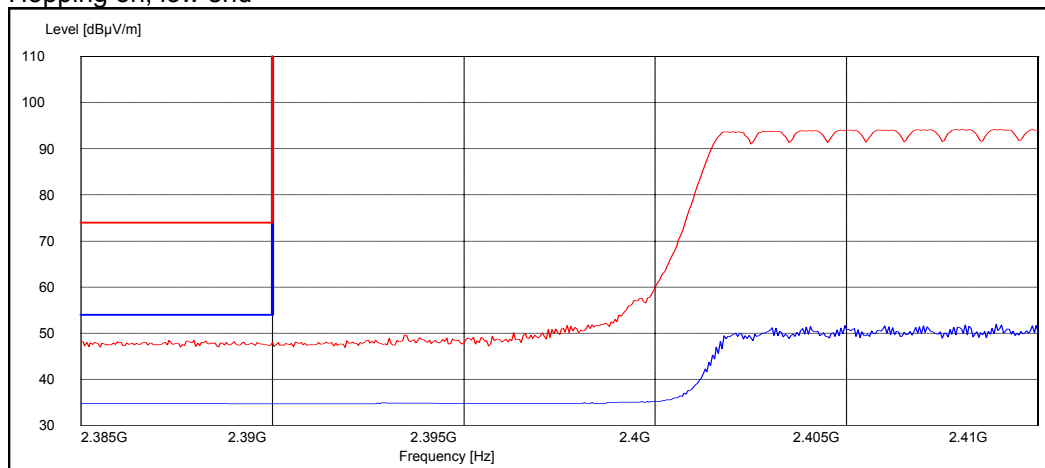

Hopping on, high end

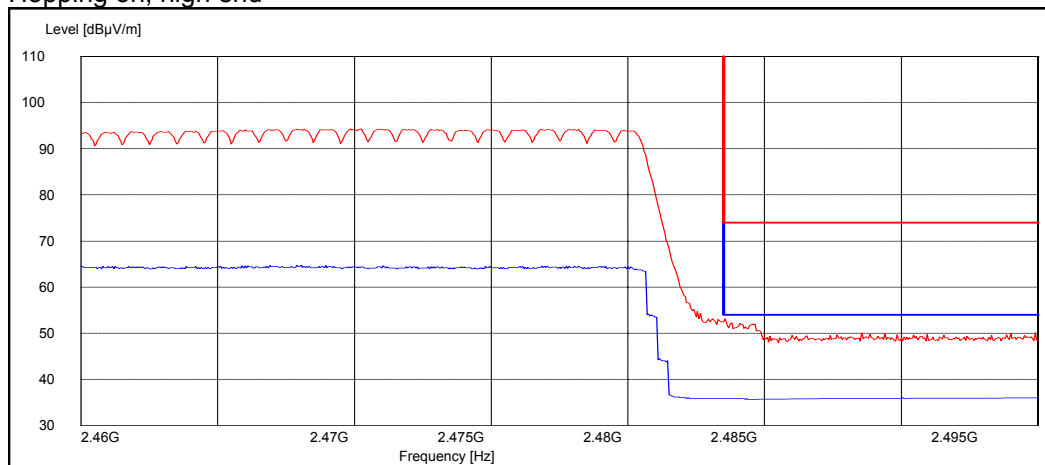

5. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel 0

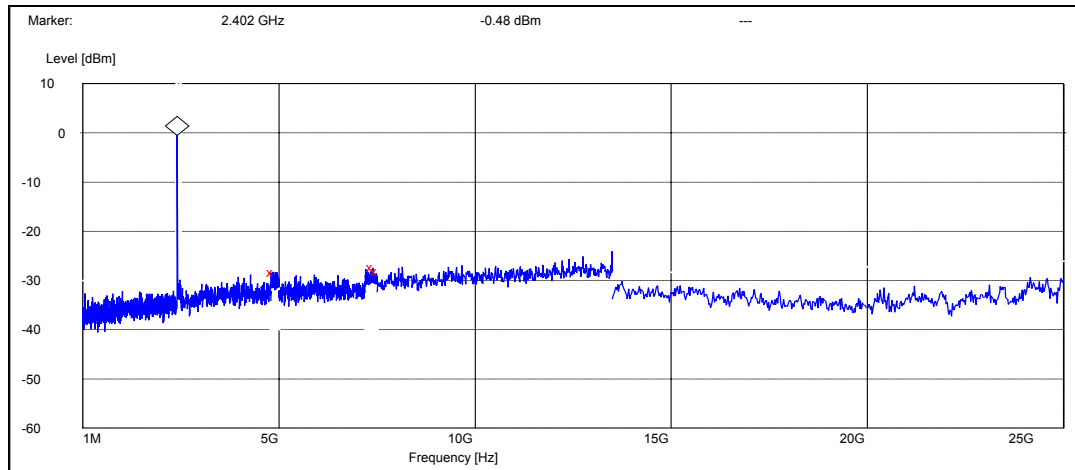


Frequency [MHz]	P [dBc]	Result
4851.200000	-27.820938	Passed
7391.400000	-26.920938	Passed
7500.000000	-27.720938	Passed

Channel 40

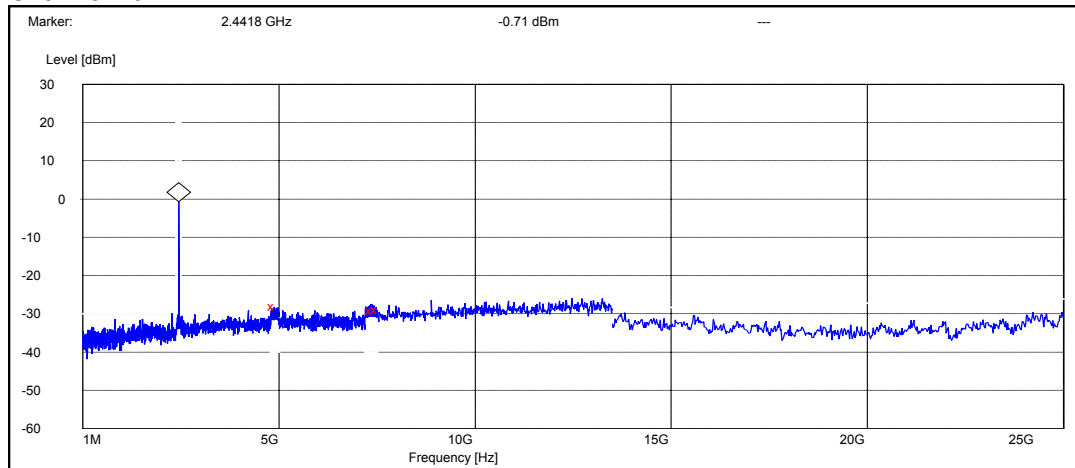

Frequency [MHz]	P [dBc]	Result
4883.200000	-27.485258	Passed
7366.800000	-28.285258	Passed
7500.000000	-28.085258	Passed

Channel 78

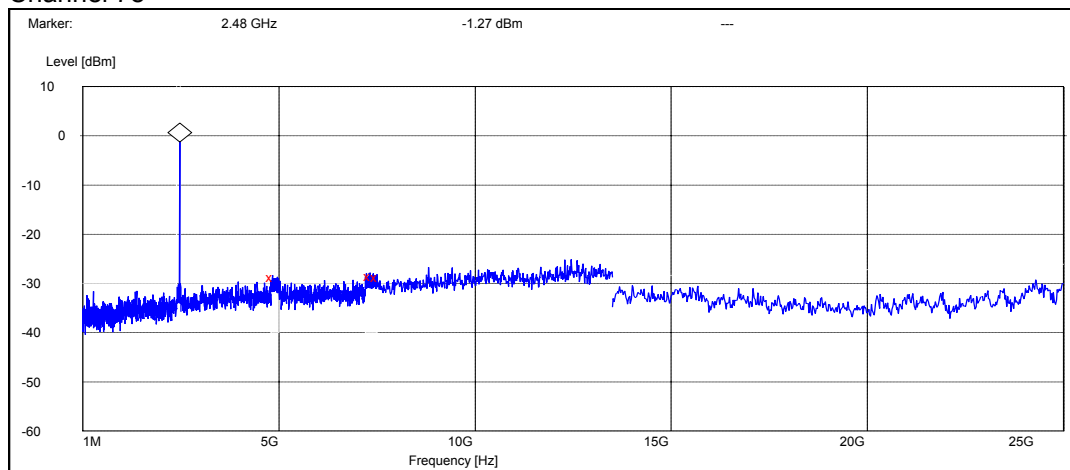

Frequency [MHz]	P [dBc]	Result
4838.000000	-27.527802	Passed
7327.800000	-27.227802	Passed
7500.000000	-27.527802	Passed

6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-78 Dut#28379
Accessories with DUT numbers	BP-6M Dut#28378, AC-4E Dut#28999, HS-23 Dut#28941, MU-16 Dut#28410
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	21 / 58 / 1028
Date of measurements	20-09-2005
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

6.2.1.1 Phone Slide open

Channel 0

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	50.94	352.37	43.04	7.90	VERTICAL	Passed
7206.000000	40.14	101.62	27.64	12.50	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	38.64	85.51	30.74	7.90	VERTICAL	Passed
7206.000000	28.14	25.53	15.64	12.50	VERTICAL	Passed

Channel 40

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
38.095391	18.60	8.51	34.50	-15.90	VERTICAL	Passed
45.590782	29.00	28.18	49.70	-20.70	VERTICAL	Passed
73.346092	15.90	6.24	40.00	-24.10	HORIZONTAL	Passed
74.169940	18.60	8.51	42.50	-23.90	HORIZONTAL	Passed
108.877756	14.40	5.25	36.60	-22.20	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.40	14791.08	79.00	4.40	VERTICAL	Passed
2442.084168	91.90	39355.01	83.90	8.00	HORIZONTAL	Passed
2806.609218	50.70	342.77	39.30	11.40	HORIZONTAL	Passed
2906.809619	51.70	384.59	39.60	12.10	HORIZONTAL	Passed

4883.769539	51.54	377.57	43.34	8.20	VERTICAL	Passed
7325.653307	41.24	115.35	28.84	12.40	VERTICAL	Passed
17833.163327	53.64	480.84	25.34	28.30	VERTICAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.10	14288.94	78.70	4.40	VERTICAL	Passed
2442.084168	81.70	12161.86	73.70	8.00	HORIZONTAL	Passed
2808.109218	37.90	78.52	26.50	11.40	HORIZONTAL	Passed
2905.309619	38.90	88.10	26.70	12.20	HORIZONTAL	Passed
4883.769539	39.24	91.62	31.04	8.20	VERTICAL	Passed
7326.153307	27.64	24.10	15.24	12.40	VERTICAL	Passed
17835.163327	40.94	111.43	12.64	28.30	VERTICAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Channel 78

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	51.94	395.37	43.64	8.30	VERTICAL	Passed
7440.000000	42.04	126.47	29.14	12.90	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	39.74	97.05	31.44	8.30	VERTICAL	Passed
7440.000000	28.54	26.73	15.64	12.90	VERTICAL	Passed

6.2.1.2 Phone Slide closed

Channel 0

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	43.04	141.91	35.14	7.90	HORIZONTAL	Passed
7206.000000	41.64	120.78	29.14	12.50	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	30.74	34.43	22.84	7.90	HORIZONTAL	Passed
7206.000000	28.64	27.04	16.14	12.50	HORIZONTAL	Passed

Channel 40

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.176353	21.10	11.35	37.00	-15.90	VERTICAL	Passed
45.750301	25.00	17.78	45.80	-20.80	VERTICAL	Passed
73.667535	18.60	8.51	42.60	-24.00	HORIZONTAL	Passed
74.369940	16.10	6.38	40.00	-23.90	HORIZONTAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	81.60	12022.64	77.20	4.40	VERTICAL	Passed
2442.084168	90.20	32359.37	82.20	8.00	HORIZONTAL	Passed
2806.615230	50.50	334.97	39.10	11.40	VERTICAL	Passed
2903.311623	51.80	389.05	39.70	12.10	VERTICAL	Passed
4884.269539	46.94	222.33	38.74	8.20	HORIZONTAL	Passed
7330.153307	39.24	91.62	26.74	12.50	VERTICAL	Passed
12409.321643	43.94	157.40	24.74	19.20	HORIZONTAL	Passed
17867.237475	54.24	515.23	25.74	28.50	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	81.20	11481.54	76.80	4.40	VERTICAL	Passed
2442.084168	80.50	10592.54	72.50	8.00	HORIZONTAL	Passed
2805.615230	38.00	79.43	26.50	11.50	VERTICAL	Passed
2903.311623	38.80	87.10	26.70	12.10	VERTICAL	Passed
4884.269539	34.44	52.72	26.24	8.20	HORIZONTAL	Passed
7326.153307	27.64	24.10	15.24	12.40	VERTICAL	Passed
12407.321643	31.44	37.33	12.24	19.20	HORIZONTAL	Passed
17868.737475	41.44	118.03	12.94	28.50	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Channel 78

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	48.74	273.53	40.44	8.30	HORIZONTAL	Passed
7440.000000	41.64	120.78	28.74	12.90	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	36.64	67.92	28.34	8.30	HORIZONTAL	Passed
7440.000000	28.14	25.53	15.24	12.90	VERTICAL	Passed

7. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6)

EUT with DUT number	RM-78 Dut # 28383
Accessories with DUT numbers	BP-6M Dut # 28377 + AC4E Dut # 28406 + HS-23 Dut # 28404 + MMC Dut # 28367
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	21.9 / 51.5 1030.5
Date of measurements	19-09-2005
Measured by	Allan F. Henriksen

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40

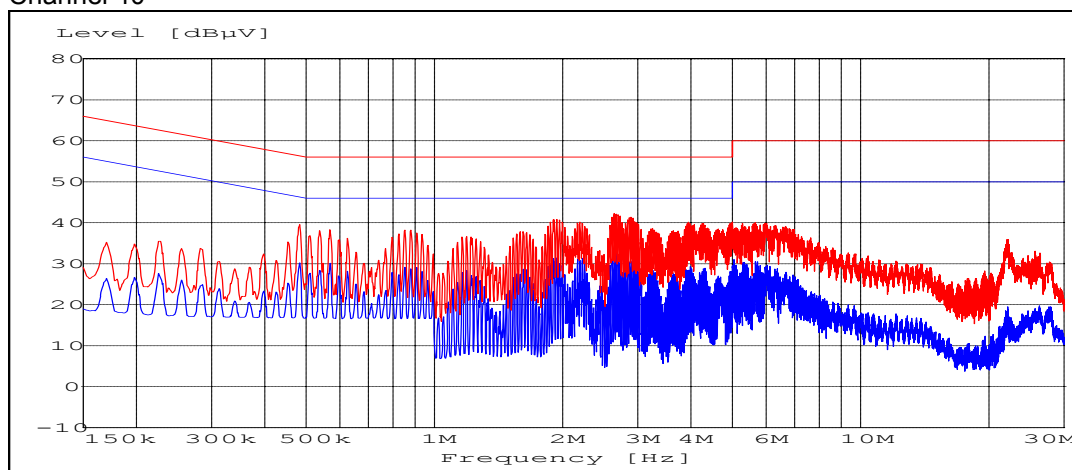

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
≤ 1

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel	20 dB bandwidth [kHz]	Result
0	664.000	Passed
40	696.000	Passed
78	668.000	Passed


Channel 0

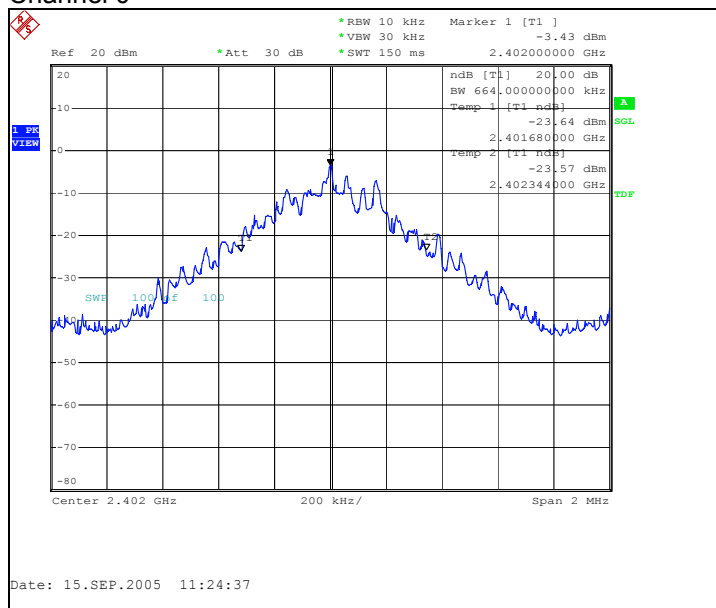

Channel 40

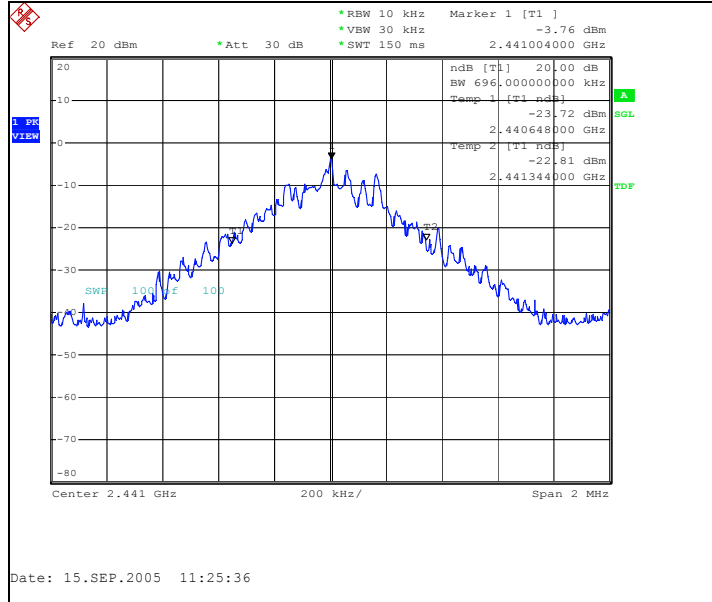

Channel 78

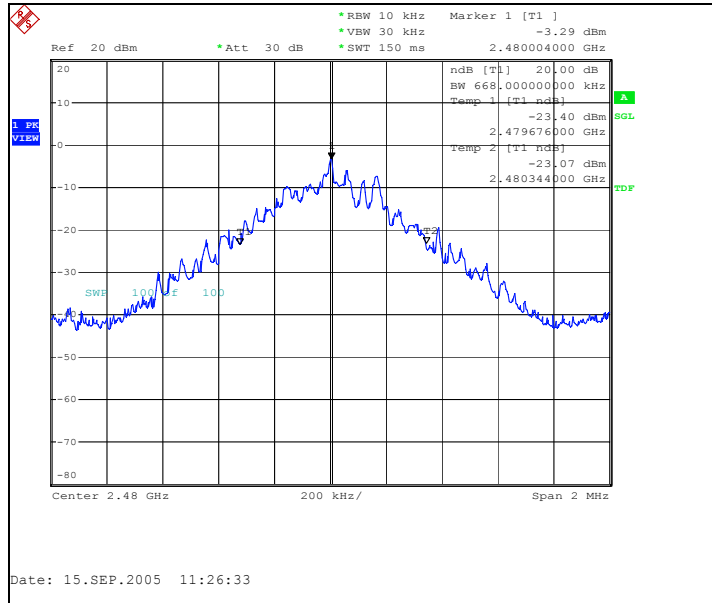

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a1))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

9.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1050	Passed

Hopping on, carrier frequency separation of channels 39 and 40

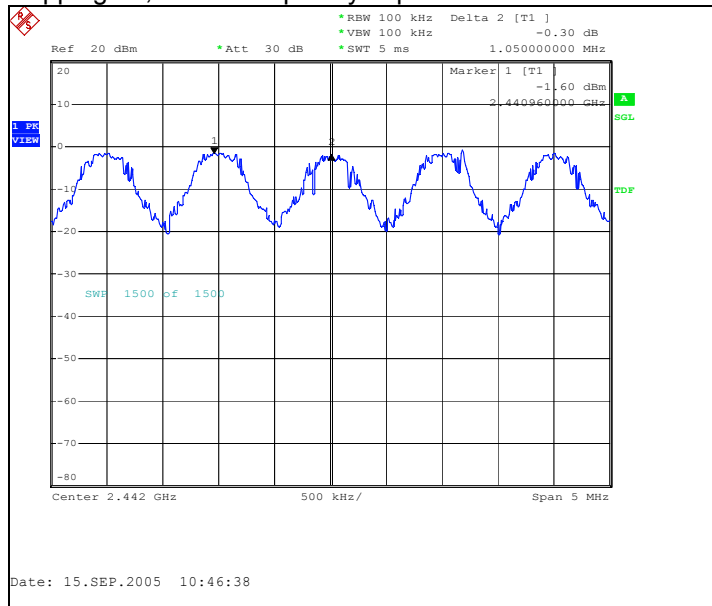

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

10.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 75

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed

Hopping on, number of hopping frequencies

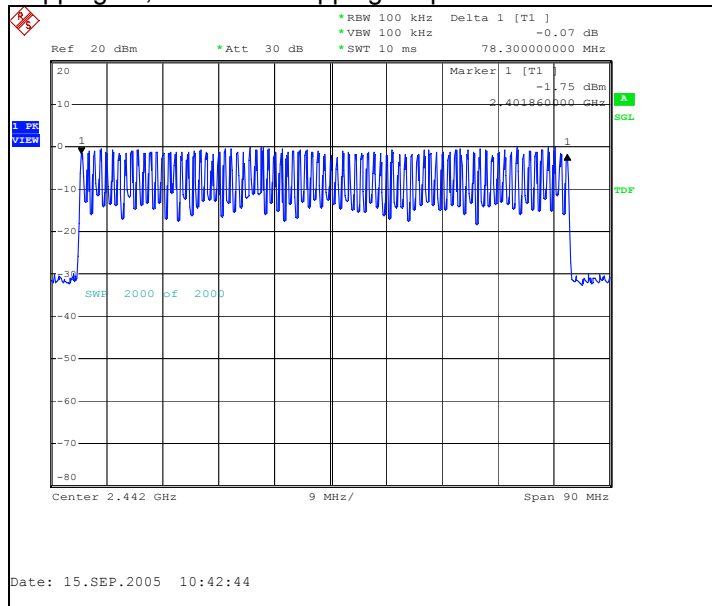

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RM-78 dut 28380
Accessories with DUT numbers	RP-6M dut 28408, MU-16 dut 28410, AC-4E dut 28944, HS-23 dut 28403
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	24.4 / 45.0 1011.6
Date of measurements	09-15-2005
Measured by	Jan Engelbrechtsen

11.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
42	2968.000	0.124656	Passed

Hopping on, number of transmissions, channel 40

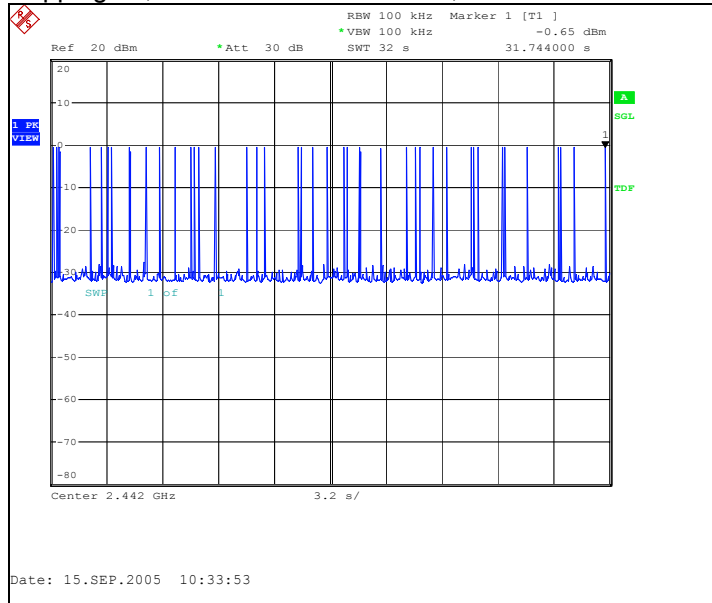

Hopping on, duration of one transmission, channel 40

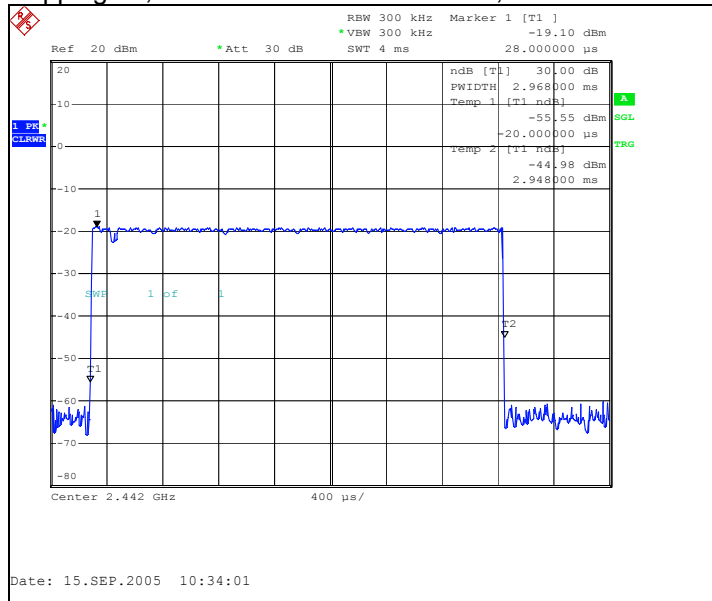

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C