

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,  
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: sgs\_internet\_operations@sgs.com

Report No.: SZEMO11040186102  
Page : 1 of 94

# FCC REPORT

<b>Application No:</b>	SZEMO110401861RF
<b>Applicant:</b>	Nokia (China) Investment Co., Ltd.
<b>Product Name:</b>	Bluetooth headset
<b>Operation Frequency:</b>	2402MHz to 2480MHz
<b>FCC ID:</b>	QTLBH-219
<b>Standards:</b>	FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2008
<b>Date of Receipt:</b>	2010-08-02 (for original report SZEMO10080488601) 2011-04-20 (for new report SZEMO11040186102)
	2010-08-02 to 2010-09-02
<b>Date of Test:</b>	(for original report SZEMO10080488601) 2011-04-21 to 2011-04-26 (for new report SZEMO11040186102)
<b>Date of Issue:</b>	2010-10-19 (for original report SZEMO10080488601) 2011-05-18 (for new report SZEMO11040186102)
<b>Test Result :</b>	<b>PASS *</b>

\* In the configuration tested, the EUT complied with the standards specified above. This report supersedes our previous report SZEMO11040186101, issued on 2011-04-28, which is hereby deemed null and void.

Authorized Signature:



Jack Zhang  
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Contents

	Page
1 COVER PAGE .....	1
2 CONTENTS.....	2
3 TEST SUMMARY .....	3
4 GENERAL INFORMATION .....	4
4.1 CLIENT INFORMATION .....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 E.U.T OPERATION MODE .....	6
4.4 TEST FACILITY .....	7
4.5 TEST LOCATION .....	7
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.7 TEST INSTRUMENTS LIST.....	8
5 TEST RESULTS AND MEASUREMENT DATA.....	11
5.1 ANTENNA REQUIREMENT:.....	11
5.2 CONDUCTED EMISSIONS .....	12
5.3 CONDUCTED PEAK OUTPUT POWER.....	21
5.4 20dB OCCUPY BANDWIDTH.....	34
5.6 CARRIER FREQUENCIES SEPARATION .....	40
5.7 HOPPING CHANNEL NUMBER .....	47
5.8 DWELL TIME .....	50
5.9 BAND EDGE .....	56
5.10 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS .....	63
5.11 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	73
5.12 RADIATED EMISSION .....	74
5.11.1 Radiated emission below 1GHz.....	76
5.11.2 Transmitter emission above 1GHz.....	81
5.11.3 Band Edge and Restricted band (Radiated measurement).....	87-94

### 3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207/15.107	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209/15.109	Pass
Band Edge	15.247(d)	Pass

*Remark: Pass: The EUT complies with the essential requirements in the standard.*

*Fail: The EUT does not comply with the essential requirements in the standard.*

This report was based on the report SZEMO10080488601, because of change inside the data configuration NFC, but the output signal completely consistent with previous products, PCB and other devices without any change, So retest the the Maximum Peak Output Power, TX Spurious Emission, Radiated Emission and Conducted Emission.

## 4 General Information

### 4.1 Client Information

Applicant:	Nokia (China) Investment Co., Ltd.
Address of Applicant:	Nokia China, Beijing, Kaifaqu-Donghuan Zhonglu Building: R&D Wing, 7th Floor, BDA Building 2-No.5, Donghuan Zhong Rd.

### 4.2 General Description of E.U.T.

Product Name:	Bluetooth headset
Trade Mark:	NOKIA
Item No.:	BH-219
Bluetooth Version:	2.1+EDR
HW:	V2.2
SW:	V4.3
MV:	V3.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	3.05 dBi (declared by manufacturer)
Power supply:	DC3.7V (Lithium Battery)
AC Adapter:	Type: AC-15U Input: AC 100-240V/50-60Hz 150mA Output: DC 5.0 V 800mA
Power Code	< 3m
DC Adapter:	Type: DC-4 Input: DC 12V/24V Output: 5.7V/890mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

### 4.3 E.U.T Operation mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
<b>Test mode:</b>	
AC charge+ Bluetooth mode	Keep the EUT communicate with other Bluetooth device, and AC adapter charge to EUT.
DC charge+ Bluetooth mode	Keep the EUT communicate with other Bluetooth device, and DC adapter charge to EUT.
Bluetooth mode	Keep the EUT communicate with other Bluetooth device.
AC charge mode	Keep the AC adapter charge to EUT.
DC charge mode	Keep the DC adapter charge to EUT.
Transmitting mode	Keep the EUT in transmitting mode with modulation.

#### **4.4 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

##### **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

##### **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

##### **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

#### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

#### **4.6 Other Information Requested by the Customer**

None.

## 4.7 Test Instruments list

For original report SZEMO10080488601

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2009-11-05	2010-11-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2009-11-05	2010-11-05
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2009-11-10	2010-11-10
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2009-11-10	2010-11-10
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2009-12-18	2010-12-18
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	N/A	N/A
2	LISN	ETS-LINDGREN	3816/2	SEL0021	2010-06-02	2011-06-02
3	Two-Line V-Network	Rohde & Schwarz	ENV216	SEL0152	2009-10-22	2010-10-22
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2010-06-02	2011-06-02
5	Coaxial Cable	SGS	N/A	SEL0024	2008-06-18	2011-06-18

RF conducted						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2009-10-22	2010-10-22
2	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18

**For New report SZEMO11040186102**

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-11-05	2011-11-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	N/A	N/A
2	LISN	ETS-LINDGREN	3816/2	SEL0021	2010-06-02	2011-06-02
3	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2011-01-17	2012-01-17
4	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2011-01-17	2012-01-17
5	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2011-01-17	2012-01-17
6	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2010-06-02	2011-06-02
7	Coaxial Cable	SGS	N/A	SEL0024	2008-06-18	2011-06-18

General used equipment						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2010-11-04	2011-11-04
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2011-03-10	2012-03-10
3	Barometer	ChangChun	DYM3	SEL0088	2010-06-08	2011-06-08

## 5 Test results and Measurement Data

### 5.1 Antenna requirement:

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i>	
<b>E.U.T Antenna:</b>	The antenna is integrated on the main PCB and no consideration of replacement, the configuration of the antenna attach to the internal photos. The best case gain of the antenna is 3.05dBi.


## 5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207/15.107																	
Test Method:	ANSI C63.4: 2003																	
Test Frequency Range:	150KHz to 30MHz																	
Class / Severity:	Class B																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
	* Decreases with the logarithm of the frequency.																	
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</p>																	
Test setup:	<p><b>Reference Plane</b></p> <p><i>Remark:</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>																	
Test Instruments:	Refer to section 4.7 for details																	
Test mode:	AC charge+ Bluetooth mode, AC charge mode																	
Test results:	Pass																	

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

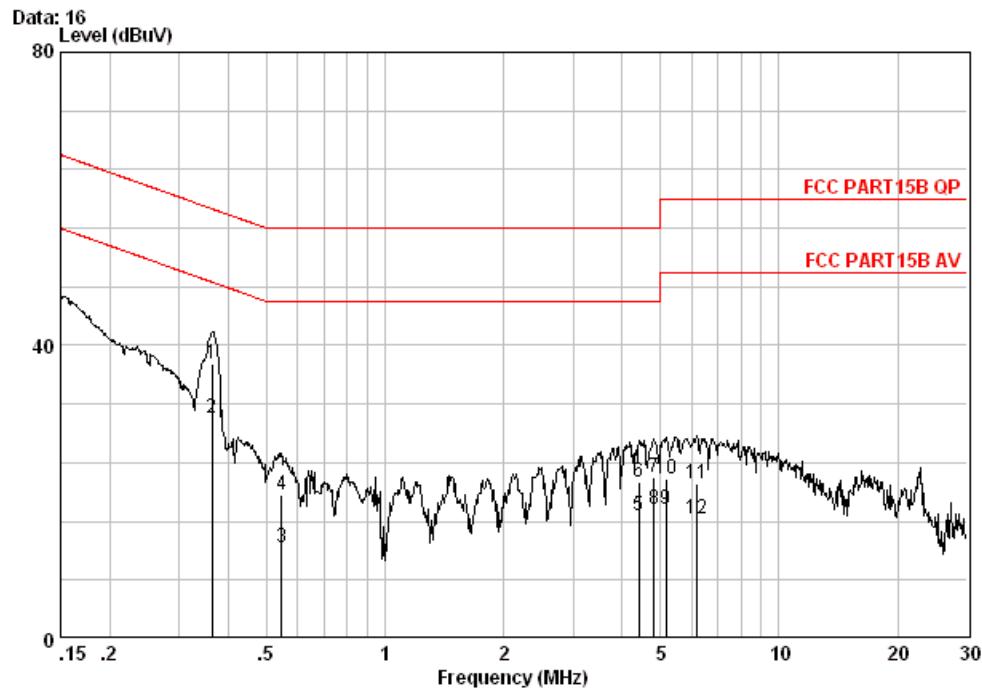
**For original report SZEMO11080488601****AC charge+ Bluetooth mode:****Live line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE LINE  
EUT : BLUETOOTH HEADSET  
JOB NO. : 4886RF  
MODE : AC CHARGE+BLUETOOTH

Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Over		Remark
					MHz	dBuV	
1	0.36300	0.05	-0.04	37.50	37.51	58.66	-21.15 QP
2	0.36300	0.05	-0.04	30.10	30.11	48.66	-18.55 Average
3	0.54600	0.06	-0.04	12.50	12.52	46.00	-33.48 Average
4	0.54600	0.06	-0.04	19.60	19.62	56.00	-36.38 QP
5	4.400	0.16	-0.10	16.70	16.76	46.00	-29.24 Average
6	4.400	0.16	-0.10	21.40	21.46	56.00	-34.54 QP
7	4.820	0.17	-0.11	21.90	21.96	56.00	-34.04 QP
8	4.820	0.17	-0.11	17.60	17.66	46.00	-28.34 Average
9	5.160	0.17	-0.11	17.50	17.56	50.00	-32.44 Average
10	5.160	0.17	-0.11	21.80	21.86	60.00	-38.14 QP
11	6.180	0.19	-0.13	21.20	21.25	60.00	-38.75 QP
12	6.180	0.19	-0.13	16.40	16.45	50.00	-33.55 Average

**Notes:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

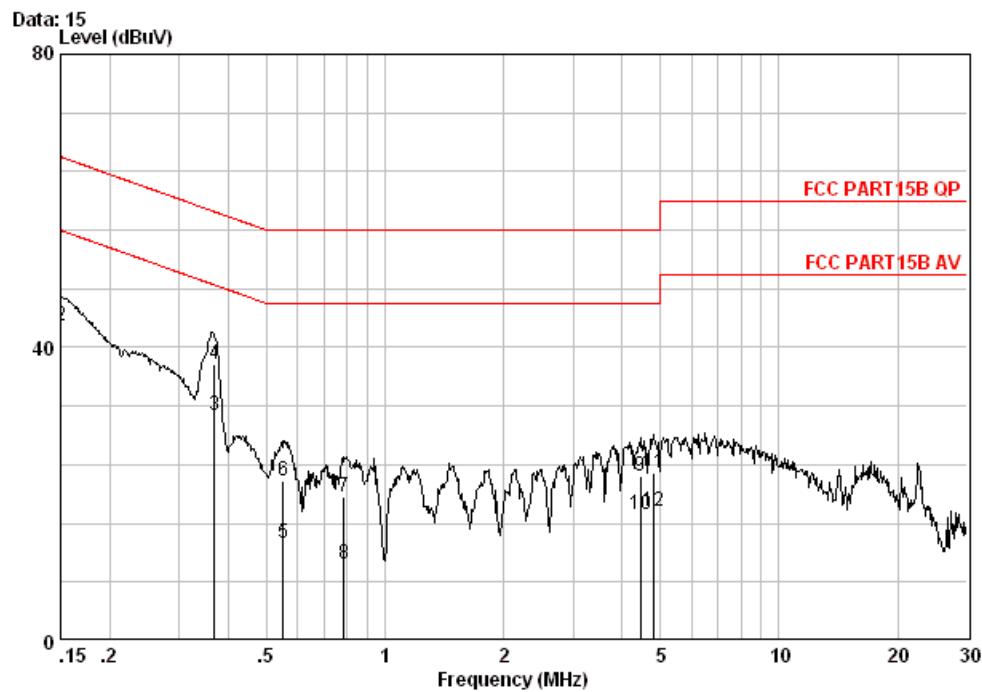
**Neutral line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE NEUTRAL  
EUT : BLUETOOTH HEADSET  
JOB NO. : 4836RF  
MODE : AC CHARGE+BLUETOOTH

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level				
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.15000	0.04	-0.05	30.50	30.49	56.00	-25.51 Average
2	0.15000	0.04	-0.05	42.90	42.89	66.00	-23.11 QP
3	0.36800	0.05	-0.04	30.70	30.71	48.55	-17.83 Average
4	0.36800	0.05	-0.04	37.60	37.61	58.55	-20.93 QP
5	0.55000	0.06	-0.04	13.20	13.22	46.00	-32.78 Average
6	0.55000	0.06	-0.04	21.70	21.72	56.00	-34.28 QP
7	0.78700	0.07	-0.04	19.50	19.52	56.00	-36.48 QP
8	0.78700	0.07	-0.04	10.40	10.42	46.00	-35.58 Average
9	4.450	0.16	-0.11	22.40	22.46	56.00	-33.54 QP
10	4.450	0.16	-0.11	17.20	17.26	46.00	-28.74 Average
11	4.790	0.17	-0.11	22.80	22.85	56.00	-33.15 QP
12	4.790	0.17	-0.11	17.50	17.55	46.00	-28.45 Average

**Notes:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

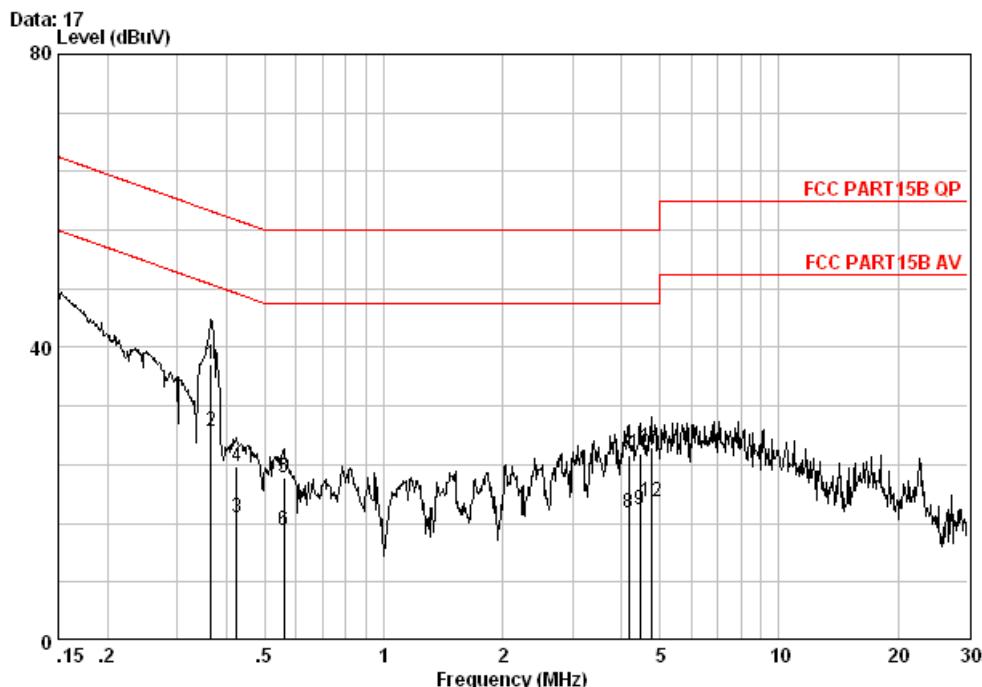
**AC charge mode:****Live line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE LINE  
EUT : BLUETOOTH HEADSET  
JOB NO. : 4886RF  
MODE : AC CHARGE

Freq	Cable Loss	LISN Factor	Read	Limit Line	Over Limit	Remark
			Level			
MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.36531	0.05	-0.04	37.74	37.75	58.61 -20.86 QP
2	0.36531	0.05	-0.04	28.50	28.51	48.61 -20.10 Average
3	0.42373	0.06	-0.04	16.80	16.81	47.37 -30.56 Average
4	0.42373	0.06	-0.04	23.64	23.65	57.37 -33.72 QP
5	0.55814	0.06	-0.04	22.20	22.22	56.00 -33.78 QP
6	0.55814	0.06	-0.04	15.10	15.12	46.00 -30.88 Average
7	4.158	0.16	-0.09	25.30	25.37	56.00 -30.63 QP
8	4.158	0.16	-0.09	17.40	17.46	46.00 -28.54 Average
9	4.454	0.16	-0.10	17.80	17.86	46.00 -28.14 Average
10	4.454	0.16	-0.10	25.53	25.59	56.00 -30.41 QP
11	4.746	0.17	-0.11	26.37	26.43	56.00 -29.57 QP
12	4.746	0.17	-0.11	18.90	18.96	46.00 -27.04 Average

**Notes:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

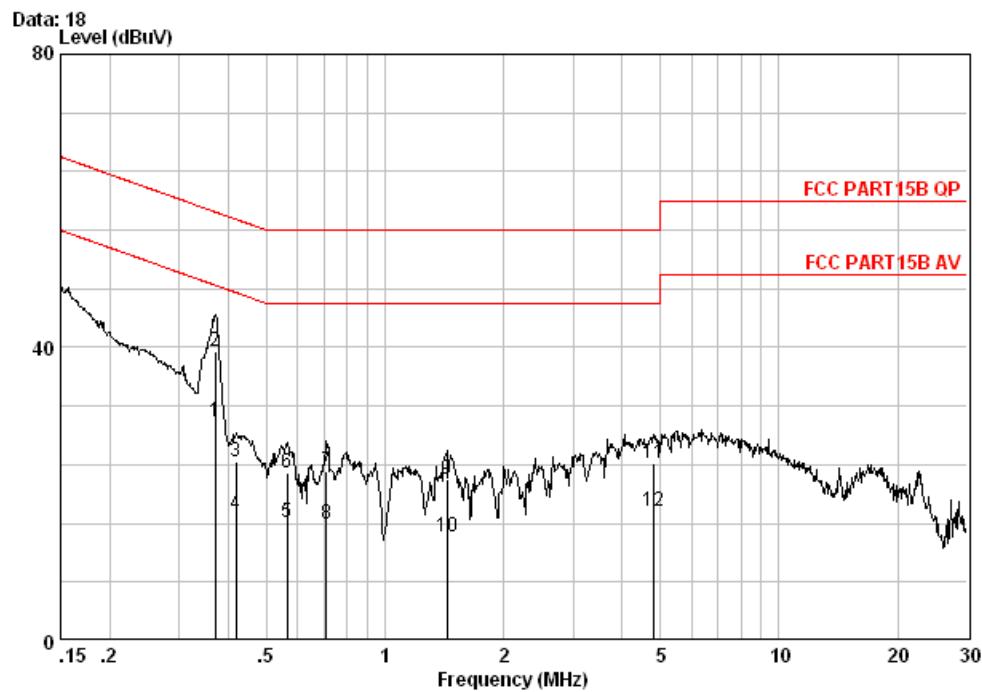
**Neutral line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE NEUTRAL  
EUT : BLUETOOTH HEADSET  
JOB NO. : 4836RF  
MODE : AC CHARGE

Freq	Cable Loss	LISN Factor	Read	Limit Line	Over Limit	Remark
			Level			
MHz	dB	dB	dBuV	dBuV	dBuV	dB
1.0	0.37117	0.05	-0.04	29.80	29.82	48.47 -18.66 Average
2	0.37117	0.05	-0.04	39.50	39.52	58.47 -18.96 QP
3	0.41927	0.06	-0.04	24.29	24.31	57.46 -33.16 QP
4	0.41927	0.06	-0.04	17.20	17.22	47.46 -30.25 Average
5	0.56409	0.06	-0.04	16.10	16.12	46.00 -29.88 Average
6	0.56409	0.06	-0.04	22.91	22.93	56.00 -33.07 QP
7	0.70842	0.06	-0.04	23.18	23.20	56.00 -32.80 QP
8	0.70842	0.06	-0.04	15.90	15.92	46.00 -30.08 Average
9	1.433	0.10	-0.05	21.97	22.02	56.00 -33.98 QP
10	1.433	0.10	-0.05	14.20	14.25	46.00 -31.75 Average
11	4.822	0.17	-0.12	24.06	24.11	56.00 -31.89 QP
12	4.822	0.17	-0.12	17.50	17.55	46.00 -28.45 Average


**Notes:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

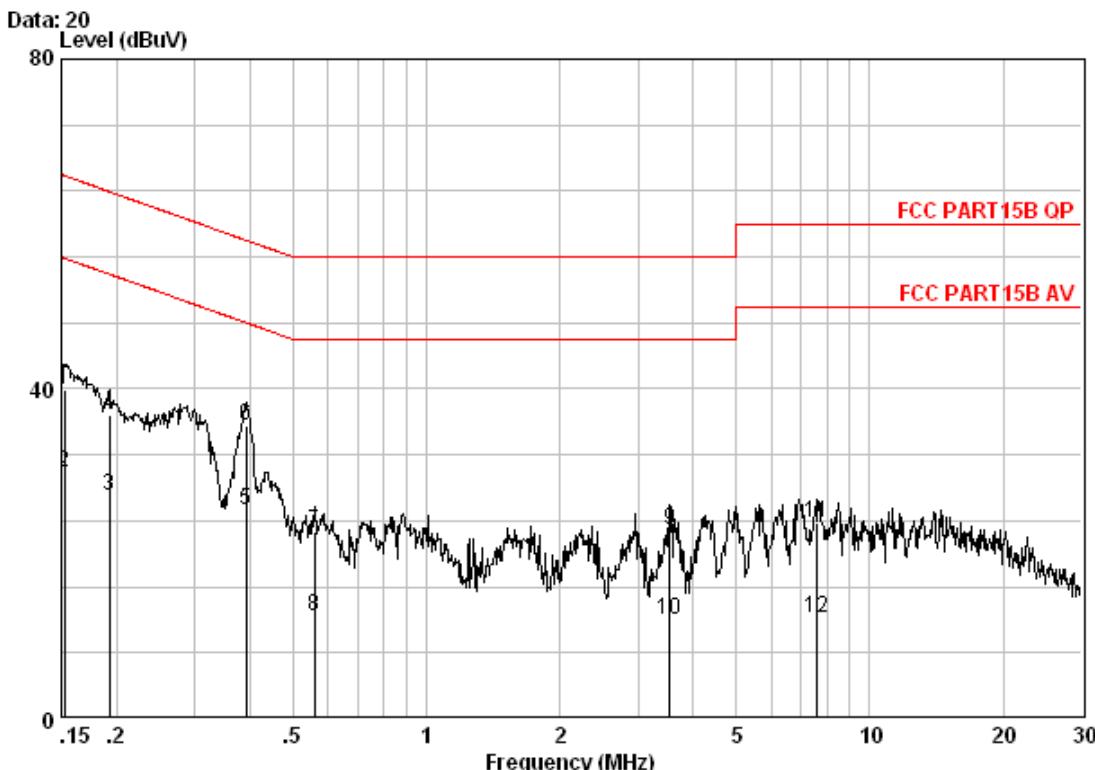**For new report SZEMO11040186102****AC charge****Live line:**


Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 LINE  
JOB NO. : 1861RF  
MODE : AC CHARGE

Freq	Cable	LISN	Read	Limit		Over	Remark
	MHz	Loss	Factor	Level	Level	Line	
1	0.15240	0.04	9.60	30.33	39.97	65.87	-25.90 QP
2	0.15240	0.04	9.60	20.33	29.97	55.87	-25.90 Average
3	0.19242	0.04	9.60	17.30	26.94	53.93	-26.99 Average
4	0.19242	0.04	9.60	27.18	36.82	63.93	-27.11 QP
5	0.39136	0.06	9.60	15.70	25.36	48.03	-22.68 Average
6	0.39136	0.06	9.60	25.80	35.46	58.03	-22.58 QP
7	0.55814	0.06	9.63	12.96	22.65	56.00	-33.35 QP
8	0.55814	0.06	9.63	2.70	12.39	46.00	-33.61 Average
9	3.547	0.15	9.76	12.97	22.88	56.00	-33.12 QP
10	3.547	0.15	9.76	2.10	12.01	46.00	-33.99 Average
11	7.566	0.20	9.88	13.58	23.66	60.00	-36.34 QP
12	7.566	0.20	9.88	2.20	12.28	50.00	-37.72 Average

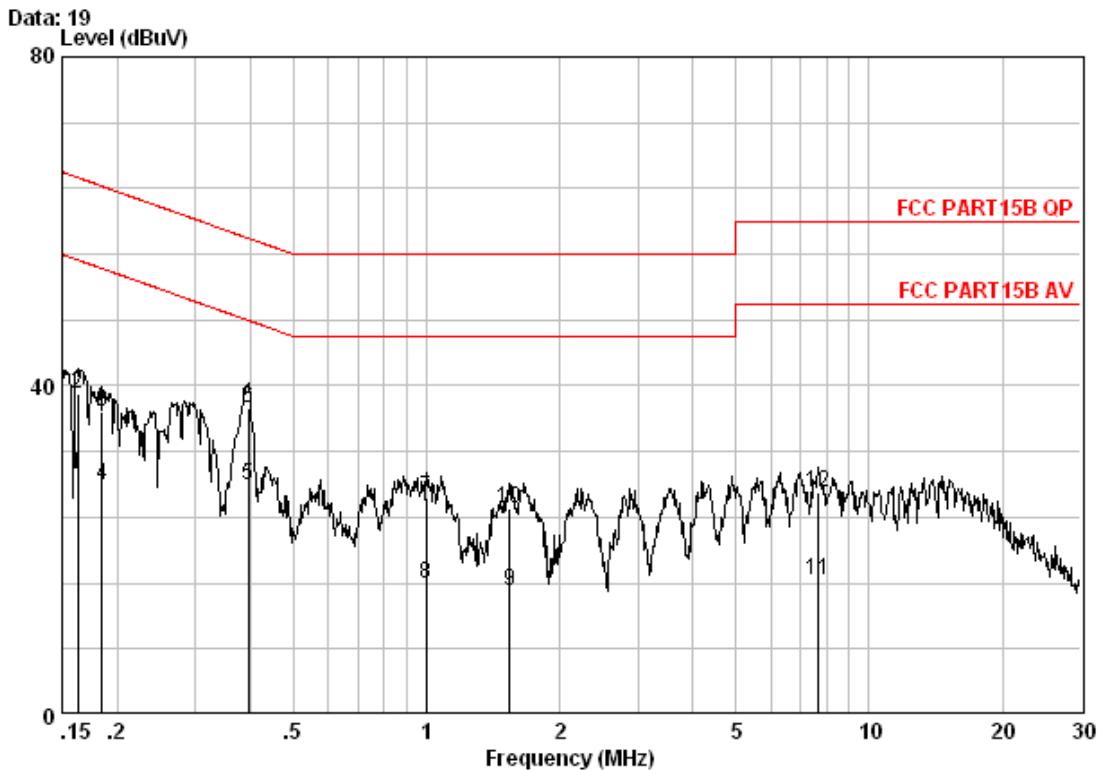**Neutral line:**


Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 NEUTRAL  
JOB NO. : 1861RF  
MODE : AC CHARGE

Freq	Cable	LISN	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Level	Level	Line	Limit
1	0.16241	0.04	9.60	19.55	29.19	55.34	-26.15 Average
2	0.16241	0.04	9.60	29.38	39.02	65.34	-26.32 QP
3	0.18443	0.04	9.60	27.25	36.89	64.28	-27.39 QP
4	0.18443	0.04	9.60	18.25	27.89	54.28	-26.39 Average
5	0.39553	0.06	9.60	18.30	27.96	47.95	-19.99 Average
6	0.39553	0.06	9.60	27.59	37.25	57.95	-20.70 QP
7	0.99968	0.08	9.70	16.56	26.34	56.00	-29.66 QP
8	0.99968	0.08	9.70	6.14	15.92	46.00	-30.08 Average
9	1.544	0.10	9.70	5.34	15.14	46.00	-30.86 Average
10	1.544	0.10	9.70	15.32	25.12	56.00	-30.88 QP
11	7.687	0.20	9.80	6.40	16.40	50.00	-33.60 Average
12	7.687	0.20	9.80	16.98	26.98	60.00	-33.02 QP

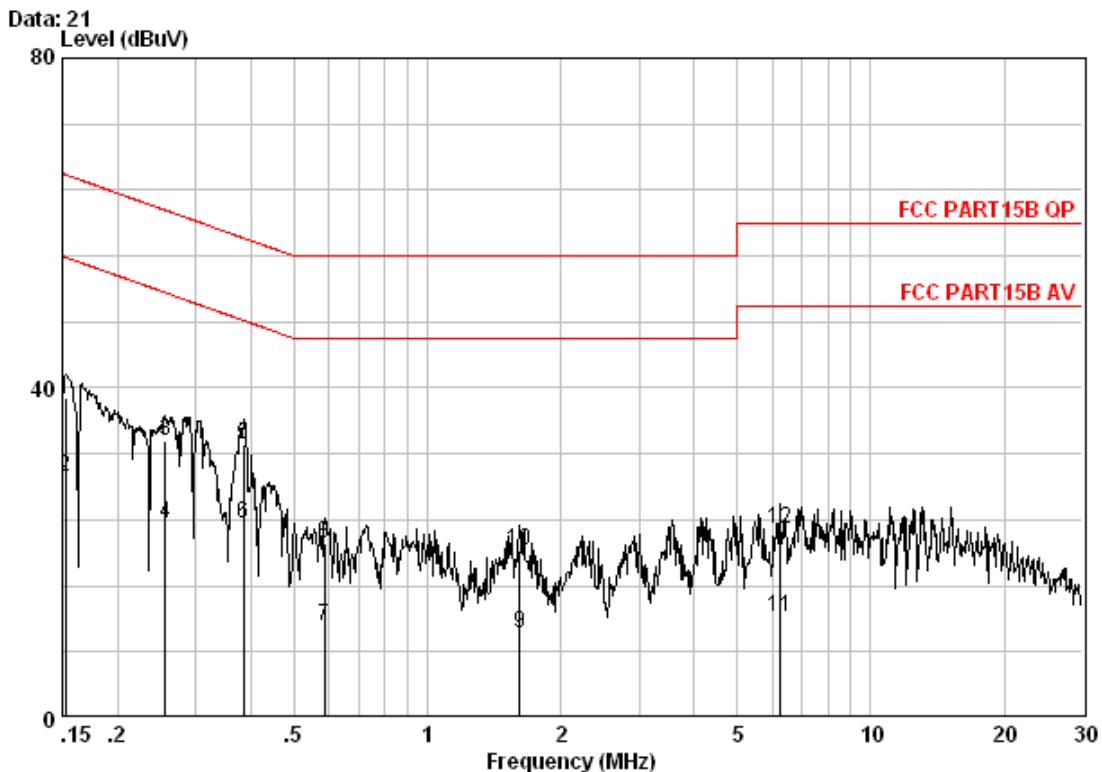**AC charge + Bluetooth****Live line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 LINE  
JOB NO. : 1861RF  
MODE : AC CHARGE+BLUETOOTH


	Freq	Cable	LISN	Read	Limit	Over	Remark
		Loss	Factor	Level			
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.15240	0.04	9.60	29.10	38.74	65.87	-27.13 QP
2	0.15240	0.04	9.60	19.60	29.24	55.87	-26.63 Average
3	0.25615	0.05	9.60	23.94	33.59	61.56	-27.97 QP
4	0.25615	0.05	9.60	13.94	23.59	51.56	-27.97 Average
5	0.38519	0.05	9.60	23.46	33.11	58.17	-25.05 QP
6	0.38519	0.05	9.60	13.80	23.45	48.17	-24.71 Average
7	0.58540	0.06	9.65	1.44	11.15	46.00	-34.85 Average
8	0.58540	0.06	9.65	11.40	21.11	56.00	-34.89 QP
9	1.610	0.11	9.70	0.41	10.22	46.00	-35.78 Average
10	1.610	0.11	9.70	10.41	20.22	56.00	-35.78 QP
11	6.219	0.19	9.86	2.23	12.28	50.00	-37.72 Average
12	6.219	0.19	9.86	12.94	22.99	60.00	-37.01 QP

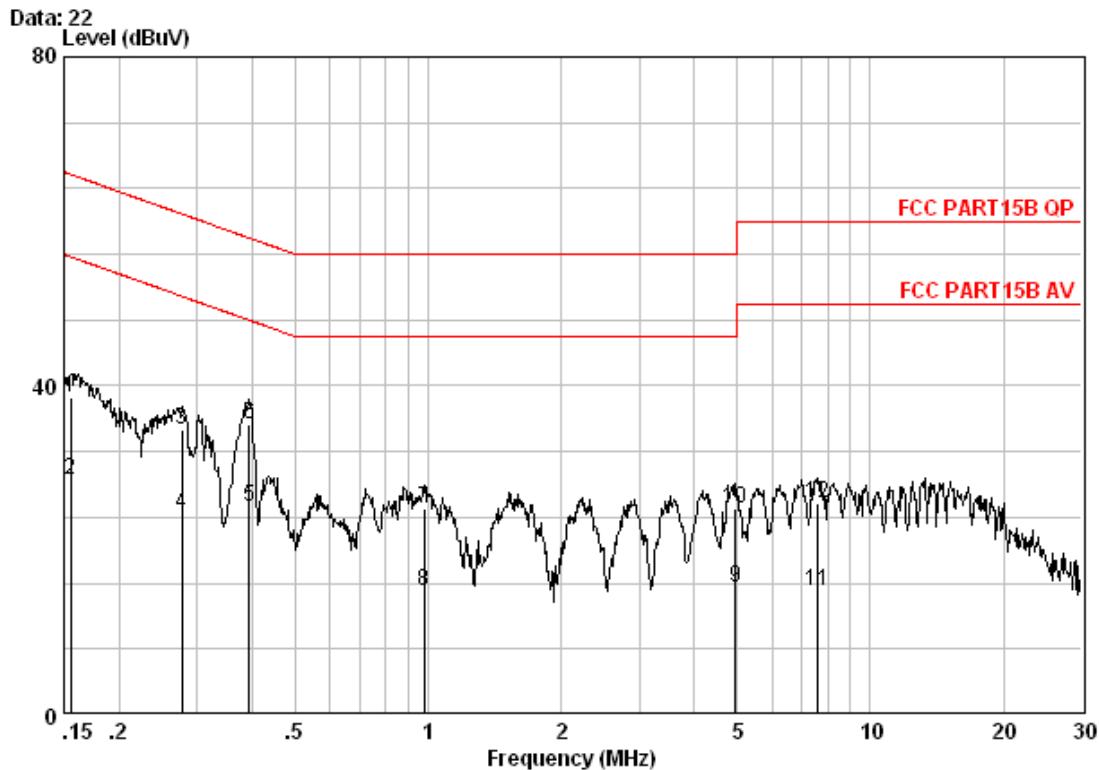**Neutral line:**

Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 NEUTRAL  
JOB NO. : 1861RF  
MODE : AC CHARGE+BLUETOOTH

Freq	Cable	LISN	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Level	Level	Line	Limit
1	0.15567	0.04	9.60	28.88	38.52	65.69	-27.17 QP
2	0.15567	0.04	9.60	18.88	28.52	55.69	-27.17 Average
3	0.27734	0.05	9.60	24.91	34.56	60.90	-26.34 QP
4	0.27734	0.05	9.60	14.80	24.45	50.90	-26.45 Average
5	0.39344	0.06	9.60	15.65	25.31	47.99	-22.69 Average
6	0.39344	0.06	9.60	25.65	35.31	57.99	-22.69 QP
7	0.97871	0.08	9.70	15.20	24.98	56.00	-31.02 QP
8	0.97871	0.08	9.70	5.20	14.98	46.00	-31.02 Average
9	4.952	0.17	9.80	5.40	15.37	46.00	-30.63 Average
10	4.952	0.17	9.80	15.07	25.04	56.00	-30.96 QP
11	7.606	0.20	9.80	5.10	15.10	50.00	-34.90 Average
12	7.606	0.20	9.80	15.74	25.74	60.00	-34.26 QP

### 5.3 Conducted Peak Output Power

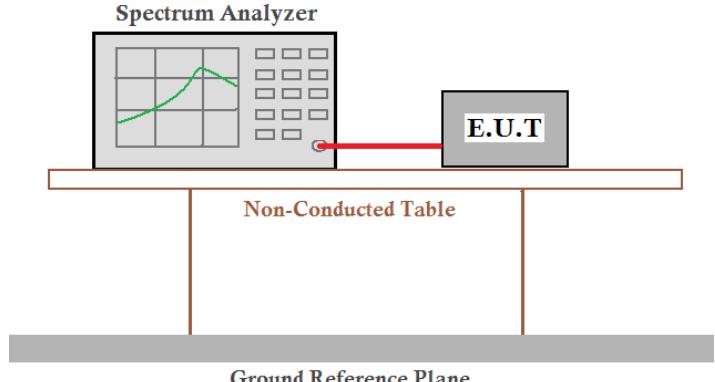Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	30dBm
Test setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.7 for details
Test state:	Non-hopping transmitting with all kinds of modulation.
Test results:	Pass

For original report SZEMO10080488601

## Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-6.98	30.00	Pass
Middle	-6.31	30.00	Pass
Highest	-6.78	30.00	Pass


Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.20	30.00	Pass
Middle	-3.79	30.00	Pass
Highest	-4.03	30.00	Pass


8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.96	30.00	Pass
Middle	-4.54	30.00	Pass
Highest	-3.55	30.00	Pass

**Test plot as follows:**


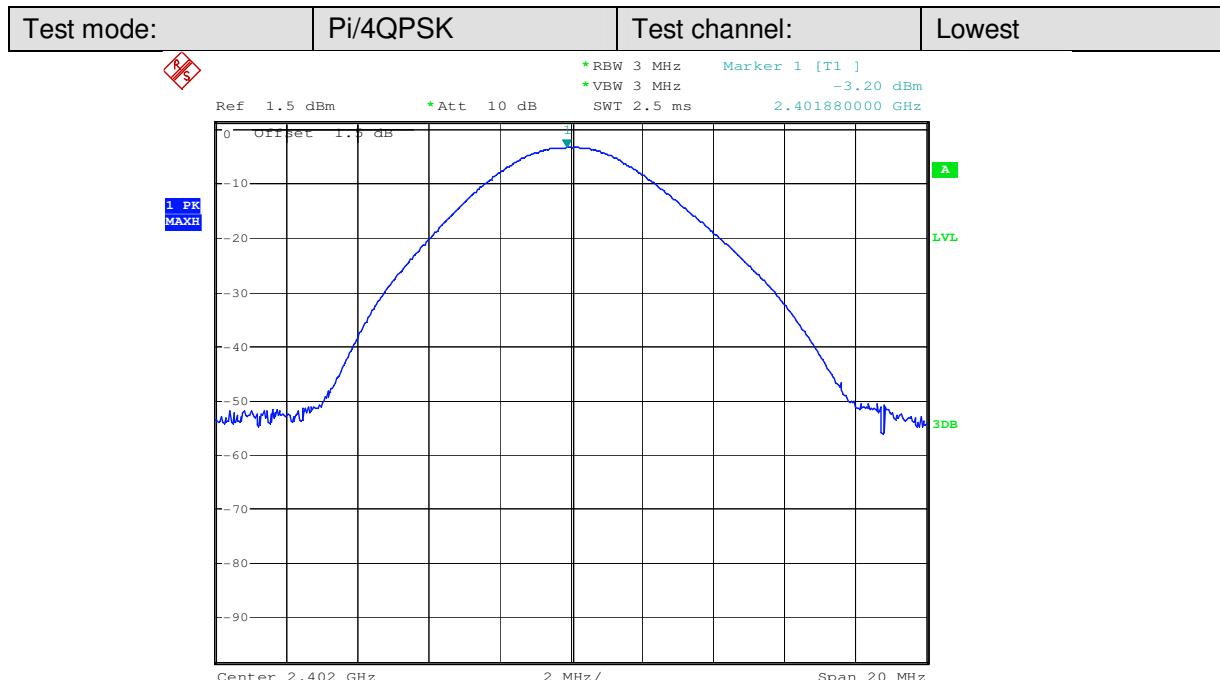
Date: 29.JUN.2010 12:50:31

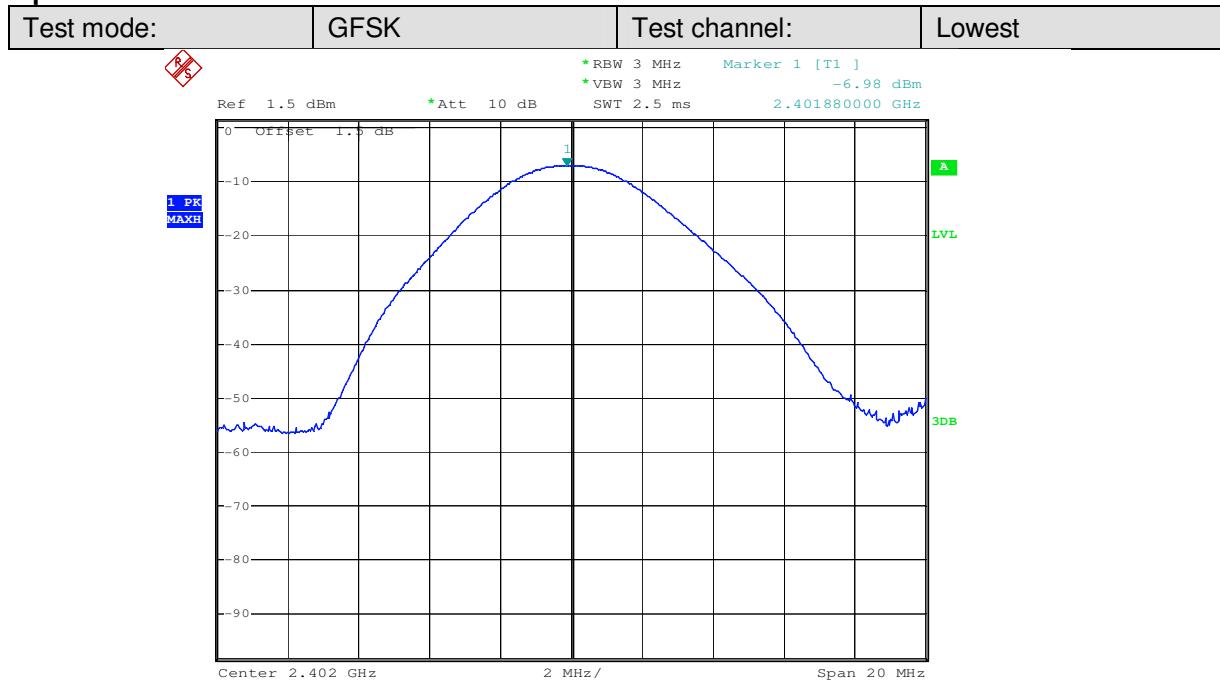

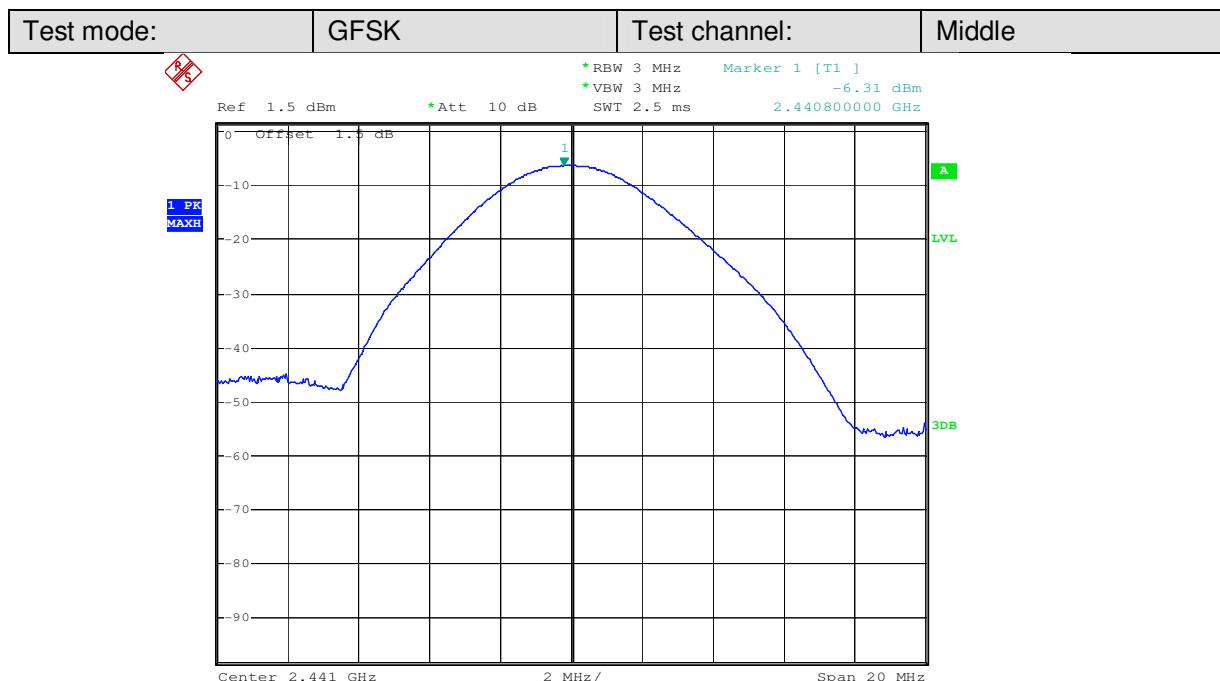
Date: 29.JUN.2010 12:51:19

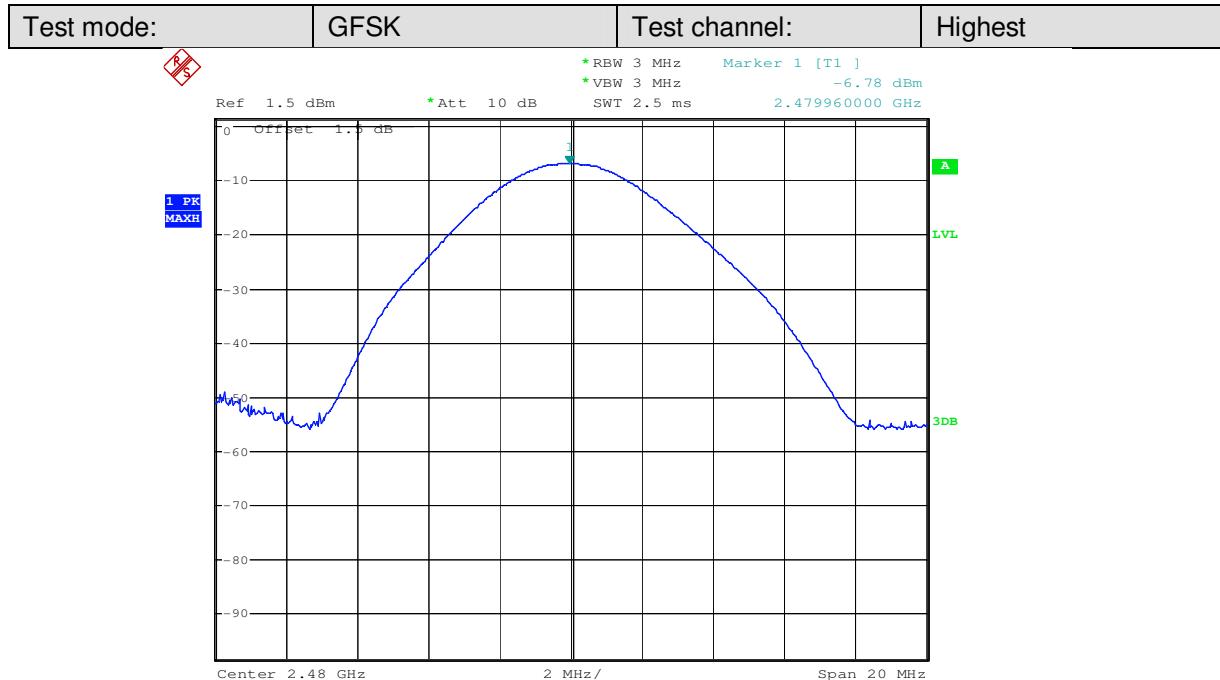


Date: 29.JUN.2010 13:11:53




Date: 29.JUN.2010 13:31:47

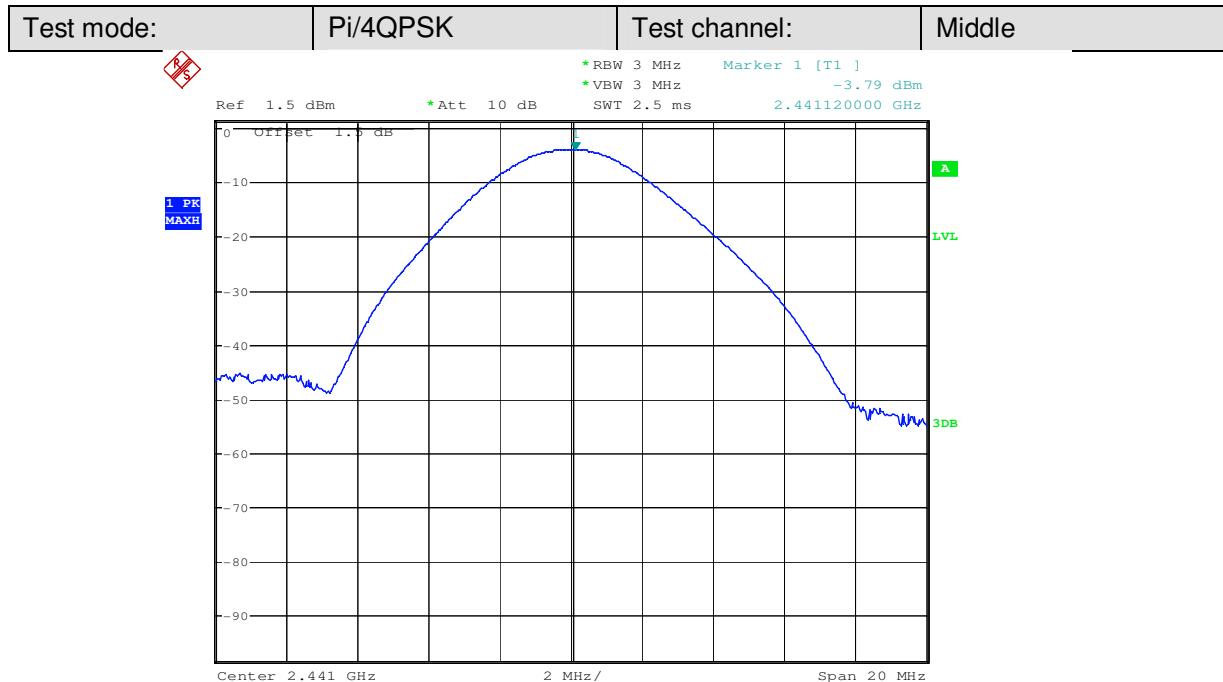


Date: 29.JUN.2010 14:13:33

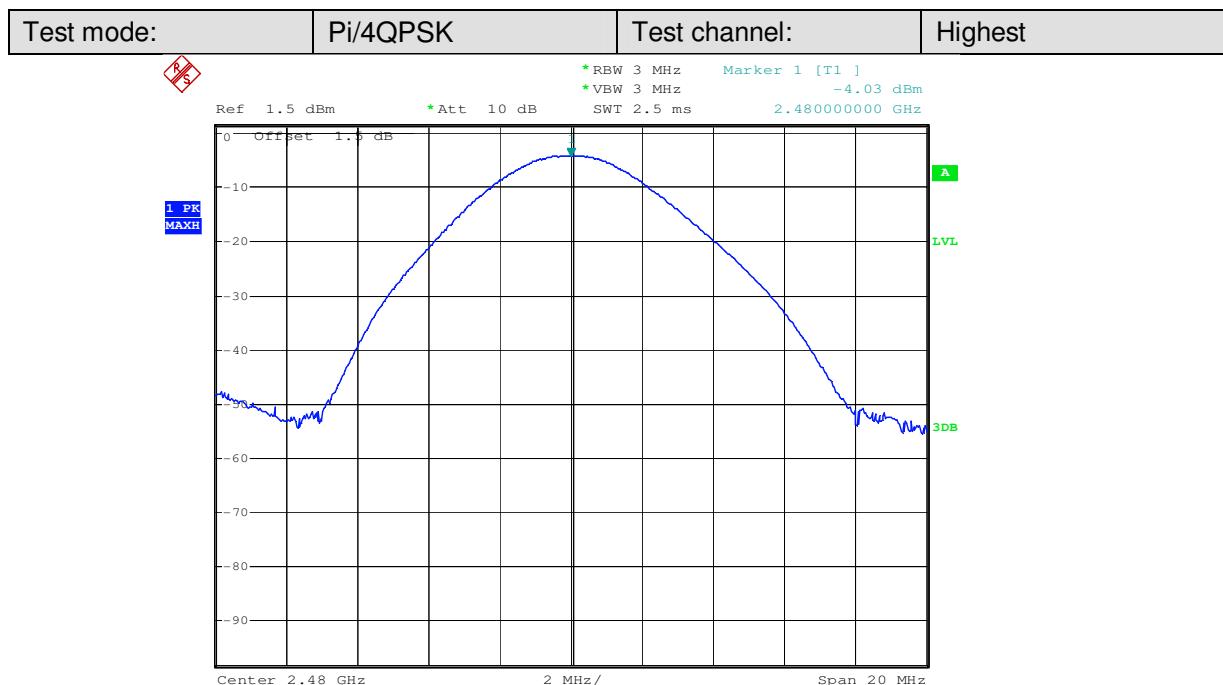


Date: 29.JUN.2010 14:30:56

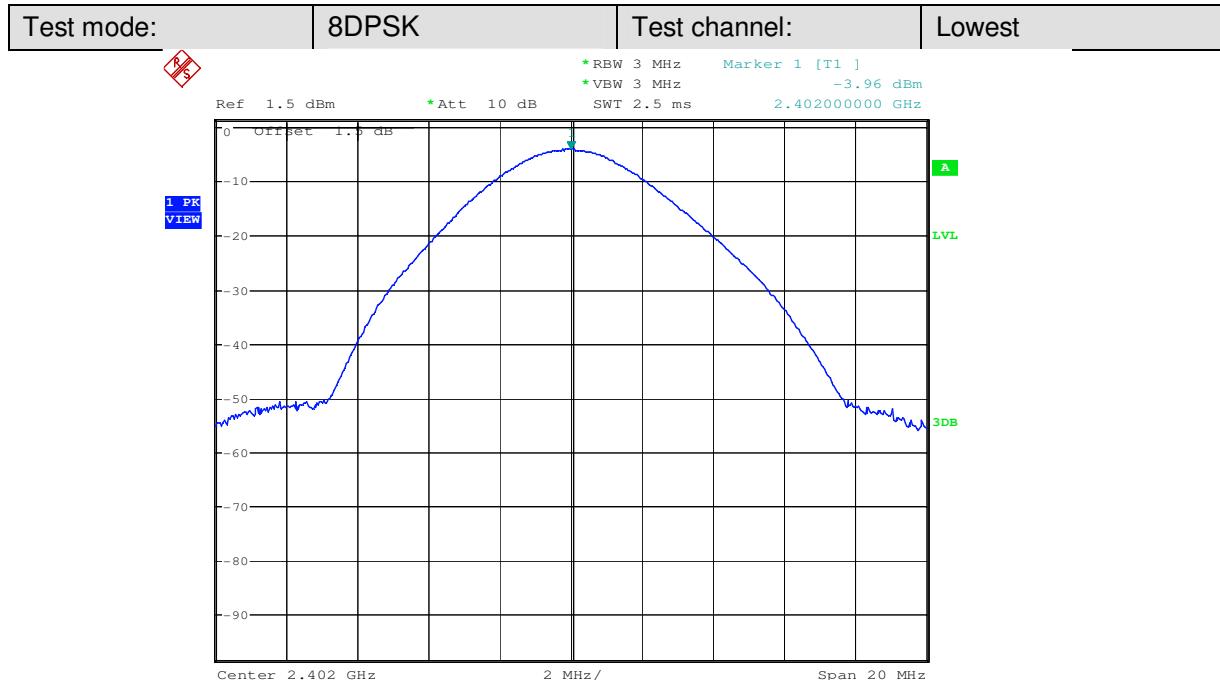

Date: 29.JUN.2010 14:41:46

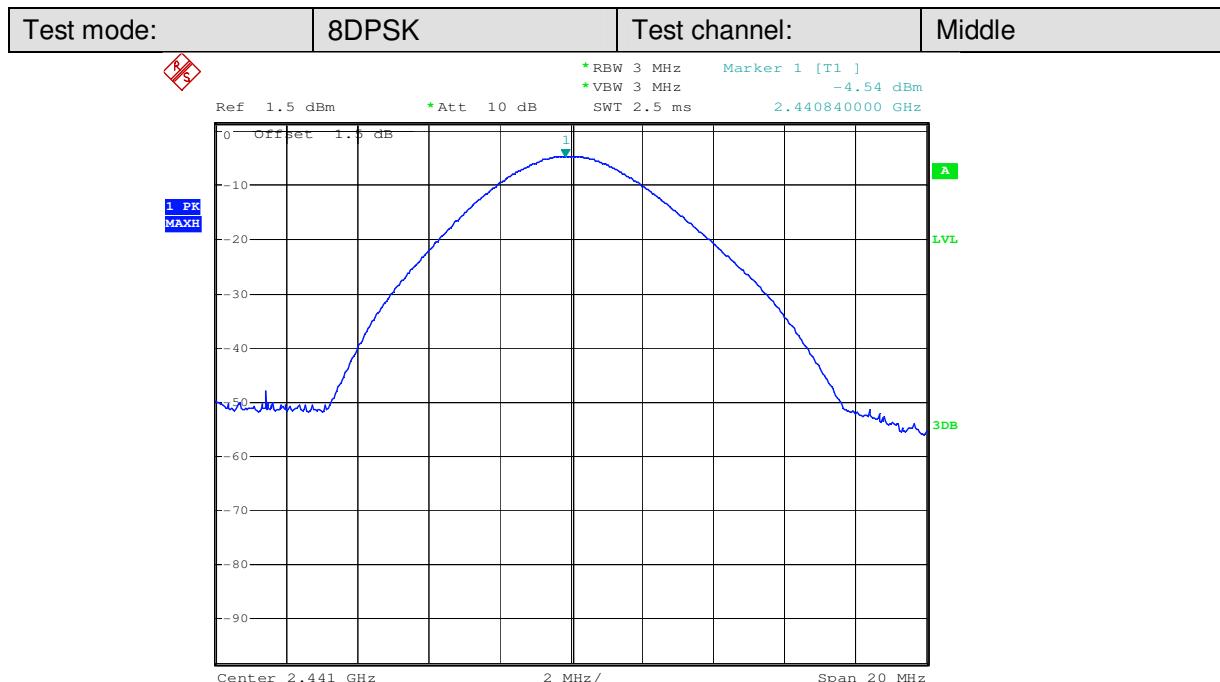

Date: 29.JUN.2010 14:50:10

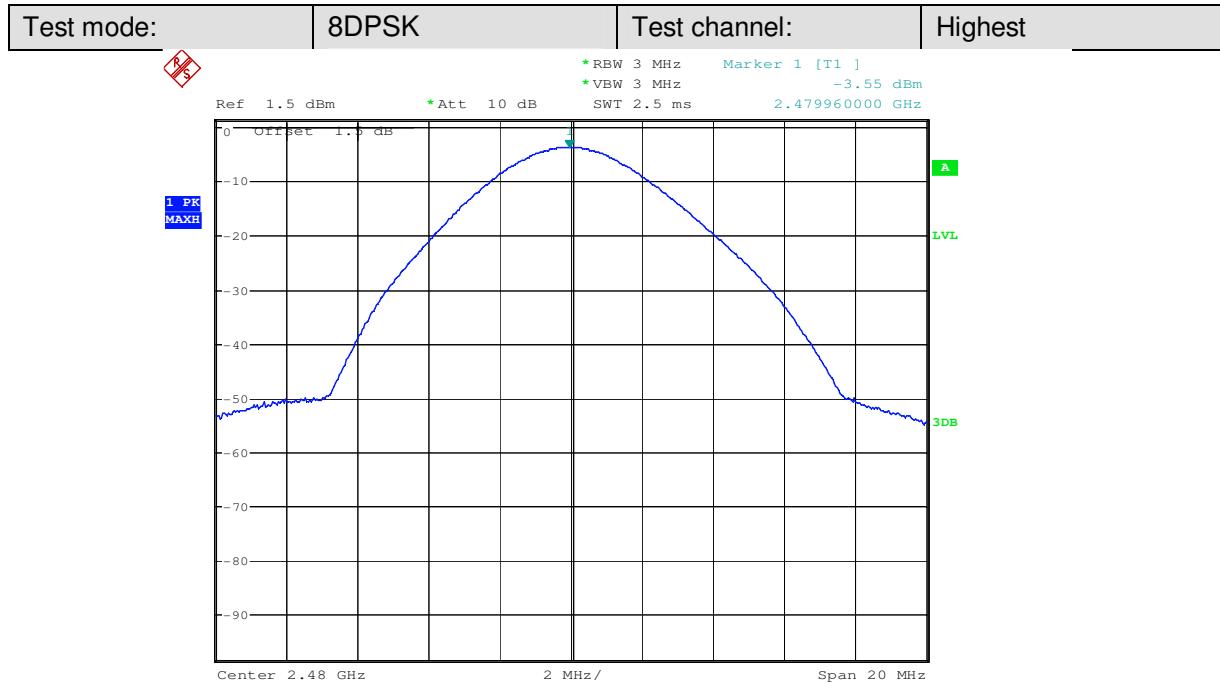

Date: 29.JUN.2010 15:07:50

For new report SZEMO11040186102

**Measurement Data**



GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-6.99	30.00	Pass
Middle	-6.67	30.00	Pass
Highest	-6.85	30.00	Pass


Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.28	30.00	Pass
Middle	-4.06	30.00	Pass
Highest	-4.03	30.00	Pass


8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-4.27	30.00	Pass
Middle	-4.62	30.00	Pass
Highest	-3.56	30.00	Pass



**Test plot as follows:**


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

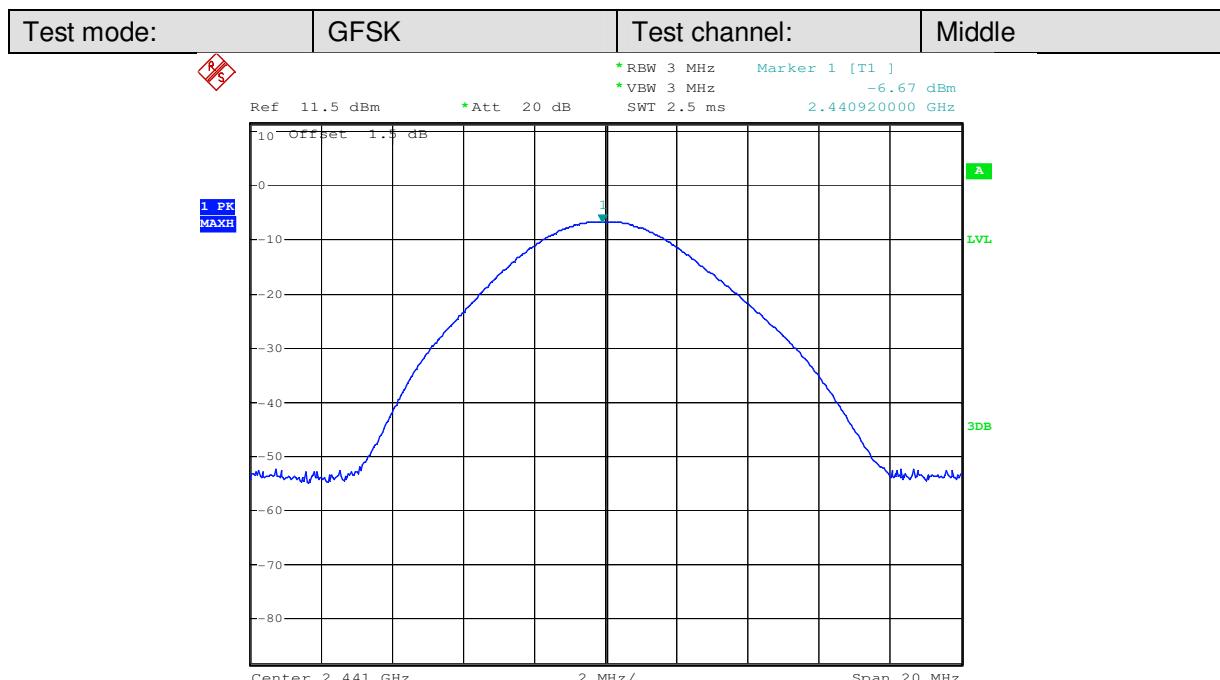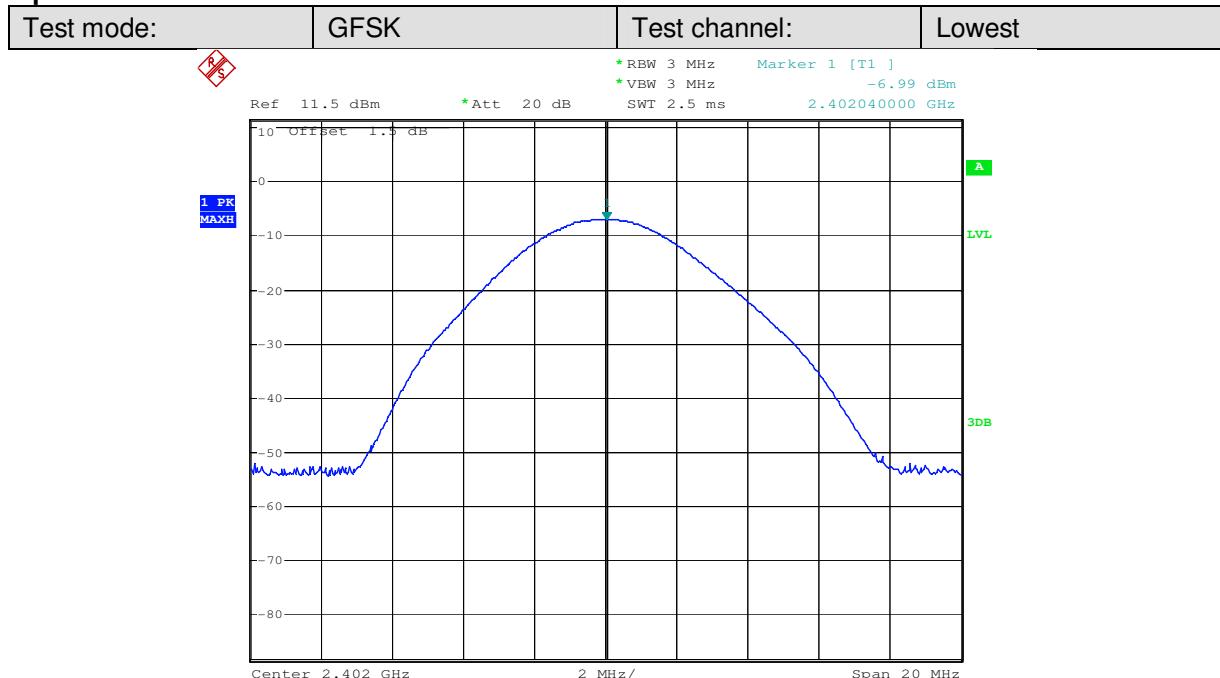


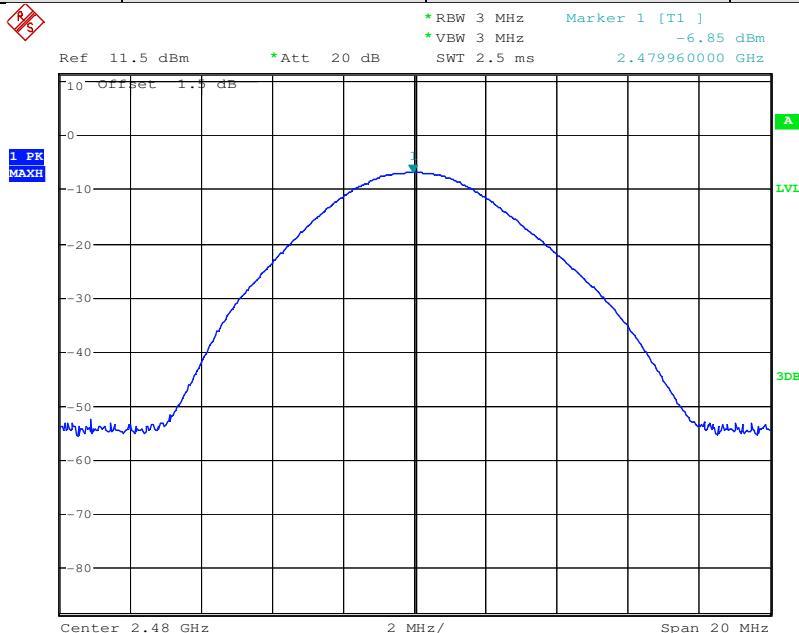Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

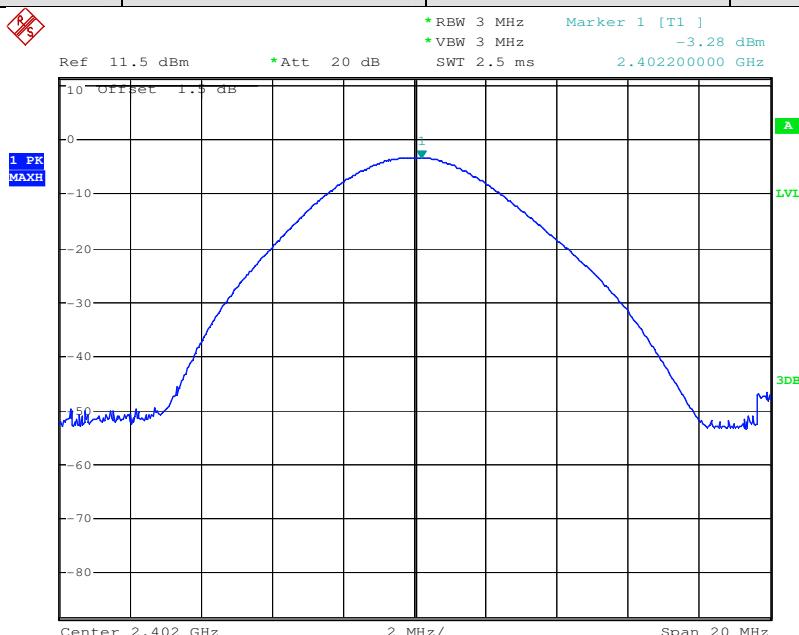


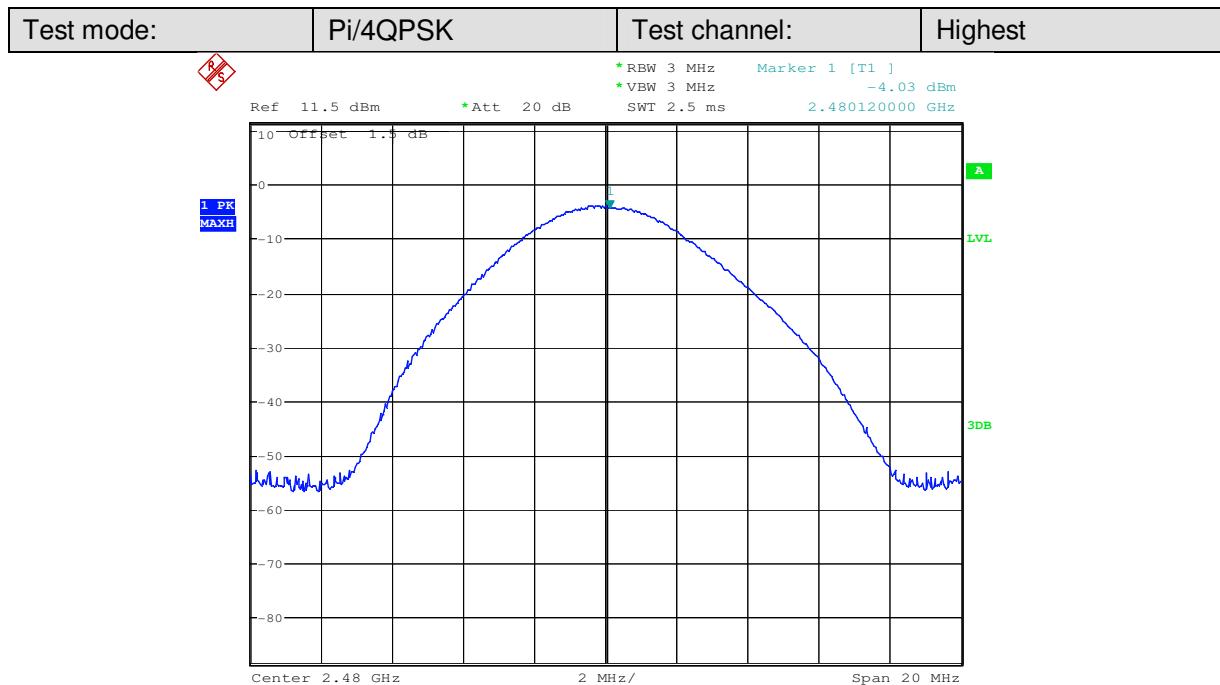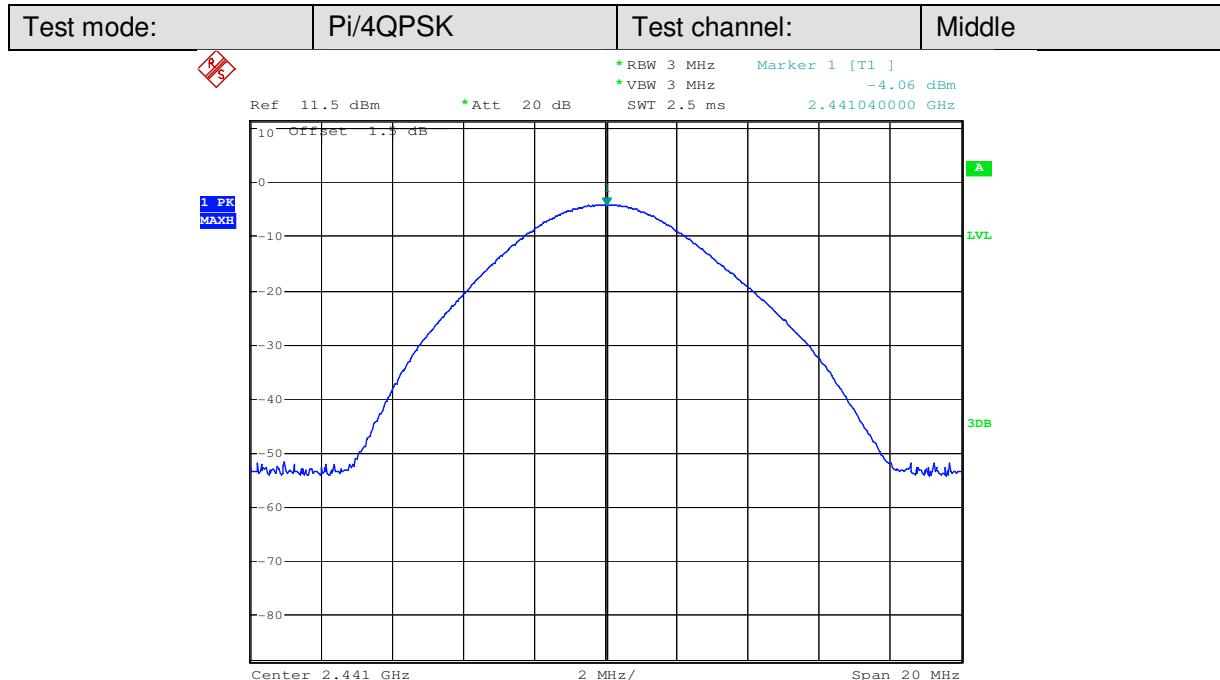


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

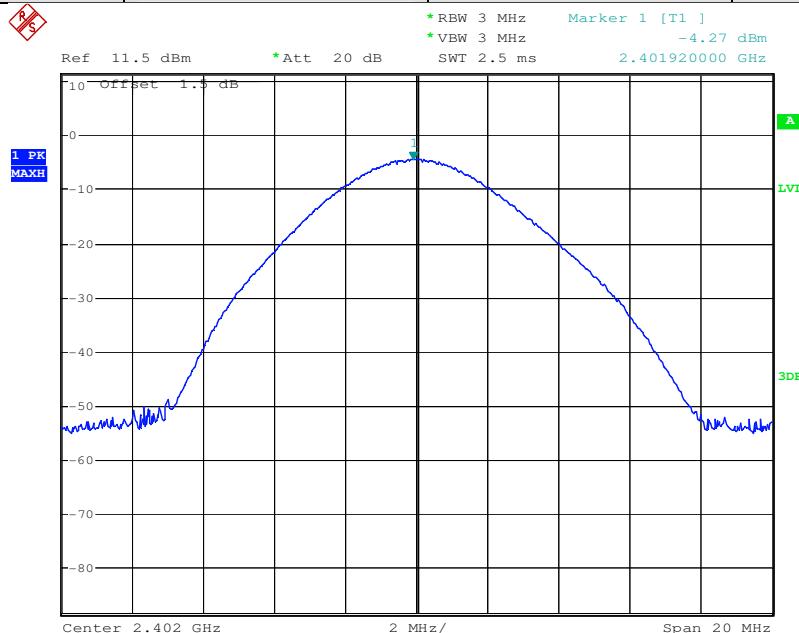


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

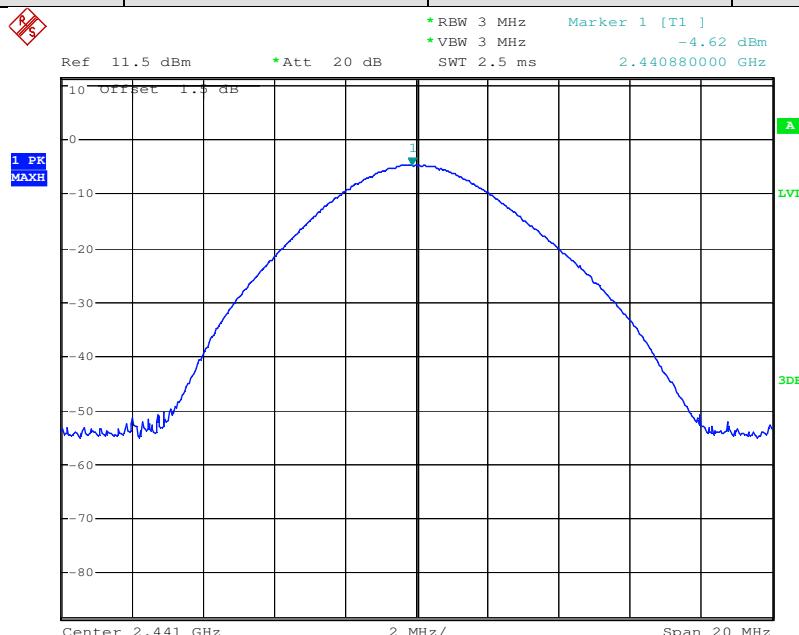

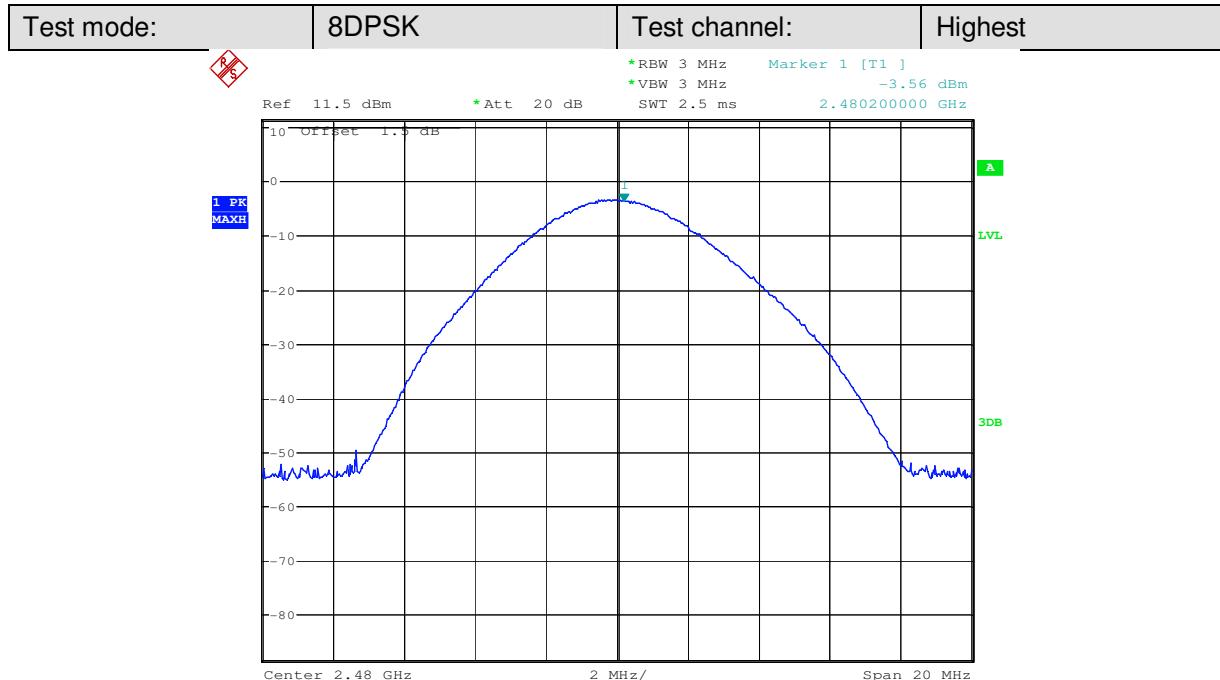

## 5.4 20dB Occupy Bandwidth

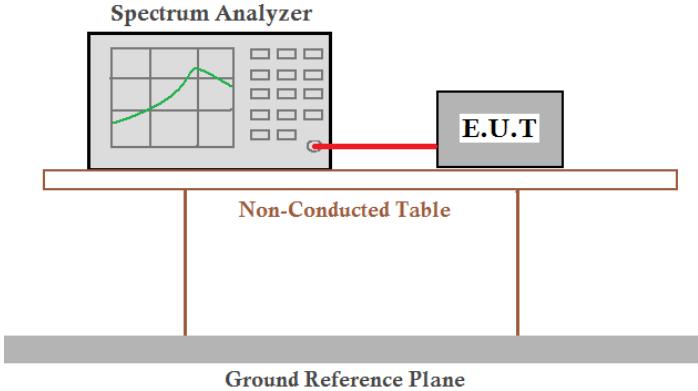Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 4.7 for details
Test state:	Non-hopping transmitting with all kind of modulation.
Test results:	Pass

### Measurement Data


Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	756	1196	1200
Middle	752	1212	1204
Highest	764	1216	1208

**Test plot as follows:**



Date: 1.SEP.2010 17:32:11




Date: 1.SEP.2010 17:32:37

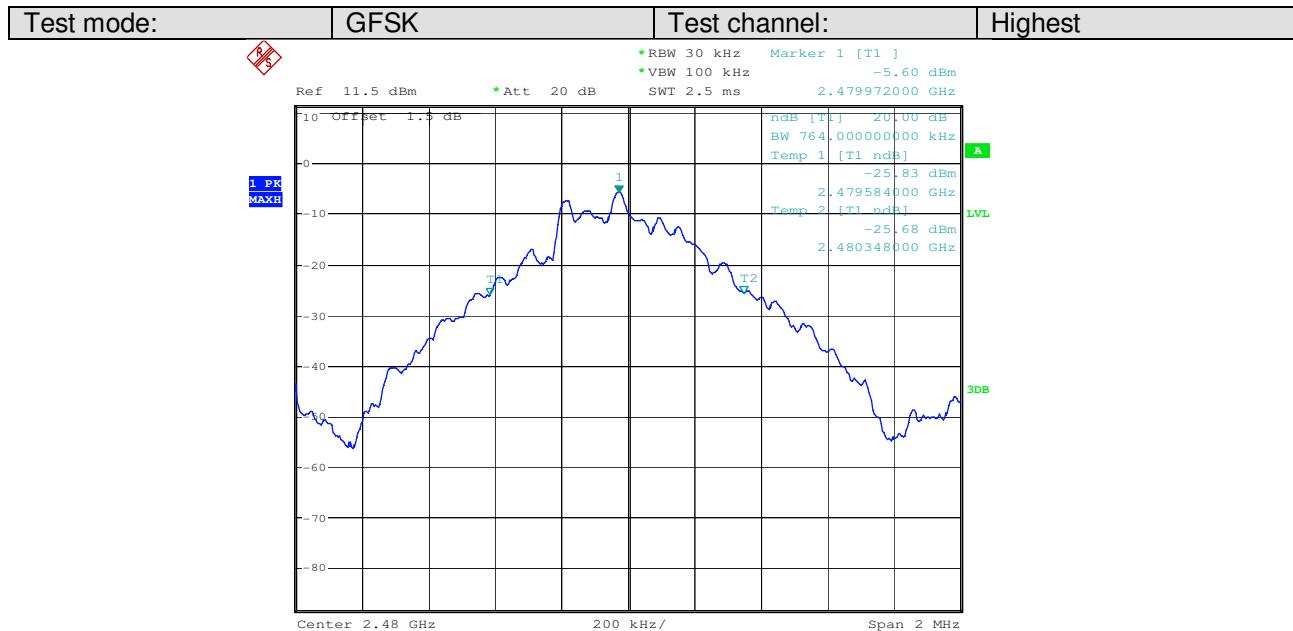


Date: 1.SEP.2010 17:33:11

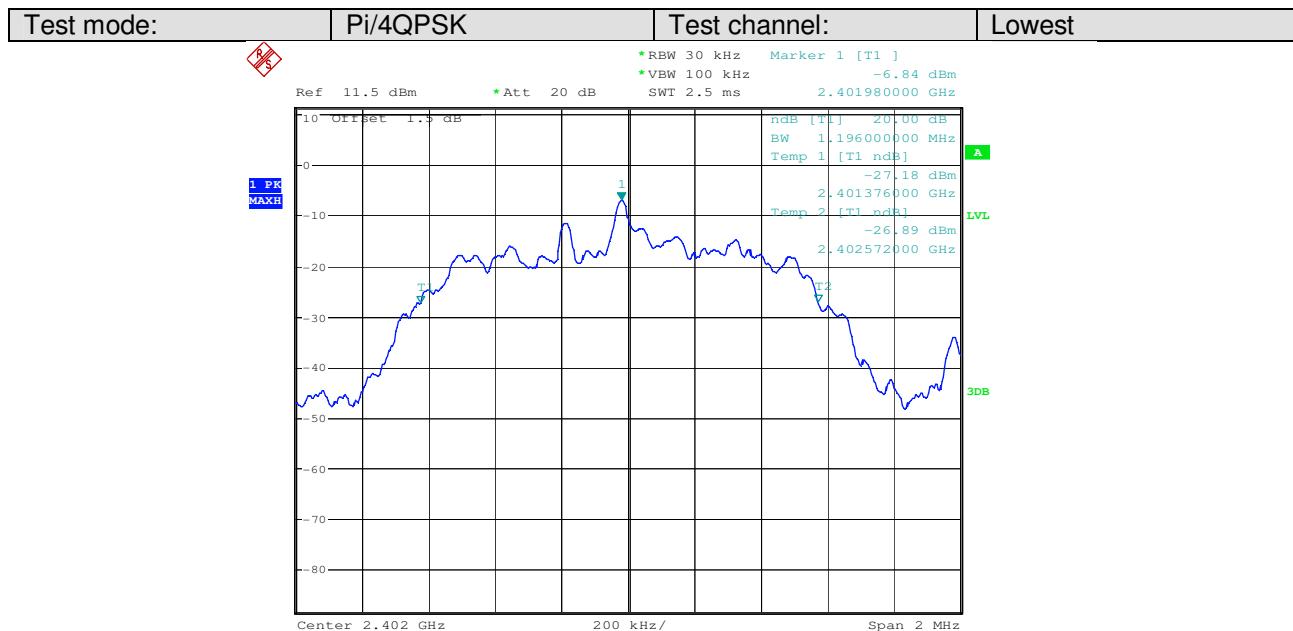

Date: 1.SEP.2010 17:35:29

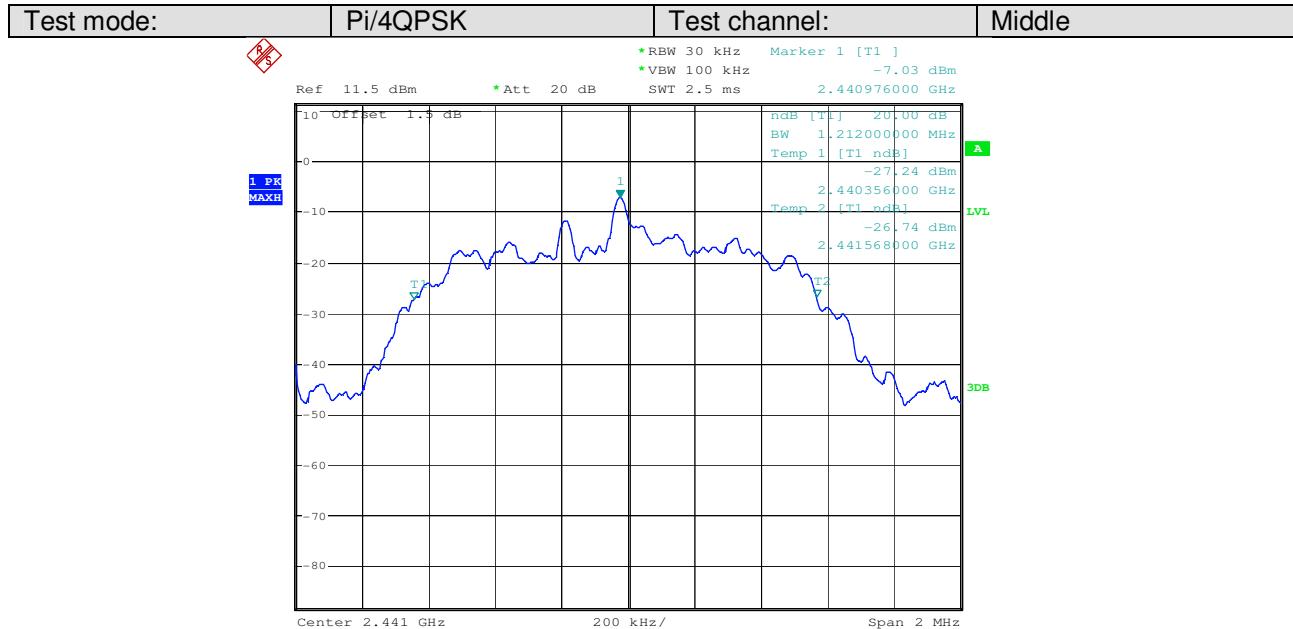


Date: 1.SEP.2010 17:34:42

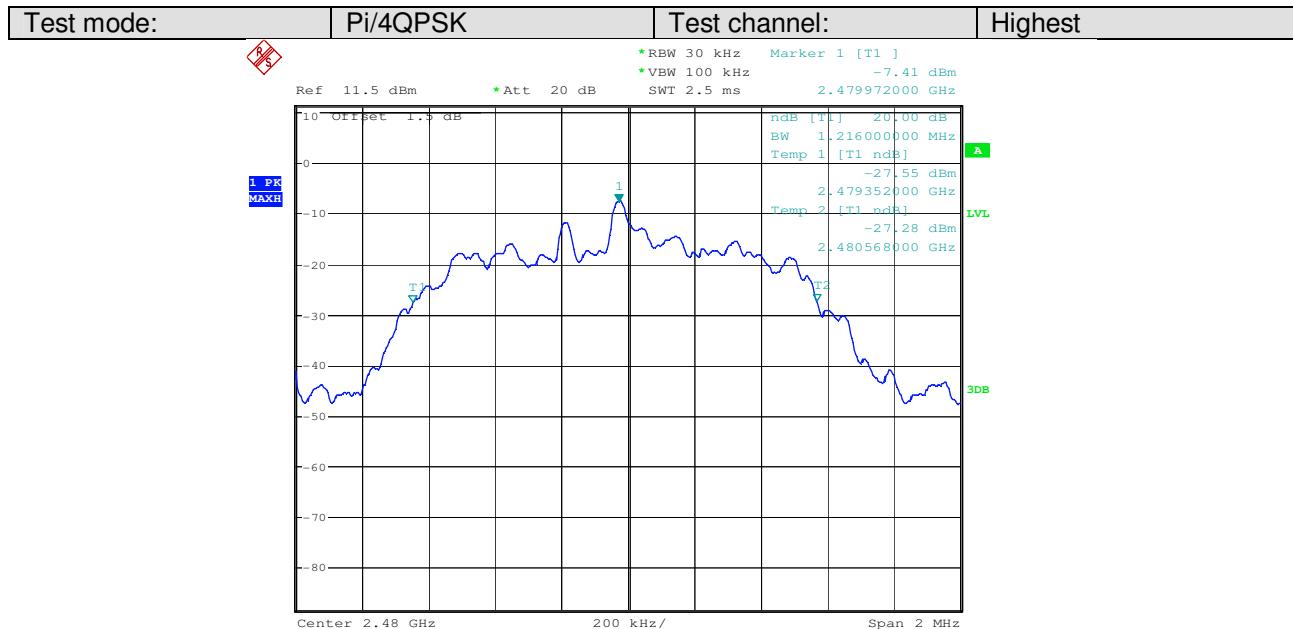


Date: 1.SEP.2010 17:34:09

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

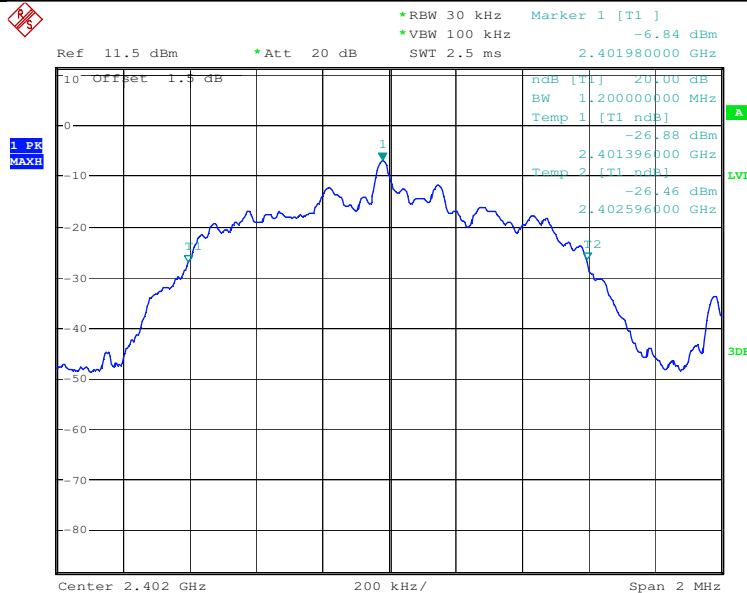


Date: 1.SEP.2010 17:36:18

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

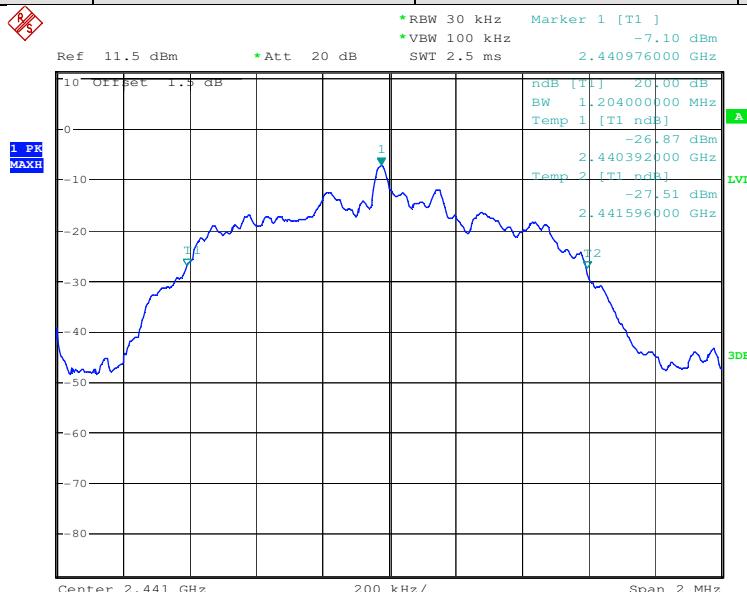


Date: 1.SEP.2010 17:36:47

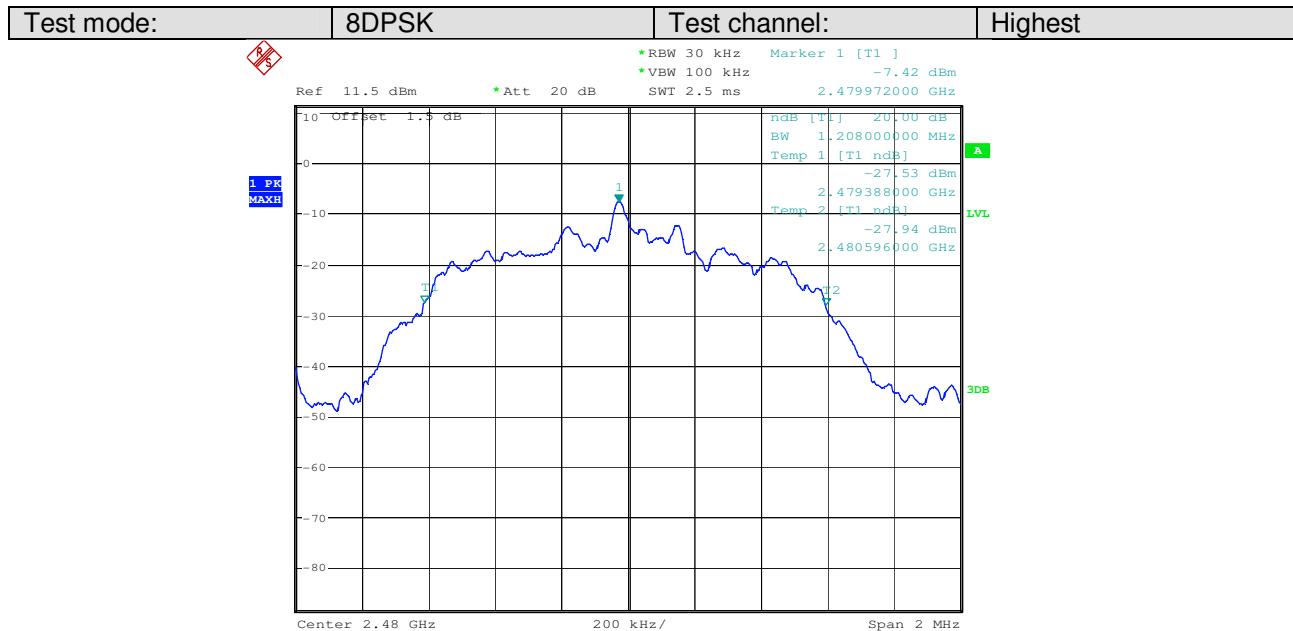

Date: 1.SEP.2010 17:37:18

## 5.6 Carrier Frequencies Separation

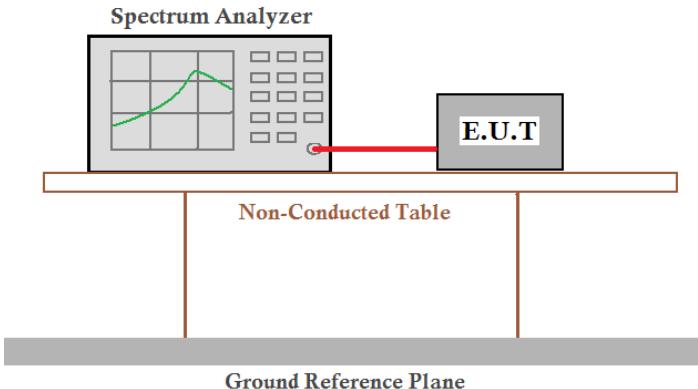
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Test state:	Hopping transmitting with all kind of modulation.
Test setup:	
Test Instruments:	Refer to section 4.7 for details
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test results:	Pass

**Measurement Data**


GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	810.7	Pass
Middle	1000	810.7	Pass
Highest	1000	810.7	Pass
Pi/4QPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	810.7	Pass
Middle	1004	810.7	Pass
Highest	1000	810.7	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	810.7	Pass
Middle	1000	810.7	Pass
Highest	1000	810.7	Pass

*Note: According to section 5.4,*


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	764	509.3
Pi/4QPSK	1216	810.7
8DPSK	1208	805.3

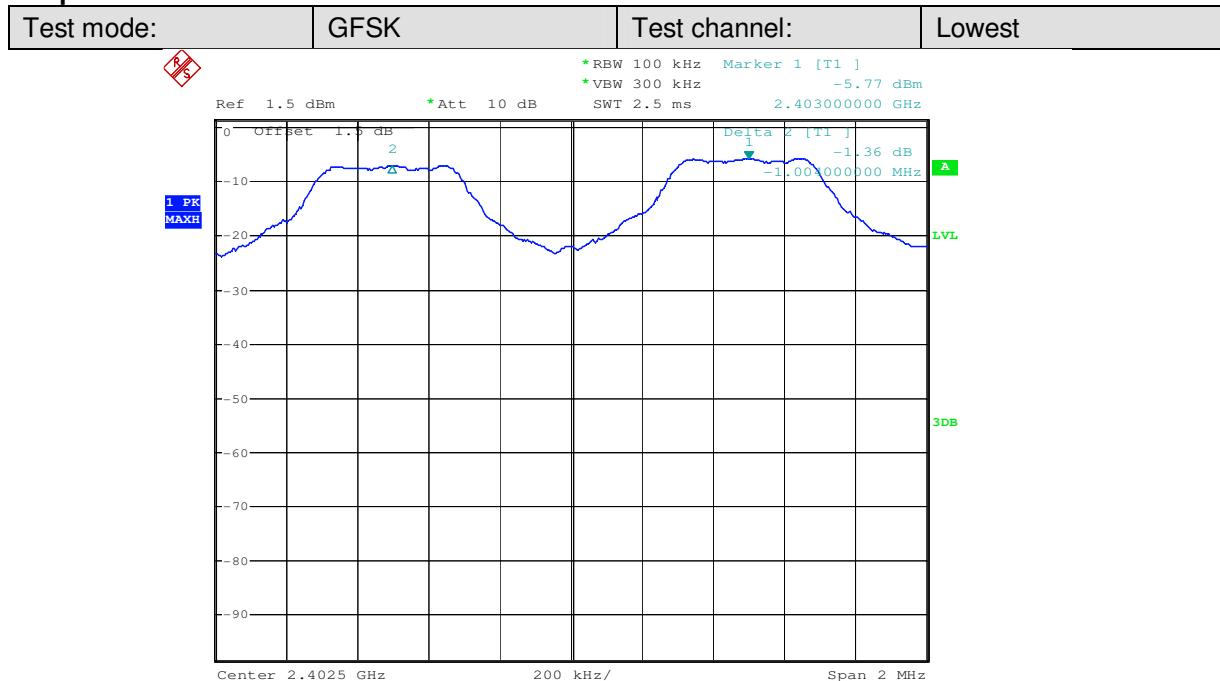**Test plot as follows:**


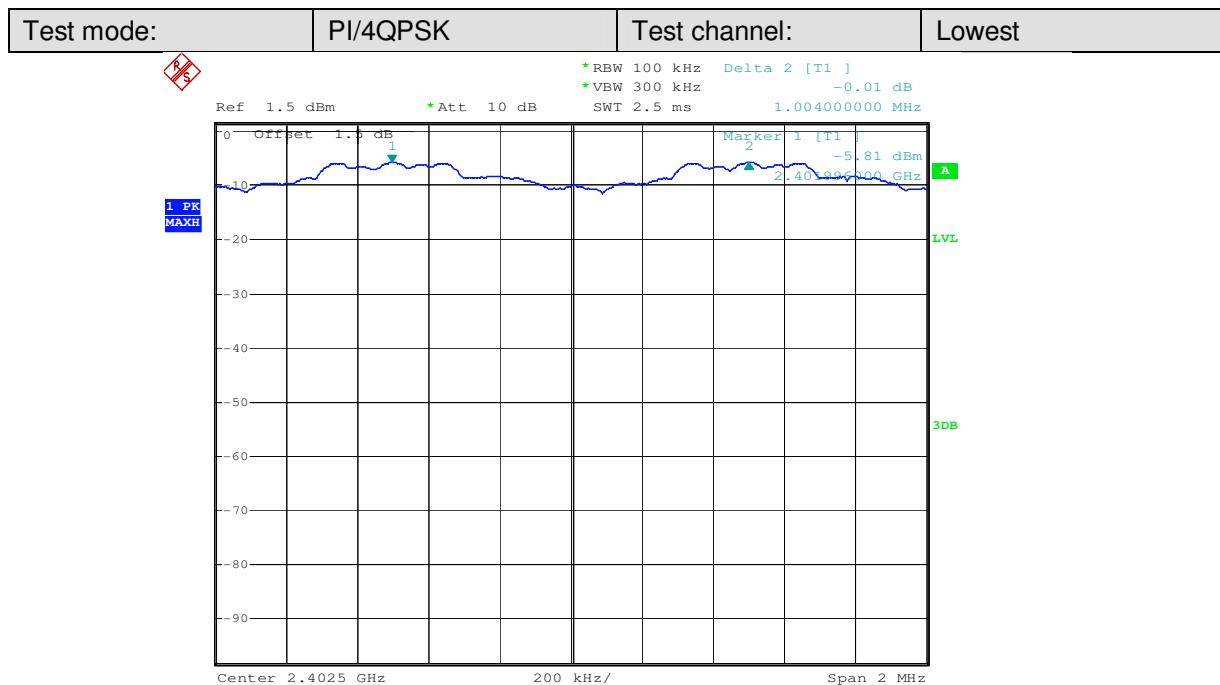
Date: 29.JUN.2010 12:46:55

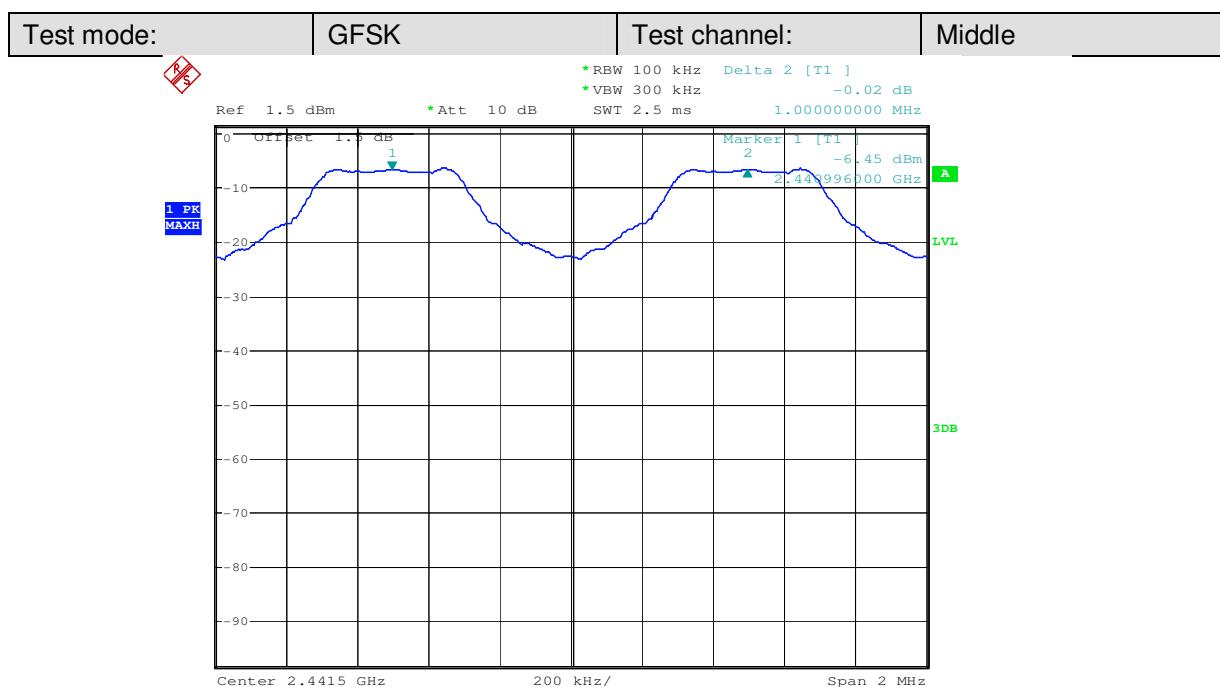


Date: 29.JUN.2010 13:01:34

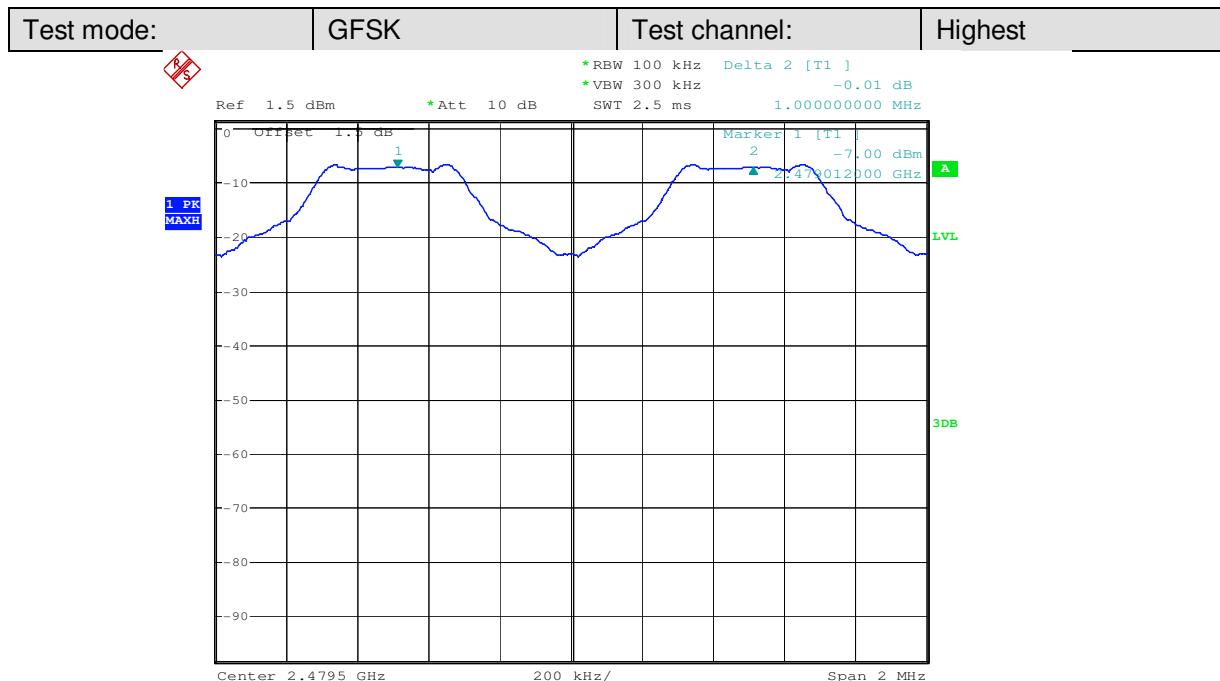


Date: 29.JUN.2010 13:22:56




Date: 29.JUN.2010 13:38:36

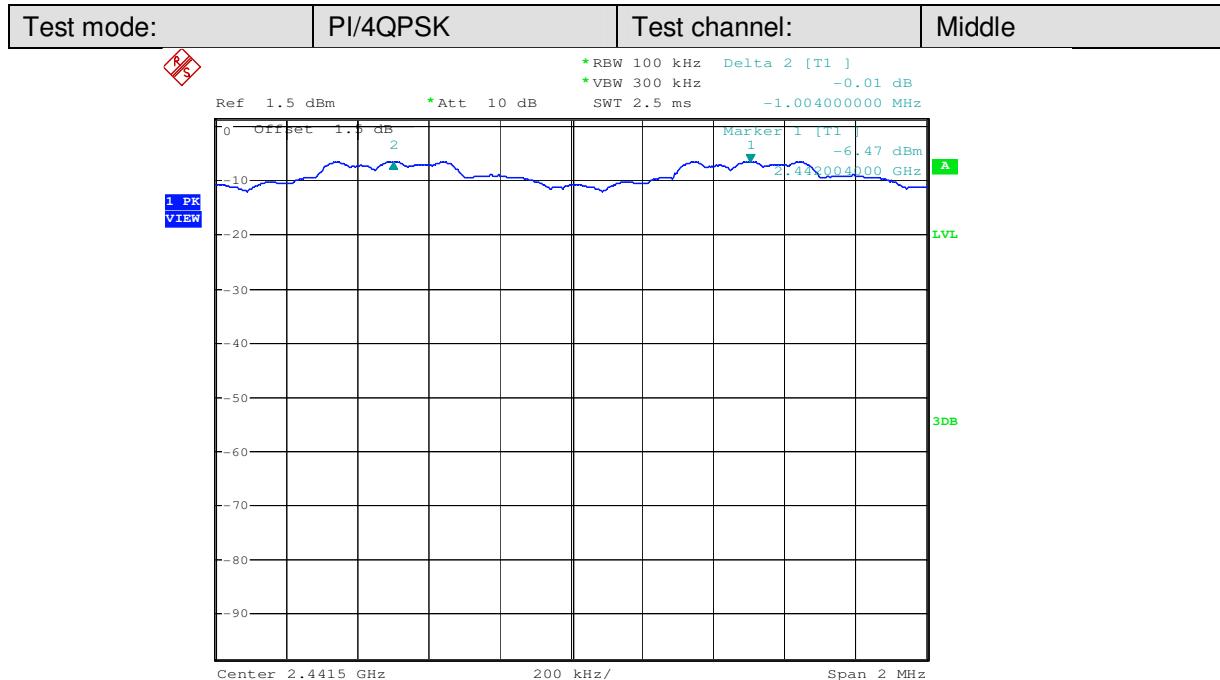


Date: 29.JUN.2010 14:27:34

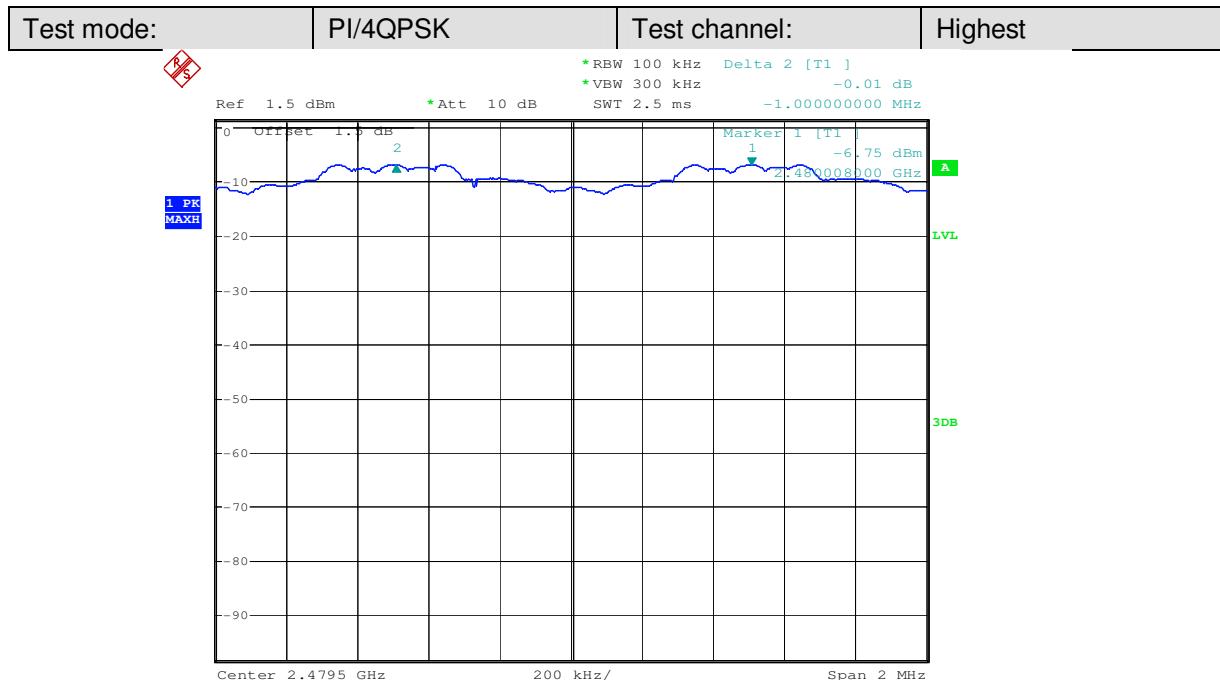


Date: 29.JUN.2010 14:35:41

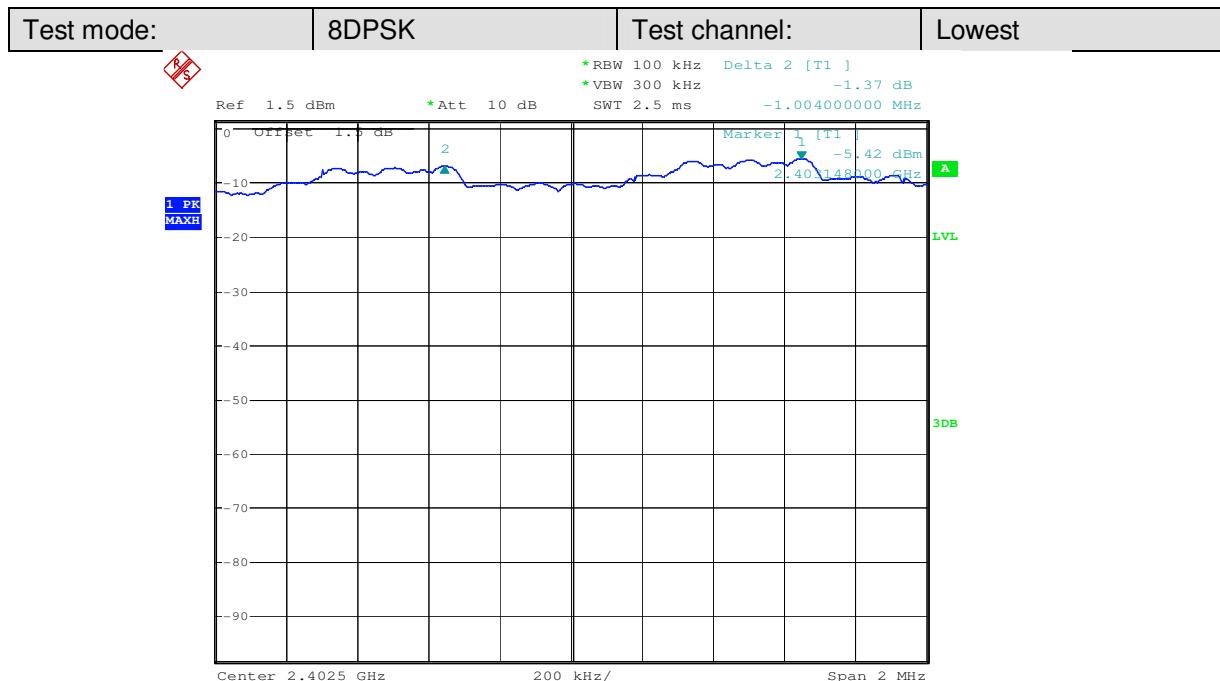

Date: 29.JUN.2010 14:44:53

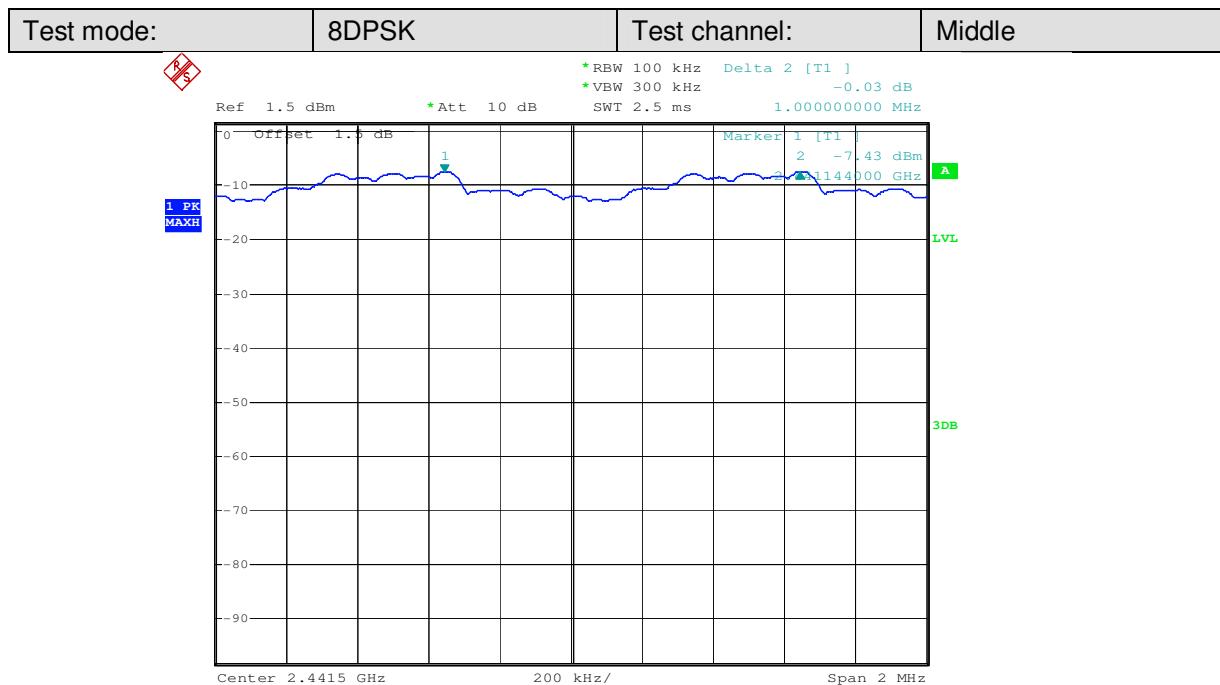


Date: 29.JUN.2010 14:52:43

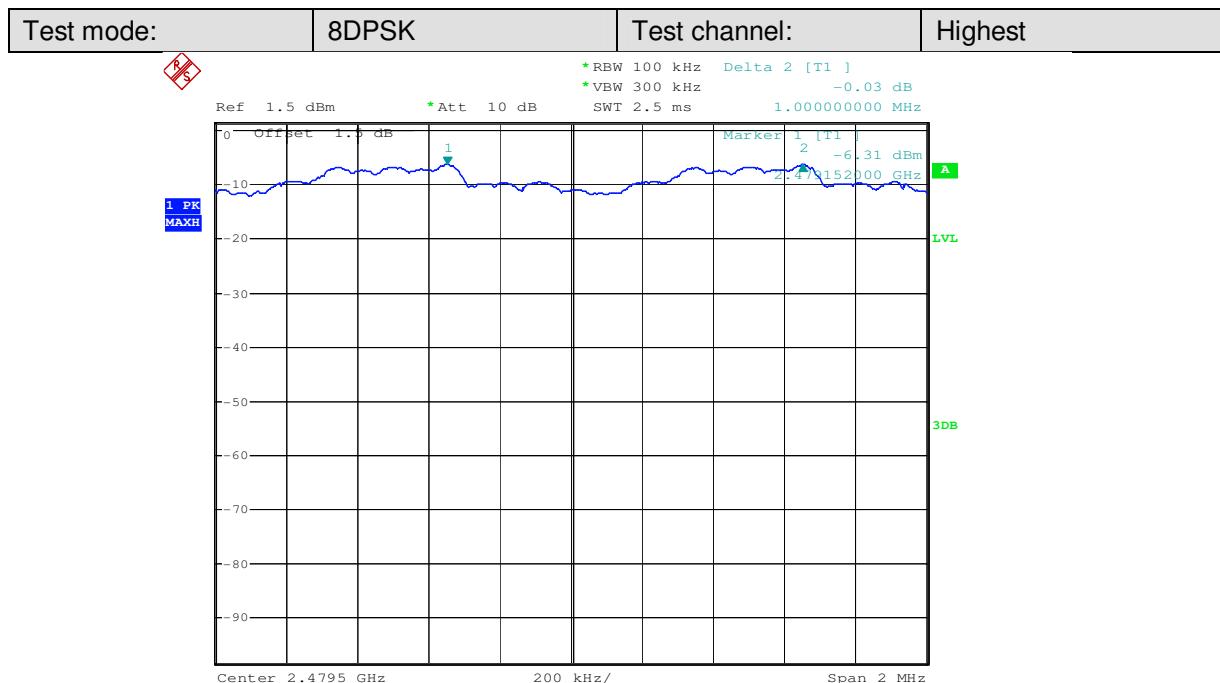


Date: 29.JUN.2010 15:16:48

## 5.7 Hopping Channel Number

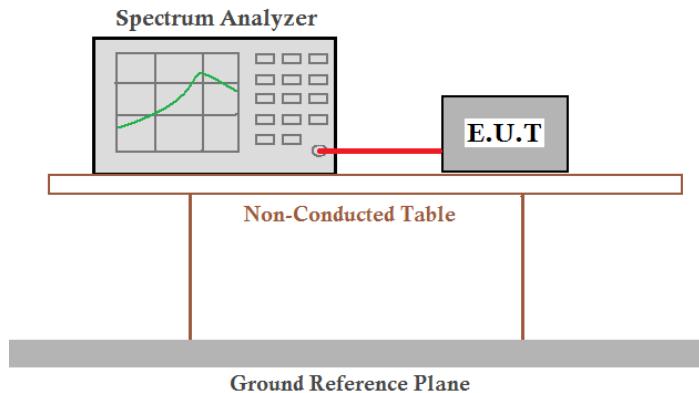
Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	75channels
Test setup:	
Test Instruments:	Refer to section 4.7 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

### Measurement Data


Mode	Hopping channel numbers	Limit
GFSK	79	75
Pi/4QPSK	79	75
8DPSK	79	75

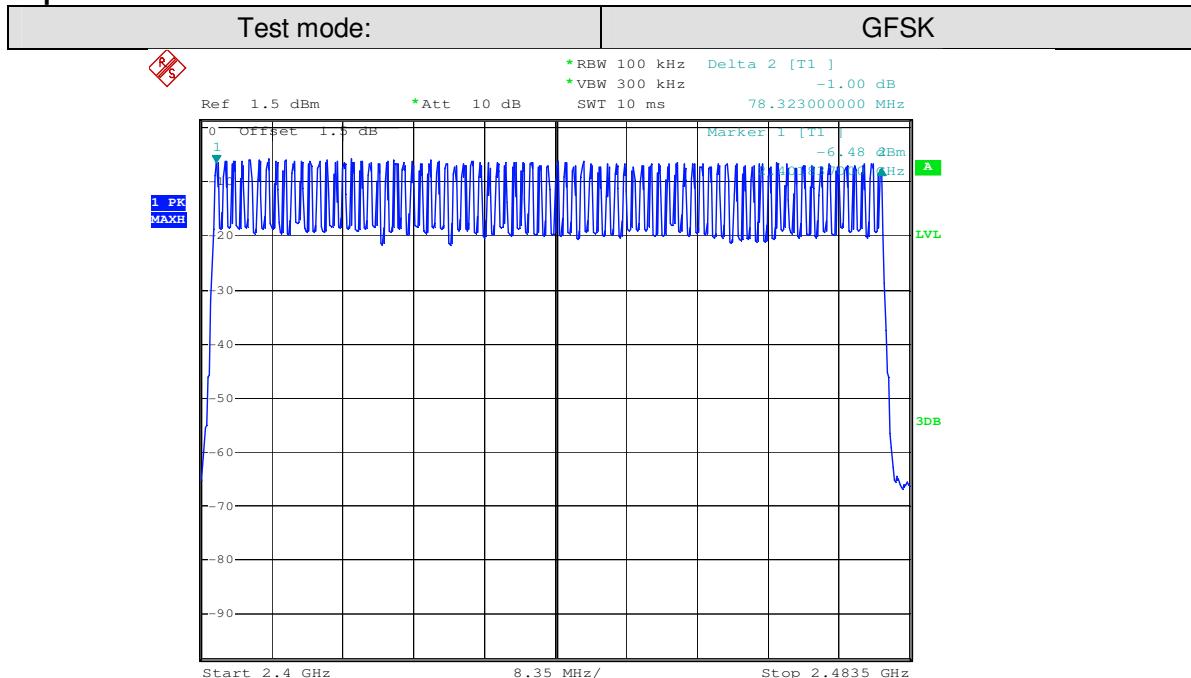**Test plot as follows**


Date: 29.JUN.2010 13:26:17

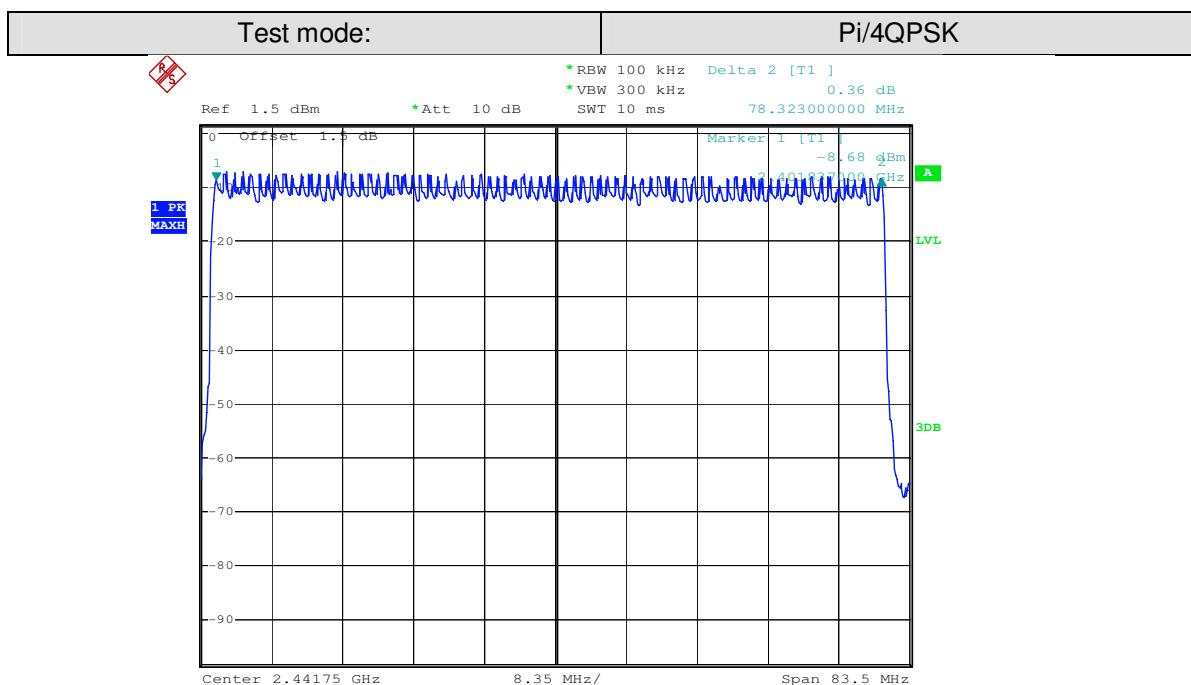


Date: 29.JUN.2010 13:30:34

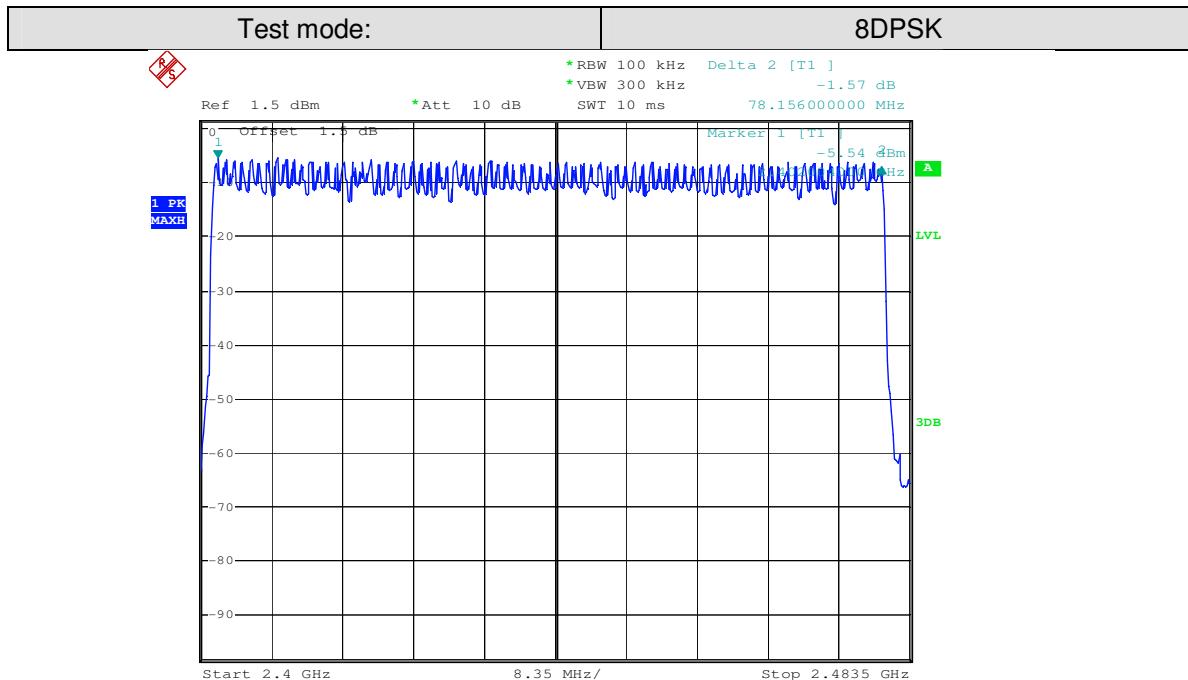

Date: 29.JUN.2010 15:19:24

## 5.8 Dwell Time

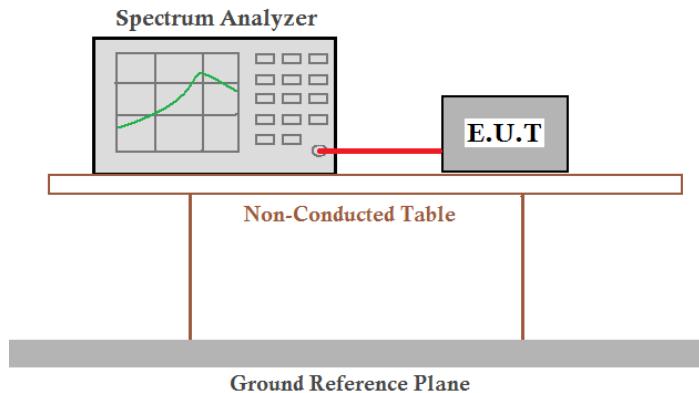Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 4.7 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

### Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1344	0.4
	DH3	0.2688	0.4
	DH5	0.3155	0.4
Pi/4QPSK	2-DH1	0.1344	0.4
	2-DH3	0.2688	0.4
	2-DH5	0.3155	0.4
8DPSK	3-DH1	0.1344	0.4
	3-DH3	0.2688	0.4
	3-DH5	0.3155	0.4

### Test Result:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ second}$


$$\text{DH1 time slot} = 0.42(\text{ms}) * (1600 / (2 * 79)) * 31.6 = 134.4\text{ms}$$

$$\text{DH3 time slot} = 1.680(\text{ms}) * (1600 / (4 * 79)) * 31.6 = 268.8\text{ms}$$

$$\text{DH5 time slot} = 2.96(\text{ms}) * (1600 / (6 * 79)) * 31.6 = 315.5\text{ms}$$


**Test plot as follows**

Test mode:	GFSK	Test Packet:	DH1
------------	------	--------------	-----

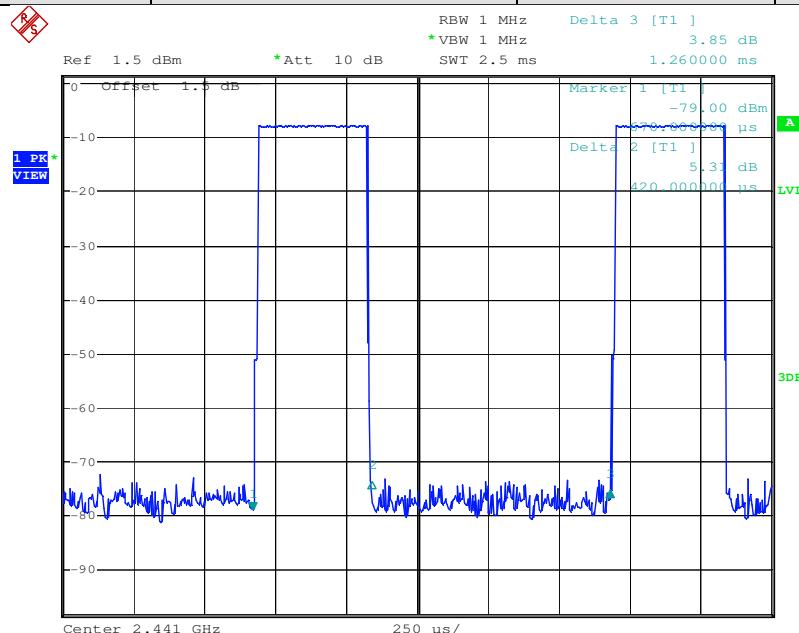


Date: 29.JUN.2010 13:06:38


Test mode:	GFSK	Test Packet:	DH3
------------	------	--------------	-----

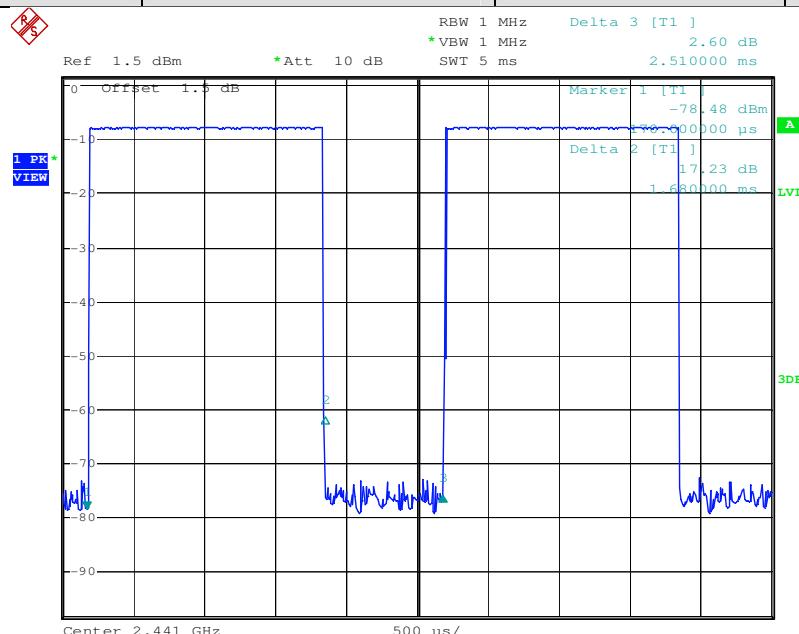

Date: 29.JUN.2010 13:07:59

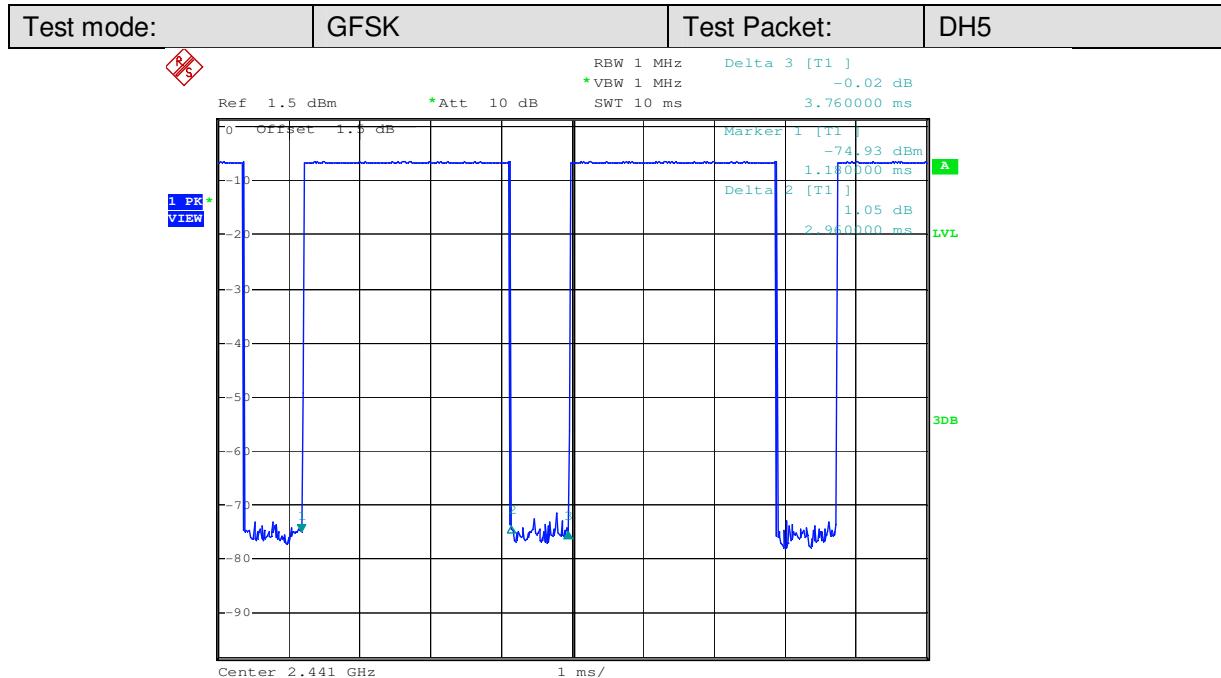


Date: 29.JUN.2010 13:08:45

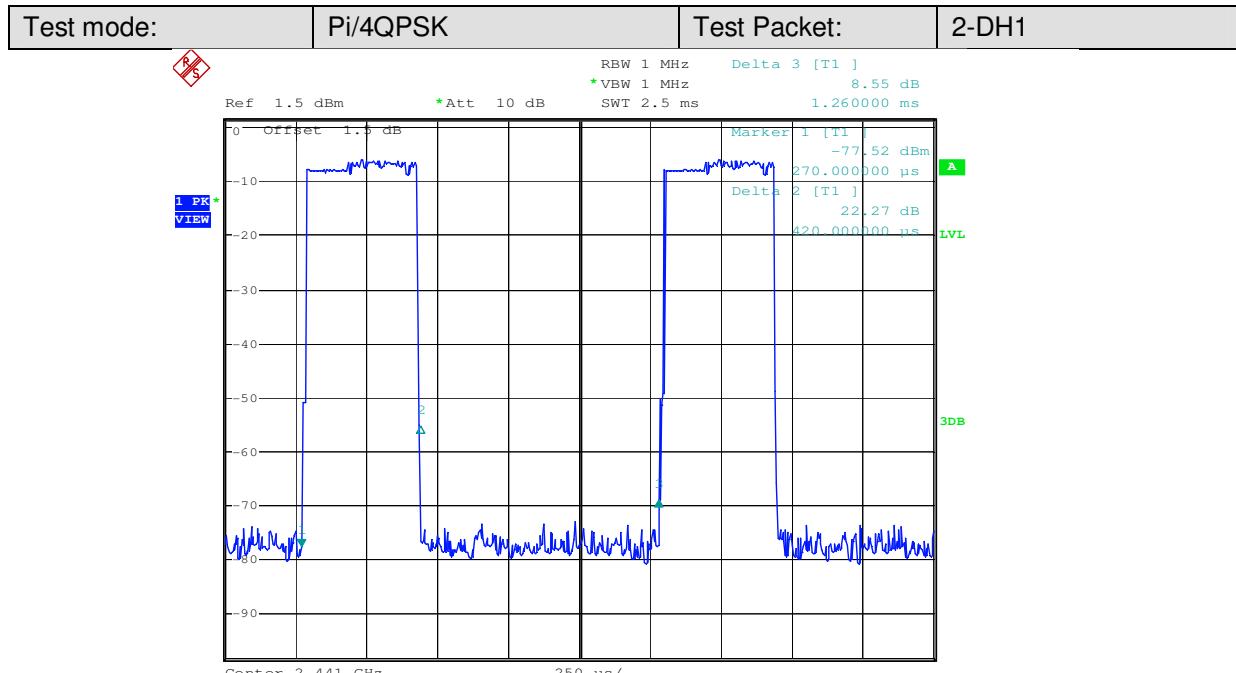


Date: 29.JUN.2010 14:28:17

Test mode:	Pi/4QPSK	Test Packet:	2-DH3
------------	----------	--------------	-------

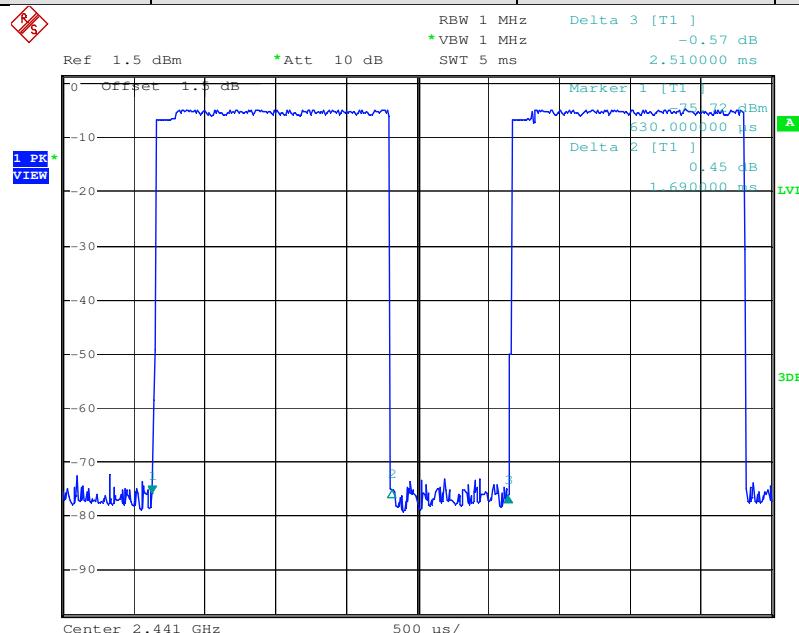


Date: 29.JUN.2010 14:29:07

Test mode:	Pi/4QPSK	Test Packet:	2-DH5
------------	----------	--------------	-------

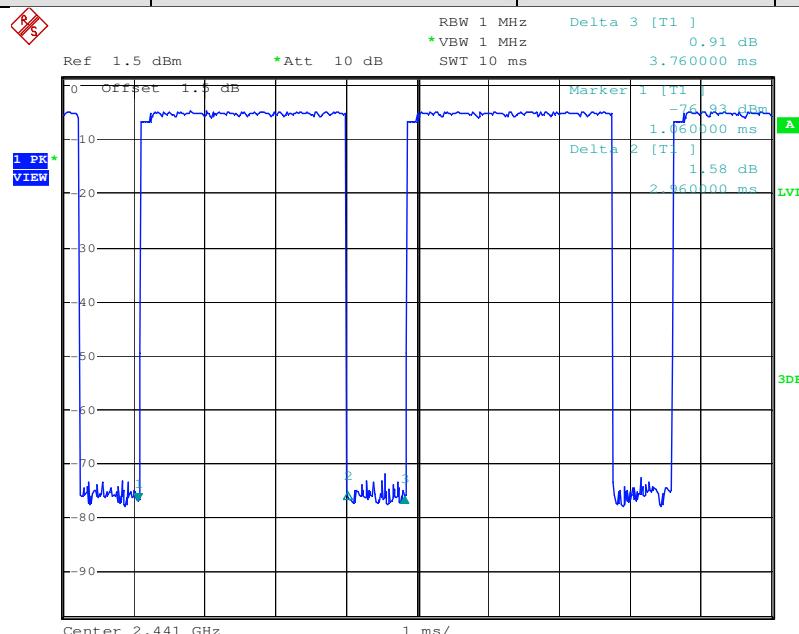


Date: 29.JUN.2010 14:29:49

Test mode:	8DPSK	Test Packet:	3-DH1
------------	-------	--------------	-------

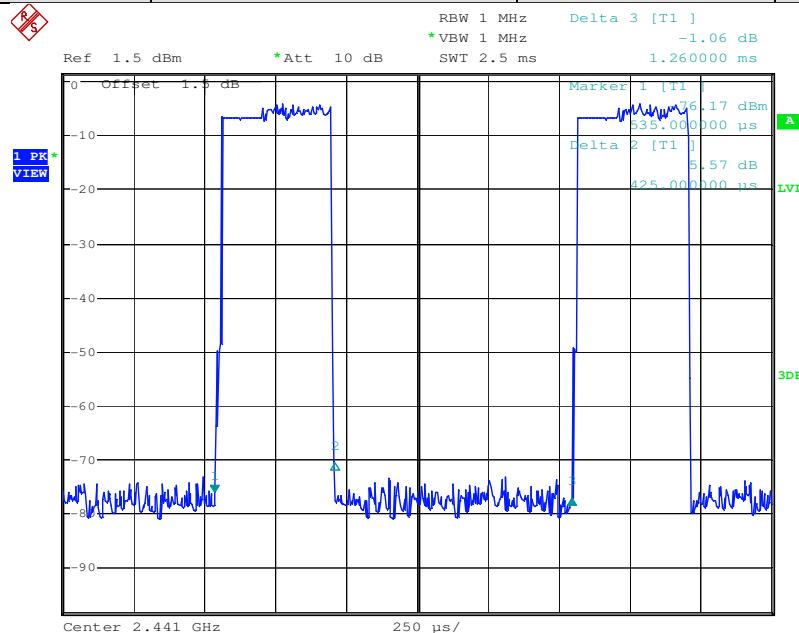


Date: 29.JUN.2010 15:00:14

Test mode:	8DPSK	Test Packet:	3-DH3
------------	-------	--------------	-------

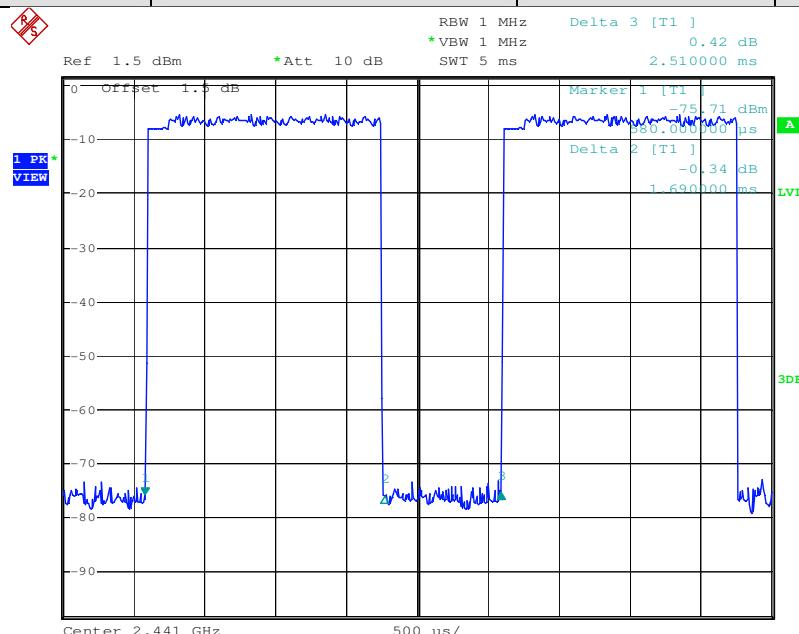


Date: 29.JUN.2010 15:00:58

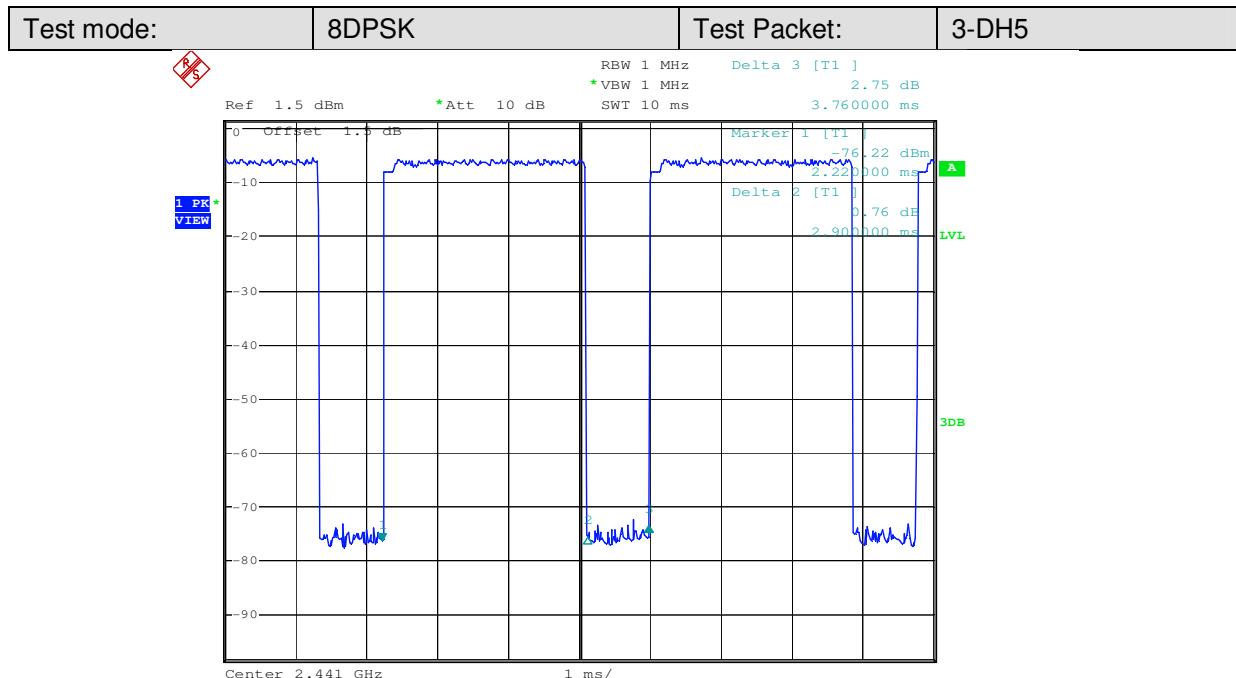


Date: 29.JUN.2010 15:01:37

## 5.9 Band Edge

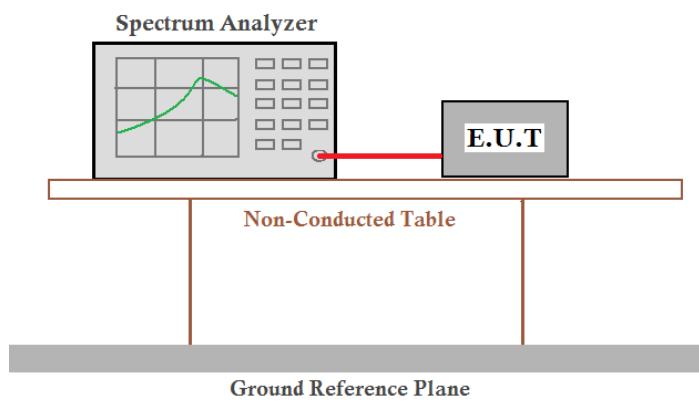
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.7 for details
Test state:	Hopping transmitting with all kinds of modulation.
Test results:	Pass

**Test plot as follows:**

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

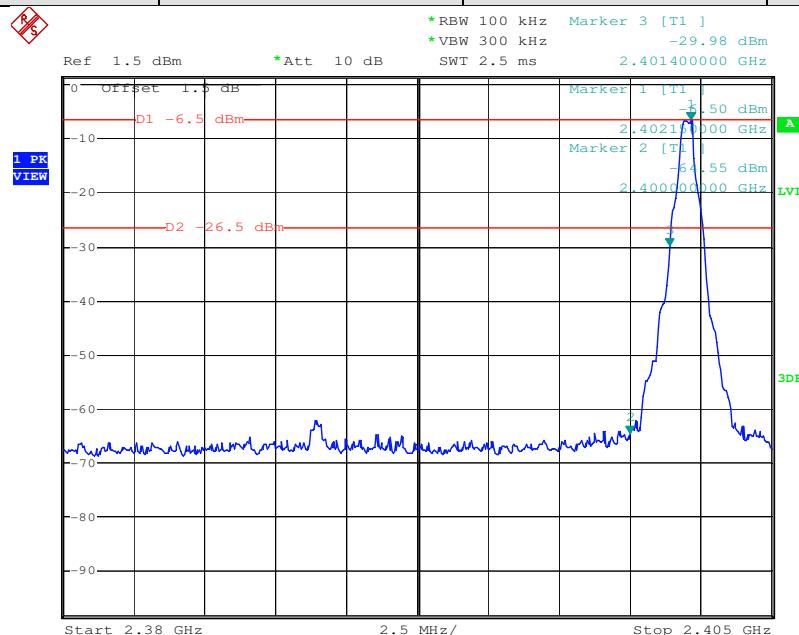


Date: 29.JUN.2010 12:44:15

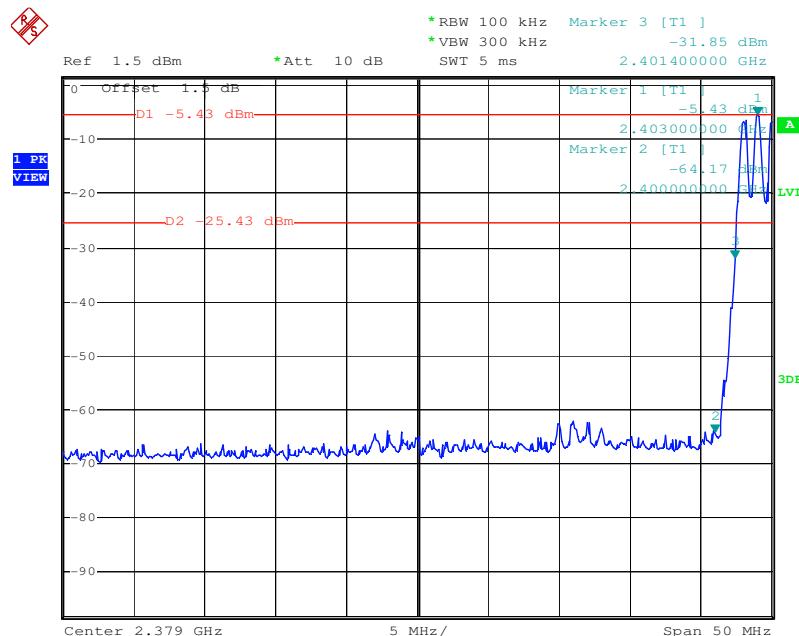


Date: 29.JUN.2010 12:48:46

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

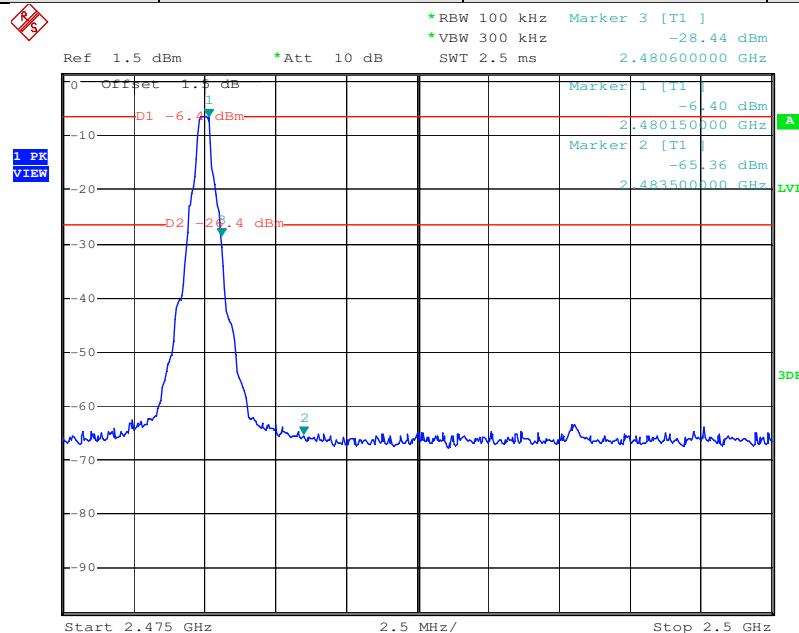


Date: 29.JUN.2010 13:16:26

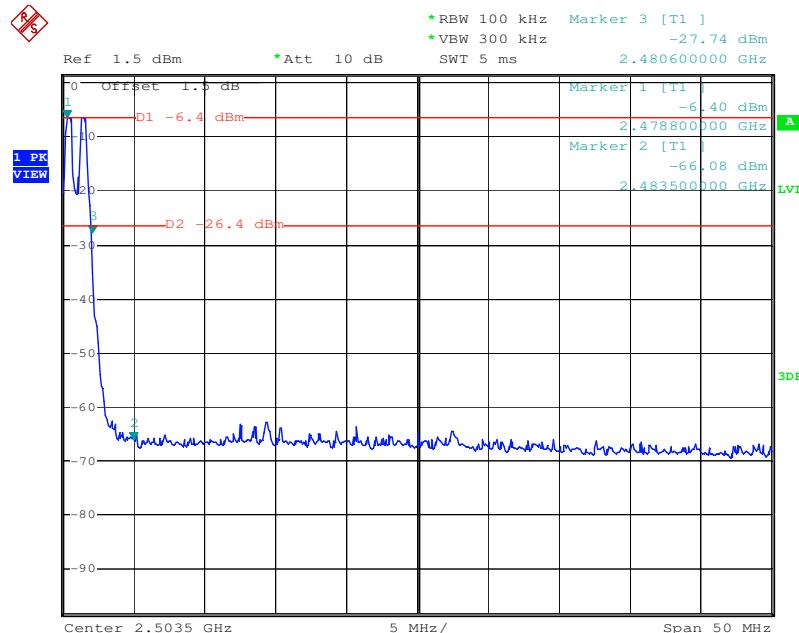


Date: 29.JUN.2010 13:24:26

Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

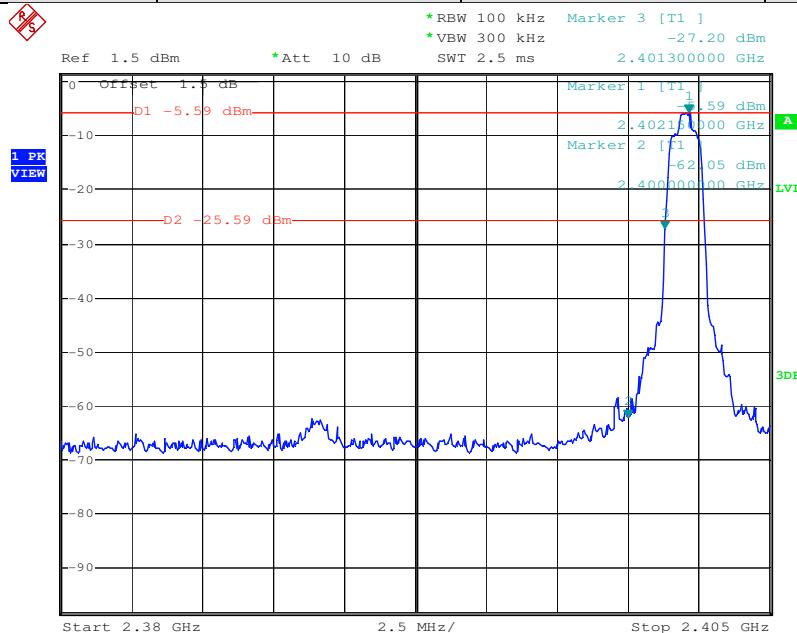


Date: 29.JUN.2010 13:36:08

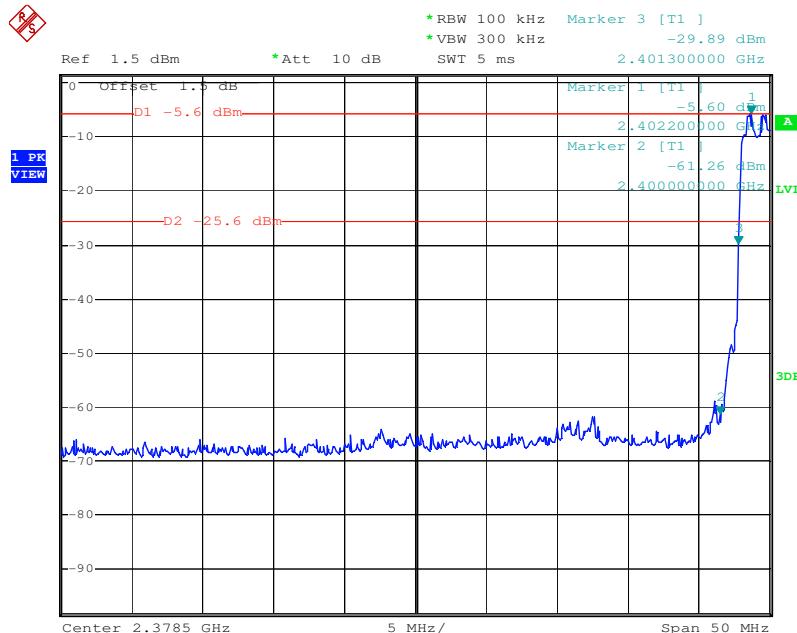


Date: 29.JUN.2010 13:40:36

Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

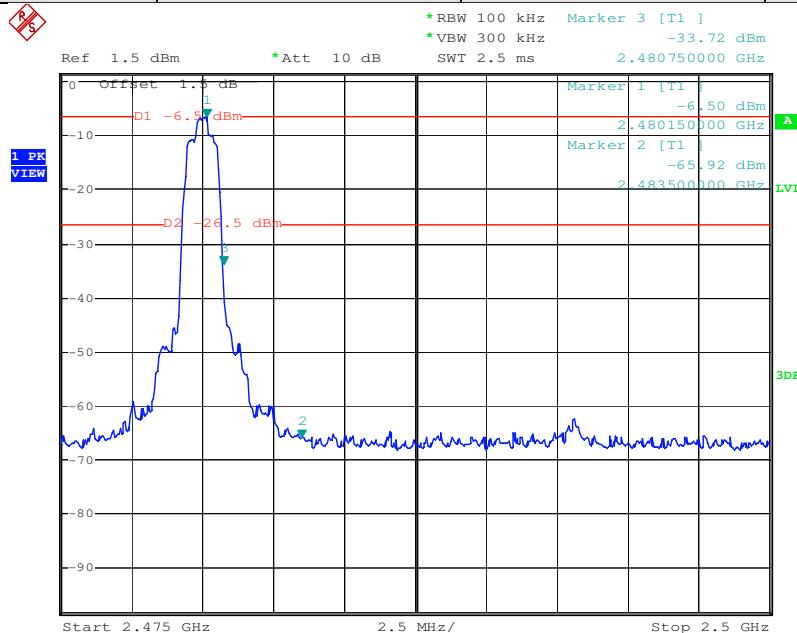


Date: 29.JUN.2010 14:33:59

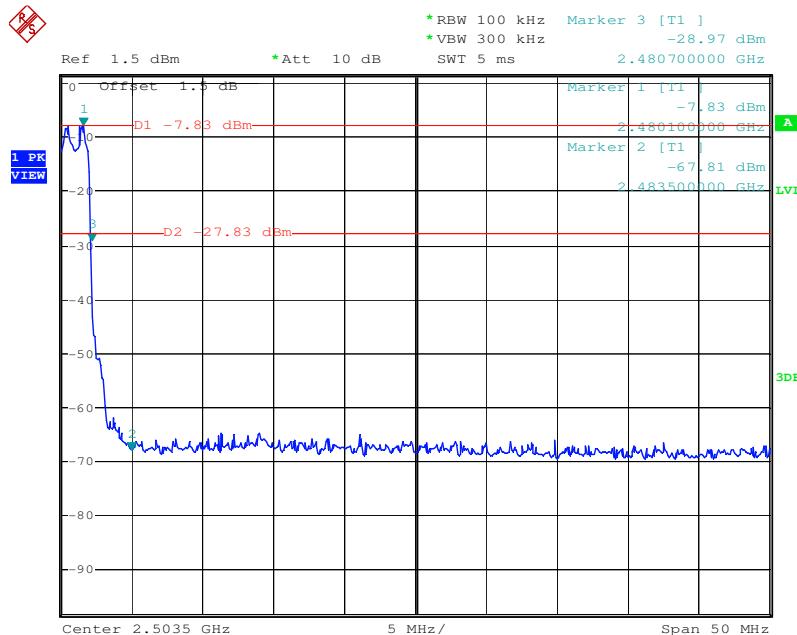


Date: 29.JUN.2010 14:37:36

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

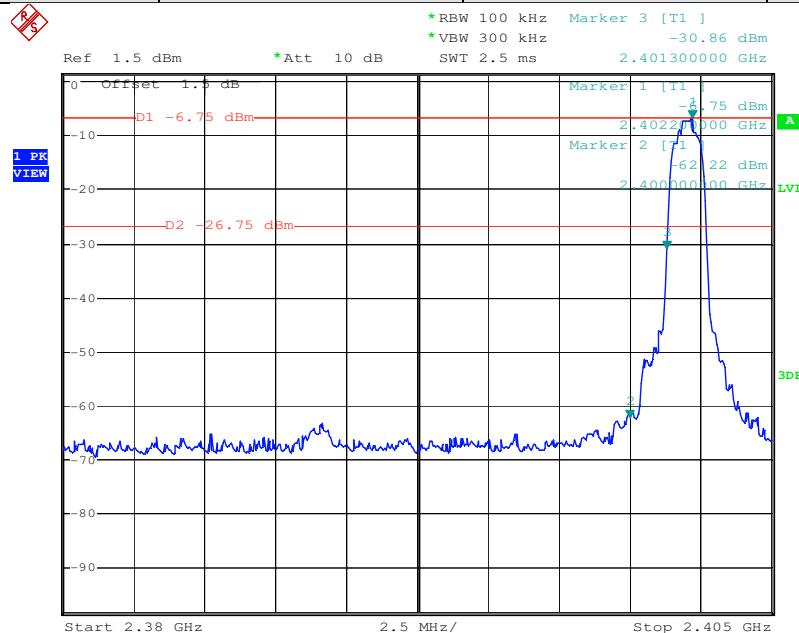


Date: 29.JUN.2010 14:48:45

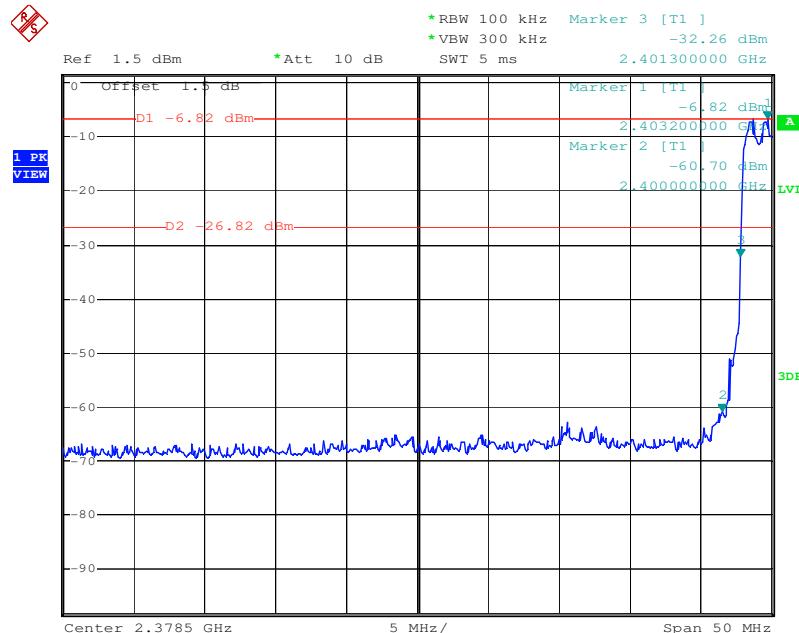


Date: 29.JUN.2010 14:46:21

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

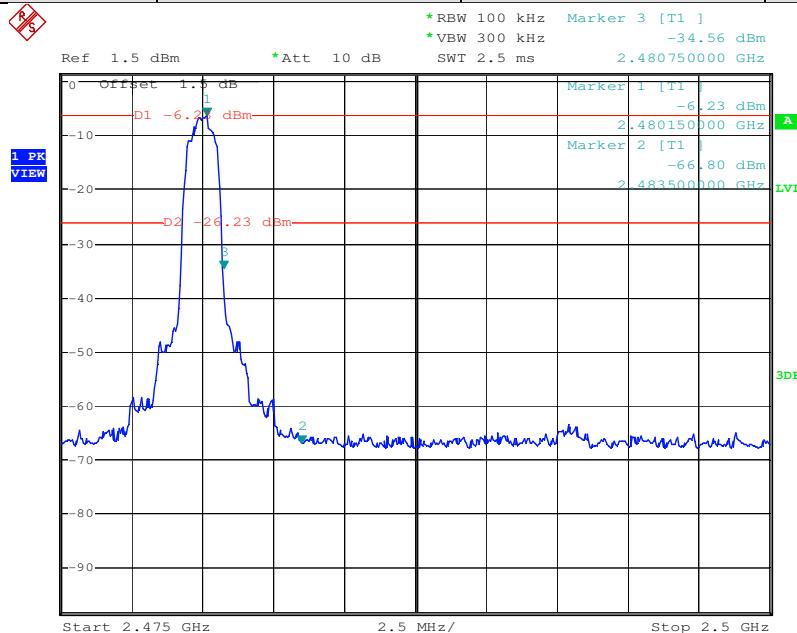


Date: 29.JUN.2010 15:12:15

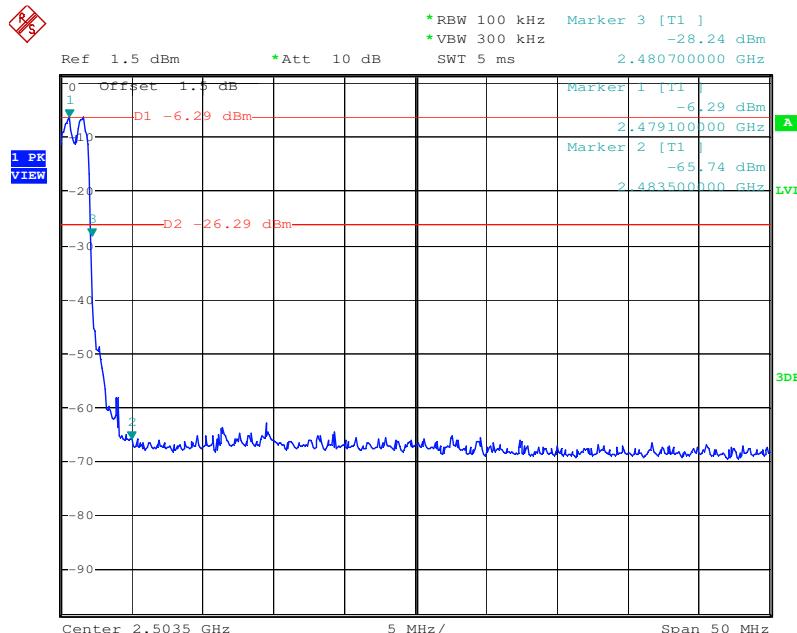


Date: 29.JUN.2010 15:14:17


## 5.10 RF Antenna Conducted spurious emissions

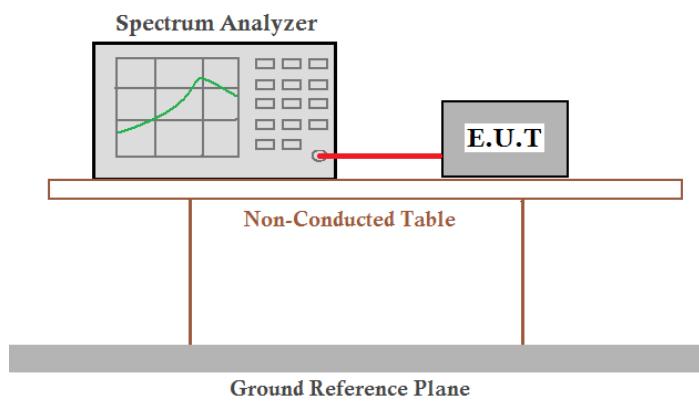Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><b>Spectrum Analyzer</b> Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.7 for details
Test results:	Pass

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

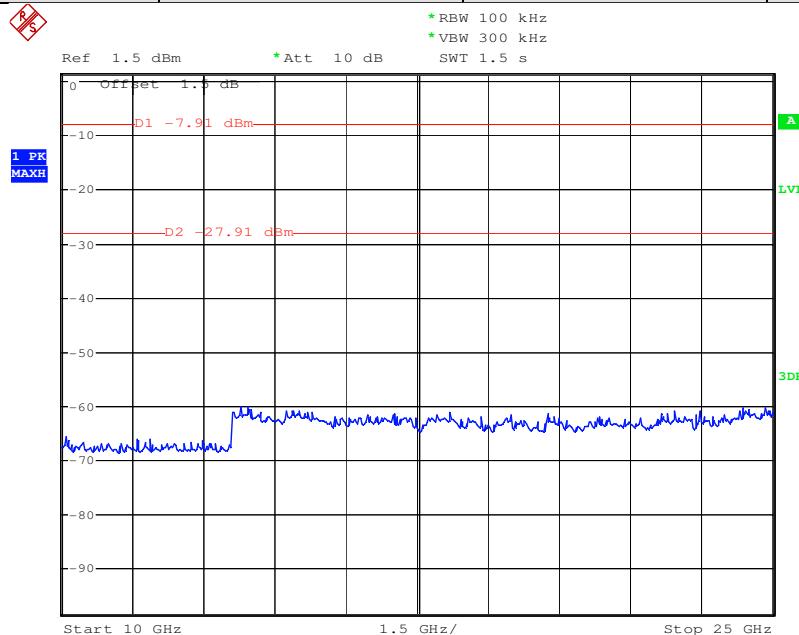


Date: 29.JUN.2010 12:45:40

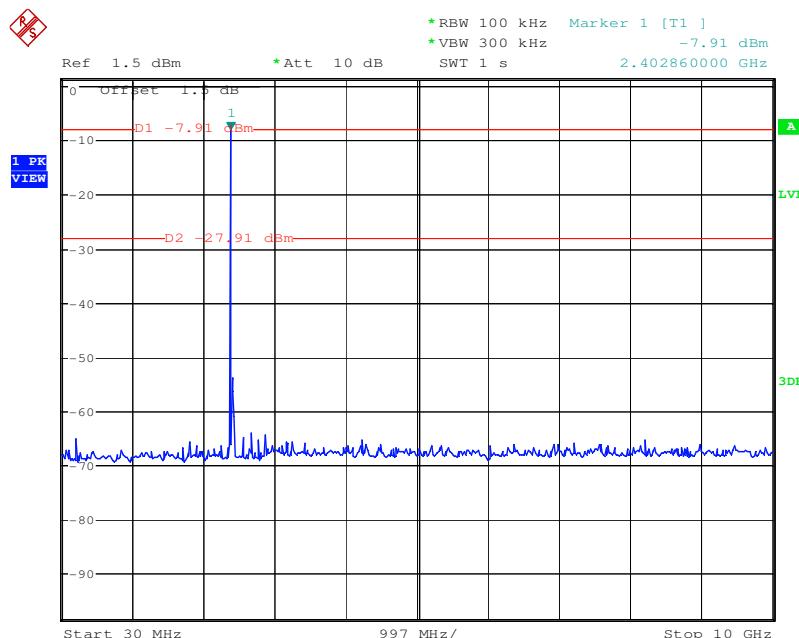


Date: 29.JUN.2010 12:45:20

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

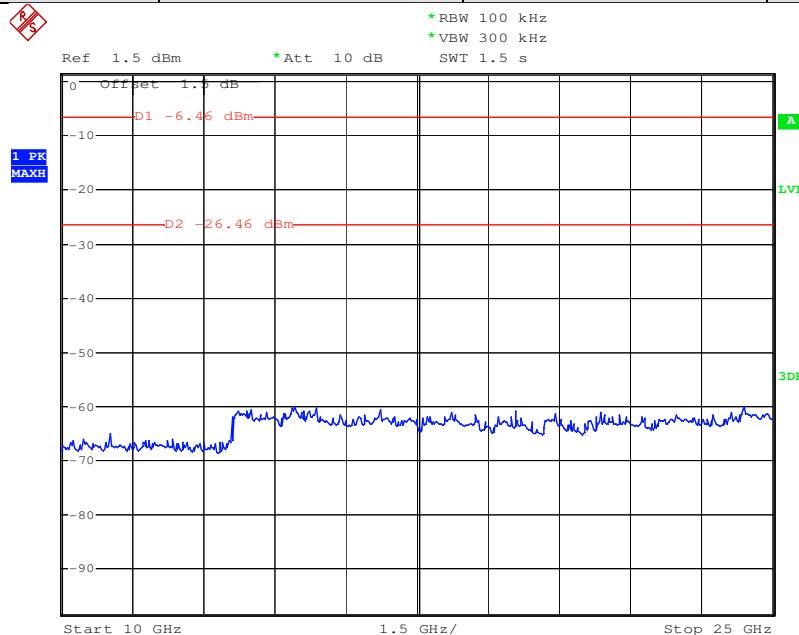


Date: 29.JUN.2010 13:00:12

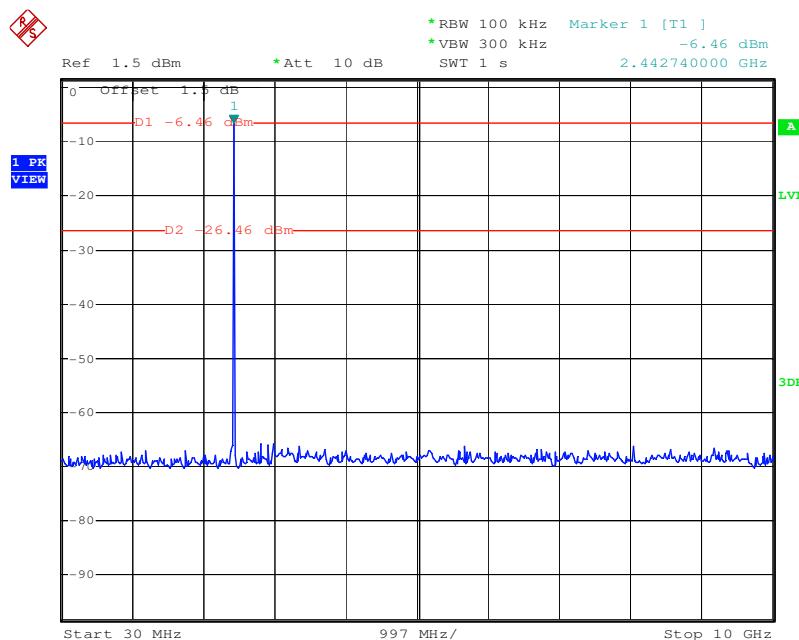


Date: 29.JUN.2010 12:59:50


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

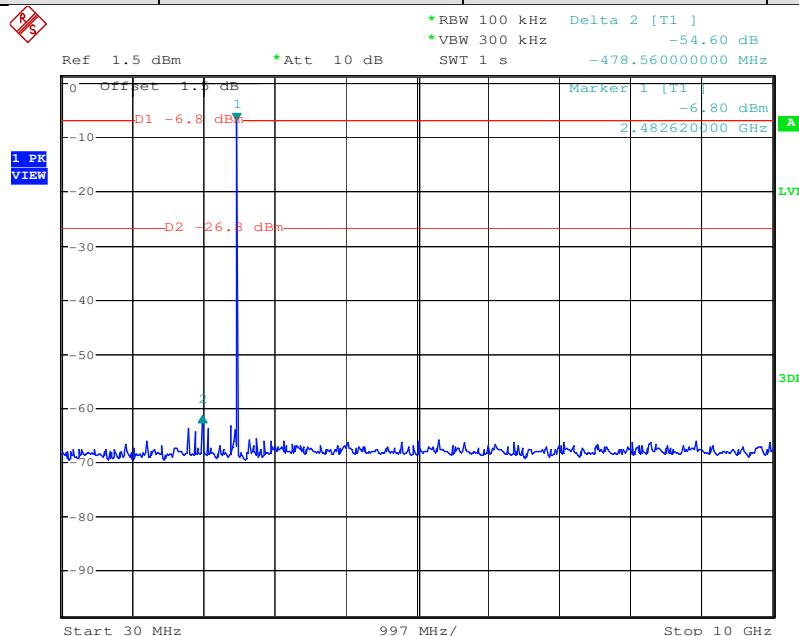


Date: 29.JUN.2010 13:19:07

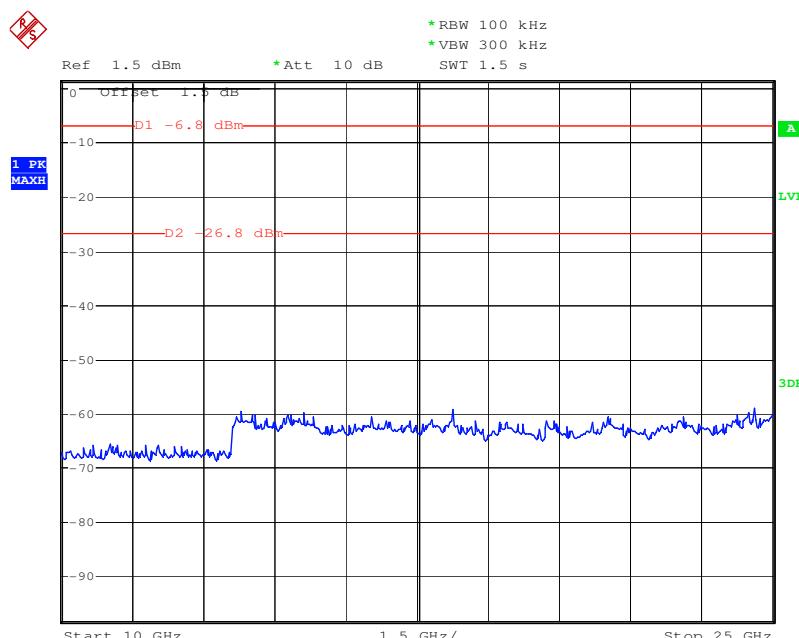

Date: 29.JUN.2010 13:19:34

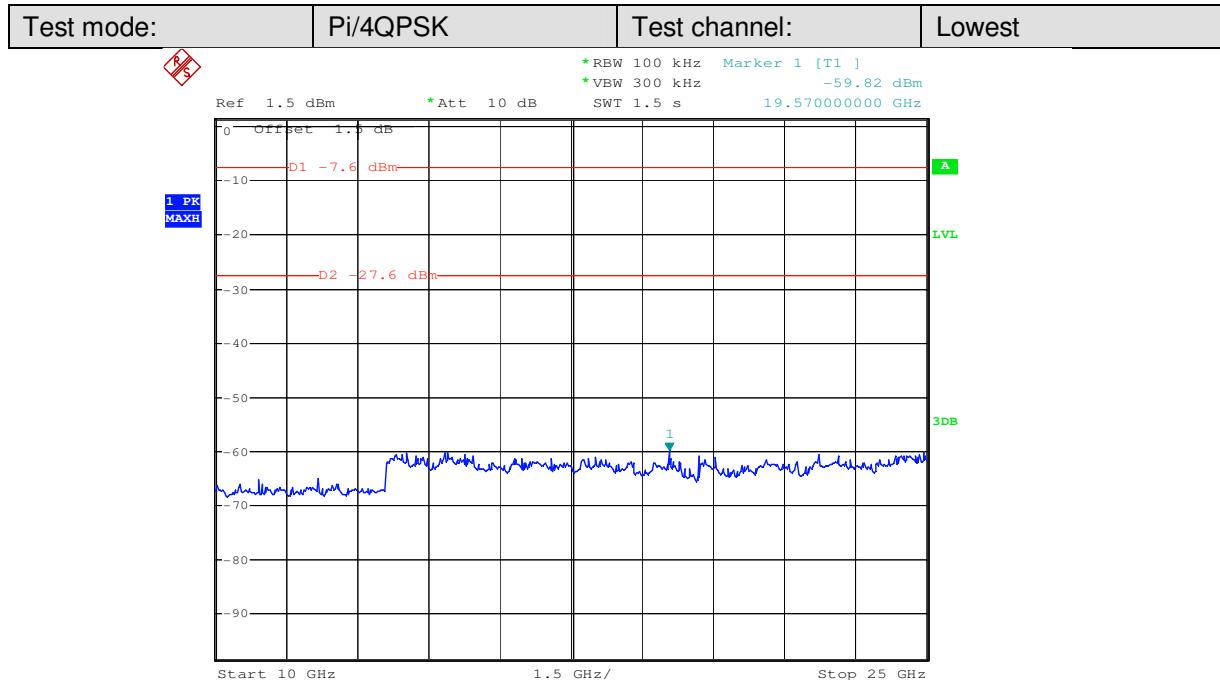


Date: 29.JUN.2010 14:12:37

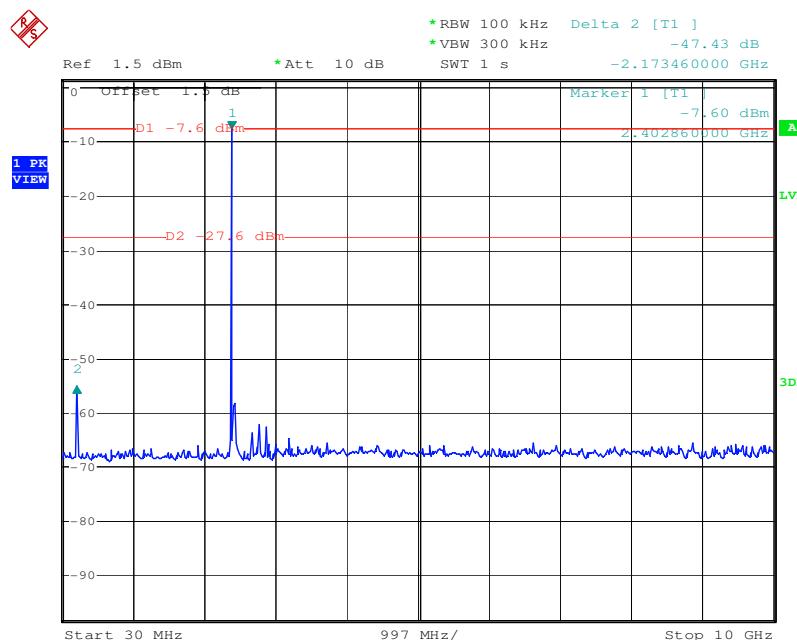


Date: 29.JUN.2010 14:12:13

Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

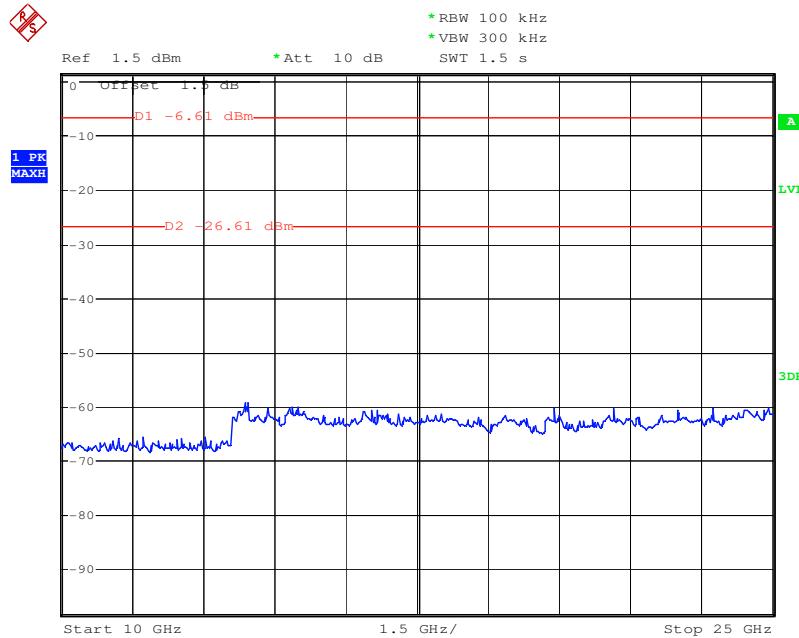


Date: 29.JUN.2010 14:25:25

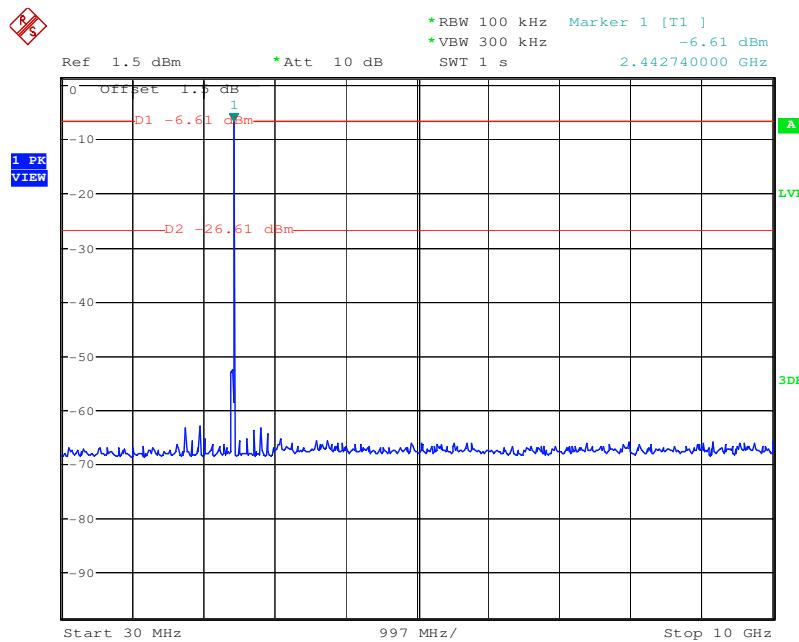


Date: 29.JUN.2010 14:24:58

Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

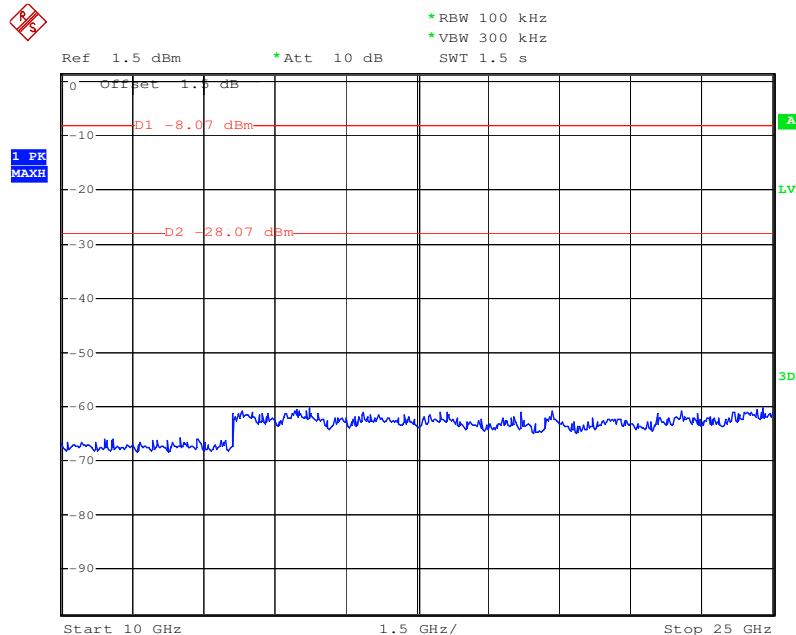


Date: 29.JUN.2010 14:39:54

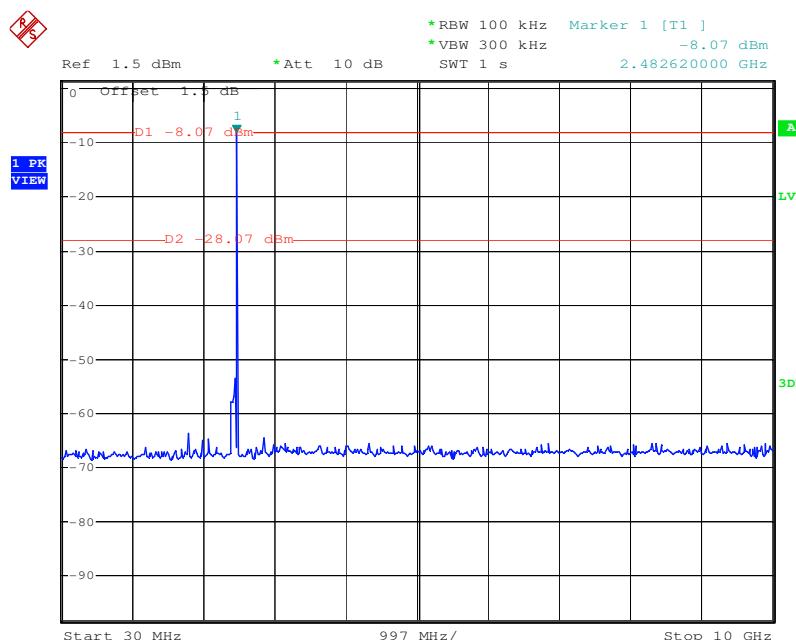


Date: 29.JUN.2010 14:39:33

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

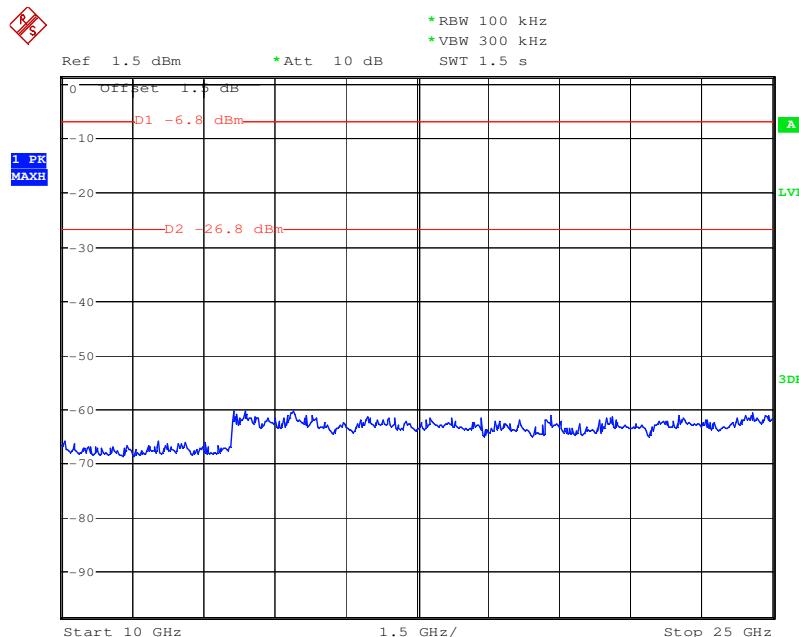


Date: 29.JUN.2010 14:47:36

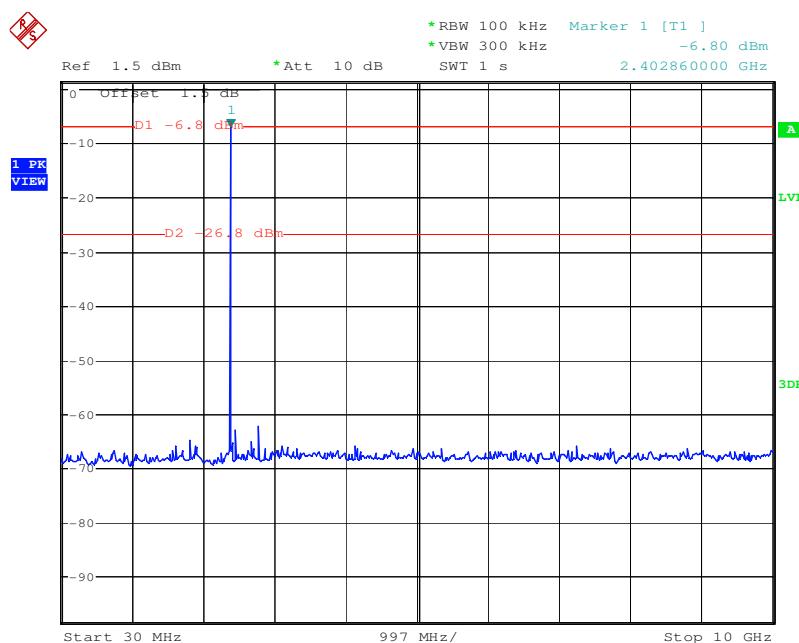


Date: 29.JUN.2010 14:47:16

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

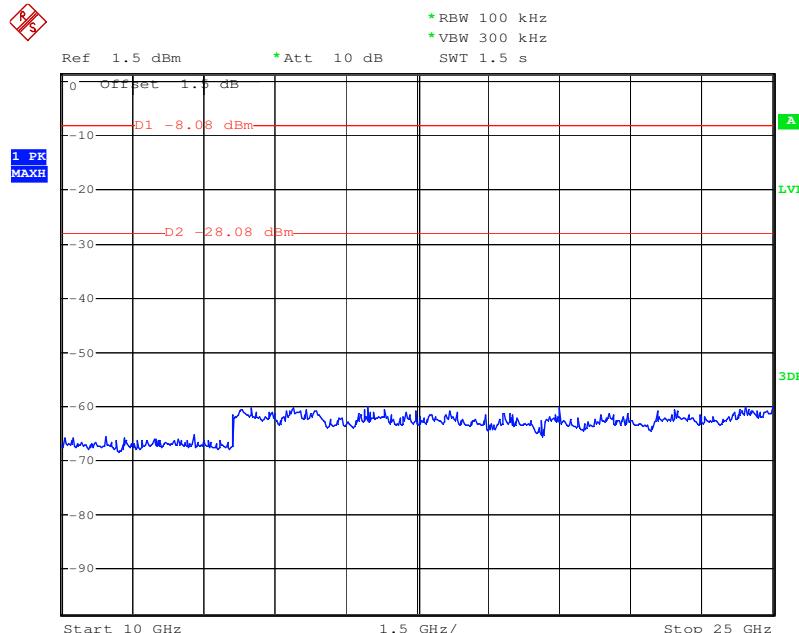


Date: 29.JUN.2010 14:57:11

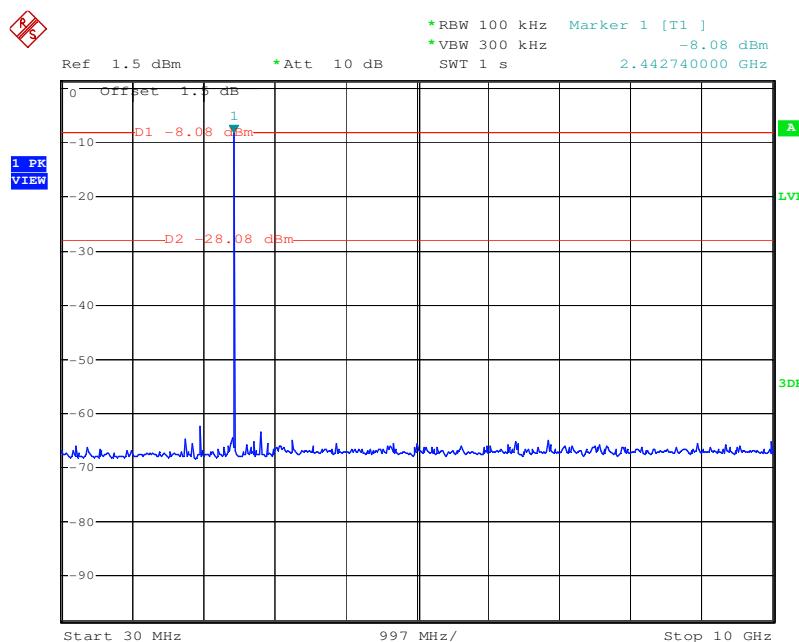


Date: 29.JUN.2010 14:56:32

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

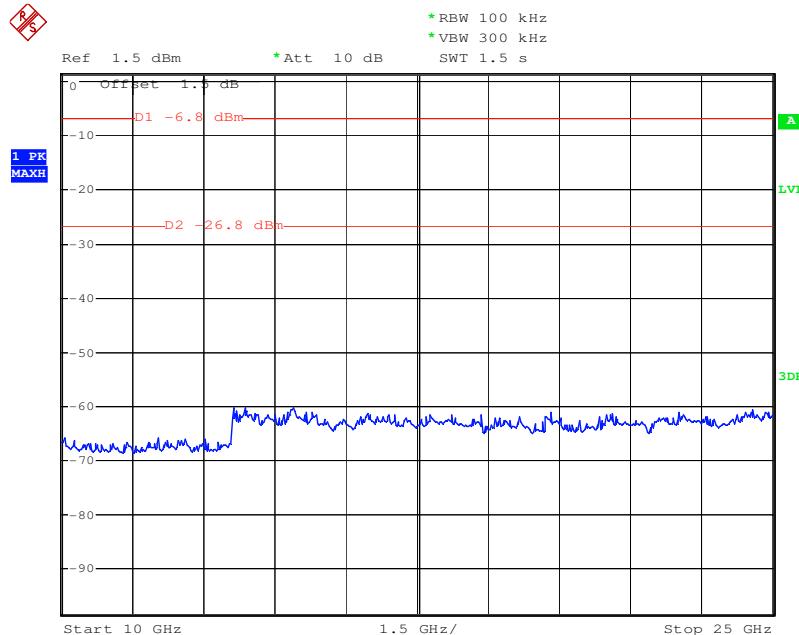


Date: 29.JUN.2010 14:47:36

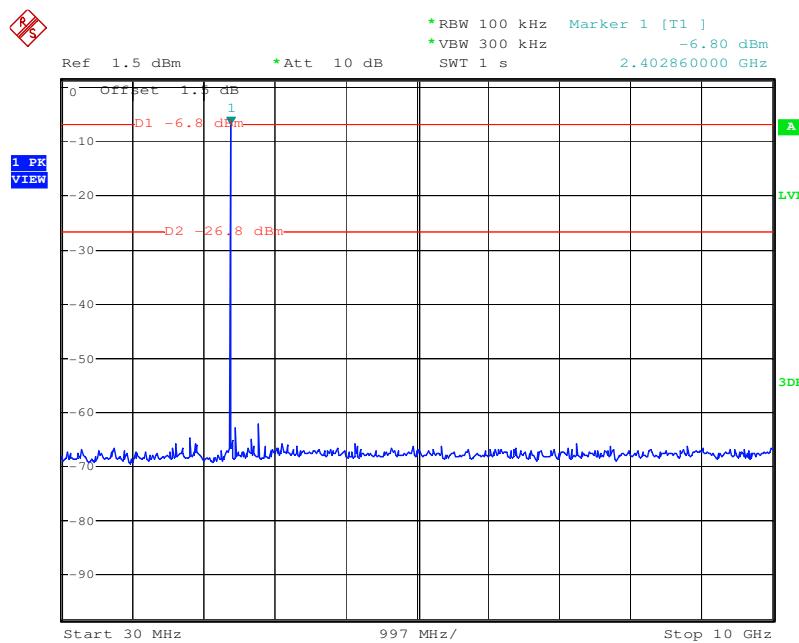


Date: 29.JUN.2010 14:47:16

## 5.11 Pseudorandom Frequency Hopping Sequence

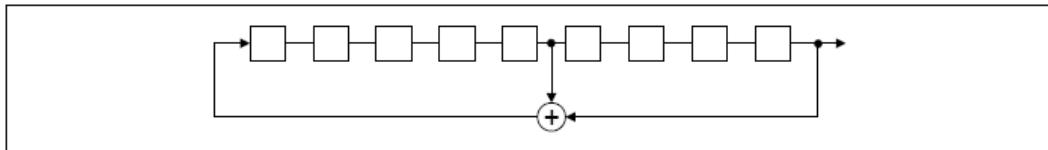Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
<b>EUT Pseudorandom Frequency Hopping Sequence</b>																							
	<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"><li>• Number of shift register stages: 9</li><li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li><li>• Longest sequence of zeros: 8 (non-inverted signal)</li></ul>																						
																							
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table><tr><td>0</td><td>2</td><td>4</td><td>6</td><td>62</td><td>64</td><td>78</td><td>1</td><td>73</td><td>75</td><td>77</td></tr><tr><td> </td><td> </td></tr></table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>		0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													

## 5.12 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205/15.109																								
Test Method:	ANSI C63.4: 2003 and KDB DA00-705																								
Test Frequency Range:	30MHz to 25GHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>74.0</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>																								
Test Instruments:	Refer to section 4.7 for details																								
Test mode:	Non-hopping transmitting with modulation. 1. Pre-scan the EUT in GFSK, Pi/4QPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. AC charge+ Bluetooth mode, DC charge+ Bluetooth mode, Bluetooth, AC charge mode, DC charge mode, Transmitting mode. Pre-scan was performed on the EUT on above all modes, and then found the charge mode was the worse case. Only the worst case mode and Bluetooth mode data was displayed.																								
Test results:	Pass																								

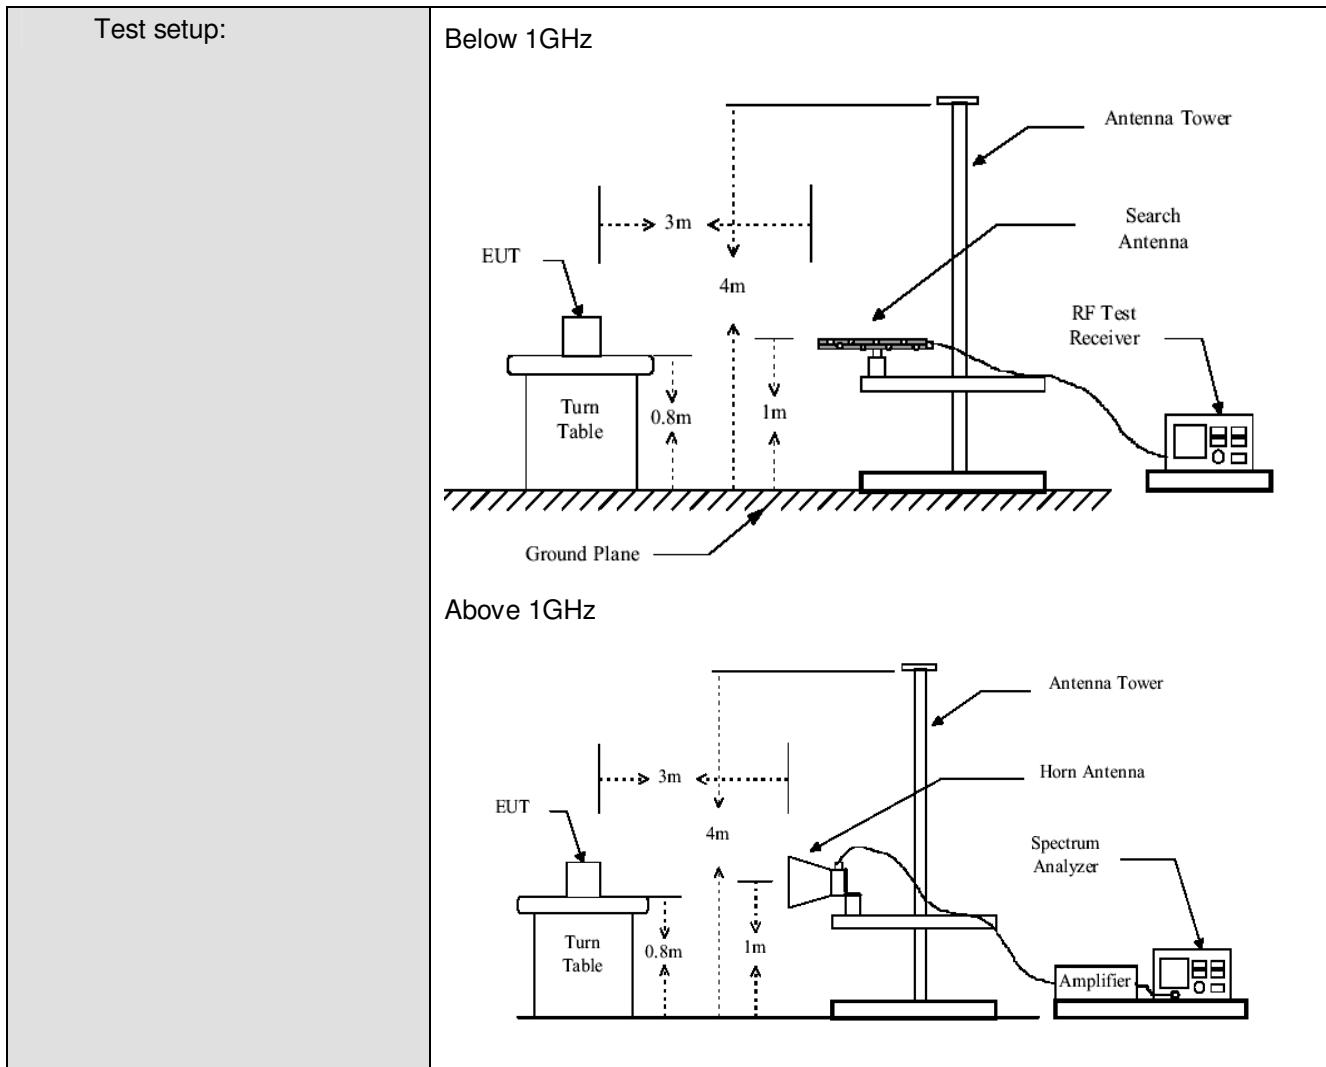
**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

### 5.11.1 Radiated emission below 1GHz

For origin report SZEMO10080488601


#### Bluetooth mode

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.880	0.60	13.51	28.15	29.90	15.86	40.00	-24.14	Vertical
66.860	0.80	6.99	28.01	34.35	14.13	40.00	-25.87	Vertical
113.420	1.24	8.36	27.74	31.50	13.36	43.50	-30.14	Vertical
288.020	1.85	13.40	26.76	30.51	19.00	46.00	-27.00	Vertical
685.720	2.87	21.50	27.32	31.91	28.96	46.00	-17.04	Vertical
971.870	3.67	23.90	26.44	32.30	33.43	54.00	-20.57	Vertical
33.880	0.60	13.47	28.15	29.50	15.42	40.00	-24.58	Horizontal
101.780	1.21	9.00	27.86	31.00	13.35	43.50	-30.15	Horizontal
250.190	1.68	12.30	26.91	30.02	17.09	46.00	-28.91	Horizontal
401.510	2.21	16.31	27.42	31.32	22.42	46.00	-23.58	Horizontal
673.110	2.85	21.40	27.37	31.95	28.83	46.00	-17.17	Horizontal
974.780	3.68	24.00	26.44	32.35	33.59	54.00	-20.41	Horizontal


#### AC Charge mode

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
31.940	0.60	14.43	28.17	34.00	20.86	40.00	-19.14	Vertical
47.460	0.75	8.72	28.11	38.40	19.76	40.00	-20.24	Vertical
82.380	1.10	7.95	27.99	32.90	13.96	40.00	-26.04	Vertical
257.950	1.71	12.47	26.88	31.82	19.12	46.00	-26.88	Vertical
533.430	2.64	18.65	27.68	31.41	25.02	46.00	-20.98	Vertical
987.390	3.69	24.17	26.44	32.19	33.61	54.00	-20.39	Vertical
31.940	0.60	14.31	28.17	29.65	16.39	40.00	-23.61	Horizontal
87.230	1.10	8.45	27.96	31.38	12.97	40.00	-27.03	Horizontal
163.860	1.34	9.56	27.36	31.26	14.80	43.50	-28.70	Horizontal
393.750	2.18	16.22	27.37	32.01	23.04	46.00	-22.96	Horizontal
773.020	3.13	21.97	27.03	32.38	30.45	46.00	-15.55	Horizontal
928.220	3.63	23.30	26.43	32.72	33.22	46.00	-12.78	Horizontal


Remark: the data above is tested with QP detector mode.

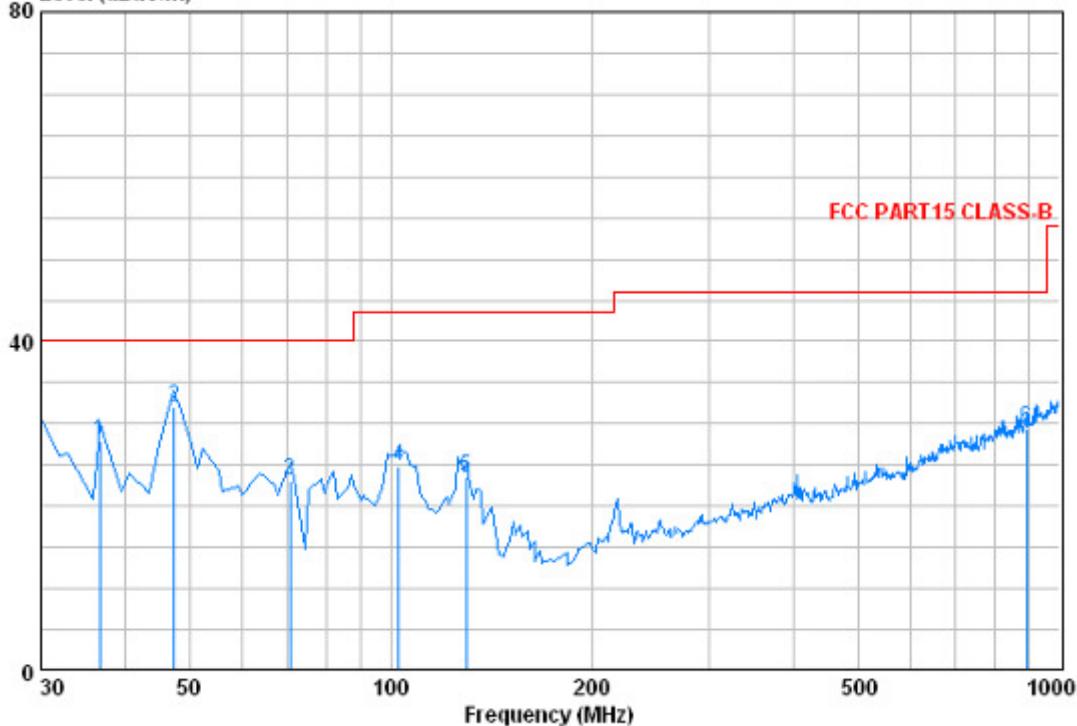**For new report SZEMO11040186102****Charge + Bluetooth****Vertical**Data: 152  
Level (dBuV/m)**FCC PART15 CLASS-B**


Freq	Cable		Antenna		Preamp		Read	Limit	Over
	Loss	Factor	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	36.790	0.60	12.30	27.33	42.42	27.99	40.00	-12.01	
2	47.460	0.75	8.72	27.30	49.81	31.99	40.00	-8.01	
3	70.740	0.82	6.97	27.25	42.63	23.18	40.00	-16.82	
4	102.750	1.21	8.97	27.18	41.91	24.90	43.50	-18.60	
5	129.910	1.28	7.70	27.01	41.58	23.54	43.50	-19.96	
6	893.300	3.58	23.14	26.82	29.59	29.49	46.00	-16.51	

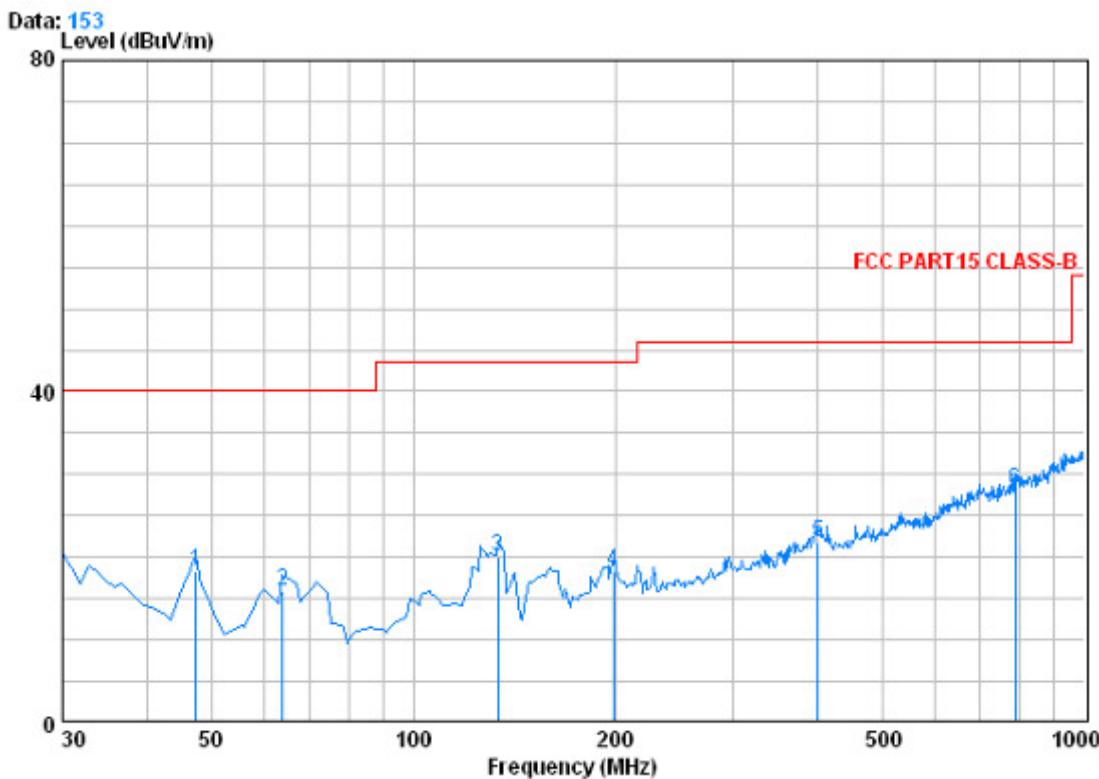**Horizontal**

Freq	Cable			Antenna	Preamp	Read	Limit	Over
	Loss	Factor	Factor	Level	Level	Line		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	47.460	0.75	9.27	27.30	35.63	18.36	40.00	-21.64
2	63.950	0.80	7.07	27.26	35.29	15.90	40.00	-24.10
3	133.790	1.28	7.86	26.99	37.82	19.97	43.50	-23.53
4	198.780	1.40	10.19	26.70	33.33	18.21	43.50	-25.29
5	401.510	2.21	16.31	27.15	30.37	21.73	46.00	-24.27
6	788.540	3.17	22.06	27.31	30.27	28.19	46.00	-17.81

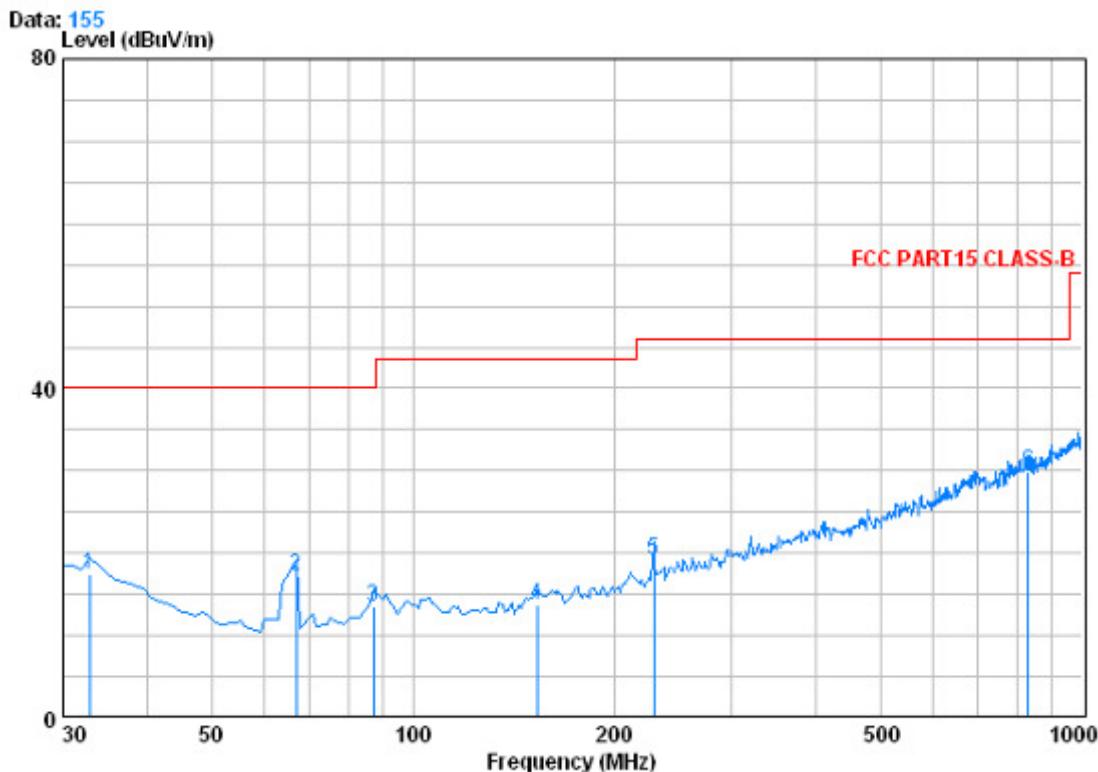**Bluetooth****Vertical**

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.910	0.60	13.91	27.35	30.25	17.42	40.00	-22.58
2	66.860	0.80	6.99	27.25	36.64	17.18	40.00	-22.82
3	87.230	1.10	8.45	27.22	31.28	13.61	40.00	-26.39
4	153.190	1.32	9.18	26.89	30.10	13.71	43.50	-29.79
5	228.850	1.56	11.61	26.60	32.70	19.27	46.00	-26.73
6	832.190	3.34	22.40	27.13	31.25	29.86	46.00	-16.14

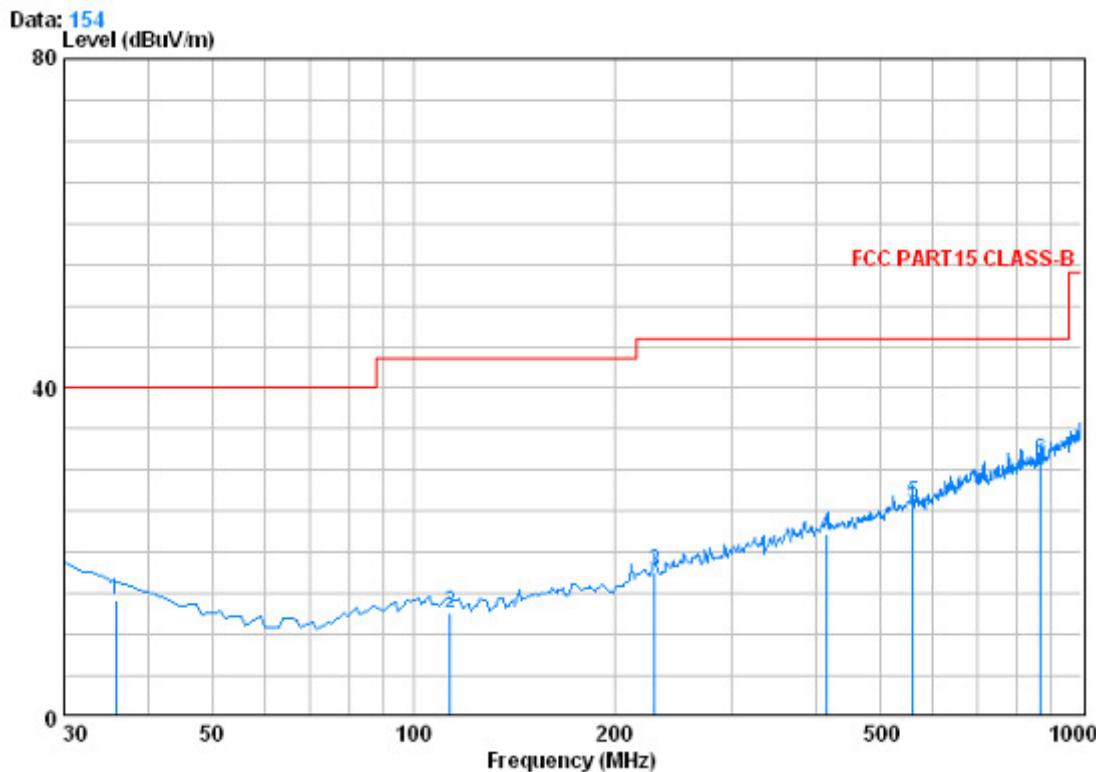**Horizontal**

Freq	Cable	Antenna	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	35.820	0.60	12.80	27.33	28.18	14.25	40.00	-25.75
2	113.420	1.24	8.36	27.11	30.22	12.71	43.50	-30.79
3	229.820	1.57	11.64	26.59	31.14	17.76	46.00	-28.24
4	416.060	2.27	16.36	27.23	30.76	22.16	46.00	-23.84
5	559.620	2.66	18.98	27.60	32.00	26.05	46.00	-19.95
6	870.020	3.48	22.85	26.92	31.71	31.12	46.00	-14.68

### 5.11.2 Transmitter emission above 1GHz

For original report SZEMO10080488601

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5228	11.74	34.81	41.19	37.51	42.87	74.00	-31.13	Vertical
7104	13.56	37.17	41.46	34.00	43.27	74.00	-30.73	Vertical
8588	13.11	37.76	37.94	33.00	45.93	74.00	-28.07	Vertical
9722	13.79	38.02	37.86	30.80	44.75	74.00	-29.25	Vertical
11654	15.87	38.83	38.65	30.50	46.55	74.00	-27.45	Vertical
13404	17.00	40.50	40.29	30.01	47.22	74.00	-26.78	Vertical
5508	12.36	35.18	41.75	34.99	40.78	74.00	-33.22	Horizontal
6306	14.44	36.22	41.59	36.00	45.07	74.00	-28.93	Horizontal
8546	13.10	37.76	38.06	33.49	46.29	74.00	-27.71	Horizontal
10660	14.90	38.23	36.74	31.81	48.20	74.00	-25.80	Horizontal
12298	17.79	39.28	39.38	33.00	50.69	74.00	-23.31	Horizontal
13446	17.09	40.58	40.43	30.00	47.24	74.00	-26.76	Horizontal

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5228	11.74	34.81	41.19	25.81	31.17	54.00	-22.83	Vertical
7104	13.56	37.17	41.46	22.50	31.77	54.00	-22.23	Vertical
8588	13.11	37.76	37.94	21.70	34.63	54.00	-19.37	Vertical
9722	13.79	38.02	37.86	19.00	32.95	54.00	-21.05	Vertical
11654	15.87	38.83	38.65	19.00	35.05	54.00	-18.95	Vertical
13404	17.00	40.50	40.29	17.61	34.82	54.00	-19.18	Vertical
5508	12.36	35.18	41.75	23.69	29.48	54.00	-24.52	Horizontal
6306	14.44	36.22	41.59	24.50	33.57	54.00	-20.43	Horizontal
8546	13.10	37.76	38.06	22.19	34.99	54.00	-19.01	Horizontal
10660	14.90	38.23	36.74	20.01	36.40	54.00	-17.60	Horizontal
12298	17.79	39.28	39.38	20.70	38.39	54.00	-15.61	Horizontal
13446	17.09	40.58	40.43	18.60	35.84	54.00	-18.16	Horizontal

Worst case mode:	GFSK		Test channel:		Middle	Remark:	Peak	
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
5676	12.82	35.41	42.01	37.00	43.22	74.00	-30.78	Vertical
6740	13.38	36.78	40.42	37.01	46.75	74.00	-27.25	Vertical
8658	13.10	37.77	37.78	33.90	46.99	74.00	-27.01	Vertical
10492	14.48	38.20	36.39	31.79	48.08	74.00	-25.92	Vertical
12340	17.71	39.30	39.41	33.00	50.60	74.00	-23.40	Vertical
13628	17.41	40.94	40.81	31.00	48.54	74.00	-25.46	Vertical
4304	8.76	33.55	39.68	34.50	37.13	74.00	-36.87	Horizontal
5186	11.56	34.75	41.19	37.20	42.32	74.00	-31.68	Horizontal
6362	14.42	36.29	41.52	37.00	46.19	74.00	-27.81	Horizontal
7804	14.34	37.60	39.65	35.00	47.29	74.00	-26.71	Horizontal
10548	14.69	38.21	36.40	30.00	46.50	74.00	-27.50	Horizontal
12788	17.03	39.59	39.07	33.70	51.25	74.00	-22.75	Horizontal

Worst case mode:	GFSK		Test channel:		Middle	Remark:	Average	
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
5676	12.82	35.41	42.01	25.50	31.72	54.00	-22.28	Vertical
6740	13.38	36.78	40.42	24.51	34.25	54.00	-19.75	Vertical
8658	13.10	37.77	37.78	22.00	35.09	54.00	-18.91	Vertical
10492	14.48	38.20	36.39	22.99	39.28	54.00	-14.72	Vertical
12340	17.71	39.30	39.41	20.30	37.90	54.00	-16.10	Vertical
13628	17.41	40.94	40.81	20.00	37.54	54.00	-16.46	Vertical
4304	8.76	33.55	39.68	23.00	25.63	54.00	-28.37	Horizontal
5186	11.56	34.75	41.19	23.50	28.62	54.00	-25.38	Horizontal
6362	14.42	36.29	41.52	25.00	34.19	54.00	-19.81	Horizontal
7804	14.34	37.60	39.65	23.30	35.59	54.00	-18.41	Horizontal
10548	14.69	38.21	36.40	20.00	36.50	54.00	-17.50	Horizontal
12788	17.03	39.59	39.07	21.00	38.55	54.00	-15.45	Horizontal

Worst case mode:	GFSK		Test channel:		Highest	Remark:	Peak
------------------	------	--	---------------	--	---------	---------	------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
4052	8.10	33.17	40.56	33.01	33.72	74.00	-40.28	Vertical
4934	10.53	34.41	40.90	37.40	41.44	74.00	-32.56	Vertical
6362	14.42	36.29	41.52	37.90	47.09	74.00	-26.91	Vertical
7804	14.34	37.60	39.65	35.50	47.79	74.00	-26.21	Vertical
10548	14.69	38.21	36.40	31.80	48.30	74.00	-25.70	Vertical
13404	17.00	40.50	40.29	30.01	47.22	74.00	-26.78	Vertical
6208	14.46	36.09	41.69	37.01	45.87	74.00	-28.13	Horizontal
7734	13.85	37.56	39.52	34.00	45.89	74.00	-28.11	Horizontal
8434	13.07	37.75	38.31	33.00	45.51	74.00	-28.49	Horizontal
9694	13.69	38.01	37.79	31.00	44.91	74.00	-29.09	Horizontal
11416	15.05	38.62	38.28	30.00	45.39	74.00	-28.61	Horizontal
13726	17.28	41.09	40.93	31.50	48.94	74.00	-25.06	Horizontal

Worst case mode:	GFSK		Test channel:		Highest	Remark:	Average
------------------	------	--	---------------	--	---------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
4052	8.10	33.17	40.56	22.01	22.72	54.00	-31.28	Vertical
4934	10.53	34.41	40.90	25.40	29.44	54.00	-24.56	Vertical
6362	14.42	36.29	41.52	25.00	34.19	54.00	-19.81	Vertical
7804	14.34	37.60	39.65	23.30	35.59	54.00	-18.41	Vertical
10548	14.69	38.21	36.40	20.00	36.50	54.00	-17.50	Vertical
13404	17.00	40.50	40.29	17.61	34.82	54.00	-19.18	Vertical
6208	14.46	36.09	41.69	20.31	29.17	54.00	-24.83	Horizontal
7734	13.85	37.56	39.52	18.00	29.89	54.00	-24.11	Horizontal
8434	13.07	37.75	38.31	19.00	31.51	54.00	-22.49	Horizontal
9694	13.69	38.01	37.79	21.00	34.91	54.00	-19.09	Horizontal
11416	15.05	38.62	38.28	22.30	37.69	54.00	-16.31	Horizontal
13726	17.28	41.09	40.93	25.00	42.44	54.00	-11.56	Horizontal

Remark:1. The disturbance above 14GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

**For new report SZEMO11040186102**

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3464	7.26	32.50	39.49	41.43	41.70	74.00	-32.30	Vertical
6012	13.27	35.82	41.87	37.43	44.65	74.00	-29.35	Vertical
8000	12.87	37.70	40.00	35.92	46.49	74.00	-27.51	Vertical
9344	13.73	37.91	37.85	33.04	46.83	74.00	-27.17	Vertical
10842	14.97	38.27	37.24	29.75	45.75	74.00	-28.25	Vertical
12746	17.08	39.57	39.13	30.05	47.57	74.00	-26.43	Vertical
3128	7.36	32.08	39.76	44.21	43.89	74.00	-30.11	Horizontal
4486	8.88	33.81	39.85	38.61	41.45	74.00	-32.55	Horizontal
7314	12.99	37.30	40.50	40.17	49.96	74.00	-24.04	Horizontal
9428	13.85	37.93	37.56	36.63	50.85	74.00	-23.15	Horizontal
11570	15.85	38.75	38.52	33.89	49.97	74.00	-24.03	Horizontal
14244	17.58	41.47	43.40	33.46	49.11	74.00	-24.89	Horizontal

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3226	6.99	32.20	39.33	31.81	31.67	54.00	-22.33	Vertical
4388	8.96	33.68	41.01	31.43	33.06	54.00	-20.94	Vertical
6026	13.27	35.82	41.87	27.72	34.94	54.00	-19.06	Vertical
7748	13.85	37.56	39.52	23.00	34.89	54.00	-19.11	Vertical
10506	14.58	38.20	36.32	18.63	35.09	54.00	-18.91	Vertical
14146	17.75	41.52	42.72	17.99	34.54	54.00	-19.46	Vertical
3772	7.47	32.85	39.97	32.73	33.08	54.00	-20.92	Horizontal
5900	13.06	35.68	41.98	28.19	34.95	54.00	-19.05	Horizontal
7188	13.42	37.22	41.07	26.04	35.61	54.00	-18.39	Horizontal
9806	14.09	38.04	38.09	20.37	34.41	54.00	-19.59	Horizontal
11738	15.73	38.89	38.74	18.61	34.49	54.00	-19.51	Horizontal
14244	17.58	41.47	43.40	18.79	34.44	54.00	-19.56	Horizontal



Worst case mode:	GFSK		Test channel:		Middle	Remark:	Peak
------------------	------	--	---------------	--	--------	---------	------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
3730	7.42	32.80	39.42	42.01	42.81	74.00	-31.19	Vertical
5214	11.73	34.79	41.19	40.72	46.05	74.00	-27.95	Vertical
7384	12.68	37.35	40.11	37.40	47.32	74.00	-26.68	Vertical
8518	13.09	37.75	38.12	37.73	50.45	74.00	-23.55	Vertical
10842	14.97	38.27	37.24	34.75	50.75	74.00	-23.25	Vertical
12886	16.89	39.63	38.94	32.56	50.14	74.00	-23.86	Vertical
3576	8.21	32.63	40.68	39.49	39.65	74.00	-34.35	Horizontal
5284	11.81	34.89	41.18	36.30	41.82	74.00	-32.18	Horizontal
6110	13.87	35.95	41.79	43.34	51.37	74.00	-22.63	Horizontal
8224	12.42	37.72	38.98	38.13	49.29	74.00	-24.71	Horizontal
10660	14.90	38.23	36.74	32.98	49.37	74.00	-24.63	Horizontal
13194	16.61	40.14	39.58	33.74	50.91	74.00	-23.09	Horizontal

Worst case mode:	GFSK		Test channel:		Middle	Remark:	Average
------------------	------	--	---------------	--	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
3464	7.26	32.50	39.49	30.96	31.23	54.00	-22.77	Vertical
4962	10.43	34.45	41.03	31.71	35.56	54.00	-18.44	Vertical
6096	13.75	35.92	41.81	28.21	36.07	54.00	-17.93	Vertical
7888	13.60	37.65	39.82	25.67	37.10	54.00	-16.90	Vertical
10618	14.91	38.22	36.57	23.42	39.98	54.00	-14.02	Vertical
14048	18.18	41.58	41.70	21.18	39.24	54.00	-14.76	Vertical
3856	7.72	32.94	40.04	27.86	28.48	54.00	-25.52	Horizontal
4934	10.53	34.41	40.90	27.86	31.90	54.00	-22.10	Horizontal
6782	13.44	36.83	40.26	27.73	37.74	54.00	-16.26	Horizontal
7776	14.18	37.58	39.61	25.15	37.30	54.00	-16.70	Horizontal
10618	14.91	38.22	36.57	22.41	38.97	54.00	-15.03	Horizontal
12536	17.38	39.43	39.52	21.75	39.04	54.00	-14.96	Horizontal

Worst case mode:	GFSK		Test channel:		Highest	Remark:	Peak
------------------	------	--	---------------	--	---------	---------	------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
3590	8.32	32.64	40.84	37.23	37.35	74.00	-36.65	Vertical
4710	10.01	34.12	41.35	41.16	43.94	74.00	-30.06	Vertical
6390	14.41	36.34	41.48	36.19	45.46	74.00	-28.54	Vertical
9064	13.41	37.82	37.92	32.88	46.19	74.00	-27.81	Vertical
10730	14.90	38.25	36.91	30.65	46.89	74.00	-27.11	Vertical
13950	18.09	41.53	41.30	28.89	47.21	74.00	-26.79	Vertical
4248	8.65	33.46	40.52	43.28	44.87	74.00	-29.13	Horizontal
5466	12.23	35.14	41.67	39.70	45.40	74.00	-28.60	Horizontal
6992	13.74	37.10	41.03	35.38	45.19	74.00	-28.81	Horizontal
9274	13.54	37.89	38.05	33.54	46.92	74.00	-27.08	Horizontal
10618	14.91	38.22	36.57	31.12	47.68	74.00	-26.32	Horizontal
13152	16.64	39.99	39.30	31.16	48.49	74.00	-25.51	Horizontal

Worst case mode:	GFSK		Test channel:		Highest	Remark:	Average
------------------	------	--	---------------	--	---------	---------	---------


Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over limit (dB)	Polarization
3268	6.93	32.26	39.18	29.69	29.70	54.00	-24.30	Vertical
4542	9.25	33.90	40.65	28.39	30.89	54.00	-23.11	Vertical
6418	14.30	36.36	41.46	24.24	33.44	54.00	-20.56	Vertical
8280	12.60	37.73	38.77	23.42	34.98	54.00	-19.02	Vertical
10254	14.28	38.15	36.97	19.63	35.09	54.00	-18.91	Vertical
13250	16.69	40.21	39.73	18.51	35.68	54.00	-18.32	Vertical
4150	8.31	33.32	40.54	30.07	31.16	54.00	-22.84	Horizontal
6460	14.07	36.41	41.42	23.36	32.42	54.00	-21.58	Horizontal
8224	12.42	37.72	38.98	22.78	33.94	54.00	-20.06	Horizontal
10772	14.89	38.25	36.99	18.41	34.56	54.00	-19.44	Horizontal
12620	17.30	39.48	39.39	20.96	38.35	54.00	-15.65	Horizontal
14594	17.39	41.31	45.71	28.27	41.26	54.00	-12.74	Horizontal

Remark: The disturbance above 15GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

**5.11.3 Band Edge and Restricted band (Radiated measurement)**


Test mode:	GFSK	Test channel:	Lowest	Polarization:	Vertical
------------	------	---------------	--------	---------------	----------

Peak measurement

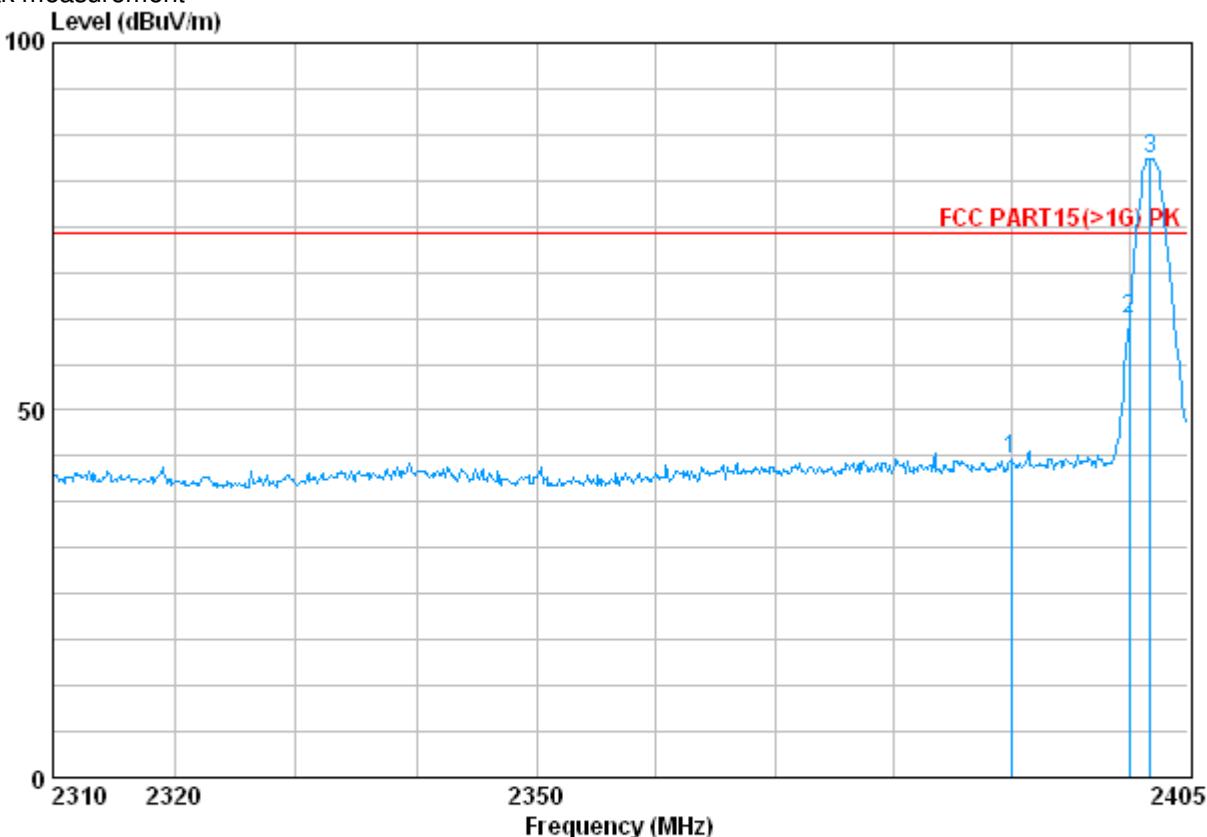

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	6.28	29.98	39.03	45.97	43.20	74.00	-30.80
2	2400.000	6.34	30.03	38.87	64.86	62.36	74.00	-11.64
3	2401.770	6.34	30.03	38.87	86.70	84.20	74.00	10.20


Average measurement

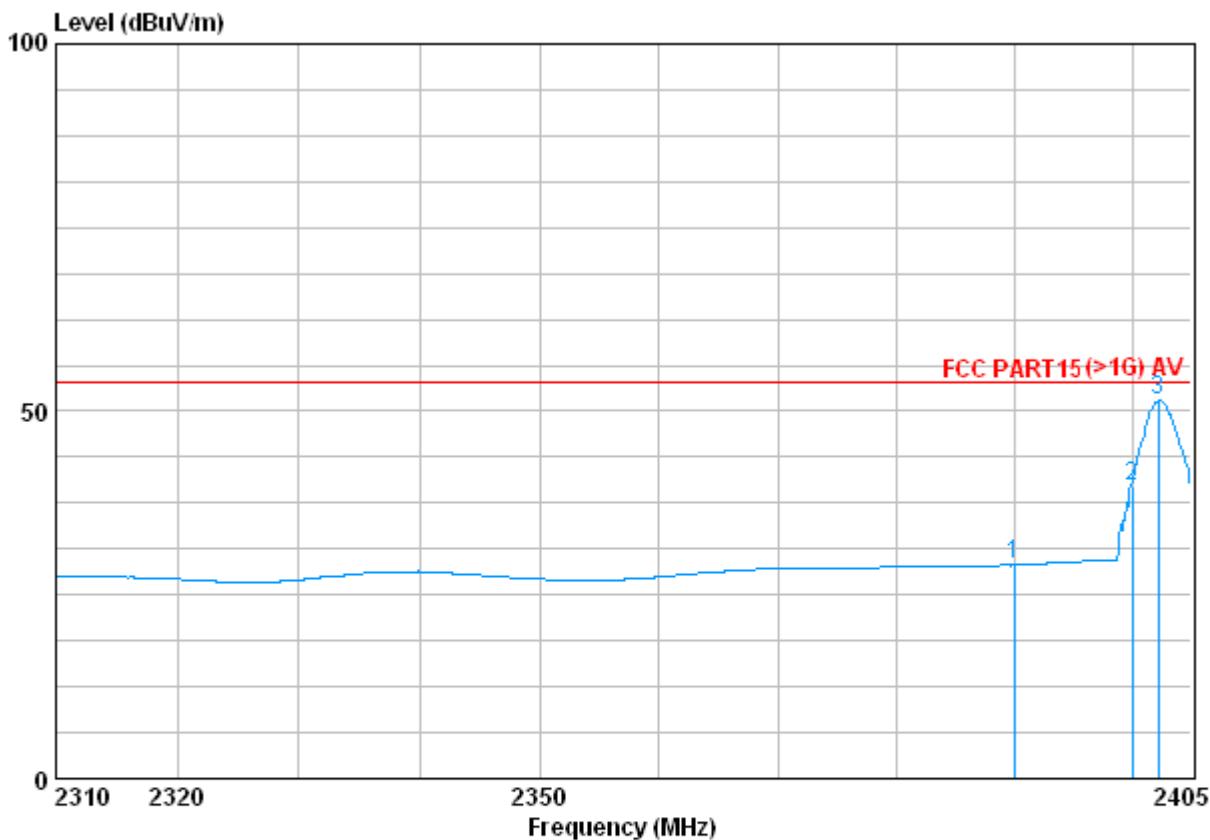

Freq	Cable Loss		Antenna Factor		Preamp Factor		Read Level	Line Level	Limit	Over Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB			
1	2390.000	6.28	29.98	39.03	31.80	29.04	54.00	-24.96			
2	2400.000	6.34	30.03	38.87	42.17	39.67	54.00	-14.33			
3	2402.245	6.34	30.03	38.87	53.91	51.41	54.00	-2.59			


Test mode:	GFSK	Test channel:	Lowest	Polarization:	Horizontal
------------	------	---------------	--------	---------------	------------

Peak measurement

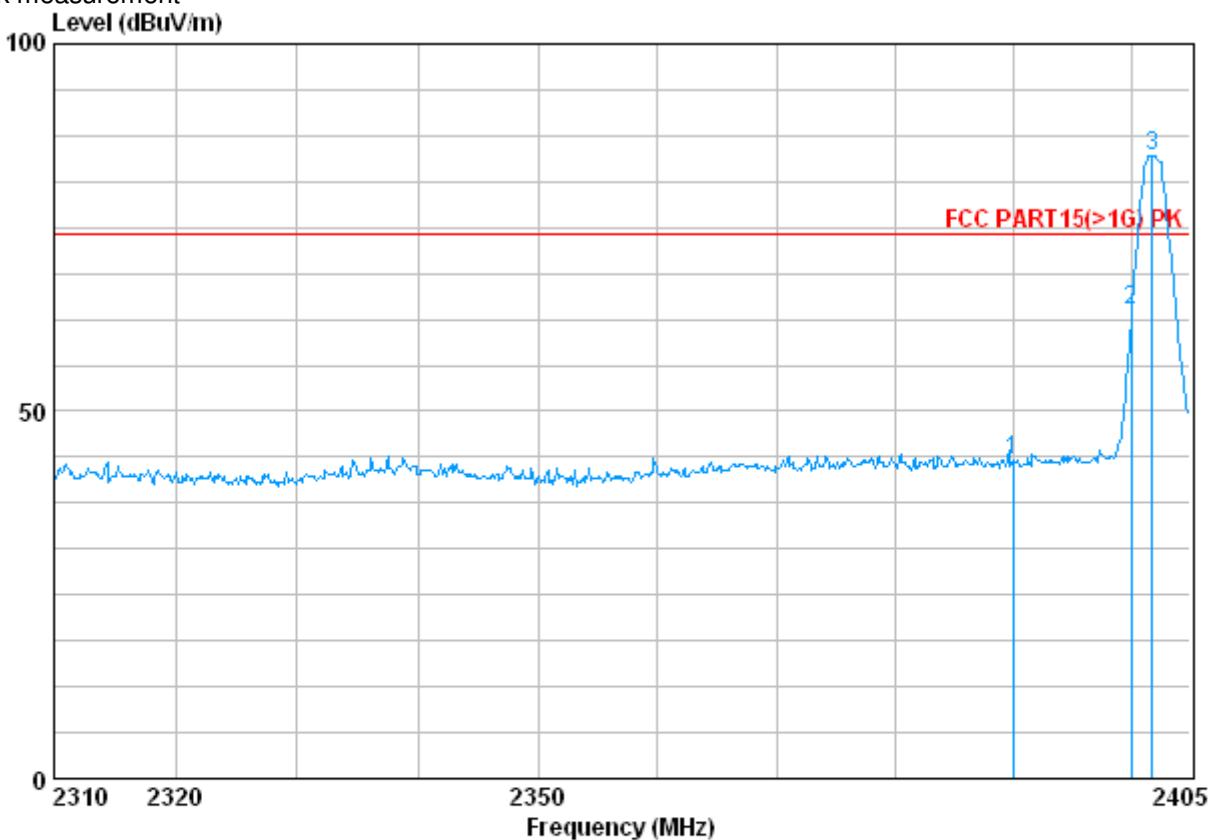

Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level		Limit Level	Line Limit	Over Limit			
				dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1				2390.000	6.28	29.98	39.03	46.05	43.28	74.00	-30.72
2				2400.000	6.34	30.03	38.87	66.30	63.80	74.00	-10.20
3	0			2401.770	6.34	30.03	38.87	87.28	84.78	74.00	10.78


Average measurement

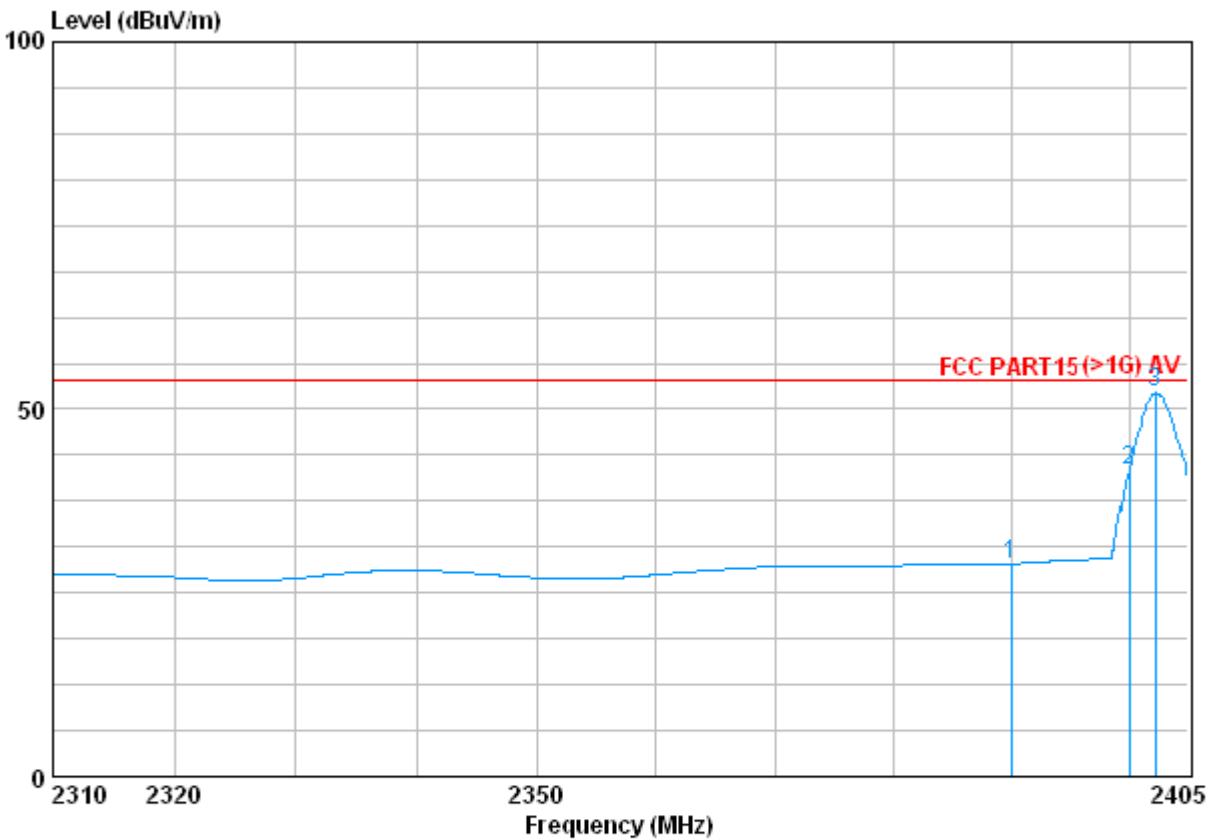

Freq	Cable		Antenna		Preamp	Read	Limit	Over
	Loss	Factor	Factor	Factor	Level	Level		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	6.28	29.98	39.03	31.72	28.95	54.00	-25.05
2	2400.000	6.34	30.03	38.87	44.21	41.71	54.00	-12.29
3	2402.245	6.34	30.03	38.87	54.69	52.19	54.00	-1.81


Test mode:	GFSK	Test channel:	Highest	Polarization:	Vertical
------------	------	---------------	---------	---------------	----------

Peak measurement

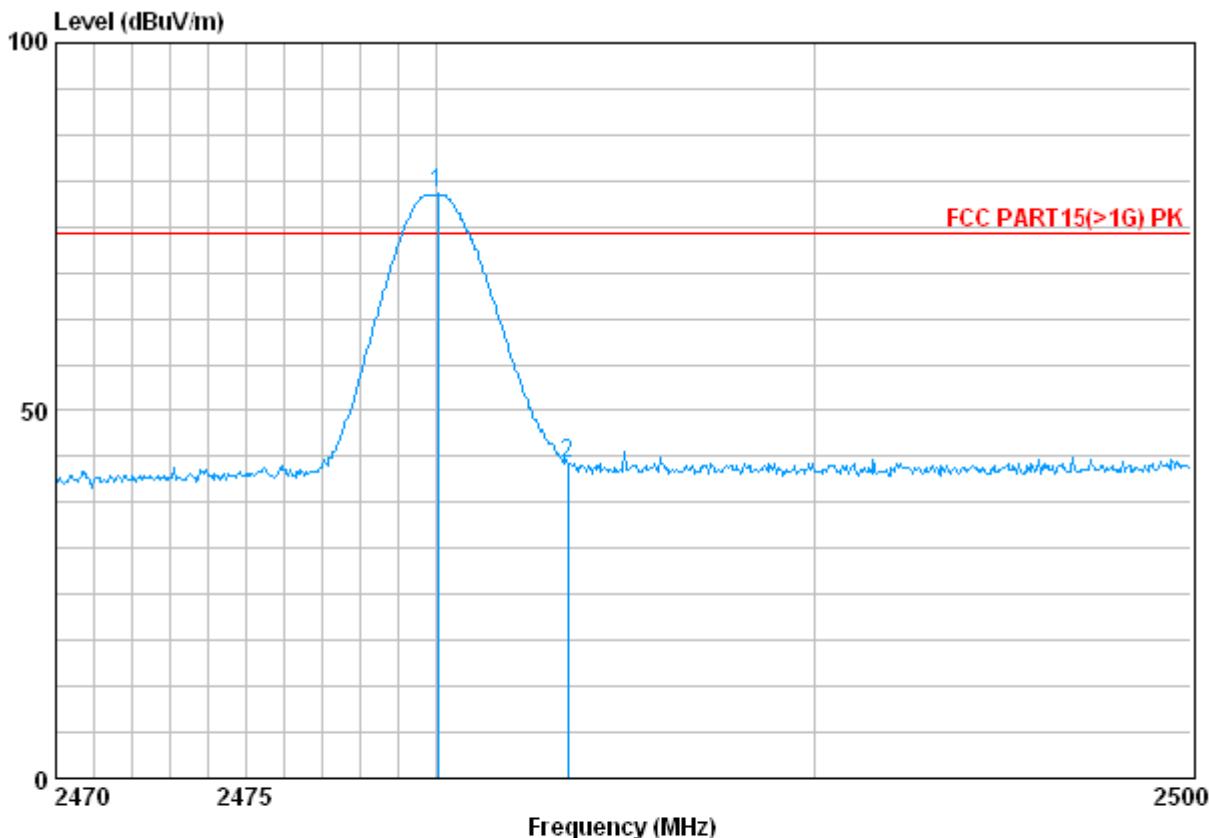

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.050	6.45	30.30	39.72	82.45	79.48	74.00	5.48
2	2483.500	6.22	30.32	39.53	45.82	42.83	74.00	-31.17


Average measurement

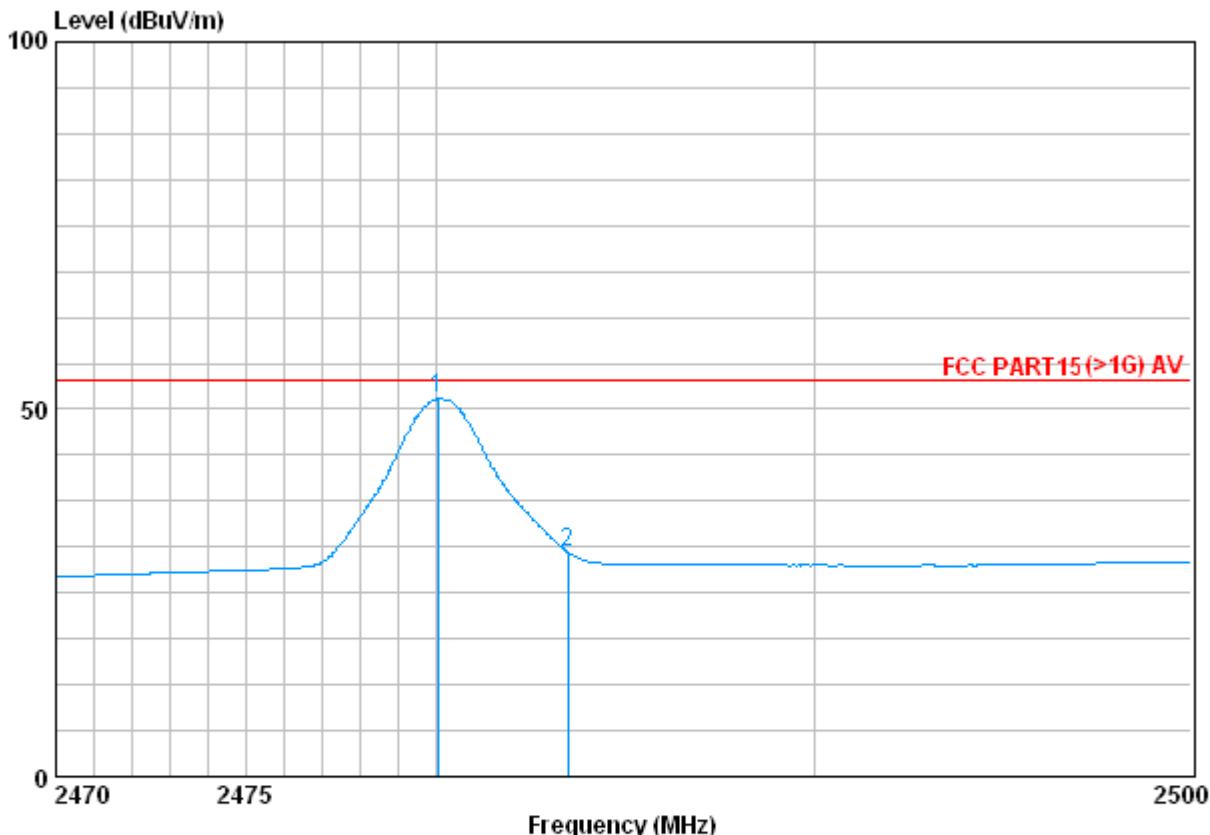

	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Line Level	Limit Line	Over Limit	
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.050	6.45	30.30	39.72	54.38	51.41	54.00	-2.59
2	2483.500	6.22	30.32	39.53	33.54	30.55	54.00	-23.45


Test mode:	GFSK	Test channel:	Highest	Polarization:	Horizontal
------------	------	---------------	---------	---------------	------------

Peak measurement

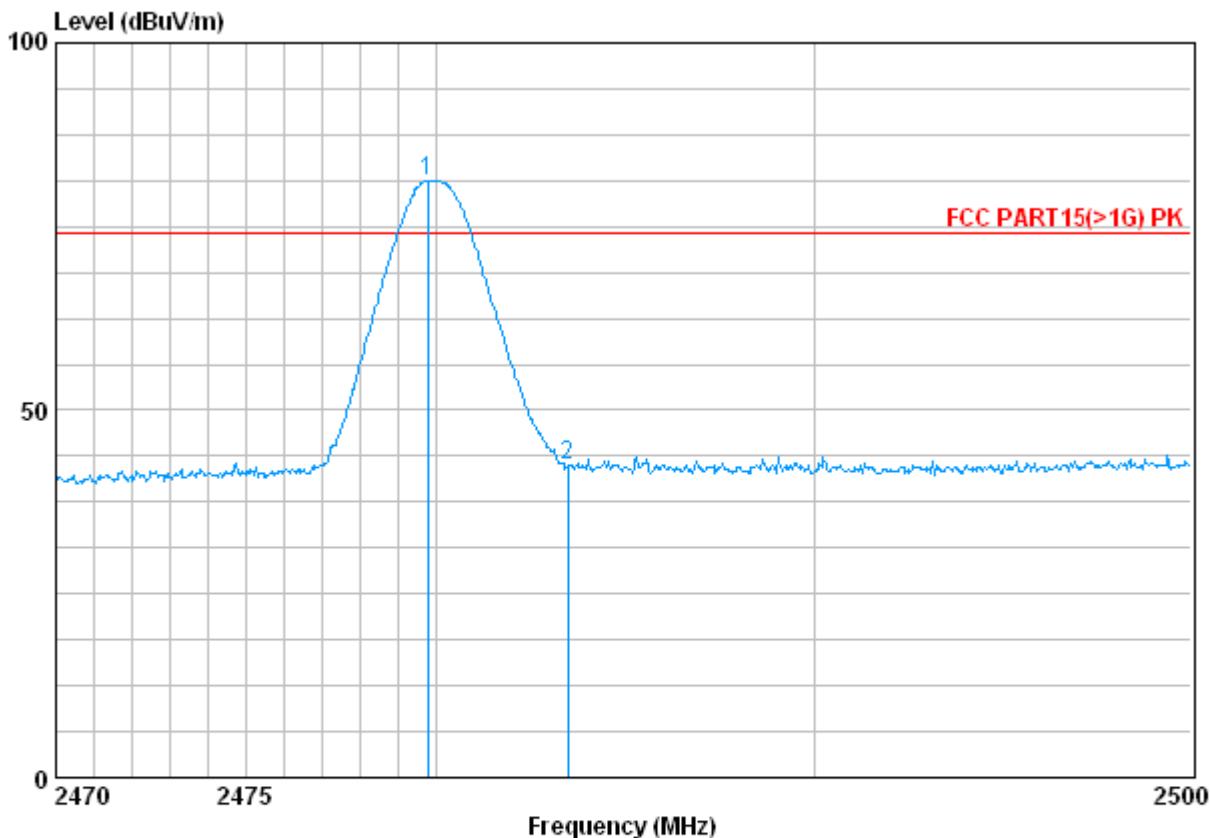

Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over	
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2479.780	6.45	30.30	39.72	84.20	81.23	74.00	7.23
2	2483.500	6.22	30.32	39.53	45.52	42.54	74.00	-31.46

Average measurement

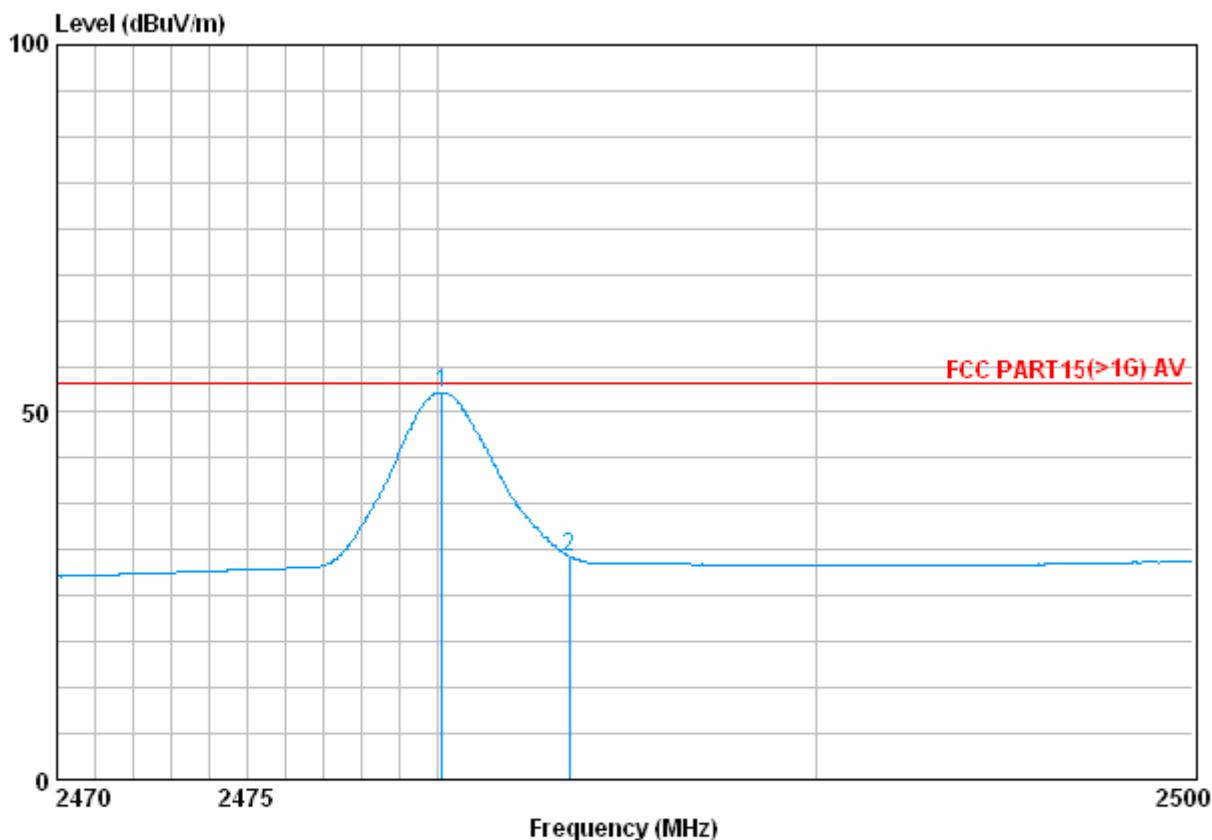

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.140	6.45	30.30	39.72	55.69	52.72	54.00	-1.28
2	2483.500	6.22	30.32	39.53	33.36	30.37	54.00	-23.63