

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RH-129_01.docx	Date of Report:	01-Dec-2010
Number of pages:	13	Customer's Contact person:	Xu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RH-129 / Battery BL-5CB / AC-charger AC-3U / Headset WH-102 / Dummy Battery SD-4		
FCC ID:	QTLRH-129	IC:	661AB-RH129
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	25-Nov-2010
Testing completed	01-Dec-2010
The customer's contact person	Xu Helen
Test Plan referred to	T:\Projects\RH-129\TestPlan\RS_testplan_RH-129.xls
Notes	-
Document name	FCC22&24_RH-129_01.docx

1.1. EUT and Accessory Information

The EUT is a 2-band (GSM850/1900) mobile phone. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RH-129	001004004187614	0202	-	06.01	51935
Phone	RH-129	001004004188836	0202	-	06.01	51937
Battery	BL-5CB	0670620495540R393510202279	-	-	-	51941
AC-charger	AC-3U	4090490393581800027;0675372	-	-	-	51943
Headset	WH-102	0694323939454109317	-	-	-	51754
Dummy Battery	SD-4	03618	-	-	-	51944

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	5
3. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....	6
3.1. Test Setup	6
3.2. Test method and limit	6
3.3. GSM850 TX Test results	8
3.4. GSM1900 TX Test results	8
4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3).....	9
4.1. Test setup	9
4.2. Test method and limit	9
4.3. GSM 850 Test results	10
4.4. GSM 1900 Test results	10
5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3).....	11
5.1. Test setup	11
5.2. Test method and limit	11
5.3. GSM 850 Test results	12
5.4. GSM 1900 Test results	12
6. Test Equipment	13
6.1. Conducted measurements	13
6.2. Radiated measurements	13

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RH-129, DUT 51937
Accessories with DUT numbers	BL-5CB, DUT 51941 ; AC-3U, DUT 51943 ; WH-102, DUT 51754
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 32 / 101.2
Date of measurements	29-30-Nov-2010
Measured by	Jia Dongsheng

2.1. Test setup

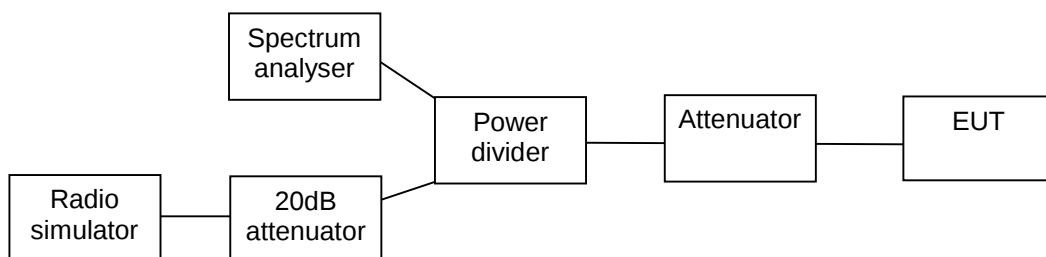


2.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standard RSS-GEN.

2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	248.000


GSM mode, channel 190 / 836.6 MHz

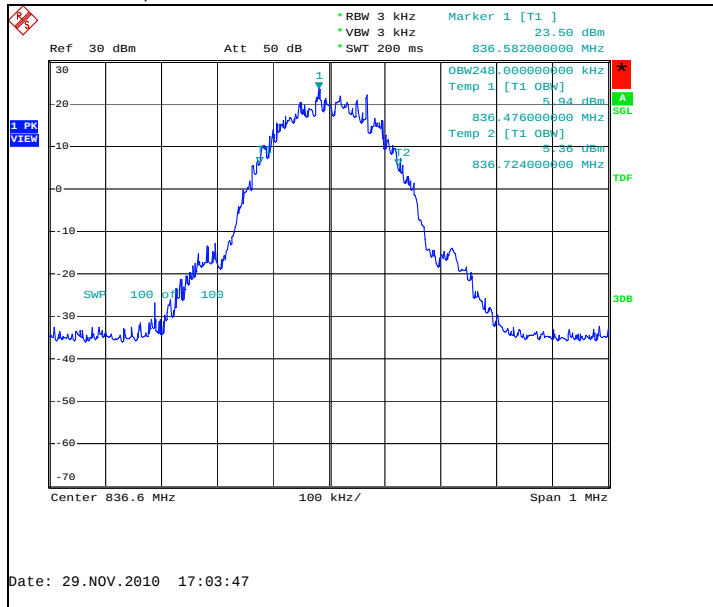

2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	248.000

GSM mode, channel 661 / 1880.0 MHz

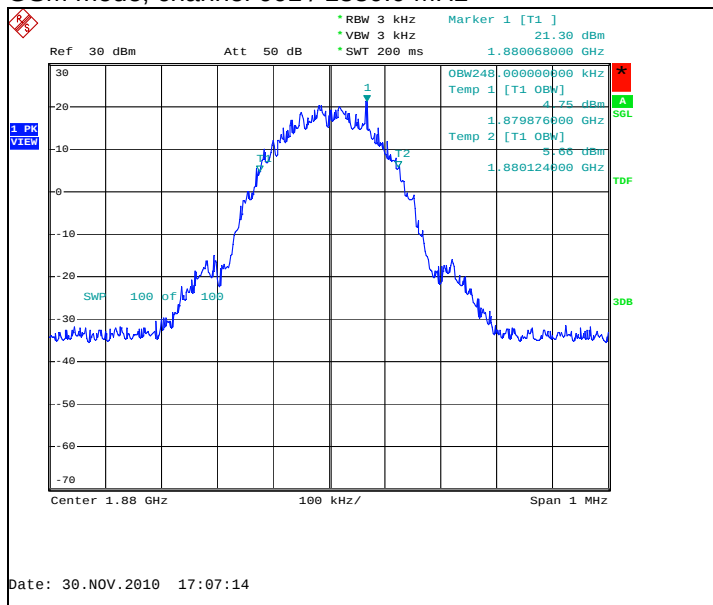


3. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RH-129, DUT 51935
Accessories with DUT numbers	BL-5CB, DUT 51941 ; AC-3U, DUT 51943 ; WH-102, DUT 51754
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 27 / 101.9
Date of measurements	25-Nov-2010
Measured by	Jia Dongsheng

3.1. Test Setup

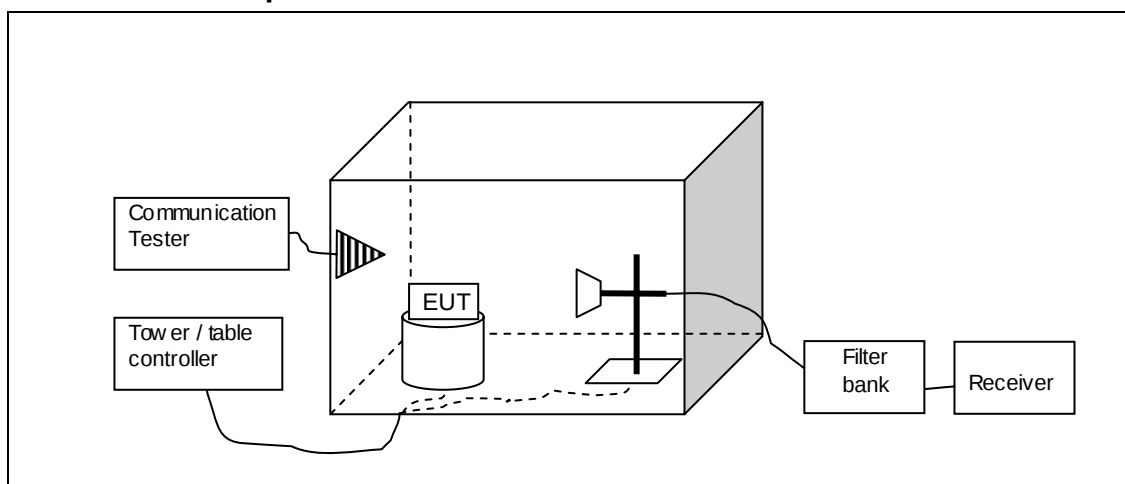

3.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software. The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST TX}$ is signal generator level, $P_{SUBST RX}$ is receiver level, $L_{SUBST CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST TX ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 / WCDMA 1900	30 - 18500	-13

3.3. GSM850 TX Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P[dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
851.426	-64.39	0.00036	-62.61	-1.78	VERTICAL	PASSED
1673.442	-41.23	0.07534	-46.89	5.66	VERTICAL	PASSED
2495.892	-51.7	0.00676	-64.03	12.33	HORIZONTAL	PASSED
2529.98	-52.36	0.00581	-65.01	12.65	HORIZONTAL	PASSED
3346.172	-35.23	0.29992	-43.54	8.31	VERTICAL	PASSED
3346.653	-35.28	0.29648	-43.6	8.32	VERTICAL	PASSED

3.4. GSM1900 TX Test results


GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P[dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
2868.264	-45.35	0.02917	-64.13	18.78	HORIZONTAL	PASSED
2905.348	-44.28	0.03733	-64.12	19.84	HORIZONTAL	PASSED
2915.234	-44.25	0.03758	-64.62	20.37	HORIZONTAL	PASSED
7520.281	-27.24	1.88799	-43.87	16.63	VERTICAL	PASSED
9263.246	-45.68	0.02704	-65.74	20.06	VERTICAL	PASSED
9893.106	-45.91	0.02564	-67.43	21.52	HORIZONTAL	PASSED

4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RH-129, DUT 51937
Accessories with DUT numbers	BL-5CB, DUT 51941 ; AC-3U, DUT 51943 ; WH-102, DUT 51754
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 32 / 101.2
Date of measurements	30-Nov-2010
Measured by	Jia Dongsheng

4.1. Test setup

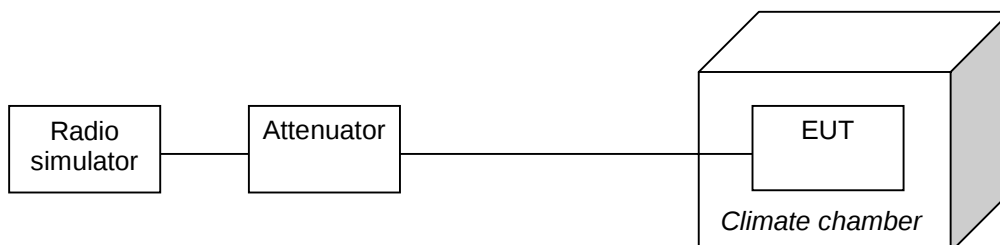

4.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
 The EUT is placed in the chamber.
 The EUT is set in idle mode for 15 minutes.
 The EUT is set to transmit.
 The transmit frequency error was measured immediately.
 The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-24	-0.0287
40	-17	-0.0203
30	-15	-0.0179
20	-18	-0.0215
10	-14	-0.0167
0	-18	-0.0215
-10	-6	-0.0072
-20	-14	-0.0167
-22	2	0.0024
-24	-9	-0.0108
-26	-9	-0.0108
-28	-20	-0.0239

4.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	16	0.0085
40	29	0.0154
30	13	0.0069
20	-12	-0.0064
10	30	0.0160
0	-23	-0.0122
-10	-17	-0.0090
-20	29	0.0154
-22	27	0.0144
-24	-31	-0.0165
-26	25	0.0133
-28	-33	-0.0176
-30	26	0.0138

5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RH-129, DUT 51937
Accessories with DUT numbers	SD-4, DUT 51944
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 32 / 101.2
Date of measurements	30-Nov-2010
Measured by	Jia Dongsheng

5.1. Test setup



5.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.30	-11	-0.0131
Nominal / 4.30	-10	-0.0120

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.30	-23	-0.0122
Nominal / 4.30	27	0.0144

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8357C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C