

## SAR Compliance Test Report

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                                                                            |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test report no.:                                 | FCC_RM-1078_03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Date of report:         | 2014-09-02                                                                                                                                                                 |
| Template version:                                | 19.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Number of pages:        | 104                                                                                                                                                                        |
| Testing laboratory:                              | TCC Microsoft Beijing Laboratory<br>Beijing Economic and Technological Development Area<br>No.5 Donghuan Zhonglu<br>Beijing<br>PRC China 100176<br>Tel. +86 10 8711 8888<br>Fax. +86 10 8711 4550                                                                                                                                                                                                                                                                                                                                                    | Client:                 | Microsoft<br>Beijing Economic and Technological Development Area<br>No.5 Donghuan Zhonglu<br>Beijing<br>PRC China 100176<br>Tel. +86 10 8711 8888<br>Fax. +86 10 8711 4550 |
| Responsible test engineer:                       | Zhang Luwen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Product contact person: | Hu Dongji                                                                                                                                                                  |
| Measurements made by:                            | Yuan Rui, He Ying, Xu Liping, Wang Weike                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                         |                                                                                                                                                                            |
| Tested device:                                   | RM-1078                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         |                                                                                                                                                                            |
| FCC ID:                                          | QTLRM-1078                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IC:                     | -                                                                                                                                                                          |
| Supplement reports:                              | SAR_Photo_RM-1078_04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                                                                                                                                                            |
| Testing has been carried out in accordance with: | <b>47CFR §2.1093</b><br>Radiofrequency Radiation Exposure Evaluation: Portable Devices<br><b>FCC published RF exposure KDB procedures</b><br><b>RSS-102, Issue 4</b><br>Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields<br><b>IEEE 1528 - 2013</b><br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique |                         |                                                                                                                                                                            |
| Documentation:                                   | The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.                                                                                                                                                                                                                                                                                                                                                                                                                                          |                         |                                                                                                                                                                            |
| Test results:                                    | <b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.                                                                                                                                                                                                                                                                       |                         |                                                                                                                                                                            |

### Date and signatures:

For the contents:

## CONTENTS

|                                                                                              |           |
|----------------------------------------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF SAR TEST REPORT .....</b>                                                   | <b>4</b>  |
| 1.1 TEST DETAILS.....                                                                        | 4         |
| 1.2 MAXIMUM RESULTS.....                                                                     | 4         |
| 1.2.1 Head Configuration.....                                                                | 4         |
| 1.2.2 Body Worn Configuration.....                                                           | 6         |
| 1.2.3 Wireless Router Configuration.....                                                     | 7         |
| 1.2.4 Summary SAR data.....                                                                  | 8         |
| 1.2.5 Maximum Drift .....                                                                    | 9         |
| 1.2.6 Measurement Uncertainty.....                                                           | 9         |
| <b>2. DESCRIPTION OF THE DEVICE UNDER TEST .....</b>                                         | <b>10</b> |
| 2.1 POWER REDUCTIONS IN WIRELESS ROUTER CONFIGURATIONS .....                                 | 13        |
| 2.2 DESCRIPTION OF THE ANTENNA.....                                                          | 13        |
| <b>3. TEST CONDITIONS .....</b>                                                              | <b>15</b> |
| 3.1 TEMPERATURE AND HUMIDITY .....                                                           | 15        |
| 3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....                                           | 15        |
| <b>4. DESCRIPTION OF THE TEST EQUIPMENT.....</b>                                             | <b>17</b> |
| 4.1 MEASUREMENT SYSTEM AND COMPONENTS .....                                                  | 17        |
| 4.1.1 Isotropic E-field Probe Type ES3DV3.....                                               | 19        |
| 4.1.2 Isotropic E-field Probe Type EX3DV4.....                                               | 19        |
| 4.2 PHANTOMS .....                                                                           | 20        |
| 4.3 TISSUE SIMULANTS .....                                                                   | 20        |
| 4.3.1 Tissue Simulant Recipes.....                                                           | 20        |
| 4.4 SYSTEM VALIDATION AND SYSTEM CHECKING.....                                               | 21        |
| 4.4.1 System validation status.....                                                          | 21        |
| 4.4.2 System checking.....                                                                   | 22        |
| 4.5 TISSUE SIMULANTS USED IN THE MEASUREMENTS .....                                          | 24        |
| <b>5. DESCRIPTION OF THE TEST PROCEDURE.....</b>                                             | <b>26</b> |
| 5.1 DEVICE HOLDER.....                                                                       | 26        |
| 5.2 TEST POSITIONS.....                                                                      | 26        |
| 5.2.1 Against Phantom Head.....                                                              | 26        |
| 5.2.2 Body Worn Configuration.....                                                           | 26        |
| 5.2.3 Wireless Router Configuration.....                                                     | 27        |
| 5.3 SCAN PROCEDURES.....                                                                     | 27        |
| 5.4 SAR AVERAGING METHODS.....                                                               | 27        |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                                                      | <b>28</b> |
| <b>7. RESULTS .....</b>                                                                      | <b>30</b> |
| 7.1 THE MEASURED HEAD SAR VALUES FOR THE TEST DEVICE ARE TABULATED BELOW: .....              | 30        |
| 7.1.1 Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements..... | 50        |
| 7.1.2 Combined Head SAR data .....                                                           | 51        |
| 7.2 THE MEASURED BODY SAR VALUES FOR THE TEST DEVICE ARE TABULATED BELOW: .....              | 53        |
| 7.2.1 Combined Body SAR data.....                                                            | 75        |
| 7.3 BODY SAR ASSESSMENT OF WIRELESS ROUTER MODE AT 10.0MM SEPARATION DISTANCE.....           | 78        |
| 7.3.1 Combined Body SAR data.....                                                            | 102       |

**APPENDIX A: SYSTEM CHECK SCANS**

**APPENDIX B: MEASUREMENT SCANS**

**APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS**

**APPENDIX D: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA**

**APPENDIX E: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)**

**APPENDIX F: RELEVANT PAGES FROM DIPOLE VALIDATION REPORT(S)**

**APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED LTE TRANSMISSION MODES**

**APPENDIX H: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED CDMA TRANSMISSION MODES**

**APPENDIX I: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS/EGPRS TRANSMISSION MODES**

**APPENDIX J: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WCDMA TRANSMISSION MODES**

**APPENDIX K: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED WLAN TRANSMISSION MODES**

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Period of test                         | 2014-08-22 to 2014-09-05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| SN, HW and SW numbers of tested device | SN: 004402/47/868619/3, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54515<br>SN: 004402/47/868607/8, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54513<br>SN: 004402/47/868676/3, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54531<br>SN: 004402/47/868666/4, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54520<br>SN: 004402/47/868611/0, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54514<br>SN: 004402/47/868603/7, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54519<br>SN: 004402/47/868616/9, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54518<br>SN: 004402/47/868599/7, HW: 0101, SW: 02034.00000.14284.07001, DUT: 54516 |
| Batteries used in testing              | BL-5H, DUT: 54532, 54533, 54534, 54536, 54537, 54538                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Headsets used in testing               | WH-108, DUT: 54083, 54169, 54180                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Other accessories used in testing      | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| State of sample                        | Prototype unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Notes                                  | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 1.2 Maximum Results

The maximum measured SAR values for Head, Body Worn and Wireless Router configuration are given in section 1.2.1, 1.2.2 and 1.2.3 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

| Mode                     | Ch / f(MHz)   | Conducted power | Position    | Measured SAR value (1g avg) | Reported* SAR value (1g avg) | SAR limit (1g avg) | Result        | Plot # |
|--------------------------|---------------|-----------------|-------------|-----------------------------|------------------------------|--------------------|---------------|--------|
| CDMA800 (BC0)            | 1013 / 824.7  | 24.1 dBm        | Left, Cheek | 0.577 W/kg                  | <b>0.62 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 1      |
| CDMA800 (BC10)           | 476 / 817.9   | 24.0 dBm        | Left, Cheek | 0.505 W/kg                  | <b>0.55 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 2      |
| 2-slot GPRS850           | 128 / 824.2   | 30.2 dBm        | Left, Cheek | 0.562 W/kg                  | <b>0.59 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 3      |
| WCDMA850 (Band 5)        | 4132 / 826.4  | 23.6 dBm        | Left, Cheek | 0.476 W/kg                  | <b>0.51 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 4      |
| LTE850 (Band 26 Limited) | 26740 / 819.0 | 22.7 dBm        | Left, Cheek | 0.347 W/kg                  | <b>0.41 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 5      |

(Table continues)

(Table continues)

|                                           |                |          |              |            |                  |          |               |    |
|-------------------------------------------|----------------|----------|--------------|------------|------------------|----------|---------------|----|
| LTE850<br>(Band 26)                       | 26915 / 836.5  | 23.1 dBm | Right, Cheek | 0.300 W/kg | <b>0.32 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 6  |
| CDMA1900                                  | 1175 / 1908.75 | 23.9 dBm | Left, Cheek  | 0.597 W/kg | <b>0.67 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 7  |
| 4-slot GPRS1900                           | 512 / 1850.2   | 24.1 dBm | Left, Cheek  | 0.497 W/kg | <b>0.53 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 8  |
| WCDMA1900<br>(Band 2)                     | 9538 / 1907.6  | 23.1 dBm | Left, Cheek  | 0.711 W/kg | <b>0.86 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 9  |
| LTE1900<br>(Band 25)                      | 26140 / 1860.0 | 22.6 dBm | Left, Cheek  | 0.945 W/kg | <b>1.01 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 10 |
| LTE2500<br>(Band 41)                      | 39750 / 2506.0 | 23.6 dBm | Right, Cheek | 0.116 W/kg | <b>0.12 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 11 |
| WLAN2450                                  | 1 / 2412.0     | 16.8 dBm | Left, Cheek  | 0.708 W/kg | <b>0.83 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 12 |
| CDMA800 (BC0)<br>+ WLAN2450               | -              | -        | Left, Cheek  | 0.781 W/kg | <b>0.91 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| CDMA800 (BC10)<br>+ WLAN2450              | -              | -        | Left, Cheek  | 0.770 W/kg | <b>0.90 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| 2-slot GPRS850<br>+ WLAN2450              | -              | -        | Left, Cheek  | 0.778 W/kg | <b>0.90 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| WCDMA850<br>(Band 5)<br>+ WLAN2450        | -              | -        | Left, Cheek  | 0.770 W/kg | <b>0.89 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| LTE850<br>(Band 26 Limited)<br>+ WLAN2450 | -              | -        | Left, Cheek  | 0.766 W/kg | <b>0.90 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| LTE850<br>(Band 26)<br>+ WLAN2450         | -              | -        | Left, Cheek  | 0.736 W/kg | <b>0.86 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| CDMA1900<br>+ WLAN2450                    | -              | -        | Left, Cheek  | 0.755 W/kg | <b>0.88 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| 4-slot GPRS1900<br>+ WLAN2450             | -              | -        | Left, Cheek  | 0.744 W/kg | <b>0.87 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| WCDMA1900<br>(Band 2)<br>+ WLAN2450       | -              | -        | Left, Cheek  | 0.759 W/kg | <b>0.89 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 13 |
| LTE1900<br>(Band 25)<br>+ WLAN2450        | -              | -        | Left, Cheek  | 1.06 W/kg  | <b>1.13 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 14 |
| LTE2500<br>(Band 41)<br>+ WLAN2450        | -              | -        | Left, Cheek  | 0.719 W/kg | <b>0.84 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |

## 1.2.2 Body Worn Configuration

| Mode                                | Ch / f(MHz)    | Conducted power | Separation distance | Measured SAR value (1g avg) | Reported* SAR value (1g avg) | SAR limit (1g avg) | Result | Plot # |
|-------------------------------------|----------------|-----------------|---------------------|-----------------------------|------------------------------|--------------------|--------|--------|
| CDMA800 (BC0)                       | 777 / 848.3    | 24.2 dBm        | 1.5 cm              | 0.571 W/kg                  | <b>0.60 W/kg</b>             | 1.6 W/kg           | PASSED | 15     |
| CDMA800 (BC10)                      | 684 / 823.1    | 24.0 dBm        | 1.5 cm              | 0.581 W/kg                  | <b>0.64 W/kg</b>             | 1.6 W/kg           | PASSED | 16     |
| 2-slot GPRS850                      | 128 / 824.2    | 30.2 dBm        | 1.5 cm              | 0.555 W/kg                  | <b>0.58 W/kg</b>             | 1.6 W/kg           | PASSED | 17     |
| WCDMA850 (Band 5)                   | 4132 / 826.4   | 23.6 dBm        | 1.5 cm              | 0.466 W/kg                  | <b>0.50 W/kg</b>             | 1.6 W/kg           | PASSED | 18     |
| LTE850 (Band 26 Limited)            | 26740 / 819.0  | 22.7 dBm        | 1.5 cm              | 0.328 W/kg                  | <b>0.39 W/kg</b>             | 1.6 W/kg           | PASSED | 19     |
| LTE850 (Band 26)                    | 26915 / 836.5  | 23.1 dBm        | 1.5 cm              | 0.301 W/kg                  | <b>0.32 W/kg</b>             | 1.6 W/kg           | PASSED | 20     |
| CDMA1900                            | 600 / 1880.0   | 23.8 dBm        | 1.5 cm              | 0.626 W/kg                  | <b>0.72 W/kg</b>             | 1.6 W/kg           | PASSED | 21     |
| 4-slot GPRS1900                     | 512 / 1850.2   | 24.1 dBm        | 1.5 cm              | 0.463 W/kg                  | <b>0.50 W/kg</b>             | 1.6 W/kg           | PASSED | 22     |
| WCDMA1900 (Band 2)                  | 9400 / 1880.0  | 23.7 dBm        | 1.5 cm              | 0.578 W/kg                  | <b>0.61 W/kg</b>             | 1.6 W/kg           | PASSED | 23     |
| LTE1900 (Band 25)                   | 26140 / 1860.0 | 23.6 dBm        | 1.5 cm              | 0.691 W/kg                  | <b>0.74 W/kg</b>             | 1.6 W/kg           | PASSED | 24     |
| LTE2500 (Band 41)                   | 41055 / 2636.5 | 22.8 dBm        | 1.5 cm              | 0.162 W/kg                  | <b>0.17 W/kg</b>             | 1.6 W/kg           | PASSED | 25     |
| WLAN2450                            | 11 / 2462.0    | 17.4 dBm        | 1.5 cm              | 0.156 W/kg                  | <b>0.16 W/kg</b>             | 1.6 W/kg           | PASSED | 26     |
| CDMA800 (BC0) + WLAN2450            | -              | -               | 1.5 cm              | 0.608 W/kg                  | <b>0.64 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| CDMA800 (BC10) + WLAN2450           | -              | -               | 1.5 cm              | 0.621 W/kg                  | <b>0.68 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| 2-slot GPRS850 + WLAN2450           | -              | -               | 1.5 cm              | 0.603 W/kg                  | <b>0.63 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| WCDMA850 (Band 5) + WLAN2450        | -              | -               | 1.5 cm              | 0.504 W/kg                  | <b>0.54 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| LTE850 (Band 26 Limited) + WLAN2450 | -              | -               | 1.5 cm              | 0.342 W/kg                  | <b>0.40 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| LTE850 (Band 26) + WLAN2450         | -              | -               | 1.5 cm              | 0.329 W/kg                  | <b>0.35 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| CDMA1900 + WLAN2450                 | -              | -               | 1.5 cm              | 0.643 W/kg                  | <b>0.74 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| 4-slot GPRS1900 + WLAN2450          | -              | -               | 1.5 cm              | 0.486 W/kg                  | <b>0.52 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| WCDMA1900 (Band 2) + WLAN2450       | -              | -               | 1.5 cm              | 0.607 W/kg                  | <b>0.64 W/kg</b>             | 1.6 W/kg           | PASSED | -      |
| LTE1900 (Band 25) + WLAN2450        | -              | -               | 1.5 cm              | 0.770 W/kg                  | <b>0.83 W/kg</b>             | 1.6 W/kg           | PASSED | -      |

(Table continues)

(Table continues)

|                                    |   |   |        |            |                  |          |               |   |
|------------------------------------|---|---|--------|------------|------------------|----------|---------------|---|
| LTE2500<br>(Band 41)<br>+ WLAN2450 | - | - | 1.5 cm | 0.187 W/kg | <b>0.19 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | - |
|------------------------------------|---|---|--------|------------|------------------|----------|---------------|---|

### 1.2.3 Wireless Router Configuration

#### Summary of Maximum Results for Wireless Router mode at 10.0mm

| Mode                                | Ch / f(MHz)    | Conducted power | Separation distance | Measured SAR value (1g avg) | Reported* SAR value (1g avg) | SAR limit (1g avg) | Result        | Plot # |
|-------------------------------------|----------------|-----------------|---------------------|-----------------------------|------------------------------|--------------------|---------------|--------|
| CDMA800 (BC0)                       | 384 / 836.5    | 24.1 dBm        | 10.0 mm             | 0.733 W/kg                  | <b>0.79 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 27     |
| CDMA800 (BC10)                      | 684 / 823.1    | 24.0 dBm        | 10.0 mm             | 0.764 W/kg                  | <b>0.84 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 28     |
| 2-slot GPRS850                      | 128 / 824.2    | 30.2 dBm        | 10.0 mm             | 0.679 W/kg                  | <b>0.71 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 29     |
| WCDMA850 (Band 5)                   | 4132 / 826.4   | 23.6 dBm        | 10.0 mm             | 0.596 W/kg                  | <b>0.64 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 30     |
| LTE850 (Band 26 Limited)            | 26740 / 819.0  | 22.7 dBm        | 10.0 mm             | 0.480 W/kg                  | <b>0.56 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 31     |
| LTE850 (Band 26)                    | 26915 / 836.5  | 22.8 dBm        | 10.0 mm             | 0.364 W/kg                  | <b>0.42 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 32     |
| CDMA1900                            | 1175 / 1908.75 | 23.9 dBm        | 10.0 mm             | 1.10 W/kg                   | <b>1.23 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 33     |
| 4-slot GPRS1900                     | 512 / 1850.2   | 24.1 dBm        | 10.0 mm             | 0.797 W/kg                  | <b>0.85 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 34     |
| WCDMA1900 (Band 2)                  | 9262 / 1852.4  | 20.3 dBm        | 10.0 mm             | 0.466 W/kg                  | <b>0.54 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 35     |
| LTE1900 (Band 25)                   | 26365 / 1882.5 | 23.3 dBm        | 10.0 mm             | 1.18 W/kg                   | <b>1.36 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 36     |
| LTE2500 (Band 41)                   | 41055 / 2636.5 | 22.8 dBm        | 10.0 mm             | 0.656 W/kg                  | <b>0.67 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 37     |
| WLAN2450                            | 11 / 2462.0    | 17.4 dBm        | 10.0 mm             | 0.335 W/kg                  | <b>0.34 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 38     |
| CDMA800 (BC0) + WLAN2450            | -              | -               | 10.0 mm             | 0.820 W/kg                  | <b>0.87 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | -      |
| CDMA800 (BC10) + WLAN2450           | -              | -               | 10.0 mm             | 0.830 W/kg                  | <b>0.91 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | -      |
| 2-slot GPRS850 + WLAN2450           | -              | -               | 10.0 mm             | 0.754 W/kg                  | <b>0.79 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | -      |
| WCDMA850 (Band 5) + WLAN2450        | -              | -               | 10.0 mm             | 0.668 W/kg                  | <b>0.71 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | -      |
| LTE850 (Band 26 Limited) + WLAN2450 | -              | -               | 10.0 mm             | 0.567 W/kg                  | <b>0.65 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | -      |
| LTE850 (Band 26) + WLAN2450         | -              | -               | 10.0 mm             | 0.364 W/kg                  | <b>0.42 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 32     |
| CDMA1900 + WLAN2450                 | -              | -               | 10.0 mm             | 1.10 W/kg                   | <b>1.23 W/kg</b>             | 1.6 W/kg           | <b>PASSED</b> | 33     |

(Table continues)

(Table continues)

|                                     |   |   |         |            |                  |          |               |    |
|-------------------------------------|---|---|---------|------------|------------------|----------|---------------|----|
| 4-slot GPRS1900<br>+ WLAN2450       | - | - | 10.0 mm | 0.813 W/kg | <b>0.87 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| WCDMA1900<br>(Band 2)<br>+ WLAN2450 | - | - | 10.0 mm | 0.523 W/kg | <b>0.56 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |
| LTE1900<br>(Band 25)<br>+ WLAN2450  | - | - | 10.0 mm | 1.18 W/kg  | <b>1.36 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | 36 |
| LTE2500<br>(Band 41)<br>+ WLAN2450  | - | - | 10.0 mm | 0.671 W/kg | <b>0.69 W/kg</b> | 1.6 W/kg | <b>PASSED</b> | -  |

\* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance.

#### 1.2.4 Summary SAR data

|                                                              | FCC-defined SAR values for the Grants of Equipment Authorization |           |     |
|--------------------------------------------------------------|------------------------------------------------------------------|-----------|-----|
|                                                              | PCE                                                              | DTS       | NII |
| <b>Maximum Head SAR values</b>                               | 1.01 W/kg                                                        | 0.83 W/kg | -   |
| {Max + Max} Simultaneous Head SAR value                      | 1.50 W/kg <sup>†</sup>                                           |           |     |
| <b>Maximum Body SAR values</b>                               | 0.74 W/kg                                                        | 0.16 W/kg | -   |
| {Max + Max} Simultaneous Body SAR value                      | 0.84 W/kg                                                        |           |     |
| <b>Maximum Product Specific (Wireless Router) SAR values</b> | 1.36 W/kg                                                        | 0.34 W/kg | -   |
| {Max + Max} Simultaneous Product Specific SAR value          | 1.54 W/kg                                                        |           |     |
| <b>Maximum Simultaneous SAR value</b>                        | 1.54 W/kg                                                        |           |     |
| <b>Wireless Router SAR: LTE1900 (Band 41) + WLAN2450</b>     |                                                                  |           |     |

Note:

PCE contains the highest results between all cellular modes (cellular, AWS and PCS bands)

DTS contains the highest results between WLAN 2.4GHz + RLAN 5725-5850MHz

NII contains the highest results between RLAN 5150-5250, 5250-5350 and 5470-5725

† From Section 7.1.1:

The highest {Max + Max} Simultaneous Head SAR value is 1.84W/kg i.e. > 1.6W/kg for LTE1900 Antenna 2 + WLAN2450 Left Cheek test configuration. As described in KDB447498 D01 v05 the Antenna Pair SAR to Peak Separation Ratio = 0.03, hence Simultaneous Transmission Procedures are not required (see Section 7.1.1 Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements).

The second highest {Max + Max} Simultaneous Head SAR value is 1.69W/kg i.e. > 1.6W/kg for WCDMA1900 Antenna 2 + WLAN2450 Left Cheek test configuration. As described in KDB447498 D01 v05 the Antenna Pair SAR to Peak Separation Ratio = 0.03, hence Simultaneous Transmission Procedures are not required (see Section 7.1.1 Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements).

### 1.2.5 Maximum Drift

| Maximum drift covered by<br>5% scaling up of the SAR values | Maximum drift during measurements |
|-------------------------------------------------------------|-----------------------------------|
| 0.2dB                                                       | 0.20dB                            |

### 1.2.6 Measurement Uncertainty

|                                |         |
|--------------------------------|---------|
| Expanded Uncertainty (k=2) 95% | ± 29.8% |
|--------------------------------|---------|

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

|                      |                                   |
|----------------------|-----------------------------------|
| Device category      | Portable                          |
| Exposure environment | General population / uncontrolled |

| Modes of Operation | Bands                 | Modulation Mode | Duty Cycle   | Transmitter Frequency Range (MHz) | Power Tuning Target (dBm)  |         |        |        | Upper Limit of Power Tuning Tolerance (dBm) |         |        |        |
|--------------------|-----------------------|-----------------|--------------|-----------------------------------|----------------------------|---------|--------|--------|---------------------------------------------|---------|--------|--------|
|                    |                       |                 |              |                                   | 1-slot                     | 2-slot  | 3-slot | 4-slot | 1-slot                                      | 2-slot  | 3-slot | 4-slot |
| GSM / GPRS         | 850                   | GMSK            | 1/8 to 4/8   | 824 – 849                         | 32.5                       | 30.0    | 28.2   | 27.0   | 32.9                                        | 30.4    | 28.6   | 27.4   |
|                    | 1900                  |                 |              | 1850 – 1910                       | 29.0                       | 27.0    | 25.2   | 24.0   | 29.4                                        | 27.4    | 25.6   | 24.4   |
| EGPRS              | 850                   | GMSK            | 1/8 to 4/8   | 824 – 849                         | 27.0                       | 24.0    | 22.2   | 21.0   | 27.4                                        | 24.4    | 22.6   | 21.4   |
|                    | 1900                  |                 |              | 1850 – 1910                       | 26.0                       | 23.0    | 21.2   | 20.0   | 26.4                                        | 23.4    | 21.6   | 20.4   |
| CDMA               | 800 (BC0)             | QPSK            | 1            | 824 – 849                         | 24.0                       |         |        |        | 24.4                                        |         |        |        |
|                    | 800 (BC10)            | QPSK            | 1            | 816 – 824                         | 24.0                       |         |        |        | 24.4                                        |         |        |        |
|                    | 1900 (BC1)            | QPSK            | 1            | 1850 – 1910                       | 24.0                       |         |        |        | 24.4                                        |         |        |        |
| WCDMA              | 850 (Band V)          |                 | 1            | 826 – 847                         | 23.5                       |         |        |        | 23.9                                        |         |        |        |
|                    | 1900 (Band II)        |                 | 1            | 1852 – 1908                       | 23.5                       |         |        |        | 23.9                                        |         |        |        |
| HSUPA              | 850 (Band V)          |                 | 1            | 826 – 847                         | See Appendix D for details |         |        |        |                                             |         |        |        |
|                    | 1900 (Band II)        |                 | 1            | 1852 – 1908                       | See Appendix D for details |         |        |        |                                             |         |        |        |
| LTE(FDD)           | 850 (Band 26 Limited) | QPSK / 16QAM    | 1            | 814 – 824                         | 23.0 / 22.0                |         |        |        | 23.4 / 22.4                                 |         |        |        |
|                    | 850 (Band 26)         | QPSK / 16QAM    | 1            | 824 - 849                         | 23.0 / 22.0                |         |        |        | 23.4 / 22.4                                 |         |        |        |
|                    | 1900(Band 25)         | QPSK / 16QAM    | 1            | 1850 – 1915                       | 23.5 / 22.5                |         |        |        | 23.9 / 22.9                                 |         |        |        |
| LTE(TDD)           | 2500(Band 41)         | QPSK / 16QAM    | 1/10 to 6/10 | 2496 – 2690                       | 23.5 / 22.5                |         |        |        | 23.9 / 22.9                                 |         |        |        |
| BT                 | 2450                  | GFSK            | 1            | 2402 – 2480                       | 10                         |         |        |        | 11.5                                        |         |        |        |
|                    |                       |                 |              |                                   | Ch 1                       | Ch 2-10 | Ch 11  |        | Ch 1                                        | Ch 2-10 | Ch 11  |        |
| WLAN b-mode        | 2450                  | DSSS            | 1            | 2412 – 2462                       | 16.0                       | 16.0    | 16.0   |        | 17.5                                        | 17.5    | 17.5   |        |
| WLAN g-mode        | 2450                  | OFDM            | 1            | 2412 – 2462                       | 16.0                       | 16.0    | 12.0   |        | 17.5                                        | 17.5    | 13.5   |        |
| WLAN n-mode        | 2450                  | OFDM            | 1            | 2412 – 2462                       | 15.0                       | 15.0    | 12.0   |        | 16.5                                        | 16.5    | 13.5   |        |

Outside of USA, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900 and GSM/GPRS/EGPRS1800 and HSUPA/WCDMA2100(Band 1) which are not part of this filing.

This is a 1 x RTT Ev-Do RevA device.

This device has Voice-over-IP capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

This device has also HSUPA capabilities in all WCDMA bands listed above. HSUPA target powers are always lower than or equal to the corresponding WCDMA target power listed above, details of the HSUPA MPR scheme, power targets and power results can be found in Appendix D. SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25dB above the basic WCDMA 12.2kbps RMC mode.

This is an LTE Category 4 device; it contains 3 FCC LTE bands, namely LTE bands 850(Band 26), 1900(Band 25) and 2500(Band 41). In LTE850(Band 26 Limited), the device possesses Channel Bandwidths of 10MHz and 5MHz; in LTE850 (Band 26), the device possesses Channel Bandwidths of 15MHz, 10MHz and 5MHz; in LTE1900(Band 25), the device possesses Channel Bandwidths of 20MHz, 15MHz, 10MHz and 5MHz; in LTE2500(Band41), the device possesses Channel Bandwidths of 20MHz, 15MHz, 10MHz and 5MHz are available.

According to KDB 941225 D05 SAR for LTE Devices v02r03, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

| UL-DL Configuration | Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   | Calculated Duty Cycle (%) |
|---------------------|--------------------------|-----------------|---|---|---|---|---|---|---|---|---|---------------------------|
|                     |                          | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |                           |
| 0                   | 5ms                      | D               | S | U | U | U | D | S | U | U | U | 63.33                     |
| 1                   | 5ms                      | D               | S | U | U | D | D | S | U | U | D | 43.33                     |
| 2                   | 5ms                      | D               | S | U | D | D | D | S | U | D | D | 23.33                     |
| 3                   | 10ms                     | D               | S | U | U | U | D | D | D | D | D | 31.67                     |
| 4                   | 10ms                     | D               | S | U | U | D | D | D | D | D | D | 21.67                     |
| 5                   | 10ms                     | D               | S | U | D | D | D | D | D | D | D | 11.67                     |
| 6                   | 5ms                      | D               | S | U | U | U | D | S | U | U | D | 53.33                     |

This is a BT Class 1 device and its power tuning target upper limit is 11.5dBm. WLAN2450 power tuning target upper limit is 18dBm. Since WLAN2450 and BT use same frequency and antenna, WLAN2450 power is 6.5dB higher, and they cannot transmit simultaneously, the WLAN2450 standalone SAR is conservative estimation of BT SAR. As WLAN2450 SAR result is below limit, also BT SAR can be deemed to comply without further analysis or standalone measurements. Also WLAN2450+cellular bands combined SAR results can be regarded as conservative estimation of BT+cellular combined SARs. As WLAN2450+cellular combined SAR result are below limit, also BT+cellular combined SAR can be deemed to comply without further analysis and estimations required in KDB 447498 for simultaneous transmission exclusion.

This device has Wireless Router "Hotspot" mode capability.

Two antennas are used for transmission of some of the cellular bands in diversity-Tx mode. In this mode the antennas can not transmit at the same time. See table below for applicable antennas in each transmission band and mode. A separate single antenna is used for WLAN. All antennas are fully and separately SAR tested for individual transmission. Simultaneous transmissions with WLAN2450 are assessed separately for both cellular antennas.

|                          | Tx Antennas |           |
|--------------------------|-------------|-----------|
|                          | Antenna 1   | Antenna 2 |
| CDMA800 (BC0)            |             | ✓         |
| CDMA800 (BC10)           |             | ✓         |
| GSM/GPRS/EGPRS850        |             | ✓         |
| WCDMA850 (Band 5)        | ✓           | ✓         |
| LTE850 (Band 26 Limited) | ✓           | ✓         |
| LTE850 (Band 26)         | ✓           | ✓         |
| CDMA1900 (BC1)           | ✓           |           |
| GSM/GPRS/EGPRS1900       | ✓           |           |
| WCDMA1900 (Band 2)       | ✓           | ✓         |
| LTE1900 (Band 2500)      | ✓           | ✓         |
| LTE2500 (Band 41)        |             | ✓         |

Simultaneous transmission of any singular cellular and PCS band is possible with WLAN in Head, Body-worn and Wireless router use according to the table below.

| Simultaneous transmission capabilities in Head and Body-worn use |          |
|------------------------------------------------------------------|----------|
|                                                                  | WLAN2450 |
| CDMA800 (BC0)                                                    |          |
| CDMA800 (BC10)                                                   | ✓        |
| GSM/GPRS/EGPRS850                                                | ✓        |
| WCDMA850 (Band 5)                                                | ✓        |
| LTE850 (Band 26 Limited)                                         | ✓        |
| LTE850 (Band 26)                                                 | ✓        |
| CDMA1900 (BC1)                                                   | ✓        |
| GSM/GPRS/EGPRS1900                                               | ✓        |
| WCDMA1900 (Band 2)                                               | ✓        |
| LTE1900 (Band 25)                                                | ✓        |
| LTE2500 (Band 41)                                                | ✓        |

The hotspot mode (Wireless Router mode) may operate concurrently in DTM mode with voice calls. The reported SAR test results are conservative regarding that use case, since output power in hotspot mode is equal to or lower than in normal voice and data modes. See following chapter for hotspot mode power reductions. Also simultaneous transmissions with WLANs are already conservatively assessed for head and body-worn exposure conditions due to VoIP capability.

## 2.1 Power reductions in Wireless Router configurations

The following table details the power reductions active in Wireless Router mode:


| Band                                       | Power reduction in<br>WR mode | Target tuning power in WR mode                                                               |                                                                                                  |                |
|--------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------|
| CDMA800 (BC0)                              | 0 dB                          | 24.0 dBm                                                                                     |                                                                                                  |                |
| CDMA800 (BC10)                             | 0 dB                          | 24.0 dBm                                                                                     |                                                                                                  |                |
| GPRS/EGPRS850                              | 0 dB                          | 1-slot GPRS: 32.5dBm<br>2-slot GPRS: 30.0dBm<br>3-slot GPRS: 28.2dBm<br>4-slot GPRS: 27.0dBm | 1-slot EGPRS: 27.0dBm<br>2-slot EGPRS: 24.0dBm<br>3-slot EGPRS: 22.2dBm<br>4-slot EGPRS: 21.0dBm |                |
| WCDMA850 (Band5)                           | 0 dB                          | 23.5dBm                                                                                      |                                                                                                  |                |
| LTE850 (Band 26 Limited)                   | 0 dB                          | 23.0dBm                                                                                      |                                                                                                  |                |
| LTE850 (Band 26)                           | 0 dB                          | 23.0dBm                                                                                      |                                                                                                  |                |
| CDMA1900 (Band 1)                          | 0 dB                          | 24.0dBm                                                                                      |                                                                                                  |                |
| GPRS/EGPRS1900                             | 0 dB                          | 1-slot GPRS: 29.0dBm<br>2-slot GPRS: 27.0dBm<br>3-slot GPRS: 25.2dBm<br>4-slot GPRS: 24.0dBm | 1-slot EGPRS: 26.0dBm<br>2-slot EGPRS: 23.0dBm<br>3-slot EGPRS: 21.2dBm<br>4-slot EGPRS: 20.0dBm |                |
| WCDMA1900 (Band 2)                         | 3 dB                          | 20.5dBm                                                                                      |                                                                                                  |                |
| LTE1900 (Band 25)                          | 0 dB                          | 23.5dBm                                                                                      |                                                                                                  |                |
| LTE2500 (Band 41)                          | 0 dB                          | 23.5dBm                                                                                      |                                                                                                  |                |
| WLAN2450 b-mode<br>(DSSS 1 Mbps)           | 0 dB                          | Ch 1: 16.0dBm                                                                                | Ch 2-10: 16.0dBm                                                                                 | Ch 11: 16.0dBm |
| WLAN2450 g-mode<br>(OFDM 6 Mbps)           | 0 dB                          | Ch 1: 16.0dBm                                                                                | Ch 2-10: 16.0dBm                                                                                 | Ch 11: 12.0dBm |
| WLAN2450 n-mode<br>(MCS 0 – OFDM 6.5 Mbps) | 0 dB                          | Ch 1: 15.0dBm                                                                                | Ch 2-10: 15.0dBm                                                                                 | Ch 11: 12.0dBm |

‡ Wireless Router ‘Hotspot’ mode use is not restricted during Voice calls, hence SAR compliance has been addressed for the simultaneous Voice and Hotspot data configurations in Head and Body-worn accessory use conditions (KDB 941225 D06 Hot Spot SAR v01)


## 2.2 Description of the Antenna

The device has 2 separate internal antennas for cellular, AWS and PCS use and one internal antenna for WLAN use. The cellular antenna 1 is located at the near right bottom underneath

the back cover and cellular antenna 2 is located at the near left bottom underneath the back cover. The WLAN antenna is located at the top underneath the back cover.

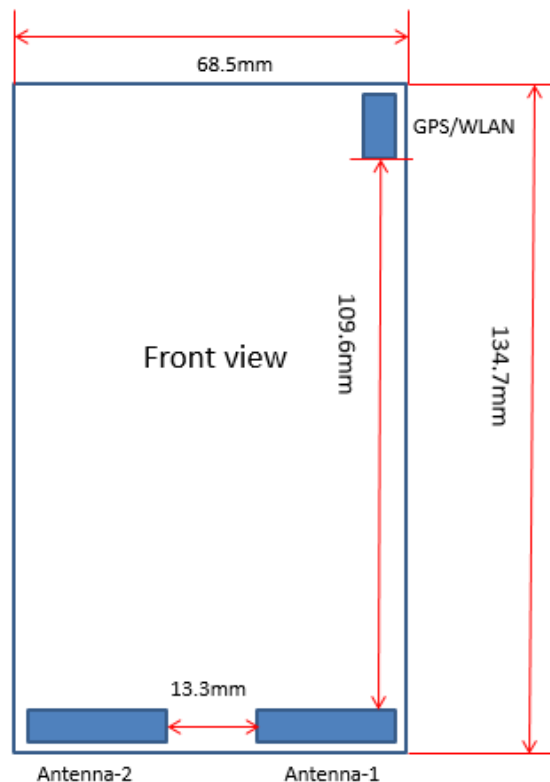

Schematics showing Tx and Rx circuitry, antenna switch, conducted ports and antenna.

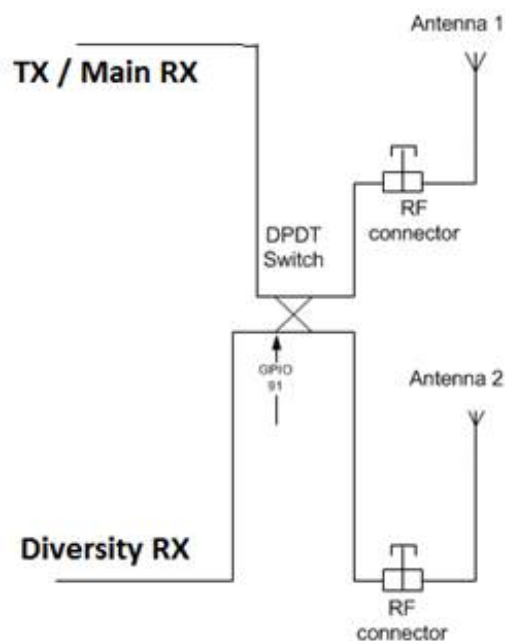

### 3. TEST CONDITIONS

#### 3.1 Temperature and Humidity

|                           |             |
|---------------------------|-------------|
| Ambient temperature (°C): | 20.5 – 22.5 |
| Ambient humidity (RH %):  | 35 - 55     |

#### 3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

A CMW500 call tester was used to configure the test device for transmitting all the LTE bands; in each band, the Uplink Power Control was set to 'Max Power'. Additional Spectrum Emission was set to 'NS\_01' to disable A-MPR.

A CMU200 call tester was used for all the GSM/GPRS/EGPRS and WCDMA bands; in the case of GSM/GPRS/EGPRS the MS signal was always set to maximum power, whereas for WCDMA the UE uplink signal was configured to 12.2kbps RMC with all TPC bit set to 1.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

This device was tested in all the available multi-slot GMSK GPRS modes.

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as "1". All WCDMA testing has been carried out in accordance with FCC KDB 941225: SAR Measurement Procedures for 3G Devices.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The number of Tx slots in all GSM/GPRS mode tests was based on tuning target/conducted power data, see Appendix H. The number of slots with highest or equal highest time-average power was tested.

The conducted output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the appendixes G-J of this report.

The transmission mode of the device in all WLAN b-mode tests was BPSK 1Mbps. This mode has the highest time-averaged output power of all the WLAN a, b, g and n modulation modes in

this device as illustrated in table in Appendix J .All WLAN testing has been carried out in accordance with FCC KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters.

LTE band has been tested according to the guidance given in KDB941225 D05 SAR for LTE Devices v01. MPR values as stipulated in Table 6.2.3\_1 of 3GPP TS 36.101 (presented below) have been incorporated into the device; these MPR values are dependent on the modulation, Channel Bandwidth and Resource Block allocations as shown:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

| Modulation | Channel bandwidth / Transmission bandwidth (RB) |         |       |        |        |        | MPR (dB) |
|------------|-------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                         | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                             | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                             | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                             | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

No additional MPR settings have been incorporated into the design of the device and therefore no A-MPR settings have been active during its testing.

Here is a summary list of the KDB documents used in the reported testing:

KDB941225 D05 SAR for LTE Devices v02r02 DR07-41372  
 KDB 941225 D01 SAR Measurement Procedures for 3G Devices  
 KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters  
 KDB 648474 D04 SAR Handsets Multi Xmitter and Ant v01  
 KDB 941225 D06 v01 Hot Spot SAR  
 KDB 447498 D01 General RF Exposure Guidance v05  
 KDB 690783 D01 SAR Listings on Grants  
 KDB 865664 D01 SAR Measurements 100MHz to 6GHz v01  
 KDB 865664 D02 SAR Reporting v01

## 4. DESCRIPTION OF THE TEST EQUIPMENT

### 4.1 Measurement System and Components

The measurements were performed using an automated DASY near-field scanning system manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

| Test Equipment                 | Serial Number | Calibration date | Calibration expiry |
|--------------------------------|---------------|------------------|--------------------|
| DAE 4                          | 710           | 2014-03          | 2015-03            |
| DAE 4                          | 1324          | 2014-03          | 2015-03            |
| DAE 4                          | 1319          | 2013-09          | 2014-09            |
| DAE 4                          | 480           | 2013-09          | 2014-09            |
| DAE 4                          | 887           | 2014-03          | 2015-03            |
| E-field Probe EX3DV4           | 3823          | 2013-09          | 2014-09            |
| E-field Probe EX3DV4           | 3838          | 2014-03          | 2015-03            |
| E-field Probe ES3DV3           | 3280          | 2014-03          | 2015-03            |
| E-field Probe ES3DV3           | 3195          | 2014-03          | 2015-03            |
| Dipole Validation Kit, D835V2  | 4d005         | 2014-03          | 2016-03            |
| Dipole Validation Kit, D1900V2 | 547           | 2013-09          | 2015-09            |
| Dipole Validation Kit, D2450V2 | 883           | 2014-03          | 2016-03            |
| Dipole Validation Kit, D2450V2 | 760           | 2013-03          | 2015-03            |
| Dipole Validation Kit, D2600V2 | 1042          | 2013-09          | 2015-09            |
| Dipole Validation Kit, D2600V2 | 1082          | 2014-06          | 2016-06            |
| DASY5 software                 | Version 52.8  | -                | -                  |

Additional test equipment used in testing:

| Test Equipment       | Model      | Serial Number | Calibration date | Calibration expiry |
|----------------------|------------|---------------|------------------|--------------------|
| Signal Generator     | 8648C      | 3847M00258    | 2014-04          | 2015-04            |
| Signal Generator     | SME06      | 829445/008    | 2014-04          | 2015-04            |
| Signal Generator     | E4432B     | US40052231    | 2014-04          | 2015-04            |
| Signal Generator     | SME06      | 829683/005    | 2014-04          | 2015-04            |
| Call Tester          | CMU200     | 835352/008    | -                | -                  |
| Call Tester          | CMU200     | 831593/001    | -                | -                  |
| Call Tester          | CMU200     | 110735        | -                | -                  |
| Call Tester          | CMW500     | 113277        | -                | -                  |
| Call Tester          | CMW500     | 115794        | -                | -                  |
| Call Tester          | SP6010     | SP6010-0329   | -                | -                  |
| Call Tester          | SP6010     | SP6010-0299   | -                | -                  |
| Amplifier            | ZHL-42W    | QA1252001     | -                | -                  |
| Amplifier            | 5S1G4M3    | 302339        | -                | -                  |
| Amplifier            | AR 5S1G4M1 | 306024        | -                | -                  |
| Amplifier            | ZHL-4240W  | e060204/1     | -                | -                  |
| RF Network Analyzer  | E5071C     | MY46104578    | 2014-04          | 2015-04            |
| RF Network Analyzer  | 8753ES     | US39170317    | 2014-04          | 2015-04            |
| RF Network Analyzer  | 8753ES     | My40002096    | 2014-04          | 2015-04            |
| Dielectric Probe Kit | DAK-3.5    | 1065          | -                | -                  |
| Dielectric Probe Kit | 85070C     | 653           | -                | -                  |
| Dielectric Probe Kit | 85070C     | 2577          | -                | -                  |
| Power Meter          | NRP        | 101293        | 2014-04          | 2015-04            |
| Power Sensor         | NRP-Z51    | 100410        | 2014-04          | 2015-04            |
| Power Meter          | NRP2       | 103071        | 2014-04          | 2015-04            |
| Power Sensor         | NRP-Z51    | 104120        | 2014-04          | 2015-04            |
| Power Meter          | E4419B     | My41291520    | 2014-04          | 2015-04            |
| Power Sensor         | 8482A      | US37295410    | 2014-04          | 2015-04            |
| Power Meter          | NRVD       | 840297/008    | 2014-04          | 2015-04            |
| Power Sensor         | NRV-Z51    | 101135        | 2014-04          | 2015-04            |

#### 4.1.1 Isotropic E-field Probe Type ES3DV3

|                      |                                                                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol) |
| <b>Calibration</b>   | Calibration certificate in Appendix E                                                                                                                                                        |
| <b>Frequency</b>     | 10 MHz to 4 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)                                                                                                                       |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in HSL (rotation normal to probe axis)                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                           |
| <b>Dimensions</b>    | Overall length: 330 mm<br>Tip length: 20 mm<br>Body diameter: 12 mm<br>Tip diameter: 3.9 mm                                                                                                  |
| <b>Application</b>   | Distance from probe tip to dipole centers: 2.0 mm<br>General dosimetry up to 4 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                     |

#### 4.1.2 Isotropic E-field Probe Type EX3DV4

|                      |                                                                                                                                                                          |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)              |
| <b>Calibration</b>   | Calibration certificate in Appendix E                                                                                                                                    |
| <b>Frequency</b>     | 10 MHz to >6 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                  |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                      |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to > 100 mW/g, Linearity: $\pm 0.2$ dB                                                                                                                      |
| <b>Dimensions</b>    | Overall length: 330 mm<br>Tip length: 10 mm<br>Body diameter: 12 mm<br>Tip diameter: 2.5 mm                                                                              |
| <b>Application</b>   | Distance from probe tip to dipole centers: 1.0 mm<br>General dosimetry up to 6 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms |

## 4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

## 4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 and FCC published RF Exposure KDB Procedures. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm measured from the ear reference point during system checking and device measurements.

### 4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

#### 800MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 39.74                 | 55.97                 |
| HEC             | 0.25                  | 1.21                  |
| Sugar           | 58.31                 | 41.76                 |
| Preservative    | 0.15                  | 0.27                  |
| Salt            | 1.55                  | 0.79                  |

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 51.50                 | 69.25                 |
| Tween 20        | 47.35                 | 30.00                 |
| Salt            | 1.15                  | 0.75                  |

#### 1900MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 54.50                 | 70.25                 |
| Tween 20        | 45.23                 | 29.41                 |
| Salt            | 0.27                  | 0.34                  |

#### 2450-2600MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 56.0                  | 70.20                 |
| Tween 20        | 44.0                  | 29.62                 |
| Salt            | -                     | 0.18                  |

## 4.4 System validation and System checking

### 4.4.1 System validation status

| Probe<br>Calibration<br>Point<br>f / MHz | Test<br>System         | DASY<br>SW | Dipole<br>Type / SN | Probe<br>Type / SN | Calibrated<br>signal<br>type(s) | DAE unit<br>Type / SN | Validation done         |                         |
|------------------------------------------|------------------------|------------|---------------------|--------------------|---------------------------------|-----------------------|-------------------------|-------------------------|
|                                          |                        |            |                     |                    |                                 |                       | Head tissue<br>simulant | Body tissue<br>simulant |
| 835                                      | TCC Beijing<br>/ SAR-3 | V52.8      | D835V2 /<br>4d005   | EX3DV4 /<br>3838   | CW                              | DAE4 /<br>480         | 2014-05                 | 2014-04                 |
| 1900                                     | TCC Beijing<br>/ SAR-1 | V52.8      | D1900V2 /<br>547    | ES3DV3 /<br>3195   | CW                              | DAE4 /<br>1324        | 2014-05                 | 2014-04                 |
| 2450                                     | TCC Beijing<br>/ SAR-2 | V52.8      | D2450V2 /<br>760    | ES3DV3 /<br>3823   | CW                              | DAE4 /<br>1319        | 2014-02                 | -                       |
| 2450                                     | TCC Beijing<br>/ SAR-4 | V52.8      | D2450V2 /<br>883    | EX3DV4 /<br>3280   | CW                              | DAE4 /<br>887         | 2014-05                 | 2014-06                 |
| 2600                                     | TCC Beijing<br>/ SAR-4 | V52.8      | D2600V2 /<br>1042   | EX3DV4 /<br>3280   | CW                              | DAE4 /<br>1324        | 2014-05                 | 2014-08                 |

#### 4.4.2 System checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom for head system checking, and under the flat phantom for body system checking. The system checking results (dielectric parameters and SAR values) are given in the table below.

##### System checking, head tissue simulant

| $f$<br>[MHz] | Description               | SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>[W/kg] | Estimated<br>SAR 1g<br>Deviation | Scaled<br>1W SAR<br>1g<br>[W/kg] | Dielectric<br>Parameters* |                   | SAR 1g<br>Deviation<br>from<br>target               | Dielectric<br>Parameters<br>Deviation from<br>target |                    | Temp<br>[°C] | Plot<br># |
|--------------|---------------------------|------------------|-------------------------------|----------------------------------|----------------------------------|---------------------------|-------------------|-----------------------------------------------------|------------------------------------------------------|--------------------|--------------|-----------|
|              |                           |                  |                               | dSAR [%]                         |                                  | $\epsilon_r$              | $\sigma$<br>[S/m] |                                                     | dSAR [%]                                             | d $\epsilon_r$ [%] |              |           |
|              | Tolerances                |                  |                               | ±3%                              |                                  |                           |                   | ±10 %                                               | ±5 %                                                 | ±5 %               |              |           |
| 835          | Target result<br>SN:4d005 | -                | -                             | -                                | 9.32                             | 41.5                      | 0.90              | TCC Beijing/SAR-3<br>EX3DV4 SN:3838 Head<br>835MHz  |                                                      |                    |              |           |
|              | 2014-08-22                | 2.31             | 2.30                          | -0.43                            | 9.24                             | 41.6                      | 0.90              | -0.86                                               | 0.24                                                 | 0.00               | 21.2         | -         |
|              | 2014-08-25                | 2.25             | 2.24                          | -0.44                            | 9.00                             | 41.1                      | 0.88              | -3.43                                               | -0.96                                                | -2.22              | 21.2         | -         |
|              | 2014-08-27                | 2.27             | 2.27                          | 0.00                             | 9.08                             | 41.4                      | 0.90              | -2.58                                               | -0.24                                                | 0.00               | 21.2         | -         |
|              | 2014-09-01                | 2.25             | 2.25                          | 0.00                             | 9.00                             | 40.8                      | 0.88              | -3.43                                               | -1.69                                                | -2.22              | 21.1         | -         |
|              | 2014-09-05                | 2.17             | 2.16                          | -0.46                            | 8.68                             | 40.1                      | 0.87              | -6.87                                               | -3.37                                                | -3.33              | 21.6         | 1         |
| 1900         | Target result<br>SN:547   | -                | -                             | -                                | 40.9                             | 40.0                      | 1.40              | TCC Beijing/SAR-1<br>ES3DV3 SN:3195 Head<br>1900MHz |                                                      |                    |              |           |
|              | 2014-08-22                | 9.93             | 9.87                          | -0.60                            | 39.7                             | 39.9                      | 1.46              | -2.89                                               | -0.25                                                | 4.29               | 21.1         | -         |
|              | 2014-08-25                | 9.66             | 9.75                          | 0.93                             | 38.6                             | 38.2                      | 1.45              | -5.53                                               | -4.50                                                | 3.57               | 21.1         | -         |
|              | 2014-08-29                | 9.97             | 9.99                          | 0.20                             | 39.9                             | 39.1                      | 1.45              | -2.49                                               | -2.25                                                | 3.57               | 21.2         | -         |
|              | 2014-09-02                | 9.64             | 9.73                          | 0.93                             | 38.6                             | 38.6                      | 1.45              | -5.72                                               | -3.50                                                | 3.57               | 21.1         | 2         |
| 2450         | Target result<br>SN:760   | -                | -                             | -                                | 53.6                             | 39.2                      | 1.80              | TCC Beijing/SAR-2<br>EX3DV4 SN:3823 Head<br>2450MHz |                                                      |                    |              |           |
|              | 2014-08-26                | 12.8             | 12.8                          | 0.00                             | 51.2                             | 38.2                      | 1.81              | -4.48                                               | -2.55                                                | 0.56               | 21.2         | 3         |
| 2600         | Target result<br>SN:1042  | -                | -                             | -                                | 56.5                             | 39.0                      | 1.96              | TCC Beijing/SAR-4<br>ES3DV3 SN:3280 Head<br>2600MHz |                                                      |                    |              |           |
|              | 2014-08-28                | 15.0             | 14.8                          | -1.33                            | 60.0                             | 39.1                      | 2.01              | 6.19                                                | 0.26                                                 | 2.55               | 22.2         | -         |
|              | 2014-09-05                | 15.3             | 15.1                          | -1.31                            | 61.2                             | 37.5                      | 2.00              | 8.32                                                | -3.85                                                | 2.04               | 21.5         | 4         |

\* Dielectric parameter reference data taken from IEEE1528/IEC62209

### System checking, body tissue simulant

| f[MHz] | Description               | SAR 1g<br>[W/kg] | Estimate<br>d SAR 1g<br>[W/kg] | Estimate<br>d SAR 1g<br>Deviation | Scaled 1W<br>SAR 1g<br>[W/kg] | Dielectric<br>Parameters* |                   | SAR 1g<br>Deviation<br>from<br>target               | Dielectric<br>Parameters<br>Deviation from<br>target |                   | Tem<br>p | Plot<br># |
|--------|---------------------------|------------------|--------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------|-----------------------------------------------------|------------------------------------------------------|-------------------|----------|-----------|
|        |                           |                  |                                | dSAR [%]                          |                               | $\epsilon_r$              | $\sigma$<br>[S/m] |                                                     | d $\epsilon_r$ [%]                                   | d $\sigma$<br>[%] |          |           |
|        | Tolerances                |                  |                                | ±3%                               |                               |                           |                   | ±10 %                                               | ±5 %                                                 | ±5 %              |          |           |
| 835    | Target result<br>SN:4d005 | -                | -                              | -                                 | 9.31                          | 55.2                      | 0.97              | TCC Beijing/SAR-3<br>EX3DV4 SN:3838 Body<br>835MHz  |                                                      |                   |          |           |
|        | 2014-08-28                | 2.42             | 2.40                           | -0.83                             | 9.68                          | 53.9                      | 0.95              | 3.97                                                | -2.36                                                | -2.06             | 21.2     | 5         |
|        | 2014-08-29                | 2.40             | 2.40                           | 0.00                              | 9.60                          | 54.6                      | 0.96              | 3.11                                                | -1.09                                                | -1.03             | 21.4     | -         |
|        | 2014-09-03                | 2.37             | 2.37                           | 0.00                              | 9.48                          | 54.3                      | 0.95              | 1.83                                                | -1.63                                                | -3.09             | 21.6     | -         |
|        | 2014-09-04                | 2.41             | 2.42                           | 0.41                              | 9.64                          | 54.0                      | 0.95              | 3.54                                                | -2.17                                                | -2.06             | 21.6     | -         |
| 1900   | Target result<br>SN:547   | -                | -                              | -                                 | 40.9                          | 53.3                      | 1.52              | TCC Beijing/SAR-1<br>ES3DV3 SN:3195 Body<br>1900MHz |                                                      |                   |          |           |
|        | 2014-08-27                | 10.0             | 10.2                           | 2.00                              | 40.0                          | 51.7                      | 1.53              | -2.20                                               | -3.00                                                | 0.66              | 21.2     | -         |
|        | 2014-08-28                | 9.98             | 10.0                           | 0.20                              | 39.9                          | 51.7                      | 1.53              | -2.44                                               | -3.00                                                | 0.66              | 21.2     | -         |
|        | 2014-09-03                | 9.77             | 9.82                           | 0.51                              | 39.1                          | 50.7                      | 1.50              | -4.45                                               | -4.88                                                | -1.32             | 21.2     | 6         |
|        | 2014-09-04                | 10.0             | 10.0                           | 0.00                              | 40.0                          | 50.9                      | 1.49              | -2.20                                               | -4.50                                                | -1.97             | 21.2     | -         |
|        | 2014-09-05                | 9.86             | 9.85                           | -0.10                             | 39.4                          | 50.7                      | 1.49              | -3.67                                               | -4.88                                                | -1.97             | 21.2     | -         |
| 2450   | Target result<br>SN:883   | -                | -                              | -                                 | 51.0                          | 52.7                      | 1.95              | TCC Beijing/SAR-4<br>ES3DV3 SN:3280 Body<br>2450MHz |                                                      |                   |          |           |
|        | 2014-09-03                | 13.6             | 13.6                           | 0.00                              | 54.4                          | 50.8                      | 1.93              | 6.67                                                | -3.61                                                | -1.03             | 21.8     | 7         |
| 2600   | Target result<br>SN:1082  | -                | -                              | -                                 | 56.0                          | 52.5                      | 2.16              | TCC Beijing/SAR-4<br>ES3DV3 SN:3280 Body<br>2600MHz |                                                      |                   |          |           |
|        | 2014-09-04                | 14.8             | 14.7                           | -0.68                             | 59.2                          | 51.1                      | 2.15              | 5.71                                                | -2.67                                                | -0.46             | 21.5     | 8         |

\* Dielectric parameter reference data taken from FCC Published RF Exposure KDB Procedures

Plots of the system checking scans are given in Appendix A.

## 4.5 Tissue Simulants used in the Measurements

### Head tissue simulant measurements

| f<br>[MHz] | Description       | Dielectric Parameters |                | Dielectric Parameters<br>Deviation from recommended value |               | Temp<br>[°C] |
|------------|-------------------|-----------------------|----------------|-----------------------------------------------------------|---------------|--------------|
|            |                   | $\epsilon_r$          | $\sigma$ [S/m] | $d\epsilon_r$ [%]                                         | $d\sigma$ [%] |              |
|            | Tolerances        |                       |                | $\pm 5$ %                                                 | $\pm 5$ %     |              |
| 819        | Recommended value | 41.6                  | 0.90           |                                                           |               |              |
|            | 2014-08-22        | 41.7                  | 0.89           | 0.24                                                      | -1.11         | 21.2         |
|            | 2014-08-27        | 41.5                  | 0.89           | -0.24                                                     | -1.11         | 21.2         |
|            | 2014-09-05        | 40.2                  | 0.86           | -3.37                                                     | -4.44         | 21.6         |
| 820        | Recommended value | 41.6                  | 0.90           |                                                           |               |              |
|            | 2014-09-01        | 40.9                  | 0.87           | -1.68                                                     | -3.33         | 21.1         |
| 831        | Recommended value | 41.5                  | 0.90           |                                                           |               |              |
|            | 2014-08-27        | 41.4                  | 0.89           | -0.24                                                     | -1.11         | 21.2         |
|            | 2014-09-05        | 40.2                  | 0.86           | -3.13                                                     | -4.44         | 21.6         |
| 835        | Recommended value | 41.5                  | 0.90           |                                                           |               |              |
|            | 2014-08-25        | 41.1                  | 0.88           | -0.96                                                     | -2.22         | 21.2         |
| 836        | Recommended value | 41.5                  | 0.90           |                                                           |               |              |
|            | 2014-08-27        | 41.4                  | 0.90           | -0.24                                                     | 0.00          | 21.2         |
| 1880       | Recommended value | 40.0                  | 1.40           |                                                           |               |              |
|            | 2014-08-29        | 39.2                  | 1.43           | -2.00                                                     | 2.14          | 21.2         |
|            | 2014-09-02        | 38.7                  | 1.43           | -3.25                                                     | 2.14          | 21.1         |
| 1882       | Recommended value | 40.0                  | 1.40           |                                                           |               |              |
|            | 2014-08-22        | 40.0                  | 1.44           | 0.00                                                      | 2.86          | 21.1         |
|            | 2014-08-25        | 38.3                  | 1.43           | -4.25                                                     | 2.14          | 21.1         |
| 2437       | Recommended value | 39.2                  | 1.79           |                                                           |               |              |
|            | 2014-08-26        | 38.3                  | 1.80           | -2.30                                                     | 0.56          | 21.2         |
| 2593       | Recommended value | 39.0                  | 1.96           |                                                           |               |              |
|            | 2014-08-28        | 39.2                  | 2.01           | 0.51                                                      | 2.55          | 22.2         |
|            | 2014-09-05        | 37.5                  | 2.00           | -3.85                                                     | 2.04          | 21.5         |

### Body tissue simulant measurements

| f<br>[MHz] | Description       | Dielectric Parameters |                | Dielectric Parameters<br>Deviation from recommended value |               | Temp<br>[°C] |
|------------|-------------------|-----------------------|----------------|-----------------------------------------------------------|---------------|--------------|
|            |                   | $\epsilon_r$          | $\sigma$ [S/m] | $d\epsilon_r$ [%]                                         | $d\sigma$ [%] |              |
|            | Tolerances        |                       |                | $\pm 5$ %                                                 | $\pm 5$ %     |              |
| 819        | Recommended value | 55.3                  | 0.97           |                                                           |               |              |
|            | 2014-08-28        | 54.1                  | 0.94           | -2.17                                                     | -3.09         | 21.2         |
|            | 2014-08-29        | 54.7                  | 0.94           | -1.08                                                     | -3.09         | 21.4         |
|            | 2014-09-04        | 54.2                  | 0.94           | -1.99                                                     | -3.09         | 21.6         |
| 820        | Recommended value | 55.3                  | 0.97           |                                                           |               |              |
|            | 2014-08-29        | 54.7                  | 0.95           | -1.08                                                     | -3.09         | 21.4         |
| 831        | Recommended value | 55.2                  | 0.97           |                                                           |               |              |
|            | 2014-08-28        | 53.9                  | 0.95           | -2.36                                                     | -2.06         | 21.2         |
|            | 2014-08-29        | 54.6                  | 0.96           | -1.09                                                     | -2.06         | 21.4         |
|            | 2014-09-04        | 54.1                  | 0.95           | -1.99                                                     | -2.06         | 21.6         |
| 835        | Recommended value | 55.2                  | 0.97           |                                                           |               |              |
|            | 2014-09-03        | 54.3                  | 0.95           | -1.63                                                     | -3.09         | 21.6         |
| 836        | Recommended value | 55.2                  | 0.97           |                                                           |               |              |
|            | 2014-09-03        | 54.2                  | 0.95           | -1.81                                                     | -2.06         | 21.6         |
|            | 2014-09-04        | 54.0                  | 0.95           | -2.17                                                     | -2.06         | 21.6         |
| 1880       | Recommended value | 53.3                  | 1.52           |                                                           |               |              |
|            | 2014-09-03        | 50.8                  | 1.48           | -4.69                                                     | -2.63         | 21.2         |
|            | 2014-09-04        | 50.9                  | 1.48           | -4.50                                                     | -3.29         | 21.2         |
|            | 2014-09-05        | 50.7                  | 1.47           | -4.88                                                     | -3.29         | 21.2         |
| 1882       | Recommended value | 53.3                  | 1.52           |                                                           |               |              |
|            | 2014-08-27        | 51.8                  | 1.51           | -2.81                                                     | -0.66         | 21.2         |
|            | 2014-08-28        | 51.8                  | 1.52           | -2.81                                                     | 0.00          | 21.2         |
|            | 2014-09-05        | 50.7                  | 1.47           | -3.88                                                     | -3.29         | 21.2         |
| 2437       | Recommended value | 52.7                  | 1.94           |                                                           |               |              |
|            | 2014-09-03        | 50.7                  | 1.91           | -3.80                                                     | -2.06         | 21.8         |
| 2593       | Recommended value | 52.5                  | 2.15           |                                                           |               |              |
|            | 2014-09-04        | 51.2                  | 2.14           | -2.48                                                     | -0.47         | 21.5         |

Dielectric parameter data for the band edges is given in Appendix C.

## 5. DESCRIPTION OF THE TEST PROCEDURE

### 5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Spacer

### 5.2 Test Positions

#### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

#### 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

---

Microsoft body-worn accessories are commonly available for the separation distance used in this testing.

### 5.2.3 Wireless Router Configuration

The device was placed in the SPEAG holder and, in sequence, the back, display and each of the 4 edges was positioned 10.0mm away from the flat phantom. The spacer was removed before the start of the measurements.

## 5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan. Fast SAR is measured according to the KDB 447498 D01 General RF Exposure Guidance v05r01.

## 5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation for 1g Full SAR in 0.3-6GHz range

| Uncertainty Component                                                           | Section in IEEE 1528 | Tol. (%) | Prob Dist | Div | $C_i$           | $C_i \cdot U_i$ (%) | $V_i$ |
|---------------------------------------------------------------------------------|----------------------|----------|-----------|-----|-----------------|---------------------|-------|
| <b>Measurement System</b>                                                       |                      |          |           |     |                 |                     |       |
| Probe Calibration                                                               | E2.1                 | ±6.6     | N         | 1   | 1               | ±6.6                | ∞     |
| Axial Isotropy                                                                  | E2.2                 | ±4.7     | R         | √3  | $(1-c_p)^{1/2}$ | ±1.9                | ∞     |
| Hemispherical Isotropy                                                          | E2.2                 | ±9.6     | R         | √3  | $(c_p)^{1/2}$   | ±3.9                | ∞     |
| Boundary Effect                                                                 | E2.3                 | ±2.0     | R         | √3  | 1               | ±1.2                | ∞     |
| Linearity                                                                       | E2.4                 | ±4.7     | R         | √3  | 1               | ±2.7                | ∞     |
| System Detection Limits                                                         | E2.5                 | ±1.0     | R         | √3  | 1               | ±0.6                | ∞     |
| Modulation response                                                             | E2.5                 | ±2.4     | R         | √3  | 1               | ±1.4                |       |
| Readout Electronics                                                             | E2.6                 | ±0.3     | N         | 1   | 1               | ±0.3                | ∞     |
| Response Time                                                                   | E2.7                 | ±0.8     | R         | √3  | 1               | ±0.5                | ∞     |
| Integration Time                                                                | E2.8                 | ±2.6     | R         | √3  | 1               | ±1.5                | ∞     |
| RF Ambient Conditions - Noise                                                   | E6.1                 | ±3.0     | R         | √3  | 1               | ±1.7                | ∞     |
| RF Ambient Conditions - Reflections                                             | E6.1                 | ±3.0     | R         | √3  | 1               | ±1.7                | ∞     |
| Probe Positioner Mechanical Tolerance                                           | E6.2                 | ±0.8     | R         | √3  | 1               | ±0.5                | ∞     |
| Probe Positioning with respect to Phantom Shell                                 | E6.3                 | ±6.7     | R         | √3  | 1               | ±3.9                | ∞     |
| Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | E5                   | ±4.0     | R         | √3  | 1               | ±2.3                | ∞     |
| <b>Test sample Related</b>                                                      |                      |          |           |     |                 |                     |       |
| Test Sample Positioning                                                         | E4.2                 | ±6.0     | N         | 1   | 1               | ±6.0                | 11    |
| Device Holder Uncertainty                                                       | E4.1                 | ±3.6     | N         | 1   | 1               | ±3.6                | 5     |
| Output Power Variation - SAR drift measurement                                  | E2.9                 | ±5.0     | R         | √3  | 1               | ±2.9                | ∞     |
| <b>Phantom and Tissue Parameters</b>                                            |                      |          |           |     |                 |                     |       |
| Phantom Uncertainty (shape and thickness tolerances)                            | E3.1                 | ±6.6     | R         | √3  | 1               | ±3.8                | ∞     |
| SAR correction                                                                  | E3.2                 | ±1.9     | R         | √3  | 1               | ±1.1                | ∞     |
| Conductivity Target - tolerance                                                 | E3.4                 | ±5.0     | R         | √3  | 0.6             | ±1.8                | ∞     |
| Conductivity - measurement uncertainty                                          | E3.3                 | ±5.5     | N         | 1   | 0.6             | ±3.5                | 5     |
| Permittivity Target - tolerance                                                 | E3.4                 | ±5.0     | R         | √3  | 0.6             | ±1.7                | ∞     |
| Permittivity - measurement uncertainty                                          | E3.3                 | ±2.9     | N         | 1   | 0.6             | ±1.7                | 5     |
| <b>Combined Standard Uncertainty</b>                                            |                      |          | RSS       |     |                 | ±14.0               | 198   |
| <b>Coverage Factor for 95%</b>                                                  |                      |          | k=2       |     |                 |                     |       |
| <b>Expanded Uncertainty</b>                                                     |                      |          |           |     |                 | ±28.2               |       |

Table 6.2 – Measurement uncertainty evaluation for 1g Fast SAR in 0.3-6GHz range

| Relative DASY5 Uncertainty Budget for Fast SAR Tests<br>According to IEEE 1528/2011 and IEC 62209-1/2011<br>(0.3-6 GHz range) |             |               |      |                 |                        |       |
|-------------------------------------------------------------------------------------------------------------------------------|-------------|---------------|------|-----------------|------------------------|-------|
| Uncertainty Component                                                                                                         | Tol.<br>(%) | Prob<br>Dist. | Div. | $C_i$           | $C_i \cdot U_i$<br>(%) | $V_i$ |
| <b>Measurement System</b>                                                                                                     |             |               |      |                 |                        |       |
| Probe Calibration                                                                                                             | ±6.6        | N             | 1    | 0               |                        |       |
| Axial Isotropy                                                                                                                | ±4.7        | R             | √3   | $(1-c_p)^{1/2}$ | ±1.9                   | ∞     |
| Hemispherical Isotropy                                                                                                        | ±9.6        | R             | √3   | $(c_p)^{1/2}$   | ±3.9                   | ∞     |
| Boundary Effect                                                                                                               | ±2.0        | R             | √3   | 1               | ±1.2                   | ∞     |
| Linearity                                                                                                                     | ±4.7        | R             | √3   | 1               | ±2.7                   | ∞     |
| System Detection Limits                                                                                                       | ±1.0        | R             | √3   | 1               | ±0.6                   | ∞     |
| Modulation Response                                                                                                           | ±2.4        | R             | √3   | 1               | ±1.4                   | ∞     |
| Readout Electronics                                                                                                           | ±0.3        | N             | 1    | 0               |                        |       |
| Response Time                                                                                                                 | ±0.8        | R             | √3   | 0               |                        |       |
| Integration Time                                                                                                              | ±2.6        | R             | √3   | 1               | ±1.5                   | ∞     |
| RF Ambient Conditions - Noise                                                                                                 | ±3.0        | R             | √3   | 1               | ±1.7                   | ∞     |
| RF Ambient Conditions - Reflections                                                                                           | ±3.0        | R             | √3   | 0               |                        |       |
| Probe Positioner Mechanical Tolerance                                                                                         | ±0.8        | R             | √3   | 1               | ±0.5                   | ∞     |
| Probe Positioning with respect to Phantom Shell                                                                               | ±6.7        | R             | √3   | 1               | ±3.9                   | ∞     |
| Spatial x-y Resolution                                                                                                        | ±10.0       | R             | √3   | 1               | ±5.8                   | ∞     |
| Fast SAR z Approximation                                                                                                      | ±14.0       | R             | √3   | 1               | ±8.1                   | ∞     |
| <b>Test sample Related</b>                                                                                                    |             |               |      |                 |                        |       |
| Test Sample Positioning                                                                                                       | ±6.0        | N             | 1    | 1               | ±6.0                   | 12    |
| Device Holder Uncertainty                                                                                                     | ±3.6        | N             | 1    | 1               | ±3.6                   | 5     |
| Output Power Variation - SAR drift measurement                                                                                | ±5.0        | R             | √3   | 1               | ±2.9                   | ∞     |
| Power Scaling                                                                                                                 | ±0          | R             | √3   | 0               |                        |       |
| <b>Phantom and Setup</b>                                                                                                      |             |               |      |                 |                        |       |
| Phantom Uncertainty (shape and thickness tolerances)                                                                          | ±6.6        | R             | √3   | 1               | ±3.8                   | ∞     |
| SAR correction                                                                                                                | ±1.9        | R             | √3   | 0               |                        |       |
| Conductivity Target - tolerance                                                                                               | ±1.9        | R             | √3   | 0               |                        |       |
| Conductivity - measurement uncertainty                                                                                        | ±5.0        | R             | √3   | 0               |                        |       |
| Permittivity Target - tolerance                                                                                               | ±5.5        | N             | 1    | 0               |                        |       |
| Permittivity - measurement uncertainty                                                                                        | ±5.0        | R             | √3   | 0               |                        |       |
| <b>Combined Standard Uncertainty</b>                                                                                          |             |               |      |                 |                        |       |
|                                                                                                                               |             | RSS           |      |                 | ±14.9                  | 748   |
| <b>Coverage Factor for 95%</b>                                                                                                |             |               |      |                 |                        |       |
|                                                                                                                               |             | k=2           |      |                 |                        |       |
| <b>Expanded Uncertainty</b>                                                                                                   |             |               |      |                 |                        |       |
|                                                                                                                               |             |               |      |                 | ±29.8                  |       |

## 7. RESULTS

7.1 The measured Head SAR values for the test device are tabulated below:

**CDMA800 (BC0) Head SAR results / Antenna 2**

| Mode         | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|              |                                 |                 | Ch 1013                | Ch 384    | Ch 777    | Ch 1013                 | Ch 384    | Ch 777    |                                                 |        |
|              |                                 |                 | 824.7 MHz              | 836.5 MHz | 848.3 MHz | 824.7 MHz               | 836.5 MHz | 848.3 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 | 24.4                   |           |           | Scaling factor*         |           |           |                                                 |        |
|              | Conducted Power [dBm]           |                 | 24.1                   | 24.1      | 24.2      | 0.3                     | 0.3       | 0.2       | dB                                              |        |
|              | Time-averaged Power [dBm]       |                 | 24.1                   | 24.1      | 24.2      | 1.07                    | 1.07      | 1.05      | Lin                                             |        |
|              | Left Cheek                      | Estimated SAR   | 0.564                  | 0.543     | 0.539     | 0.604                   | 0.582     | 0.564     | 0.01                                            | 1      |
|              |                                 | Full SAR        | 0.577                  | -         | -         | 0.618                   | -         | -         |                                                 |        |
|              | Left Tilt                       | Estimated SAR   | -                      | 0.289     | -         | -                       | 0.310     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right Cheek                     | Estimated SAR   | -                      | 0.425     | -         | -                       | 0.455     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right Tilt                      | Estimated SAR   | -                      | 0.280     | -         | -                       | 0.300     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |

**CDMA800 (BC10) Head SAR results / Antenna 2**

| Mode         | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|              |                                 |                 | Ch 476                 | Ch 580    | Ch 684    | Ch 476                  | Ch 580    | Ch 684    |                                                 |        |
|              |                                 |                 | 817.9 MHz              | 820.5 MHz | 823.1 MHz | 817.9 MHz               | 820.5 MHz | 823.1 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 | 24.4                   |           |           | Scaling factor*         |           |           |                                                 |        |
|              | Conducted Power [dBm]           |                 | 24.0                   | 24.0      | 24.0      | 0.4                     | 0.4       | 0.4       | dB                                              |        |
|              | Time-averaged Power [dBm]       |                 | 24.0                   | 24.0      | 24.0      | 1.10                    | 1.10      | 1.10      | Lin                                             |        |
|              | Left Cheek                      | Estimated SAR   | 0.505                  | 0.499     | 0.501     | 0.554                   | 0.547     | 0.549     | 0.00                                            | 2      |
|              |                                 | Full SAR        | 0.505                  | -         | -         | 0.554                   | -         | -         |                                                 |        |
|              | Left Tilt                       | Estimated SAR   | -                      | 0.268     | -         | -                       | 0.294     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right Cheek                     | Estimated SAR   | -                      | 0.402     | -         | -                       | 0.441     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right Tilt                      | Estimated SAR   | -                      | 0.273     | -         | -                       | 0.299     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |

### 850MHz Band Head SAR results / Antenna 2

| Mode              | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                          |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------|------------------------------------|-----------------|-------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                   |                                    |                 | Ch 128<br>824.2 MHz                             | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz | Ch 128<br>824.2 MHz     | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |                                                 |        |
| GSM               | Tuning Target + Tolerance [dBm]    |                 | 32.9                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 32.4                                            | 32.6                | 32.5                | 0.5                     | 0.3                 | 0.4                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 23.4                                            | 23.6                | 23.5                | 1.12                    | 1.07                | 1.10                | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                     |                     |                         |                     |                     |                                                 |        |
| 2-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 30.4                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 30.2                                            | 30.2                | 30.3                | 0.2                     | 0.2                 | 0.1                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 24.2                                            | 24.2                | 24.3                | 1.05                    | 1.05                | 1.02                | Lin                                             |        |
|                   | Left Cheek                         | Estimated SAR   | 0.585                                           | 0.464               | 0.435               | 0.613                   | 0.486               | 0.445               | 0.02                                            | 3      |
|                   |                                    | Full SAR        | 0.562                                           | -                   | -                   | 0.588                   | -                   | -                   |                                                 |        |
|                   | Left Tilt                          | Estimated SAR   | -                                               | 0.403               | -                   | -                       | 0.422               | -                   | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                   | Right Cheek                        | Estimated SAR   | -                                               | 0.378               | -                   | -                       | 0.396               | -                   | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                   | Right Tilt                         | Estimated SAR   | -                                               | 0.273               | -                   | -                       | 0.286               | -                   | -                                               | -      |
| Full SAR          |                                    | -               | -                                               | -                   | -                   | -                       | -                   |                     |                                                 |        |
| 3-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 28.6                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 28.4                                            | 28.4                | 28.4                | 0.2                     | 0.2                 | 0.2                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 24.1                                            | 24.1                | 24.1                | 1.05                    | 1.05                | 1.05                | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                     |                     |                         |                     |                     |                                                 |        |
| 4-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 27.4                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 27.0                                            | 27.0                | 27.1                | 0.4                     | 0.4                 | 0.3                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 24.0                                            | 24.0                | 24.1                | 1.10                    | 1.10                | 1.07                | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                     |                     |                         |                     |                     |                                                 |        |
| 1-slot 8PSK EGPRS | Tuning Target + Tolerance [dBm]    |                 | 27.4                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 27.0                                            | 26.9                | 27.1                | 0.4                     | 0.5                 | 0.3                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 18.0                                            | 17.9                | 18.1                | 1.10                    | 1.12                | 1.07                | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                     |                     |                         |                     |                     |                                                 |        |
| 2-slot 8PSK EGPRS | Tuning Target + Tolerance [dBm]    |                 | 24.4                                            |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 23.8                                            | 23.8                | 23.8                | 0.6                     | 0.6                 | 0.6                 | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 17.8                                            | 17.8                | 17.8                | 1.15                    | 1.15                | 1.15                | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

|                         |                                    |                 |                                                 |                      |                      |                         |                      |                      |                                                 |        |
|-------------------------|------------------------------------|-----------------|-------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
| 3-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 22.6                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 22.3                                            | 22.3                 | 22.4                 | 0.3                     | 0.3                  | 0.2                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 18.0                                            | 18.0                 | 18.1                 | 1.07                    | 1.07                 | 1.05                 | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration |                      |                      |                         |                      |                      |                                                 |        |
| 4-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 21.4                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 21.2                                            | 21.1                 | 21.2                 | 0.2                     | 0.3                  | 0.2                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 18.2                                            | 18.1                 | 18.2                 | 1.05                    | 1.07                 | 1.05                 | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | 0.145                                           | -                    | -                    | 0.152                   | -                    | -                    | 0.00                                            | -      |
|                         |                                    | Full SAR        | 0.144                                           | -                    | -                    | 0.151                   | -                    | -                    |                                                 |        |
|                         | Left Tilt                          | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Right Cheek                        | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Right Tilt                         | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
| Full SAR                |                                    | -               | -                                               | -                    | -                    | -                       | -                    |                      |                                                 |        |
| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                          |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|                         |                                    |                 | Ch 4132<br>826.4 MHz                            | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA                   | Tuning Target + Tolerance [dBm]    |                 | 23.9                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 23.6                                            | 23.6                 | 23.7                 | 0.3                     | 0.3                  | 0.2                  | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 23.6                                            | 23.6                 | 23.7                 | 1.07                    | 1.07                 | 1.05                 | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | 0.467                                           | 0.448                | 0.448                | 0.500                   | 0.480                | 0.469                | 0.01                                            | 4      |
|                         |                                    | Full SAR        | 0.476                                           | -                    | -                    | 0.510                   | -                    | -                    |                                                 |        |
|                         | Left Tilt                          | Estimated SAR   | -                                               | 0.243                | -                    | -                       | 0.260                | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Right Cheek                        | Estimated SAR   | -                                               | 0.350                | -                    | -                       | 0.375                | -                    | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                         | Right Tilt                         | Estimated SAR   | -                                               | 0.245                | -                    | -                       | 0.263                | -                    | -                                               | -      |
| Full SAR                |                                    | -               | -                                               | -                    | -                    | -                       | -                    |                      |                                                 |        |

### WCDMA850MHz Head SAR results / Antenna 1

| Mode  | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg] |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|       |                                    |                 | Ch 4132<br>826.4 MHz   | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 | 23.9                   |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 | 23.3                   | 23.4                 | 23.3                 | 0.6                     | 0.5                  | 0.6                  | dB                                              |        |
|       | Time-averaged power [dBm]          |                 | 23.3                   | 23.4                 | 23.3                 | 1.15                    | 1.12                 | 1.15                 | Lin                                             |        |
|       | Left Cheek                         | Estimated SAR   | -                      | 0.085                | -                    | -                       | 0.096                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Left Tilt                          | Estimated SAR   | -                      | 0.052                | -                    | -                       | 0.059                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Right Cheek                        | Estimated SAR   | 0.142                  | 0.134                | 0.166                | 0.163                   | 0.150                | 0.191                | 0.00                                            | -      |
|       |                                    | Full SAR        | -                      | -                    | 0.162                | -                       | -                    | 0.186                |                                                 |        |
|       | Right Tilt                         | Estimated SAR   | -                      | 0.061                | -                    | -                       | 0.069                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |

### LTE850 (Band 26 Limited) Head SAR results / Antenna 1

| Mode                              | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-----------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|
|                                   |                                 |                 | -                                                                                                                  | Ch 26740 819.0 MHz | - | -                       | Ch 26740 819.0M Hz | - |                                                 |        |
| 10MHz<br>Ch BW 1RB<br>0% offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                                   | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.9               | - | -                       | 0.5                | - | dB                                              |        |
|                                   | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.9               | - | -                       | 1.12               | - | Lin                                             |        |
|                                   | Left Cheek                      | Estimated SAR   | -                                                                                                                  | 0.234              | - | -                       | 0.263              | - | -                                               | -      |
|                                   |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                                   | Left Tilt                       | Estimated SAR   | -                                                                                                                  | 0.179              | - | -                       | 0.201              | - | -                                               | -      |
|                                   |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                                   | Right Cheek                     | Estimated SAR   | -                                                                                                                  | 0.292              | - | -                       | 0.328              | - | 0.03                                            | -      |
|                                   |                                 | Full SAR        | -                                                                                                                  | 0.267              | - | -                       | 0.300              | - |                                                 |        |
|                                   | Right Tilt                      | Estimated SAR   | -                                                                                                                  | 0.205              | - | -                       | 0.230              | - | -                                               | -      |
|                                   |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
| 10MHz<br>Ch BW 1RB<br>50% offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                                   | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.8               | - | -                       | 0.6                | - | dB                                              |        |
|                                   | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.8               | - | -                       | 1.15               | - | Lin                                             |        |
|                                   |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz<br>Ch BW 1RB<br>100% offset | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                                   | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |
|                                   | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |
|                                   |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |               |                                                                                                                    |       |   |                 |       |   |     |   |
|-------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|-----|---|
| 10MHz<br>Ch BW<br>50%RB<br>0%<br>offset   | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | 0.190 | - | -               | 0.204 | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | 0.141 | - | -               | 0.151 | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Right Cheek                     | Estimated SAR | -                                                                                                                  | 0.250 | - | -               | 0.268 | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | 0.162 | - | -               | 0.174 | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
| 10MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Right Cheek                     | Estimated SAR | -                                                                                                                  | 0.228 | - | -               | 0.244 | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |

### LTE850 (Band 26 Limited) Head SAR results / Antenna 2

| Mode                         | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|
|                              |                                 |                 | -                                                                                                                  | Ch 26740 819.0 MHz | - | -                       | Ch 26740 819.0M Hz | - |                                                 |        |
| 10MHz Ch BW 1RB 0% offset    | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |
|                              | Left Cheek                      | Estimated SAR   | -                                                                                                                  | 0.354              | - | -                       | 0.414              | - | 0.01                                            | 5      |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.347              | - | -                       | 0.406              | - |                                                 |        |
|                              | Left Tilt                       | Estimated SAR   | -                                                                                                                  | 0.100              | - | -                       | 0.117              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Right Cheek                     | Estimated SAR   | -                                                                                                                  | 0.070              | - | -                       | 0.082              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Right Tilt                      | Estimated SAR   | -                                                                                                                  | 0.035              | - | -                       | 0.041              | - | -                                               | -      |
| Full SAR                     |                                 | -               | -                                                                                                                  | -                  | - | -                       | -                  |   |                                                 |        |
| 10MHz Ch BW 1RB 50% offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.6               | - | -                       | 0.8                | - | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.6               | - | -                       | 1.20               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 1RB 100% offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.5               | - | -                       | 0.9                | - | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 22.5               | - | -                       | 1.23               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 50%RB 0% offset  | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 21.8               | - | -                       | 0.6                | - | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 21.8               | - | -                       | 1.15               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 50%RB 50% offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 21.9               | - | -                       | 0.5                | - | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | -                                                                                                                  | 21.9               | - | -                       | 1.12               | - | Lin                                             |        |
|                              | Left Cheek                      | Estimated SAR   | -                                                                                                                  | 0.297              | - | -                       | 0.333              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Left Tilt                       | Estimated SAR   | -                                                                                                                  | 0.178              | - | -                       | 0.200              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Right Cheek                     | Estimated SAR   | -                                                                                                                  | 0.069              | - | -                       | 0.078              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Right Tilt                      | Estimated SAR   | -                                                                                                                  | 0.040              | - | -                       | 0.045              | - | -                                               | -      |
| Full SAR                     |                                 | -               | -                                                                                                                  | -                  | - | -                       | -                  |   |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |               |                                                                                                                    |       |   |                 |       |   |      |   |
|-------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|------|---|
| 10MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |      |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 21.8  | - | -               | 0.6   | - | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 21.8  | - | -               | 1.15  | - | Lin  |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |      |   |
| 10MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |      |   |
|                                           | Conducted Power [dBm]           |               | -                                                                                                                  | 21.9  | - | -               | 0.5   | - | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | -                                                                                                                  | 21.9  | - | -               | 1.12  | - | Lin  |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | 0.285 | - | -               | 0.319 | - | 0.00 | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - |      |   |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - |      |   |
|                                           | Right Cheek                     | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - |      |   |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - |      |   |

### LTE850 (Band 26) Head SAR results / Antenna 1

| Mode                       | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|                            |                                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |
| 15MHz Ch BW 1RB 0% offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                            | Conducted Power [dBm]           |                 | 22.8                                                                                                               | 23.0               | 22.9               | 0.6                     | 0.4                | 0.5                | dB                                              |        |
|                            | Time-averaged Power [dBm]       |                 | 22.8                                                                                                               | 23.0               | 22.9               | 1.15                    | 1.10               | 1.12               | Lin                                             |        |
|                            |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 1RB 50% offset | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                            | Conducted Power [dBm]           |                 | 22.8                                                                                                               | 23.1               | 23.0               | 0.6                     | 0.3                | 0.4                | dB                                              |        |
|                            | Time-averaged Power [dBm]       |                 | 22.8                                                                                                               | 23.1               | 23.0               | 1.15                    | 1.07               | 1.10               | Lin                                             |        |
|                            | Left Cheek                      | Estimated SAR   | -                                                                                                                  | 0.216              | -                  | -                       | 0.231              | -                  | -                                               | -      |
|                            |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|                            | Left Tilt                       | Estimated SAR   | -                                                                                                                  | 0.136              | -                  | -                       | 0.146              | -                  | -                                               | -      |
|                            |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|                            | Right Cheek                     | Estimated SAR   | -                                                                                                                  | 0.295              | -                  | -                       | 0.316              | -                  | -                                               | 6      |
|                            |                                 | Full SAR        | -                                                                                                                  | 0.300              | -                  | -                       | 0.321              | -                  |                                                 |        |
|                            | Right Tilt                      | Estimated SAR   | -                                                                                                                  | 0.184              | -                  | -                       | 0.197              | -                  | -                                               | -      |
| Full SAR                   |                                 | -               | -                                                                                                                  | -                  | -                  | -                       | -                  |                    |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |               |                                                                                                                    |       |      |                 |       |      |     |   |
|-------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|------|-----------------|-------|------|-----|---|
| 15MHz<br>Ch BW<br>1RB<br>100%<br>offset   | Tuning Target + Tolerance [dBm] |               | 23.4                                                                                                               |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |               | 22.7                                                                                                               | 22.8  | 22.6 | 0.7             | 0.6   | 0.8  | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.7                                                                                                               | 22.8  | 22.6 | 1.17            | 1.15  | 1.20 | Lin |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |      |                 |       |      |     |   |
| 15MHz<br>Ch BW<br>50%RB<br>0%<br>offset   | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |               | 22.1                                                                                                               | 22.1  | 22.0 | 0.3             | 0.3   | 0.4  | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.1                                                                                                               | 22.1  | 22.0 | 1.07            | 1.07  | 1.10 | Lin |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |      |                 |       |      |     |   |
| 15MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |               | 22.1                                                                                                               | 22.1  | 22.0 | 0.3             | 0.3   | 0.4  | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.1                                                                                                               | 22.1  | 22.0 | 1.07            | 1.07  | 1.10 | Lin |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |      |                 |       |      |     |   |
| 15MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |               | 22.1                                                                                                               | 22.1  | 22.1 | 0.3             | 0.3   | 0.3  | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.1                                                                                                               | 22.1  | 22.1 | 1.07            | 1.07  | 1.07 | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | 0.127 | -    | -               | 0.136 | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | 0.048 | -    | -               | 0.051 | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Right Cheek                     | Estimated SAR | -                                                                                                                  | 0.250 | -    | -               | 0.268 | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | 0.095 | -    | -               | 0.101 | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
| 15MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |               | 22.2                                                                                                               | 22.1  | 22.1 | 0.2             | 0.3   | 0.3  | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.2                                                                                                               | 22.1  | 22.1 | 1.05            | 1.06  | 1.08 | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Right Cheek                     | Estimated SAR | 0.239                                                                                                              | -     | -    | 0.251           | -     | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -     | -    | -               | -     | -    | -   | - |

### LTE850 (Band 26) Head SAR results / Antenna 2

| Mode                         | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|                              |                                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |
| 15MHz Ch BW 1RB 0% offset    | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                              | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.8               | 22.7               | 0.8                     | 0.6                | 0.7                | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | 22.6                                                                                                               | 22.8               | 22.7               | 1.20                    | 1.15               | 1.17               | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 1RB 50% offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                              | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.8               | 22.8               | 0.8                     | 0.6                | 0.6                | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | 22.6                                                                                                               | 22.8               | 22.8               | 1.20                    | 1.15               | 1.15               | Lin                                             |        |
|                              | Left Cheek                      | Estimated SAR   | -                                                                                                                  | 0.257              | -                  | -                       | 0.295              | -                  | 0.01                                            | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.264              | -                  | -                       | 0.303              | -                  |                                                 |        |
|                              | Left Tilt                       | Estimated SAR   | -                                                                                                                  | 0.136              | -                  | -                       | 0.156              | -                  | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|                              | Right Cheek                     | Estimated SAR   | -                                                                                                                  | 0.045              | -                  | -                       | 0.052              | -                  | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|                              | Right Tilt                      | Estimated SAR   | -                                                                                                                  | 0.018              | -                  | -                       | 0.020              | -                  | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  |                                                 |        |
| 15MHz Ch BW 1RB 100% offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                              | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.7               | 22.5               | 0.8                     | 0.8                | 0.9                | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | 22.6                                                                                                               | 22.7               | 22.5               | 1.20                    | 1.17               | 1.23               | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 0% offset  | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                              | Conducted Power [dBm]           |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 50% offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                              | Conducted Power [dBm]           |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |
|                              | Time-averaged Power [dBm]       |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |

(Table continues)

(Table continues)

| 15MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4 |       |       | Scaling factor* |       |       |     |   |
|-------------------------------------------|---------------------------------|---------------|------|-------|-------|-----------------|-------|-------|-----|---|
|                                           | Conducted Power [dBm]           |               | 21.9 | 21.9  | 22.0  | 0.5             | 0.5   | 0.4   | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 21.9 | 21.9  | 22.0  | 1.12            | 1.12  | 1.10  | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -    | -     | 0.189 | -               | -     | 0.207 | -   | - |
|                                           |                                 | Full SAR      | -    | -     |       | -               | -     | -     |     |   |
|                                           | Left Tilt                       | Estimated SAR | -    | -     | 0.086 | -               | -     | 0.095 | -   | - |
|                                           |                                 | Full SAR      | -    | -     |       | -               | -     | -     |     |   |
|                                           | Right Cheek                     | Estimated SAR | -    | -     | 0.037 | -               | -     | 0.040 | -   | - |
|                                           |                                 | Full SAR      | -    | -     |       | -               | -     | -     |     |   |
|                                           | Right Tilt                      | Estimated SAR | -    | -     | 0.017 | -               | -     | 0.019 | -   | - |
| Full SAR                                  |                                 | -             | -    | -     | -     | -               | -     |       |     |   |
| 15MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.4 |       |       | Scaling factor* |       |       |     |   |
|                                           | Conducted Power [dBm]           |               | 22.0 | 22.0  | 21.9  | 0.4             | 0.4   | 0.5   | dB  |   |
|                                           | Time-averaged Power [dBm]       |               | 22.0 | 22.0  | 21.9  | 1.10            | 1.10  | 1.12  | Lin |   |
|                                           | Left Cheek                      | Estimated SAR | -    | 0.203 | -     | -               | 0.223 | -     | -   | - |
|                                           |                                 | Full SAR      | -    | -     | -     | -               | -     | -     |     |   |
|                                           | Left Tilt                       | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                           |                                 | Full SAR      | -    | -     | -     | -               | -     | -     |     |   |
|                                           | Right Cheek                     | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                           |                                 | Full SAR      | -    | -     | -     | -               | -     | -     |     |   |
|                                           | Right Tilt                      | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
| Full SAR                                  |                                 | -             | -    | -     | -     | -               | -     |       |     |   |

### CDMA1900 (BC1) Head SAR results / Antenna 1

| Mode         | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |            |             | Reported* 1g SAR [W/kg] |            |             | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|------------------------|------------|-------------|-------------------------|------------|-------------|-------------------------------------------------|--------|
|              |                                 |                 | Ch 25                  | Ch 600     | Ch 1175     | Ch 25                   | Ch 600     | Ch 1175     |                                                 |        |
|              |                                 |                 | 1851.25 MHz            | 1880.0 MHz | 1908.75 MHz | 1851.25 MHz             | 1880.0 MHz | 1908.75 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 | 24.4                   |            |             | Scaling factor*         |            |             |                                                 |        |
|              | Conducted Power [dBm]           |                 | 23.8                   | 23.8       | 23.9        | 0.6                     | 0.6        | 0.5         | dB                                              |        |
|              | Time-averaged power [dBm]       |                 | 23.8                   | 23.8       | 23.9        | 1.15                    | 1.15       | 1.12        | Lin                                             |        |
|              | Left Cheek                      | Estimated SAR   | 0.585                  | 0.600      | 0.618       | 0.672                   | 0.689      | 0.693       | 0.02                                            | 7      |
|              |                                 | Full SAR        | -                      | -          | 0.597       | -                       | -          | 0.670       |                                                 |        |
|              | Left Tilt                       | Estimated SAR   | -                      | 0.225      | -           | -                       | 0.258      | -           | -                                               | -      |
|              |                                 | Full SAR        | -                      | -          | -           | -                       | -          | -           |                                                 |        |
|              | Right Cheek                     | Estimated SAR   | -                      | 0.357      | -           | -                       | 0.410      | -           | -                                               | -      |
|              |                                 | Full SAR        | -                      | -          | -           | -                       | -          | -           |                                                 |        |
|              | Right Tilt                      | Estimated SAR   | -                      | 0.282      | -           | -                       | 0.324      | -           | -                                               | -      |
|              |                                 | Full SAR        | -                      | -          | -           | -                       | -          | -           |                                                 |        |

### 1900MHz Band Head SAR results / Antenna 1

| Mode              | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                          |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------|------------------------------------|-----------------|-------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|                   |                                    |                 | Ch 512<br>1850.2 MHz                            | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz | Ch 512<br>1850.2 MHz    | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |                                                 |        |
| GSM               | Tuning Target + Tolerance [dBm]    |                 | 29.4                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 28.9                                            | 28.9                 | 28.9                 | 0.5                     | 0.5                  | 0.5                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 19.9                                            | 19.9                 | 19.9                 | 1.12                    | 1.12                 | 1.12                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                      |                      |                         |                      |                      |                                                 |        |
| 2-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 27.4                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 26.8                                            | 26.9                 | 26.9                 | 0.6                     | 0.5                  | 0.5                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 20.8                                            | 20.9                 | 20.9                 | 1.15                    | 1.12                 | 1.12                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                      |                      |                         |                      |                      |                                                 |        |
| 3-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 25.6                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 24.9                                            | 25.0                 | 25.1                 | 0.7                     | 0.6                  | 0.5                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 20.6                                            | 20.7                 | 20.8                 | 1.17                    | 1.15                 | 1.12                 | Lin                                             |        |
|                   |                                    |                 | No testing required for this slot configuration |                      |                      |                         |                      |                      |                                                 |        |
| 4-slot GPRS       | Tuning Target + Tolerance [dBm]    |                 | 24.4                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 24.1                                            | 24.2                 | 24.2                 | 0.3                     | 0.2                  | 0.2                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 21.1                                            | 21.2                 | 21.2                 | 1.07                    | 1.05                 | 1.05                 | Lin                                             |        |
|                   | Left Cheek                         | Estimated SAR   | 0.512                                           | 0.455                | 0.373                | 0.549                   | 0.476                | 0.391                | 0.02                                            | 8      |
|                   |                                    | Full SAR        | 0.497                                           | -                    | -                    | 0.533                   | -                    | -                    |                                                 |        |
|                   | Left Tilt                          | Estimated SAR   | -                                               | 0.168                | -                    | -                       | 0.176                | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Cheek                        | Estimated SAR   | -                                               | 0.311                | -                    | -                       | 0.326                | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Tilt                         | Estimated SAR   | -                                               | 0.203                | -                    | -                       | 0.213                | -                    | -                                               | -      |
| Full SAR          |                                    | -               | -                                               | -                    | -                    | -                       | -                    |                      |                                                 |        |
| 1-slot 8PSK EGPRS | Tuning Target + Tolerance [dBm]    |                 | 26.4                                            |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|                   | Conducted Slot Average Power [dBm] |                 | 26.2                                            | 26.1                 | 26.2                 | 0.2                     | 0.3                  | 0.2                  | dB                                              |        |
|                   | Time-averaged power [dBm]          |                 | 17.2                                            | 17.1                 | 17.2                 | 1.05                    | 1.07                 | 1.05                 | Lin                                             |        |
|                   | Left Cheek                         | Estimated SAR   | 0.191                                           | -                    | -                    | 0.200                   | -                    | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Left Tilt                          | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Cheek                        | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|                   |                                    | Full SAR        | -                                               | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|                   | Right Tilt                         | Estimated SAR   | -                                               | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
| Full SAR          |                                    | -               | -                                               | -                    | -                    | -                       | -                    |                      |                                                 |        |

(Table continues)

(Table continues)

|                         |                                    |                 |                                                 |                       |                       |                         |                       |                       |                                                 |        |
|-------------------------|------------------------------------|-----------------|-------------------------------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
| 2-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 23.4                                            |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 22.8                                            | 22.9                  | 23.0                  | 0.6                     | 0.5                   | 0.4                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 16.8                                            | 16.9                  | 17.0                  | 1.15                    | 1.12                  | 1.10                  | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration |                       |                       |                         |                       |                       |                                                 |        |
| 3-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 21.6                                            |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 21.1                                            | 21.1                  | 21.1                  | 0.5                     | 0.5                   | 0.5                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 16.8                                            | 16.8                  | 16.8                  | 1.12                    | 1.12                  | 1.12                  | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration |                       |                       |                         |                       |                       |                                                 |        |
| 4-slot<br>8PSK<br>EGPRS | Tuning Target + Tolerance [dBm]    |                 | 20.4                                            |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Slot Average Power [dBm] |                 | 19.7                                            | 19.8                  | 19.9                  | 0.7                     | 0.6                   | 0.5                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 16.7                                            | 16.8                  | 16.9                  | 1.17                    | 1.15                  | 1.12                  | Lin                                             |        |
|                         |                                    |                 | No testing required for this slot configuration |                       |                       |                         |                       |                       |                                                 |        |
| Mode                    | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                          |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|                         |                                    |                 | Ch 9262<br>1852.4 MHz                           | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA                   | Tuning Target + Tolerance [dBm]    |                 | 23.9                                            |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|                         | Conducted Power [dBm]              |                 | 23.8                                            | 23.7                  | 23.7                  | 0.1                     | 0.2                   | 0.2                   | dB                                              |        |
|                         | Time-averaged power [dBm]          |                 | 23.8                                            | 23.7                  | 23.7                  | 1.02                    | 1.05                  | 1.05                  | Lin                                             |        |
|                         | Left Cheek                         | Estimated SAR   | 0.598                                           | 0.607                 | 0.597                 | 0.612                   | 0.636                 | 0.625                 | 0.02                                            | -      |
|                         |                                    | Full SAR        | -                                               | 0.591                 | -                     | -                       | 0.619                 | -                     |                                                 |        |
|                         | Left Tilt                          | Estimated SAR   | -                                               | 0.209                 | -                     | -                       | 0.219                 | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|                         | Right Cheek                        | Estimated SAR   | -                                               | 0.383                 | -                     | -                       | 0.401                 | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|                         | Right Tilt                         | Estimated SAR   | -                                               | 0.243                 | -                     | -                       | 0.254                 | -                     | -                                               | -      |
|                         |                                    | Full SAR        | -                                               | -                     | -                     | -                       | -                     | -                     |                                                 |        |

### WCDMA1900 (Band 2) Head SAR results / Antenna 2

| Mode  | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|---------------------------------|-----------------|------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|       |                                 |                 | Ch 9262 1852.4 MHz     | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz | Ch 9262 1852.4 MHz      | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz |                                                 |        |
|       |                                 |                 |                        |                    |                    |                         |                    |                    |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm] |                 | 23.9                   |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|       | Conducted Power [dBm]           |                 | 23.3                   | 23.2               | 23.1               | 0.6                     | 0.7                | 0.8                | dB                                              |        |
|       | Time-averaged power [dBm]       |                 | 23.3                   | 23.2               | 23.1               | 1.15                    | 1.17               | 1.20               | Lin                                             |        |
|       | Left Cheek                      | Estimated SAR   | 0.625                  | 0.686              | 0.712              | 0.718                   | 0.806              | 0.856              | 0.00                                            | 9      |
|       |                                 | Full SAR        | -                      | -                  | 0.711              | -                       | -                  | 0.855              |                                                 |        |
|       | Left Tilt                       | Estimated SAR   | -                      | 0.344              | -                  | -                       | 0.404              | -                  | -                                               | -      |
|       |                                 | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|       | Right Cheek                     | Estimated SAR   | -                      | 0.573              | -                  | -                       | 0.673              | -                  | -                                               | -      |
|       |                                 | Full SAR        | -                      | 0.557              | -                  | -                       | 0.654              | -                  |                                                 |        |
|       | Right Tilt                      | Estimated SAR   | -                      | 0.367              | -                  | -                       | 0.431              | -                  | -                                               | -      |
|       |                                 | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |

### LTE1900 (Band 25) Head SAR results / Antenna 1

| Mode                       | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                            |                                 |                 | Ch 26140 1860.0 MHz                                                                                                | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz Ch BW 1RB 0% offset  | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                            | Conducted Power [dBm]           |                 | 23.8                                                                                                               | 23.2                | 23.1                | 0.1                     | 0.7                 | 0.8                 | dB                                              |        |
|                            | Time-averaged Power [dBm]       |                 | 23.8                                                                                                               | 23.2                | 23.1                | 1.02                    | 1.17                | 1.20                | Lin                                             |        |
|                            |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 1RB 50% offset | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                            | Conducted Power [dBm]           |                 | 23.9                                                                                                               | 23.3                | 23.3                | 0.0                     | 0.6                 | 0.6                 | dB                                              |        |
|                            | Time-averaged Power [dBm]       |                 | 23.9                                                                                                               | 23.3                | 23.3                | 1.00                    | 1.15                | 1.15                | Lin                                             |        |
|                            | Left Cheek                      | Estimated SAR   | 0.465                                                                                                              | -                   | -                   | 0.465                   | -                   | -                   | 0.00                                            | -      |
|                            |                                 | Full SAR        | 0.461                                                                                                              | -                   | -                   | 0.461                   | -                   | -                   |                                                 |        |
|                            | Left Tilt                       | Estimated SAR   | 0.203                                                                                                              | -                   | -                   | 0.203                   | -                   | -                   | -                                               | -      |
|                            |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                            | Right Cheek                     | Estimated SAR   | 0.901                                                                                                              | 0.657               | 0.586               | 0.901                   | 0.754               | 0.673               | 0.08                                            | -      |
|                            |                                 | Full SAR        | 0.817                                                                                                              | -                   | -                   | 0.817                   | -                   | -                   |                                                 |        |
|                            | Right Tilt                      | Estimated SAR   | 0.218                                                                                                              | -                   | -                   | 0.218                   | -                   | -                   | -                                               | -      |
|                            |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                            | Repeated SAR Right Cheek        | Estimated SAR   | 0.800                                                                                                              | -                   | -                   | 0.800                   | -                   | -                   | 0.02                                            | -      |
|                            |                                 | Full SAR        | 0.816                                                                                                              | -                   | -                   | 0.816                   | -                   | -                   |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |               |                                                                                                                    |      |       |                 |      |       |      |   |
|-------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|------|-------|-----------------|------|-------|------|---|
| 20MHz<br>Ch BW<br>1RB<br>100%<br>offset   | Tuning Target + Tolerance [dBm] |               | 23.9                                                                                                               |      |       | Scaling factor* |      |       |      |   |
|                                           | Conducted Power [dBm]           |               | 23.8                                                                                                               | 23.2 | 23.0  | 0.1             | 0.7  | 0.9   | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | 23.8                                                                                                               | 23.2 | 23.0  | 1.02            | 1.17 | 1.23  | Lin  |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |       |      |   |
| 20MHz<br>Ch BW<br>50%RB<br>0%<br>offset   | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |       | Scaling factor* |      |       |      |   |
|                                           | Conducted Power [dBm]           |               | 22.9                                                                                                               | 22.7 | 22.8  | 0.0             | 0.2  | 0.1   | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | 22.9                                                                                                               | 22.7 | 22.8  | 1.00            | 1.05 | 1.02  | Lin  |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |       |      |   |
| 20MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |       | Scaling factor* |      |       |      |   |
|                                           | Conducted Power [dBm]           |               | 22.9                                                                                                               | 22.8 | 22.8  | 0.0             | 0.1  | 0.1   | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | 22.9                                                                                                               | 22.8 | 22.8  | 1.00            | 1.02 | 1.02  | Lin  |   |
|                                           | Left Cheek                      | Estimated SAR | 0.376                                                                                                              | -    | -     | 0.378           | -    | -     | 0.01 | - |
|                                           |                                 | Full SAR      | 0.371                                                                                                              | -    | -     | 0.373           | -    | -     |      |   |
|                                           | Left Tilt                       | Estimated SAR | 0.191                                                                                                              | -    | -     | 0.192           | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
|                                           | Right Cheek                     | Estimated SAR | 0.718                                                                                                              | -    | -     | 0.721           | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
|                                           | Right Tilt                      | Estimated SAR | 0.212                                                                                                              | -    | -     | 0.213           | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
| 20MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |       | Scaling factor* |      |       |      |   |
|                                           | Conducted Power [dBm]           |               | 22.8                                                                                                               | 22.8 | 22.8  | 0.1             | 0.1  | 0.1   | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | 22.8                                                                                                               | 22.8 | 22.8  | 1.02            | 1.02 | 1.02  | Lin  |   |
|                                           |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |       |      |   |
| 20MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |       | Scaling factor* |      |       |      |   |
|                                           | Conducted Power [dBm]           |               | 22.8                                                                                                               | 22.8 | 22.8  | 0.1             | 0.1  | 0.1   | dB   |   |
|                                           | Time-averaged Power [dBm]       |               | 22.8                                                                                                               | 22.8 | 22.8  | 1.02            | 1.02 | 1.02  | Lin  |   |
|                                           | Left Cheek                      | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
|                                           | Left Tilt                       | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
|                                           | Right Cheek                     | Estimated SAR | -                                                                                                                  | -    | 0.520 | -               | -    | 0.528 | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |
|                                           | Right Tilt                      | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -     | -    | - |
|                                           |                                 | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -     |      |   |

### LTE1900 (Band 25) Head SAR results / Antenna 2

| Mode                        | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-----------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                             |                                 |                 | Ch 26140 1860.0 MHz                                                                                                | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz Ch BW 1RB 0% offset   | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.4                                                                                                               | 23.0                | 23.1                | 0.5                     | 0.9                 | 0.8                 | dB                                              |        |
|                             | Time-averaged Power [dBm]       |                 | 23.4                                                                                                               | 23.0                | 23.1                | 1.12                    | 1.23                | 1.20                | Lin                                             |        |
|                             | Left Cheek                      | Estimated SAR   | -                                                                                                                  | -                   | 0.872               | -                       | -                   | 1.05                | -                                               | -      |
|                             |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                             | Left Tilt                       | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                             | Right Cheek                     | Estimated SAR   | -                                                                                                                  | -                   | 0.683               | -                       | -                   | 0.821               | 0.00                                            | -      |
|                             |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                             | Right Tilt                      | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
| Full SAR                    |                                 | -               | -                                                                                                                  | -                   | -                   | -                       | -                   |                     |                                                 |        |
| 20MHz Ch BW 1RB 50% offset  | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.6                                                                                                               | 23.2                | 23.0                | 0.3                     | 0.8                 | 0.9                 | dB                                              |        |
|                             | Time-averaged Power [dBm]       |                 | 23.6                                                                                                               | 23.2                | 23.0                | 1.07                    | 1.17                | 1.23                | Lin                                             |        |
|                             | Left Cheek                      | Estimated SAR   | 1.00                                                                                                               | 0.905               | -                   | 1.07                    | 1.06                | -                   | 0.06                                            | -      |
|                             |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                             | Left Tilt                       | Estimated SAR   | 0.379                                                                                                              | -                   | -                   | 0.406                   | -                   | -                   | -                                               | -      |
|                             |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                             | Right Cheek                     | Estimated SAR   | 0.788                                                                                                              | 0.633               | -                   | 0.844                   | 0.744               | -                   | 0.08                                            | -      |
|                             |                                 | Full SAR        | 0.705                                                                                                              | -                   | -                   | 0.755                   | -                   | -                   |                                                 |        |
|                             | Right Tilt                      | Estimated SAR   | 0.484                                                                                                              | -                   | -                   | 0.519                   | -                   | -                   | 0.01                                            | -      |
| Full SAR                    |                                 | 0.489           | -                                                                                                                  | -                   | 0.524               | -                       | -                   |                     |                                                 |        |
| 20MHz Ch BW 1RB 100% offset | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.4                                                                                                               | 23.0                | 23.0                | 0.5                     | 0.9                 | 0.9                 | dB                                              |        |
|                             | Time-averaged Power [dBm]       |                 | 23.4                                                                                                               | 23.0                | 23.0                | 1.12                    | 1.23                | 1.23                | Lin                                             |        |
|                             |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 50%RB 0% offset | Tuning Target + Tolerance [dBm] |                 | 22.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.6                | 22.6                | 0.3                     | 0.3                 | 0.3                 | dB                                              |        |
|                             | Time-averaged Power [dBm]       |                 | 22.6                                                                                                               | 22.6                | 22.6                | 1.07                    | 1.07                | 1.07                | Lin                                             |        |
|                             |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |    |
|-------------------------------------------|---------------------------------|---------------|-------|-------|-------|-----------------|-------|-------|------|----|
|                                           | Conducted Power [dBm]           |               | 22.6  | 22.5  | 22.6  | 0.3             | 0.4   | 0.3   | dB   |    |
|                                           | Time-averaged Power [dBm]       |               | 22.6  | 22.5  | 22.6  | 1.07            | 1.10  | 1.07  | Lin  |    |
|                                           | Left Cheek                      | Estimated SAR | 1.04  | -     | 0.895 | 1.11            | -     | 0.959 | 0.10 | 10 |
|                                           |                                 | Full SAR      | 0.945 | -     | -     | 1.01            | -     | -     |      |    |
|                                           | Left Tilt                       | Estimated SAR | 0.357 | -     | -     | 0.383           | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Cheek                     | Estimated SAR | 0.635 | -     | -     | 0.680           | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Tilt                      | Estimated SAR | 0.452 | -     | -     | 0.484           | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Repeated SAR                    | Estimated SAR | 0.962 | -     | -     | 1.03            | -     | -     | 0.02 | -  |
|                                           | Left Cheek                      | Full SAR      | 0.937 | -     | -     | 1.00            | -     | -     |      |    |
| 20MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |    |
|                                           | Conducted Power [dBm]           |               | 22.6  | 22.6  | 22.5  | 0.3             | 0.3   | 0.4   | dB   |    |
|                                           | Time-averaged Power [dBm]       |               | 22.6  | 22.6  | 22.5  | 1.07            | 1.07  | 1.10  | Lin  |    |
|                                           | Left Cheek                      | Estimated SAR | -     | 0.911 | -     | -               | 0.976 | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Left Tilt                       | Estimated SAR | -     | -     | -     | -               | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Cheek                     | Estimated SAR | -     | -     | -     | -               | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Tilt                      | Estimated SAR | -     | -     | -     | -               | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
| 20MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |    |
|                                           | Conducted Power [dBm]           |               | 22.6  | 22.6  | 22.6  | 0.3             | 0.3   | 0.3   | dB   |    |
|                                           | Time-averaged Power [dBm]       |               | 22.6  | 22.6  | 22.6  | 1.07            | 1.07  | 1.07  | Lin  |    |
|                                           | Left Cheek                      | Estimated SAR | -     | 0.901 | -     | -               | 0.965 | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Left Tilt                       | Estimated SAR | -     | -     | -     | -               | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Cheek                     | Estimated SAR | -     | 0.657 | -     | -               | 0.704 | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |
|                                           | Right Tilt                      | Estimated SAR | -     | -     | -     | -               | -     | -     | -    | -  |
|                                           |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |    |

### LTE2500 (Band 41) Head SAR results / Antenna 2

| Mode                               | Device orientation              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                        |                        |                        |                        | Reported* 1g SAR [W/kg] |                        |                        |                        |                        | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|------------------------|-------------------------|------------------------|------------------------|------------------------|------------------------|-------------------------------------------------|--------|
|                                    |                                 |                 | Ch 39750<br>2506.0 MHz                                                                                             | Ch 40185<br>2549.5 MHz | Ch 40620<br>2593.0 MHz | Ch 41055<br>2636.5 MHz | Ch 41490<br>2680.0 MHz | Ch 39750<br>2506.0 MHz  | Ch 40185<br>2549.5 MHz | Ch 40620<br>2593.0 MHz | Ch 41055<br>2636.5 MHz | Ch 41490<br>2680.0 MHz |                                                 |        |
| 20 MHz<br>Ch BW 1RB<br>0% offset   | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                        |                        |                        | Scaling factor*         |                        |                        |                        |                        |                                                 |        |
|                                    | Conducted Power [dBm]           |                 | 23.5                                                                                                               | 23.1                   | 23.1                   | 23.1                   | 23.1                   | 0.4                     | 0.8                    | 0.8                    | 0.8                    | 0.8                    | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 | 21.3                                                                                                               | 20.9                   | 20.9                   | 20.9                   | 20.9                   | 1.10                    | 1.20                   | 1.20                   | 1.20                   | 1.20                   | Lin                                             |        |
|                                    |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                        |                        |                        |                        |                         |                        |                        |                        |                        |                                                 |        |
| 20 MHz<br>Ch BW 1RB<br>50% offset  | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                        |                        |                        | Scaling factor*         |                        |                        |                        |                        |                                                 |        |
|                                    | Conducted Power [dBm]           |                 | 23.6                                                                                                               | 23.2                   | 23.1                   | 23.1                   | 23.1                   | 0.3                     | 0.7                    | 0.8                    | 0.8                    | 0.8                    | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 | 21.4                                                                                                               | 21.0                   | 20.9                   | 20.9                   | 20.9                   | 1.07                    | 1.17                   | 1.20                   | 1.20                   | 1.20                   | Lin                                             |        |
|                                    | Left Cheek                      | Estimated SAR   | 0.095                                                                                                              | -                      | -                      | -                      | -                      | 0.101                   | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    |                                 | Full SAR        | -                                                                                                                  | -                      | -                      | -                      | -                      | -                       | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    | Left Tilt                       | Estimated SAR   | 0.017                                                                                                              | -                      | -                      | -                      | -                      | 0.019                   | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    |                                 | Full SAR        | -                                                                                                                  | -                      | -                      | -                      | -                      | -                       | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    | Right Cheek                     | Estimated SAR   | 0.119                                                                                                              | -                      | -                      | -                      | -                      | 0.128                   | -                      | -                      | -                      | -                      | 0.00                                            | 11     |
|                                    |                                 | Full SAR        | 0.116                                                                                                              | -                      | -                      | -                      | -                      | 0.124                   | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    | Right Tilt                      | Estimated SAR   | 0.019                                                                                                              | -                      | -                      | -                      | -                      | 0.020                   | -                      | -                      | -                      | -                      | -                                               | -      |
|                                    |                                 | Full SAR        | -                                                                                                                  | -                      | -                      | -                      | -                      | -                       | -                      | -                      | -                      | -                      | -                                               | -      |
| 20 MHz<br>Ch BW 1RB<br>100% offset | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                        |                        |                        | Scaling factor*         |                        |                        |                        |                        |                                                 |        |
|                                    | Conducted Power [dBm]           |                 | 23.3                                                                                                               | 23.1                   | 23.1                   | 23.1                   | 23.1                   | 0.6                     | 0.8                    | 0.8                    | 0.8                    | 0.8                    | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 | 21.1                                                                                                               | 20.9                   | 20.9                   | 20.9                   | 20.9                   | 1.15                    | 1.20                   | 1.20                   | 1.20                   | 1.20                   | Lin                                             |        |
|                                    |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                        |                        |                        |                        |                         |                        |                        |                        |                        |                                                 |        |

(Table continues)

(Table continues)

| 20 MHz<br>Ch BW<br>50%<br>RB<br>0%<br>offset   | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |
|------------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|------|------|-------|------|-----------------|------|------|-------|------|-----|
|                                                | Conducted Power [dBm]           |               | 22.7                                                                                                               | 22.6 | 22.5 | 22.8  | 22.5 | 0.2             | 0.3  | 0.4  | 0.1   | 0.4  | dB  |
|                                                | Time-averaged power [dBm]       |               | 20.5                                                                                                               | 20.4 | 20.3 | 20.6  | 20.3 | 1.05            | 1.07 | 1.10 | 1.02  | 1.10 | Lin |
|                                                | Left Cheek                      | Estimated SAR | -                                                                                                                  | -    | -    | 0.070 | -    | -               | -    | -    | 0.072 | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Left Tilt                       | Estimated SAR | -                                                                                                                  | -    | -    | 0.015 | -    | -               | -    | -    | 0.015 | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Right Cheek                     | Estimated SAR | -                                                                                                                  | -    | -    | 0.058 | -    | -               | -    | -    | 0.060 | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Right Tilt                      | Estimated SAR | -                                                                                                                  | -    | -    | 0.014 | -    | -               | -    | -    | 0.014 | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
| 20 MHz<br>Ch BW<br>50%<br>RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |
|                                                | Conducted Power [dBm]           |               | 22.7                                                                                                               | 22.7 | 22.6 | 22.8  | 22.5 | 0.2             | 0.2  | 0.3  | 0.1   | 0.4  | dB  |
|                                                | Time-averaged power [dBm]       |               | 20.5                                                                                                               | 20.5 | 20.4 | 20.6  | 20.3 | 1.05            | 1.05 | 1.07 | 1.02  | 1.10 | Lin |
|                                                |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |      |       |      |                 |      |      |       |      |     |
| 20 MHz<br>Ch BW<br>50%<br>RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |
|                                                | Conducted Power [dBm]           |               | 22.7                                                                                                               | 22.6 | 22.5 | 22.8  | 22.6 | 0.2             | 0.3  | 0.4  | 0.1   | 0.3  | dB  |
|                                                | Time-averaged power [dBm]       |               | 20.5                                                                                                               | 20.4 | 20.3 | 20.6  | 20.4 | 1.05            | 1.07 | 1.10 | 1.02  | 1.07 | Lin |
|                                                |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |      |       |      |                 |      |      |       |      |     |
| 20 MHz<br>Ch BW<br>100%<br>RB                  | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |
|                                                | Conducted Power [dBm]           |               | 22.7                                                                                                               | 22.7 | 22.5 | 22.8  | 22.5 | 0.2             | 0.2  | 0.4  | 0.1   | 0.4  | dB  |
|                                                | Time-averaged power [dBm]       |               | 20.5                                                                                                               | 20.5 | 20.3 | 20.6  | 20.3 | 1.05            | 1.05 | 1.10 | 1.02  | 1.10 | Lin |
|                                                | Left Cheek                      | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Left Tilt                       | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Right Cheek                     | Estimated SAR | -                                                                                                                  | -    | -    | 0.055 | -    | -               | -    | -    | 0.056 | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                | Right Tilt                      | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                                |                                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |

### 2450MHz Head SAR results

| Mode                            | Device orientation              | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|---------------------------------|---------------------------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------|--------|
|                                 |                                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                 |        |
| WLAN<br>b-mode<br>BPSK<br>1Mbps | Tuning Target + Tolerance [dBm] |                 | 17.5                   |                    |                     | Scaling factor*         |                    |                     |                                                 |        |
|                                 | Conducted Power [dBm]           |                 | 16.8                   | 17.1               | 17.4                | 0.7                     | 0.4                | 0.1                 | dB                                              |        |
|                                 | Time-averaged power [dBm]       |                 | 16.8                   | 17.1               | 17.4                | 1.17                    | 1.10               | 1.02                | Lin                                             |        |
|                                 | Left Cheek                      | Estimated SAR   | 0.705                  | 0.609              | 0.642               | 0.828                   | 0.668              | 0.657               | 0.00                                            | 12     |
|                                 |                                 | Full SAR        | 0.708                  | -                  | -                   | 0.832                   | -                  | -                   |                                                 |        |
|                                 | Left Tilt                       | Estimated SAR   | -                      | 0.513              | -                   | -                       | 0.562              | -                   | -                                               | -      |
|                                 |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                 | Right Cheek                     | Estimated SAR   | -                      | 0.338              | -                   | -                       | 0.371              | -                   | -                                               | -      |
|                                 |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                 | Right Tilt                      | Estimated SAR   | -                      | 0.330              | -                   | -                       | 0.362              | -                   | -                                               | -      |
| Full SAR                        |                                 | -               | -                      | -                  | -                   | -                       | -                  |                     |                                                 |        |

### Simultaneous transmissions: Combined head SAR results – Individual band Max results

| Test configuration | Max. Reported* 1g SAR results |                   |                          |                   |
|--------------------|-------------------------------|-------------------|--------------------------|-------------------|
|                    | WLAN                          | Antenna 1         |                          |                   |
|                    |                               | WCDMA850 (Band 5) | LTE850 (Band 26 limited) | LTE850 (Band 26)  |
| Head: Left, Cheek  | 0.832                         | 0.096             | 0.263                    | 0.231             |
| Head: Left, Tilt   | 0.562                         | 0.059             | 0.201                    | 0.146             |
| Head: Right, Cheek | 0.371                         | 0.186             | 0.300                    | 0.321             |
| Head: Right, Tilt  | 0.362                         | 0.069             | 0.230                    | 0.197             |
| Test configuration | Max. Reported* 1g SAR results |                   |                          |                   |
|                    | CDMA1900 (BC1)                | Antenna 1         |                          |                   |
|                    |                               | 4-slot GPRS1900   | WCDMA1900 (Band 2)       | LTE1900 (Band 25) |
| Head: Left, Cheek  | 0.670                         | 0.533             | 0.619                    | 0.461             |
| Head: Left, Tilt   | 0.258                         | 0.176             | 0.219                    | 0.203             |
| Head: Right, Cheek | 0.410                         | 0.326             | 0.401                    | 0.817             |
| Head: Right, Tilt  | 0.324                         | 0.213             | 0.254                    | 0.218             |

| Test configuration | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|--------------------|-------------------------------|------------------|--------------------|-------------------|-------------------|
|                    | WLAN                          | Antenna 2        |                    |                   |                   |
|                    |                               | CDMA800 (BC0)    | CDMA800 (BC10)     | 2-slot GPRS850    | WCDMA850 (Band5)  |
| Head: Left, Cheek  | 0.832                         | 0.618            | 0.554              | 0.588             | 0.510             |
| Head: Left, Tilt   | 0.562                         | 0.310            | 0.294              | 0.422             | 0.260             |
| Head: Right, Cheek | 0.371                         | 0.455            | 0.441              | 0.396             | 0.375             |
| Head: Right, Tilt  | 0.362                         | 0.300            | 0.299              | 0.286             | 0.263             |
| Test configuration | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|                    | Antenna 2                     |                  |                    |                   |                   |
|                    | LTE850 (Band26 Limited)       | LTE850 (Band 26) | WCDMA1900 (Band 2) | LTE1900 (Band 25) | LTE2500 (Band 41) |
| Head: Left, Cheek  | 0.406                         | 0.303            | 0.855              | 1.01              | 0.101             |
| Head: Left, Tilt   | 0.200                         | 0.156            | 0.404              | 0.406             | 0.019             |
| Head: Right, Cheek | 0.082                         | 0.052            | 0.654              | 0.821             | 0.124             |
| Head: Right, Tilt  | 0.045                         | 0.020            | 0.431              | 0.524             | 0.020             |

**Simultaneous transmissions: Combined head SAR results –  
Max + Max combined results**

| Test configuration | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|--------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                    | Antenna 1                      |                                       |                                 |                                |
|                    | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN |                                 | LTE850<br>(Band 26)<br>+ WLAN  |
| Head: Left, Cheek  | 0.928                          | 1.10                                  |                                 | 1.06                           |
| Head: Left, Tilt   | 0.621                          | 0.763                                 |                                 | 0.708                          |
| Head: Right, Cheek | 0.557                          | 0.671                                 |                                 | 0.692                          |
| Head: Right, Tilt  | 0.431                          | 0.592                                 |                                 | 0.559                          |
| Test configuration | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                    | Antenna 1                      |                                       |                                 |                                |
|                    | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Head: Left, Cheek  | 1.50                           | 1.37                                  | 1.45                            | 1.29                           |
| Head: Left, Tilt   | 0.820                          | 0.738                                 | 0.781                           | 0.765                          |
| Head: Right, Cheek | 0.781                          | 0.697                                 | 0.772                           | 1.19                           |
| Head: Right, Tilt  | 0.686                          | 0.575                                 | 0.616                           | 0.580                          |

| Test configuration | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|--------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                    | Antenna 2                     |                           |                          |                          |                                |
|                    | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Head: Left, Cheek  | 1.45                          | 1.39                      | 1.42                     | 1.34                     | 1.24                           |
| Head: Left, Tilt   | 0.872                         | 0.856                     | 0.984                    | 0.822                    | 0.762                          |
| Head: Right, Cheek | 0.826                         | 0.812                     | 0.767                    | 0.746                    | 0.453                          |
| Head: Right, Tilt  | 0.662                         | 0.661                     | 0.648                    | 0.625                    | 0.407                          |
| Test configuration | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                    | Antenna 2                     |                           |                          |                          |                                |
|                    | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Head: Left, Cheek  | 1.14                          | 1.69                      | 1.84                     | 0.933                    |                                |
| Head: Left, Tilt   | 0.718                         | 0.966                     | 0.968                    | 0.581                    |                                |
| Head: Right, Cheek | 0.423                         | 1.03                      | 1.19                     | 0.495                    |                                |
| Head: Right, Tilt  | 0.382                         | 0.793                     | 0.886                    | 0.382                    |                                |

### 7.1.1 Simultaneous Transmission SAR Test Exclusion Considerations for Head Measurements

Simultaneous transmission SAR test exclusion procedures as described in KDB 447498 D01 v05.

Following table gives antenna pair SAR to peak location separation ratios for the transmitter combinations for which the sum of simultaneously transmitting 1g SAR was above limit (See “Max+Max Combined results” table in previous section).

**Antenna Pair SAR to Peak Location Separation Ratio Antenna 2**

|                                       | WCDMA 1900 (Band 2) Left Cheek | WLAN 2450 Left Cheek | LTE1900 (Band25) Left Cheek | WLAN 2450 Left Cheek |
|---------------------------------------|--------------------------------|----------------------|-----------------------------|----------------------|
| X [mm]                                | 72.4                           | 27.6                 | 68.8                        | 27.6                 |
| Y [mm]                                | 252.1                          | 322.5                | 252.5                       | 322.5                |
| Z [mm]                                | -172.4                         | -172.5               | -172.6                      | -172.5               |
| DISTANCE [mm]                         | 83.44                          |                      | 81.22                       |                      |
| MAX + MAX (Reported SAR)              | 1.69                           |                      | 1.84                        |                      |
| SAR to peak location separation ratio | 0.03                           |                      | 0.03                        |                      |

All simultaneous transmitter configurations where all antenna pairs' SPLSR is equal to or below 0.04 are excluded from expanded zoom scan testing.

## 7.1.2 Combined Head SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table in Section 1.2.1.

### Simultaneous transmissions: Combined head SAR results – SPEAG Combined Multiband algorithm results

| Test configuration | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|--------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                    | Antenna 1                      |                                       |                                 |                                |
|                    | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN | LTE850<br>(Band 26)<br>+ WLAN   |                                |
| Head: Left, Cheek  | -                              | -                                     | -                               |                                |
| Head: Left, Tilt   | -                              | -                                     | -                               |                                |
| Head: Right, Cheek | -                              | -                                     | -                               |                                |
| Head: Right, Tilt  | -                              | -                                     | -                               |                                |
| Test configuration | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                    | Antenna 1                      |                                       |                                 |                                |
|                    | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Head: Left, Cheek  | 0.881                          | 0.867                                 | -                               | -                              |
| Head: Left, Tilt   | -                              | -                                     | -                               | -                              |
| Head: Right, Cheek | -                              | -                                     | -                               | -                              |
| Head: Right, Tilt  | -                              | -                                     | -                               | -                              |

| Test configuration | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|--------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                    | Antenna 2                     |                           |                          |                          |                                |
|                    | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Head: Left, Cheek  | 0.906                         | 0.896                     | 0.901                    | 0.894                    | 0.896                          |
| Head: Left, Tilt   | -                             | -                         | -                        | -                        | -                              |
| Head: Right, Cheek | -                             | -                         | -                        | -                        | -                              |
| Head: Right, Tilt  | -                             | -                         | -                        | -                        | -                              |
| Test configuration | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                    | Antenna 2                     |                           |                          |                          |                                |
|                    | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Head: Left, Cheek  | 0.861                         | 0.891                     | 1.13                     | 0.840                    |                                |
| Head: Left, Tilt   | -                             | -                         | -                        | -                        |                                |
| Head: Right, Cheek | -                             | -                         | -                        | -                        |                                |
| Head: Right, Tilt  | -                             | -                         | -                        | -                        |                                |

Plots for the combinations with MAX+MAX result >1.6 are included in Appendix B, namely the plots #13-14.

## 7.2 The measured Body SAR values for the test device are tabulated below:

### CDMA800 (BC0) Body SAR results / Antenna 2

| Mode         | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg] |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|-----------------|------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|              |                                 |                 |                 | Ch 1013<br>824.7 MHz   | Ch 384<br>836.5 MHz | Ch 777<br>848.3 MHz | Ch 1013<br>824.7 MHz    | Ch 384<br>836.5 MHz | Ch 777<br>848.3 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 |                 | 24.4                   |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|              | Conducted Power [dBm]           |                 |                 | 24.1                   | 24.1                | 24.2                | 0.3                     | 0.3                 | 0.2                 | dB                                              |        |
|              | Time-averaged power [dBm]       |                 |                 | 24.1                   | 24.1                | 24.2                | 1.07                    | 1.07                | 1.05                | Lin                                             |        |
|              | Back facing phantom             | Without headset | Estimated SAR   | 0.558                  | 0.563               | 0.569               | 0.598                   | 0.603               | 0.596               | 0.00                                            | 15     |
|              |                                 |                 | Full SAR        | -                      | -                   | 0.571               | -                       | -                   | 0.598               |                                                 |        |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.433               | -                   | -                       | 0.464               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|              | Display facing phantom          | Without headset | Estimated SAR   | -                      | 0.508               | -                   | -                       | 0.544               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.373               | -                   | -                       | 0.400               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |

### CDMA800 (BC10) Body SAR results / Antenna 2

| Mode         | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg] |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|-----------------|------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|              |                                 |                 |                 | Ch 476<br>817.9 MHz    | Ch 580<br>820.5 MHz | Ch 684<br>823.1 MHz | Ch 476<br>817.9 MHz     | Ch 580<br>820.5 MHz | Ch 684<br>823.1 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 |                 | 24.4                   |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|              | Conducted Power [dBm]           |                 |                 | 24.0                   | 24.0                | 24.0                | 0.4                     | 0.4                 | 0.4                 | dB                                              |        |
|              | Time-averaged power [dBm]       |                 |                 | 24.0                   | 24.0                | 24.0                | 1.10                    | 1.10                | 1.10                | Lin                                             |        |
|              | Back facing phantom             | Without headset | Estimated SAR   | 0.580                  | 0.577               | 0.581               | 0.636                   | 0.633               | 0.637               | 0.00                                            | 16     |
|              |                                 |                 | Full SAR        | -                      | -                   | 0.581               | -                       | -                   | 0.637               |                                                 |        |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.420               | -                   | -                       | 0.461               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|              | Display facing phantom          | Without headset | Estimated SAR   | -                      | 0.492               | -                   | -                       | 0.539               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.389               | -                   | -                       | 0.427               | -                   | -                                               | -      |
|              |                                 |                 | Full SAR        | -                      | -                   | -                   | -                       | -                   | -                   |                                                 |        |

### 850MHz Band Body SAR results / Antenna 2

| Mode        | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg]                          |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|-----------------|-------------------------------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|             |                                    |                 |                 | Ch 128                                          | Ch 190    | Ch 251    | Ch 128                  | Ch 190    | Ch 251    |                                                 |        |
|             |                                    |                 |                 | 824.2 MHz                                       | 836.6 MHz | 848.8 MHz | 824.2 MHz               | 836.6 MHz | 848.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 32.9                                            |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 32.4                                            | 32.6      | 32.5      | 0.5                     | 0.3       | 0.4       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 23.4                                            | 23.6      | 23.5      | 1.12                    | 1.07      | 1.10      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration |           |           |                         |           |           |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 30.4                                            |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 30.2                                            | 30.2      | 30.3      | 0.2                     | 0.2       | 0.1       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 24.2                                            | 24.2      | 24.3      | 1.05                    | 1.05      | 1.02      | Lin                                             |        |
|             | Back facing phantom                | Without headset | Estimated SAR   | 0.555                                           | 0.498     | 0.465     | 0.581                   | 0.521     | 0.476     | 0.00                                            | 17     |
|             |                                    |                 | Full SAR        | 0.555                                           | -         | -         | 0.581                   | -         | -         |                                                 |        |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                               | 0.365     | -         | -                       | 0.382     | -         | -                                               |        |
|             |                                    |                 | Full SAR        | -                                               | -         | -         | -                       | -         | -         |                                                 |        |
|             | Display facing phantom             | Without headset | Estimated SAR   | -                                               | 0.472     | -         | -                       | 0.494     | -         | -                                               |        |
|             |                                    |                 | Full SAR        | -                                               | -         | -         | -                       | -         | -         |                                                 |        |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                               | 0.373     | -         | -                       | 0.391     | -         | -                                               |        |
|             |                                    |                 | Full SAR        | -                                               | -         | -         | -                       | -         | -         |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 28.6                                            |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 28.4                                            | 28.4      | 28.4      | 0.2                     | 0.2       | 0.2       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 24.1                                            | 24.1      | 24.1      | 1.05                    | 1.05      | 1.05      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration |           |           |                         |           |           |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 27.4                                            |           |           | Scaling factor*         |           |           |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 27.0                                            | 27.0      | 27.1      | 0.4                     | 0.4       | 0.3       | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 24.0                                            | 24.0      | 24.1      | 1.10                    | 1.10      | 1.07      | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration |           |           |                         |           |           |                                                 |        |

(Table continues)

(Table continues)

| Mode  | Device orientation              |                 | SAR measurement | Measured 1g SAR [W/kg]  |                         |                         | Reported* 1g SAR [W/kg] |                         |                         | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|---------------------------------|-----------------|-----------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------------------------------|--------|
|       |                                 |                 |                 | Ch 4132<br>826.4<br>MHz | Ch 4175<br>835.0<br>MHz | Ch 4233<br>846.6<br>MHz | Ch 4132<br>826.4<br>MHz | Ch 4175<br>835.0<br>MHz | Ch 4233<br>846.6<br>MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                    |                         |                         | Scaling factor*         |                         |                         |                                                 |        |
|       | Conducted Power [dBm]           |                 |                 | 23.6                    | 23.6                    | 23.7                    | 0.3                     | 0.3                     | 0.2                     | dB                                              |        |
|       | Time-averaged power [dBm]       |                 |                 | 23.6                    | 23.6                    | 23.7                    | 1.07                    | 1.07                    | 1.05                    | Lin                                             |        |
|       | Back facing phantom             | Without headset | Estimated SAR   | 0.465                   | 0.461                   | 0.464                   | 0.498                   | 0.494                   | 0.486                   | 0.00                                            | 18     |
|       |                                 |                 | Full SAR        | 0.466                   | -                       | -                       | 0.499                   | -                       | -                       |                                                 |        |
|       |                                 | Headset WH-108  | Estimated SAR   | -                       | 0.354                   | -                       | -                       | 0.379                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       | -                                               | -      |
|       | Display facing phantom          | Without headset | Estimated SAR   | -                       | 0.436                   | -                       | -                       | 0.467                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       | -                                               | -      |
|       |                                 | Headset WH-108  | Estimated SAR   | -                       | 0.345                   | -                       | -                       | 0.370                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       | -                                               | -      |

### WCDMA850 (Band 5) Head SAR results / Antenna 1

| Mode  | Device orientation              |                 | SAR measurement | Measured 1g SAR [W/kg]  |                         |                         | Reported* 1g SAR [W/kg] |                         |                         | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|---------------------------------|-----------------|-----------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------------------------------|--------|
|       |                                 |                 |                 | Ch 4132<br>826.4<br>MHz | Ch 4175<br>835.0<br>MHz | Ch 4233<br>846.6<br>MHz | Ch 4132<br>826.4<br>MHz | Ch 4175<br>835.0<br>MHz | Ch 4233<br>846.6<br>MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                    |                         |                         | Scaling factor*         |                         |                         |                                                 |        |
|       | Conducted Power [dBm]           |                 |                 | 23.3                    | 23.4                    | 23.3                    | 0.6                     | 0.5                     | 0.6                     | dB                                              |        |
|       | Time-averaged power [dBm]       |                 |                 | 23.3                    | 23.4                    | 23.3                    | 1.15                    | 1.12                    | 1.15                    | Lin                                             |        |
|       | Back facing phantom             | Without headset | Estimated SAR   | -                       | 0.117                   | -                       | -                       | 0.131                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       |                                                 |        |
|       |                                 | Headset WH-108  | Estimated SAR   | -                       | 0.101                   | -                       | -                       | 0.113                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       | -                                               | -      |
|       | Display facing phantom          | Without headset | Estimated SAR   | 0.136                   | 0.145                   | 0.132                   | 0.156                   | 0.163                   | 0.152                   | 0.02                                            | -      |
|       |                                 |                 | Full SAR        | -                       | 0.129                   | -                       | -                       | 0.145                   | -                       |                                                 |        |
|       |                                 | Headset WH-108  | Estimated SAR   | -                       | 0.144                   | -                       | -                       | 0.162                   | -                       | -                                               | -      |
|       |                                 |                 | Full SAR        | -                       | -                       | -                       | -                       | -                       | -                       | -                                               | -      |

### LTE850 (Band 26 Limited) Body SAR results / Antenna 1

| Mode                        | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-----------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|
|                             |                                 |                 |                 |                                                                                                                    | Ch 26740 819.0 MHz |   |                         | Ch 26740 819.0 MHz |   |                                                 |        |
| 10MHz Ch BW 1RB 0% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.9               | - | -                       | 0.5                | - | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.9               | - | -                       | 1.12               | - | Lin                                             |        |
|                             | Back facing phantom             | Without headset | Estimated SAR   | -                                                                                                                  | 0.149              | - | -                       | 0.167              | - | -                                               | -      |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - | -                                               |        |
|                             |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.209              | - | -                       | 0.235              | - | -                                               | -      |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - | -                                               |        |
|                             | Display facing phantom          | Without headset | Estimated SAR   | -                                                                                                                  | 0.250              | - | -                       | 0.281              | - | 0.00                                            | -      |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | 0.251              | - | -                       | 0.282              | - | -                                               |        |
|                             |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.213              | - | -                       | 0.239              | - | -                                               | -      |
| Full SAR                    |                                 |                 | -               | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
| 10MHz Ch BW 1RB 50% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.8               | - | -                       | 0.6                | - | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.8               | - | -                       | 1.15               | - | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 1RB 100% offset | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 50%RB 0% offset | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.1               | - | -                       | 0.3                | - | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.1               | - | -                       | 1.07               | - | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |                    |               |                                                                                                                    |       |   |                 |       |   |     |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|-----|---|
| 10MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -                                                                                                                  | 0.227 | - | -               | 0.243 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | 0.199 | - | -               | 0.213 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -                                                                                                                  | 0.202 | - | -               | 0.216 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | -             | 0.172                                                                                                              | -     | - | 0.184           | -     | - | -   |   |
|                                           |                                 | Full SAR           | -             | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
| 10MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           |                                 |                    |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -                                                                                                                  | 0.211 | - | -               | 0.225 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
| Full SAR                                  |                                 |                    | -             | -                                                                                                                  | -     | - | -               | -     | - | -   |   |

### LTE850 (Band 26 Limited) Body SAR results / Antenna 2

| Mode                        | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |    |
|-----------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|----|
|                             |                                 |                 |                 |                                                                                                                    | Ch 26740 819.0 MHz |   |                         | Ch 26740 819.0 MHz |   |                                                 |        |    |
| 10MHz Ch BW 1RB 0% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |    |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |    |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |    |
|                             | Back facing phantom             | Without headset | Estimated SAR   | -                                                                                                                  | 0.265              | - | -                       | 0.311              | - | -                                               | -      |    |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - | -                                               | -      |    |
|                             |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.295              | - | -                       | 0.347              | - | -                                               | -      | -  |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - | -                                               | -      | -  |
|                             | Display facing phantom          | Without headset | Estimated SAR   | -                                                                                                                  | 0.121              | - | -                       | 0.142              | - | -                                               | -      | -  |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - | -                                               | -      | -  |
|                             |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.323              | - | -                       | 0.379              | - | -                                               | 0.01   | 19 |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | 0.328              | - | -                       | 0.385              | - | -                                               | -      | -  |
| 10MHz Ch BW 1RB 50% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |    |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.6               | - | -                       | 0.8                | - | dB                                              |        |    |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.6               | - | -                       | 1.20               | - | Lin                                             |        |    |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |    |
|                             |                                 |                 |                 |                                                                                                                    |                    |   |                         |                    |   |                                                 |        |    |
| 10MHz Ch BW 1RB 100% offset | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |    |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 22.5               | - | -                       | 0.9                | - | dB                                              |        |    |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 22.5               | - | -                       | 1.23               | - | Lin                                             |        |    |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |    |
|                             |                                 |                 |                 |                                                                                                                    |                    |   |                         |                    |   |                                                 |        |    |
| 10MHz Ch BW 50%RB 0% offset | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |    |
|                             | Conducted Power [dBm]           |                 |                 | -                                                                                                                  | 21.8               | - | -                       | 0.6                | - | dB                                              |        |    |
|                             | Time-averaged power [dBm]       |                 |                 | -                                                                                                                  | 21.8               | - | -                       | 1.15               | - | Lin                                             |        |    |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |    |
|                             |                                 |                 |                 |                                                                                                                    |                    |   |                         |                    |   |                                                 |        |    |

(Table continues)

(Table continues)

|                                           |                                 |                    |               |                                                                                                                    |       |   |                 |       |   |     |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|-----|---|
| 10MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 21.9  | - | -               | 0.5   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 21.9  | - | -               | 1.12  | - | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -                                                                                                                  | 0.188 | - | -               | 0.211 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | 0.213 | - | -               | 0.239 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -                                                                                                                  | 0.109 | - | -               | 0.122 | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | -             | 0.230                                                                                                              | -     | - | 0.258           | -     | - | -   |   |
|                                           |                                 | Full SAR           | -             | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
| 10MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 21.8  | - | -               | 0.6   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 21.8  | - | -               | 1.15  | - | Lin |   |
|                                           |                                 |                    |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                    |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                           | Conducted Power [dBm]           |                    |               | -                                                                                                                  | 21.9  | - | -               | 0.5   | - | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | -                                                                                                                  | 21.9  | - | -               | 1.12  | - | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | -             | 0.126                                                                                                              | -     | - | 0.141           | -     | - | -   |   |
|                                           |                                 | Full SAR           | -             | -                                                                                                                  | -     | - | -               | -     | - | -   |   |

### LTE850 (Band 26) Body SAR results / Antenna 1

| Mode                         | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |   |
|------------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|---|
|                              |                                 |                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |   |
| 15MHz Ch BW 1RB 0% offset    | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.8                                                                                                               | 23.0               | 22.9               | 0.6                     | 0.4                | 0.5                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.8                                                                                                               | 23.0               | 22.9               | 1.15                    | 1.10               | 1.12               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 1RB 50% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.8                                                                                                               | 23.1               | 23.0               | 0.6                     | 0.3                | 0.4                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.8                                                                                                               | 23.1               | 23.0               | 1.15                    | 1.07               | 1.10               | Lin                                             |        |   |
|                              | Back facing phantom             | Without headset | Estimated SAR   | -                                                                                                                  | 0.125              | -                  | -                       | 0.134              | -                  | -                                               | -      |   |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |   |
|                              |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.160              | -                  | -                       | 0.171              | -                  | -                                               | -      | - |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      | - |
|                              | Display facing phantom          | Without headset | Estimated SAR   | -                                                                                                                  | 0.299              | -                  | -                       | 0.320              | -                  | 0.00                                            | 20     |   |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | 0.301              | -                  | -                       | 0.323              | -                  | -                                               | -      |   |
|                              |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.258              | -                  | -                       | 0.276              | -                  | -                                               | -      |   |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      | - |
| 15MHz Ch BW 1RB 100% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.7                                                                                                               | 22.8               | 22.6               | 0.7                     | 0.6                | 0.8                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.7                                                                                                               | 22.8               | 22.6               | 1.17                    | 1.15               | 1.20               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 50%RB 0% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.1                                                                                                               | 22.1               | 22.0               | 0.3                     | 0.3                | 0.4                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.1                                                                                                               | 22.1               | 22.0               | 1.07                    | 1.07               | 1.10               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 50%RB 50% offset | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.1                                                                                                               | 22.1               | 22.0               | 0.3                     | 0.3                | 0.4                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.1                                                                                                               | 22.1               | 22.0               | 1.07                    | 1.07               | 1.10               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |

(Table continues)

(Table continues)

| 15MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.4  |       |      | Scaling factor* |       |      |     |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|-------|-------|------|-----------------|-------|------|-----|---|
|                                           | Conducted Power [dBm]           |                    |               | 22.1  | 22.1  | 22.1 | 0.3             | 0.3   | 0.3  | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.1  | 22.1  | 22.1 | 1.07            | 1.07  | 1.07 | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -     | 0.111 | -    | -               | 0.119 | -    | -   | - |
|                                           |                                 |                    | Full SAR      | -     | -     | -    | -               | -     | -    | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -     | 0.224 | -    | -               | 0.240 | -    | -   | - |
|                                           |                                 |                    | Full SAR      | -     | -     | -    | -               | -     | -    | -   |   |
| Display<br>facing<br>phantom              | Without<br>headset              | Estimated SAR      | -             | 0.243 | -     | -    | 0.260           | -     | -    | -   |   |
|                                           |                                 | Full SAR           | -             | -     | -     | -    | -               | -     | -    |     |   |
|                                           | Headset<br>WH-108               | Estimated SAR      | -             | 0.206 | -     | -    | 0.221           | -     | -    | -   |   |
|                                           |                                 | Full SAR           | -             | -     | -     | -    | -               | -     | -    |     |   |
| 15MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                    |               | 22.4  |       |      | Scaling factor* |       |      |     |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.1  | 22.1  | 22.1 | 0.3             | 0.3   | 0.3  | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.1  | 22.1  | 22.1 | 1.07            | 1.07  | 1.07 | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                           |                                 |                    | Full SAR      | -     | -     | -    | -               | -     | -    | -   |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                           |                                 |                    | Full SAR      | -     | -     | -    | -               | -     | -    | -   |   |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | 0.225 | -     | -    | 0.241           | -     | -    | -   | - |
|                                           |                                 |                    | Full SAR      | -     | -     | -    | -               | -     | -    | -   |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | -             | -     | -     | -    | -               | -     | -    | -   |   |
|                                           |                                 | Full SAR           | -             | -     | -     | -    | -               | -     | -    |     |   |

### LTE850 (Band 26) Body SAR results / Antenna 2

| Mode                         | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |   |
|------------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|---|
|                              |                                 |                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |   |
| 15MHz Ch BW 1RB 0% offset    | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.6                                                                                                               | 22.8               | 22.7               | 0.8                     | 0.6                | 0.7                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.6                                                                                                               | 22.8               | 22.7               | 1.20                    | 1.15               | 1.17               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 1RB 50% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.6                                                                                                               | 22.8               | 22.8               | 0.8                     | 0.6                | 0.6                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.6                                                                                                               | 22.8               | 22.8               | 1.20                    | 1.15               | 1.15               | Lin                                             |        |   |
|                              | Back facing phantom             | Without headset | Estimated SAR   | -                                                                                                                  | 0.212              | -                  | -                       | 0.243              | -                  | -                                               | -      |   |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |   |
|                              |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.201              | -                  | -                       | 0.231              | -                  | -                                               | -      | - |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      | - |
|                              | Display facing phantom          | Without headset | Estimated SAR   | -                                                                                                                  | 0.231              | -                  | -                       | 0.265              | -                  | -                                               | -      | - |
|                              |                                 |                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      | - |
|                              |                                 | Headset WH-108  | Estimated SAR   | -                                                                                                                  | 0.242              | -                  | -                       | 0.278              | -                  | -                                               | 0.00   | - |
| Full SAR                     |                                 |                 | -               | 0.242                                                                                                              | -                  | -                  | 0.278                   | -                  | -                  | -                                               | -      |   |
| 15MHz Ch BW 1RB 100% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 22.6                                                                                                               | 22.7               | 22.5               | 0.8                     | 0.7                | 0.9                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 22.6                                                                                                               | 22.7               | 22.5               | 1.20                    | 1.17               | 1.23               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 50%RB 0% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |
| 15MHz Ch BW 50%RB 50% offset | Tuning Target + Tolerance [dBm] |                 |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |   |
|                              | Conducted Power [dBm]           |                 |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |   |
|                              | Time-averaged power [dBm]       |                 |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |   |
|                              |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |   |

(Table continues)

(Table continues)

| 15MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.4 |      |       | Scaling factor* |      |       |     |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|------|------|-------|-----------------|------|-------|-----|---|
|                                           | Conducted Power [dBm]           |                    |               | 21.9 | 21.9 | 22.0  | 0.5             | 0.5  | 0.4   | dB  |   |
|                                           | Time-averaged power [dBm]       |                    |               | 21.9 | 21.9 | 22.0  | 1.12            | 1.12 | 1.10  | Lin |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -    | -    | 0.186 | -               | -    | 0.204 | -   | - |
|                                           |                                 |                    | Full SAR      | -    | -    | -     | -               | -    | -     | -   | - |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -    | -    | 0.170 | -               | -    | 0.186 | -   | - |
|                                           |                                 |                    | Full SAR      | -    | -    | -     | -               | -    | -     | -   | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -    | -    | 0.122 | -               | -    | 0.134 | -   | - |
|                                           |                                 |                    | Full SAR      | -    | -    | -     | -               | -    | -     | -   | - |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -    | -    | 0.183 | -               | -    | 0.201 | -   | - |
|                                           |                                 |                    | Full SAR      | -    | -    | -     | -               | -    | -     | -   | - |

| 15MHz<br>Ch BW<br>100%<br>RB | Tuning Target + Tolerance [dBm] |                    |               | 22.4 |       |      | Scaling factor* |       |      |     |   |
|------------------------------|---------------------------------|--------------------|---------------|------|-------|------|-----------------|-------|------|-----|---|
|                              | Conducted Power [dBm]           |                    |               | 22.0 | 22.0  | 21.9 | 0.4             | 0.4   | 0.5  | dB  |   |
|                              | Time-averaged power [dBm]       |                    |               | 22.0 | 22.0  | 21.9 | 1.10            | 1.10  | 1.12 | Lin |   |
|                              | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -    | -     | -    | -               | -     | -    | -   | - |
|                              |                                 |                    | Full SAR      | -    | -     | -    | -               | -     | -    | -   | - |
|                              |                                 | Headset<br>WH-108  | Estimated SAR | -    | -     | -    | -               | -     | -    | -   | - |
|                              |                                 |                    | Full SAR      | -    | -     | -    | -               | -     | -    | -   | - |
|                              | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | -    | -     | -    | -               | -     | -    | -   | - |
|                              |                                 |                    | Full SAR      | -    | -     | -    | -               | -     | -    | -   | - |
|                              |                                 | Headset<br>WH-108  | Estimated SAR | -    | 0.176 | -    | -               | 0.194 | -    | -   | - |
|                              |                                 |                    | Full SAR      | -    | -     | -    | -               | -     | -    | -   | - |

### CDMA1900 (BC1) Body SAR results / Antenna 1

| Mode         | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg] |            |             | Reported* 1g SAR [W/kg] |            |             | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |   |
|--------------|---------------------------------|-----------------|-----------------|------------------------|------------|-------------|-------------------------|------------|-------------|-------------------------------------------------|--------|---|
|              |                                 |                 |                 | Ch 25                  | Ch 600     | Ch 1175     | Ch 25                   | Ch 600     | Ch 1175     |                                                 |        |   |
|              |                                 |                 |                 | 1851.25 MHz            | 1880.0 MHz | 1908.75 MHz | 1851.25 MHz             | 1880.0 MHz | 1908.75 MHz |                                                 |        |   |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 |                 | 24.4                   |            |             | Scaling factor*         |            |             |                                                 |        |   |
|              | Conducted Power [dBm]           |                 |                 | 23.8                   | 23.8       | 23.9        | 0.6                     | 0.6        | 0.5         | dB                                              |        |   |
|              | Time-averaged power [dBm]       |                 |                 | 23.8                   | 23.8       | 23.9        | 1.15                    | 1.15       | 1.12        | Lin                                             |        |   |
|              | Back facing phantom             | Without headset | Estimated SAR   | -                      | 0.480      | -           | -                       | 0.551      | -           | -                                               | -      |   |
|              |                                 |                 | Full SAR        | -                      | -          | -           | -                       | -          | -           | -                                               | -      |   |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.499      | -           | -                       | 0.573      | -           | -                                               | -      | - |
|              |                                 |                 | Full SAR        | -                      | -          | -           | -                       | -          | -           | -                                               | -      | - |
|              | Display facing phantom          | Without headset | Estimated SAR   | 0.611                  | 0.614      | 0.625       | 0.702                   | 0.705      | 0.701       | 0.01                                            | 21     |   |
|              |                                 |                 | Full SAR        | -                      | 0.626      | -           | -                       | 0.719      | -           | -                                               | -      | - |
|              |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.591      | -           | -                       | 0.679      | -           | -                                               | -      | - |
| Full SAR     |                                 |                 | -               | -                      | -          | -           | -                       | -          | -           | -                                               | -      |   |

### 1900MHz Band Body SAR results / Antenna 1

| Mode        | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg]                           |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|-----------------|--------------------------------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|             |                                    |                 |                 | Ch 512<br>1850.2 MHz                             | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz | Ch 512<br>1850.2 MHz    | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 29.4                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 28.9                                             | 28.9                 | 28.9                 | 0.5                     | 0.5                  | 0.5                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 19.9                                             | 19.9                 | 19.9                 | 1.12                    | 1.12                 | 1.12                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 27.4                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 26.8                                             | 26.9                 | 26.9                 | 0.6                     | 0.5                  | 0.5                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 20.8                                             | 20.9                 | 20.9                 | 1.15                    | 1.12                 | 1.12                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 25.6                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 24.9                                             | 25.0                 | 25.1                 | 0.7                     | 0.6                  | 0.5                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 20.6                                             | 20.7                 | 20.8                 | 1.17                    | 1.15                 | 1.12                 | Lin                                             |        |
|             |                                    |                 |                 | No testing required for this slot configuration. |                      |                      |                         |                      |                      |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 |                 | 24.4                                             |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 |                 | 24.1                                             | 24.2                 | 24.2                 | 0.3                     | 0.2                  | 0.2                  | dB                                              |        |
|             | Time-averaged power [dBm]          |                 |                 | 21.1                                             | 21.2                 | 21.2                 | 1.07                    | 1.05                 | 1.05                 | Lin                                             |        |
|             | Back facing phantom                | Without headset | Estimated SAR   | -                                                | 0.350                | -                    | -                       | 0.366                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                                | 0.332                | -                    | -                       | 0.348                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |
|             | Display facing phantom             | Without headset | Estimated SAR   | 0.457                                            | 0.435                | 0.349                | 0.490                   | 0.456                | 0.365                | 0.01                                            | 22     |
|             |                                    |                 | Full SAR        | 0.463                                            | -                    | -                    | 0.496                   | -                    | -                    | -                                               | -      |
|             |                                    | Headset WH-108  | Estimated SAR   | -                                                | 0.363                | -                    | -                       | 0.380                | -                    | -                                               | -      |
|             |                                    |                 | Full SAR        | -                                                | -                    | -                    | -                       | -                    | -                    | -                                               | -      |

(Table continues)

(Table continues)

| Mode  | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg] |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|-----------------|------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
|       |                                    |                 |                 | Ch 9262<br>1852.4 MHz  | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 |                 | 23.9                   |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 |                 | 23.8                   | 23.7                  | 23.7                  | 0.1                     | 0.2                   | 0.2                   | dB                                              |        |
|       | Time-averaged power [dBm]          |                 |                 | 23.8                   | 23.7                  | 23.7                  | 1.02                    | 1.05                  | 1.05                  | Lin                                             |        |
|       | Back facing phantom                | Without headset | Estimated SAR   | -                      | 0.455                 | -                     | -                       | 0.476                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.418                 | -                     | -                       | 0.438                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |
|       | Display facing phantom             | Without headset | Estimated SAR   | 0.588                  | 0.577                 | 0.553                 | 0.602                   | 0.604                 | 0.579                 | 0.00                                            | 23     |
|       |                                    |                 | Full SAR        | -                      | 0.578                 | -                     | -                       | 0.605                 | -                     | -                                               | -      |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.496                 | -                     | -                       | 0.519                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |

### WCDMA1900 (Band 2) Body SAR results / Antenna 2

| Mode  | Device orientation                 |                 | SAR measurement | Measured 1g SAR [W/kg] |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|-----------------|------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
|       |                                    |                 |                 | Ch 9262<br>1852.4 MHz  | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 |                 | 23.9                   |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 |                 | 23.3                   | 23.2                  | 23.1                  | 0.6                     | 0.7                   | 0.8                   | dB                                              |        |
|       | Time-averaged power [dBm]          |                 |                 | 23.3                   | 23.2                  | 23.1                  | 1.15                    | 1.17                  | 1.20                  | Lin                                             |        |
|       | Back facing phantom                | Without headset | Estimated SAR   | -                      | 0.393                 | -                     | -                       | 0.462                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |
|       |                                    | Headset WH-108  | Estimated SAR   | 0.484                  | 0.425                 | 0.447                 | 0.556                   | 0.499                 | 0.537                 | 0.01                                            | -      |
|       |                                    |                 | Full SAR        | 0.493                  | -                     | -                     | 0.566                   | -                     | -                     | -                                               | -      |
|       | Display facing phantom             | Without headset | Estimated SAR   | -                      | 0.418                 | -                     | -                       | 0.491                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |
|       |                                    | Headset WH-108  | Estimated SAR   | -                      | 0.406                 | -                     | -                       | 0.477                 | -                     | -                                               | -      |
|       |                                    |                 | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     | -                                               | -      |

### LTE1900 (Band 25) Body SAR results / Antenna 1

| Mode                        | Test configuration              |                 | SAR measurement                                                                                                    | Measured 1g SAR [W/kg] |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-----------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                             |                                 |                 |                                                                                                                    | Ch 26140 1860.0 MHz    | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz Ch BW 1RB 0% offset   | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                     | Scaling factor*     |                         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.8                                                                                                               | 23.2                   | 23.1                | 0.1                 | 0.7                     | 0.8                 | dB                  |                                                 |        |
|                             | Time-averaged power [dBm]       |                 | 23.8                                                                                                               | 23.2                   | 23.1                | 1.02                | 1.17                    | 1.20                | Lin                 |                                                 |        |
|                             |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                        |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 1RB 50% offset  | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                     | Scaling factor*     |                         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.9                                                                                                               | 23.3                   | 23.3                | 0.0                 | 0.6                     | 0.6                 | dB                  |                                                 |        |
|                             | Time-averaged power [dBm]       |                 | 23.9                                                                                                               | 23.3                   | 23.3                | 1.00                | 1.15                    | 1.15                | Lin                 |                                                 |        |
|                             | Back facing phantom             | Without headset | Estimated SAR                                                                                                      | 0.617                  | -                   | -                   | 0.617                   | -                   | -                   | -                                               | -      |
|                             |                                 |                 | Full SAR                                                                                                           | -                      | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             |                                 | Headset WH-108  | Estimated SAR                                                                                                      | 0.650                  | -                   | -                   | 0.650                   | -                   | -                   | -                                               | -      |
|                             |                                 |                 | Full SAR                                                                                                           | -                      | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             | Display facing phantom          | Without headset | Estimated SAR                                                                                                      | 0.683                  | -                   | -                   | 0.683                   | -                   | -                   | -                                               | -      |
|                             |                                 |                 | Full SAR                                                                                                           | -                      | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             |                                 | Headset WH-108  | Estimated SAR                                                                                                      | 0.704                  | -                   | -                   | 0.704                   | -                   | -                   | 0.08                                            | -      |
| Full SAR                    |                                 |                 | 0.625                                                                                                              | -                      | -                   | 0.625               | -                       | -                   | -                   | -                                               |        |
| 20MHz Ch BW 1RB 100% offset | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                        |                     | Scaling factor*     |                         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 23.8                                                                                                               | 23.2                   | 23.0                | 0.1                 | 0.7                     | 0.9                 | dB                  |                                                 |        |
|                             | Time-averaged power [dBm]       |                 | 23.8                                                                                                               | 23.2                   | 23.0                | 1.02                | 1.17                    | 1.23                | Lin                 |                                                 |        |
|                             |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                        |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 50%RB 0% offset | Tuning Target + Tolerance [dBm] |                 | 22.9                                                                                                               |                        |                     | Scaling factor*     |                         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 | 22.9                                                                                                               | 22.7                   | 22.8                | 0.0                 | 0.2                     | 0.1                 | dB                  |                                                 |        |
|                             | Time-averaged power [dBm]       |                 | 22.9                                                                                                               | 22.7                   | 22.8                | 1.00                | 1.05                    | 1.02                | Lin                 |                                                 |        |
|                             |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                        |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

|                                           |                                 |                    |               |                                                                                                                    |      |       |                 |      |      |     |   |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|--------------------------------------------------------------------------------------------------------------------|------|-------|-----------------|------|------|-----|---|---|
| 20MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.9                                                                                                               | 22.8 | 22.8  | 0.0             | 0.1  | 0.1  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.9                                                                                                               | 22.8 | 22.8  | 1.00            | 1.02 | 1.02 | Lin |   |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | 0.490                                                                                                              | -    | -     | 0.490           | -    | -    | -   | - |   |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | 0.513                                                                                                              | -    | -     | 0.513           | -    | -    | -   | - | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | 0.562                                                                                                              | -    | -     | 0.562           | -    | -    | -   | - | - |
| Full SAR                                  |                                 |                    | -             | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | 0.584         | -                                                                                                                  | -    | 0.584 | -               | -    | -    | -   | - |   |
|                                           |                                 | Full SAR           | -             | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
| 20MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.8                                                                                                               | 22.8 | 22.8  | 0.1             | 0.1  | 0.1  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.8                                                                                                               | 22.8 | 22.8  | 1.02            | 1.02 | 1.02 | Lin |   |   |
|                                           |                                 |                    |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |      |     |   |   |
| 20MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.8                                                                                                               | 22.8 | 22.8  | 0.1             | 0.1  | 0.1  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.8                                                                                                               | 22.8 | 22.8  | 1.02            | 1.02 | 1.02 | Lin |   |   |
|                                           |                                 |                    |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |      |     |   |   |

### LTE1900 (Band 25) Body SAR results / Antenna 2

| Mode                        | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-----------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                             |                                 |                 |                 | Ch 26140 1860.0 MHz                                                                                                | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz Ch BW 1RB 0% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | 23.4                                                                                                               | 23.0                | 23.1                | 0.5                     | 0.9                 | 0.8                 | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | 23.4                                                                                                               | 23.0                | 23.1                | 1.12                    | 1.23                | 1.20                | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 1RB 50% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | 23.6                                                                                                               | 23.2                | 23.0                | 0.3                     | 0.7                 | 0.9                 | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | 23.6                                                                                                               | 23.2                | 23.0                | 1.07                    | 1.17                | 1.23                | Lin                                             |        |
|                             | Back facing phantom             | Without headset | Estimated SAR   | 0.628                                                                                                              | -                   | -                   | 0.673                   | -                   | -                   | -                                               | -      |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             |                                 | Headset WH-108  | Estimated SAR   | 0.500                                                                                                              | -                   | -                   | 0.536                   | -                   | -                   | -                                               | -      |
|                             |                                 |                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                             | Display facing phantom          | Without headset | Estimated SAR   | 0.737                                                                                                              | -                   | -                   | 0.790                   | -                   | -                   | 0.05                                            | 24     |
|                             |                                 |                 | Full SAR        | 0.691                                                                                                              | -                   | -                   | 0.740                   | -                   | -                   | -                                               | -      |
|                             |                                 | Headset WH-108  | Estimated SAR   | 0.513                                                                                                              | -                   | -                   | 0.550                   | -                   | -                   | -                                               | -      |
| Full SAR                    |                                 |                 | -               | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               |        |
| 20MHz Ch BW 1RB 100% offset | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | 23.4                                                                                                               | 23.0                | 23.0                | 0.5                     | 0.9                 | 0.9                 | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | 23.4                                                                                                               | 23.0                | 23.0                | 1.12                    | 1.23                | 1.23                | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 50%RB 0% offset | Tuning Target + Tolerance [dBm] |                 |                 | 22.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                             | Conducted Power [dBm]           |                 |                 | 22.6                                                                                                               | 22.6                | 22.6                | 0.3                     | 0.3                 | 0.3                 | dB                                              |        |
|                             | Time-averaged power [dBm]       |                 |                 | 22.6                                                                                                               | 22.6                | 22.6                | 1.07                    | 1.07                | 1.07                | Lin                                             |        |
|                             |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|-------------------------------------------|---------------------------------|--------------------|---------------|--------------------------------------------------------------------------------------------------------------------|------|-------|-----------------|------|------|-----|---|---|
|                                           | Conducted Power [dBm]           |                    |               | 22.6                                                                                                               | 22.5 | 22.6  | 0.3             | 0.4  | 0.3  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.6                                                                                                               | 22.5 | 22.6  | 1.07            | 1.10 | 1.07 | Lin |   |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | 0.504                                                                                                              | -    | -     | 0.540           | -    | -    | -   | - |   |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | 0.402                                                                                                              | -    | -     | 0.431           | -    | -    | -   | - | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | 0.586                                                                                                              | -    | -     | 0.628           | -    | -    | -   | - | - |
| Full SAR                                  |                                 |                    | -             | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
| Headset<br>WH-108                         |                                 | Estimated SAR      | 0.414         | -                                                                                                                  | -    | 0.444 | -               | -    | -    | -   | - |   |
|                                           |                                 | Full SAR           | -             | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |
| 20MHz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.6                                                                                                               | 22.6 | 22.5  | 0.3             | 0.3  | 0.4  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.6                                                                                                               | 22.6 | 22.5  | 1.07            | 1.07 | 1.10 | Lin |   |   |
|                                           |                                 |                    |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |       |                 |      |      |     |   |   |
| 20MHz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                    |               | 22.9                                                                                                               |      |       | Scaling factor* |      |      |     |   |   |
|                                           | Conducted Power [dBm]           |                    |               | 22.6                                                                                                               | 22.6 | 22.6  | 0.3             | 0.3  | 0.3  | dB  |   |   |
|                                           | Time-averaged power [dBm]       |                    |               | 22.6                                                                                                               | 22.6 | 22.6  | 1.07            | 1.07 | 1.07 | Lin |   |   |
|                                           | Back<br>facing<br>phantom       | Without<br>headset | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           | Display<br>facing<br>phantom    | Without<br>headset | Estimated SAR | 0.557                                                                                                              | -    | -     | 0.597           | -    | -    | -   | - | - |
|                                           |                                 |                    | Full SAR      | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
|                                           |                                 | Headset<br>WH-108  | Estimated SAR | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - | - |
| Full SAR                                  |                                 |                    | -             | -                                                                                                                  | -    | -     | -               | -    | -    | -   | - |   |

### LTE2500 (Band 41) Body SAR results / Antenna 2

| Mode                               | Test configuration              |                 | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |            |            |            |            | Reported* 1g SAR [W/kg] |            |            |            |            | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------------|---------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|-------------------------|------------|------------|------------|------------|-------------------------------------------------|--------|
|                                    |                                 |                 |                 | Ch 39750                                                                                                           | Ch 40185   | Ch 40620   | Ch 41055   | Ch 41490   | Ch 39750                | Ch 40185   | Ch 40620   | Ch 41055   | Ch 41490   |                                                 |        |
|                                    |                                 |                 |                 | 2506.0 MHz                                                                                                         | 2549.5 MHz | 2593.0 MHz | 2636.5 MHz | 2680.0 MHz | 2506.0 MHz              | 2549.5 MHz | 2593.0 MHz | 2636.5 MHz | 2680.0 MHz |                                                 |        |
| 20M Hz<br>Ch BW 1RB<br>0% offset   | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |            |            |            |            | Scaling factor*         |            |            |            |            |                                                 |        |
|                                    | Conducted Power [dBm]           |                 |                 | 23.5                                                                                                               | 23.1       | 23.1       | 23.1       | 23.1       | 0.4                     | 0.8        | 0.8        | 0.8        | 0.8        | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 |                 | 21.3                                                                                                               | 20.9       | 20.9       | 20.9       | 20.9       | 1.10                    | 1.20       | 1.20       | 1.20       | 1.20       | Lin                                             |        |
|                                    |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |            |            |            |            |                         |            |            |            |            |                                                 |        |
| 20M Hz<br>Ch BW 1RB<br>50% offset  | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |            |            |            |            | Scaling factor*         |            |            |            |            |                                                 |        |
|                                    | Conducted Power [dBm]           |                 |                 | 23.6                                                                                                               | 23.2       | 23.1       | 23.1       | 23.1       | 0.3                     | 0.7        | 0.8        | 0.8        | 0.8        | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 |                 | 21.4                                                                                                               | 21.0       | 20.9       | 20.9       | 20.9       | 1.07                    | 1.17       | 1.20       | 1.20       | 1.20       | Lin                                             |        |
|                                    | Back facing phantom             | Without headset | Estimated SAR   | 0.126                                                                                                              | -          | -          | -          | -          | 0.135                   | -          | -          | -          | -          | -                                               | -      |
|                                    |                                 |                 | Full SAR        | -                                                                                                                  | -          | -          | -          | -          | -                       | -          | -          | -          | -          | -                                               |        |
|                                    |                                 | Headset WH-108  | Estimated SAR   | 0.125                                                                                                              | -          | -          | -          | -          | 0.134                   | -          | -          | -          | -          | -                                               | -      |
|                                    |                                 |                 | Full SAR        | -                                                                                                                  | -          | -          | -          | -          | -                       | -          | -          | -          | -          | -                                               | -      |
|                                    | Display facing phantom          | Without headset | Estimated SAR   | 0.128                                                                                                              | -          | -          | -          | -          | 0.137                   | -          | -          | -          | -          | -                                               | -      |
|                                    |                                 |                 | Full SAR        | -                                                                                                                  | -          | -          | -          | -          | -                       | -          | -          | -          | -          | -                                               |        |
|                                    |                                 | Headset WH-108  | Estimated SAR   | 0.105                                                                                                              | -          | -          | -          | -          | 0.113                   | -          | -          | -          | -          | -                                               | -      |
|                                    |                                 |                 | Full SAR        | -                                                                                                                  | -          | -          | -          | -          | -                       | -          | -          | -          | -          | -                                               | -      |
| 20M Hz<br>Ch BW 1RB<br>100% offset | Tuning Target + Tolerance [dBm] |                 |                 | 23.9                                                                                                               |            |            |            |            | Scaling factor*         |            |            |            |            |                                                 |        |
|                                    | Conducted Power [dBm]           |                 |                 | 23.3                                                                                                               | 23.1       | 23.1       | 23.1       | 23.2       | 0.6                     | 0.8        | 0.8        | 0.8        | 0.7        | dB                                              |        |
|                                    | Time-averaged power [dBm]       |                 |                 | 21.1                                                                                                               | 20.9       | 20.9       | 20.9       | 21.0       | 1.15                    | 1.20       | 1.20       | 1.20       | 1.17       | Lin                                             |        |
|                                    |                                 |                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |            |            |            |            |                         |            |            |            |            |                                                 |        |

(Table continues)

(Table continues)

|                                               |                                 |                 |               |                                                                                                                    |      |      |       |      |                 |      |      |       |      |     |    |
|-----------------------------------------------|---------------------------------|-----------------|---------------|--------------------------------------------------------------------------------------------------------------------|------|------|-------|------|-----------------|------|------|-------|------|-----|----|
| 20M<br>Hz<br>Ch BW<br>50%RB<br>0%<br>offset   | Tuning Target + Tolerance [dBm] |                 |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |    |
|                                               | Conducted Power [dBm]           |                 |               | 22.7                                                                                                               | 22.6 | 22.5 | 22.8  | 22.5 | 0.2             | 0.3  | 0.4  | 0.1   | 0.4  | dB  |    |
|                                               | Time-averaged power [dBm]       |                 |               | 20.5                                                                                                               | 20.4 | 20.3 | 20.6  | 20.3 | 1.05            | 1.07 | 1.10 | 1.02  | 1.10 | Lin |    |
|                                               | Back facing phantom             | Without headset | Estimated SAR | -                                                                                                                  | -    | -    | 0.159 | -    | -               | -    | -    | 0.163 | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |    |
|                                               |                                 | Headset WH-108  | Estimated SAR | -                                                                                                                  | -    | -    | 0.160 | -    | -               | -    | -    | 0.164 | -    | -   | 25 |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | 0.162 | -    | -               | -    | -    | 0.166 | -    | -   | -  |
|                                               | Display facing phantom          | Without headset | Estimated SAR | -                                                                                                                  | -    | -    | 0.131 | -    | -               | -    | -    | 0.134 | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |    |
|                                               |                                 | Headset WH-108  | Estimated SAR | -                                                                                                                  | -    | -    | 0.127 | -    | -               | -    | -    | 0.130 | -    | -   | -  |
| Full SAR                                      |                                 |                 | -             | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |    |
| 20M<br>Hz<br>Ch BW<br>50%RB<br>50%<br>offset  | Tuning Target + Tolerance [dBm] |                 |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |    |
|                                               | Conducted Power [dBm]           |                 |               | 22.7                                                                                                               | 22.6 | 22.6 | 22.8  | 22.5 | 0.2             | 0.3  | 0.3  | 0.1   | 0.4  | dB  |    |
|                                               | Time-averaged power [dBm]       |                 |               | 20.5                                                                                                               | 20.4 | 20.4 | 20.6  | 20.3 | 1.05            | 1.07 | 1.07 | 1.02  | 1.10 | Lin |    |
|                                               |                                 |                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |      |       |      |                 |      |      |       |      |     |    |
| 20M<br>Hz<br>Ch BW<br>50%RB<br>100%<br>offset | Tuning Target + Tolerance [dBm] |                 |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |    |
|                                               | Conducted Power [dBm]           |                 |               | 22.7                                                                                                               | 22.6 | 22.5 | 22.8  | 22.6 | 0.2             | 0.3  | 0.4  | 0.1   | 0.2  | dB  |    |
|                                               | Time-averaged power [dBm]       |                 |               | 20.5                                                                                                               | 20.4 | 20.3 | 20.6  | 20.4 | 1.05            | 1.07 | 1.10 | 1.02  | 1.05 | Lin |    |
|                                               |                                 |                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |      |      |       |      |                 |      |      |       |      |     |    |
| 20M<br>Hz<br>Ch BW<br>100%<br>RB              | Tuning Target + Tolerance [dBm] |                 |               | 22.9                                                                                                               |      |      |       |      | Scaling factor* |      |      |       |      |     |    |
|                                               | Conducted Power [dBm]           |                 |               | 22.7                                                                                                               | 22.7 | 22.5 | 22.8  | 22.5 | 0.2             | 0.2  | 0.4  | 0.1   | 0.4  | dB  |    |
|                                               | Time-averaged power [dBm]       |                 |               | 20.5                                                                                                               | 20.5 | 20.3 | 20.6  | 20.3 | 1.05            | 1.05 | 1.10 | 1.02  | 1.10 | Lin |    |
|                                               | Back facing phantom             | Without headset | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |    |
|                                               |                                 | Headset WH-108  | Estimated SAR | -                                                                                                                  | -    | -    | 0.162 | -    | -               | -    | -    | 0.165 | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   | -  |
|                                               | Display facing phantom          | Without headset | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |    |
|                                               |                                 | Headset WH-108  | Estimated SAR | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   | -  |
|                                               |                                 |                 | Full SAR      | -                                                                                                                  | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   | -  |

### 2450MHz Body SAR results

| Mode                             | Device orientation              |                 | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------------|---------------------------------|-----------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------|--------|
|                                  |                                 |                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                 |        |
| WLAN<br>b-mode<br>BPSK<br>1 Mbps | Tuning Target + Tolerance [dBm] |                 |                 | 17.5                   |                    |                     | Scaling factor*         |                    |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 |                 | 16.8                   | 17.1               | 17.4                | 0.7                     | 0.4                | 0.1                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 |                 | 16.8                   | 17.1               | 17.4                | 1.17                    | 1.10               | 1.02                | Lin                                             |        |
|                                  | Back facing phantom             | Without headset | Estimated SAR   | 0.123                  | 0.130              | 0.155               | 0.145                   | 0.143              | 0.159               | 0.00                                            | 26     |
|                                  |                                 |                 | Full SAR        | -                      | -                  | 0.156               | -                       | -                  | 0.160               |                                                 |        |
|                                  |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.120              | -                   | -                       | 0.132              | -                   | -                                               |        |
|                                  |                                 |                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   | -                                               |        |
|                                  | Display facing phantom          | Without headset | Estimated SAR   | -                      | 0.087              | -                   | -                       | 0.096              | -                   | -                                               |        |
|                                  |                                 |                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   | -                                               |        |
|                                  |                                 | Headset WH-108  | Estimated SAR   | -                      | 0.092              | -                   | -                       | 0.101              | -                   | -                                               |        |
|                                  |                                 |                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   | -                                               |        |

### Simultaneous transmissions: Combined body SAR results – Individual band Max results

| Test configuration                            | Max. Reported* 1g SAR results |                   |                         |                   |
|-----------------------------------------------|-------------------------------|-------------------|-------------------------|-------------------|
|                                               | WLAN                          | Antenna 1         |                         |                   |
|                                               |                               | WCDMA850 (Band 5) | LTE850 (Band 26 imited) | LTE850 (Band 26)  |
| Body: Back facing phantom, Without Headset    | 0.160                         | 0.131             | 0.243                   | 0.134             |
| Body: Back facing phantom, Headset WH-108     | 0.132                         | 0.113             | 0.235                   | 0.240             |
| Body: Display facing phantom, Without Headset | 0.096                         | 0.145             | 0.282                   | 0.323             |
| Body: Display facing phantom, Headset WH-108  | 0.101                         | 0.162             | 0.239                   | 0.276             |
| Test configuration                            | Max. Reported* 1g SAR results |                   |                         |                   |
|                                               | Antenna 1                     |                   |                         |                   |
|                                               | CDMA1900 (BC1)                | 4-slot GPRS1900   | WCDMA1900 (Band 2)      | LTE1900 (Band 25) |
| Body: Back facing phantom, Without Headset    | 0.551                         | 0.366             | 0.476                   | 0.617             |
| Body: Back facing phantom, Headset WH-108     | 0.573                         | 0.348             | 0.438                   | 0.650             |
| Body: Display facing phantom, Without Headset | 0.719                         | 0.496             | 0.605                   | 0.683             |
| Body: Display facing phantom, Headset WH-108  | 0.679                         | 0.380             | 0.519                   | 0.625             |

| Test configuration                            | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|-----------------------------------------------|-------------------------------|------------------|--------------------|-------------------|-------------------|
|                                               | WLAN                          | Antenna 2        |                    |                   |                   |
|                                               |                               | CDMA800 (BC0)    | CDMA800 (BC10)     | 2-slot GPRS850    | WCDMA850 (Band5)  |
| Body: Back facing phantom, Without Headset    | 0.160                         | 0.598            | 0.637              | 0.581             | 0.499             |
| Body: Back facing phantom, Headset WH-108     | 0.132                         | 0.464            | 0.461              | 0.382             | 0.379             |
| Body: Display facing phantom, Without Headset | 0.096                         | 0.544            | 0.539              | 0.494             | 0.467             |
| Body: Display facing phantom, Headset WH-108  | 0.101                         | 0.400            | 0.427              | 0.391             | 0.370             |
| Test configuration                            | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|                                               | Antenna 2                     |                  |                    |                   |                   |
|                                               | LTE850 (Band26 Limited)       | LTE850 (Band 26) | WCDMA1900 (Band 2) | LTE1900 (Band 25) | LTE2500 (Band 41) |
| Body: Back facing phantom, Without Headset    | 0.311                         | 0.243            | 0.462              | 0.673             | 0.163             |
| Body: Back facing phantom, Headset WH-108     | 0.347                         | 0.231            | 0.566              | 0.536             | 0.166             |
| Body: Display facing phantom, Without Headset | 0.142                         | 0.265            | 0.491              | 0.740             | 0.137             |
| Body: Display facing phantom, Headset WH-108  | 0.385                         | 0.278            | 0.477              | 0.550             | 0.130             |

**Simultaneous transmissions: Combined body SAR results –  
Max + Max combined results**

| Test configuration                               | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|--------------------------------------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                                                  | Antenna 1                      |                                       |                                 |                                |
|                                                  | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN |                                 | LTE850<br>(Band 26)<br>+ WLAN  |
| Body: Back facing phantom,<br>Without Headset    | 0.291                          | 0.403                                 |                                 | 0.294                          |
| Body: Back facing phantom,<br>Headset WH-108     | 0.245                          | 0.367                                 |                                 | 0.372                          |
| Body: Display facing phantom,<br>Without Headset | 0.241                          | 0.378                                 |                                 | <b>0.419</b>                   |
| Body: Display facing phantom,<br>Headset WH-108  | 0.263                          | 0.340                                 |                                 | 0.377                          |
| Test configuration                               | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                                                  | Antenna 1                      |                                       |                                 |                                |
|                                                  | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Body: Back facing phantom,<br>Without Headset    | 0.711                          | 0.526                                 | 0.636                           | 0.777                          |
| Body: Back facing phantom,<br>Headset WH-108     | 0.705                          | 0.480                                 | 0.570                           | 0.782                          |
| Body: Display facing phantom,<br>Without Headset | <b>0.815</b>                   | <b>0.592</b>                          | <b>0.701</b>                    | 0.779                          |
| Body: Display facing phantom,<br>Headset WH-108  | 0.780                          | 0.481                                 | 0.620                           | 0.726                          |

| Test configuration                            | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|-----------------------------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                                               | Antenna 2                     |                           |                          |                          |                                |
|                                               | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Body: Back facing phantom, Without Headset    | 0.758                         | 0.797                     | 0.741                    | 0.659                    | 0.471                          |
| Body: Back facing phantom, Headset WH-108     | 0.596                         | 0.593                     | 0.514                    | 0.511                    | 0.479                          |
| Body: Display facing phantom, Without Headset | 0.640                         | 0.635                     | 0.590                    | 0.563                    | 0.238                          |
| Body: Display facing phantom, Headset WH-108  | 0.501                         | 0.528                     | 0.492                    | 0.471                    | <b>0.486</b>                   |
| Test configuration                            | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                                               | Antenna 2                     |                           |                          |                          |                                |
|                                               | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Body: Back facing phantom, Without Headset    | 0.403                         | 0.622                     | 0.833                    | <b>0.323</b>             |                                |
| Body: Back facing phantom, Headset WH-108     | 0.363                         | 0.698                     | 0.668                    | 0.298                    |                                |
| Body: Display facing phantom, Without Headset | 0.361                         | 0.587                     | <b>0.836</b>             | 0.233                    |                                |
| Body: Display facing phantom, Headset WH-108  | 0.379                         | 0.578                     | 0.651                    | 0.231                    |                                |

### 7.2.1 Combined Body SAR data

**The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.**

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table in Section 1.2.2.

**Simultaneous transmissions: Combined body SAR results –  
SPEAG Combined Multiband algorithm results**

| Test configuration                               | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|--------------------------------------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                                                  | Antenna 1                      |                                       |                                 |                                |
|                                                  | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN |                                 | LTE850<br>(Band 26)<br>+ WLAN  |
| Body: Back facing phantom,<br>Without Headset    | -                              | -                                     |                                 | -                              |
| Body: Back facing phantom,<br>Headset WH-108     | -                              | -                                     |                                 | -                              |
| Body: Display facing phantom,<br>Without Headset | -                              | -                                     |                                 | 0.352                          |
| Body: Display facing phantom,<br>Headset WH-108  | -                              | -                                     |                                 | -                              |
| Test configuration                               | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                                                  | Antenna 1                      |                                       |                                 |                                |
|                                                  | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Body: Back facing phantom,<br>Without Headset    | -                              | -                                     | -                               | -                              |
| Body: Back facing phantom,<br>Headset WH-108     | -                              | -                                     | -                               | -                              |
| Body: Display facing phantom,<br>Without Headset | 0.738                          | 0.520                                 | 0.639                           | -                              |
| Body: Display facing phantom,<br>Headset WH-108  | -                              | -                                     | -                               | -                              |

| Test configuration                            | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|-----------------------------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                                               | Antenna 2                     |                           |                          |                          |                                |
|                                               | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Body: Back facing phantom, Without Headset    | 0.637                         | 0.680                     | 0.632                    | 0.537                    | -                              |
| Body: Back facing phantom, Headset WH-108     | -                             | -                         | -                        | -                        | -                              |
| Body: Display facing phantom, Without Headset | -                             | -                         | -                        | -                        | -                              |
| Body: Display facing phantom, Headset WH-108  | -                             | -                         | -                        | -                        | 0.398                          |
| Test configuration                            | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                                               | Antenna 2                     |                           |                          |                          |                                |
|                                               | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Body: Back facing phantom, Without Headset    | -                             | -                         | -                        | 0.187                    |                                |
| Body: Back facing phantom, Headset WH-108     | -                             | -                         | -                        | -                        |                                |
| Body: Display facing phantom, Without Headset | -                             | -                         | 0.825                    | -                        |                                |
| Body: Display facing phantom, Headset WH-108  | -                             | -                         | -                        | -                        |                                |

### 7.3 Body SAR assessment of Wireless Router mode at 10.0mm separation distance

#### CDMA800 (BC0) Wireless Router SAR results / Antenna 2

| Mode         | Test configuration              | SAR measurement | Measured 1g SAR [W/kg] |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|              |                                 |                 | Ch 1013                | Ch 384    | Ch 777    | Ch 1013                 | Ch 384    | Ch 777    |                                                 |        |
|              |                                 |                 | 824.7 MHz              | 836.5 MHz | 848.3 MHz | 824.7 MHz               | 836.5 MHz | 848.3 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 | 24.4                   |           |           | Scaling factor*         |           |           |                                                 |        |
|              | Conducted Power [dBm]           |                 | 24.1                   | 24.1      | 24.2      | 0.3                     | 0.3       | 0.2       | dB                                              |        |
|              | Time-averaged power [dBm]       |                 | 24.1                   | 24.1      | 24.2      | 1.07                    | 1.07      | 1.05      | Lin                                             |        |
|              | Back facing phantom             | Estimated SAR   | 0.737                  | 0.753     | 0.719     | 0.790                   | 0.807     | 0.753     | 0.02                                            | 27     |
|              |                                 | Full SAR        | -                      | 0.733     | -         | -                       | 0.785     | -         |                                                 |        |
|              | Display facing phantom          | Estimated SAR   | -                      | 0.637     | -         | -                       | 0.683     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Top edge facing phantom         | Estimated SAR   | -                      | 0.013     | -         | -                       | 0.014     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Bottom edge facing phantom      | Estimated SAR   | -                      | 0.367     | -         | -                       | 0.393     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Left edge facing phantom        | Estimated SAR   | -                      | 0.571     | -         | -                       | 0.612     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right edge facing phantom       | Estimated SAR   | -                      | 0.322     | -         | -                       | 0.345     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |

#### CDMA800 (BC10) Wireless Router SAR results / Antenna 2

| Mode         | Test configuration              | SAR measurement | Measured 1g SAR [W/kg] |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|---------------------------------|-----------------|------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|              |                                 |                 | Ch 476                 | Ch 580    | Ch 684    | Ch 476                  | Ch 580    | Ch 684    |                                                 |        |
|              |                                 |                 | 817.9 MHz              | 820.5 MHz | 823.1 MHz | 817.9 MHz               | 820.5 MHz | 823.1 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm] |                 | 24.4                   |           |           | Scaling factor*         |           |           |                                                 |        |
|              | Conducted Power [dBm]           |                 | 24.0                   | 24.0      | 24.0      | 0.4                     | 0.4       | 0.4       | dB                                              |        |
|              | Time-averaged power [dBm]       |                 | 24.0                   | 24.0      | 24.0      | 1.10                    | 1.10      | 1.10      | Lin                                             |        |
|              | Back facing phantom             | Estimated SAR   | 0.743                  | 0.728     | 0.762     | 0.815                   | 0.798     | 0.836     | 0.00                                            | 28     |
|              |                                 | Full SAR        | -                      | -         | 0.764     | -                       | -         | 0.838     |                                                 |        |
|              | Display facing phantom          | Estimated SAR   | -                      | 0.708     | -         | -                       | 0.776     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Top edge facing phantom         | Estimated SAR   | -                      | 0.015     | -         | -                       | 0.016     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Bottom edge facing phantom      | Estimated SAR   | -                      | 0.367     | -         | -                       | 0.402     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Left edge facing phantom        | Estimated SAR   | -                      | 0.692     | -         | -                       | 0.759     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|              | Right edge facing phantom       | Estimated SAR   | -                      | 0.435     | -         | -                       | 0.477     | -         | -                                               | -      |
|              |                                 | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |

### 850MHz Band Wireless Router SAR results / Antenna 2

| Mode        | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|--------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|             |                                    |                 | Ch 128<br>824.2 MHz                              | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz | Ch 128<br>824.2 MHz     | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 32.9                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 32.4                                             | 32.6                | 32.5                | 0.5                     | 0.3                 | 0.4                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 23.4                                             | 23.6                | 23.5                | 1.12                    | 1.07                | 1.10                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 30.4                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 30.2                                             | 30.2                | 30.3                | 0.2                     | 0.2                 | 0.1                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 24.2                                             | 24.2                | 24.3                | 1.05                    | 1.05                | 1.02                | Lin                                             |        |
|             | Back facing phantom                | Estimated SAR   | 0.684                                            | 0.592               | 0.545               | 0.716                   | 0.620               | 0.558               | 0.01                                            | 29     |
|             |                                    | Full SAR        | 0.679                                            | -                   | -                   | 0.711                   | -                   | -                   |                                                 |        |
|             | Display facing phantom             | Estimated SAR   | -                                                | 0.529               | -                   | -                       | 0.554               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Top edge facing phantom            | Estimated SAR   | -                                                | 0.009               | -                   | -                       | 0.010               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Bottom edge facing phantom         | Estimated SAR   | -                                                | 0.389               | -                   | -                       | 0.407               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Left edge facing phantom           | Estimated SAR   | -                                                | 0.504               | -                   | -                       | 0.528               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|             | Right edge facing phantom          | Estimated SAR   | -                                                | 0.312               | -                   | -                       | 0.327               | -                   | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -                   | -                   | -                       | -                   | -                   |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 28.6                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 28.4                                             | 28.4                | 28.4                | 0.2                     | 0.2                 | 0.2                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 24.1                                             | 24.1                | 24.1                | 1.05                    | 1.05                | 1.05                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 27.4                                             |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 27.0                                             | 27.0                | 27.1                | 0.4                     | 0.4                 | 0.3                 | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 24.0                                             | 24.0                | 24.1                | 1.10                    | 1.10                | 1.07                | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

| Mode  | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg] |                      |                      | Reported* 1g SAR [W/kg] |                      |                      | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|-------------------------------------------------|--------|
|       |                                    |                 | Ch 4132<br>826.4 MHz   | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz | Ch 4132<br>826.4 MHz    | Ch 4175<br>835.0 MHz | Ch 4233<br>846.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 | 23.9                   |                      |                      | Scaling factor*         |                      |                      |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 | 23.6                   | 23.6                 | 23.7                 | 0.3                     | 0.3                  | 0.2                  | dB                                              |        |
|       | Time-averaged power [dBm]          |                 | 23.6                   | 23.6                 | 23.7                 | 1.07                    | 1.07                 | 1.05                 | Lin                                             |        |
|       | Back facing phantom                | Estimated SAR   | 0.599                  | 0.593                | 0.592                | 0.642                   | 0.635                | 0.620                | 0.00                                            | 30     |
|       |                                    | Full SAR        | 0.596                  | -                    | -                    | 0.639                   | -                    | -                    |                                                 |        |
|       | Display facing phantom             | Estimated SAR   | -                      | 0.518                | -                    | -                       | 0.555                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Top edge facing phantom            | Estimated SAR   | -                      | 0.011                | -                    | -                       | 0.012                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Bottom edge facing phantom         | Estimated SAR   | -                      | 0.297                | -                    | -                       | 0.318                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Left edge facing phantom           | Estimated SAR   | -                      | 0.440                | -                    | -                       | 0.471                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |
|       | Right edge facing phantom          | Estimated SAR   | -                      | 0.248                | -                    | -                       | 0.266                | -                    | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                    | -                    | -                       | -                    | -                    |                                                 |        |

#### WCDMA850 (Band 5) Wireless Router SAR results / Antenna 1

| Mode  | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg] |           |           | Reported* 1g SAR [W/kg] |           |           | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|------------------------|-----------|-----------|-------------------------|-----------|-----------|-------------------------------------------------|--------|
|       |                                    |                 | Ch 4132                | Ch 4175   | Ch 4233   | Ch 4132                 | Ch 4175   | Ch 4233   |                                                 |        |
|       |                                    |                 | 826.4 MHz              | 835.0 MHz | 846.6 MHz | 826.4 MHz               | 835.0 MHz | 846.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 | 23.9                   |           |           | Scaling factor*         |           |           |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 | 23.3                   | 23.4      | 23.3      | 0.6                     | 0.5       | 0.6       | dB                                              |        |
|       | Time-averaged power [dBm]          |                 | 23.3                   | 23.4      | 23.3      | 1.15                    | 1.12      | 1.15      | Lin                                             |        |
|       | Back facing phantom                | Estimated SAR   | -                      | 0.189     | -         | -                       | 0.212     | -         | -                                               | -      |
|       |                                    | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|       | Display facing phantom             | Estimated SAR   | -                      | 0.214     | -         | -                       | 0.240     | -         | -                                               | -      |
|       |                                    | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|       | Top edge facing phantom            | Estimated SAR   | -                      | 0.009     | -         | -                       | 0.010     | -         | -                                               | -      |
|       |                                    | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|       | Bottom edge facing phantom         | Estimated SAR   | 0.335                  | 0.359     | 0.344     | 0.385                   | 0.403     | 0.396     | 0.02                                            | -      |
|       |                                    | Full SAR        | -                      | 0.343     | -         | -                       | 0.385     | -         |                                                 |        |
|       | Left edge facing phantom           | Estimated SAR   | -                      | 0.024     | -         | -                       | 0.026     | -         | -                                               | -      |
|       |                                    | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |
|       | Right edge facing phantom          | Estimated SAR   | -                      | 0.126     | -         | -                       | 0.141     | -         | -                                               | -      |
|       |                                    | Full SAR        | -                      | -         | -         | -                       | -         | -         |                                                 |        |

### LTE850 (Band 26 Limited) Wireless Router SAR results / Antenna 1

| Mode                         | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|
|                              |                                 |                 | -                                                                                                                  | Ch 26740 819.0 MHz | - | -                       | Ch 26740 819.0 MHz | - |                                                 |        |
| 10MHz Ch BW 1RB 0 % offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.9               | - | -                       | 0.5                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.9               | - | -                       | 1.12               | - | Lin                                             |        |
|                              | Back facing phantom             | Estimated SAR   | -                                                                                                                  | 0.254              | - | -                       | 0.285              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  |                    | - | -                       | -                  | - |                                                 |        |
|                              | Display facing phantom          | Estimated SAR   | -                                                                                                                  | 0.329              | - | -                       | 0.369              | - | 0.01                                            | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.324              | - | -                       | 0.364              | - |                                                 |        |
|                              | Top edge facing phantom         | Estimated SAR   | -                                                                                                                  | 0.012              | - | -                       | 0.013              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Bottom edge facing phantom      | Estimated SAR   | -                                                                                                                  | 0.145              | - | -                       | 0.163              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  |                    | - | -                       | -                  | - |                                                 |        |
|                              | Left edge facing phantom        | Estimated SAR   | -                                                                                                                  | 0.068              | - | -                       | 0.077              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  |                    | - | -                       | -                  | - |                                                 |        |
|                              | Right edge facing phantom       | Estimated SAR   | -                                                                                                                  | 0.036              | - | -                       | 0.040              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
| 10MHz Ch BW 1RB 50 % offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.8               | - | -                       | 0.6                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.8               | - | -                       | 1.15               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 1RB 100 % offset | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 50%RB 0 % offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.1               | - | -                       | 0.3                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.1               | - | -                       | 1.07               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |

(Table continues)

(Table continues)

| 10MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|--------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|-----|---|
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -                                                                                                                  | 0.303 | - | -               | 0.325 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  |       | - | -               | -     | - | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -                                                                                                                  | 0.265 | - | -               | 0.284 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  |       | - | -               | -     | - | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -                                                                                                                  | 0.008 | - | -               | 0.009 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -                                                                                                                  | 0.077 | - | -               | 0.083 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  |       | - | -               | -     | - | -   | - |
| 10MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                            |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>100%<br>RB               | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 22.1  | - | -               | 0.3   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 22.1  | - | -               | 1.07  | - | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -                                                                                                                  | 0.262 | - | -               | 0.280 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Left edge facing phantom        | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |

### LTE850 (Band 26 Limited) Wireless Router SAR results / Antenna 2

| Mode                         | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |   | Reported* 1g SAR [W/kg] |                    |   | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---|-------------------------|--------------------|---|-------------------------------------------------|--------|
|                              |                                 |                 | -                                                                                                                  | Ch 26740 819.0 MHz | - | -                       | Ch 26740 819.0 MHz | - |                                                 |        |
| 10MHz Ch BW 1RB 0 % offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.7               | - | -                       | 0.7                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.7               | - | -                       | 1.17               | - | Lin                                             |        |
|                              | Back facing phantom             | Estimated SAR   | -                                                                                                                  | 0.480              | - | -                       | 0.564              | - | 0.00                                            | 31     |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.480              | - | -                       | 0.564              | - |                                                 |        |
|                              | Display facing phantom          | Estimated SAR   | -                                                                                                                  | 0.288              | - | -                       | 0.338              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Top edge facing phantom         | Estimated SAR   | -                                                                                                                  | 0.012              | - | -                       | 0.014              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.011              | - | -                       | 0.013              | - |                                                 |        |
|                              | Bottom edge facing phantom      | Estimated SAR   | -                                                                                                                  | 0.389              | - | -                       | 0.457              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | 0.376              | - | -                       | 0.442              | - |                                                 |        |
|                              | Left edge facing phantom        | Estimated SAR   | -                                                                                                                  | 0.050              | - | -                       | 0.059              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
|                              | Right edge facing phantom       | Estimated SAR   | -                                                                                                                  | 0.052              | - | -                       | 0.061              | - | -                                               | -      |
|                              |                                 | Full SAR        | -                                                                                                                  | -                  | - | -                       | -                  | - |                                                 |        |
| 10MHz Ch BW 1RB 50 % offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.6               | - | -                       | 0.8                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.6               | - | -                       | 1.20               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 1RB 100 % offset | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 22.5               | - | -                       | 0.9                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 22.5               | - | -                       | 1.23               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |
| 10MHz Ch BW 50%RB 0 % offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |   | Scaling factor*         |                    |   |                                                 |        |
|                              | Conducted Power [dBm]           |                 | -                                                                                                                  | 21.8               | - | -                       | 0.6                | - | dB                                              |        |
|                              | Time-averaged power [dBm]       |                 | -                                                                                                                  | 21.8               | - | -                       | 1.15               | - | Lin                                             |        |
|                              |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |   |                         |                    |   |                                                 |        |

(Table continues)

(Table continues)

| 10MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|--------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|---|-----------------|-------|---|-----|---|
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 21.9  | - | -               | 0.5   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 21.9  | - | -               | 1.12  | - | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -                                                                                                                  | 0.342 | - | -               | 0.384 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -                                                                                                                  | 0.162 | - | -               | 0.182 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -                                                                                                                  | 0.007 | - | -               | 0.008 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -                                                                                                                  | 0.305 | - | -               | 0.342 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
| 10MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Left edge facing phantom        | Estimated SAR | -                                                                                                                  | 0.040 | - | -               | 0.045 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -                                                                                                                  | 0.050 | - | -               | 0.057 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
| 10MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 21.8  | - | -               | 0.6   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 21.8  | - | -               | 1.15  | - | Lin |   |
|                                            |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |   |                 |       |   |     |   |
| 10MHz<br>Ch BW<br>100%<br>RB               | Tuning Target + Tolerance [dBm] |               | 22.4                                                                                                               |       |   | Scaling factor* |       |   |     |   |
|                                            | Conducted Power [dBm]           |               | -                                                                                                                  | 21.9  | - | -               | 0.5   | - | dB  |   |
|                                            | Time-averaged power [dBm]       |               | -                                                                                                                  | 21.9  | - | -               | 1.12  | - | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -                                                                                                                  | 0.345 | - | -               | 0.387 | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Left edge facing phantom        | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -                                                                                                                  | -     | - | -               | -     | - | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | - | -               | -     | - | -   | - |

### LTE850 (Band 26) Wireless Router SAR results / Antenna 1

| Mode                          | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|                               |                                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |
| 15MHz Ch BW 1RB 0 % offset    | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.8                                                                                                               | 23.0               | 22.9               | 0.6                     | 0.4                | 0.5                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.8                                                                                                               | 23.0               | 22.9               | 1.15                    | 1.10               | 1.12               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 1RB 50 % offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.8                                                                                                               | 23.1               | 23.0               | 0.6                     | 0.3                | 0.4                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.8                                                                                                               | 23.1               | 23.0               | 1.15                    | 1.07               | 1.10               | Lin                                             |        |
|                               | Back facing phantom             | Estimated SAR   | -                                                                                                                  | 0.155              | -                  | -                       | 0.166              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Display facing phantom          | Estimated SAR   | -                                                                                                                  | 0.247              | -                  | -                       | 0.265              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | 0.207              | -                  | -                       | 0.222              | -                  | -                                               | -      |
|                               | Top edge facing phantom         | Estimated SAR   | -                                                                                                                  | 0.008              | -                  | -                       | 0.009              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Bottom edge facing phantom      | Estimated SAR   | -                                                                                                                  | 0.075              | -                  | -                       | 0.080              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Left edge facing phantom        | Estimated SAR   | -                                                                                                                  | 0.024              | -                  | -                       | 0.026              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Right edge facing phantom       | Estimated SAR   | -                                                                                                                  | 0.037              | -                  | -                       | 0.040              | -                  | -                                               | -      |
| Full SAR                      |                                 | -               | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               |        |
| 15MHz Ch BW 1RB 100 % offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.7                                                                                                               | 22.8               | 22.6               | 0.7                     | 0.6                | 0.8                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.7                                                                                                               | 22.8               | 22.6               | 1.17                    | 1.15               | 1.20               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 0 % offset  | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.1                                                                                                               | 22.1               | 22.0               | 0.3                     | 0.3                | 0.4                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.1                                                                                                               | 22.1               | 22.0               | 1.07                    | 1.07               | 1.10               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 50 % offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.1                                                                                                               | 22.1               | 22.0               | 0.3                     | 0.3                | 0.4                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.1                                                                                                               | 22.1               | 22.0               | 1.07                    | 1.07               | 1.10               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |

(Table continues)

(Table continues)

| 15MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4  |       |      | Scaling factor* |       |      |     |   |
|--------------------------------------------|---------------------------------|---------------|-------|-------|------|-----------------|-------|------|-----|---|
|                                            | Conducted Power [dBm]           |               | 22.1  | 22.1  | 22.1 | 0.3             | 0.3   | 0.3  | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.1  | 22.1  | 22.1 | 1.07            | 1.07  | 1.07 | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -     | 0.178 | -    | -               | 0.191 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -     | 0.240 | -    | -               | 0.257 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -     | 0.004 | -    | -               | 0.004 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -     | 0.050 | -    | -               | 0.054 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
| 15MHz<br>Ch BW<br>100%<br>RB               | Left edge facing phantom        | Estimated SAR | -     | 0.035 | -    | -               | 0.037 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -     | 0.046 | -    | -               | 0.049 | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Tuning Target + Tolerance [dBm] |               | 22.4  |       |      | Scaling factor* |       |      |     |   |
|                                            | Conducted Power [dBm]           |               | 22.2  | 22.1  | 22.1 | 0.3             | 0.3   | 0.3  | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.2  | 22.1  | 22.1 | 1.07            | 1.07  | 1.07 | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Display facing phantom          | Estimated SAR | 0.295 | -     | -    | 0.309           | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Left edge facing phantom        | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -     | -     | -    | -               | -     | -    | -   | - |
|                                            |                                 | Full SAR      | -     | -     | -    | -               | -     | -    | -   | - |

### LTE850 (Band 26) Wireless Router SAR results / Antenna 2

| Mode                          | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|                               |                                 |                 | Ch 26865 831.5 MHz                                                                                                 | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz | Ch 26865 831.5 MHz      | Ch 26915 836.5 MHz | Ch 26965 841.5 MHz |                                                 |        |
| 15MHz Ch BW 1RB 0 % offset    | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.8               | 22.7               | 0.8                     | 0.6                | 0.7                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.6                                                                                                               | 22.8               | 22.7               | 1.20                    | 1.15               | 1.17               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 1RB 50 % offset   | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.8               | 22.8               | 0.8                     | 0.6                | 0.6                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.6                                                                                                               | 22.8               | 22.8               | 1.20                    | 1.15               | 1.15               | Lin                                             |        |
|                               | Back facing phantom             | Estimated SAR   | -                                                                                                                  | 0.279              | -                  | -                       | 0.320              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Display facing phantom          | Estimated SAR   | -                                                                                                                  | 0.309              | -                  | -                       | 0.355              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Top edge facing phantom         | Estimated SAR   | -                                                                                                                  | 0.010              | -                  | -                       | 0.011              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Bottom edge facing phantom      | Estimated SAR   | -                                                                                                                  | 0.376              | -                  | -                       | 0.432              | -                  | 0.01                                            | 32     |
|                               |                                 | Full SAR        | -                                                                                                                  | 0.364              | -                  | -                       | 0.418              | -                  | -                                               | -      |
|                               | Left edge facing phantom        | Estimated SAR   | -                                                                                                                  | 0.055              | -                  | -                       | 0.063              | -                  | -                                               | -      |
|                               |                                 | Full SAR        | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               | -      |
|                               | Right edge facing phantom       | Estimated SAR   | -                                                                                                                  | 0.063              | -                  | -                       | 0.072              | -                  | -                                               | -      |
| Full SAR                      |                                 | -               | -                                                                                                                  | -                  | -                  | -                       | -                  | -                  | -                                               |        |
| 15MHz Ch BW 1RB 100 % offset  | Tuning Target + Tolerance [dBm] |                 | 23.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.7               | 22.5               | 0.8                     | 0.7                | 0.9                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 22.6                                                                                                               | 22.7               | 22.5               | 1.20                    | 1.17               | 1.23               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 0 % offset  | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |
| 15MHz Ch BW 50%RB 50 % offset | Tuning Target + Tolerance [dBm] |                 | 22.4                                                                                                               |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|                               | Conducted Power [dBm]           |                 | 21.9                                                                                                               | 21.9               | 21.9               | 0.5                     | 0.5                | 0.5                | dB                                              |        |
|                               | Time-averaged power [dBm]       |                 | 21.9                                                                                                               | 21.9               | 21.9               | 1.12                    | 1.12               | 1.12               | Lin                                             |        |
|                               |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                    |                    |                         |                    |                    |                                                 |        |

(Table continues)

(Table continues)

| 15MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target + Tolerance [dBm] |               | 22.4 |       |       | Scaling factor* |       |       |     |   |
|--------------------------------------------|---------------------------------|---------------|------|-------|-------|-----------------|-------|-------|-----|---|
|                                            | Conducted Power [dBm]           |               | 21.9 | 21.9  | 22.0  | 0.5             | 0.5   | 0.4   | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 21.9 | 21.9  | 22.0  | 1.12            | 1.12  | 1.10  | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -    | -     | 0.243 | -               | -     | 0.266 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -    | -     | 0.212 | -               | -     | 0.232 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -    | -     | 0.008 | -               | -     | 0.009 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -    | -     | 0.246 | -               | -     | 0.270 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
| 15MHz<br>Ch BW<br>100%<br>RB               | Left edge facing phantom        | Estimated SAR | -    | -     | 0.038 | -               | -     | 0.042 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -    | -     | 0.028 | -               | -     | 0.030 | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Tuning Target + Tolerance [dBm] |               | 22.4 |       |       | Scaling factor* |       |       |     |   |
|                                            | Conducted Power [dBm]           |               | 22.0 | 22.0  | 21.9  | 0.4             | 0.4   | 0.5   | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.0 | 22.0  | 21.9  | 1.10            | 1.10  | 1.12  | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Display facing phantom          | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | -    | 0.321 | -     | -               | 0.352 | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Left edge facing phantom        | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -    | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -    | -     | -     | -               | -     | -     | -   | - |

### CDMA1900 (BC1) Wireless Router SAR results / Antenna 1

| Mode         | Test configuration                  | SAR measurement | Measured 1g SAR [W/kg] |                      |                        | Reported* 1g SAR [W/kg] |                      |                        | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|--------------|-------------------------------------|-----------------|------------------------|----------------------|------------------------|-------------------------|----------------------|------------------------|-------------------------------------------------|--------|
|              |                                     |                 | Ch 25<br>1851.25 MHz   | Ch 600<br>1880.0 MHz | Ch 1175<br>1908.75 MHz | Ch 25<br>1851.25 MHz    | Ch 600<br>1880.0 MHz | Ch 1175<br>1908.75 MHz |                                                 |        |
| RC3/<br>S055 | Tuning Target + Tolerance [dBm]     |                 | 24.4                   |                      |                        | Scaling factor*         |                      |                        |                                                 |        |
|              | Conducted Power [dBm]               |                 | 23.8                   | 23.8                 | 23.9                   | 0.6                     | 0.6                  | 0.5                    | dB                                              |        |
|              | Time-averaged power [dBm]           |                 | 23.8                   | 23.8                 | 23.9                   | 1.15                    | 1.15                 | 1.12                   | Lin                                             |        |
|              | Back facing phantom                 | Estimated SAR   | 0.882                  | 0.878                | 0.871                  | 1.01                    | 1.01                 | 0.977                  | 0.01                                            | -      |
|              |                                     | Full SAR        | 0.894                  | -                    | -                      | 1.03                    | -                    | -                      |                                                 |        |
|              | Display facing phantom              | Estimated SAR   | 1.01                   | 1.03                 | 1.06                   | 1.16                    | 1.18                 | 1.19                   | 0.04                                            | 33     |
|              |                                     | Full SAR        | -                      | -                    | 1.10                   | -                       | -                    | 1.23                   |                                                 |        |
|              | Top edge facing phantom             | Estimated SAR   | -                      | 0.088                | -                      | -                       | 0.101                | -                      | -                                               | -      |
|              |                                     | Full SAR        | -                      | -                    | -                      | -                       | -                    | -                      |                                                 |        |
|              | Bottom edge facing phantom          | Estimated SAR   | 0.778                  | 0.807                | 0.825                  | 0.893                   | 0.927                | 0.926                  | 0.02                                            | -      |
|              |                                     | Full SAR        | -                      | -                    | 0.807                  | -                       | -                    | 0.905                  |                                                 |        |
|              | Left edge facing phantom            | Estimated SAR   | -                      | 0.208                | -                      | -                       | 0.239                | -                      | -                                               | -      |
|              |                                     | Full SAR        | -                      | -                    | -                      | -                       | -                    | -                      |                                                 |        |
|              | Right edge facing phantom           | Estimated SAR   | -                      | 0.317                | -                      | -                       | 0.364                | -                      | -                                               | -      |
|              |                                     | Full SAR        | -                      | 0.345                | -                      | -                       | 0.396                | -                      |                                                 |        |
|              | Repeated SAR Display facing phantom | Estimated SAR   | -                      | -                    | 0.991                  | -                       | -                    | 1.11                   | 0.01                                            | -      |
|              |                                     | Full SAR        | -                      | -                    | 0.999                  | -                       | -                    | 1.12                   |                                                 |        |

### 1900MHz Band Wireless Router SAR results / Antenna 1

| Mode        | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg]                           |            |            | Reported* 1g SAR [W/kg] |            |            | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------|------------------------------------|-----------------|--------------------------------------------------|------------|------------|-------------------------|------------|------------|-------------------------------------------------|--------|
|             |                                    |                 | Ch 512                                           | Ch 661     | Ch 810     | Ch 512                  | Ch 661     | Ch 810     |                                                 |        |
|             |                                    |                 | 1850.2 MHz                                       | 1880.0 MHz | 1909.8 MHz | 1850.2 MHz              | 1880.0 MHz | 1909.8 MHz |                                                 |        |
| 1-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 29.4                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 28.9                                             | 28.9       | 28.9       | 0.5                     | 0.5        | 0.5        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 19.9                                             | 19.9       | 19.9       | 1.12                    | 1.12       | 1.12       | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |            |            |                         |            |            |                                                 |        |
| 2-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 27.4                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 26.8                                             | 26.9       | 26.9       | 0.6                     | 0.5        | 0.5        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 20.8                                             | 20.9       | 20.9       | 1.15                    | 1.12       | 1.12       | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |            |            |                         |            |            |                                                 |        |
| 3-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 25.6                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 24.9                                             | 25.0       | 25.1       | 0.7                     | 0.6        | 0.5        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 20.6                                             | 20.7       | 20.8       | 1.17                    | 1.15       | 1.12       | Lin                                             |        |
|             |                                    |                 | No testing required for this slot configuration. |            |            |                         |            |            |                                                 |        |
| 4-slot GPRS | Tuning Target + Tolerance [dBm]    |                 | 24.4                                             |            |            | Scaling factor*         |            |            |                                                 |        |
|             | Conducted Slot Average Power [dBm] |                 | 24.1                                             | 24.2       | 24.2       | 0.3                     | 0.2        | 0.2        | dB                                              |        |
|             | Time-averaged power [dBm]          |                 | 21.1                                             | 21.2       | 21.2       | 1.07                    | 1.05       | 1.05       | Lin                                             |        |
|             | Back facing phantom                | Estimated SAR   | -                                                | 0.634      | -          | -                       | 0.664      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Display facing phantom             | Estimated SAR   | 0.777                                            | 0.769      | 0.650      | 0.833                   | 0.805      | 0.681      | 0.01                                            | 34     |
|             |                                    | Full SAR        | 0.797                                            | -          | -          | 0.853                   | -          | -          |                                                 |        |
|             | Top edge facing phantom            | Estimated SAR   | -                                                | 0.047      | -          | -                       | 0.049      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Bottom edge facing phantom         | Estimated SAR   | -                                                | 0.579      | -          | -                       | 0.606      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Left edge facing phantom           | Estimated SAR   | -                                                | 0.145      | -          | -                       | 0.152      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |
|             | Right edge facing phantom          | Estimated SAR   | -                                                | 0.237      | -          | -                       | 0.248      | -          | -                                               | -      |
|             |                                    | Full SAR        | -                                                | -          | -          | -                       | -          | -          |                                                 |        |

(Table continues)

(Table continues)

| Mode  | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg] |                    |                    | Reported* 1g SAR [W/kg] |                    |                    | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|------------------------|--------------------|--------------------|-------------------------|--------------------|--------------------|-------------------------------------------------|--------|
|       |                                    |                 | Ch 9262 1852.4 MHz     | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz | Ch 9262 1852.4 MHz      | Ch 9400 1880.0 MHz | Ch 9538 1907.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 | 20.9                   |                    |                    | Scaling factor*         |                    |                    |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 | 20.7                   | 20.7               | 20.7               | 0.2                     | 0.2                | 0.2                | dB                                              |        |
|       | Time-averaged power [dBm]          |                 | 20.7                   | 20.7               | 20.7               | 1.05                    | 1.05               | 1.05               | Lin                                             |        |
|       | Back facing phantom                | Estimated SAR   | 0.495                  | 0.484              | 0.463              | 0.518                   | 0.507              | 0.485              | 0.00                                            | -      |
|       |                                    | Full SAR        | 0.494                  | -                  | -                  | 0.517                   | -                  | -                  |                                                 |        |
|       | Display facing phantom             | Estimated SAR   | -                      | 0.300              | -                  | -                       | 0.314              | -                  | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|       | Top edge facing phantom            | Estimated SAR   | -                      | 0.039              | -                  | -                       | 0.041              | -                  | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|       | Bottom edge facing phantom         | Estimated SAR   | -                      | 0.454              | -                  | -                       | 0.475              | -                  | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|       | Left edge facing phantom           | Estimated SAR   | -                      | 0.102              | -                  | -                       | 0.107              | -                  | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |
|       | Right edge facing phantom          | Estimated SAR   | -                      | 0.179              | -                  | -                       | 0.187              | -                  | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                  | -                  | -                       | -                  | -                  |                                                 |        |

#### WCDMA1900 Wireless Router SAR results /Antenna 2

| Mode  | Device orientation                 | SAR measurement | Measured 1g SAR [W/kg] |                       |                       | Reported* 1g SAR [W/kg] |                       |                       | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------|------------------------------------|-----------------|------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-------------------------------------------------|--------|
|       |                                    |                 | Ch 9262<br>1852.4 MHz  | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz | Ch 9262<br>1852.4 MHz   | Ch 9400<br>1880.0 MHz | Ch 9538<br>1907.6 MHz |                                                 |        |
| WCDMA | Tuning Target + Tolerance [dBm]    |                 | 20.9                   |                       |                       | Scaling factor*         |                       |                       |                                                 |        |
|       | Conducted Slot Average Power [dBm] |                 | 20.3                   | 20.3                  | 20.3                  | 0.6                     | 0.6                   | 0.6                   | dB                                              |        |
|       | Time-averaged power [dBm]          |                 | 20.3                   | 20.3                  | 20.3                  | 1.15                    | 1.15                  | 1.15                  | Lin                                             |        |
|       | Back facing phantom                | Estimated SAR   | 0.448                  | 0.437                 | 0.426                 | 0.514                   | 0.502                 | 0.489                 | 0.02                                            | 35     |
|       |                                    | Full SAR        | 0.466                  | -                     | -                     | 0.535                   | -                     | -                     |                                                 |        |
|       | Display facing phantom             | Estimated SAR   | -                      | 0.359                 | -                     | -                       | 0.412                 | -                     | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Top edge facing phantom            | Estimated SAR   | -                      | 0.020                 | -                     | -                       | 0.023                 | -                     | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Bottom edge facing phantom         | Estimated SAR   | -                      | 0.283                 | -                     | -                       | 0.325                 | -                     | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Left edge facing phantom           | Estimated SAR   | -                      | 0.212                 | -                     | -                       | 0.243                 | -                     | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |
|       | Right edge facing phantom          | Estimated SAR   | -                      | 0.119                 | -                     | -                       | 0.137                 | -                     | -                                               | -      |
|       |                                    | Full SAR        | -                      | -                     | -                     | -                       | -                     | -                     |                                                 |        |

### LTE1900 (Band 25) Wireless Router SAR results / Antenna 1

| Mode                                | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|-------------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                                     |                                 |                 | Ch 26140 1860.0 MHz                                                                                                | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz<br>Ch BW 1RB<br>0 % offset    | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                     | Conducted Power [dBm]           |                 | 23.8                                                                                                               | 23.2                | 23.1                | 0.1                     | 0.7                 | 0.8                 | dB                                              |        |
|                                     | Time-averaged power [dBm]       |                 | 23.8                                                                                                               | 23.2                | 23.1                | 1.02                    | 1.17                | 1.20                | Lin                                             |        |
|                                     |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz<br>Ch BW 1RB<br>50 % offset   | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                     | Conducted Power [dBm]           |                 | 23.9                                                                                                               | 23.3                | 23.3                | 0.0                     | 0.6                 | 0.6                 | dB                                              |        |
|                                     | Time-averaged power [dBm]       |                 | 23.9                                                                                                               | 23.3                | 23.3                | 1.00                    | 1.15                | 1.15                | Lin                                             |        |
|                                     | Back facing phantom             | Estimated SAR   | 1.02                                                                                                               | 1.01                | 0.987               | 1.02                    | 1.16                | 1.13                | 0.03                                            | -      |
|                                     |                                 | Full SAR        | -                                                                                                                  | 0.979               | -                   | -                       | 1.12                | -                   |                                                 |        |
|                                     | Display facing phantom          | Estimated SAR   | 1.12                                                                                                               | 1.08                | 1.04                | 1.12                    | 1.24                | 1.19                | 0.10                                            | 36     |
|                                     |                                 | Full SAR        | -                                                                                                                  | 1.18                | -                   | -                       | 1.36                | -                   |                                                 |        |
|                                     | Top edge facing phantom         | Estimated SAR   | 0.060                                                                                                              | -                   | -                   | 0.060                   | -                   | -                   | -                                               | -      |
|                                     |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                     | Bottom edge facing phantom      | Estimated SAR   | 1.03                                                                                                               | 1.09                | 1.03                | 1.03                    | 1.25                | 1.18                | 0.01                                            | -      |
|                                     |                                 | Full SAR        | -                                                                                                                  | 1.10                | -                   | -                       | 1.26                | -                   |                                                 |        |
|                                     | Left edge facing phantom        | Estimated SAR   | 0.099                                                                                                              | -                   | -                   | 0.099                   | -                   | -                   | -                                               | -      |
|                                     |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                     | Right edge facing phantom       | Estimated SAR   | 0.382                                                                                                              | -                   | -                   | 0.382                   | -                   | -                   | -                                               | -      |
| Full SAR                            |                                 | 0.383           | -                                                                                                                  | -                   | 0.383               | -                       | -                   |                     |                                                 |        |
| Repetaed SAR Display facing phantom | Estimated SAR                   | -               | 1.15                                                                                                               | -                   | -                   | 1.32                    | -                   | 0.05                |                                                 |        |
|                                     | Full SAR                        | -               | 1.20                                                                                                               | -                   | -                   | 1.34                    | -                   |                     |                                                 |        |
| 20MHz<br>Ch BW 1RB<br>100 % offset  | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                     | Conducted Power [dBm]           |                 | 23.8                                                                                                               | 23.2                | 23.0                | 0.1                     | 0.7                 | 0.9                 | dB                                              |        |
|                                     | Time-averaged power [dBm]       |                 | 23.8                                                                                                               | 23.2                | 23.0                | 1.02                    | 1.17                | 1.23                | Lin                                             |        |
|                                     |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz<br>Ch BW 50%RB<br>0 % offset  | Tuning Target + Tolerance [dBm] |                 | 22.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                     | Conducted Power [dBm]           |                 | 22.9                                                                                                               | 22.7                | 22.8                | 0.0                     | 0.2                 | 0.1                 | dB                                              |        |
|                                     | Time-averaged power [dBm]       |                 | 22.9                                                                                                               | 22.7                | 22.8                | 1.00                    | 1.05                | 1.02                | Lin                                             |        |
|                                     |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |       |       | Scaling factor* |       |       |     |   |
|--------------------------------------------|---------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------|-------|-------|-----------------|-------|-------|-----|---|
|                                            | Conducted Power [dBm]           |               | 22.9                                                                                                               | 22.8  | 22.8  | 0.0             | 0.1   | 0.1   | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.9                                                                                                               | 22.8  | 22.8  | 1.00            | 1.02  | 1.02  | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | 0.982                                                                                                              | 0.976 | 0.933 | 0.982           | 0.999 | 0.955 | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Display facing phantom          | Estimated SAR | 1.10                                                                                                               | 1.03  | 0.982 | 1.10            | 1.05  | 1.01  | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | 0.06                                                                                                               | -     | -     | 0.060           | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | 1.02                                                                                                               | 1.04  | 0.981 | 1.02            | 1.06  | 1.00  | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
| 20MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Left edge facing phantom        | Estimated SAR | 0.095                                                                                                              | -     | -     | 0.095           | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | 0.370                                                                                                              | -     | -     | 0.370           | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
| 20MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |       |       | Scaling factor* |       |       |     |   |
|                                            | Conducted Power [dBm]           |               | 22.8                                                                                                               | 22.8  | 22.8  | 0.1             | 0.1   | 0.1   | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.8                                                                                                               | 22.8  | 22.8  | 1.02            | 1.02  | 1.02  | Lin |   |
|                                            |                                 |               | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |       |       |                 |       |       |     |   |
| 20MHz<br>Ch BW<br>100%<br>RB               | Tuning Target + Tolerance [dBm] |               | 22.9                                                                                                               |       |       | Scaling factor* |       |       |     |   |
|                                            | Conducted Power [dBm]           |               | 22.8                                                                                                               | 22.8  | 22.8  | 0.1             | 0.1   | 0.1   | dB  |   |
|                                            | Time-averaged power [dBm]       |               | 22.8                                                                                                               | 22.8  | 22.8  | 1.02            | 1.02  | 1.02  | Lin |   |
|                                            | Back facing phantom             | Estimated SAR | 0.956                                                                                                              | -     | -     | 0.978           | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Display facing phantom          | Estimated SAR | 1.03                                                                                                               | -     | -     | 1.05            | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Top edge facing phantom         | Estimated SAR | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Bottom edge facing phantom      | Estimated SAR | 0.979                                                                                                              | -     | -     | 1.00            | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Left edge facing phantom        | Estimated SAR | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            | Right edge facing phantom       | Estimated SAR | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |
|                                            |                                 | Full SAR      | -                                                                                                                  | -     | -     | -               | -     | -     | -   | - |

### LTE1900 (Band 25) Wireless Router SAR results / Antenna 2

| Mode                             | Test configuration              | SAR measurement | Measured 1g SAR [W/kg]                                                                                             |                     |                     | Reported* 1g SAR [W/kg] |                     |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------------|---------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|-------------------------|---------------------|---------------------|-------------------------------------------------|--------|
|                                  |                                 |                 | Ch 26140 1860.0 MHz                                                                                                | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz | Ch 26140 1860.0 MHz     | Ch 26365 1882.5 MHz | Ch 26590 1905.0 MHz |                                                 |        |
| 20MHz Ch BW 1RB 0 % offset       | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 23.4                                                                                                               | 23.0                | 23.1                | 0.5                     | 0.9                 | 0.8                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 23.4                                                                                                               | 23.0                | 23.1                | 1.12                    | 1.23                | 1.20                | Lin                                             |        |
|                                  | Back facing phantom             | Estimated SAR   | -                                                                                                                  | -                   | 0.942               | -                       | -                   | 1.13                | 0.02                                            | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | 0.966               | -                       | -                   | 1.16                |                                                 |        |
|                                  | Display facing phantom          | Estimated SAR   | -                                                                                                                  | -                   | 0.776               | -                       | -                   | 0.937               | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Top edge facing phantom         | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Bottom edge facing phantom      | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Left edge facing phantom        | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Right edge facing phantom       | Estimated SAR   | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
| Repetaed SAR Back facing phantom | Estimated SAR                   | -               | -                                                                                                                  | 0.869               | -                   | -                       | 1.05                | 0.01                | -                                               |        |
|                                  | Full SAR                        | -               | -                                                                                                                  | 0.882               | -                   | -                       | 1.06                |                     |                                                 |        |
| 20MHz Ch BW 1RB 50 % offset      | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 23.6                                                                                                               | 23.2                | 23.0                | 0.3                     | 0.7                 | 0.9                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 23.6                                                                                                               | 23.2                | 23.0                | 1.07                    | 1.17                | 1.23                | Lin                                             |        |
|                                  | Back facing phantom             | Estimated SAR   | 0.961                                                                                                              | 0.951               | -                   | 1.03                    | 1.12                | -                   | 0.05                                            | -      |
|                                  |                                 | Full SAR        | 0.910                                                                                                              | -                   | -                   | 0.975                   | -                   | -                   |                                                 |        |
|                                  | Display facing phantom          | Estimated SAR   | 0.940                                                                                                              | 0.805               | -                   | 1.01                    | 0.946               | -                   | 0.02                                            | -      |
|                                  |                                 | Full SAR        | 0.922                                                                                                              | -                   | -                   | 0.988                   | -                   | -                   |                                                 |        |
|                                  | Top edge facing phantom         | Estimated SAR   | 0.040                                                                                                              | -                   | -                   | 0.043                   | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Bottom edge facing phantom      | Estimated SAR   | 0.481                                                                                                              | -                   | -                   | 0.515                   | -                   | -                   | 0.02                                            | -      |
|                                  |                                 | Full SAR        | 0.497                                                                                                              | -                   | -                   | 0.533                   | -                   | -                   |                                                 |        |
|                                  | Left edge facing phantom        | Estimated SAR   | 0.461                                                                                                              | -                   | -                   | 0.494                   | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
|                                  | Right edge facing phantom       | Estimated SAR   | 0.104                                                                                                              | -                   | -                   | 0.111                   | -                   | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                                                                                                                  | -                   | -                   | -                       | -                   | -                   |                                                 |        |
| 20MHz Ch BW 1RB 100 % offset     | Tuning Target + Tolerance [dBm] |                 | 23.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 23.4                                                                                                               | 23.0                | 23.0                | 0.5                     | 0.9                 | 0.9                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 23.4                                                                                                               | 23.0                | 23.0                | 1.12                    | 1.23                | 1.23                | Lin                                             |        |
|                                  |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |
| 20MHz Ch BW 50%RB 0 % offset     | Tuning Target + Tolerance [dBm] |                 | 22.9                                                                                                               |                     |                     | Scaling factor*         |                     |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 22.6                                                                                                               | 22.6                | 22.6                | 0.3                     | 0.3                 | 0.3                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 22.6                                                                                                               | 22.6                | 22.6                | 1.07                    | 1.07                | 1.07                | Lin                                             |        |
|                                  |                                 |                 | No testing required for this CBW/RB/RB offset configuration according to KDB 941225 D05 SAR for LTE Devices v02r02 |                     |                     |                         |                     |                     |                                                 |        |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |
|--------------------------------------------|---------------------------------|---------------|-------|-------|-------|-----------------|-------|-------|------|
|                                            | Conducted Power [dBm]           |               | 22.6  | 22.5  | 22.6  | 0.3             | 0.4   | 0.3   | dB   |
|                                            | Time-averaged power [dBm]       |               | 22.6  | 22.5  | 22.6  | 1.07            | 1.10  | 1.07  | Lin  |
|                                            | Back facing phantom             | Estimated SAR | 0.946 | -     | 0.891 | 1.01            | -     | 0.955 | 0.07 |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Display facing phantom          | Estimated SAR | 0.901 | -     | 0.688 | 0.965           | -     | 0.737 | 0.01 |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Top edge facing phantom         | Estimated SAR | 0.037 | -     | -     | 0.040           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Bottom edge facing phantom      | Estimated SAR | 0.393 | -     | -     | 0.421           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
| 20MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Left edge facing phantom        | Estimated SAR | 0.444 | -     | -     | 0.476           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Right edge facing phantom       | Estimated SAR | 0.102 | -     | -     | 0.109           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |
|                                            | Conducted Power [dBm]           |               | 22.6  | 22.6  | 22.5  | 0.3             | 0.3   | 0.4   | dB   |
|                                            | Time-averaged power [dBm]       |               | 22.6  | 22.6  | 22.5  | 1.07            | 1.07  | 1.10  | Lin  |
|                                            | Back facing phantom             | Estimated SAR | -     | 0.893 | -     | -               | 0.957 | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Display facing phantom          | Estimated SAR | -     | 0.770 | -     | -               | 0.825 | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
| 20MHz<br>Ch BW<br>100%<br>RB               | Top edge facing phantom         | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Bottom edge facing phantom      | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Left edge facing phantom        | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Right edge facing phantom       | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Tuning Target + Tolerance [dBm] |               | 22.9  |       |       | Scaling factor* |       |       |      |
|                                            | Conducted Power [dBm]           |               | 22.6  | 22.6  | 22.6  | 0.3             | 0.3   | 0.3   | dB   |
|                                            | Time-averaged power [dBm]       |               | 22.6  | 22.6  | 22.6  | 1.07            | 1.07  | 1.07  | Lin  |
|                                            | Back facing phantom             | Estimated SAR | 0.884 | -     | -     | 0.947           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Display facing phantom          | Estimated SAR | 0.928 | -     | -     | 0.994           | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Top edge facing phantom         | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Bottom edge facing phantom      | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Left edge facing phantom        | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |
|                                            | Right edge facing phantom       | Estimated SAR | -     | -     | -     | -               | -     | -     | -    |
|                                            |                                 | Full SAR      | -     | -     | -     | -               | -     | -     |      |

### LTE2500 (Band 41) Wireless Router SAR results / Antenna 2

| Mode                                     | Device orientat<br>ion              | SAR measure<br>ment | Measured 1g SAR [W/kg]                                                                                                |                              |                              |                              |                              | Reported* 1g SAR [W/kg]      |                              |                              |                              |                              | Max<br>Deviation<br>(Estimated<br>SAR - Full<br>SAR)<br>[W/kg] | Plot<br># |
|------------------------------------------|-------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|----------------------------------------------------------------|-----------|
|                                          |                                     |                     | Ch<br>39750<br>2506.0<br>MHz                                                                                          | Ch<br>40185<br>2549.5<br>MHz | Ch<br>40620<br>2593.0<br>MHz | Ch<br>41055<br>2636.5<br>MHz | Ch<br>41490<br>2680.0<br>MHz | Ch<br>39750<br>2506.0<br>MHz | Ch<br>40185<br>2549.5<br>MHz | Ch<br>40620<br>2593.0<br>MHz | Ch<br>41055<br>2636.5<br>MHz | Ch<br>41490<br>2680.0<br>MHz |                                                                |           |
| 20MHz<br>Ch BW<br>1RB<br>0 %<br>offset   | Tuning Target +<br>Tolerance [dBm]  |                     | 23.9                                                                                                                  |                              |                              |                              |                              | Scaling factor*              |                              |                              |                              |                              |                                                                |           |
|                                          | Conducted Power<br>[dBm]            |                     | 23.5                                                                                                                  | 23.1                         | 23.1                         | 23.1                         | 23.1                         | 0.4                          | 0.8                          | 0.8                          | 0.8                          | 0.8                          | dB                                                             |           |
|                                          | Time-averaged<br>power [dBm]        |                     | 21.3                                                                                                                  | 20.9                         | 20.9                         | 20.9                         | 20.9                         | 1.10                         | 1.20                         | 1.20                         | 1.20                         | 1.20                         | Lin                                                            |           |
|                                          |                                     |                     | No testing required for this CBW/RB/RB offset configuration<br>according to KDB 941225 D05 SAR for LTE Devices v02r02 |                              |                              |                              |                              |                              |                              |                              |                              |                              |                                                                |           |
| 20MHz<br>Ch BW<br>1RB<br>50 %<br>offset  | Tuning Target +<br>Tolerance [dBm]  |                     | 23.9                                                                                                                  |                              |                              |                              |                              | Scaling factor*              |                              |                              |                              |                              |                                                                |           |
|                                          | Conducted Power<br>[dBm]            |                     | 23.6                                                                                                                  | 23.2                         | 23.1                         | 23.1                         | 23.1                         | 0.3                          | 0.7                          | 0.8                          | 0.8                          | 0.8                          | dB                                                             |           |
|                                          | Time-averaged<br>power [dBm]        |                     | 21.4                                                                                                                  | 21.0                         | 20.9                         | 20.9                         | 20.9                         | 1.07                         | 1.17                         | 1.20                         | 1.20                         | 1.20                         | Lin                                                            |           |
|                                          | Back<br>facing<br>phantom           | Estimated<br>SAR    | 0.249                                                                                                                 | -                            | -                            | -                            | -                            | 0.267                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          | Display<br>facing<br>phantom        | Estimated<br>SAR    | 0.202                                                                                                                 | -                            | -                            | -                            | -                            | 0.216                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          | Top edge<br>facing<br>phantom       | Estimated<br>SAR    | 0.012                                                                                                                 | -                            | -                            | -                            | -                            | 0.013                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          | Bottom<br>edge<br>facing<br>phantom | Estimated<br>SAR    | 0.352                                                                                                                 | -                            | -                            | -                            | -                            | 0.377                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          | Left edge<br>facing<br>phantom      | Estimated<br>SAR    | 0.038                                                                                                                 | -                            | -                            | -                            | -                            | 0.041                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          | Right edge<br>facing<br>phantom     | Estimated<br>SAR    | 0.041                                                                                                                 | -                            | -                            | -                            | -                            | 0.044                        | -                            | -                            | -                            | -                            | -                                                              | -         |
|                                          |                                     | Full SAR            | -                                                                                                                     | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                            | -                                                              | -         |
| 20MHz<br>Ch BW<br>1RB<br>100 %<br>offset | Tuning Target +<br>Tolerance [dBm]  |                     | 23.9                                                                                                                  |                              |                              |                              |                              | Scaling factor*              |                              |                              |                              |                              |                                                                |           |
|                                          | Conducted Power<br>[dBm]            |                     | 23.3                                                                                                                  | 23.1                         | 23.1                         | 23.1                         | 23.2                         | 0.6                          | 0.8                          | 0.8                          | 0.8                          | 0.7                          | dB                                                             |           |
|                                          | Time-averaged<br>power [dBm]        |                     | 21.1                                                                                                                  | 20.9                         | 20.9                         | 20.9                         | 21.0                         | 1.15                         | 1.20                         | 1.20                         | 1.20                         | 1.17                         | Lin                                                            |           |
|                                          |                                     |                     | No testing required for this CBW/RB/RB offset configuration<br>according to KDB 941225 D05 SAR for LTE Devices v02r02 |                              |                              |                              |                              |                              |                              |                              |                              |                              |                                                                |           |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>50%RB<br>0 %<br>offset   | Tuning Target +<br>Tolerance [dBm]                                                                                    |                  | 22.9 |      |      |       |      | Scaling factor* |      |      |       |      |     |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------|------|------|------|-------|------|-----------------|------|------|-------|------|-----|
|                                            | Conducted Power<br>[dBm]                                                                                              |                  | 22.7 | 22.6 | 22.5 | 22.8  | 22.5 | 0.2             | 0.3  | 0.4  | 0.1   | 0.4  | dB  |
|                                            | Time-averaged<br>power [dBm]                                                                                          |                  | 20.5 | 20.4 | 20.3 | 20.6  | 20.3 | 1.05            | 1.07 | 1.10 | 1.02  | 1.10 | Lin |
|                                            | Back<br>facing<br>phantom                                                                                             | Estimated<br>SAR | -    | -    | -    | 0.350 | -    | -               | -    | -    | 0.358 | -    | -   |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                            | Display<br>facing<br>phantom                                                                                          | Estimated<br>SAR | -    | -    | -    | 0.253 | -    | -               | -    | -    | 0.259 | -    | -   |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                            | Top edge<br>facing<br>phantom                                                                                         | Estimated<br>SAR | -    | -    | -    | 0.007 | -    | -               | -    | -    | 0.007 | -    | -   |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                            | Bottom<br>edge<br>facing<br>phantom                                                                                   | Estimated<br>SAR | -    | -    | -    | 0.652 | -    | -               | -    | -    | 0.667 | -    | 37  |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | 0.656 | -    | -               | -    | -    | 0.671 | -    |     |
| 20MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Left edge<br>facing<br>phantom                                                                                        | Estimated<br>SAR | -    | -    | -    | 0.041 | -    | -               | -    | -    | 0.042 | -    | -   |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                                            | Right<br>edge<br>facing<br>phantom                                                                                    | Estimated<br>SAR | -    | -    | -    | 0.027 | -    | -               | -    | -    | 0.027 | -    | -   |
|                                            |                                                                                                                       | Full SAR         | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
| 20MHz<br>Ch BW<br>50%RB<br>50 %<br>offset  | Tuning Target +<br>Tolerance [dBm]                                                                                    |                  | 22.9 |      |      |       |      | Scaling factor* |      |      |       |      |     |
|                                            | Conducted Power<br>[dBm]                                                                                              |                  | 22.7 | 22.6 | 22.6 | 22.8  | 22.5 | 0.2             | 0.3  | 0.3  | 0.1   | 0.4  | dB  |
|                                            | Time-averaged<br>power [dBm]                                                                                          |                  | 20.5 | 20.4 | 20.4 | 20.6  | 20.3 | 1.05            | 1.07 | 1.07 | 1.02  | 1.10 | Lin |
|                                            | No testing required for this CBW/RB/RB offset configuration<br>according to KDB 941225 D05 SAR for LTE Devices v02r02 |                  |      |      |      |       |      |                 |      |      |       |      |     |
| 20MHz<br>Ch BW<br>50%RB<br>100 %<br>offset | Tuning Target +<br>Tolerance [dBm]                                                                                    |                  | 22.9 |      |      |       |      | Scaling factor* |      |      |       |      |     |
|                                            | Conducted Power<br>[dBm]                                                                                              |                  | 22.7 | 22.6 | 22.5 | 22.8  | 22.6 | 0.2             | 0.3  | 0.4  | 0.1   | 0.4  | dB  |
|                                            | Time-averaged<br>power [dBm]                                                                                          |                  | 20.5 | 20.4 | 20.3 | 20.6  | 20.4 | 1.05            | 1.07 | 1.10 | 1.02  | 1.10 | Lin |
|                                            | No testing required for this CBW/RB/RB offset configuration<br>according to KDB 941225 D05 SAR for LTE Devices v02r02 |                  |      |      |      |       |      |                 |      |      |       |      |     |

(Table continues)

(Table continues)

| 20MHz<br>Ch BW<br>100%<br>RB | Tuning Target + Tolerance [dBm] |               | 22.9 |      |      |       |      | Scaling factor* |      |      |       |      |     |
|------------------------------|---------------------------------|---------------|------|------|------|-------|------|-----------------|------|------|-------|------|-----|
|                              | Conducted Power [dBm]           |               | 22.7 | 22.7 | 22.5 | 22.8  | 22.5 | 0.2             | 0.2  | 0.4  | 0.1   | 0.4  | dB  |
|                              | Time-averaged power [dBm]       |               | 20.5 | 20.5 | 20.3 | 20.6  | 20.3 | 1.05            | 1.05 | 1.10 | 1.02  | 1.10 | Lin |
|                              | Back facing phantom             | Estimated SAR | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              | Display facing phantom          | Estimated SAR | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              | Top edge facing phantom         | Estimated SAR | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              | Bottom edge facing phantom      | Estimated SAR | -    | -    | -    | 0.648 | -    | -               | -    | -    | 0.661 | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              | Left edge facing phantom        | Estimated SAR | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              | Right edge facing phantom       | Estimated SAR | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |
|                              |                                 | Full SAR      | -    | -    | -    | -     | -    | -               | -    | -    | -     | -    | -   |

### 2450MHz Wireless Router SAR results

| Mode                             | Test configuration              | SAR measurement | Measured 1g SAR [W/kg] |                    |                     | Reported* 1g SAR [W/kg] |                    |                     | Max Deviation (Estimated SAR - Full SAR) [W/kg] | Plot # |
|----------------------------------|---------------------------------|-----------------|------------------------|--------------------|---------------------|-------------------------|--------------------|---------------------|-------------------------------------------------|--------|
|                                  |                                 |                 | Ch 1<br>2412.0 MHz     | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz | Ch 1<br>2412.0 MHz      | Ch 6<br>2437.0 MHz | Ch 11<br>2462.0 MHz |                                                 |        |
| WLAN<br>b-mode<br>BPSK<br>1 Mbps | Tuning Target + Tolerance [dBm] |                 | 17.5                   |                    |                     | Scaling factor*         |                    |                     |                                                 |        |
|                                  | Conducted Power [dBm]           |                 | 16.8                   | 17.1               | 17.4                | 0.7                     | 0.4                | 0.1                 | dB                                              |        |
|                                  | Time-averaged power [dBm]       |                 | 16.8                   | 17.1               | 17.4                | 1.17                    | 1.10               | 1.02                | Lin                                             |        |
|                                  | Back facing phantom             | Estimated SAR   | 0.255                  | 0.267              | 0.329               | 0.300                   | 0.293              | 0.337               | -                                               | 38     |
|                                  |                                 | Full SAR        | -                      | -                  | 0.335               | -                       | -                  | 0.343               |                                                 |        |
|                                  | Display facing phantom          | Estimated SAR   | -                      | 0.161              | -                   | -                       | 0.177              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Top edge facing phantom         | Estimated SAR   | -                      | 0.130              | -                   | -                       | 0.143              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Bottom edge facing phantom      | Estimated SAR   | -                      | 0.020              | -                   | -                       | 0.022              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Left edge facing phantom        | Estimated SAR   | -                      | 0.039              | -                   | -                       | 0.042              | -                   | -                                               | -      |
|                                  |                                 | Full SAR        | -                      | -                  | -                   | -                       | -                  | -                   |                                                 |        |
|                                  | Right edge facing phantom       | Estimated SAR   | -                      | 0.073              | -                   | -                       | 0.080              | -                   | -                                               | -      |
| Full SAR                         |                                 | -               | -                      | -                  | -                   | -                       | -                  |                     |                                                 |        |

### Simultaneous transmissions: Combined SAR results – Individual band Max results

| Test configuration         | Max. Reported* 1g SAR results |                   |                          |                   |
|----------------------------|-------------------------------|-------------------|--------------------------|-------------------|
|                            | WLAN                          | Antenna 1         |                          |                   |
|                            |                               | WCDMA850 (Band 5) | LTE850 (Band 26 limited) | LTE850 (Band 26)  |
| Back facing phantom        | 0.343                         | 0.212             | 0.325                    | 0.191             |
| Display facing phantom     | 0.177                         | 0.240             | 0.364                    | 0.222             |
| Top edge facing phantom    | 0.143                         | 0.010             | 0.013                    | 0.009             |
| Bottom edge facing phantom | 0.022                         | 0.385             | 0.163                    | 0.080             |
| Left edge facing phantom   | 0.042                         | 0.026             | 0.166                    | 0.037             |
| Right edge facing phantom  | 0.080                         | 0.141             | 0.078                    | 0.049             |
| Test configuration         | Max. Reported* 1g SAR results |                   |                          |                   |
|                            | Antenna 1                     |                   |                          |                   |
|                            | CDMA1900 (BC1)                | 4-slot GPRS1900   | WCDMA1900 (Band 2)       | LTE1900 (Band 25) |
| Back facing phantom        | 1.03                          | 0.664             | 0.517                    | 1.12              |
| Display facing phantom     | 1.23                          | 0.853             | 0.314                    | 1.36              |
| Top edge facing phantom    | 0.101                         | 0.049             | 0.041                    | 0.060             |
| Bottom edge facing phantom | 0.905                         | 0.606             | 0.475                    | 1.26              |
| Left edge facing phantom   | 0.239                         | 0.152             | 0.107                    | 0.099             |
| Right edge facing phantom  | 0.396                         | 0.248             | 0.187                    | 0.383             |

| Test configuration         | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|----------------------------|-------------------------------|------------------|--------------------|-------------------|-------------------|
|                            | WLAN                          | Antenna 2        |                    |                   |                   |
|                            |                               | CDMA800 (BC0)    | CDMA800 (BC10)     | 2-slot GPRS850    | WCDMA850 (Band5)  |
| Back facing phantom        | 0.343                         | 0.785            | 0.838              | 0.711             | 0.639             |
| Display facing phantom     | 0.177                         | 0.683            | 0.776              | 0.554             | 0.555             |
| Top edge facing phantom    | 0.143                         | 0.014            | 0.016              | 0.010             | 0.012             |
| Bottom edge facing phantom | 0.022                         | 0.393            | 0.402              | 0.407             | 0.318             |
| Left edge facing phantom   | 0.042                         | 0.612            | 0.759              | 0.528             | 0.471             |
| Right edge facing phantom  | 0.080                         | 0.345            | 0.477              | 0.327             | 0.266             |
| Test configuration         | Max. Reported* 1g SAR results |                  |                    |                   |                   |
|                            | Antenna 2                     |                  |                    |                   |                   |
|                            | LTE850 (Band26 Limited)       | LTE850 (Band 26) | WCDMA1900 (Band 2) | LTE1900 (Band 25) | LTE2500 (Band 41) |
| Back facing phantom        | 0.564                         | 0.320            | 0.535              | 1.16              | 0.358             |
| Display facing phantom     | 0.338                         | 0.355            | 0.412              | 0.988             | 0.259             |
| Top edge facing phantom    | 0.013                         | 0.011            | 0.023              | 0.043             | 0.013             |
| Bottom edge facing phantom | 0.442                         | 0.418            | 0.325              | 0.533             | 0.671             |
| Left edge facing phantom   | 0.059                         | 0.063            | 0.243              | 0.494             | 0.042             |
| Right edge facing phantom  | 0.061                         | 0.072            | 0.137              | 0.111             | 0.044             |

**Simultaneous transmissions: Combined SAR results – Max + Max combined results**

| Test configuration         | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|----------------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                            | Antenna 1                      |                                       |                                 |                                |
|                            | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN |                                 | LTE850<br>(Band 26)<br>+ WLAN  |
| Back facing phantom        | 0.555                          | 0.668                                 |                                 | 0.534                          |
| Display facing phantom     | 0.417                          | 0.541                                 |                                 | 0.399                          |
| Top edge facing phantom    | 0.153                          | 0.156                                 |                                 | 0.152                          |
| Bottom edge facing phantom | 0.407                          | 0.185                                 |                                 | 0.102                          |
| Left edge facing phantom   | 0.068                          | 0.208                                 |                                 | 0.079                          |
| Right edge facing phantom  | 0.221                          | 0.158                                 |                                 | 0.129                          |
| Test configuration         | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                            | Antenna 1                      |                                       |                                 |                                |
|                            | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Back facing phantom        | 1.37                           | 1.01                                  | 0.860                           | 1.46                           |
| Display facing phantom     | 1.41                           | 1.03                                  | 0.491                           | 1.54                           |
| Top edge facing phantom    | 0.244                          | 0.192                                 | 0.184                           | 0.203                          |
| Bottom edge facing phantom | 0.927                          | 0.628                                 | 0.497                           | 1.28                           |
| Left edge facing phantom   | 0.281                          | 0.194                                 | 0.149                           | 0.141                          |
| Right edge facing phantom  | 0.476                          | 0.328                                 | 0.267                           | 0.463                          |

| Test configuration         | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|----------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                            | Antenna 2                     |                           |                          |                          |                                |
|                            | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Back facing phantom        | 1.13                          | 1.18                      | 1.05                     | 0.982                    | 0.907                          |
| Display facing phantom     | 0.860                         | 0.953                     | 0.731                    | 0.732                    | 0.515                          |
| Top edge facing phantom    | 0.157                         | 0.159                     | 0.153                    | 0.155                    | 0.156                          |
| Bottom edge facing phantom | 0.415                         | 0.424                     | 0.429                    | 0.340                    | 0.464                          |
| Left edge facing phantom   | 0.654                         | 0.801                     | 0.570                    | 0.513                    | 0.101                          |
| Right edge facing phantom  | 0.425                         | 0.557                     | 0.407                    | 0.346                    | 0.141                          |
| Test configuration         | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                            | Antenna 2                     |                           |                          |                          |                                |
|                            | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Back facing phantom        | 0.663                         | 0.878                     | 1.50                     | 0.701                    |                                |
| Display facing phantom     | 0.532                         | 0.589                     | 1.17                     | 0.436                    |                                |
| Top edge facing phantom    | 0.154                         | 0.166                     | 0.186                    | 0.156                    |                                |
| Bottom edge facing phantom | 0.440                         | 0.347                     | 0.555                    | 0.693                    |                                |
| Left edge facing phantom   | 0.105                         | 0.285                     | 0.536                    | 0.084                    |                                |
| Right edge facing phantom  | 0.152                         | 0.217                     | 0.191                    | 0.124                    |                                |

### 7.3.1 Combined Body SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

**Simultaneous transmissions: Combined SAR results –  
SPEAG Combined Multiband algorithm results**

| Test configuration         | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|----------------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|
|                            | Antenna 1                      |                                       |                                 |                                |
|                            | WCDMA850<br>(Band 5)<br>+ WLAN | LTE850<br>(Band 26 Limited)<br>+ WLAN |                                 | LTE850<br>(Band 26)<br>+ WLAN  |
| Back facing phantom        | -                              | -                                     |                                 | -                              |
| Display facing phantom     | -                              | -                                     |                                 | -                              |
| Top edge facing phantom    | -                              | -                                     |                                 | -                              |
| Bottom edge facing phantom | -                              | -                                     |                                 | -                              |
| Left edge facing phantom   | -                              | -                                     |                                 | -                              |
| Right edge facing phantom  | -                              | -                                     |                                 | -                              |
| Test configuration         | Max. Reported* 1g SAR results  |                                       |                                 |                                |
|                            | Antenna 1                      |                                       |                                 |                                |
|                            | CDMA1900<br>(BC1)<br>+ WLAN    | 4-slot GPRS<br>1900<br>+ WLAN         | WCDMA1900<br>(Band 2)<br>+ WLAN | LTE1900<br>(Band 25)<br>+ WLAN |
| Back facing phantom        | -                              | -                                     | -                               | -                              |
| Display facing phantom     | 1.23                           | 0.871                                 | -                               | 1.28                           |
| Top edge facing phantom    | -                              | -                                     | -                               | -                              |
| Bottom edge facing phantom | -                              | -                                     | -                               | -                              |
| Left edge facing phantom   | -                              | -                                     | -                               | -                              |
| Right edge facing phantom  | -                              | -                                     | -                               | -                              |

| Test configuration         | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|----------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------|
|                            | Antenna 2                     |                           |                          |                          |                                |
|                            | CDMA800 (BC0) + WLAN          | CDMA800 (BC10) + WLAN     | 2-slot GPRS 850 + WLAN   | WCDMA850 (Band5) + WLAN  | LTE850 (Band26 Limited) + WLAN |
| Back facing phantom        | 0.873                         | 0.906                     | 0.789                    | 0.711                    | 0.649                          |
| Display facing phantom     | -                             | -                         | -                        | -                        | -                              |
| Top edge facing phantom    | -                             | -                         | -                        | -                        | -                              |
| Bottom edge facing phantom | -                             | -                         | -                        | -                        | -                              |
| Left edge facing phantom   | -                             | -                         | -                        | -                        | -                              |
| Right edge facing phantom  | -                             | -                         | -                        | -                        | -                              |
| Test configuration         | Max. Reported* 1g SAR results |                           |                          |                          |                                |
|                            | Antenna 2                     |                           |                          |                          |                                |
|                            | LTE850 (Band 26) + WLAN       | WCDMA1900 (Band 2) + WLAN | LTE1900 (Band 25) + WLAN | LTE2500 (Band 41) + WLAN |                                |
| Back facing phantom        | 0.401                         | 0.560                     | -                        | -                        |                                |
| Display facing phantom     | -                             | -                         | -                        | -                        |                                |
| Top edge facing phantom    | -                             | -                         | -                        | -                        |                                |
| Bottom edge facing phantom | -                             | -                         | -                        | 0.686                    |                                |
| Left edge facing phantom   | -                             | -                         | -                        | -                        |                                |
| Right edge facing phantom  | -                             | -                         | -                        | -                        |                                |

Some of the Combined SAR values in the above table are less than the maximum SAR values for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In these cases, the maximum SAR values given for the combined Modes in the Summary table in Section 1.2 are those for the individual cellular band.

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Plots of the Measurement scans are given in Appendix B.