

HAC RF Emissions Test Report

Test report no.:	RF_RM-1078_01	Date of report:	2014-08-28
Template version:	12.2	Number of pages:	17
Testing laboratory:	TCC Microsoft Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Microsoft Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
Responsible test engineer:	Juha-Matti Varjonen	Product contact person:	Hu Dongji
Measurements made by:	Sami Savela		
Tested devices:	RM-1078		
FCC ID:	QTLRM-1078	IC:	-
Supplement reports:	T-Coil_RM-1078_02, HAC_Photo_RM-1078_03		
Testing has been carried out in accordance with:	ANSI C63.19-2011 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

For the contents:

CONTENTS

1. SUMMARY OF HAC RF EMISSION TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 <i>Electric field measurements</i>	3
1.2.2 <i>Overall RF emissions category of the tested device</i>	4
1.2.3 <i>Maximum Drift</i>	4
1.2.4 <i>Measurement Uncertainty</i>	4
2. DESCRIPTION OF THE DEVICE UNDER TEST	5
2.1 PICTURE OF DEVICE	6
3. TEST CONDITIONS	7
3.1 TEMPERATURE AND HUMIDITY	7
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER.....	7
4. DESCRIPTION OF THE TEST EQUIPMENT	8
4.1 MEASUREMENT SYSTEM AND COMPONENTS	8
4.1.1 <i>Isotropic E-field probe ER3DV6</i>	9
4.1.2 <i>Device Holder</i>	9
4.2 VALIDATION OF THE SYSTEM.....	10
5. DESCRIPTION OF THE TEST PROCEDURE	11
5.1 TEST ARCH AND DEVICE HOLDER	11
5.2 TEST POSITIONS.....	11
5.2.1 <i>Scan area centered at the acoustic output</i>	11
5.3 SCAN PROCEDURES.....	12
5.4 MODULATION INTERFERENCE FACTOR	12
5.5 SUB-GRID EXCLUSION.....	13
5.6 CATEGORY LIMITS.....	13
6. LOW-POWER EXEMPTION	14
7. MEASUREMENT UNCERTAINTY	15
8. RESULTS	16
APPENDIX A: SYSTEM VALIDATION SCANS	
APPENDIX B: MEASUREMENT SCANS	
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS	
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS	

1. SUMMARY OF HAC RF EMISSION TEST REPORT

1.1 Test Details

Period of test	2014-08-21 to 2014-08-22
SN, HW, SW and DUT numbers of tested device	SN: 355129/06/000197/9, HW: 0101, SW: 02034.0000.14284.07001, DUT: 18622
Batteries used in testing	BL-5H, DUT: 18621, 18620
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured HAC RF emissions values and categories for electric and magnetic fields are given in section 1.2.1 and 1.2.2 respectively.

1.2.1 Electric field measurements

Mode	Ch / Freq [MHz]	Conducted power	Limit of E-field max. value in category M3 [dB V/m]	Maximum E-field value after exclusion [dB V/m]	Category
GSM850	190 / 836.6	32.7 dBm	40 - 45	14.70	M4
CDMA800 (BC10)	684 / 823.1	24.4 dBm	40 - 45	32.13	M4
CDMA850 (BC0)	1013 / 824.7	24.4 dBm	40 - 45	32.29	M4
GSM1900	661 / 1880.0	29.2 dBm	30 - 35	30.95	M3
CDMA1900 (BC1)	1175 / 1908.75	24.1 dBm	30 - 35	24.91	M4

1.2.2 Overall RF emissions category of the tested device

Mode	E-field Category	Pass / Fail
GSM850	M4	Pass
CDMA800 (BC10)	M4	Pass
CDMA850 (BC0)	M4	Pass
GSM1900	M3	Pass
CDMA1900 (BC1)	M4	Pass
Final Category	M3	Pass

1.2.3 Maximum Drift

Maximum drift during measurements	0.16 dB
-----------------------------------	---------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%, E-field	16.3 %
---	--------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Air-interface	Band (MHz)	Type	C63.19/ tested	Simultaneous Transmissions	Reduced power	Voice Over Digital Transport OTT Capability	HAC report number
GSM	850	VO	Yes	Yes BT, WLAN	N/A	NA	RF_RM-1078_01
	1900				N/A	NA	RF_RM-1078_01
	GPRS/EDGE	DT	NA	Yes BT, WLAN	N/A	YES*	-
WCDMA	850 1900	V/D	Yes**	Yes BT, WLAN	N/A	YES	RF_RM-1078_01
CDMA	800 (BC10) 800 (BC0) 1900 (BC1)	V/D	Yes	Yes BT, WLAN	N/A	YES	
LTE	850 (Band 26) 1900 (Band 25) 2500 (Band 41)	DT	NA	Yes BT, WLAN	N/A	YES*	RF_RM-1078_01
BT	2450	DT	NA	Yes GSM, GPRS/EDGE, CDMA, WCDMA, LTE	N/A	YES*	-
WLAN	2450	DT	NA	Yes GSM, GPRS/EDGE, CDMA, WCDMA, LTE	N/A	YES*	-

VO Voice CMRS/PSTN Service Only

V/D Voice CMRS/PSTN and Data Service

DT Digital Transport

*supports only non CMRS voice (OTT).

**RF Emission testing was not required for WCDMA air-interface because of Low-power exemption.

HAC rating was evaluated for voice mode only in GSM and CDMA air interface in this report.

Outside of USA the transmitter of the device is capable of operating also in 900MHz, 1800MHz and 2100MHz bands, which are not part of this filing.

Two antennas are used for transmission of some of the cellular bands in diversity-Tx mode. In this mode the antennas can not transmit at the same time. See table below for applicable antennas in each transmission band and mode. A separate single antenna is used for WLAN. All antennas are fully and separately HAC tested for individual transmission.

	Tx Antennas	
	Antenna 1	Antenna 2
GSM/GPRS/EGPRS850	-	✓
GSM/GPRS/EGPRS1900	✓	-
WCDMA850 (Band 5)	✓	✓
WCDMA1900 (Band 2)	✓	✓
CDMA800 (BC10)	-	✓
CDMA850 (BC0)	-	✓
CDMA1900 (BC1)	✓	-
LTE850 (Band 26)	✓	✓
LTE1900 (Band 25)	✓	✓
LTE2500 (Band 41)	-	✓

2.1 Picture of Device

See separate report HAC_Photo_RM-1078_03.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature [°C]:	21.0 to 23.0
Ambient humidity [RH %]:	30 to 60

3.2 Test Signal, Frequencies, and Output Power

The transmitter of the device was put into operation by using a call tester. Communications between the device and the call tester were established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

CDMA was tested in RC1/S03 (1/8th Rate, microphone muted) mode. CDMA modes RC1/S02 (Full Frame), RC3/S055 (Full Frame) were not tested because of Low-power exemption.

The measurements were performed on lowest, middle and highest channels.

The conducted output power of the device was measured by a separate test laboratory on the same unit as used for HAC testing. The results are given in the HAC result tables.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement system and components

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 4	555	12 months	2015-05
E-field Probe ER3DV6	2333	12 months	2015-05
Dipole Validation Kit, CD835V3	1064	24 months	2015-06
Dipole Validation Kit, CD1880V3	1052	24 months	2015-06
DASY52 software	Version 52.8	-	-

Additional test equipment used in testing and validation:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SME 06	836407/007	12 months	2014-09
Amplifier	ZHL-42	854105	-	-
Power Meter	NRVD	840297/032	12 months	2014-09
Power Sensor	NRV-Z53	848532/001	12 months	2014-09
Call Tester	CMU-200	101111	-	-

4.1.1 Isotropic E-field probe ER3DV6

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Frequency	In air 100 MHz to >6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 8 mm
Application	Distance from probe tip to nearest point of dipole: 1.25 mm General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

4.1.2 Device Holder

The Device Holder and Test Arch are manufactured by Speag (www.speag.com). Test arch is used for all tests i.e. for both validation testing and device testing. The holder and test arch conforms to the requirements of ANSI C63.19.

The SPEAG device holder (see Section 5.1) was used to position the test device in all tests.

4.2 Validation of the System

The manufacturer calibrates the probes annually. Validation measurements are made regularly using the dipole validation kit. The power level used by manufacturer in dipole calibration is supplied to the dipole antenna. The antenna is scanned at 15mm distance between top surface of the dipole and calibration point of the probe.

System Validation, E-field

f [MHz]	Dipole SN	Description	E-field [V/m]
835	1064	Reference result $\pm 10\%$ window	108.0 97.2 – 118.8
		2014-08-21	104.6
1880	1052	Reference result $\pm 10\%$ window	93.33 84.0 – 102.7
		2014-08-21	91.63

Plots of the system validation scans are given in Appendix A.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Arch and Device Holder

The test device was placed in the Device Holder (illustrated below) that is supplied by SPEAG. Using this positioner the tested device is positioned under Test Arch.



Device holder and Test Arch supplied by SPEAG

5.2 Test Positions

5.2.1 Scan area centered at the acoustic output

The device was positioned such that Device Reference plane was touching the bottom of the Test Arch. The scan is centered at the acoustic output by aligning the acoustic output with the intersection of the Test Arch's middle bar and dielectric wire.

5.3 Scan Procedures

Near field scans of 5cm x 5cm were used for determination of the field distribution. Measurement plane distance from WD reference plane is 15mm. Scans were performed for E-field using appropriate probe. DASY software divides detected values into 3 x 3 sub grids as described in the C63.19 standard.

5.4 Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF) which replaces the need for the Articulation Weighting Factor (AWF) during the evaluation and is applicable to any modulation scheme.

The Modulation Interference Factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference Potential (RFAIP, in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission slots and repetition rates of few 100 Hz have high MIF values and give similar classification as ANSI C63.19-2007.

DASY52 is using the indirect measurement method according to ANSI C63.19-2011 and near field probe read the averaged E-field. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading.

DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined numerically. It allows a precise scaling and is therefore automatically applied. The following table lists the MIF values evaluated by SPEAG and the detailed parameters for E-field probe can be found in the probe calibration report in the appendix C.

UID	UID Version Date	Communication system	MIF (dB)
10021-DAB	2014-02-12	GSM-FDD (TDMA, GMSK)	3.63
10011-CAB	2014-02-12	UMTS-FDD (WCDMA)	-27.23
10295-AAB	2014-02-12	CDMA2000 RC1/S03 (1/8th Rate)	3.26
10039-CAB	2014-02-12	CDMA2000 RC1/S02 (Full Frame)	-19.77
10291-AAB	2014-02-12	CDMA2000 RC3/S055 (Full Frame)	-19.70

The MIF measurement uncertainty is estimated by SPEAG:

MIF (dB)	MIF Measurement Uncertainty (dB)
-7 to +5	0.2
-13 to +11	0.5
> -20	1.0

5.5 Sub-grid Exclusion

The measurement grid defined in C63.19 consists of 9 evenly sized blocks, which are used to define permissible exclusion areas. For E-field measurements three contiguous blocks may be excluded from the measurements except the center block may never be excluded.

5.6 Category Limits

From remaining maximum values after exclusion process, Hearing Aid M-category is defined according to the category limits of C63.19 – 2011.

Category	Limits for E-Field Emissions	
	E-field <960 MHz [dB V/m]	E-field >960 MHz [dB V/m]
M1	50 – 55	40 – 45
M2	45 – 50	35 – 40
M3	40 – 45	30 – 35
M4	< 40	< 30

6. LOW-POWER EXEMPTION

An RF air interface technology of a device can be exempt from testing when its average antenna input power added to its MIF is ≤ 17 dBm.

Air-interface	Power Tuning Target (dBm)	Upper limit of Power Tuning Tolerance (dBm)	MIF (dB)	Upper limit of Power Tuning Tolerance + MIF (dBm)	HAC tested
GSM850	32.5	32.9	3.63	36.53	Yes
WCDMA850	23.5	23.9	-27.23	-3.33	No
CDMA850 (BC0) RC1/S03 (1/8th Rate)	24.0	24.4	3.26	27.66	Yes
CDMA850 (BC0) RC1/S02 (Full Frame)	24.0	24.4	-19.77	4.63	No
CDMA850 (BC0) RC3/S055 (Full Frame)	24.0	24.4	-19.70	4.70	No
CDMA800 (BC10) RC1/S03 (1/8th Rate)	24.0	24.4	3.26	27.66	Yes
CDMA800 (BC10) RC1/S02 (Full Frame)	24.0	24.4	-19.77	4.63	No
CDMA800 (BC10) RC3/S055 (Full Frame)	24.0	24.4	-19.70	4.70	No
GSM1900	29.0	29.4	3.63	30.03	Yes
WCDMA1900	23.5	23.9	-27.23	-3.33	No
CDMA1900 (BC1) RC1/S03 (1/8th Rate)	24.0	24.4	3.26	27.66	Yes
CDMA1900 (BC1) RC3/S055 (Full Frame)	24.0	24.4	-19.77	4.63	No
CDMA1900 (BC1) RC3/S055 (Full Frame)	24.0	24.4	-19.70	4.70	No

7. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Tolerance ±%	Prob. Dist.	Div.	ci E	ci H	Standard Uncertainty ±%, E
MEASUREMENT SYSTEM						
Probe Calibration	5.1	N	1	1	1	5.1
Axial Isotropy	4.7	R	√3	1	1	2.7
Sensor Displacement	16.5	R	√3	1	0.145	9.5
Boundary Effects	2.4	R	√3	1	1	1.4
Phantom Boundary Effect	7.2	R	√3	1	0	4.1
Linearity	4.7	R	√3	1	1	2.7
Scaling with PMR calibration	10.0	R	√3	1	1	5.8
System Detection Limit	1.0	R	√3	1	1	0.6
Readout Electronics	0.3	N	1	1	1	0.3
Response Time	0.8	R	√3	1	1	0.5
Integration Time	2.6	R	√3	1	1	1.5
RF Ambient Conditions	3.0	R	√3	1	1	1.7
RF Reflections	12.0	R	√3	1	1	6.9
Probe Positioner	1.2	R	√3	1	0.67	0.7
Probe Positioning	4.7	R	√3	1	0.67	2.7
Extrapolation and Interpolation	1.0	R	√3	1	1	0.6
TEST SAMPLE RELATED						
Device Positioning Vertical	4.7	R	√3	1	0.67	2.7
Device Positioning Lateral	1.0	R	√3	1	1	0.6
Device Holder and Phantom	2.4	R	√3	1	1	1.4
Power Drift	5.0	R	√3	1	1	2.9
PHANTOM AND SETUP RELATED						
Phantom Thickness	2.4	R	√3	1	0.67	1.4
Combined Standard Uncertainty						16.3
Expanded Uncertainty on Power						32.6
Expanded Uncertainty on Field						16.3

8. RESULTS

The calculated maximum field values for the test device are tabulated below:

GSM850, RF emissions results

Mode	Test configuration	Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM850	Conducted Power	32.7 dBm	32.7 dBm	32.7 dBm
	E-field [dB V/m]	14.21	14.70	12.73
	Category	M4	M4	M4

CDMA800 (BC10), RF emissions results

Mode	Test configuration	CH 476 817.9 MHz	CH 580 820.5 MHz	CH 684 823.1 MHz
CDMA800 (BC10)	Conducted Power	24.1 dBm	24.1 dBm	24.4 dBm
	E-field [dB V/m]	31.53	31.46	32.13
	Category	M4	M4	M4

CDMA850 (BC0), RF emissions results

Mode	Test configuration	Ch 1013 824.7 MHz	Ch 384 836.52 MHz	Ch 777 848.31 MHz
CDMA850 (BC0)	Conducted Power	24.4 dBm	24.0 dBm	24.3 dBm
	E-field [dB V/m]	32.29	29.88	30.94
	Category	M4	M4	M4

GSM1900, RF emissions results

Mode	Test configuration	Ch 512 1850.2MHz	Ch 661 1880.0MHz	Ch 810 1909.8MHz
GSM1900	Conducted Power	29.2 dBm	29.2 dBm	29.2 dBm
	E-field [dB V/m]	30.77	30.95	30.42
	Category	M3	M3	M3

CDMA1900 (BC1), RF emissions results

Mode	Test configuration	Ch 25 1851.25 MHz	Ch 600 1880.0 MHz	Ch 1175 1908.75 MHz
CDMA1900 (BC1)	Conducted Power	24.0 dBm	24.0 dBm	24.1 dBm
	E-field [dB V/m]	23.19	24.05	24.91
	Category	M4	M4	M4

Plots of the measurement scans are shown in **Appendix B**. Excluded cells are colored orange.

APPENDIX A: SYSTEM VALIDATION SCANS

Date/Time: 2014-08-21 11:05:10


Test Laboratory: TCC Microsoft
Type: CD835V3; Serial: 1064

Communication System: CW
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Air
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 835MHz/E Scan - measurement distance from the probe sensor center to CD835 Dipole = 15mm/Hearing Aid Compatibility Test (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 119.0 V/m; Power Drift = 0.02 dB
PMR not calibrated. PMF = 1.000 is applied.
E-field emissions = 104.6 V/m

Grid 1 M4 97.42 V/m	Grid 2 M4 101.2 V/m	Grid 3 M4 100.5 V/m
Grid 4 M4 60.30 V/m	Grid 5 M4 61.70 V/m	Grid 6 M4 61.00 V/m
Grid 7 M4 102.7 V/m	Grid 8 M4 104.6 V/m	Grid 9 M4 103.2 V/m

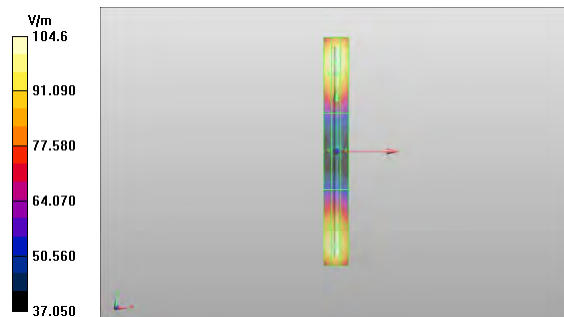

Date/Time: 2014-08-21 12:16:50


Test Laboratory: TCC Microsoft
Type: CD1880V3; Serial: 1052

Communication System: CW
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 1880MHz/E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 141.3 V/m; Power Drift = 0.01 dB
PMR not calibrated. PMF = 1.000 is applied.
E-field emissions = 91.63 V/m

Grid 1 M3 84.12 V/m	Grid 2 M3 85.59 V/m	Grid 3 M3 84.54 V/m
Grid 4 M3 71.30 V/m	Grid 5 M3 73.00 V/m	Grid 6 M3 72.74 V/m
Grid 7 M3 89.54 V/m	Grid 8 M3 91.63 V/m	Grid 9 M3 90.46 V/m

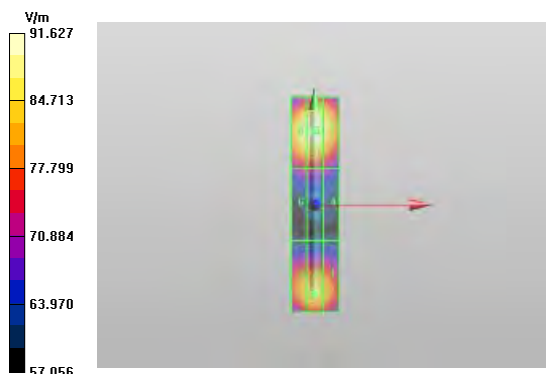

APPENDIX B: MEASUREMENT SCANS

Date/Time: 2014-08-22 8:49:27

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 824.2 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM850 - Low/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 3.183 V/m; Power Drift = 0.14 dB
Applied MIF = 3.63 dB
RF audio interference level = 14.21 dBV/m
Emission category: M4

Grid 1 M4 14.47 dBV/m	Grid 2 M4 12.85 dBV/m	Grid 3 M4 11.72 dBV/m
Grid 4 M4 14.46 dBV/m	Grid 5 M4 13.73 dBV/m	Grid 6 M4 12.92 dBV/m
Grid 7 M4 14.61 dBV/m	Grid 8 M4 14.21 dBV/m	Grid 9 M4 12.85 dBV/m

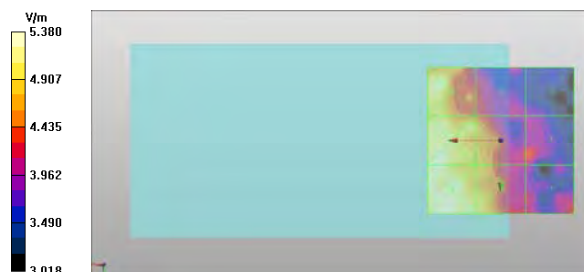

Date/Time: 2014-08-22 8:22:11

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 836.6 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM850 - Middle/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.497 V/m; Power Drift = -0.14 dB
Applied MIF = 3.63 dB
RF audio interference level = 14.70 dBV/m
Emission category: M4

Grid 1 M4 16.85 dBV/m	Grid 2 M4 13.82 dBV/m	Grid 3 M4 13.55 dBV/m
Grid 4 M4 15.17 dBV/m	Grid 5 M4 14.7 dBV/m	Grid 6 M4 13.72 dBV/m
Grid 7 M4 14.89 dBV/m	Grid 8 M4 14.52 dBV/m	Grid 9 M4 14.24 dBV/m

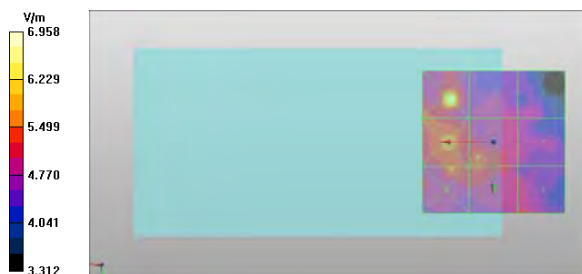

Date/Time: 2014-08-22 9:15:22

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 848.8 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM850 - High/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 2.691 V/m; Power Drift = -0.16 dB
Applied MIF = 3.63 dB
RF audio interference level = 12.73 dBV/m
Emission category: M4

Grid 1 M4 15.23 dBV/m	Grid 2 M4 12.73 dBV/m	Grid 3 M4 12.02 dBV/m
Grid 4 M4 13.82 dBV/m	Grid 5 M4 12.34 dBV/m	Grid 6 M4 11.53 dBV/m
Grid 7 M4 13.85 dBV/m	Grid 8 M4 12.23 dBV/m	Grid 9 M4 11.29 dBV/m

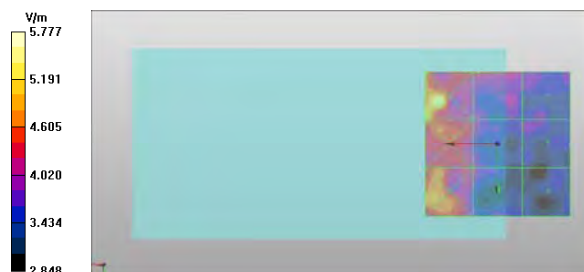

Date/Time: 2014-08-22 10:26:37

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 817.9 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA800 (BC10) Low/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 30.13 V/m; Power Drift = -0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 31.53 dBV/m
Emission category: M4

Grid 1 M4 29.9 dBV/m	Grid 2 M4 31.37 dBV/m	Grid 3 M4 30.37 dBV/m
Grid 4 M4 30.97 dBV/m	Grid 5 M4 31.53 dBV/m	Grid 6 M4 31.14 dBV/m
Grid 7 M4 31.08 dBV/m	Grid 8 M4 31.55 dBV/m	Grid 9 M4 31.1 dBV/m

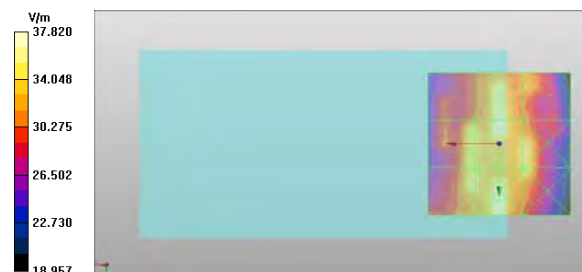

Date/Time: 2014-08-22 10:17:48

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 820.5 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA800 (BC10) Middle/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 33.67 V/m; Power Drift = -0.12 dB
Applied MIF = 3.26 dB
RF audio interference level = 31.46 dBV/m
Emission category: M4

Grid 1 M4 29.99 dBV/m	Grid 2 M4 31.31 dBV/m	Grid 3 M4 30.13 dBV/m
Grid 4 M4 30.83 dBV/m	Grid 5 M4 31.46 dBV/m	Grid 6 M4 30.31 dBV/m
Grid 7 M4 30.71 dBV/m	Grid 8 M4 31.45 dBV/m	Grid 9 M4 30.86 dBV/m

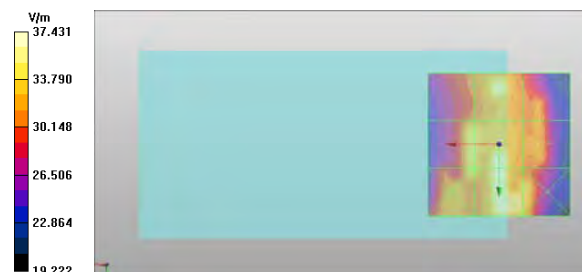

Date/Time: 2014-08-22 10:34:54

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 823.1 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA800 (BC10) High/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 30.89 V/m; Power Drift = 0.04 dB
Applied MIF = 3.26 dB
RF audio interference level = 32.13 dBV/m
Emission category: M4

Grid 1 M4 30.2 dBV/m	Grid 2 M4 31.85 dBV/m	Grid 3 M4 30.34 dBV/m
Grid 4 M4 30.54 dBV/m	Grid 5 M4 32.13 dBV/m	Grid 6 M4 31.47 dBV/m
Grid 7 M4 30.31 dBV/m	Grid 8 M4 31.37 dBV/m	Grid 9 M4 31.4 dBV/m

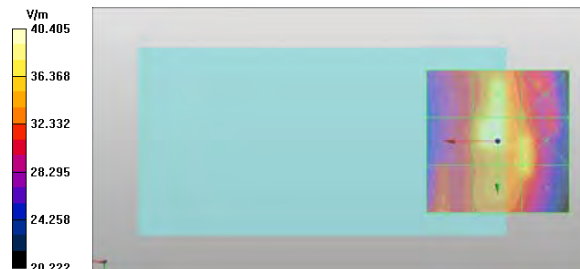

Date/Time: 2014-08-22 11:18:20

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 824.7 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA850 (BC0) Low/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: $dx=0.5000 \text{ mm}$, $dy=0.5000 \text{ mm}$
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 31.50 V/m; Power Drift = 0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 32.29 dBV/m
Emission category: M4

Grid 1 M4 31.4 dBV/m	Grid 2 M4 31.93 dBV/m	Grid 3 M4 30.78 dBV/m
Grid 4 M4 30.96 dBV/m	Grid 5 M4 32.29 dBV/m	Grid 6 M4 30.97 dBV/m
Grid 7 M4 31.52 dBV/m	Grid 8 M4 31.43 dBV/m	Grid 9 M4 30.68 dBV/m

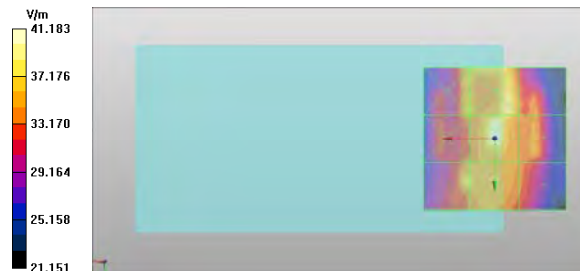

Date/Time: 2014-08-22 10:58:03

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 836.52 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA850 (BC0) Middle/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 24.46 V/m; Power Drift = -0.08 dB
Applied MIF = 3.26 dB
RF audio interference level = 29.88 dBV/m
Emission category: M4

Grid 1 M4 28.58 dBV/m	Grid 2 M4 29.4 dBV/m	Grid 3 M4 28.21 dBV/m
Grid 4 M4 28.52 dBV/m	Grid 5 M4 29.88 dBV/m	Grid 6 M4 28.68 dBV/m
Grid 7 M4 28.71 dBV/m	Grid 8 M4 29.86 dBV/m	Grid 9 M4 29.47 dBV/m

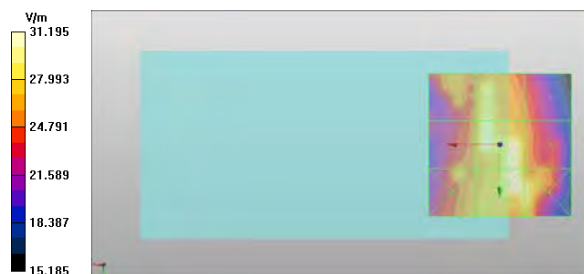

Date/Time: 2014-08-22 11:31:57

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 848.31 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA850 (BC0) High/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 27.71 V/m; Power Drift = 0.01 dB
Applied MIF = 3.26 dB
RF audio interference level = 30.94 dBV/m
Emission category: M4

Grid 1 M4 29.68 dBV/m	Grid 2 M4 30.71 dBV/m	Grid 3 M4 29.5 dBV/m
Grid 4 M4 29.83 dBV/m	Grid 5 M4 30.94 dBV/m	Grid 6 M4 29.81 dBV/m
Grid 7 M4 29.7 dBV/m	Grid 8 M4 30.62 dBV/m	Grid 9 M4 29.59 dBV/m

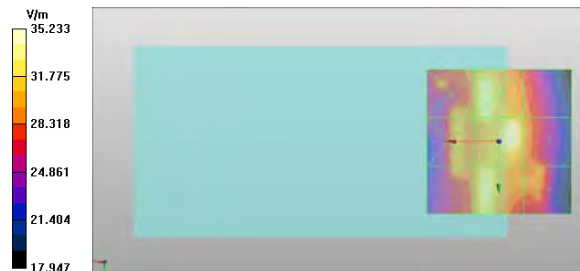

Date/Time: 2014-08-21 15:43:00

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM1900 - Low/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 9.836 V/m; Power Drift = 0.00 dB
Applied MIF = 3.63 dB
RF audio interference level = 30.77 dBV/m
Emission category: M3

Grid 1 M3 30.59 dBV/m	Grid 2 M3 31.93 dBV/m	Grid 3 M3 31.76 dBV/m
Grid 4 M4 26.67 dBV/m	Grid 5 M4 28.91 dBV/m	Grid 6 M4 29.09 dBV/m
Grid 7 M3 30.77 dBV/m	Grid 8 M4 29.22 dBV/m	Grid 9 M4 26.47 dBV/m

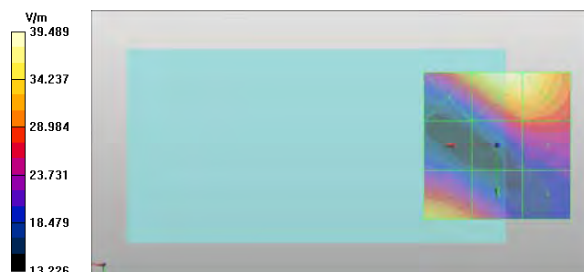

Date/Time: 2014-08-21 15:21:32

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 1880 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM1900 - Middle/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 8.866 V/m; Power Drift = -0.07 dB
Applied MIF = 3.63 dB
RF audio interference level = 30.95 dBV/m
Emission category: M3

Grid 1 M3 30.67 dBV/m	Grid 2 M3 31.87 dBV/m	Grid 3 M3 31.62 dBV/m
Grid 4 M4 26.28 dBV/m	Grid 5 M4 28.33 dBV/m	Grid 6 M4 28.54 dBV/m
Grid 7 M3 30.95 dBV/m	Grid 8 M3 30.36 dBV/m	Grid 9 M4 27.04 dBV/m

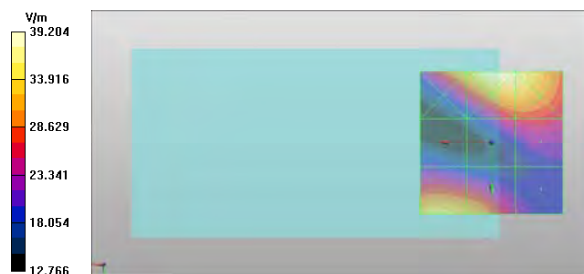

Date/Time: 2014-08-21 15:52:03

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9


Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK)
Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section

DASY Configuration:
- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/GSM1900 - High/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 7.525 V/m; Power Drift = -0.07 dB
Applied MIF = 3.63 dB
RF audio interference level = 30.42 dBV/m
Emission category: M3

Grid 1 M3 30.36 dBV/m	Grid 2 M3 31.23 dBV/m	Grid 3 M3 30.72 dBV/m
Grid 4 M4 25.89 dBV/m	Grid 5 M4 26.9 dBV/m	Grid 6 M4 27.18 dBV/m
Grid 7 M3 30.42 dBV/m	Grid 8 M3 30.35 dBV/m	Grid 9 M4 27.2 dBV/m

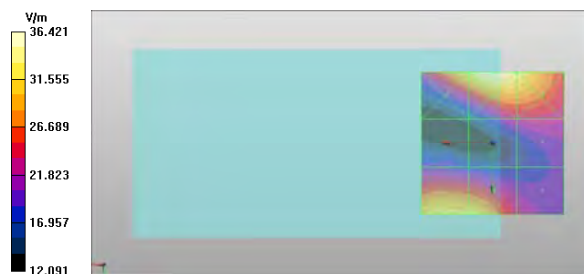

Date/Time: 2014-08-22 12:51:31

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA1900 (BC1) Low/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 8.437 V/m; Power Drift = -0.11 dB
Applied MIF = 3.26 dB
RF audio interference level = 23.19 dBV/m
Emission category: M4

Grid 1 M4 22.2 dBV/m	Grid 2 M4 22.6 dBV/m	Grid 3 M4 22.71 dBV/m
Grid 4 M4 23.19 dBV/m	Grid 5 M4 22.4 dBV/m	Grid 6 M4 22.29 dBV/m
Grid 7 M4 26.1 dBV/m	Grid 8 M4 25.34 dBV/m	Grid 9 M4 24.09 dBV/m

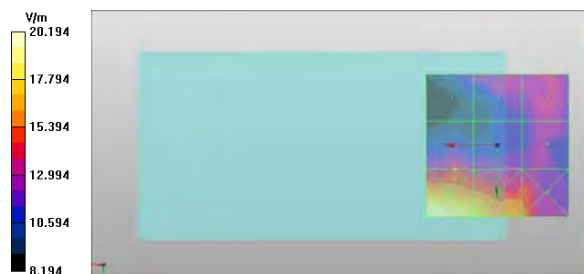

Date/Time: 2014-08-22 12:42:11

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 1880 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA1900 (BC1) Middle/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 8.072 V/m; Power Drift = 0.06 dB
Applied MIF = 3.26 dB
RF audio interference level = 24.05 dBV/m
Emission category: M4

Grid 1 M4 22.34 dBV/m	Grid 2 M4 24.05 dBV/m	Grid 3 M4 23.96 dBV/m
Grid 4 M4 23.17 dBV/m	Grid 5 M4 22.95 dBV/m	Grid 6 M4 23.15 dBV/m
Grid 7 M4 27.02 dBV/m	Grid 8 M4 26.34 dBV/m	Grid 9 M4 24 dBV/m

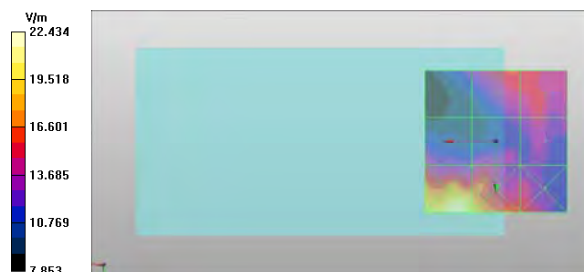

Date/Time: 2014-08-22 12:59:23

Test Laboratory: TCC Microsoft
Type: RM-1078; Serial: 355129/06/000197/9

Communication System: UID 10295 - AAB, CDMA2000, RC1, S03, 1/8th Rate 25 fr.
Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419
Medium: Air;
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section


DASY Configuration:

- Probe: ER3DV6 - SN2333
- ConvF(1, 1, 1); Calibrated: 2014-05-09;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-05-12
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

E Scan/CDMA1900 (BC1) High/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 6.839 V/m; Power Drift = -0.09 dB
Applied MIF = 3.26 dB
RF audio interference level = 24.91 dBV/m
Emission category: M4

Grid 1 M4 25.55 dBV/m	Grid 2 M4 26.13 dBV/m	Grid 3 M4 26.11 dBV/m
Grid 4 M4 21.92 dBV/m	Grid 5 M4 22.41 dBV/m	Grid 6 M4 22.64 dBV/m
Grid 7 M4 24.91 dBV/m	Grid 8 M4 24.05 dBV/m	Grid 9 M4 21.71 dBV/m

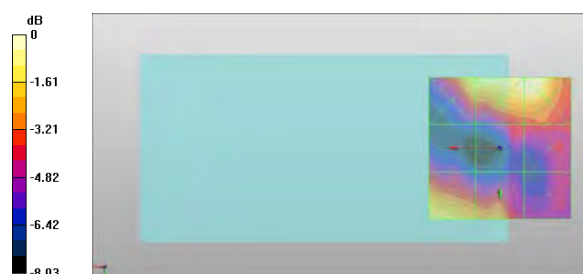

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ER3-2333_May14**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2333**

Calibration procedure(s) **QA CAL-02.v8, QA CAL-25.v6**
 Calibration procedure for E-field probes optimized for close near field
 evaluations in air

Calibration date: **May 9, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ER3DV6	SN: 2328	10-Oct-13 (No. ER3-2328_Oct13)	Oct-14
DAE4	SN: 789	30-Apr-14 (No. DAE4-789_Apr14)	Apr-15
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: May 13, 2014
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2333

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$)	1.45	1.50	1.45	$\pm 10.1 \%$
DCP (mV) ^B	98.9	99.0	103.9	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	205.0	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		184.3	
		Z	0.0	0.0	1.0		167.5	
10011- CAB	UMTS-FDD (WCDMA)	X	3.09	65.6	18.1	2.91	121.6	$\pm 0.5 \%$
		Y	3.22	66.6	18.6		149.4	
		Z	3.29	67.4	18.8		133.6	
10012- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.42	65.2	17.4	1.87	123.3	$\pm 0.7 \%$
		Y	2.42	65.5	17.6		109.7	
		Z	2.94	69.2	19.1		135.6	
10013- CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	11.13	71.3	24.4	9.46	114.8	$\pm 3.5 \%$
		Y	11.38	72.2	24.8		146.2	
		Z	10.53	70.0	23.0		124.5	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	14.96	100.0	29.3	9.39	108.4	$\pm 1.9 \%$
		Y	13.63	99.3	29.2		134.3	
		Z	8.67	84.6	22.5		129.2	
10039- CAB	CDMA2000 (1xRTT, RC1)	X	4.55	65.8	18.8	4.57	116.9	$\pm 0.9 \%$
		Y	4.76	67.1	19.5		147.1	
		Z	4.47	66.4	18.9		127.5	
10059- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	2.78	67.7	18.8	2.12	115.4	$\pm 0.5 \%$
		Y	2.85	68.2	18.9		145.6	
		Z	3.22	70.6	19.7		130.4	
10060- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	4.77	82.0	25.4	2.83	143.7	$\pm 0.5 \%$
		Y	4.26	80.0	24.5		131.6	
		Z	5.17	82.5	24.7		116.4	
10061- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	5.37	79.7	24.7	3.60	144.8	$\pm 0.7 \%$
		Y	4.33	75.4	22.7		132.2	
		Z	5.03	77.7	23.1		117.5	
10071- CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	11.05	70.9	24.4	9.83	105.8	$\pm 3.5 \%$
		Y	11.45	72.2	25.2		139.4	
		Z	10.55	69.9	23.2		118.3	
10072- CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	10.57	70.5	24.1	9.62	102.3	$\pm 3.5 \%$
		Y	10.97	71.9	24.9		135.6	
		Z	10.21	69.9	23.2		119.9	

10073-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	11.49	73.6	26.4	9.94	145.7	±2.5 %
		Y	11.06	72.4	25.5		131.7	
		Z	10.23	70.2	23.6		116.5	
10074-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	11.63	74.1	26.9	10.30	142.2	±3.8 %
		Y	11.22	72.9	26.2		132.7	
		Z	10.31	70.3	24.0		112.2	
10075-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	11.75	74.4	27.6	10.77	137.5	±2.2 %
		Y	11.34	73.3	26.8		128.0	
		Z	10.41	70.6	24.5		108.7	
10076-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	11.76	74.5	27.8	10.94	134.8	±2.2 %
		Y	11.37	73.5	27.1		127.1	
		Z	10.44	70.7	24.8		107.2	
10077-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	11.82	74.8	28.1	11.00	135.0	±2.2 %
		Y	11.33	73.4	27.1		126.0	
		Z	10.40	70.7	24.8		106.4	
10081-CAB	CDMA2000 (1xRTT, RC3)	X	3.79	65.4	18.6	3.97	114.7	±0.7 %
		Y	3.93	66.4	19.0		149.5	
		Z	3.78	66.1	18.5		126.6	
10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	8.78	72.7	25.5	9.29	110.2	±3.8 %
		Y	9.53	75.6	27.2		147.7	
		Z	8.92	73.0	25.0		124.3	
10104-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	9.84	72.8	26.2	9.97	119.5	±3.5 %
		Y	9.47	71.7	25.4		111.8	
		Z	9.98	73.3	25.8		135.2	
10105-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	9.99	73.0	26.3	10.01	120.9	±3.8 %
		Y	9.64	71.9	25.6		113.7	
		Z	10.14	73.4	25.8		136.6	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.27	71.9	25.2	9.28	106.5	±3.8 %
		Y	8.95	74.8	27.0		142.0	
		Z	8.41	72.5	24.9		119.3	
10152-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	9.21	71.9	25.7	9.92	114.0	±3.3 %
		Y	8.79	70.5	24.8		106.5	
		Z	9.32	72.5	25.3		127.7	
10153-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	9.44	72.1	25.9	10.05	115.1	±3.3 %
		Y	9.10	71.1	25.2		108.0	
		Z	9.54	72.7	25.5		128.9	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.82	65.9	19.6	5.73	109.4	±1.2 %
		Y	5.02	67.1	20.3		143.4	
		Z	4.80	66.4	19.5		121.5	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.57	67.0	20.5	6.52	109.0	±1.7 %
		Y	5.85	68.5	21.5		143.6	
		Z	5.45	67.1	20.2		119.9	
10171-AAA	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.60	67.3	20.7	6.49	112.8	±1.4 %
		Y	5.82	68.5	21.4		143.5	
		Z	5.49	67.4	20.4		123.8	

10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	7.15	75.3	27.8	9.21	122.5	±2.7 %
		Y	6.49	72.3	25.9		111.5	
		Z	7.60	76.5	27.2		135.7	
10173-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	7.06	74.1	26.9	9.48	116.1	±2.2 %
		Y	7.87	78.1	29.3		147.4	
		Z	8.00	77.6	27.8		133.7	
10174-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	7.63	73.8	27.5	10.25	116.5	±2.7 %
		Y	8.40	77.8	30.0		148.0	
		Z	8.49	77.1	28.3		133.4	
10175-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	5.10	67.4	20.5	5.72	148.8	±1.4 %
		Y	4.98	66.8	20.2		137.7	
		Z	4.73	66.0	19.3		120.1	
10176-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.97	69.0	21.8	6.52	148.9	±1.9 %
		Y	5.81	68.3	21.4		138.6	
		Z	5.44	67.1	20.2		119.1	
10177-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.17	67.8	20.8	5.73	148.7	±1.4 %
		Y	5.02	67.1	20.3		138.5	
		Z	4.77	66.2	19.4		121.7	
10178-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.94	68.8	21.7	6.52	148.9	±1.7 %
		Y	5.80	68.3	21.4		138.3	
		Z	5.44	67.1	20.2		119.5	
10179-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.96	69.0	21.7	6.50	149.2	±1.7 %
		Y	5.83	68.5	21.4		138.6	
		Z	5.44	67.1	20.2		119.4	
10180-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.96	69.0	21.8	6.50	149.4	±1.7 %
		Y	5.79	68.2	21.2		138.1	
		Z	5.44	67.1	20.2		119.4	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	5.16	67.6	20.7	5.72	149.9	±1.4 %
		Y	5.02	67.1	20.3		138.7	
		Z	4.77	66.2	19.4		121.5	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	5.61	67.3	20.8	6.52	108.4	±1.7 %
		Y	5.82	68.4	21.4		138.9	
		Z	5.48	67.3	20.3		119.7	
10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.92	68.8	21.6	6.50	149.4	±1.7 %
		Y	5.77	68.2	21.3		138.4	
		Z	5.44	67.1	20.2		119.6	
10184-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.16	67.7	20.7	5.73	149.7	±1.4 %
		Y	5.03	67.1	20.3		138.8	
		Z	4.79	66.3	19.5		121.4	
10185-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.56	67.1	20.6	6.51	108.5	±1.7 %
		Y	5.81	68.3	21.3		139.1	
		Z	5.42	67.0	20.1		119.7	
10186-AAA	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	5.56	67.1	20.6	6.50	108.4	±1.4 %
		Y	5.75	68.1	21.2		137.7	
		Z	5.44	67.1	20.2		119.3	

10187-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	5.17	67.8	20.8	5.73	149.6	±1.4 %
		Y	5.01	66.9	20.2		138.1	
		Z	4.79	66.3	19.5		121.8	
10188-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.62	67.3	20.8	6.52	108.6	±1.7 %
		Y	5.81	68.3	21.4		138.6	
		Z	5.45	67.1	20.2		120.2	
10189-AAA	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.58	67.2	20.6	6.50	108.5	±1.7 %
		Y	5.79	68.3	21.3		138.0	
		Z	5.44	67.1	20.2		120.2	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	7.06	74.1	27.0	9.49	116.2	±3.8 %
		Y	7.86	78.1	29.3		148.2	
		Z	8.06	77.8	27.9		135.4	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	7.66	74.0	27.7	10.26	117.0	±2.7 %
		Y	8.30	77.3	29.7		147.5	
		Z	8.55	77.3	28.4		134.9	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	6.74	73.3	26.6	9.22	116.3	±2.2 %
		Y	7.49	77.2	28.9		148.0	
		Z	7.56	76.4	27.2		134.8	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	6.99	73.8	26.8	9.48	115.8	±3.8 %
		Y	7.72	77.5	29.0		147.0	
		Z	7.91	77.2	27.5		134.2	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	7.65	74.1	27.7	10.25	116.6	±2.7 %
		Y	8.32	77.4	29.8		146.7	
		Z	8.47	77.1	28.3		134.6	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	6.62	72.8	26.3	9.19	115.8	±3.8 %
		Y	7.50	77.3	28.9		147.3	
		Z	7.50	76.3	27.1		135.1	
10232-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	7.07	74.2	27.1	9.48	116.5	±3.8 %
		Y	7.75	77.6	29.0		146.8	
		Z	7.97	77.5	27.7		134.3	
10233-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	7.57	73.6	27.4	10.25	116.0	±3.5 %
		Y	8.31	77.4	29.8		146.1	
		Z	8.54	77.3	28.5		134.6	
10234-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	6.74	73.3	26.6	9.21	116.3	±2.2 %
		Y	7.40	76.8	28.6		147.0	
		Z	7.55	76.4	27.2		134.9	
10235-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	7.03	74.1	27.0	9.48	115.5	±3.8 %
		Y	7.67	77.4	28.9		145.7	
		Z	7.96	77.4	27.6		134.5	
10236-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	7.60	73.9	27.6	10.25	116.2	±3.0 %
		Y	8.28	77.3	29.7		146.3	
		Z	8.50	77.1	28.3		134.6	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.66	73.0	26.4	9.21	116.0	±3.8 %
		Y	7.39	76.8	28.6		146.9	
		Z	7.54	76.4	27.2		134.8	

10238-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	6.95	73.7	26.7	9.48	115.7	±2.7 %
		Y	7.72	77.6	29.0		145.6	
		Z	7.89	77.1	27.5		134.1	
10239-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	7.60	73.8	27.6	10.25	116.3	±2.7 %
		Y	8.25	77.2	29.6		146.3	
		Z	8.52	77.3	28.4		134.5	
10240-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	6.68	73.1	26.4	9.21	116.0	±3.8 %
		Y	7.37	76.7	28.6		146.6	
		Z	7.47	76.1	27.0		134.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	7.90	73.8	27.1	9.82	125.3	±3.3 %
		Y	7.30	71.2	25.4		113.3	
		Z	8.68	76.8	27.7		144.6	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	7.89	73.5	27.0	9.86	126.0	±3.3 %
		Y	7.34	71.3	25.5		113.4	
		Z	8.67	76.7	27.6		143.1	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	7.34	72.9	26.5	9.46	123.4	±3.3 %
		Y	6.80	70.4	24.9		111.7	
		Z	8.06	75.8	27.1		143.1	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	8.90	74.2	27.5	10.06	137.7	±3.8 %
		Y	8.26	71.7	25.9		123.6	
		Z	8.20	71.8	25.1		109.1	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	9.03	74.6	27.7	10.06	139.0	±2.7 %
		Y	8.31	71.8	25.9		125.5	
		Z	8.23	71.9	25.2		110.7	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	7.72	73.0	26.4	9.30	131.2	±3.3 %
		Y	7.28	71.2	25.2		119.8	
		Z	7.20	71.0	24.3		106.2	
10247-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	9.11	74.6	27.7	9.91	142.4	±2.7 %
		Y	8.44	72.1	26.0		129.3	
		Z	8.29	71.8	25.0		112.5	
10248-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	9.19	74.3	27.6	10.09	142.1	±3.0 %
		Y	8.61	72.1	26.2		129.1	
		Z	8.49	72.0	25.3		113.3	
10249-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	7.94	73.3	26.6	9.29	133.8	±3.5 %
		Y	7.49	71.6	25.4		122.6	
		Z	7.31	70.9	24.2		108.0	
10250-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	8.50	70.9	25.1	9.81	106.4	±3.8 %
		Y	8.82	72.5	26.1		136.0	
		Z	8.67	72.0	25.1		120.2	
10251-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	8.91	71.2	25.5	10.17	107.6	±2.7 %
		Y	9.25	72.8	26.6		138.1	
		Z	9.06	72.3	25.4		120.8	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.51	74.5	27.1	9.24	141.0	±3.8 %
		Y	7.90	72.2	25.7		128.4	
		Z	7.65	71.2	24.3		113.1	

10253-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	9.05	71.4	25.4	9.90	111.6	±2.7 %
		Y	9.47	73.3	26.6		144.5	
		Z	9.26	72.6	25.4		126.4	
10254-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	9.33	71.5	25.6	10.14	112.9	±2.7 %
		Y	9.77	73.5	26.9		146.2	
		Z	9.49	72.6	25.5		127.9	
10255-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	9.10	75.5	27.5	9.20	148.4	±2.5 %
		Y	8.39	72.9	25.9		134.8	
		Z	8.07	71.6	24.4		118.6	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	8.56	73.8	27.1	9.96	135.1	±3.8 %
		Y	8.04	71.8	25.9		123.8	
		Z	8.01	72.0	25.1		108.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	8.65	73.7	27.2	10.08	134.7	±3.8 %
		Y	8.16	71.9	26.0		123.9	
		Z	8.18	72.3	25.4		108.3	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	7.59	72.7	26.2	9.34	129.2	±3.3 %
		Y	7.15	70.8	25.0		119.7	
		Z	7.12	70.9	24.3		105.3	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	9.27	74.6	27.7	9.98	143.8	±2.5 %
		Y	8.64	72.2	26.1		132.0	
		Z	8.49	72.0	25.2		114.3	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	9.29	74.5	27.6	9.97	145.1	±2.7 %
		Y	8.71	72.4	26.2		132.4	
		Z	8.54	72.0	25.2		116.2	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	8.14	73.8	26.8	9.24	136.9	±3.5 %
		Y	7.60	71.7	25.4		125.5	
		Z	7.38	70.9	24.2		110.7	
10262-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	9.50	74.9	27.7	9.83	149.6	±2.5 %
		Y	8.88	72.7	26.3		136.6	
		Z	8.69	72.1	25.1		120.3	
10263-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	8.90	71.2	25.5	10.16	107.5	±3.0 %
		Y	9.25	72.8	26.6		138.8	
		Z	9.06	72.3	25.5		121.7	
10264-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	8.45	74.3	27.0	9.23	140.4	±3.8 %
		Y	7.88	72.1	25.6		128.5	
		Z	7.65	71.2	24.3		113.5	
10265-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	9.02	71.3	25.3	9.92	110.5	±2.7 %
		Y	9.51	73.4	26.7		144.5	
		Z	9.25	72.4	25.2		127.6	
10266-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	9.30	71.6	25.6	10.07	112.0	±3.0 %
		Y	9.71	73.4	26.8		146.0	
		Z	9.50	72.6	25.5		129.6	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.08	75.2	27.3	9.30	147.2	±3.8 %
		Y	8.53	73.2	26.1		134.1	
		Z	8.30	72.1	24.7		119.7	

10268-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	9.69	72.0	25.7	10.06	117.3	±3.5 %
		Y	9.38	71.0	25.1		107.2	
		Z	9.99	73.1	25.7		135.7	
10269-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	9.92	72.3	25.9	10.13	118.2	±3.8 %
		Y	9.53	71.0	25.1		108.9	
		Z	10.23	73.5	25.9		139.1	
10270-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	8.95	72.4	25.6	9.58	109.1	±3.8 %
		Y	9.34	73.9	26.6		141.6	
		Z	9.10	72.9	25.2		127.4	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	4.13	66.3	18.8	3.91	114.9	±0.7 %
		Y	4.22	66.9	19.1		148.1	
		Z	4.06	67.0	18.8		130.7	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.48	65.9	18.6	3.46	111.8	±0.7 %
		Y	3.58	66.7	18.9		143.3	
		Z	3.50	66.9	18.7		126.9	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.35	65.4	18.3	3.39	112.1	±0.5 %
		Y	3.48	66.5	18.9		143.5	
		Z	3.45	66.9	18.6		127.6	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	3.46	65.7	18.5	3.50	111.6	±0.5 %
		Y	3.59	66.6	18.9		143.6	
		Z	3.51	66.7	18.6		127.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	8.94	83.9	34.9	12.49	88.7	±2.7 %
		Y	7.86	79.4	32.5		81.3	
		Z	9.00	81.6	31.6		77.7	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.51	66.4	18.1	1.71	115.4	±0.7 %
		Y	2.49	66.4	18.0		147.7	
		Z	2.87	69.3	19.0		133.8	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.46	67.0	18.5	3.76	118.3	±0.5 %
		Y	4.31	66.5	18.2		109.5	
		Z	4.69	69.2	19.1		134.9	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.36	67.0	18.5	3.77	117.3	±0.5 %
		Y	4.46	67.6	18.8		108.2	
		Z	4.56	69.0	19.1		133.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORTS



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Salo TCC**

Certificate No: **CD835V3-1064_Jun13**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1064**

Calibration procedure(s) **QA CAL-20.v6
Calibration procedure for dipoles in air**

Calibration date: **June 11, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 10 dB Attenuator	SN: 5047.2 (10q)	04-Apr-13 (No. 217-01731)	Apr-14
Probe ER3DV6	SN: 2336	28-Dec-12 (No. ER3-2336_Dec12)	Dec-13
Probe H3DV6	SN: 6065	28-Dec-12 (No. H3-6065_Dec12)	Dec-13
DAE4	SN: 781	03-Jun-13 (No. DAE4-781 Jun13)	Jun-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-12)	In house check: Oct-13
Power sensor HP E4412A	SN: MY41495277	01-Apr-08 (in house check Oct-12)	In house check: Oct-13
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-12)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-12)	In house check: Oct-14

Calibrated by: **Claudio Leubler** Name **Claudio Leubler** Function **Laboratory Technician**

Approved by: **Fin Bomholt** Name **Fin Bomholt** Function **Deputy Technical Manager**

Signature

Issued: June 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	108.0 V / m
Maximum measured above low end	100 mW input power	107.7 V / m
Averaged maximum above arm	100 mW input power	107.9 V / m $\pm$ 12.8 % (k=2)

Appendix

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	17.5 dB	42.4 Ω - 9.9 j Ω
835 MHz	25.4 dB	52.1 Ω + 5.1 j Ω
900 MHz	15.9 dB	59.4 Ω - 14.9 j Ω
950 MHz	19.2 dB	46.7 Ω + 10.1 j Ω
960 MHz	14.6 dB	54.5 Ω + 19.2 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

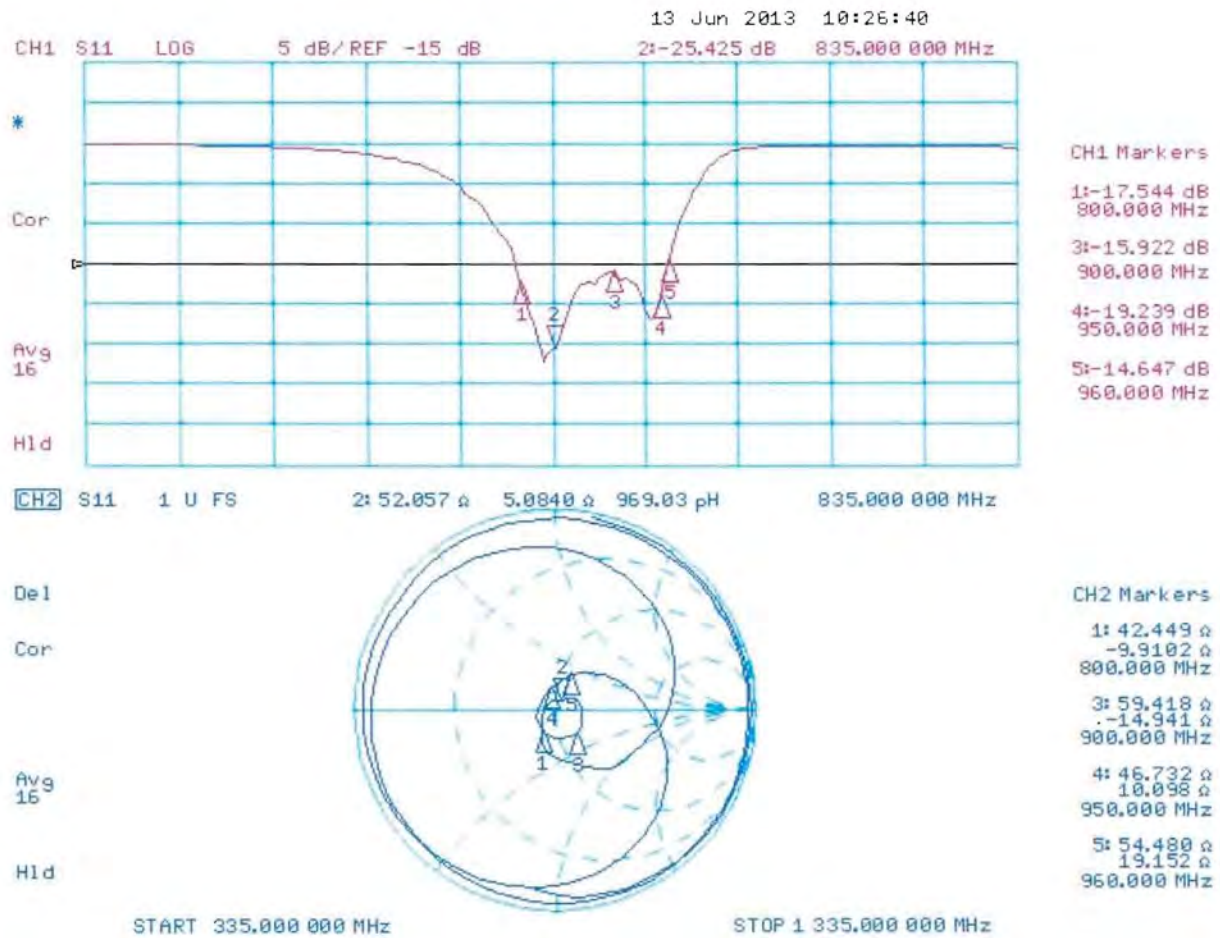

DASY5 E-field Result

Date: 11.06.2013

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1064

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 28.12.2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 03.06.2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 107.7 V/m; Power Drift = -0.03 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 108.0 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
106.9 V/m	108.0 V/m	104.8 V/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
64.33 V/m	64.83 V/m	63.31 V/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
104.7 V/m	107.7 V/m	106.8 V/m

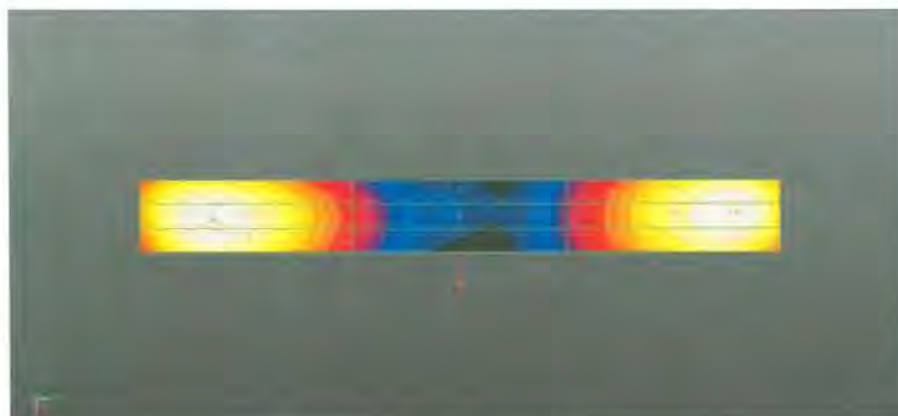

0 dB = 108.0 V/m = 40.67 dBV/m



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **CD1880V3-1052_Jun13**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1052**

Calibration procedure(s) **QA CAL-20.v6
Calibration procedure for dipoles in air**

Calibration date: **June 11, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 10 dB Attenuator	SN: 5047.2 (10q)	04-Apr-13 (No. 217-01731)	Apr-14
Probe ER3DV6	SN: 2336	28-Dec-12 (No. ER3-2336_Dec12)	Dec-13
Probe H3DV6	SN: 6065	28-Dec-12 (No. H3-6065_Dec12)	Dec-13
DAE4	SN: 781	03-Jun-13 (No. DAE4-781_Jun13)	Jun-14

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-12)	In house check: Oct-13
Power sensor HP E4412A	SN: MY41495277	01-Apr-08 (in house check Oct-12)	In house check: Oct-13
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-12)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13
RF generator R&S SMT-06	SN: 832283/011	27-Aug-12 (in house check Oct-12)	In house check: Oct-14

Calibrated by: **Claudio Leubler** Name **Laboratory Technician** Function

Approved by: **Fin Bomholt** Deputy Technical Manager

Signature

Issued: June 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	93.3 V / m
Maximum measured above low end	100 mW input power	91.6 V / m
Averaged maximum above arm	100 mW input power	92.5 V / m $\pm$ 12.8 % (k=2)

Appendix

Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	21.6 dB	47.4 Ω + 7.6 j Ω
1880 MHz	20.6 dB	51.8 Ω + 9.4 j Ω
1900 MHz	21.4 dB	53.8 Ω + 8.0 j Ω
1950 MHz	26.3 dB	55.0 Ω - 0.6 j Ω
2000 MHz	21.0 dB	41.8 Ω + 0.0 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

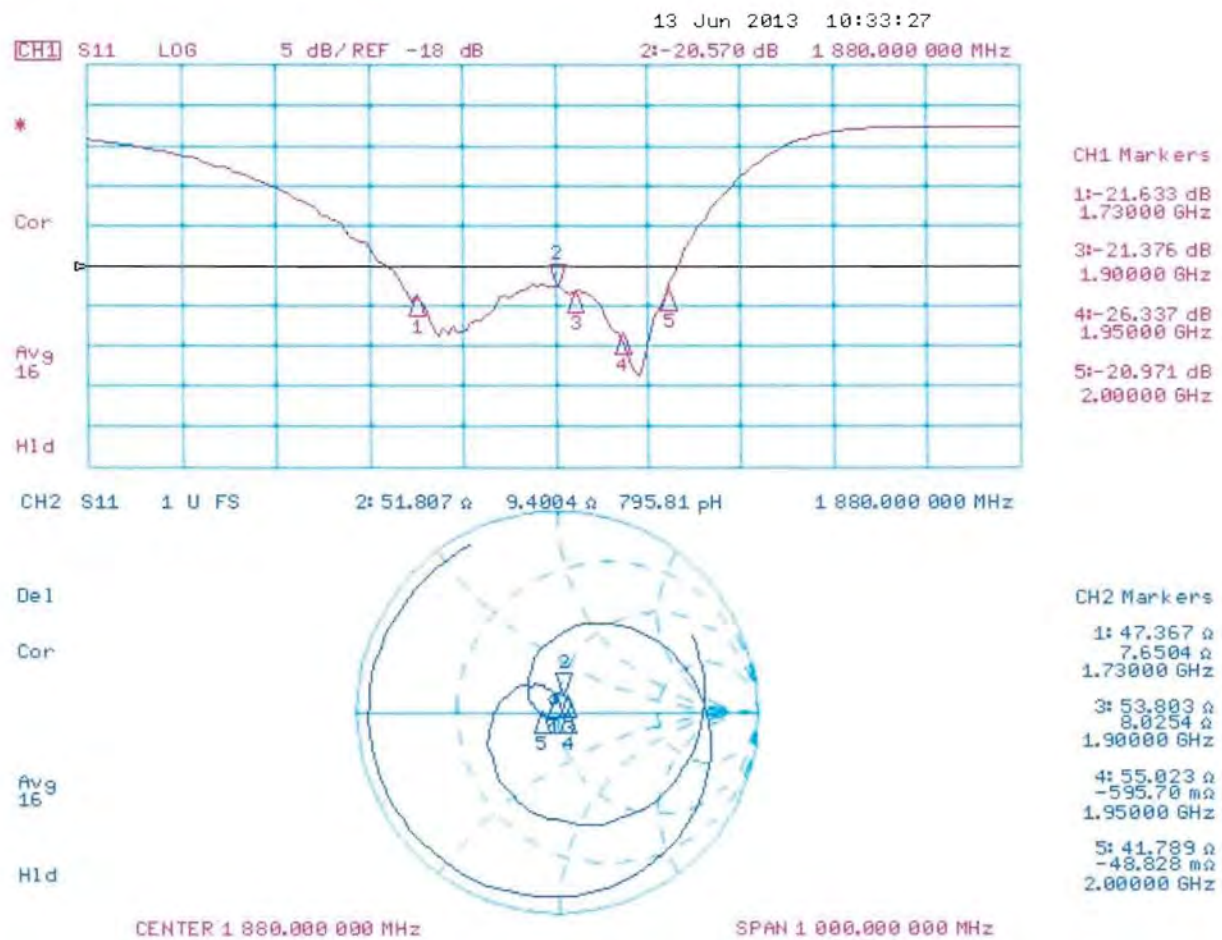

DASY5 E-field Result

Date: 11.06.2013

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1052

Communication System: UID 0 - CW; Frequency: 1880 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 28.12.2012;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 03.06.2013
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 164.8 V/m; Power Drift = -0.01 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 93.33 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
91.35 V/m	93.33 V/m	91.77 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
72.05 V/m	72.88 V/m	71.74 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
89.28 V/m	91.58 V/m	90.69 V/m

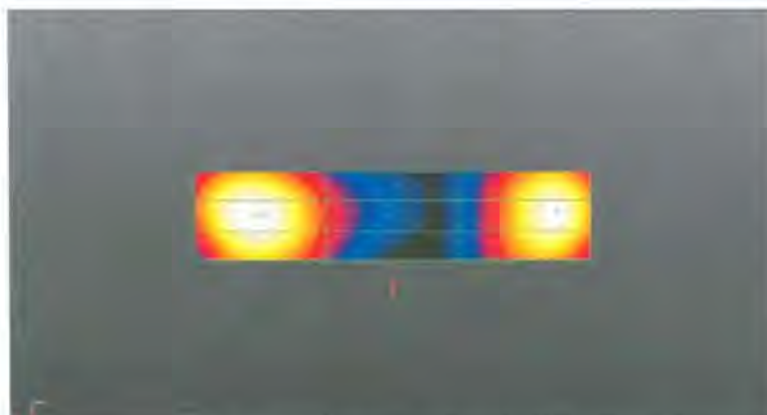

0 dB = 93.33 V/m = 39.40 dBV/m