

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0748_05.doc	Date of Report:	02-01-2008
Number of pages:	28	Customer's Contact person:	Dai Xuejun
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 BEIJING, PRC Tel. +86 10 65392828 Fax. +86 10 65393838
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone RM-391 / Battery BL-4B, AC-Charger AC-3E, Headset HS-47		
FCC ID:	QTLRM-391	IC:	661AB-RM391
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	26-11-2007
Testing completed	29-11-2007
The customer's contact person	Dai Xuejun
Test Plan referred to	T:\Projects\RM-391\TestPlan_RS\RS_Testplan_RM-391.xls
Notes	None
Document name	T:\Projects\RM-391\EMC\Results\FCC\Cph_FCC_0748_05.doc

1.1. EUT and Accessory Information

The EUT is a 2-band (GSM850/1900) mobile phone with GPRS, EGPRS and Bluetooth.
Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-391	001004/00/261364/5	0424	-	pt06w47_07 w46fam	29231
Battery	BL-4B	0670491363563o115110700118	-	-	-	29227
AC-Charger	AC-3E	4419297272022156981;0675370	-	-	-	29226
Headset	HS-47	0694580652 302104834	-	-	-	29225

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	Passed
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	Passed
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	Passed
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP


The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	10
5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	18
6.1. Test method and limit.....	18
6.2. Bluetooth Test results	19
7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	21
7.1. Test method and limit.....	21
7.2. Bluetooth Test results	22
8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	24
8.1. Test method and limit.....	24
8.2. Bluetooth test results.....	25
9. Test Equipment.....	27
9.1. Conducted measurements	27
9.2. Radiated measurements	27

2. Test setups


2.1. Conducted RF test setup

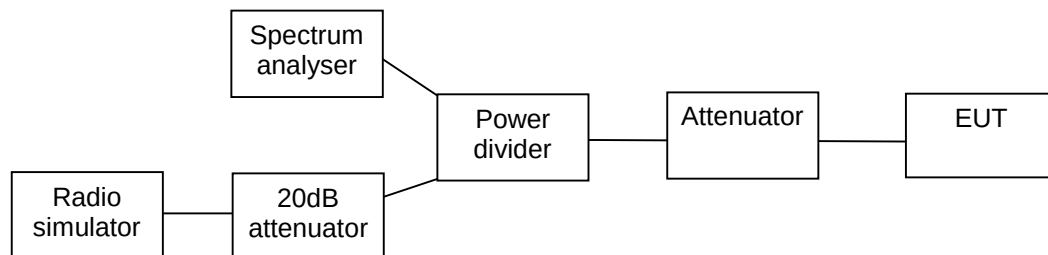

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

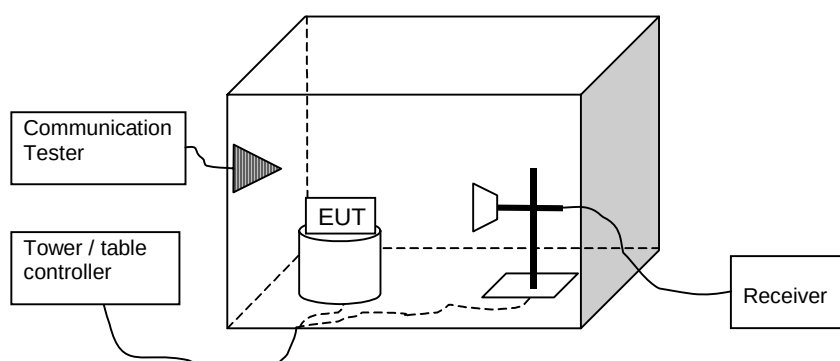

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.80	0.832	Passed
40 / 2442	-0.50	0.891	Passed
78 / 2480	-0.50	0.891	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

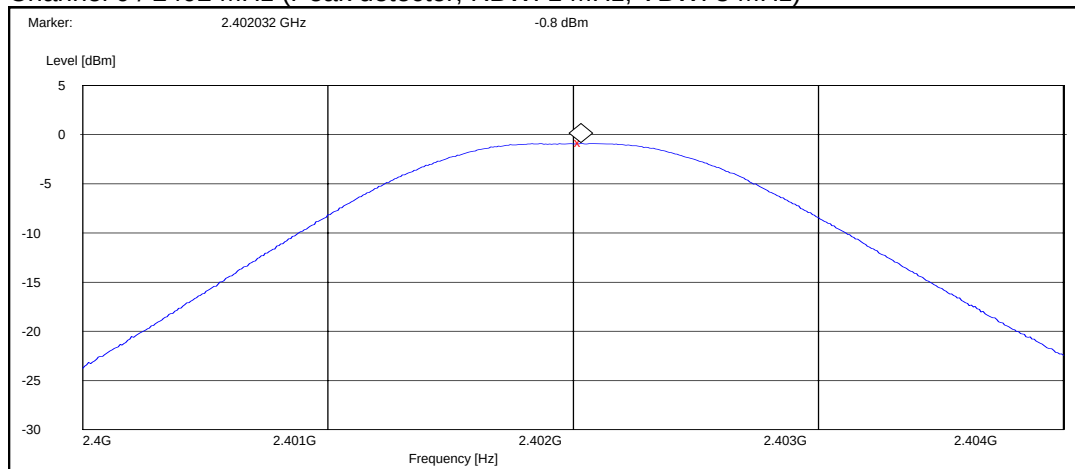

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

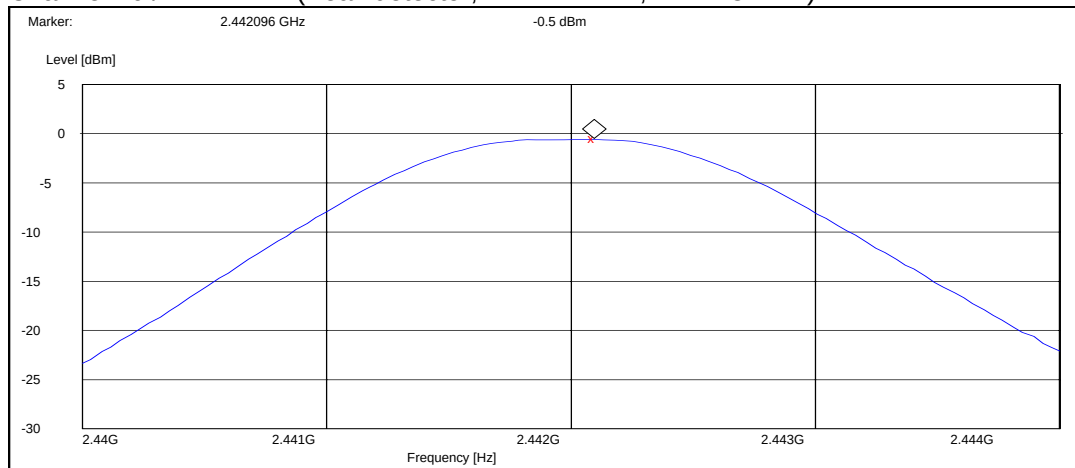


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

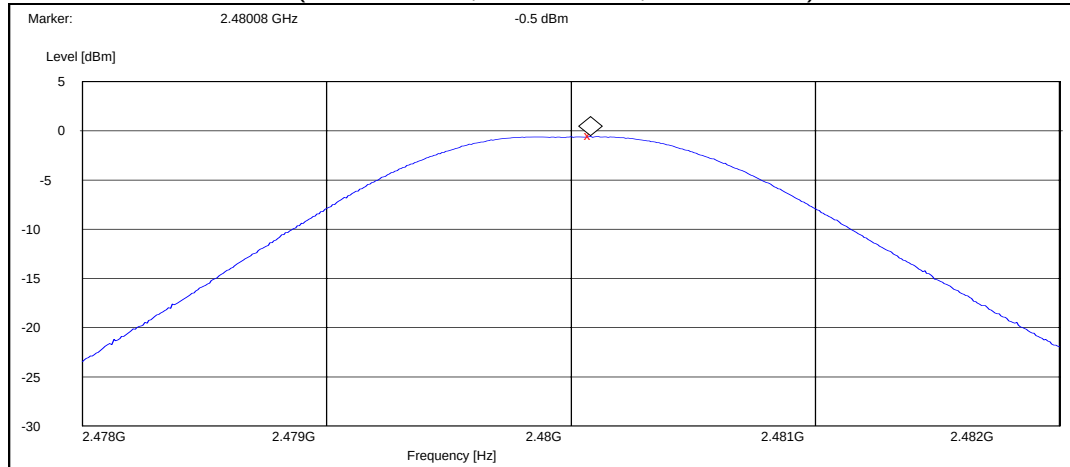


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.10	1.288	Passed
40 / 2442	1.10	1.288	Passed
78 / 2480	1.00	1.259	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

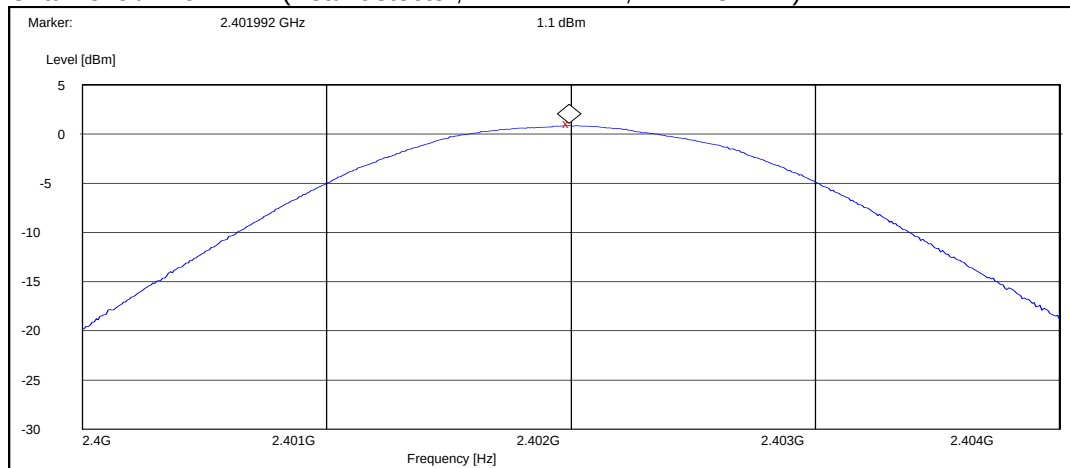

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

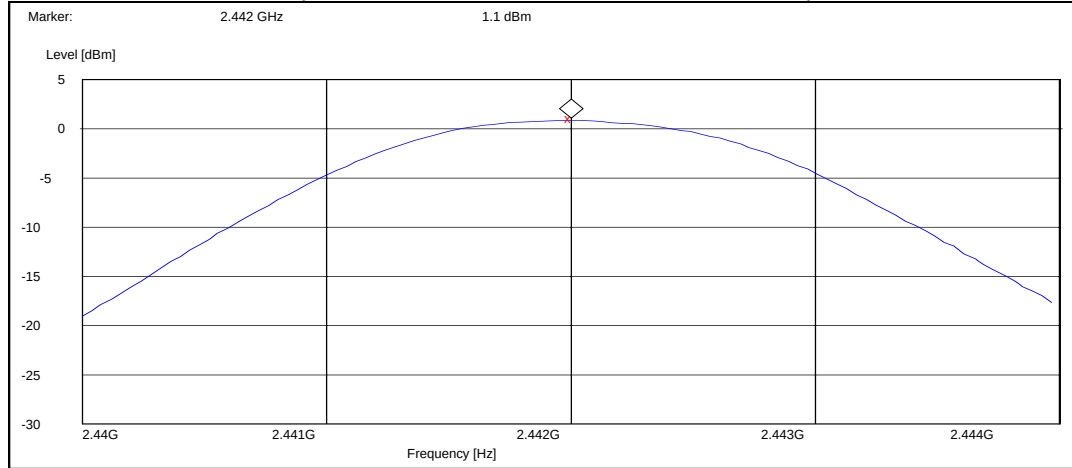

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

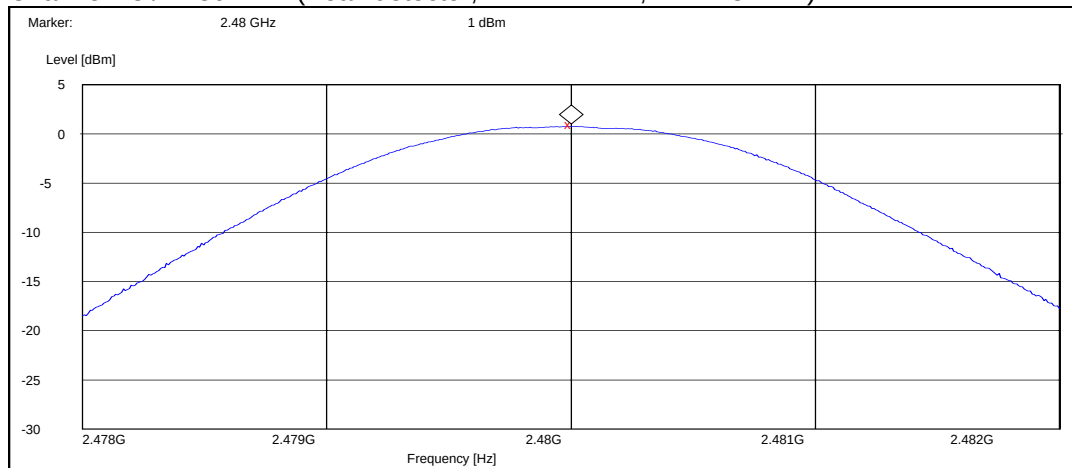

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

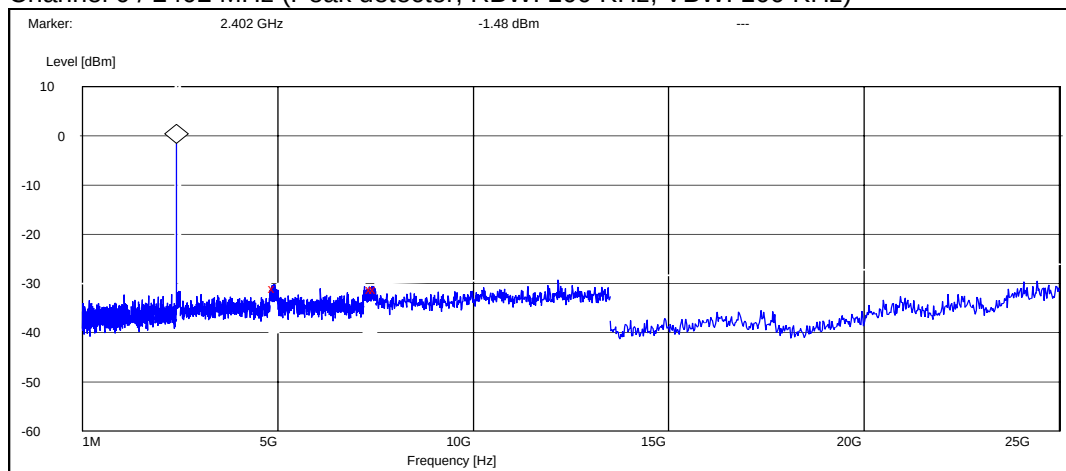


Frequency [MHz]	P [dBc]	Result
4925.200000	-29.415917	Passed
7414.200000	-29.715917	Passed
7500.000000	-29.715917	Passed

Channel 40 / 2442 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

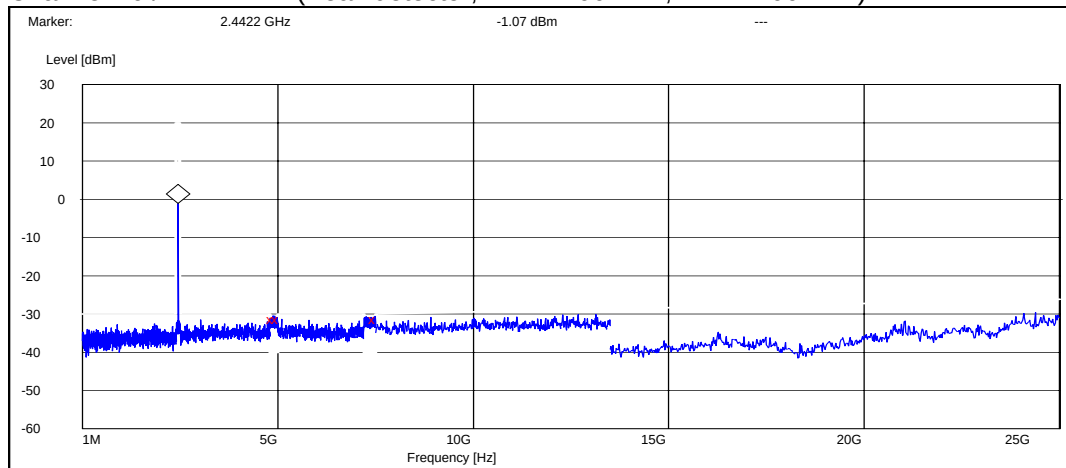

Frequency [MHz]	P [dBc]	Result
4875.600000	-30.328722	Passed
5000.000000	-30.328722	Passed
7493.400000	-30.228722	Passed


Channel 78 / 2480 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

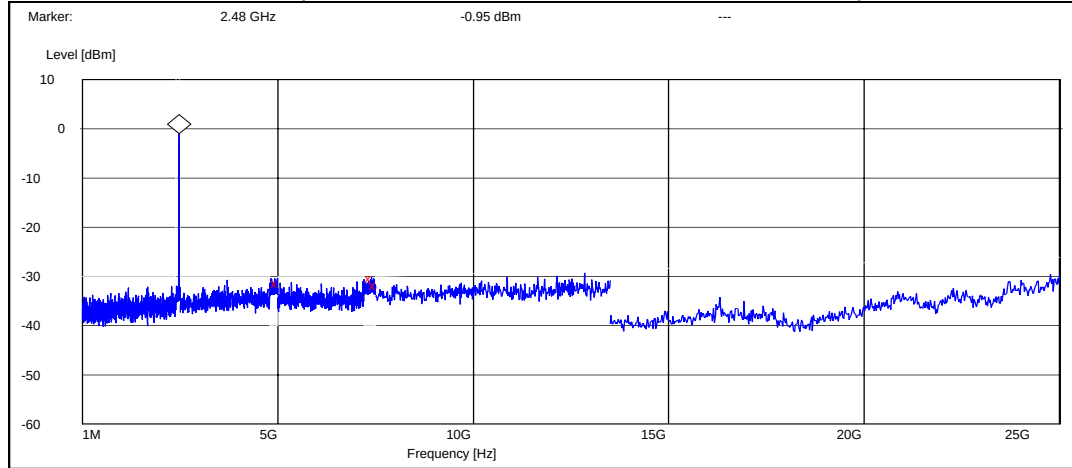

Frequency [MHz]	P [dBc]	Result
4986.800000	-30.348065	Passed
7393.800000	-29.548065	Passed
7500.000000	-30.948065	Passed


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

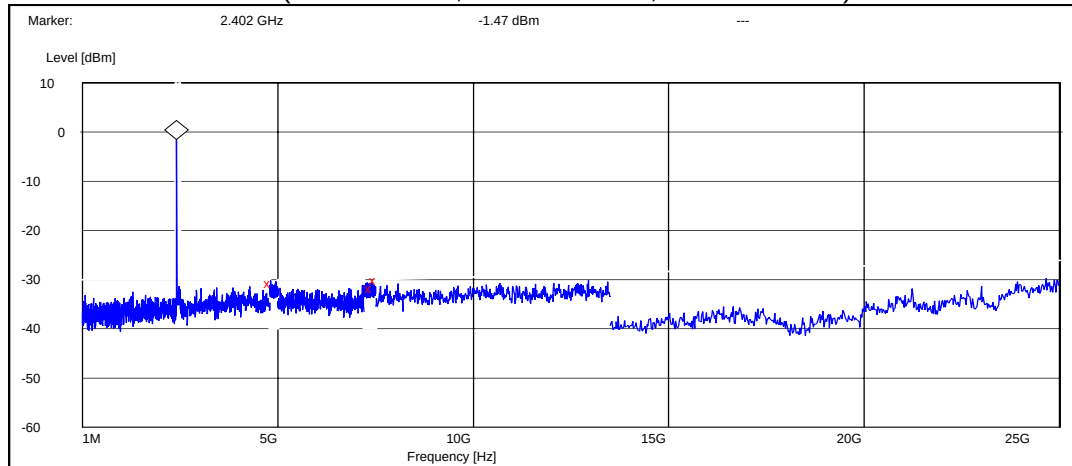


Frequency [MHz]	P [dBc]	Result
4810.800000	-29.227102	Passed
7396.800000	-30.227102	Passed
7500.000000	-28.727102	Passed

Channel 40 / 2442 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

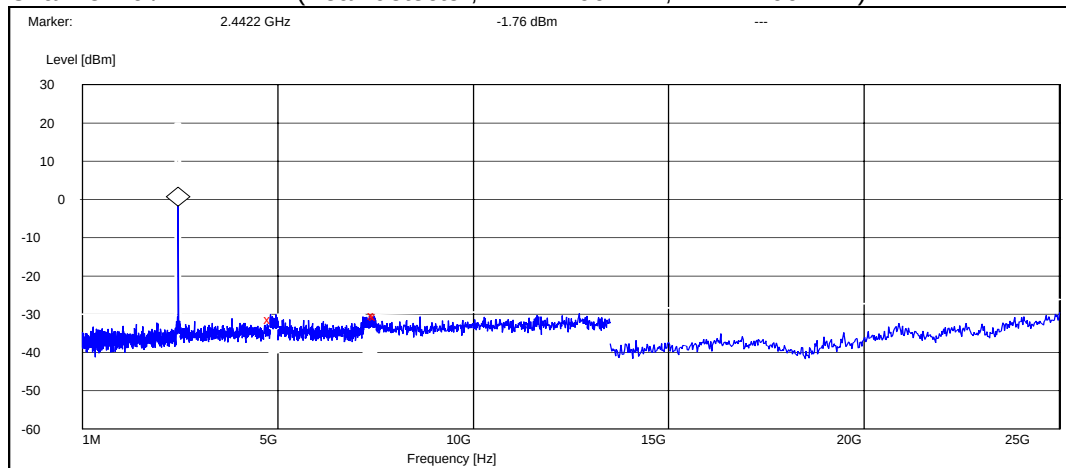

Frequency [MHz]	P [dBc]	Result
4805.600000	-29.637560	Passed
7459.800000	-28.437560	Passed
7500.000000	-28.837560	Passed

Channel 78 / 2480 MHz (Peak detector, RBW: 100 KHz, VBW: 100 KHz)

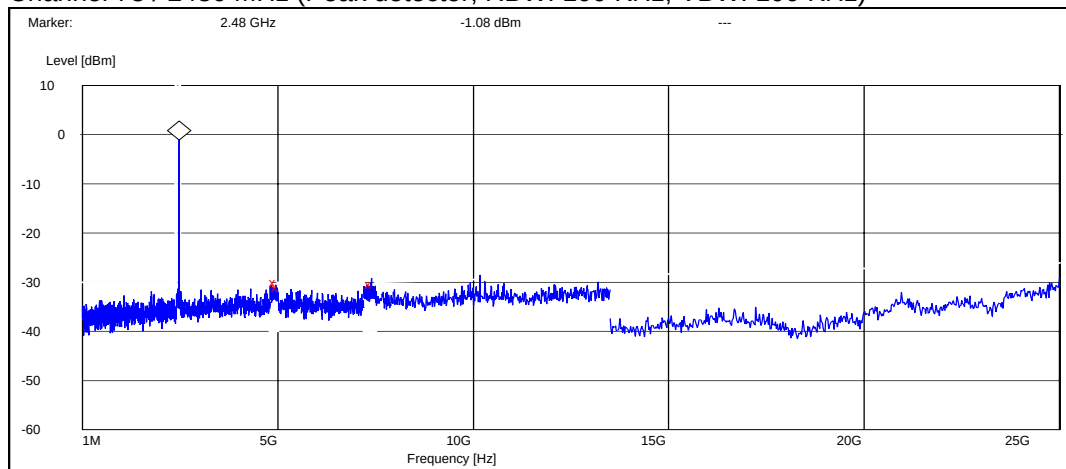

Frequency [MHz]	P [dBc]	Result
4954.800000	6.635069	Passed
5000.000000	5.635069	Passed
7389.000000	6.235069	Passed

5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	900.000	Passed
40 / 2442	900.000	Passed
78 / 2480	900.000	Passed


Channel 0 / 2402 MHz

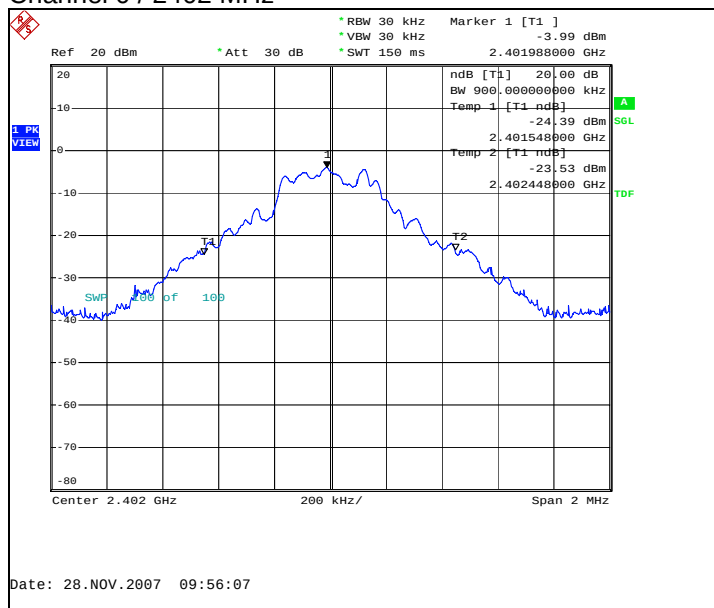

Channel 40 / 2442 MHz

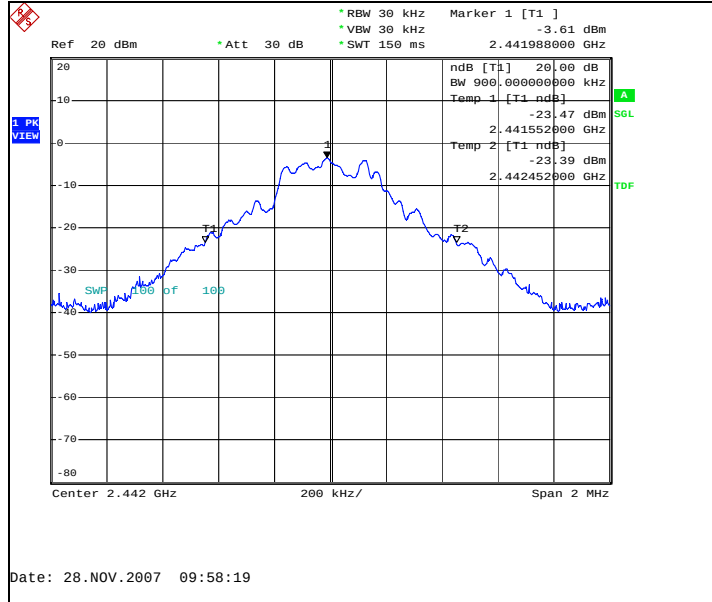


Channel 78 / 2480 MHz

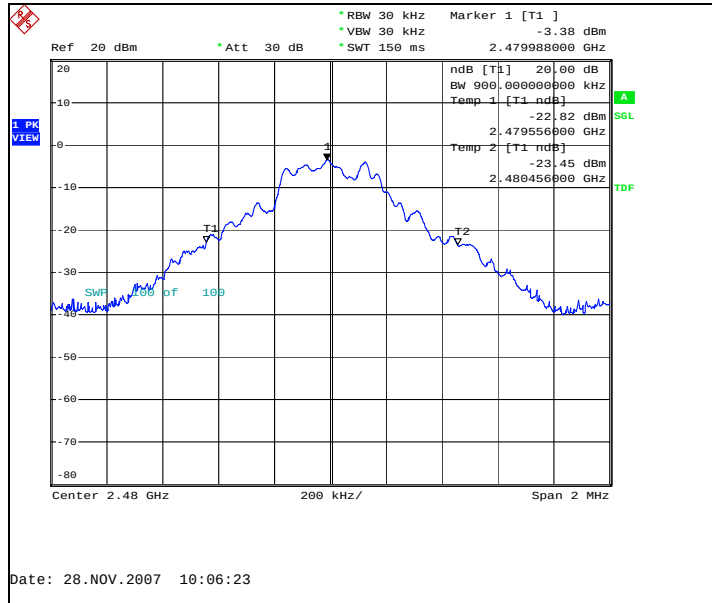


5.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1316.000	Passed
40 / 2442	1316.000	Passed
78 / 2480	1320.000	Passed


Channel 0 / 2402 MHz

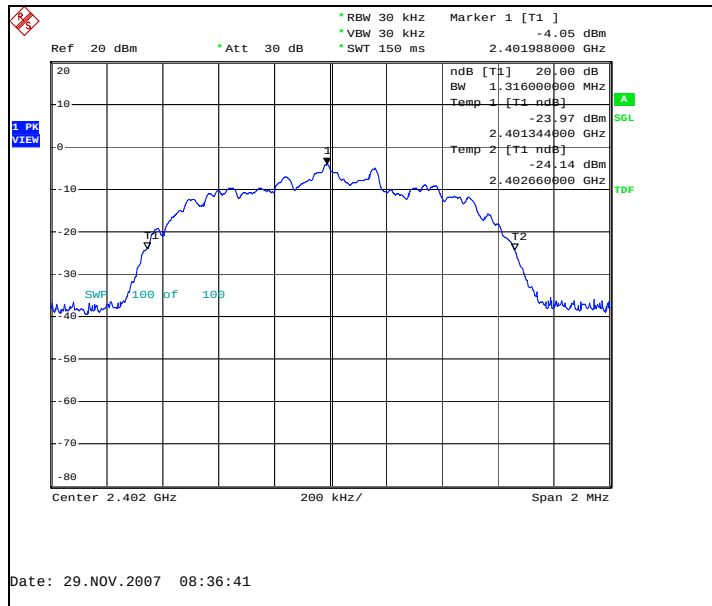

Channel 40 / 2442 MHz

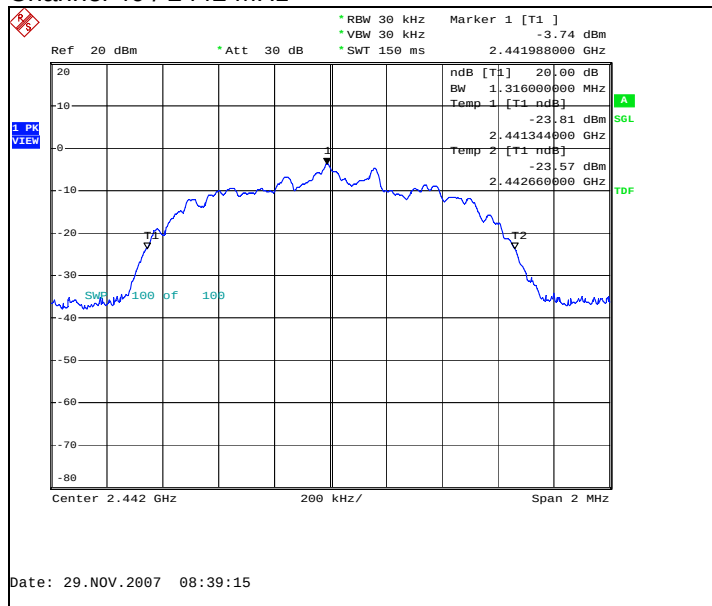

Channel 78 / 2480 MHz

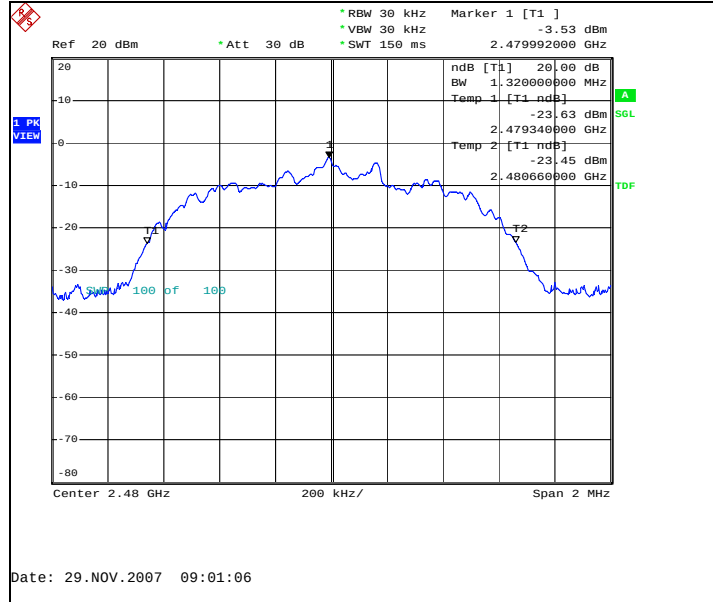

6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 2/3 of the 20 dB bandwidth

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	Passed


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

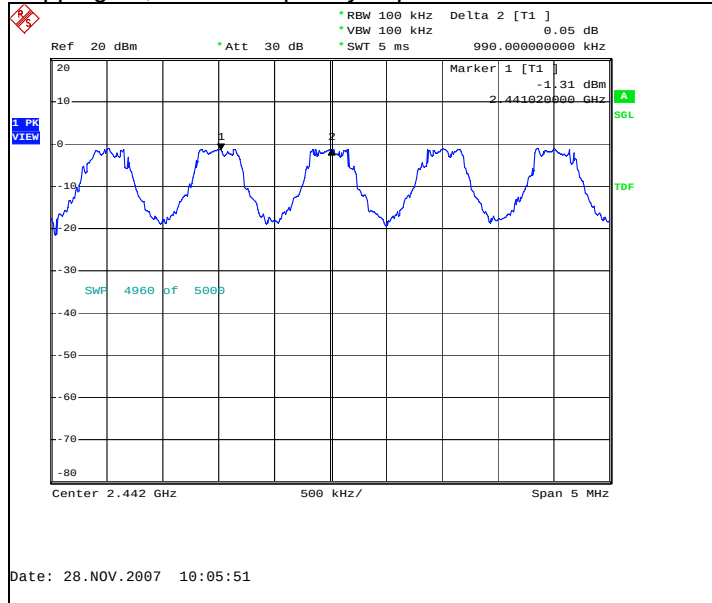

6.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1010	Passed

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

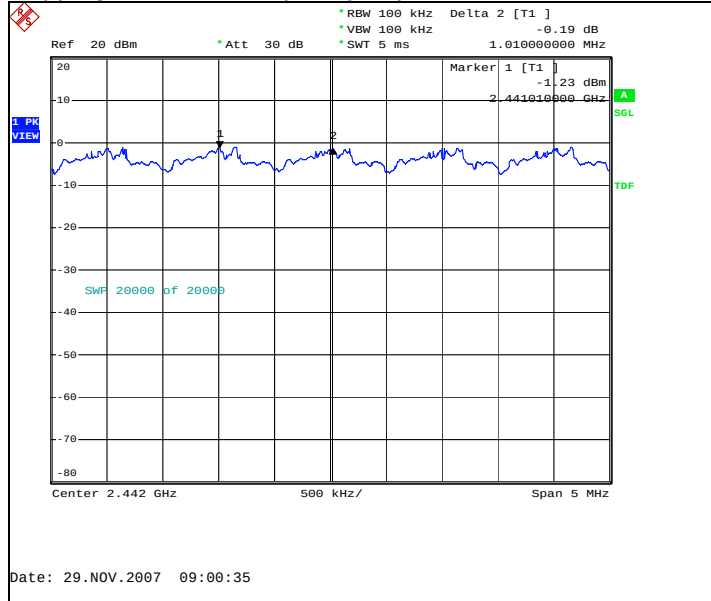

7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed


Hopping on, number of hopping frequencies

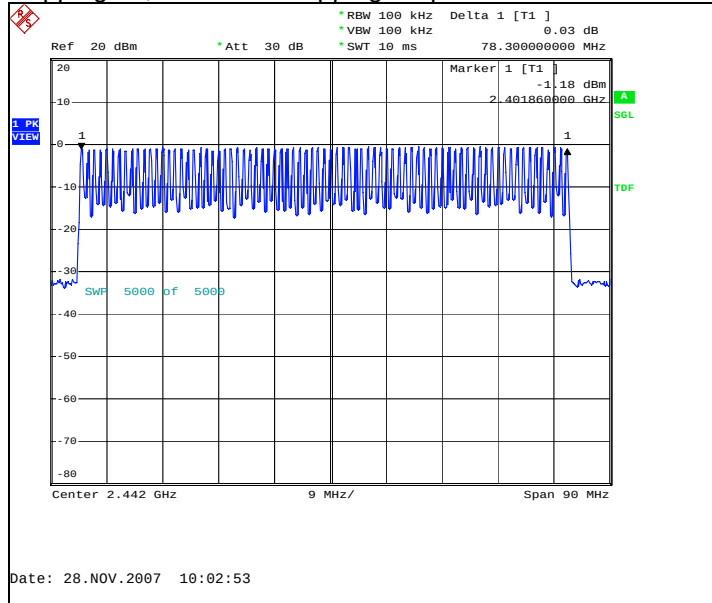

7.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed

Hopping on, number of hopping frequencies

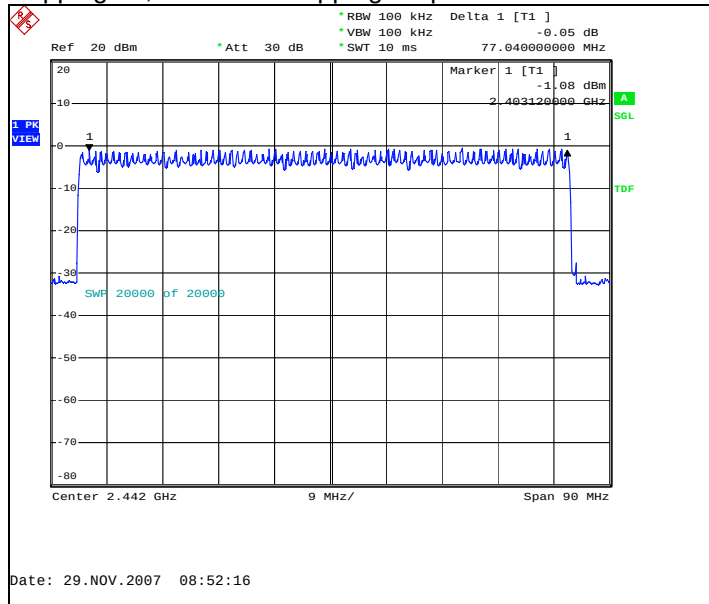

8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-391 DUT 29231
Accessories with DUT numbers	BL-4B DUT 29227, AC-3E DUT 29226, HS-47 DUT 29225
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.2 / 36.5 / 100.4
Date of measurements	29-11-2007
Measured by	Christian Andersen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

8.2. Bluetooth test results


8.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
82	2920	0.239440	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

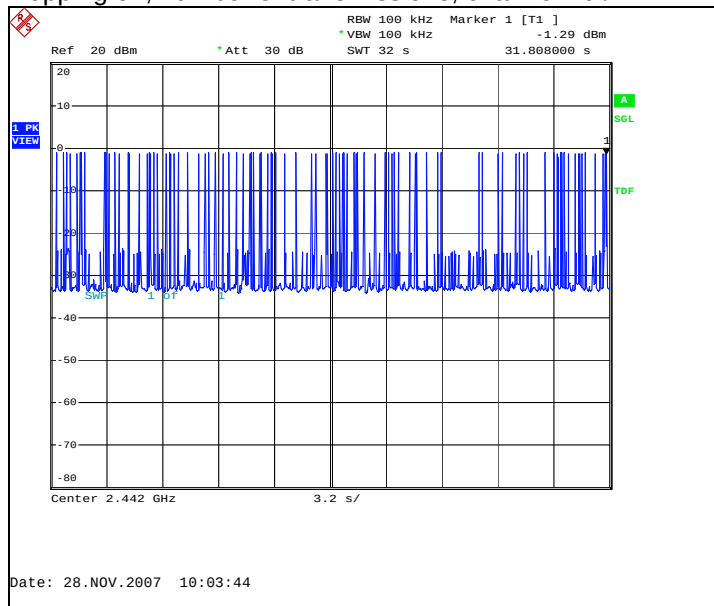


Hopping on, duration of one transmission, channel 40 / 2442 MHz

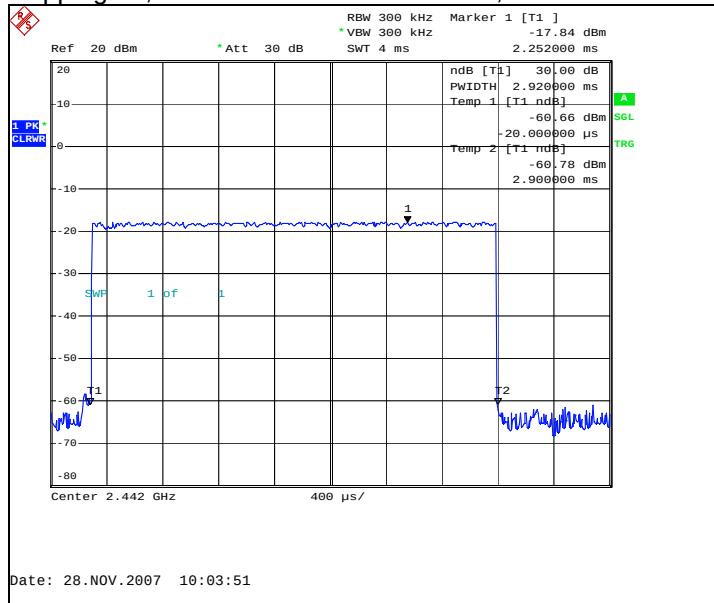


8.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
101	2920	0.294920	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

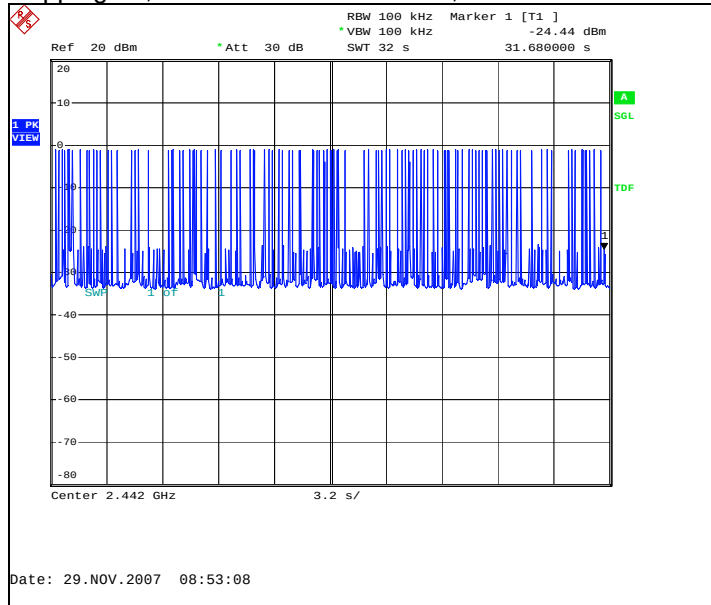

Hopping on, duration of one transmission, channel 40 / 2442 MHz

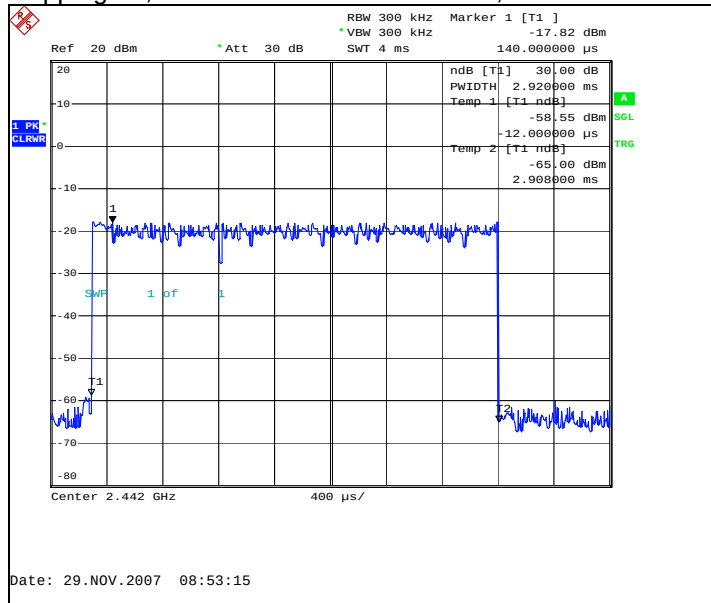

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl µWave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl µWave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl µWave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B