

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0847_02.doc	Date of Report:	25-Nov-2008
Number of pages:	38	Customer's Contact person:	Helen Hu
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-495 (HW: 0201), Battery; BL-5C, Headset; WH-102 HS-125, AC Charger; AC-3E		
FCC ID:	QTLRM-495	IC:	661AB-RM495
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	06-Nov-2008
Testing completed	25-Nov-2008
The customer's contact person	Helen Hu
Test Plan referred to	T:\Projects\RM-495\TestPlan_RS\RS_testplan_RM-495.xls
Notes	None
Document name	T:\Projects\RM-495\EMC\Results\FCC\Cph_FCC_0847_02.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-495	004401/10/407330/5	0201	-	ab07w47-08w42	25480
Battery	BL-5C 1020 mAh	0670400363563P391213705916	-	-	-	25485
Headset	WH-102 HS-125	0694325830512600423	-	-	-	25487
AC Charger	AC-3E	3997916346161300282;0675370	-	-	-	29177
Phone	RM-495	004401/10/407356/0	0201	-	ab07w41-08w42	26901
Battery	BI-5C 1020 mAh	0670400363563P391213705995	-	-	-	26912
Headset	HS-125 / WH-102	0694325830512600037	-	-	-	26910
AC charger	AC-3E	4419298322052137241;0675370	-	-	-	26915
Phone	RM-495	004401/10/407347/9	0201	-	ab07w47-08w42	26918
Battery	BL-5C	0670400462040P414C21027807	-	-	-	26896
AC charger	AC-3E	4419298322052129500;0675370	-	-	-	26897
Headset	HS-125 / WH-102	0694325830512600591	-	-	-	26911

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	Passed
15.247(d)	A8.5	Band edge compliance of RF emissions	Passed
15.247(d)	A8.5	Spurious RF conducted emissions	Passed
15.247(d), 15.209	A8.5	Spurious radiated emissions	Passed
15.207	7.2.2	AC power line conducted emissions	Passed
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	Passed
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit.....	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit.....	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	23
7.1. Test method and limit.....	23
7.2. Bluetooth Test results	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	26
8.1. Test method and limit.....	26
8.2. Bluetooth Test results	27
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	30
9.1. Test method and limit.....	30
9.2. Bluetooth Test results	31
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	32
10.1. Test method and limit.....	32
10.2. Bluetooth Test results	33
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	34
11.1. Test method and limit.....	34
11.2. Bluetooth test results.....	35


12.	Test Equipment	37
12.1.	Conducted measurements	37
12.2.	Radiated measurements	37

2. Test setups


2.1. Conducted RF test setup

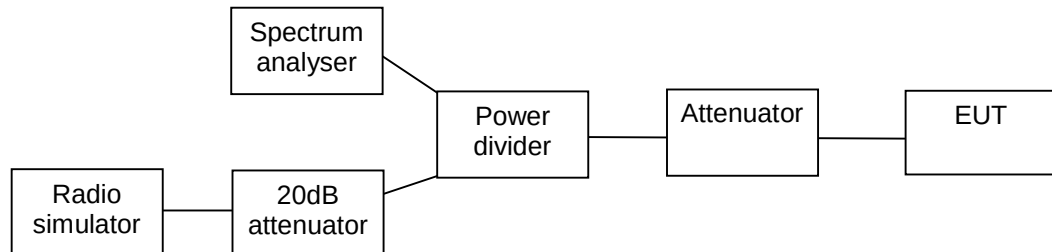

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

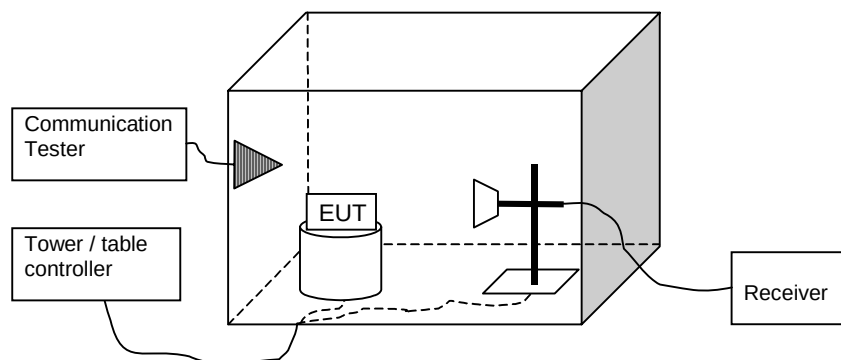

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.10	1.023	Pass
40 / 2442	0.50	1.122	Pass
78 / 2480	0.60	1.148	Pass


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

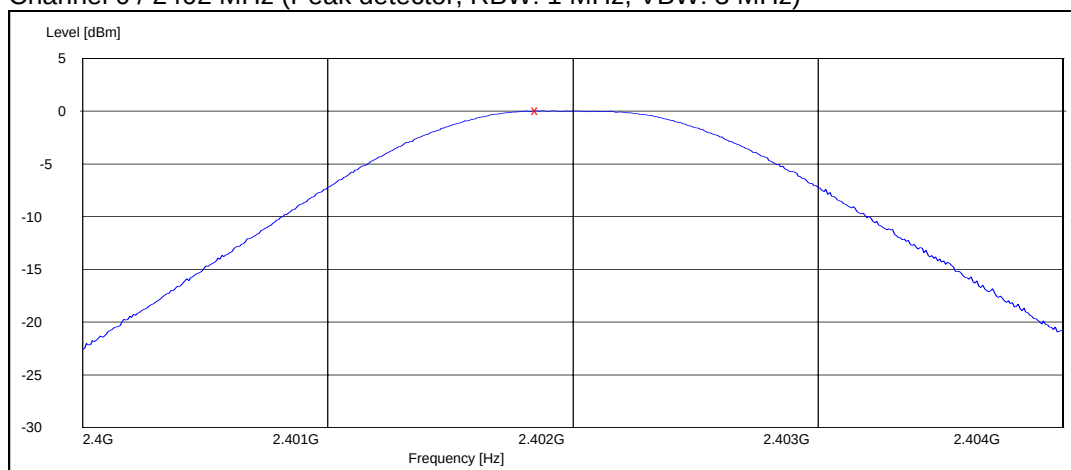

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

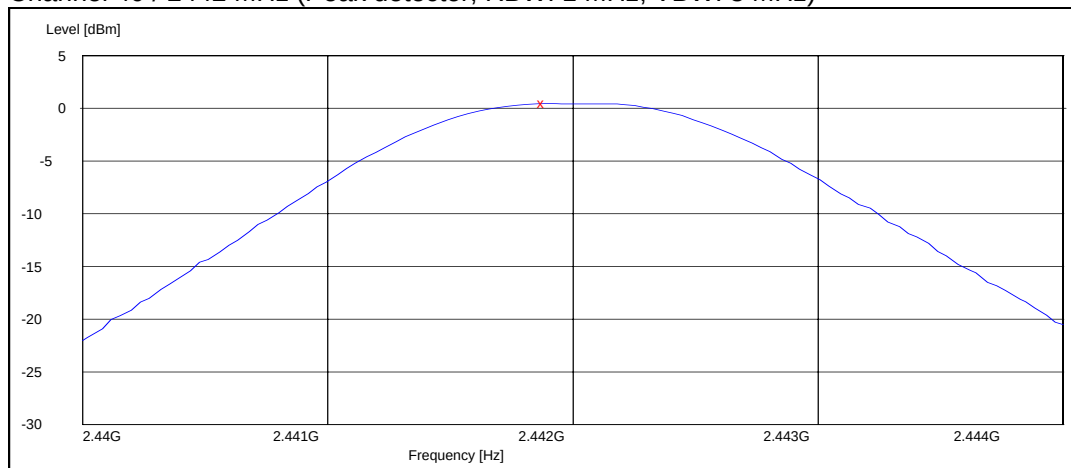


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

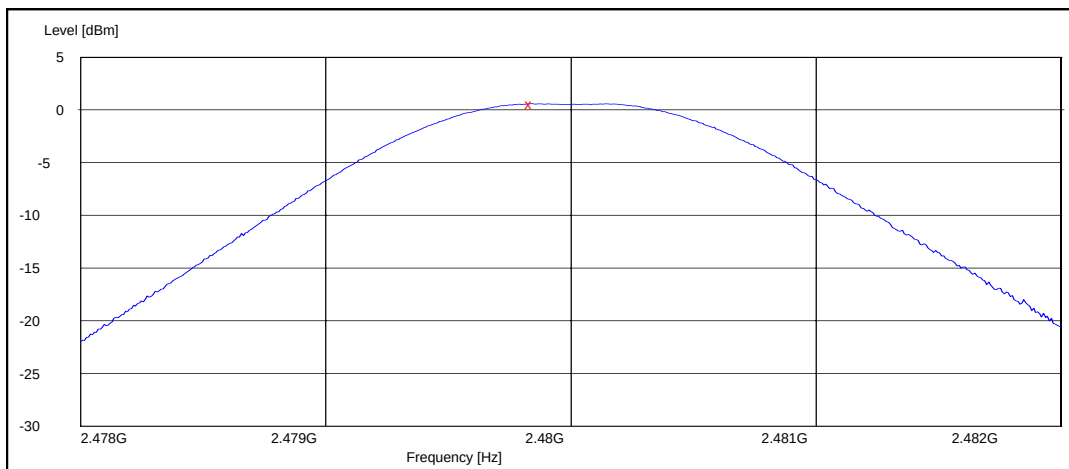


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	2.00	1.585	Pass
40 / 2442	2.40	1.738	Pass
78 / 2480	2.60	1.820	Pass


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

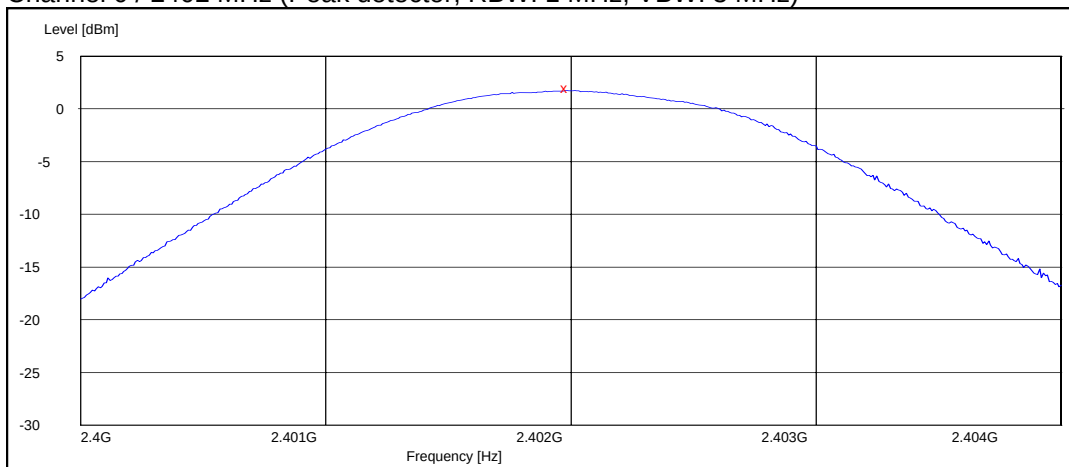

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

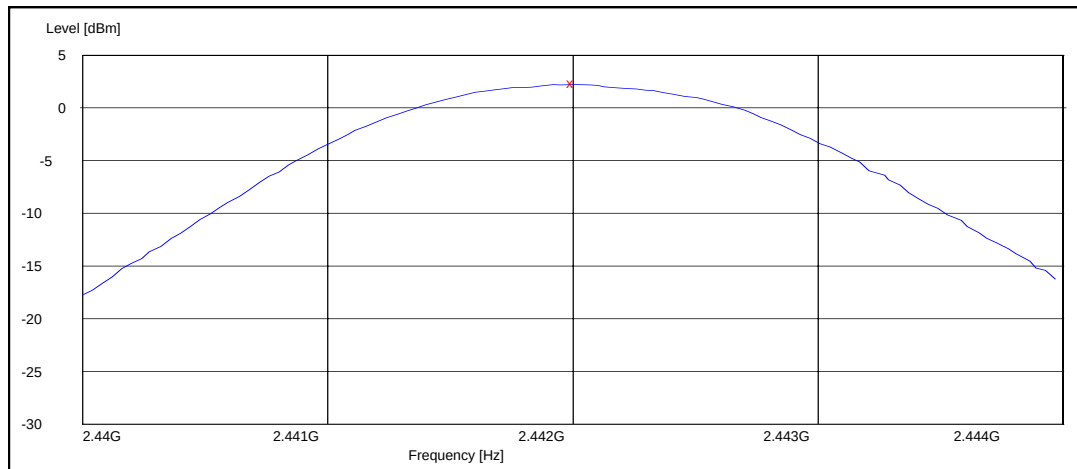

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

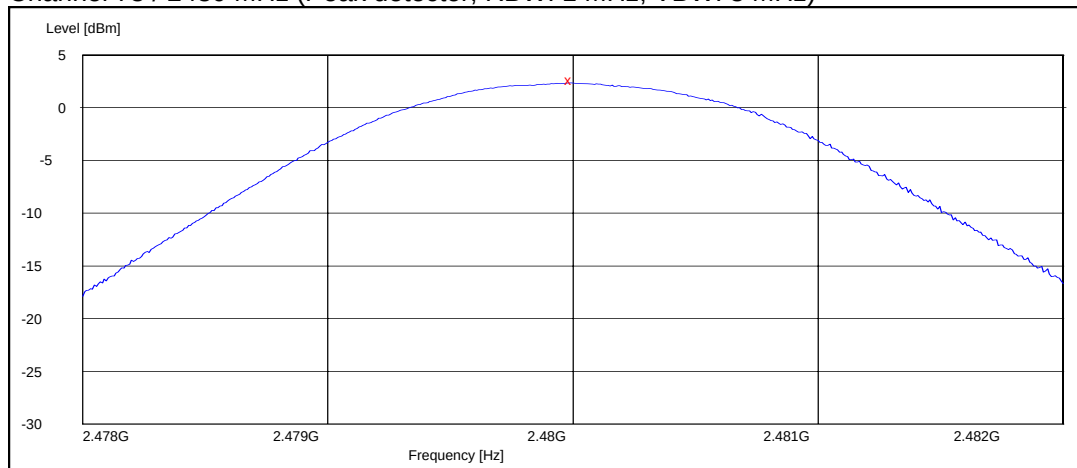

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-495 DUT 25480
Accessories with DUT numbers	BL-5C DUT 25485, WH-102 HS-125 DUT 25487, AC-3E DUT 29177
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 41 / 102.7
Date of measurements	17-Nov-2008
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

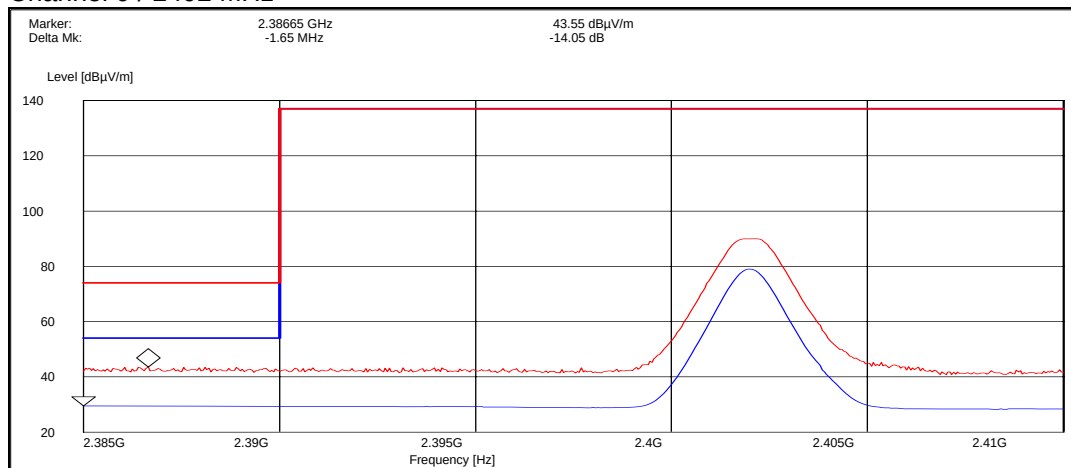


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	43.50	Passed
Average	29.50	Passed

Channel 78 / 2480 MHz

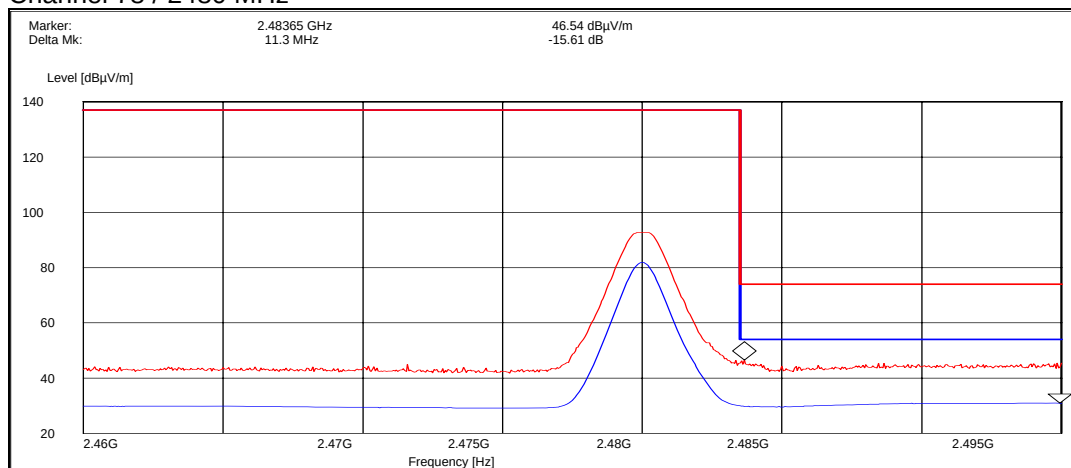


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	46.50	Passed
Average	30.90	Passed

Hopping on, low end

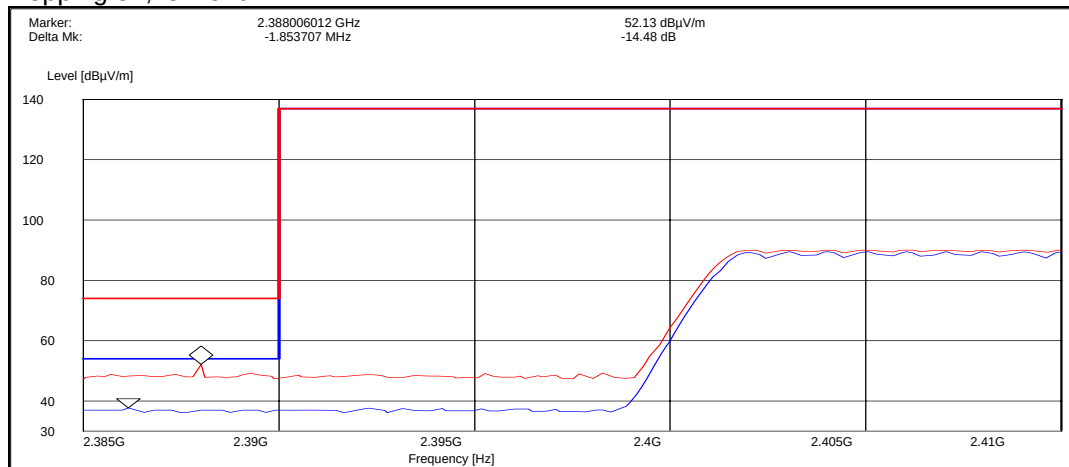

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	52.10	Passed
Average	37.60	Passed


Hopping on, high end

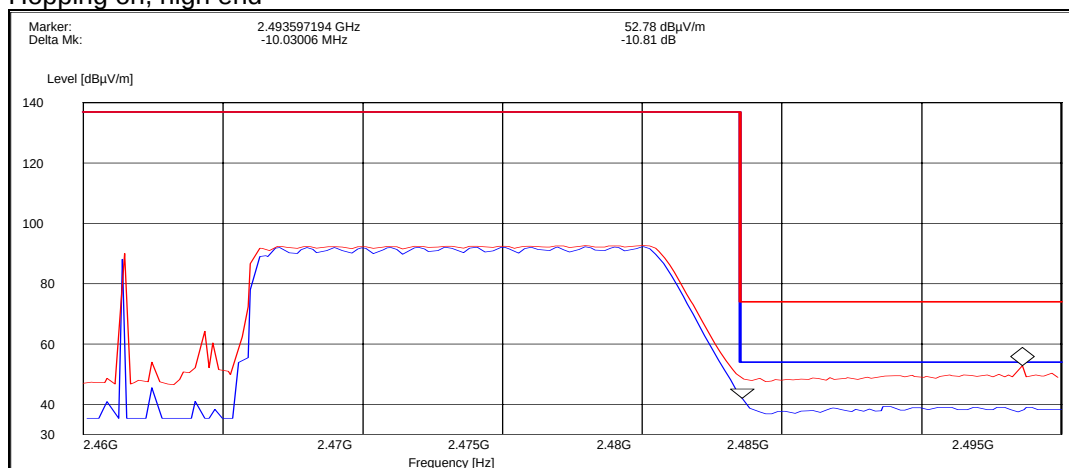

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	52.80	Passed
Average	42.00	Passed


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

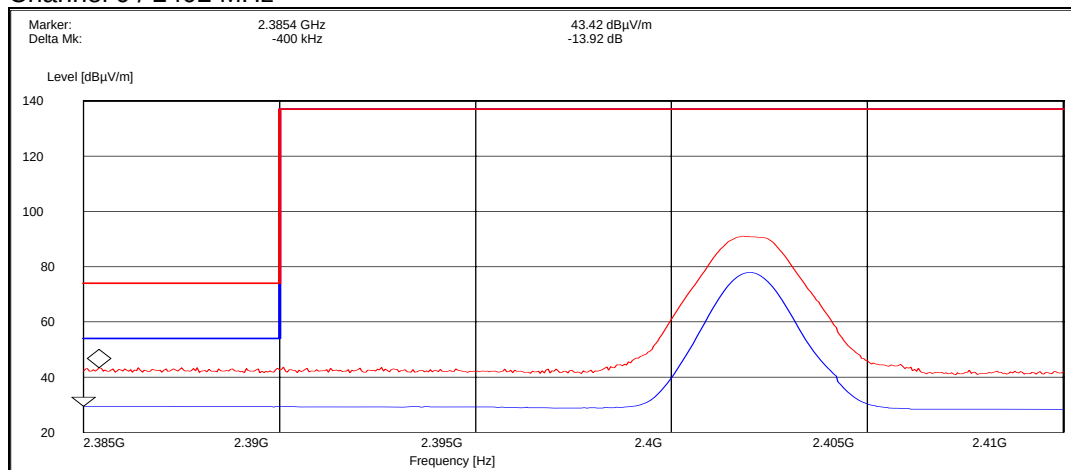


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	43.40	Passed
Average	29.50	Passed

Channel 78 / 2480 MHz

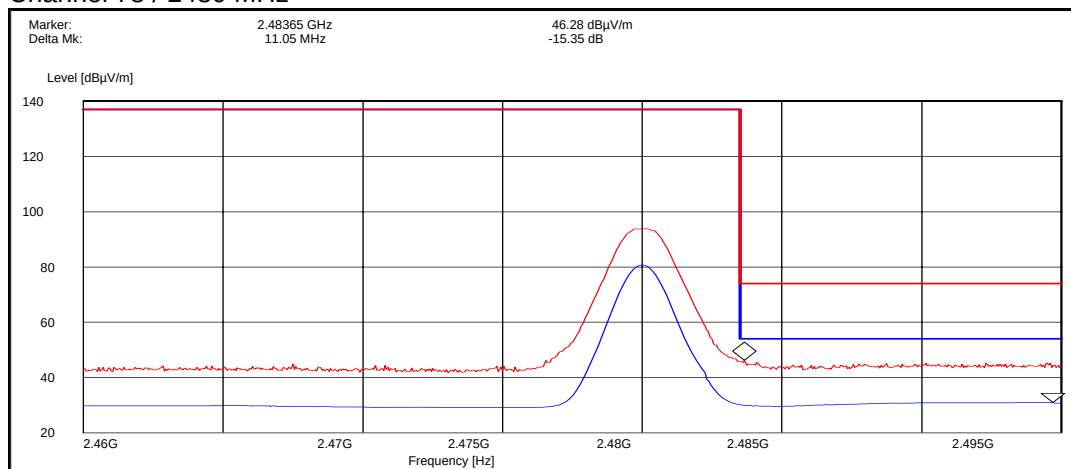


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	46.30	Passed
Average	30.90	Passed

Hopping on, low end

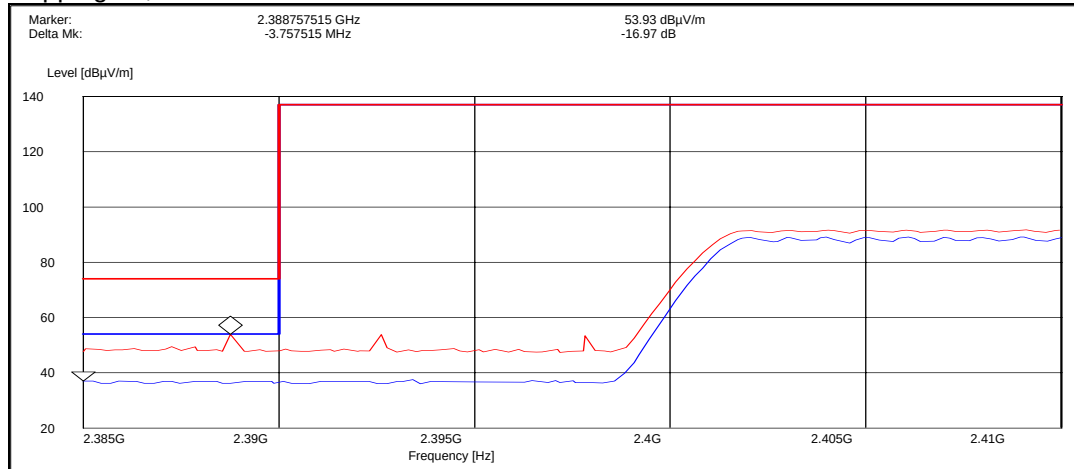

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	53.90	Passed
Average	37.00	Passed

Hopping on, high end

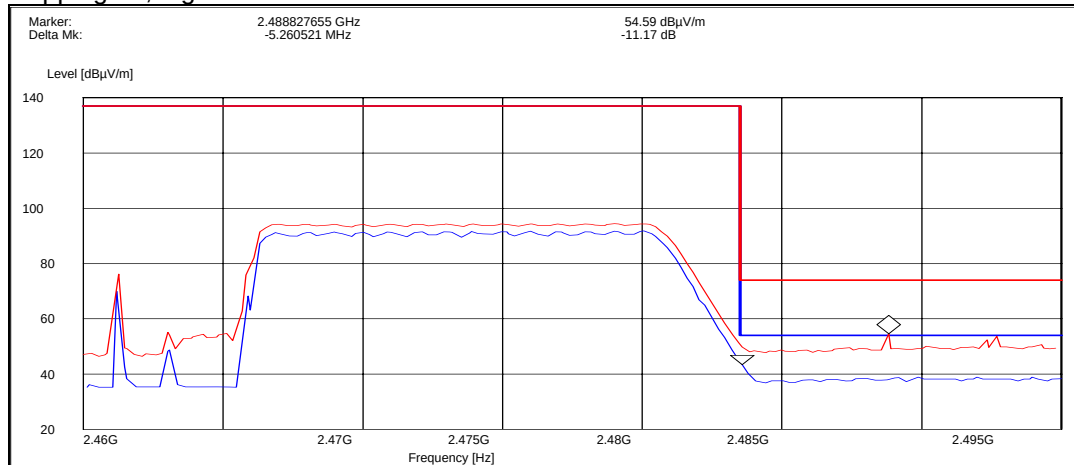

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	54.60	Passed
Average	43.40	Passed

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

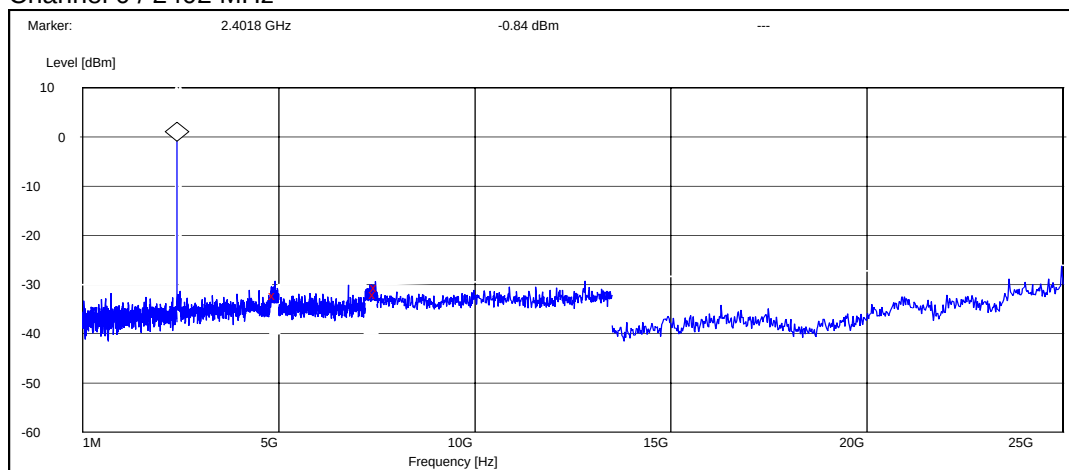

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4902.000000	-31.257574	Pass
7461.000000	-31.057574	Pass
7500.000000	-29.757574	Pass


Channel 40 / 2442 MHz

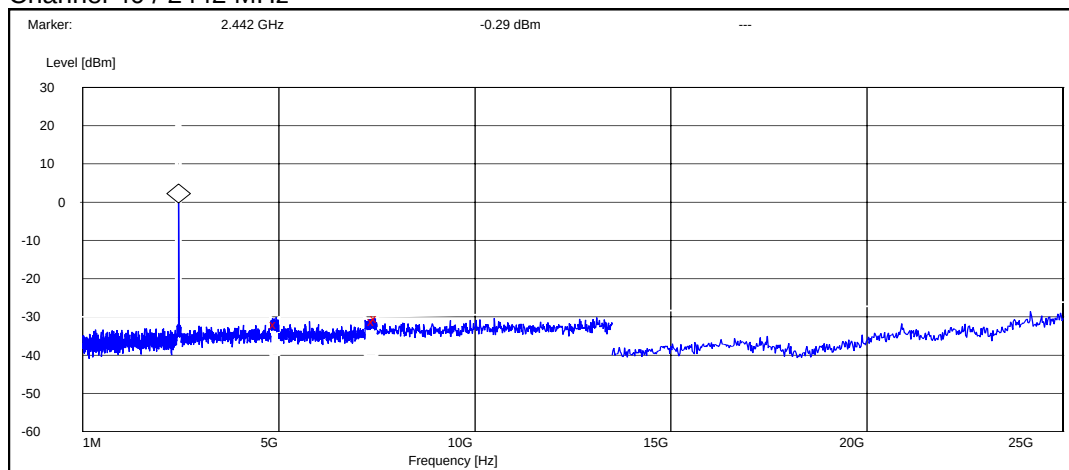

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4929.600000	-31.611453	Pass
7440.600000	-30.811453	Pass
7500.000000	-30.211453	Pass

Channel 78 / 2480 MHz

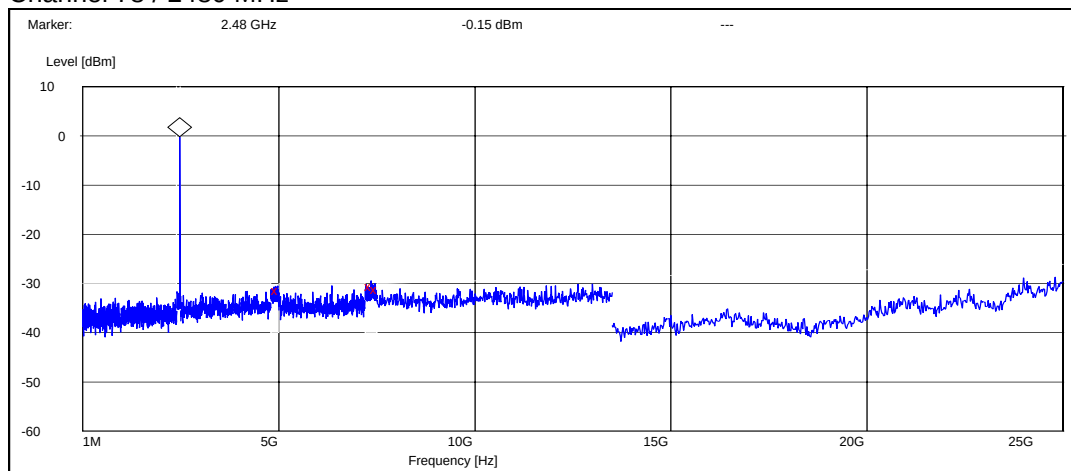


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4972.000000	-31.147424	Pass
7350.000000	-30.447424	Pass
7500.000000	-31.047424	Pass

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

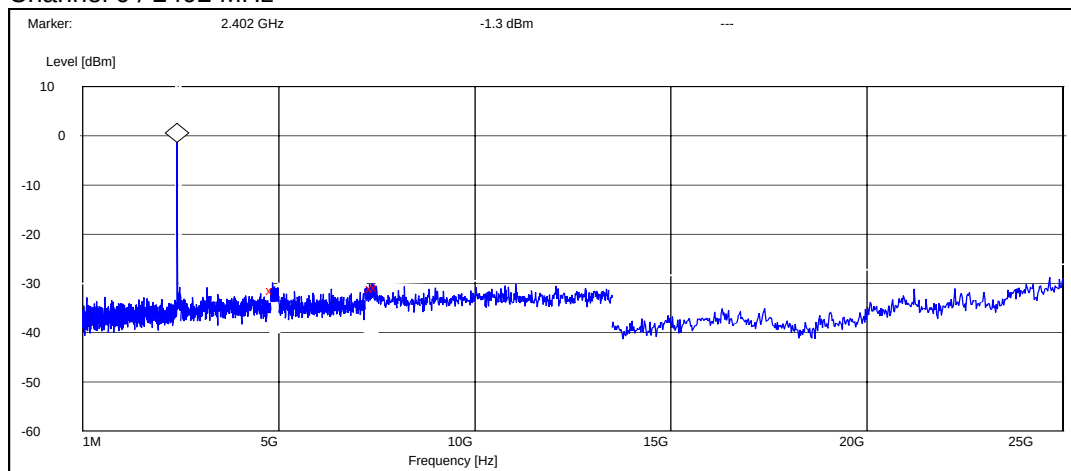

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4836.800000	-30.204701	Pass
7378.200000	-29.804701	Pass
7500.000000	-29.504701	Pass


Channel 40 / 2442 MHz

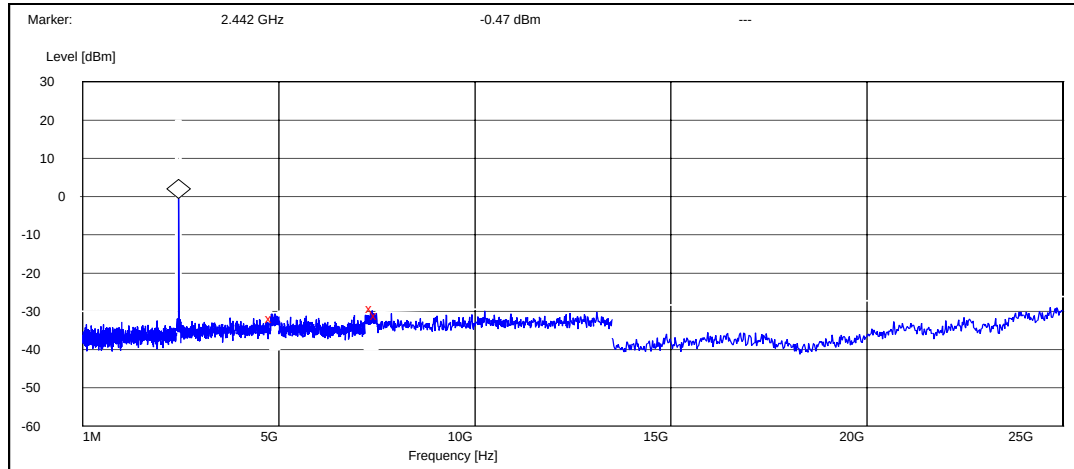

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4825.200000	-31.228485	Pass
7375.200000	-28.828485	Pass
7500.000000	-30.528485	Pass

Channel 78 / 2480 MHz

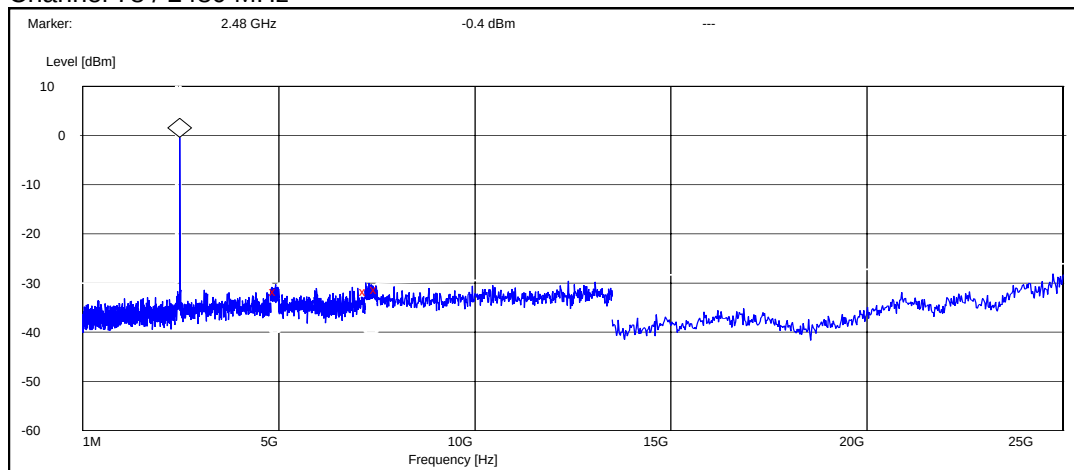

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4914.800000	-31.195189	Pass
7222.800000	-31.195189	Pass
7500.000000	-30.895189	Pass

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-495 DUT 25480
Accessories with DUT numbers	BL-5C DUT 25485, WH-102 HS-125 DUT 25487, AC-3E DUT 29177
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 41 / 102.7
Date of measurements	17-Nov-2008
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable centre.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	35.60	60.26	35.50	0.1	HORIZONTAL	Passed
7206.000000	41.70	121.62	32.80	8.9	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	22.50	13.34	22.40	0.1	HORIZONTAL	Passed
7206.000000	29.00	28.18	20.10	8.9	VERTICAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
38.195391	10.80	3.47	27.30	-16.5	VERTICAL	Passed
75.169940	24.30	16.41	49.80	-25.5	HORIZONTAL	Passed
75.188978	24.70	17.18	50.20	-25.5	HORIZONTAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	61.60	1202.26	64.80	-3.2	VERTICAL	Passed
7351.195391	42.60	134.90	33.20	9.4	HORIZONTAL	Passed
7426.851703	44.20	162.18	34.80	9.4	VERTICAL	Passed
17401.305611	52.10	402.72	29.90	22.2	HORIZONTAL	Passed
17905.305611	59.00	891.25	30.10	28.9	VERTICAL	Passed

*1947.80 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	60.60	1071.52	63.80	-3.2	VERTICAL	Passed
7350.195391	29.60	30.20	20.10	9.5	HORIZONTAL	Passed
7427.351703	30.40	33.11	21.00	9.4	VERTICAL	Passed
17405.805611	38.90	88.10	16.60	22.3	HORIZONTAL	Passed
17901.805611	45.70	192.75	16.70	29.0	VERTICAL	Passed

*1947.80 MHz frequency is coming from communication tester and thus ignored.

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	36.30	65.31	36.00	0.3	HORIZONTAL	Passed
7440.000000	43.00	141.25	33.50	9.5	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	23.40	14.79	23.10	0.3	HORIZONTAL	Passed
7440.000000	29.90	31.26	20.40	9.5	VERTICAL	Passed

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	35.60	60.26	35.50	0.1	HORIZONTAL	Passed
7206.000000	42.00	125.89	33.10	8.9	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	22.40	13.18	22.30	0.1	HORIZONTAL	Passed
7206.000000	28.90	27.86	20.00	8.9	VERTICAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.876353	12.00	3.98	28.30	-16.3	VERTICAL	Passed
74.969940	20.00	10.00	45.50	-25.5	HORIZONTAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	61.30	1161.45	64.50	-3.2	VERTICAL	Passed
7300.101202	43.00	141.25	33.50	9.5	VERTICAL	Passed
7341.183367	43.40	147.91	34.10	9.3	VERTICAL	Passed
7412.321643	42.50	133.35	33.00	9.5	VERTICAL	Passed
7431.859719	43.40	147.91	34.00	9.4	VERTICAL	Passed
17338.677355	52.00	398.11	30.20	21.8	VERTICAL	Passed
17980.463928	58.20	812.83	28.90	29.3	VERTICAL	Passed

*1947.80 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	60.60	1071.52	63.80	-3.2	VERTICAL	Passed
7298.601202	30.10	31.99	20.60	9.5	VERTICAL	Passed
7342.683367	30.00	31.62	20.70	9.3	VERTICAL	Passed
7408.321643	30.10	31.99	20.40	9.7	VERTICAL	Passed
7430.859719	30.40	33.11	21.00	9.4	VERTICAL	Passed
17340.177355	38.80	87.10	17.00	21.8	VERTICAL	Passed
17978.463928	45.30	184.08	16.00	29.3	VERTICAL	Passed

*1947.80 MHz frequency is coming from communication tester and thus ignored.

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	36.30	65.31	36.00	0.3	HORIZONTAL	Passed
7440.000000	43.70	153.11	34.20	9.5	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	23.40	14.79	23.10	0.3	HORIZONTAL	Passed
7440.000000	29.90	31.26	20.40	9.5	VERTICAL	Passed

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-494 Dut 26918
Accessories with DUT numbers	BL-5C Dut 26896, AC-3E Dut 26897, HS-125 Dut 26911
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20.7 / 35.5 101.0
Date of measurements	25-Nov-2008
Measured by	Allan F. Henriksen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

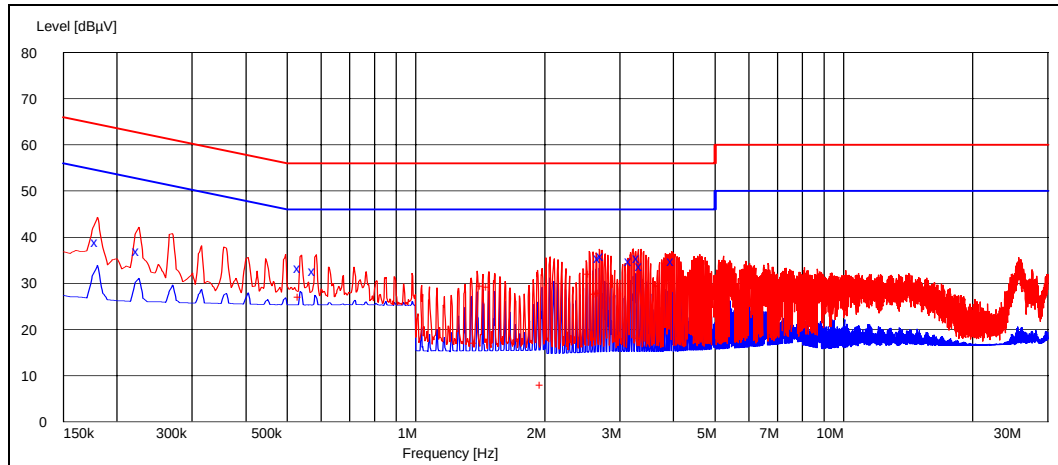

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.180000	38.90	L1	Passed
0.225000	36.90	L1	Passed
0.535000	33.30	L1	Passed
0.580000	32.70	L1	Passed
2.690000	35.40	N	Passed
2.740000	36.00	N	Passed
3.180000	34.80	N	Passed
3.320000	35.50	N	Passed
3.365000	33.80	N	Passed
3.995000	34.90	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.535000	27.00	L1	Passed
1.380000	17.00	N	Passed
1.430000	29.40	N	Passed
1.475000	29.30	N	Passed
1.970000	7.90	L1	Passed
2.555000	32.00	N	Passed
2.645000	27.70	L1	Passed
2.690000	27.80	L1	Passed
3.320000	18.20	N	Passed

7.2.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

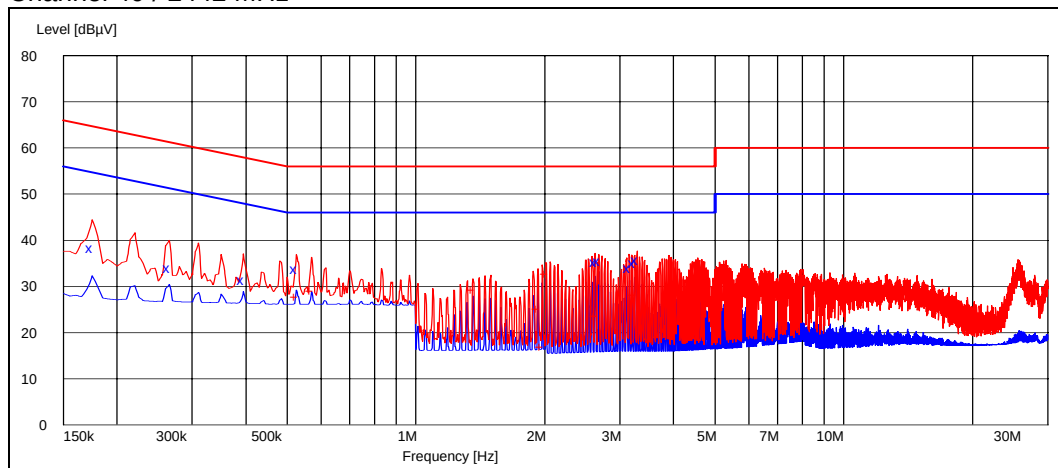

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.175000	38.30	L1	Passed
0.265000	33.90	L1	Passed
0.395000	31.40	L1	Passed
0.525000	33.80	L1	Passed
2.635000	35.30	N	Passed
2.680000	35.50	N	Passed
3.155000	33.90	N	Passed
3.245000	35.00	N	Passed
3.295000	35.70	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.525000	27.70	L1	Passed
0.570000	29.00	N	Passed
1.360000	29.10	N	Passed
1.930000	25.00	L1	Passed
1.965000	16.90	N	Passed
2.020000	32.80	N	Passed
2.635000	23.60	L1	Passed
3.250000	28.20	L1	Passed

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	904.000	Pass
40 / 2442	900.000	Pass
78 / 2480	900.000	Pass


Channel 0 / 2402 MHz

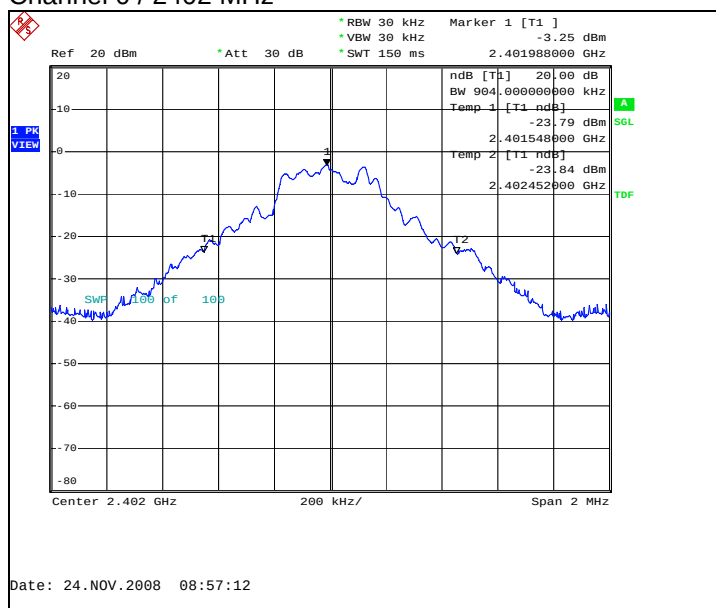

Channel 40 / 2442 MHz

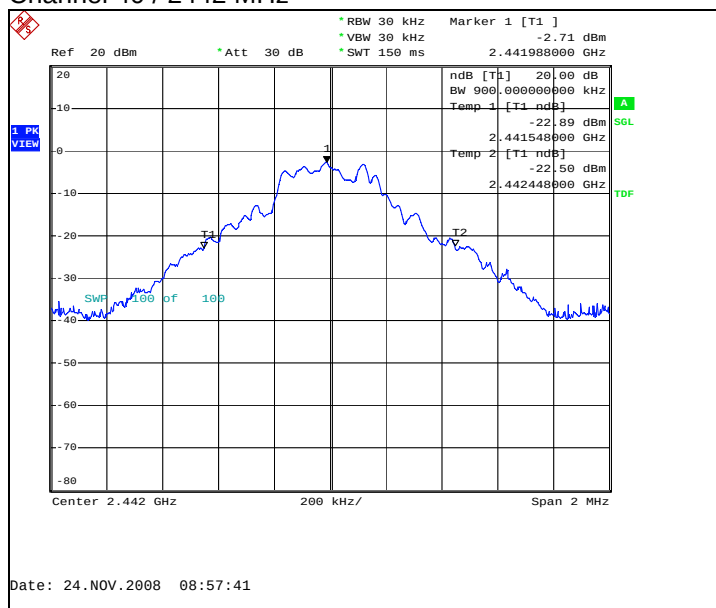


Channel 78 / 2480 MHz

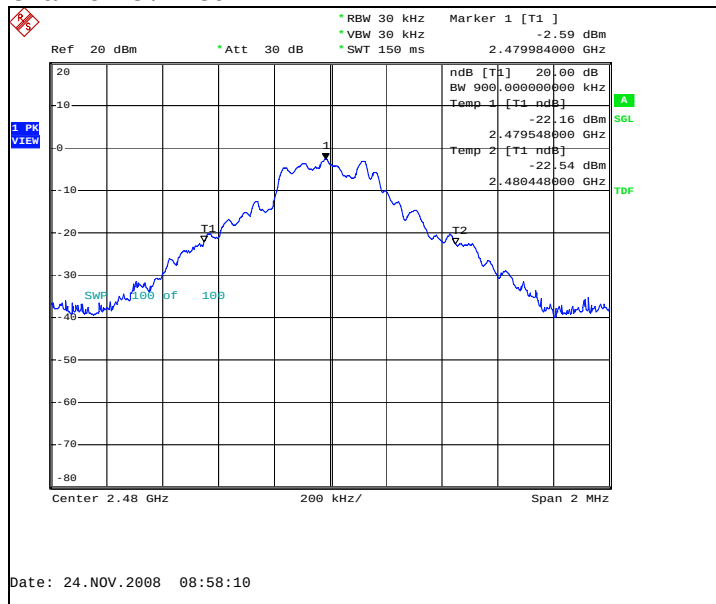


8.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1324.000	Pass
40 / 2442	1324.000	Pass
78 / 2480	1320.000	Pass


Channel 0 / 2402 MHz

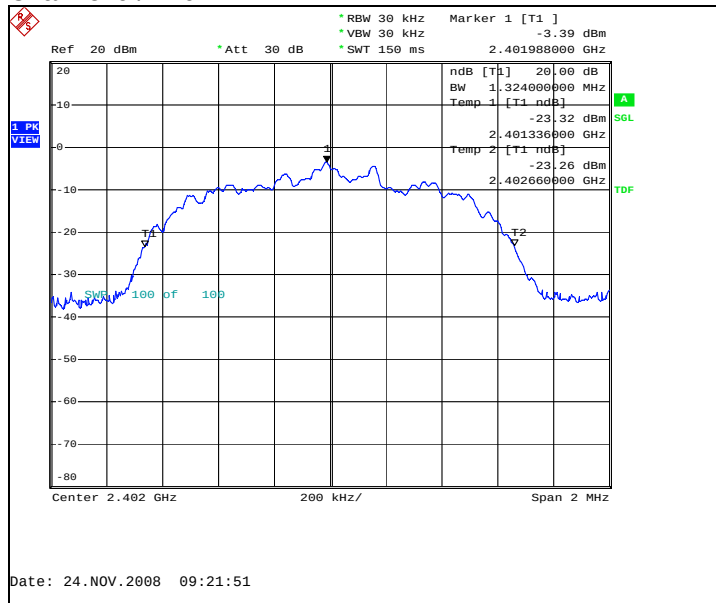

Channel 40 / 2442 MHz

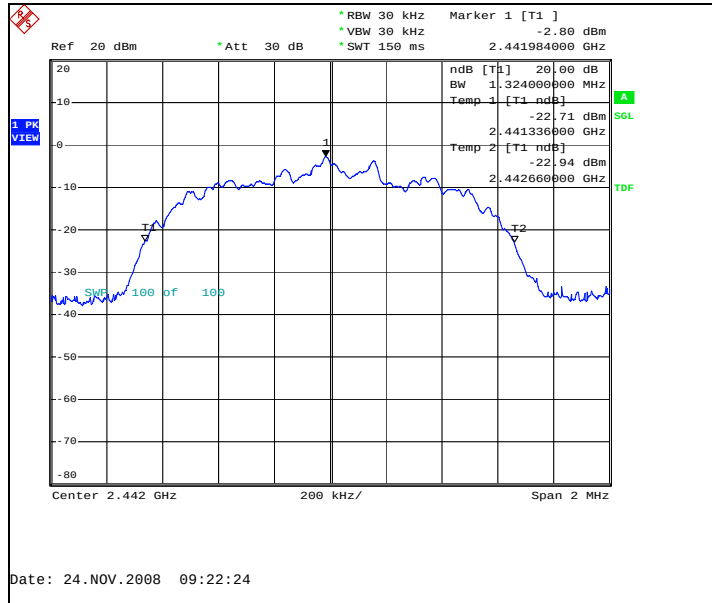

Channel 78 / 2480 MHz

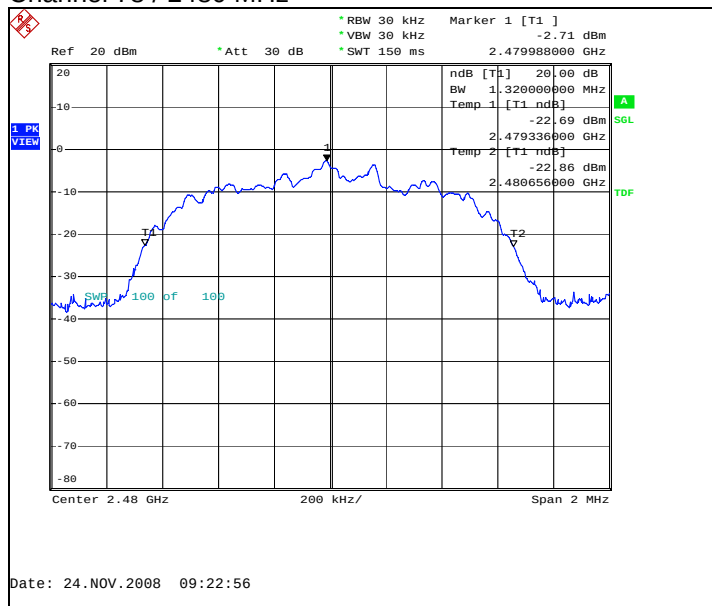

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
970	Pass


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

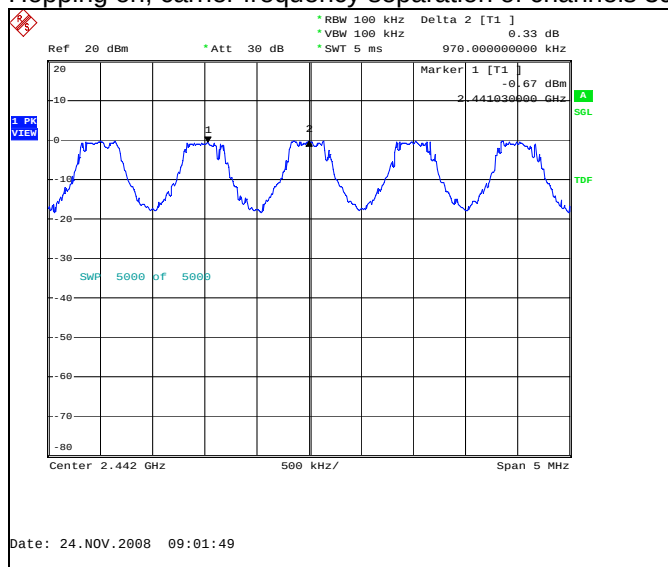

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	Pass

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

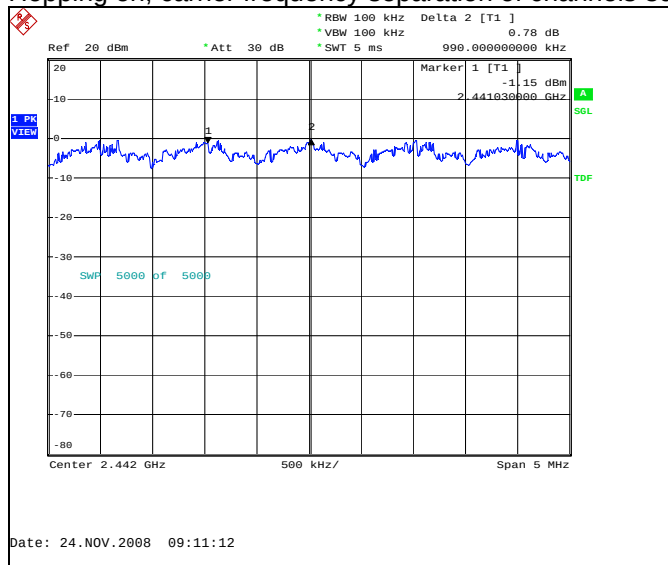

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	Pass


Hopping on, number of hopping frequencies

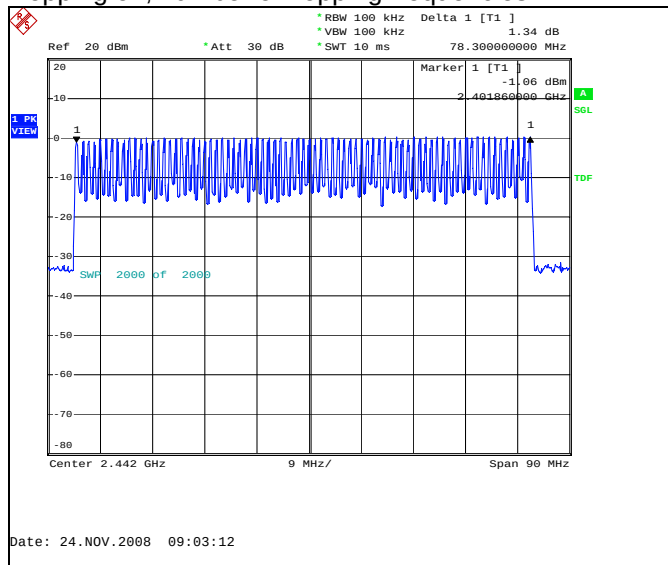

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	Pass

Hopping on, number of hopping frequencies

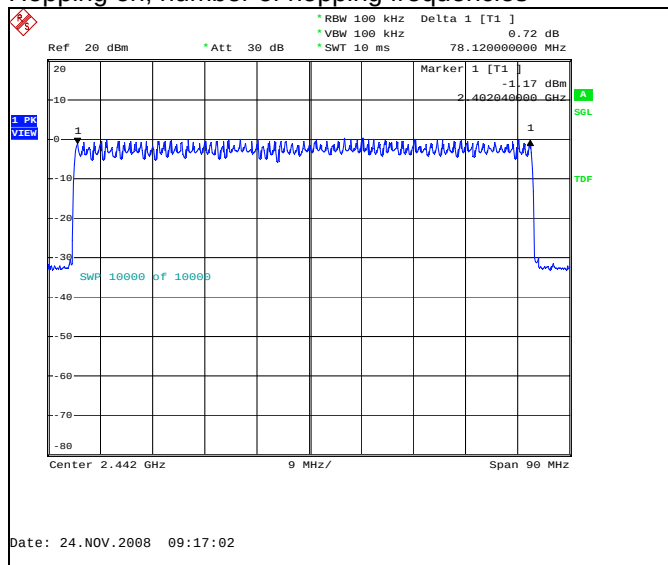

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-495 dut 26901, BL-5C dut 26912
Accessories with DUT numbers	HS-125 dut 26910, AC-3E dut 26915
Operation Voltage [V] / [Hz]	nominal
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23.5 / 34 99.55
Date of measurements	24-Nov-2008
Measured by	Jan Engelbrechtsen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
86	2,912	0.250432	Pass

Hopping on, number of transmissions, channel 40 / 2442 MHz

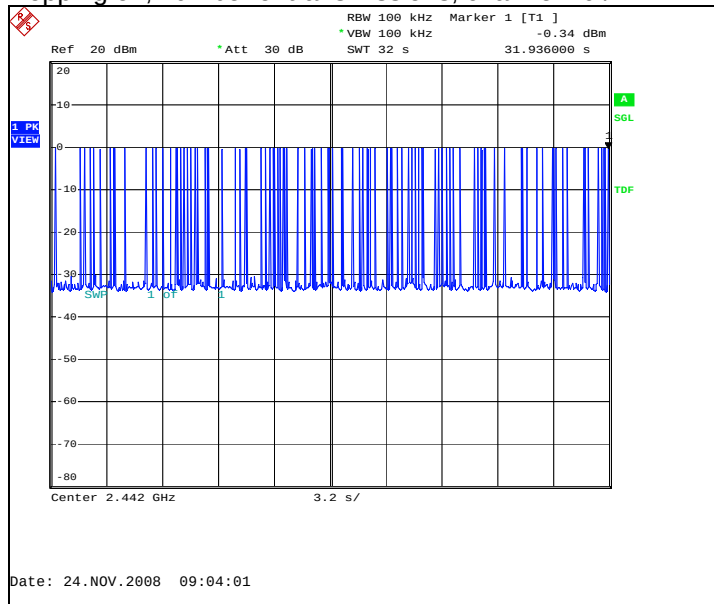


Hopping on, duration of one transmission, channel 40 / 2442 MHz

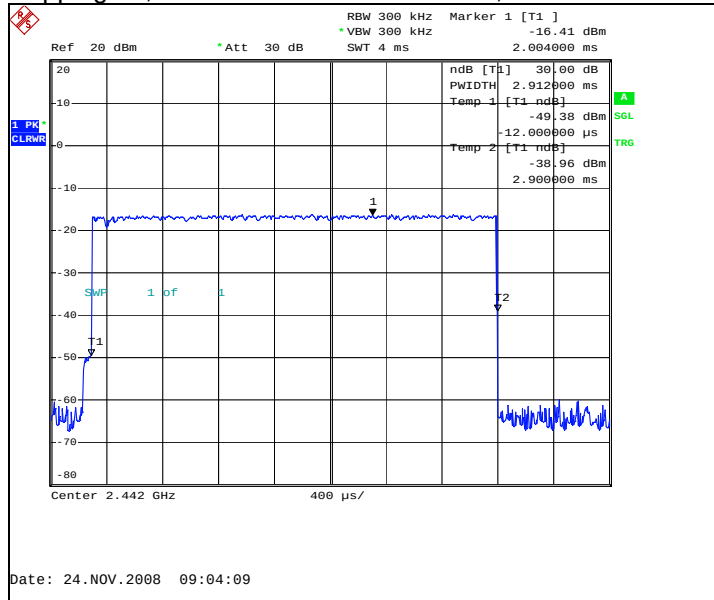


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
82	2,920	0.239440	Pass

Hopping on, number of transmissions, channel 40 / 2442 MHz

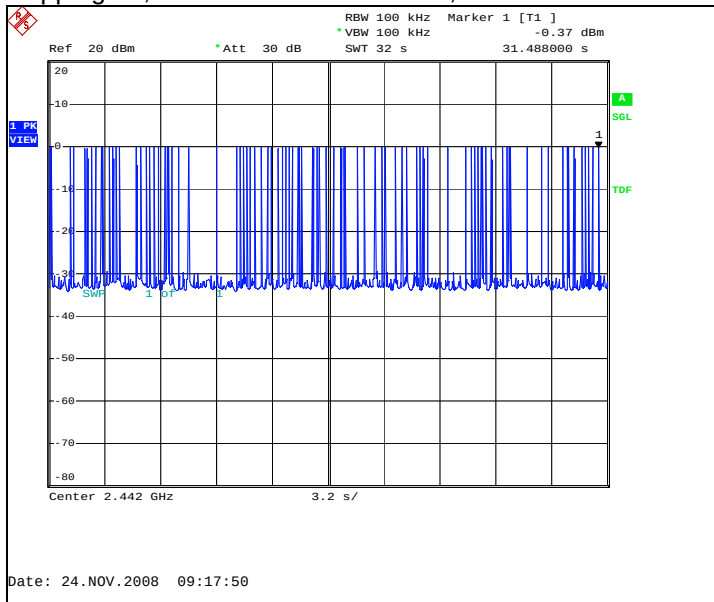

Hopping on, duration of one transmission, channel 40 / 2442 MHz

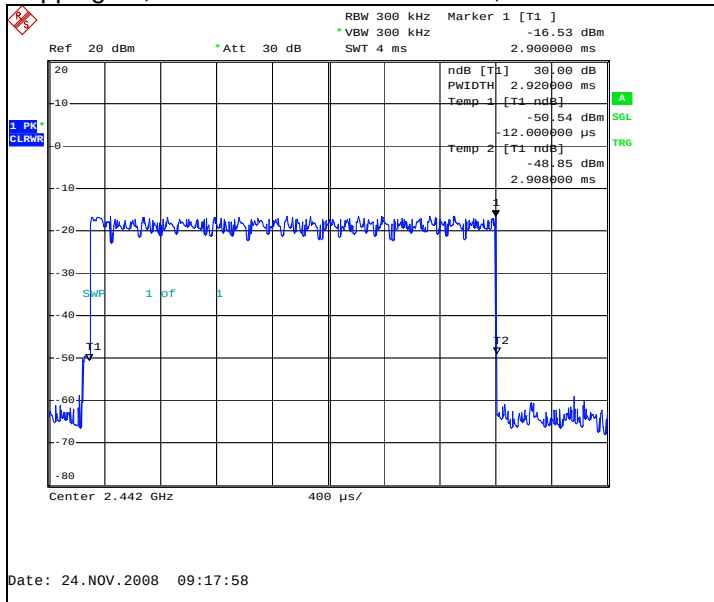

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Receiver 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	High pass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Controller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B