

FCC Part 22/24 Compliance Test Report

Test Report no.:	Bej_FCC_0925_11.doc	Date of Report:	01-Jul-2009
Number of pages:	16	Customer's Contact person:	Hu Dongji
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-579 / Battery BL-5C / AC-charger AC-3 / Headset HS-125 / Dummy Battery SD-4MOD.		
FCC ID:	QTLRM-579	IC:	661AB-RM579
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jia Dongsheng, Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	16-Jun-2009
Testing completed	30-Jun-2009
The customer's contact person	Hu Dongji
Test Plan referred to	T:\Projects\RM-579\TestPlan_RS\RS_testplan_RM-579.xls
Notes	-
Document name	T:\Projects\RM-579\EMC\Results\FCC\Bej_FCC_0925_11.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-579	004401105985697	0112	-	tmy7.35	51335
Phone	RM-579	004401105985432	0112	-	tmy7.35	51336
Battery	BL-5C	0670400363563P3452137	-	-	-	51129
Battery	BL-5C	0670400382066Q14105DR77288	-	-	-	51337
AC-charger	AC-3E	4090498272171205979;0675370	-	-	-	51338
Headset	HS-125	0694325830512600589	-	-	-	51057
Dummy Battery	SD-4MOD	-	-	-	-	51339

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in <i>RSS-GEN</i> or <i>RSS-132</i>	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in <i>RSS-GEN</i> or <i>RSS-133</i>	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Beijing Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. WCDMA 850 Test results	8
2.6. WCDMA 1900 Test results	8
3. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)	9
3.1. Test setup	9
3.2. Test method and limit	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	10
3.5. WCDMA 850 Test results	11
3.6. WCDMA 1900 Test results	11
4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)	12
4.1. Test setup	12
4.2. Test method and limit	12
4.3. GSM 850 Test results	13
4.4. GSM 1900 Test results	13
5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)	14
5.1. Test setup	14
5.2. Test method and limit	14
5.3. GSM 850 Test results	15
5.4. GSM 1900 Test results	15
6. Test Equipment	16
6.1. Conducted measurements	16
6.2. Radiated measurements	16

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-579, DUT51335
Accessories with DUT numbers	BL-5C, DUT51337; AC-3E, DUT51338; HS-125, DUT51057
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 56 / 99.3
Date of measurements	24-Jun-2009
Measured by	Zou Ming

2.1. Test setup

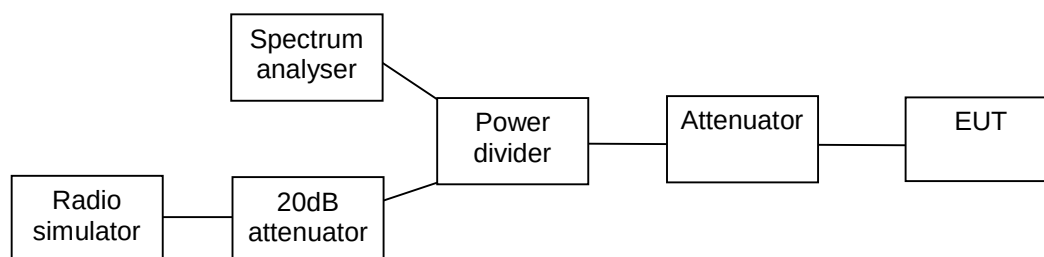


2.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standard RSS-GEN.


2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	242.000
EGPRS	244.000

GSM mode, channel 190 / 836.6 MHz

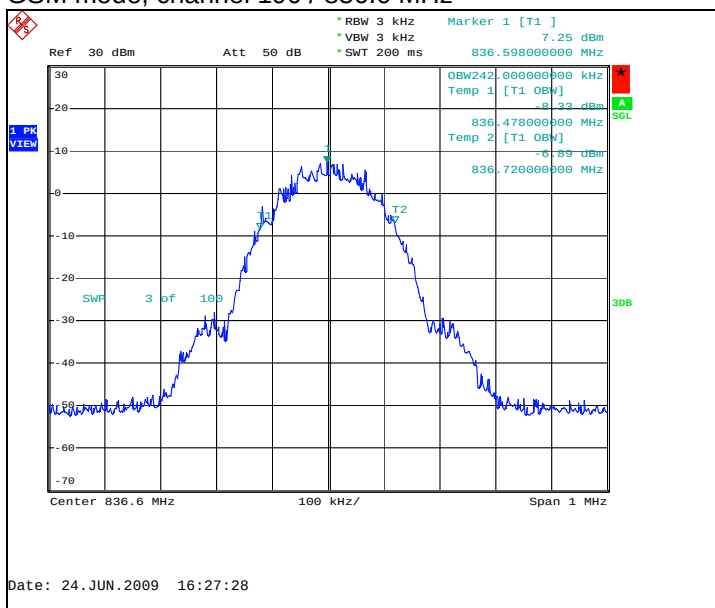


EGPRS mode, channel 190 / 836.6 MHz

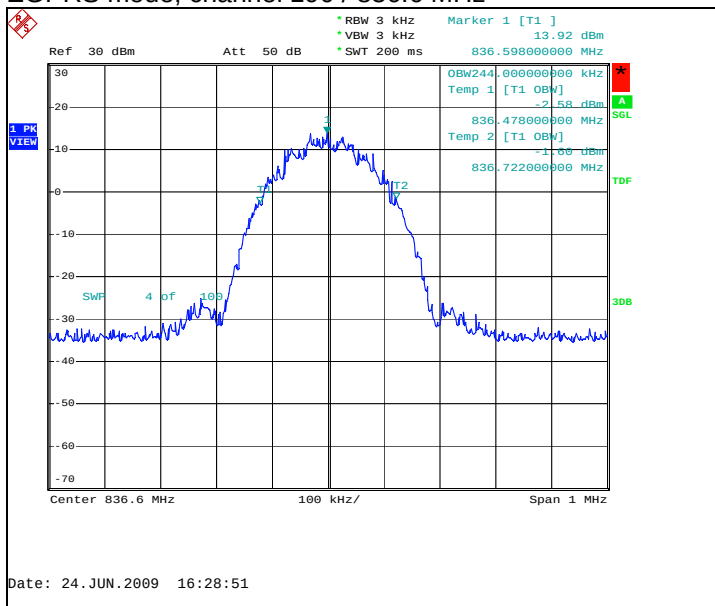


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	246.000
EGPRS	242.000

GSM mode, channel 661 / 1880.0 MHz

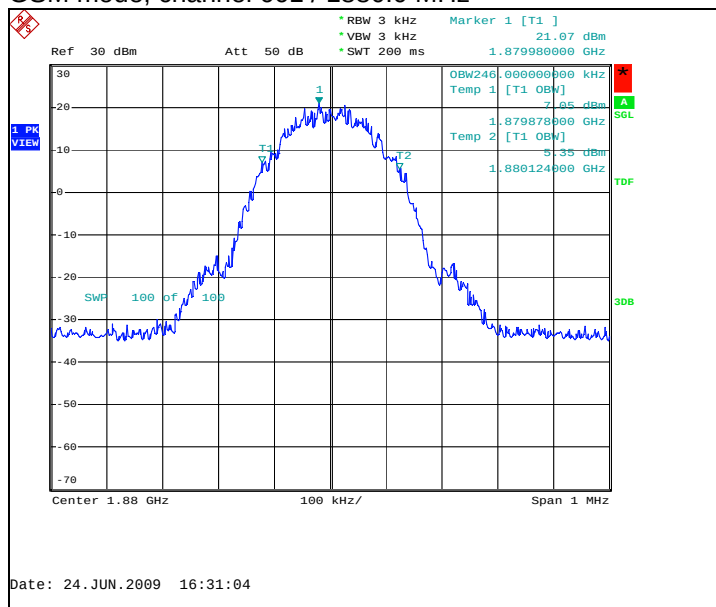


EGPRS mode, channel 661 / 1880.0 MHz

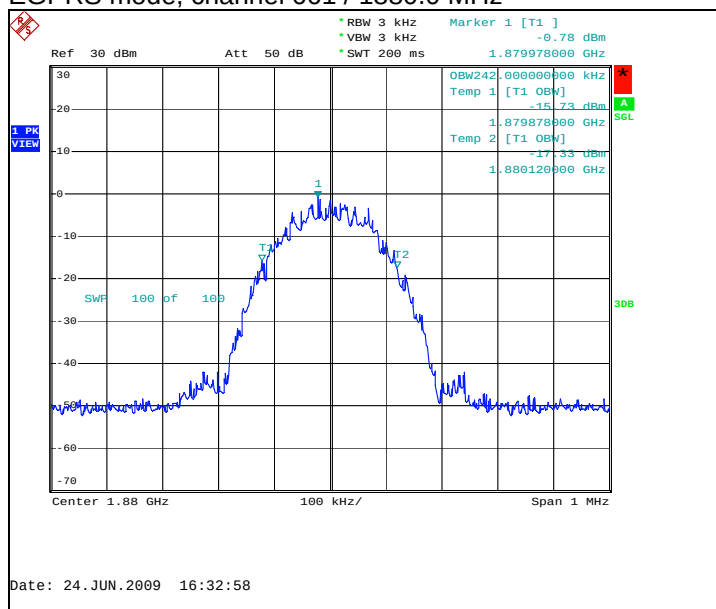

2.5. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4160.000


Channel 4175 / 835.0 MHz

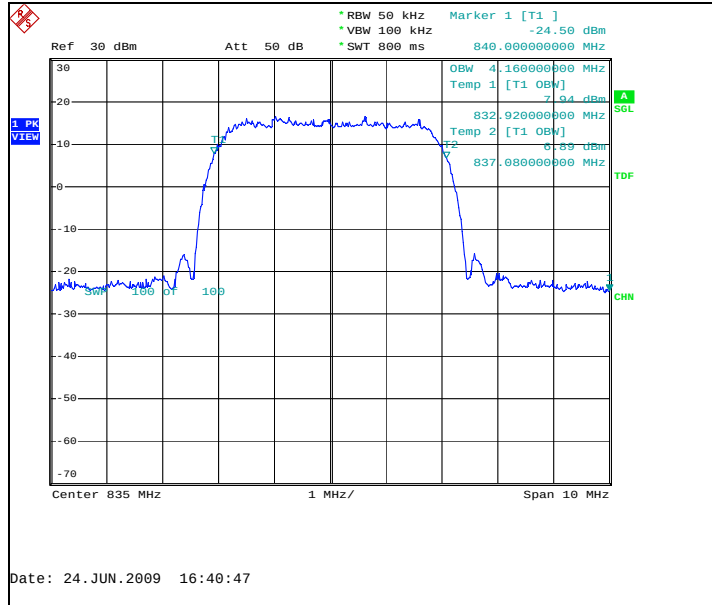

2.6. WCDMA 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4160.000


Channel 9400 / 1880.0 MHz

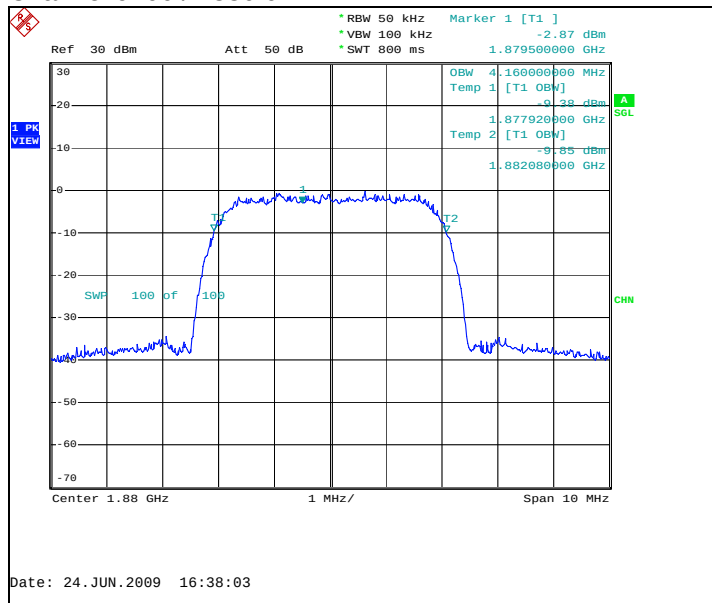

3. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-579, DUT51336
Accessories with DUT numbers	BL-5C, DUT51337; AC-3E, DUT51338; HS-125, DUT51057
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 57 / 99.4
Date of measurements	25-Jun-2009
Measured by	Zou Ming

3.1. Test setup

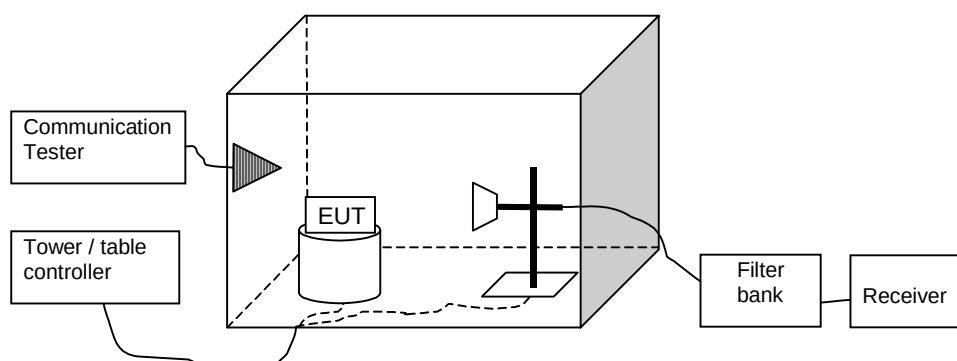

3.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1900	30 - 18000	-13

3.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-38.40	0.14454	-43.80	5.40	HORIZONTAL	PASSED
2509.820641	-43.40	0.04571	-55.50	12.10	VERTICAL	PASSED

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-44.00	0.03981	-49.40	5.40	HORIZONTAL	PASSED
2509.820641	-47.20	0.01905	-59.30	12.10	VERTICAL	PASSED

3.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5639.778557	-41.10	0.07762	-53.80	12.70	VERTICAL	PASSED
7520.042084	-43.10	0.04898	-58.70	15.60	VERTICAL	PASSED

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5639.778557	-45.10	0.03090	-57.80	12.70	VERTICAL	PASSED
7520.042084	-47.80	0.01660	-63.40	15.60	VERTICAL	PASSED

3.5. WCDMA 850 Test results

Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1667.437876	-41.00	0.07943	-46.50	5.50	HORIZONTAL	PASSED
2508.615230	-49.90	0.01023	-62.00	12.10	HORIZONTAL	PASSED

3.6. WCDMA 1900 Test results


Channel 9400 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3752.498998	-54.90	0.00324	-64.30	9.40	VERTICAL	PASSED
3761.515030	-49.90	0.01023	-59.30	9.40	VERTICAL	PASSED
5635.774549	-46.90	0.02042	-59.50	12.60	VERTICAL	PASSED
7501.002004	-51.50	0.00708	-67.40	15.90	VERTICAL	PASSED

4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-579, DUT51335
Accessories with DUT numbers	BL-5C, DUT51129; AC-3E, DUT51338; HS-125, DUT51057
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 56 / 99.3
Date of measurements	24-Jun-2009
Measured by	Jia Dongsheng

4.1. Test setup

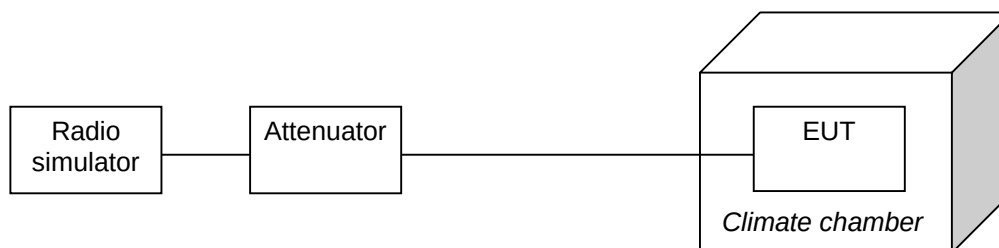

4.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-18	-0.0215
40	12	0.0143
30	9	0.0108
20	-10	-0.0120
10	13	0.0155
0	16	0.0191
-10	15	0.0179
-20	15	0.0179
-30	14	0.0167

4.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-65	-0.0346
40	-57	-0.0303
30	-75	-0.0399
20	-63	-0.0335
10	-44	-0.0234
0	-56	-0.0298
-10	-57	-0.0303
-20	-61	-0.0324
-30	-49	-0.0261

5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-579, DUT51335
Accessories with DUT numbers	SD-4MOD, DUT51339
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 56 / 99.3
Date of measurements	24-Jun-2009
Measured by	Zou Ming

5.1. Test setup



5.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-14	-0.0167
Nominal / 3.80	-16	-0.0191

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-48	-0.0255
Nominal / 3.80	-57	-0.0303

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0073	SIGNAL GENERATOR	SMR 20	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0055	RADIO COMMUNICATION TESTER	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0039	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0040	TEST RECEIVER	ESCS30	Rohde&Schwarz	15C, 15B
BJPCPT0069	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0079	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0191	PULSE LIMITER	ESH3-Z2	Rohde&Schwarz	15C, 15B
BJPCPT0131	RADIO COMMUNICATION TESTER	CMU200	ROHDE&SCHWARZ	15C, 15B
BJPCTC0089	Temperature Test chamber	VT4002	Vötsch Industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0067	BLUETOOTH TESTER	CBT	R&S	22/24/27, 15C
BJPCHW0020	Dc Power supply	Hp6632B	HP	22/24/27, 15C
BJPCTC0094	GPIB-RS232 convertor	GPIB-RS232	National Instruments	22/24/27, 15C

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0129	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0130	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0080	Device Controller	EMCO2090	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0048	RF Preamplifier 10MHz-3GHz (Metal chassis)	AFS4-00100300-10-10P-4	MITEQ	22/24/27, 15C, 15B
BJPCTC0007	Ultra Broadband Antenna 30MHz-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0162	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0029	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0049	RF preamplifier 3GHz-18GHz	BLMA-0118-1A-BT	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0072	3m anechoic chamber	-	ETS-Lindgren	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2088	ETS-EMCO	22/24/27, 15C, 15B
BJPCPT0072	EMI Test Receiver 20Hz-26.5GHz	ESIB26	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0150	High Pass filter	WHKS 1200-10SS	Wainwright instruments	22/24/27, 15C, 15B
BJPCTC0034	Notch Filter	WRCT800/880-0.2/40-5SSK	Wainwright instruments	22, 15B
BJPCPT0151	Notch Filter	WRCD1800/2000-0.2/40-5SSK	Wainwright instruments	24, 15B
BJPCTC0017	Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0154	Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright instruments	15C, 15B
BJPCTC0058	Bluetooth tester	CBT	Rohde&Schwarz	15C, 15B
BJPCTC0064	WCDMA II FILTER	WRCG1877/1883-1870/1890-40/6SS	Wainwright instruments	24, 15B
BJPCTC0065	WCDMA V FILTER	WRCG832/838-825/845-40/5SS	Wainwright instruments	22, 15B
BJPCTC0066	ANTENNA	SBA9113	SWARZBECK	22/24/27
BJPCTC0096	RF Preamplifier 100MHz-3GHz	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B