

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-614_03.doc	Date of Report:	24-Mar-2010
Number of pages:	32	Customer's Contact person:	Helen Hu
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-614 / Battery BL-5J / AC-charger AC-3E / Headset WH-102		
FCC ID:	QTLRM-614	IC:	661AB-RM614
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Jan-2010
Testing completed	05-Mar-2010
The customer's contact person	Helen Hu
Test Plan referred to	T:\Projects\RM-614\TestPlan_RS\RS_testplan_RM-614.xls
Notes	-
Document name	FCC15C_RM-614_03.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-614	008600080028904	0201	-	ag92_10w03	51575
Battery	BL-5J	4620409503I20270597;0670574	-	-	-	51582
AC-Charger	AC-3E	4419297473052100135;0675370	-	-	-	51431
Headset	WH-102	0694323923554107305	-	-	-	51586
Phone	RM-614	008600080027377	0201	-	ag92_10w03	51579
Battery	BL-5J	4620409503I20270595;0670574	-	-	-	51581
AC-Charger	AC-3E	4090499161171601899;0675370	-	-	-	51583
Headset	WH-102	06943239346A4106851	-	-	-	51588

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	NP
15.247(e)	A8.2 (b)	Power spectral density	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Beijing Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	10
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	17
6.1. Test method and limit.....	17
6.2. Bluetooth Test results	18
7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	19
7.1. Test method and limit.....	19
7.2. Bluetooth Test results	20
8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	23
8.1. Test method and limit.....	23
8.2. Bluetooth Test results	24
9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	26
9.1. Test method and limit.....	26
9.2. Bluetooth Test results	27
10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	29
10.1. Test method and limit.....	29
10.2. Bluetooth test results.....	30
11. Test Equipment	32
11.1. Conducted measurements	32
11.2. Radiated measurements	32

2. Test setups


2.1. Conducted RF test setup

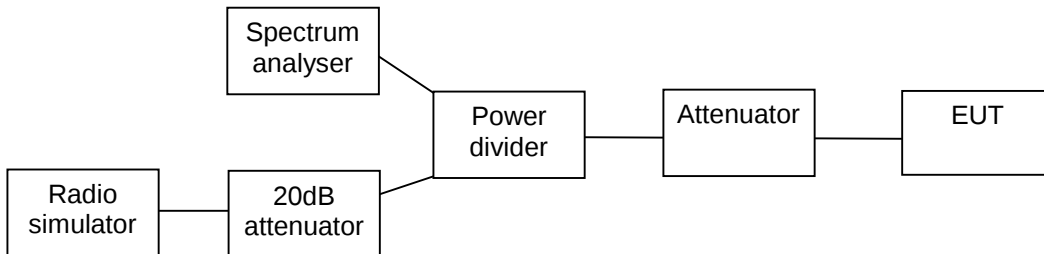

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

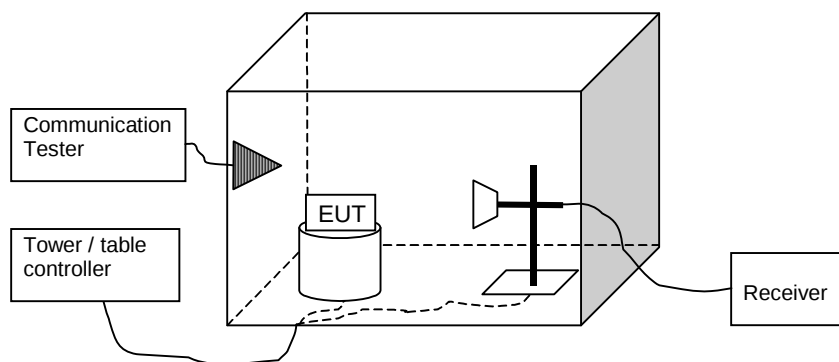

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.40	5.495	PASSED
40 / 2442	8.40	6.918	PASSED
78 / 2480	8.70	7.413	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

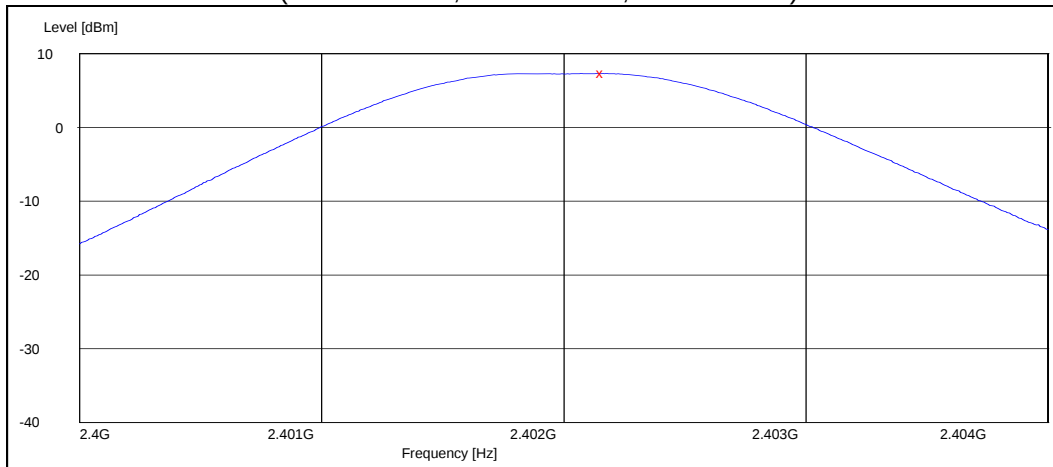

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

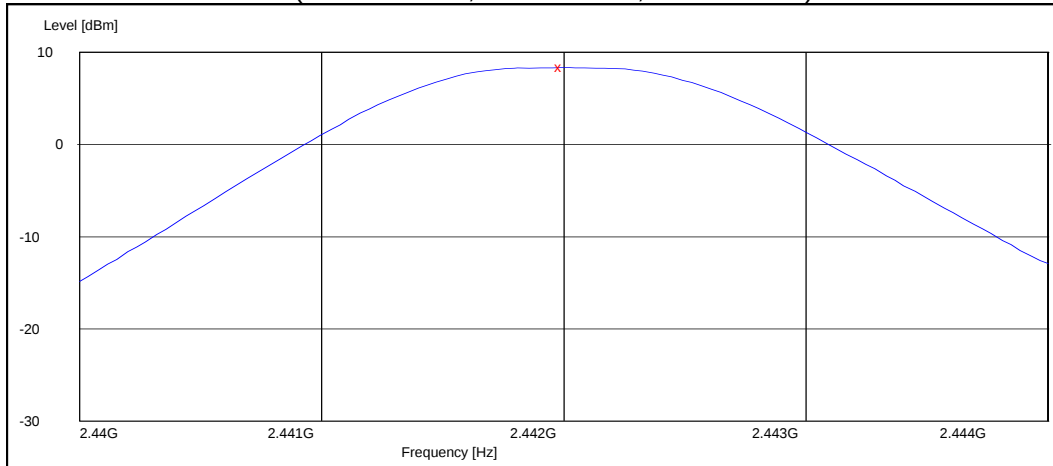


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

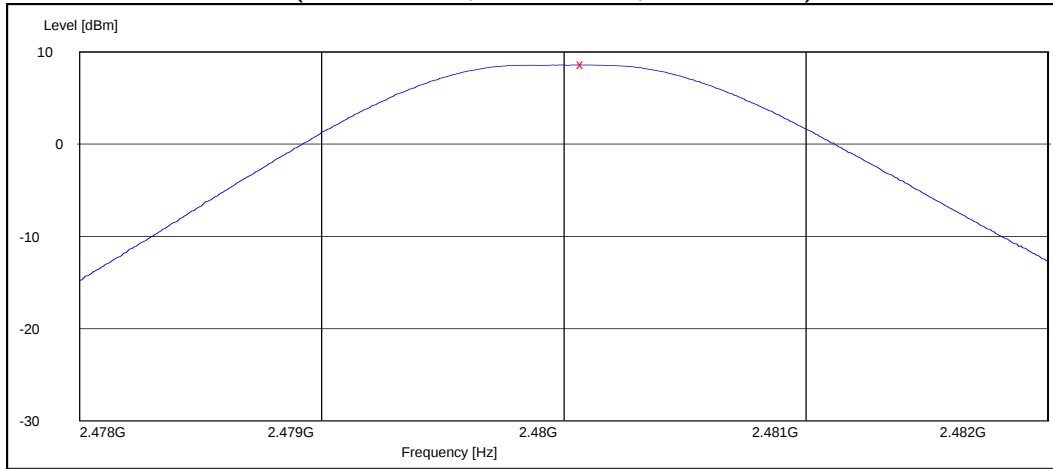


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.20	5.248	PASSED
40 / 2442	8.10	6.457	PASSED
78 / 2480	8.40	6.918	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

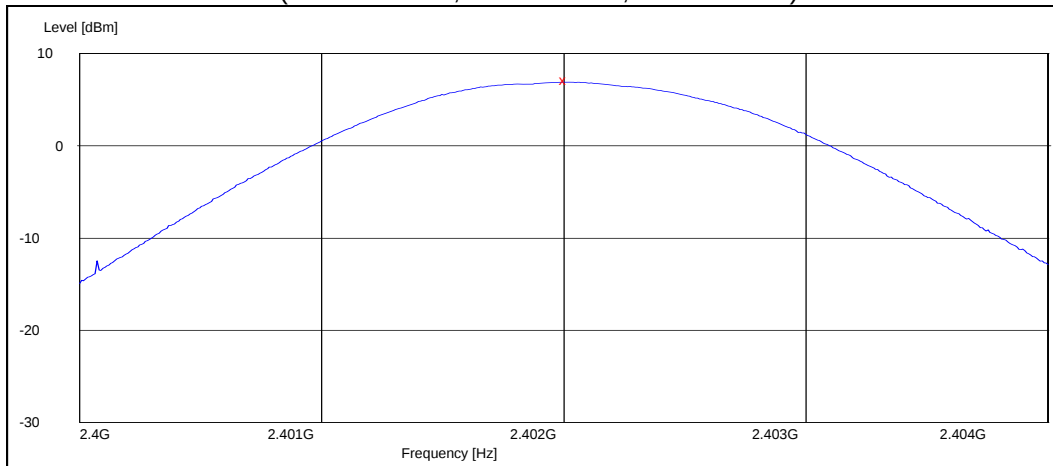

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

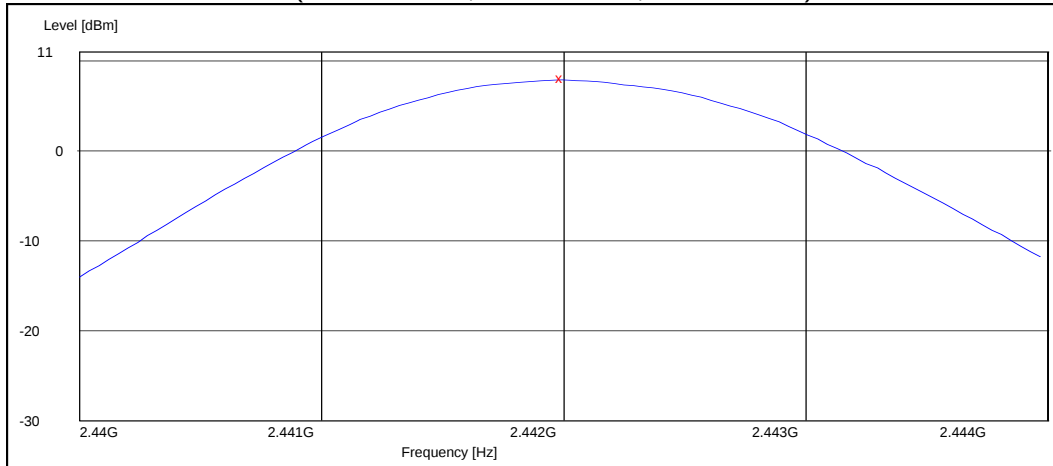

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

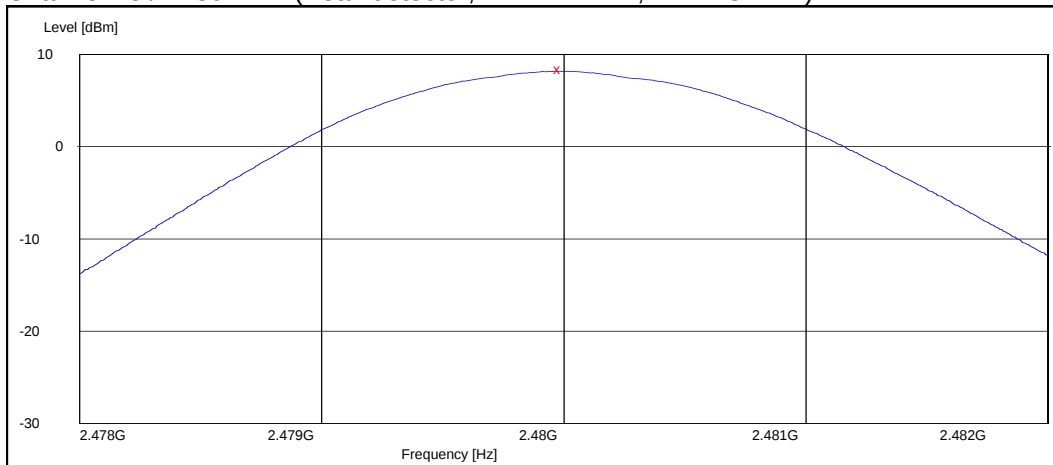

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

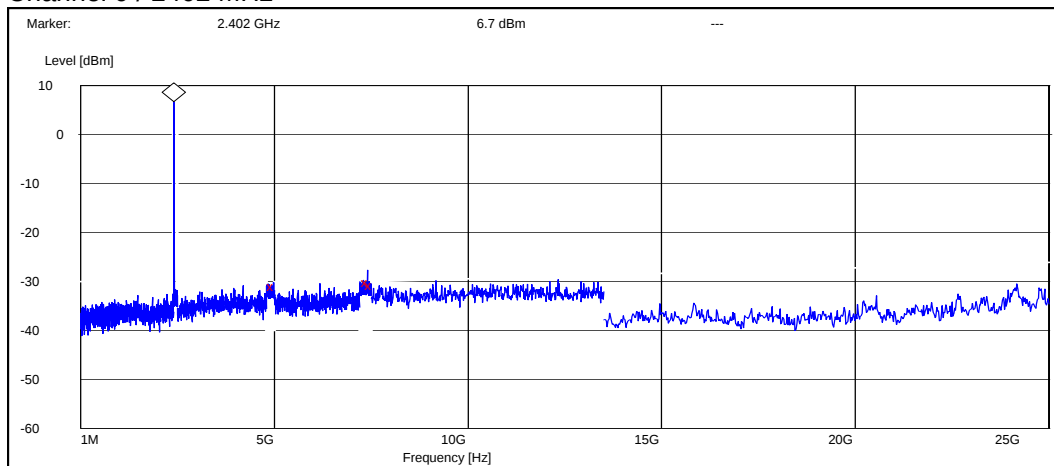

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4973.200000	-37.599255	PASSED
7409.400000	-36.899255	PASSED
7500.000000	-37.399255	PASSED


Channel 40 / 2442 MHz

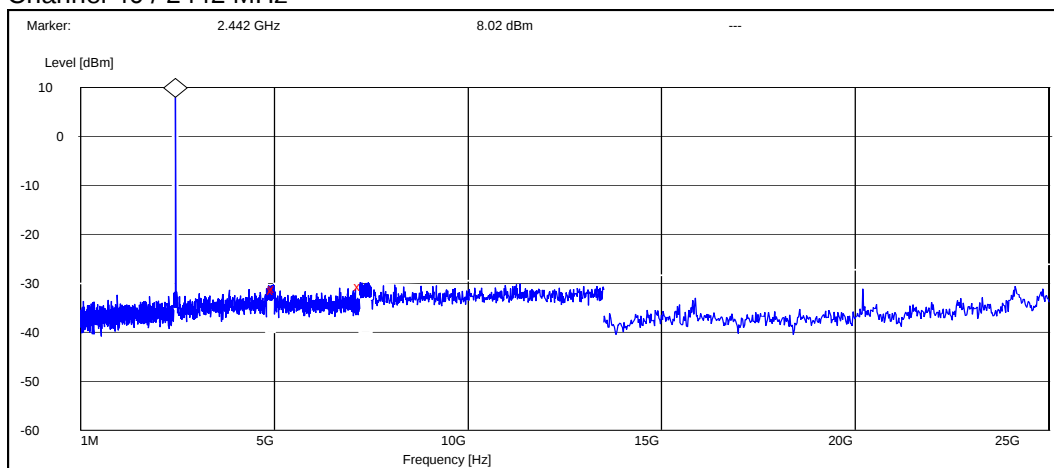

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4981.200000	-39.516595	PASSED
5000.000000	-39.116595	PASSED
7221.600000	-38.716595	PASSED

Channel 78 / 2480 MHz

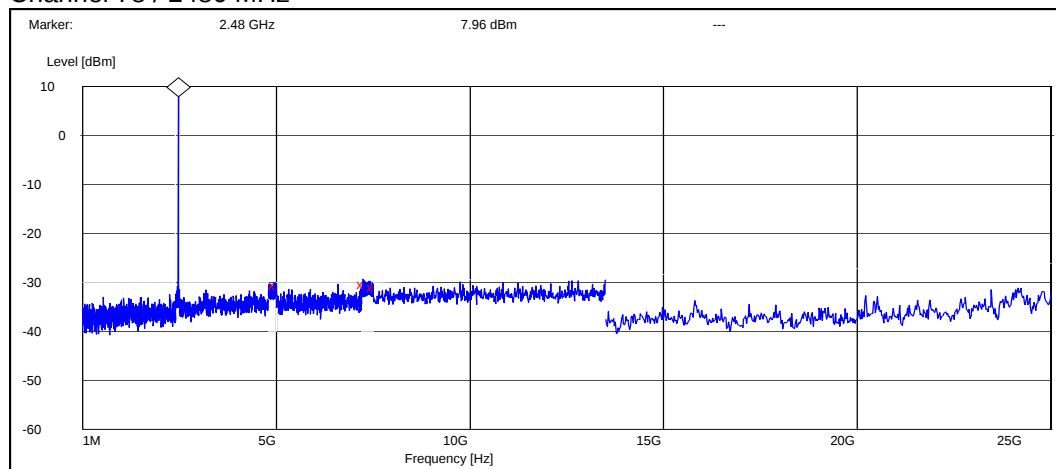


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4963.600000	-38.555391	PASSED
7245.600000	-38.455391	PASSED
7500.000000	-38.855391	PASSED

4.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

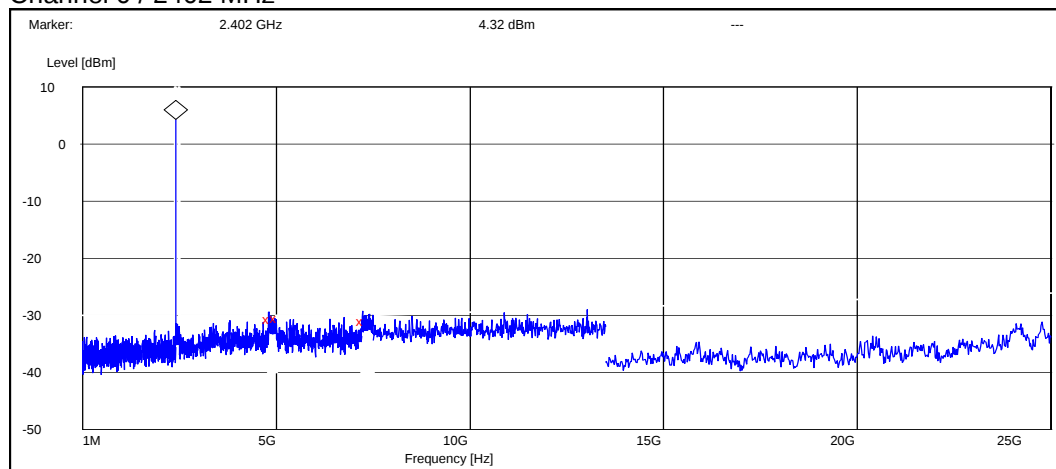

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4809.200000	-35.023477	PASSED
5000.000000	-34.923477	PASSED
7237.200000	-35.423477	PASSED


Channel 40 / 2442 MHz

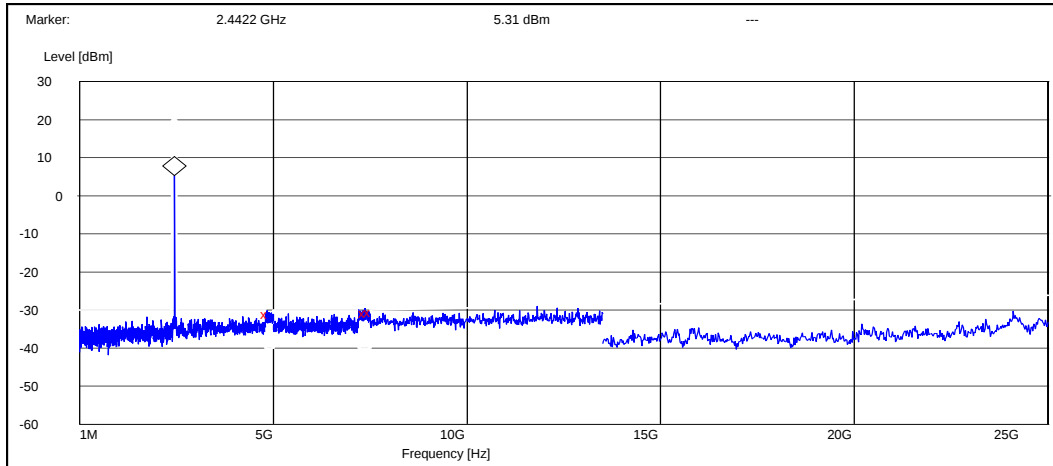

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4841.600000	-36.311235	PASSED
7362.000000	-36.111235	PASSED
7500.000000	-35.811235	PASSED

Channel 78 / 2480 MHz

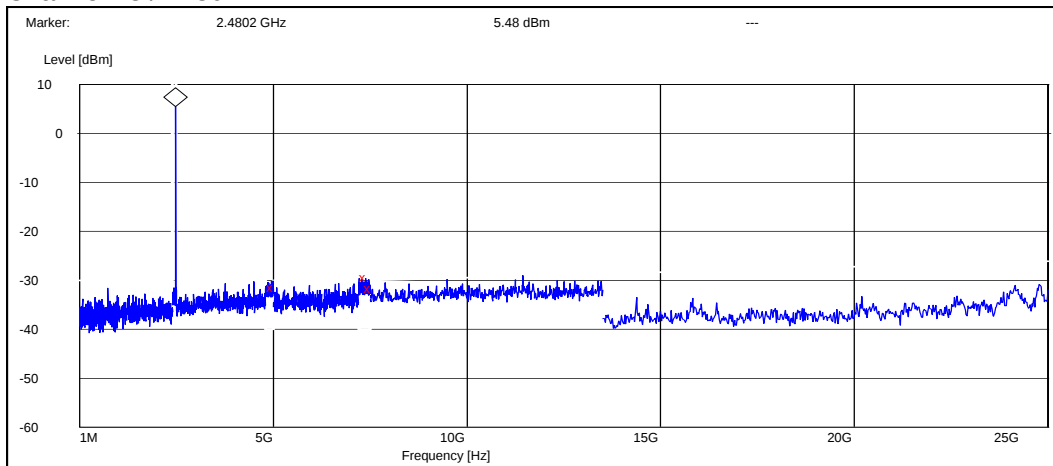

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4985.200000	-36.983258	PASSED
7386.600000	-34.783258	PASSED
7500.000000	-37.083258	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-614, DUT 51575
Accessories with DUT numbers	BL-5J, DUT 51582 ; AC-3E, DUT 51431 ; WH-102, DUT 51586
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 33 / 101
Date of measurements	21-Feb-2010
Measured by	Jia Dongsheng

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.6	29.07	28.399	29.17	-0.1	VERTICAL	PASSED
7204.4	32.24	40.931	27.98	4.26	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.6	41.73	121.983	41.83	-0.1	VERTICAL	PASSED
7204.4	45.17	181.426	40.91	4.26	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
2799.9	37.17	72.186	29.86	7.31	VERTICAL	PASSED
2842.587	37.12	71.771	29.12	8	VERTICAL	PASSED
3911.623	28.48	26.555	29.22	-0.74	VERTICAL	PASSED
3932.463	28.3	25.987	29.28	-0.98	VERTICAL	PASSED
17930.762	46.2	204.221	26.86	19.34	HORIZONTAL	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
33.095	31.74	38.654	37.51	-5.77	VERTICAL	PASSED
33.166	32.63	42.781	38.45	-5.82	VERTICAL	PASSED
33.296	32.6	42.663	38.52	-5.92	VERTICAL	PASSED
37.245	34.95	55.892	43.68	-8.73	VERTICAL	PASSED
37.294	34.92	55.725	43.69	-8.77	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
2799.9	50.23	324.751	42.92	7.31	VERTICAL	PASSED
2842.587	50.38	330.179	42.38	8	VERTICAL	PASSED

3911.623	41.5	118.796	42.24	-0.74	VERTICAL	PASSED
3932.463	41.12	113.737	42.1	-0.98	VERTICAL	PASSED
17930.762	58.83	873.474	39.49	19.34	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.6	30.55	33.674	30.13	0.42	HORIZONTAL	PASSED
7440.1	32.46	41.976	28.35	4.11	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.6	44.15	161.306	43.73	0.42	HORIZONTAL	PASSED
7440.1	45.54	189.256	41.43	4.11	VERTICAL	PASSED

5.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.8	29.06	28.379	29.15	-0.09	VERTICAL	PASSED
7205.2	32.2	40.738	27.95	4.25	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.8	42.56	134.199	42.65	-0.09	VERTICAL	PASSED
7205.2	45.42	186.616	41.17	4.25	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2830.959	37.17	72.21	29.26	7.91	HORIZONTAL	PASSED
2845.491	37.12	71.771	29.02	8.1	VERTICAL	PASSED
3904.809	28.68	27.171	29.32	-0.64	VERTICAL	PASSED
3941.483	28.17	25.604	29.21	-1.04	HORIZONTAL	PASSED
17938.376	46.26	205.589	26.77	19.49	HORIZONTAL	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
33.087	32.66	42.968	38.43	-5.77	VERTICAL	PASSED
37.324	34.82	55.106	43.61	-8.79	VERTICAL	PASSED
37.374	35	56.202	43.83	-8.83	VERTICAL	PASSED
37.395	35.18	57.431	44.02	-8.84	VERTICAL	PASSED

76.152	35.64	60.548	56.64	-21	HORIZONTAL	PASSED
--------	-------	--------	-------	-----	------------	--------

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2830.959	50.14	321.329	42.23	7.91	HORIZONTAL	PASSED
2845.491	49.92	313.437	41.82	8.1	VERTICAL	PASSED
3904.809	41.73	122.039	42.37	-0.64	VERTICAL	PASSED
3941.483	41.06	112.928	42.1	-1.04	HORIZONTAL	PASSED
17938.376	59.62	957.084	40.13	19.49	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4961.4	30.54	33.651	30.12	0.42	VERTICAL	PASSED
7438.6	32.53	42.316	28.33	4.2	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4961.4	43.07	142.364	42.65	0.42	VERTICAL	PASSED
7438.6	45.89	197.106	41.69	4.2	VERTICAL	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-614, DUT 51575
Accessories with DUT numbers	BL-5J, DUT 51582 ; AC-3E, DUT 51431 ; WH-102, DUT 51586
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 30 / 102.7
Date of measurements	05-Mar-2010
Measured by	Jia Dongsheng

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

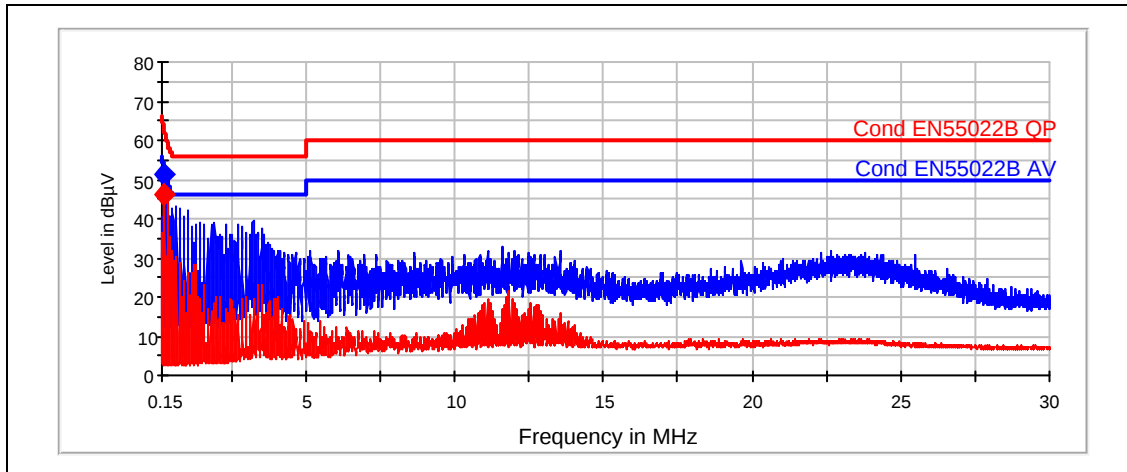

Quasi peak

Frequency[MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.245	51.48	15000	9	N	10.42	PASSED

Average

Frequency[MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.245	46.16	15000	9	N	5.72	PASSED

7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3E, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.2. Bluetooth Test results


7.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	940.000	PASSED
40 / 2442	936.000	PASSED
78 / 2480	948.000	PASSED


Channel 0 / 2402 MHz

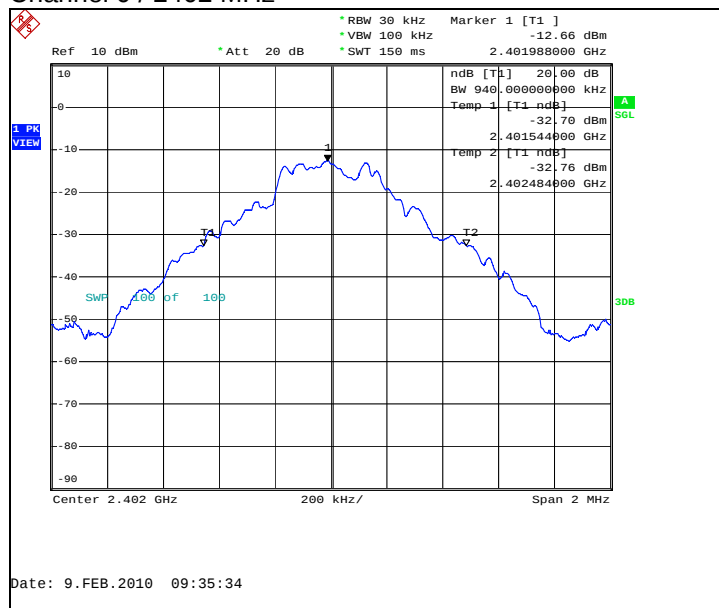

Channel 40 / 2442 MHz

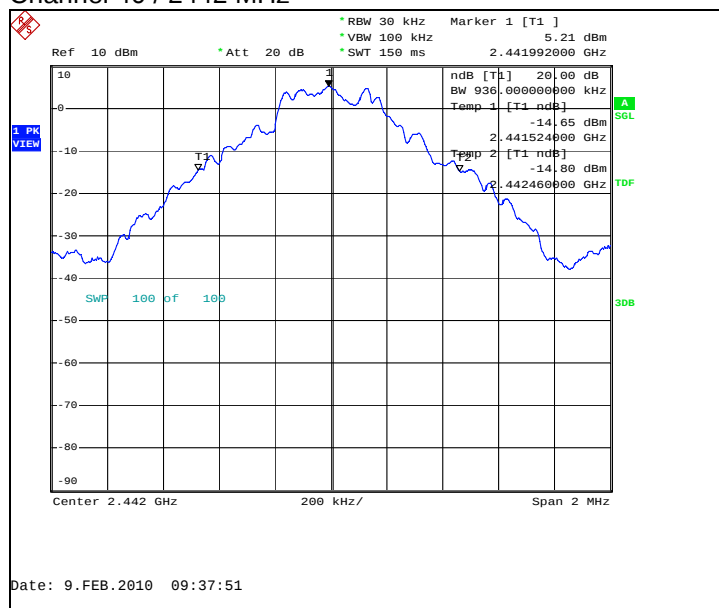


Channel 78 / 2480 MHz

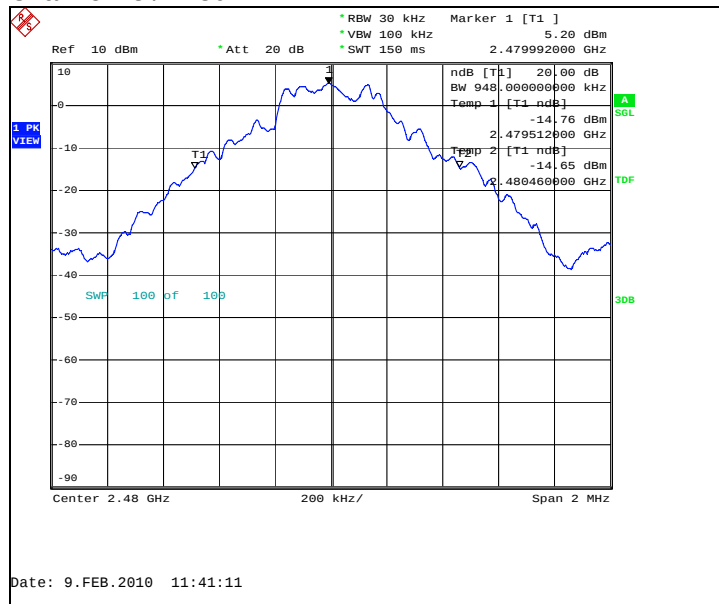


7.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1316.000	PASSED
40 / 2442	1312.000	PASSED
78 / 2480	1316.000	PASSED


Channel 0 / 2402 MHz

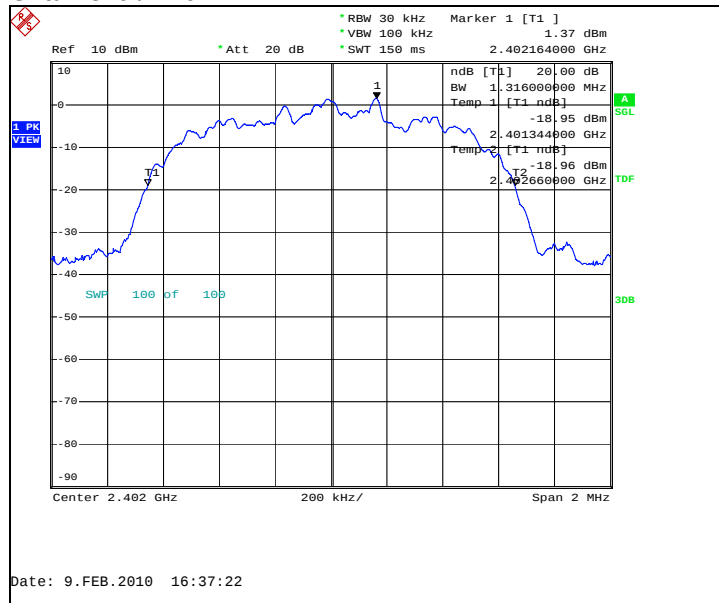

Channel 40 / 2442 MHz

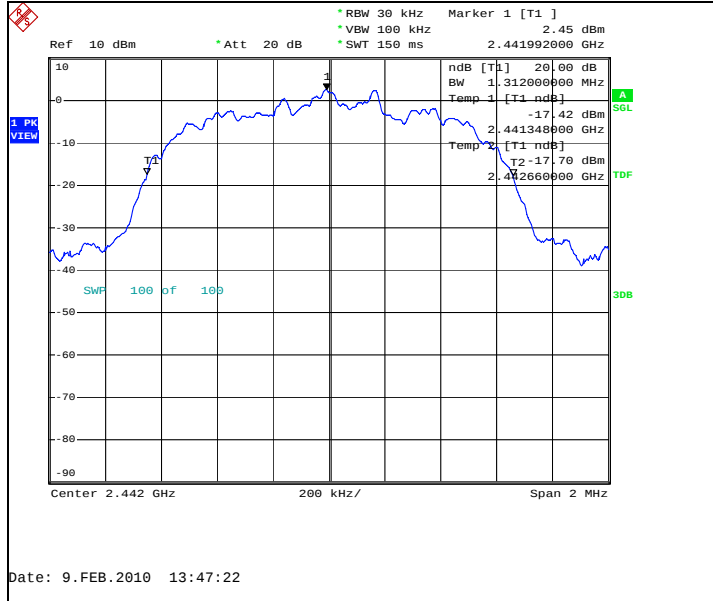

Channel 78 / 2480 MHz

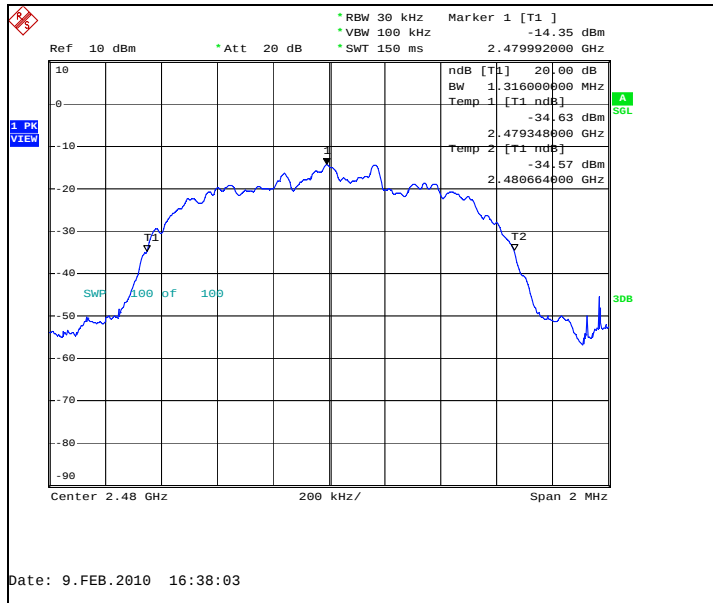

8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3E, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1170	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

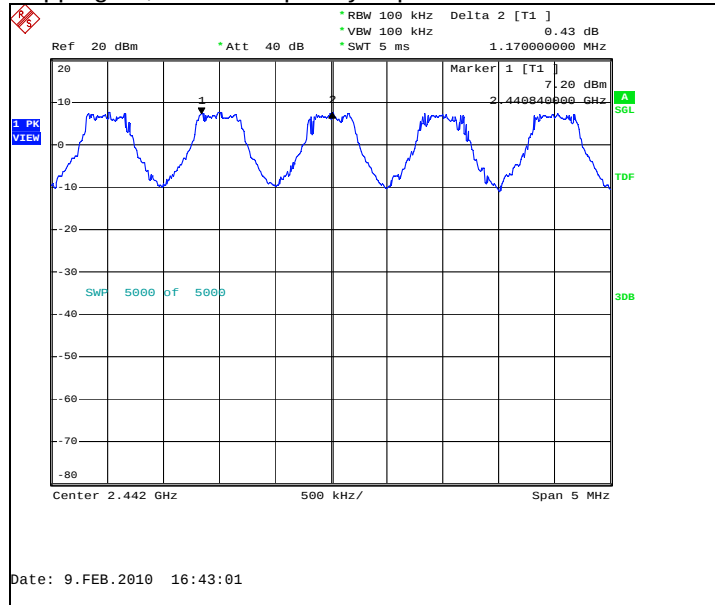

8.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1000	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

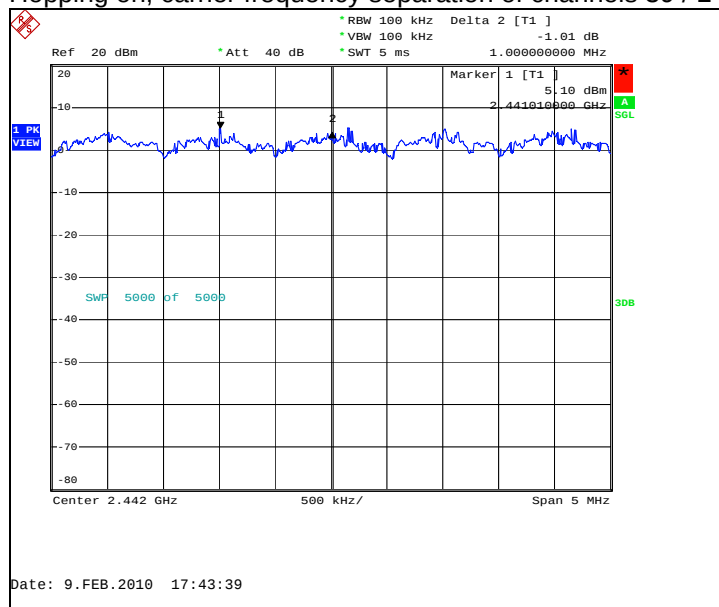

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3E, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

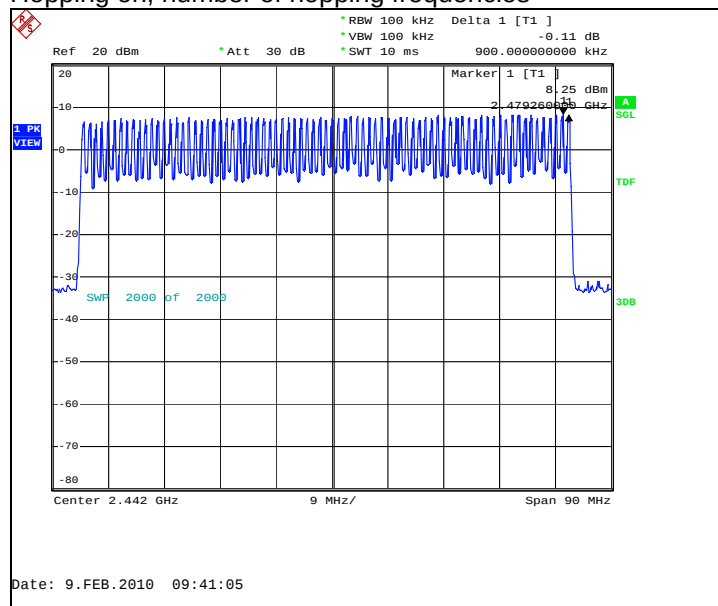

9.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED

Hopping on, number of hopping frequencies

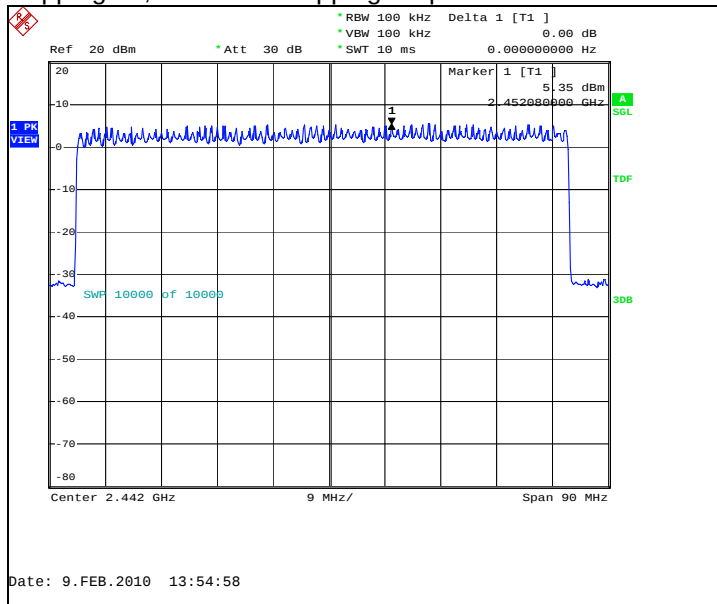

10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-614, DUT51579
Accessories with DUT numbers	BL-5J, DUT51581; AC-3E, DUT51583; WH-102, DUT51588
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 35 / 102
Date of measurements	09-Feb-2010
Measured by	Jia Dongsheng

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

10.2. Bluetooth test results


10.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
104	2,920	0.303680	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

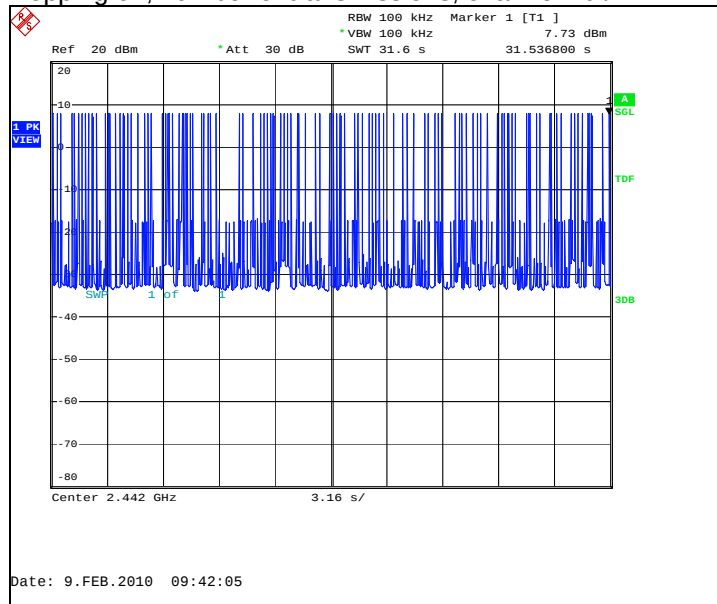


Hopping on, duration of one transmission, channel 40 / 2442 MHz

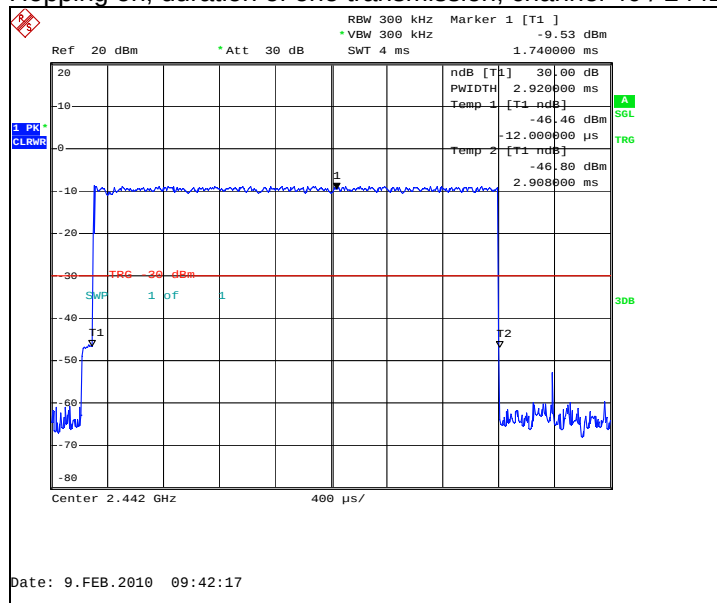


10.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
78	2,920	0.227760	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

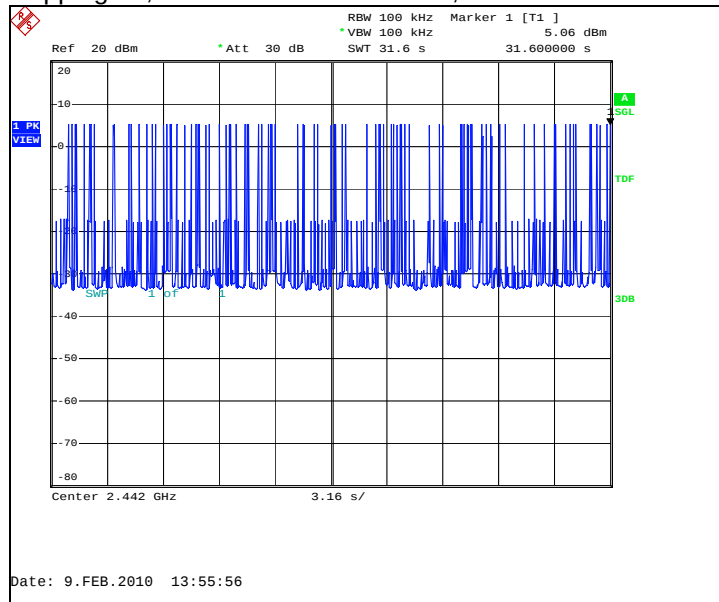

Hopping on, duration of one transmission, channel 40 / 2442 MHz

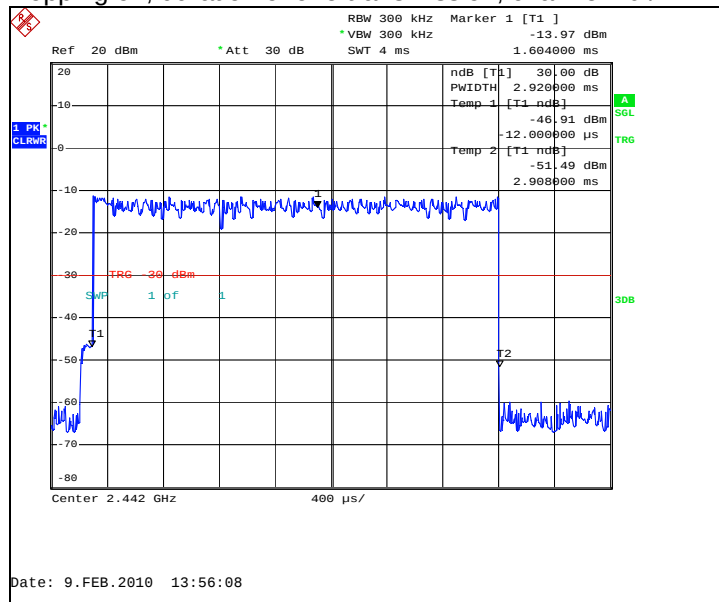

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0073	SIGNAL GENERATOR	SMR 20	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0055	RADIO COMMUNICATION TESTER	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0039	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0040	TEST RECEIVER	ESCS30	Rohde&Schwarz	15C, 15B
BJPCPT0069	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0079	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
BJPCPT0191	PULSE LIMITER	ESH3-Z2	Rohde&Schwarz	15C, 15B
BJPCPT0131	RADIO COMMUNICATION TESTER	CMU200	ROHDE&SCHWARZ	15C, 15B
BJPCTC0089	Temperature Test chamber	VT4002	Vötsch Industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0067	BLUETOOTH TESTER	CBT	R&S	22/24/27, 15C
BJPCHW0020	Dc Power supply	Hp6632B	HP	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	National Instruments	22/24/27, 15C

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0129	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0130	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0080	Device Controller	EMCO2090	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0048	RF Preamplifier 10MHz-3GHz (Metal chassis)	AFS4-00100300-10-10P-4	MITEQ	22/24/27, 15C, 15B
BJPCTC0007	Ultra Broadband Antenna 30MHz-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0162	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0029	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0049	RF preamplifier 3GHz-18GHz	BLMA-0118-1A-BT	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0072	3m anechoic chamber	-	ETS-Lindgren	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2088	ETS-EMCO	22/24/27, 15C, 15B
BJPCPT0072	EMI Test Receiver 20Hz-26.5GHz	ESIB26	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0150	High Pass filter	WHKS 1200-10SS	Wainwright instruments	22/24/27, 15C, 15B
BJPCTC0034	Notch Filter	WRCT800/880-0.2/40-5SSK	Wainwright instruments	22, 15B
BJPCPT0151	Notch Filter	WRCD1800/2000-0.2/40-5SSK	Wainwright instruments	24, 15B
BJPCTC0017	Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0154	Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright instruments	15C, 15B
BJPCTC0058	Bluetooth tester	CBT	Rohde&Schwarz	15C, 15B
BJPCTC0064	WCDMA II FILTER	WRCG1877/1883-1870/1890-40/6SS	Wainwright instruments	24, 15B
BJPCTC0065	WCDMA V FILTER	WRCG832/838-825/845-40/5SS	Wainwright instruments	22, 15B
BJPCTC0066	ANTENNA	SBA9113	SWARZBECK	22/24/27
BJPCTC0096	RF Preamplifier 100MHz-3GHz	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B