

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-709_20.doc	Date of Report:	25-Sep-2010
Number of pages:	22	Customer's Contact person:	Qiu Rain
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-709 / Battery BL-5C / AC-charger AC-3E / Headset WH-102		
FCC ID:	QTLRM-709	IC:	661AB-RM709
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Sep-2010
Testing completed	20-Sep-2010
The customer's contact person	Qiu Rain
Test Plan referred to	T:\Projects\RM-709\TestPlan\RS_testplan_RM-709_CR_HW0204.xls
Notes	-
Document name	FCC15C_RM-709_20.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-709	004402131682787	0204	-	tw92_10w31SSC	51853
Phone	RM-709	004402131684577	0204	-	tw92_10w31SSC	51855
Battery	BL-5C	0670400382066R12405GL62087	-	-	-	51813
AC-charger	AC-3E	4419298432052200110;0675370	-	-	-	51810
Headset	WH-102	06943249041E2607489	-	-	-	51812

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED
FAILED
NP


The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Beijing Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit	5
3.2. Bluetooth Test results	6
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	9
4.1. Test method and limit	9
4.2. Bluetooth Test results	10
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)	14
5.1. Test method and limit	14
5.2. Bluetooth Test results	15
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	18
6.1. Test method and limit	18
6.2. Bluetooth Test results	19
7. Test Equipment	22
7.1. Conducted measurements	22
7.2. Radiated measurements	22

2. Test setups


2.1. Conducted RF test setup

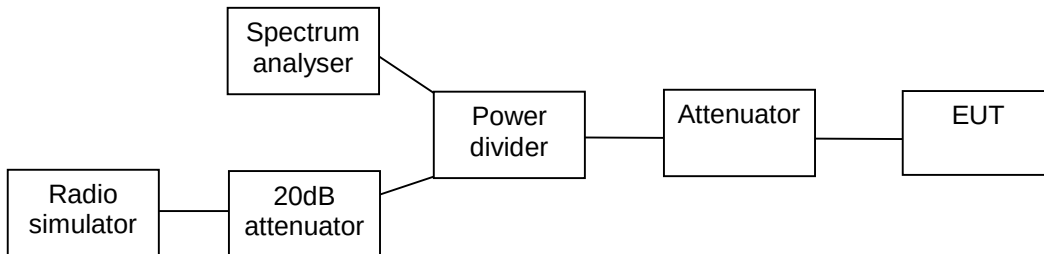

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

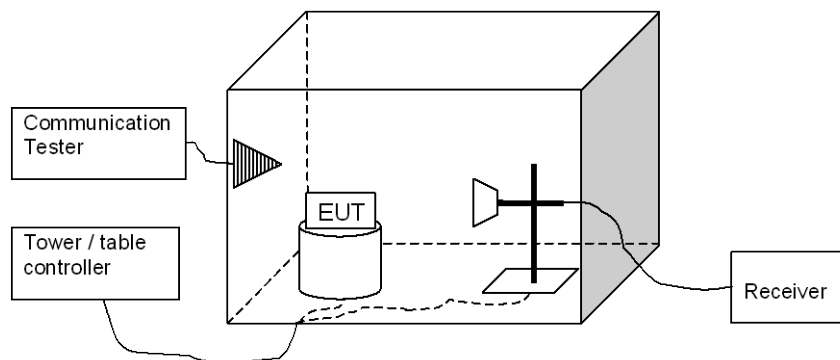

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-709, DUT51855
Accessories with DUT numbers	BL-5C, DUT51813 ; AC-3E, DUT51810 ; WH-102, DUT51812
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 62 / 100.8
Date of measurements	16-Sep-2010
Measured by	Jia Dongsheng

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.20	4.169	PASSED
40 / 2442	6.60	4.571	PASSED
78 / 2480	6.70	4.677	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

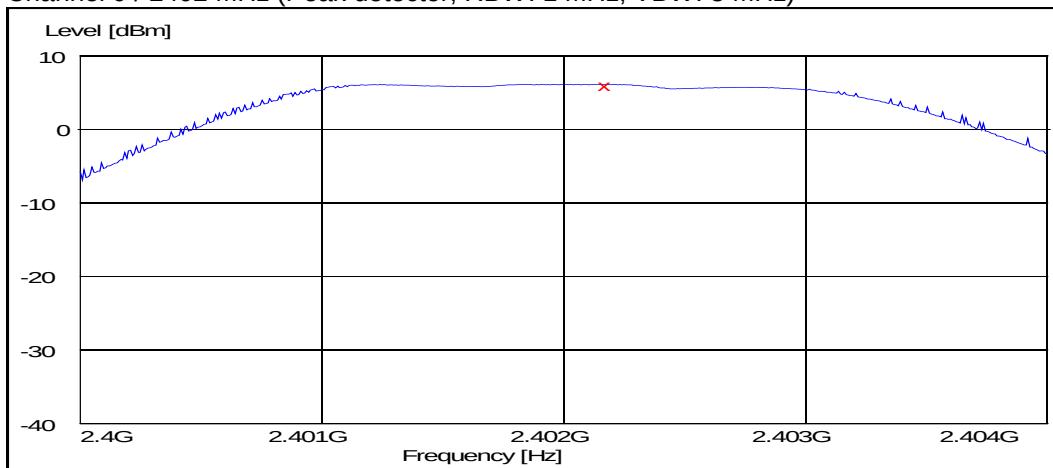

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

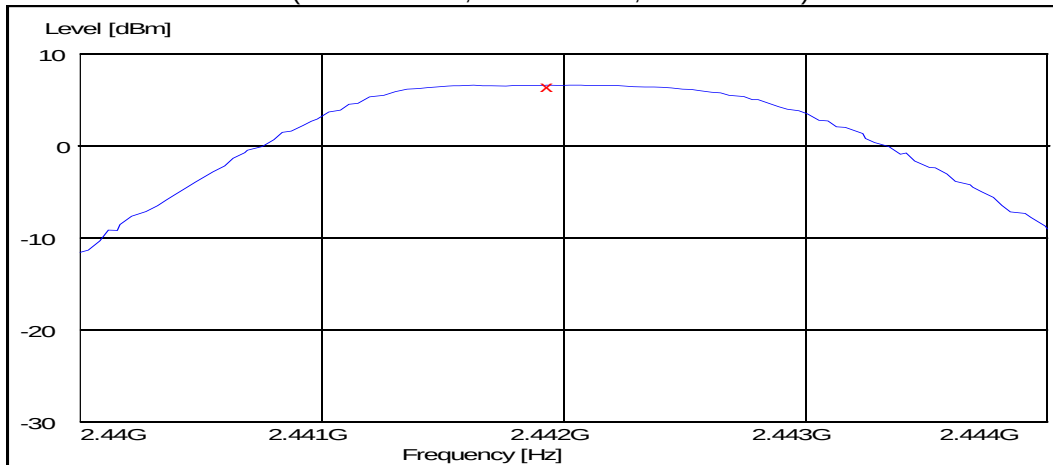


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

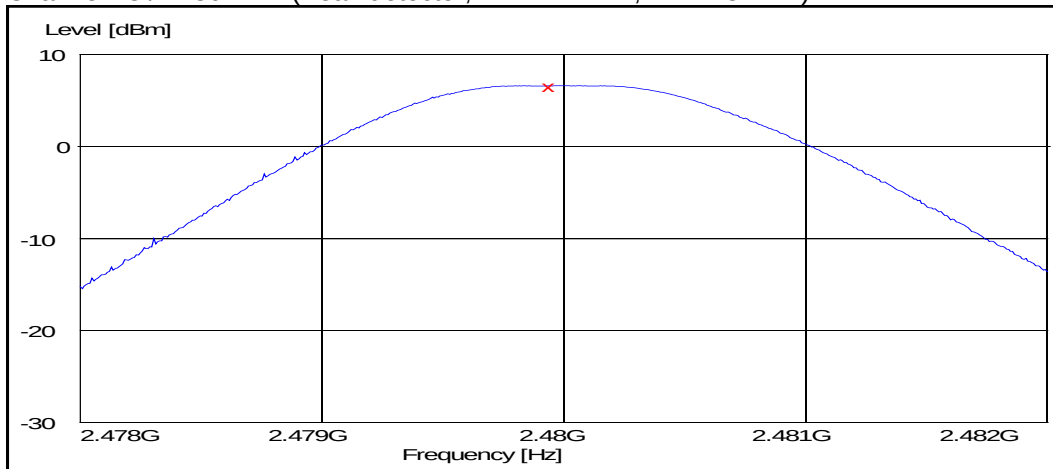


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	7.70	5.888	PASSED
40 / 2442	8.60	7.244	PASSED
78 / 2480	8.90	7.762	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

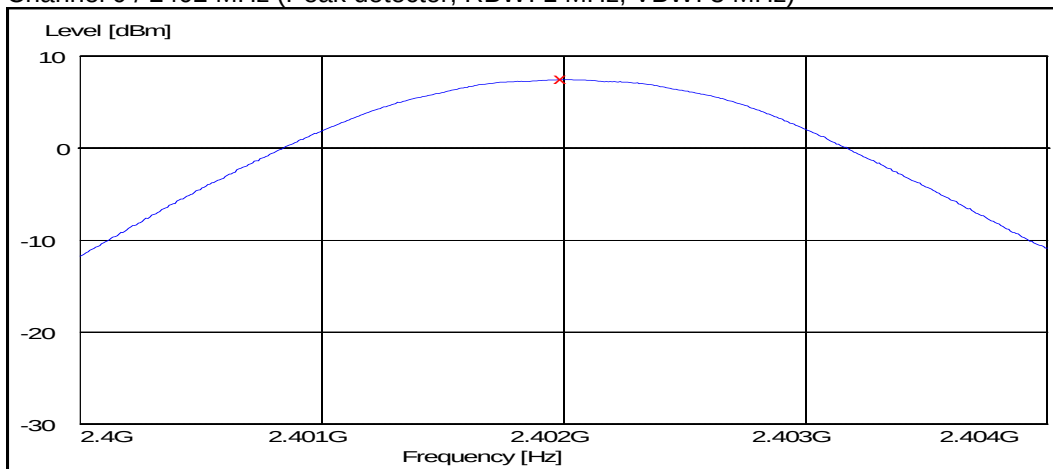

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

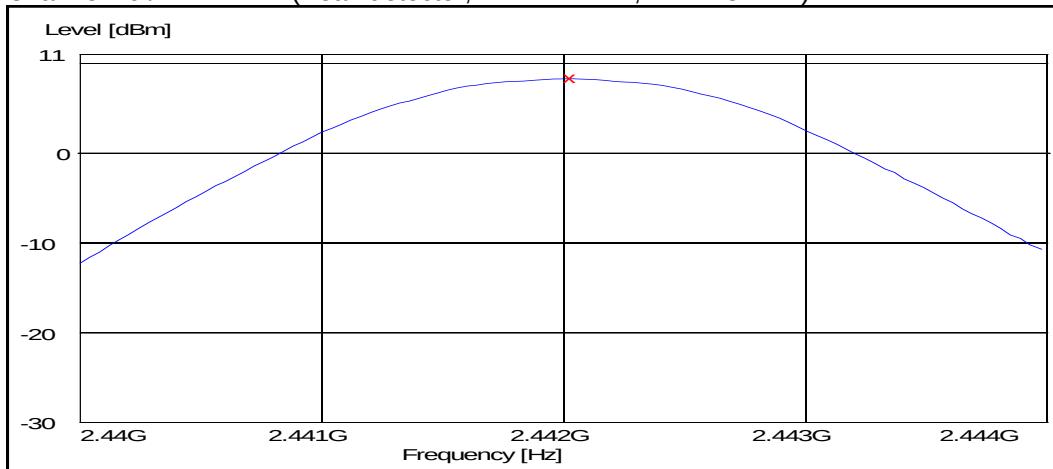

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

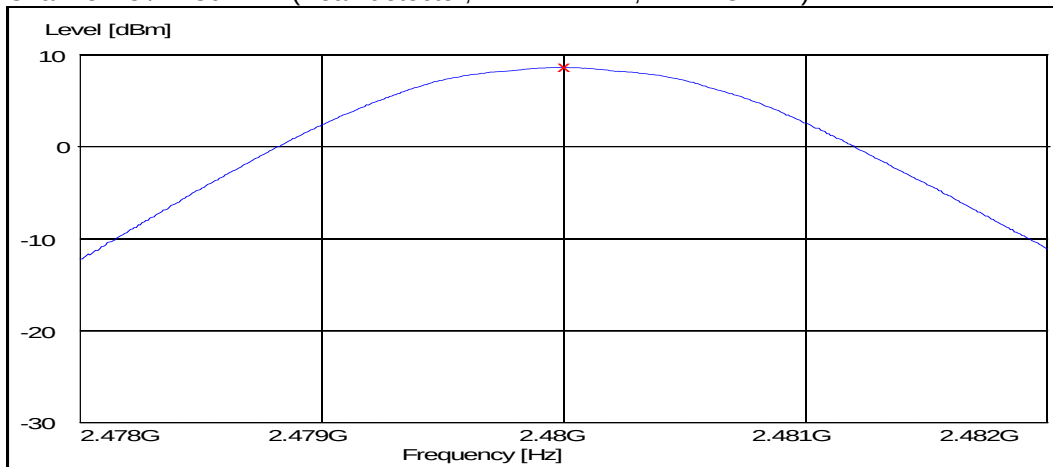

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-709, DUT 51853
Accessories with DUT numbers	BL-5C, DUT 51813 ; AC-3E, DUT 51810 ; WH-102, DUT 51812
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 60 / 100.8
Date of measurements	16-Sep-2010
Measured by	Zou Ming

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	39.28	92.096	37.43	1.85	PASSED
Hopping on, low end	40.96	111.733	39.11	1.85	PASSED
78 / 2480	51.07	357.679	48.56	2.51	PASSED
Hopping on, high end	51.91	394.176	49.4	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	51.37	370.386	49.52	1.85	PASSED
Hopping on, low end	57.51	750.388	55.66	1.85	PASSED
78 / 2480	55.34	584.467	52.83	2.51	PASSED
Hopping on, high end	57.35	736.742	54.84	2.51	PASSED


GFSK mode. Channel 0 / 2402 MHz

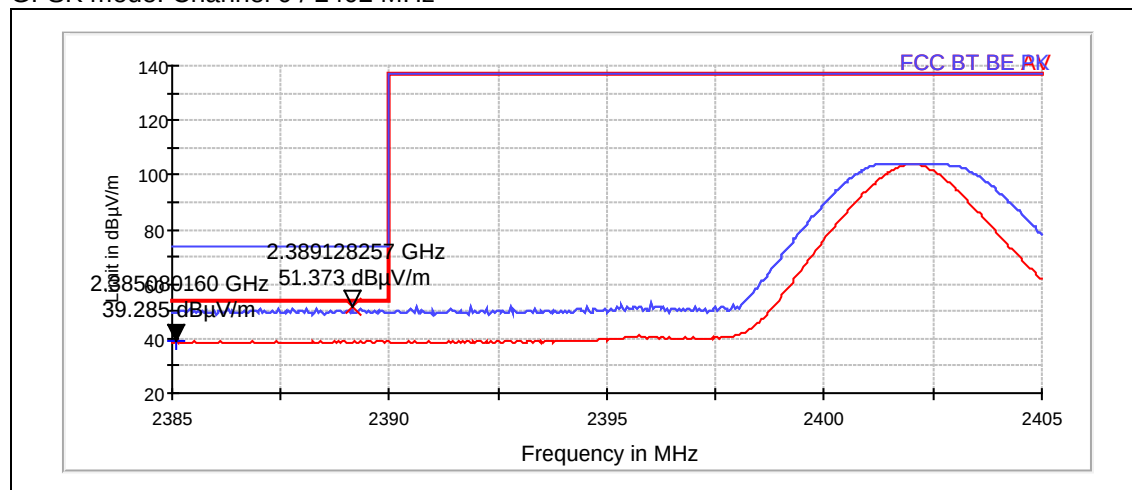


GFSK mode. Hopping on, low end

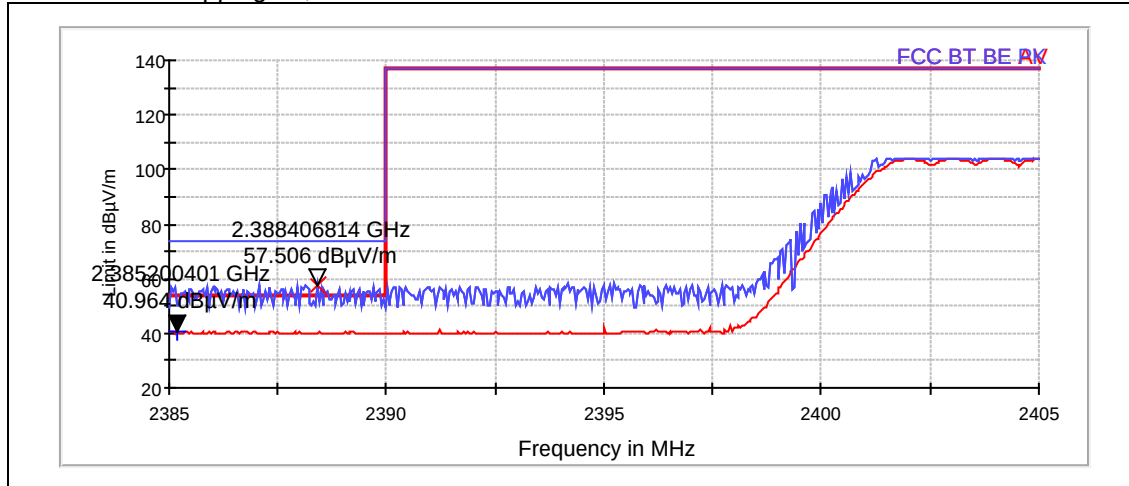

GFSK mode. Channel 78 / 2480 MHz

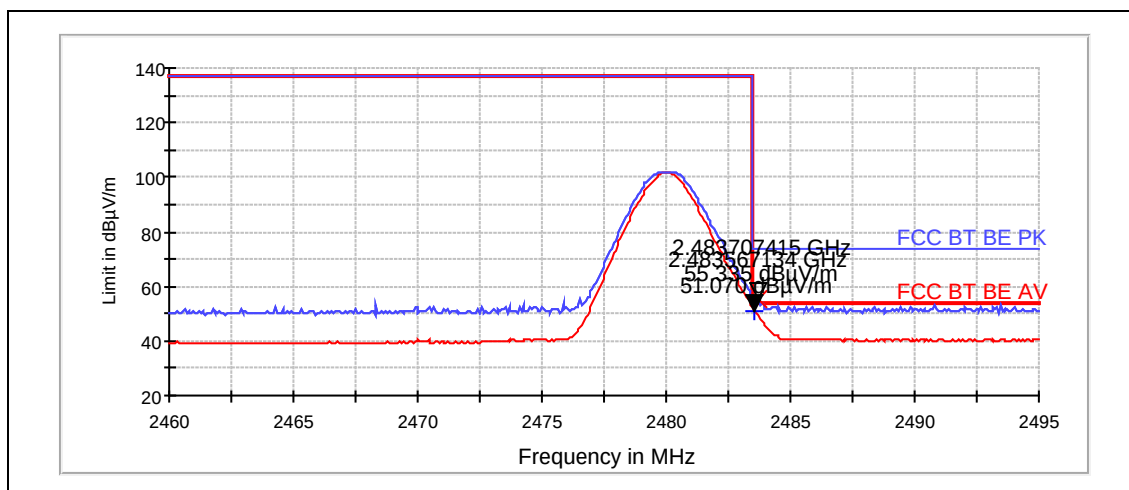

GFSK mode. Hopping on, high end

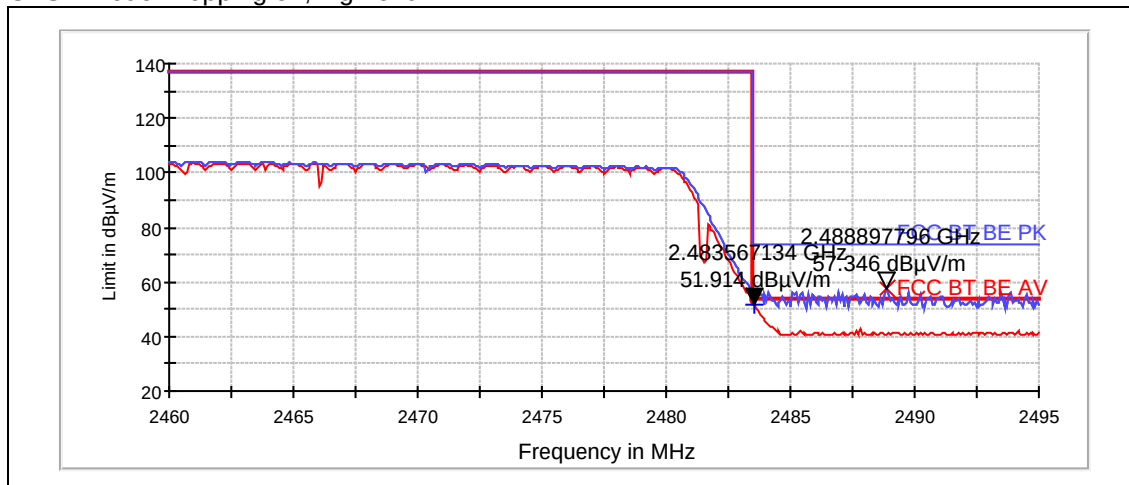

4.2.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Result
0 / 2402	40.68	108.204	38.83	1.85	PASSED
Hopping on, low end	44.96	177.045	43.11	1.85	PASSED
78 / 2480	52.68	430.674	50.17	2.51	PASSED
Hopping on, high end	52.83	437.974	50.32	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Result
0 / 2402	59.21	913.334	57.36	1.85	PASSED
Hopping on, low end	58.76	867.422	56.91	1.85	PASSED
78 / 2480	59.73	968.843	57.22	2.51	PASSED
Hopping on, high end	58.67	858.485	56.16	2.51	PASSED


8DPSK mode. Channel 0 / 2402 MHz

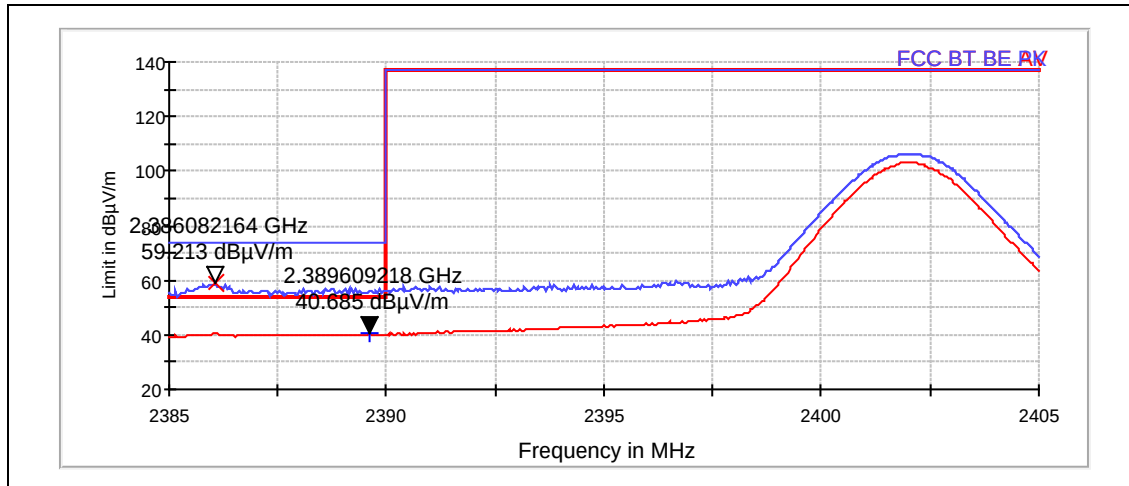


8DPSK mode. Hopping on, low end

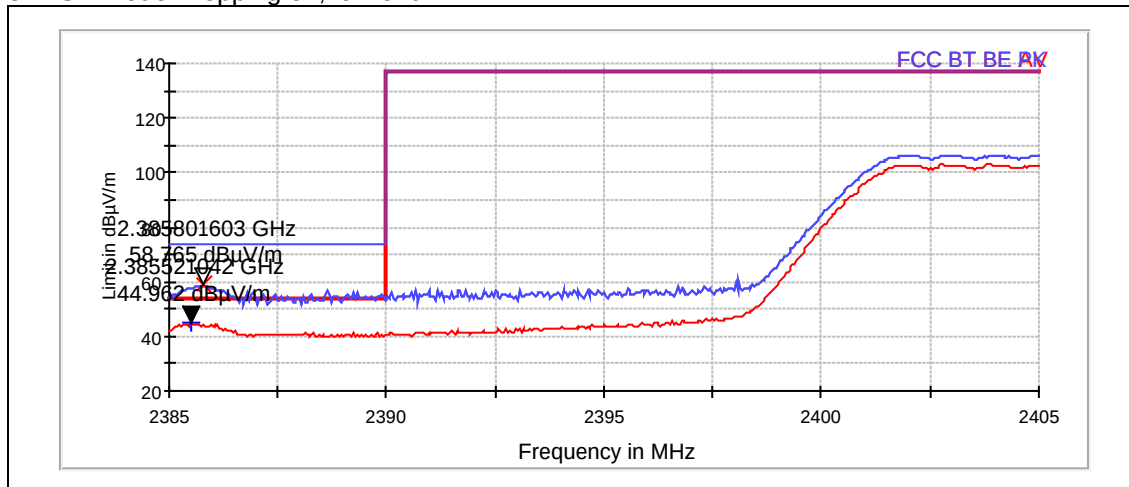

8DPSK mode. Channel 78 / 2480 MHz

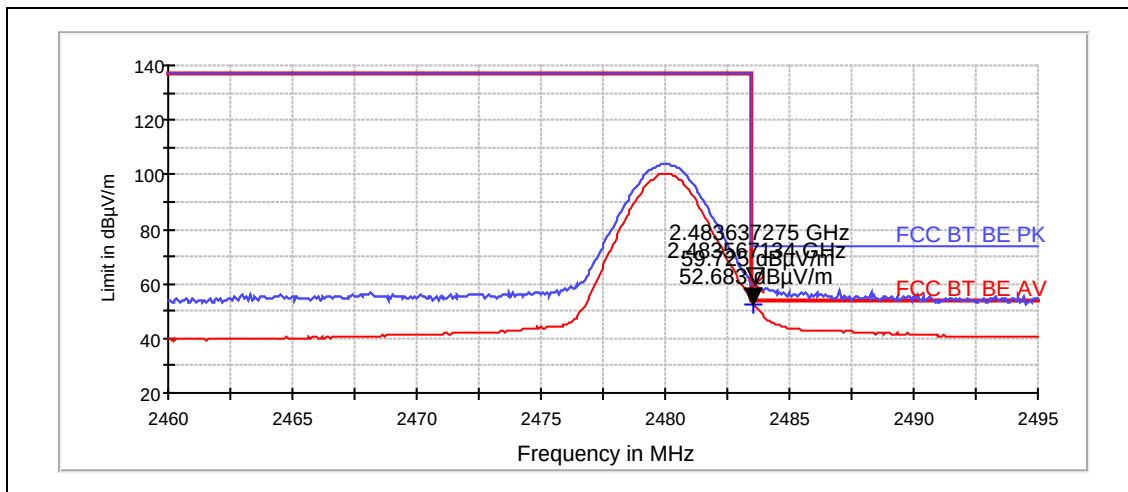

8DPSK mode. Hopping on, high end

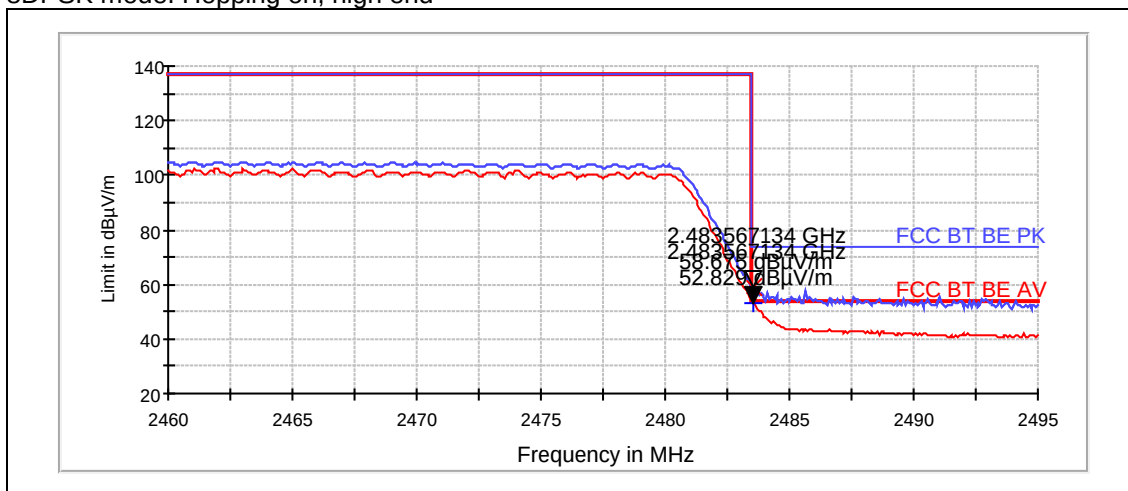

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-709, DUT51855
Accessories with DUT numbers	BL-5C, DUT51813 ; AC-3E, DUT51810 ; WH-102, DUT51812
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 62 / 100.8
Date of measurements	16-Sep-2010
Measured by	Jia Dongsheng

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

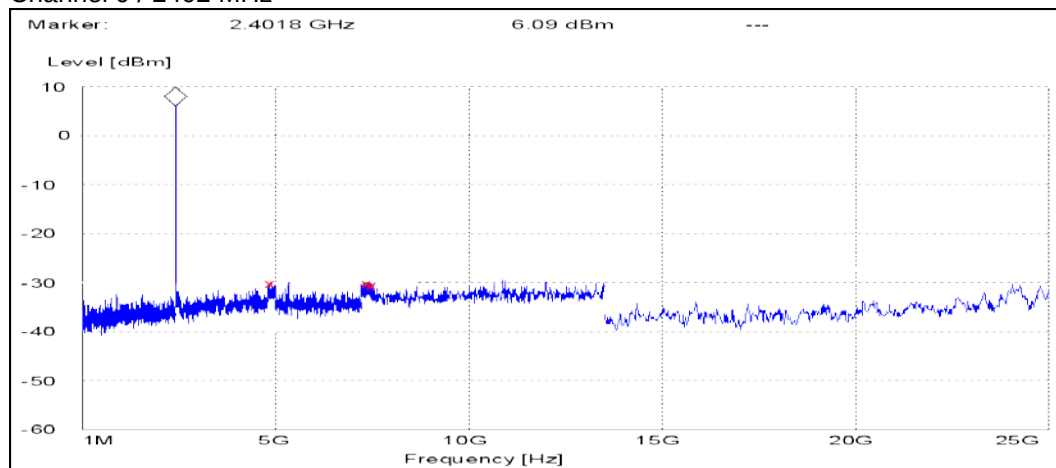

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4895.200000	-36.092425	PASSED
7393.200000	-36.092425	PASSED
7500.000000	-36.592425	PASSED


Channel 40 / 2442 MHz

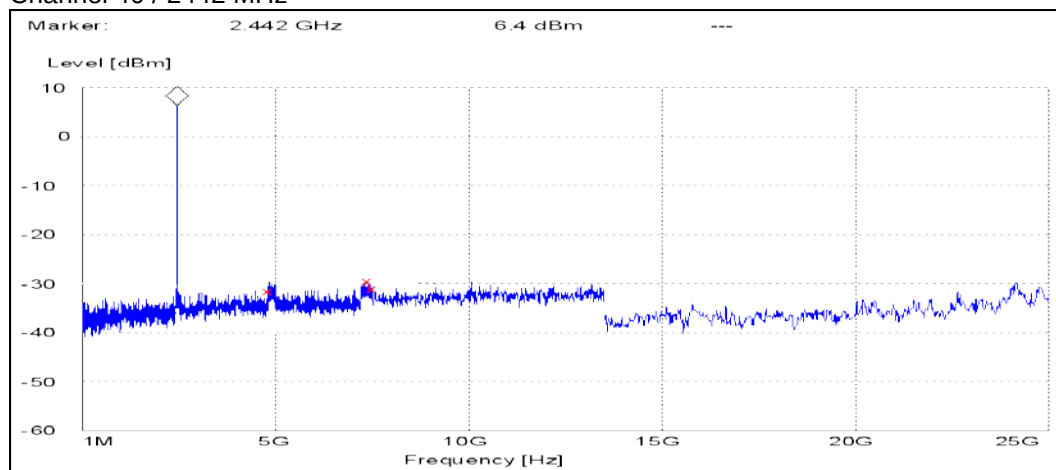

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4824.000000	-37.899948	PASSED
7391.400000	-35.699948	PASSED
7500.000000	-37.299948	PASSED

Channel 78 / 2480 MHz

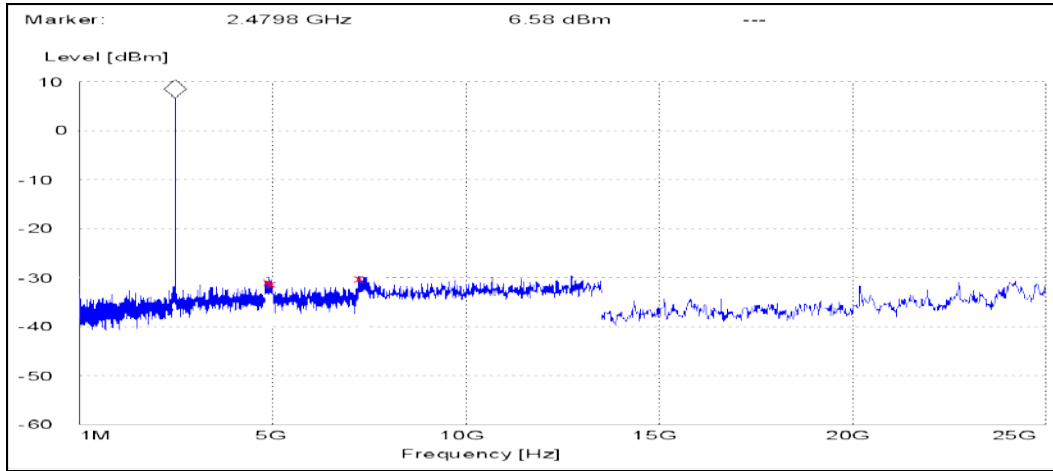


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4910.400000	-37.284716	PASSED
5000.000000	-37.784716	PASSED
7239.600000	-36.684716	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

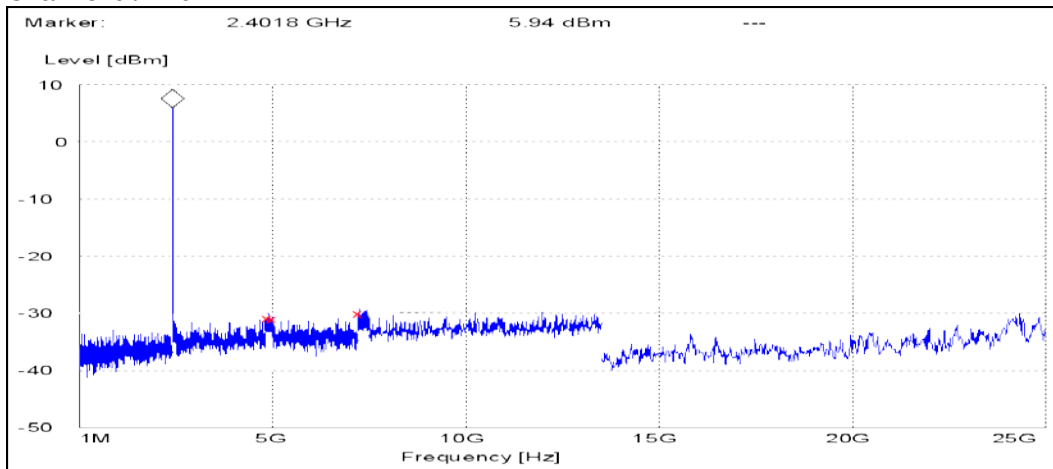

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4887.600000	-36.737296	PASSED
5000.000000	-36.837296	PASSED
7227.600000	-35.937296	PASSED


Channel 40 / 2442 MHz

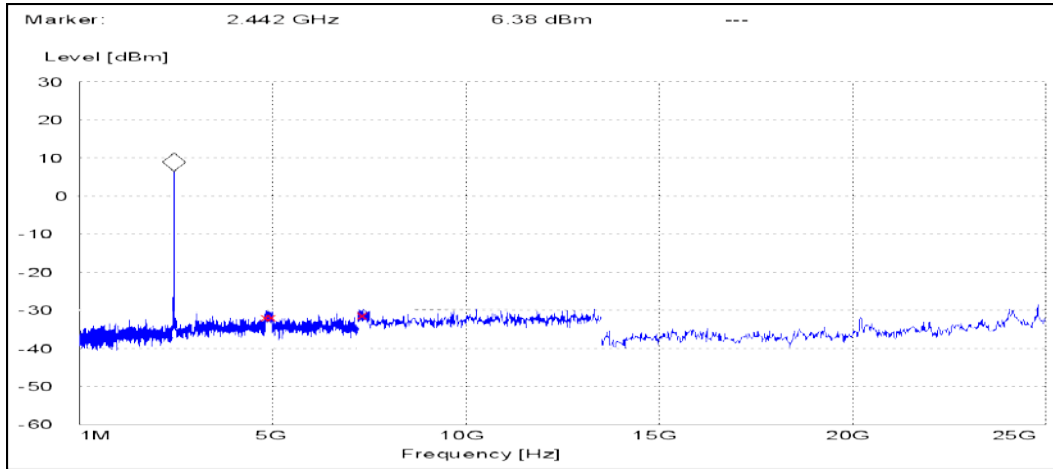

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4834.000000	-38.075664	PASSED
5000.000000	-38.075664	PASSED
7358.400000	-37.475664	PASSED

Channel 78 / 2480 MHz

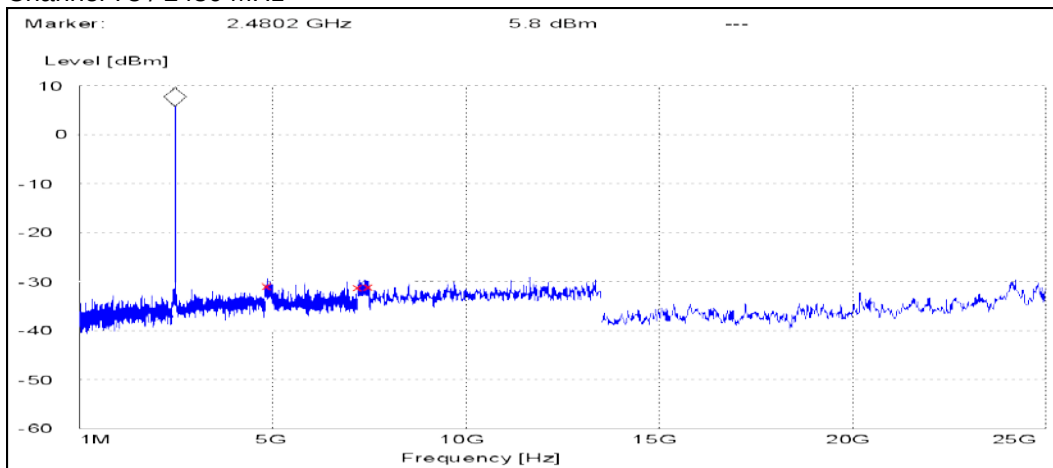

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4877.200000	-36.495993	PASSED
7230.000000	-36.795993	PASSED
7500.000000	-36.695993	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-709, DUT 51853
Accessories with DUT numbers	BL-5C, DUT 51813 ; AC-3E, DUT 51810 ; WH-102, DUT 51812
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 60 / 100.8
Date of measurements	16-Sep-2010
Measured by	Zou Ming

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.9	51.5	376.011	51.75	-0.25	HORIZONTAL	PASSED
7207.1	46.04	200.378	41.03	5.01	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4805.9	29.5	29.864	29.75	-0.25	HORIZONTAL	PASSED
7207.1	32.96	44.438	27.95	5.01	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4959.8	45.96	198.609	45.9	0.06	HORIZONTAL	PASSED
7438.9	46.63	214.487	41.55	5.08	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4959.8	30.56	33.74	30.5	0.06	HORIZONTAL	PASSED
7438.9	33.59	47.786	28.51	5.08	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
82.244	30.13	32.107	48.34	-18.21	HORIZONTAL	PASSED
82.305	33.62	47.984	51.82	-18.2	HORIZONTAL	PASSED
82.325	29.55	30.019	47.75	-18.2	HORIZONTAL	PASSED
82.346	29.28	29.107	47.47	-18.19	HORIZONTAL	PASSED
941.362	24.7	17.177	27.04	-2.34	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2497.756	54.76	547.079	49.59	5.17	HORIZONTAL	PASSED
2498.89	55.47	593.608	50.25	5.22	HORIZONTAL	PASSED
4806.311	51.38	370.851	51.63	-0.25	HORIZONTAL	PASSED
4850.303	51.08	358.014	51.16	-0.08	HORIZONTAL	PASSED
17967.534	58.89	880.44	40.09	18.8	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2497.756	34.78	54.809	29.61	5.17	HORIZONTAL	PASSED
2498.89	34.8	54.935	29.58	5.22	HORIZONTAL	PASSED
4806.311	29.51	29.899	29.76	-0.25	HORIZONTAL	PASSED
4850.303	29.82	30.974	29.9	-0.08	HORIZONTAL	PASSED
17967.534	45.52	188.864	26.72	18.8	HORIZONTAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.7	42.11	127.526	42.34	-0.23	VERTICAL	PASSED
7204.4	45.51	188.56	40.49	5.02	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802.7	29.22	28.897	29.45	-0.23	VERTICAL	PASSED
7204.4	32.96	44.453	27.94	5.02	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.9	43.09	142.791	43.01	0.08	HORIZONTAL	PASSED
7438.9	46.89	221.004	41.81	5.08	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.9	30.51	33.524	30.43	0.08	HORIZONTAL	PASSED
7438.9	33.59	47.802	28.51	5.08	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
82.076	32.02	39.912	50.26	-18.24	HORIZONTAL	PASSED
82.105	32.47	42.015	50.7	-18.23	HORIZONTAL	PASSED
82.154	28.78	27.476	47	-18.22	HORIZONTAL	PASSED
82.174	28.63	27.015	46.85	-18.22	HORIZONTAL	PASSED
82.247	28.9	27.848	47.11	-18.21	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2378.068	56.9	700.084	52.76	4.14	HORIZONTAL	PASSED
2817.035	51.57	379.053	42.74	8.83	VERTICAL	PASSED
3920.141	41.87	124.037	43.28	-1.41	HORIZONTAL	PASSED
3934.667	41.5	118.809	43.02	-1.52	HORIZONTAL	PASSED
17937.774	58.51	841.88	39.97	18.54	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2378.068	33.82	49.068	29.68	4.14	HORIZONTAL	PASSED
2817.035	38.4	83.129	29.57	8.83	VERTICAL	PASSED
3920.141	28.52	26.669	29.93	-1.41	HORIZONTAL	PASSED
3934.667	28.41	26.342	29.93	-1.52	HORIZONTAL	PASSED
17937.774	45.4	186.187	26.86	18.54	HORIZONTAL	PASSED

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B