

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-958_04	Date of Report:	15-Nov-2013
Number of pages:	46	Customer's Contact person:	Qiu Yu (raiqiu)
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-958 / Battery BL-4U / AC-charger AC-20E / Headset WH-108		
FCC ID:	QTLRM-958	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Zou Ming, Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	30-Oct-2013
Testing completed	14-Nov-2013
The customer's contact person	Qiu Yu (raiqiu)
Test Plan referred to	T:\Projects\RM-958\TestPlan\RS_Testplan_RM-958.xlsm
Notes	-
Document name	FCC15CWLAN_RM-958_04

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-958	SIM1:004402474356908; SIM2:004402474356916	0309	-	1.1339.1	53922
Battery	BL-4U	4955402481010100072;0670560	-	-	-	53928
AC-charger	AC-20E	4868673116350515779;0675628	-	-	-	53929
Headset	WH-108	3131a3R	-	-	-	53930
Phone	RM-958	SIM1:004402474359548; SIM2:004402474359555	0309	-	1.1339.1	53926
Battery	BL-4U	524190316112402322;0670560	-	-	-	53946
AC-Charger	AC-20E	4868673101310511714;0675628	-	-	-	53327
Headset	WH-108	3323471	-	-	-	53944
Phone	RM-958	SIM1:004402474356627; SIM2:004402474356635	0309	-	1.1339.1	53924

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6dB(bandwidth)	PASSED
15.247(e)	A8.2 (b)	Power spectral density	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4))	5
2.1. Test Setup.....	5
2.2. Test method and limit.....	5
2.3. Power results summary.....	6
2.4. WLAN Test results	6
3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	12
3.2. Test method and limit.....	12
3.3. WLAN test results	13
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	19
4.1. Test Setup.....	19
4.2. Test method and limit.....	19
4.3. WLAN Test results	20
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	25
5.2. Test method and limit.....	25
5.3. WLAN test results	27
6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2).....	30
6.1. Test Setup.....	30
6.2. Test method and limit.....	30
6.3. WLAN Test results	31
7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1)).....	32
7.1. Test Setup.....	32
7.2. Test method and limit.....	32
7.3. WLAN Test results	33
8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))	38
8.1. Test Setup.....	38
8.2. Test method and limit.....	38

8.3.	WLAN Test results	39
9.	Test Equipment.....	45
9.1.	Conducted measurements	45
9.2.	Radiated measurements	45

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-958, DUT 53926
Accessories with DUT numbers	BL-4U, DUT 53946 ; AC-20E, DUT 53327 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test was done in conducted RF2 system.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/26/102
Date of measurements	11-Nov-2013
Measured by	Mark Ma

2.1. Test Setup

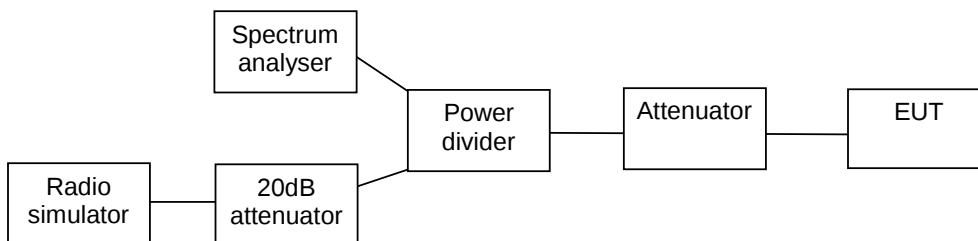

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	<= 1	<= 30

2.3. Power results summary

Channel / f _c [MHz]	Mode	Modulation	Data rate	Level [dBm]
1 / 2412	802.11b	QPSK	11 Mbps	20.9
6 / 2437	802.11b	QPSK	11 Mbps	21.27
11 / 2462	802.11b	QPSK	11 Mbps	21.53
1 / 2412	802.11g	BPSK	6 Mbps	18.54
6 / 2437	802.11g	BPSK	6 Mbps	22.49
11 / 2462	802.11g	BPSK	6 Mbps	19.38
1 / 2412	802.11n	BPSK	6.5 / 7.25 Mbps	18.38
6 / 2437	802.11n	BPSK	6.5 / 7.25 Mbps	20.89
11 / 2462	802.11n	BPSK	6.5 / 7.25 Mbps	19.27


2.4. WLAN Test results

Channel / f _c [MHz]	Mode	Modulation	Data rate	Level [dBm]
6 / 2437	802.11b	BPSK	1 Mbps	19.29
6 / 2437	802.11b	QPSK	2 Mbps	19.46
6 / 2437	802.11b	QPSK	5.5 Mbps	20.78
6 / 2437	802.11b	QPSK	11 Mbps	21.64
6 / 2437	802.11g	BPSK	6 Mbps	23.19
6 / 2437	802.11g	BPSK	9 Mbps	23.11
6 / 2437	802.11g	QPSK	12 Mbps	22.8
6 / 2437	802.11g	QPSK	18 Mbps	22.77
6 / 2437	802.11g	16QAM	24 Mbps	23.08
6 / 2437	802.11g	16QAM	24 Mbps	23.1
6 / 2437	802.11g	16QAM	36 Mbps	23.16
6 / 2437	802.11g	64QAM	48 Mbps	21.52
6 / 2437	802.11g	64QAM	54 Mbps	21.57


2.4.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	20.9	123.027	PASSED
6 / 2437	21.27	133.968	PASSED
11 / 2462	21.53	142.233	PASSED


Channel 1 / 2412 MHz

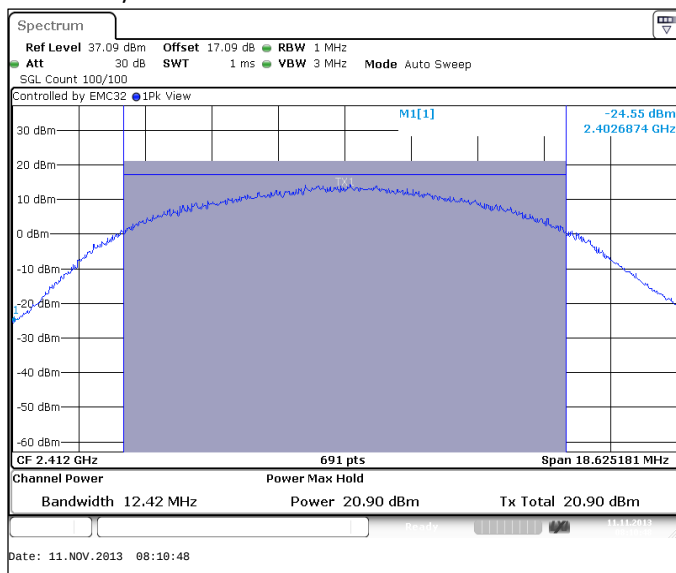

Channel 6 / 2437 MHz

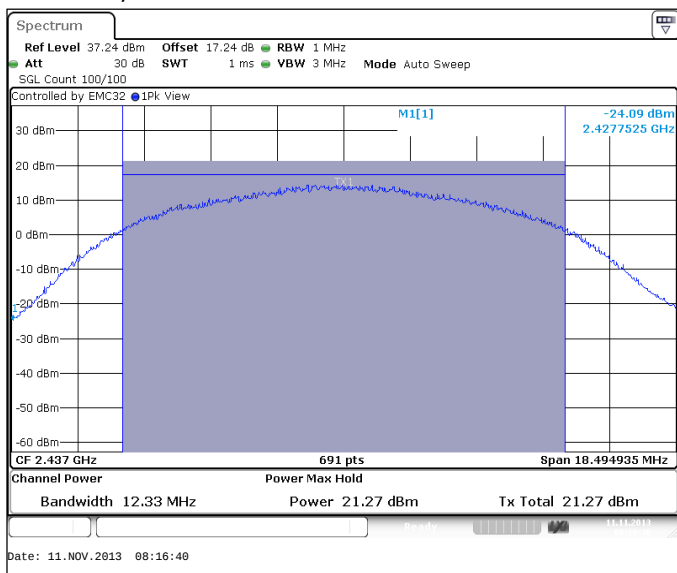


Channel 11 / 2462 MHz

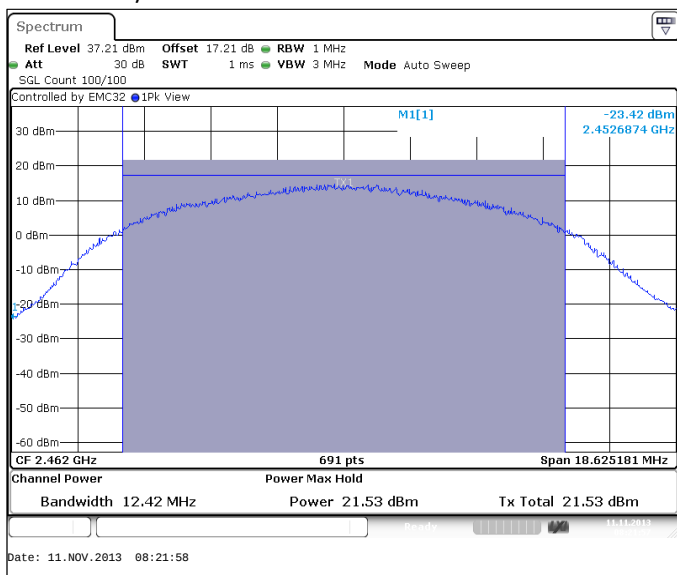


2.4.2 802.11g mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	18.54	71.45	PASSED
6 / 2437	22.49	177.419	PASSED
11 / 2462	19.38	86.696	PASSED


Channel 1 / 2412 MHz

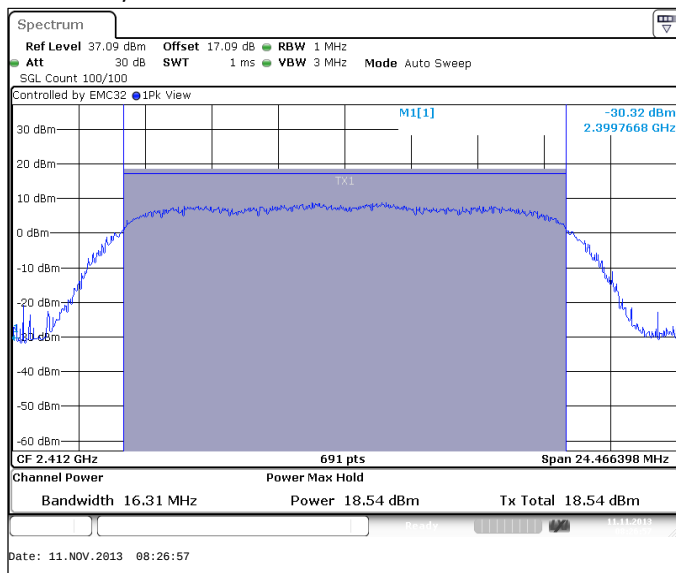

Channel 6 / 2437 MHz

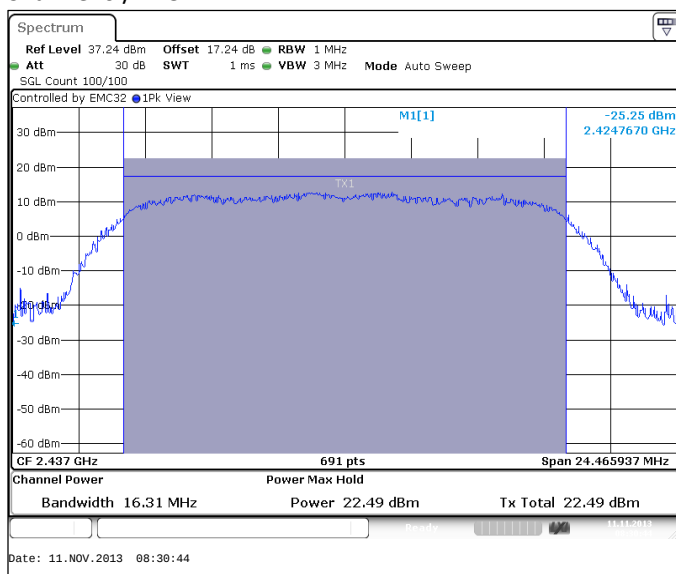


Channel 11 / 2462 MHz

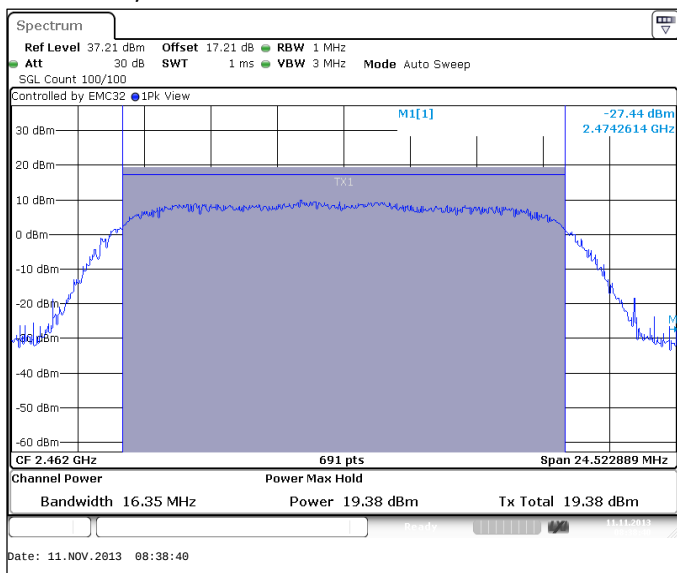


2.4.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	18.38	68.865	PASSED
6 / 2437	20.89	122.744	PASSED
11 / 2462	19.27	84.528	PASSED


Channel 1 / 2412 MHz

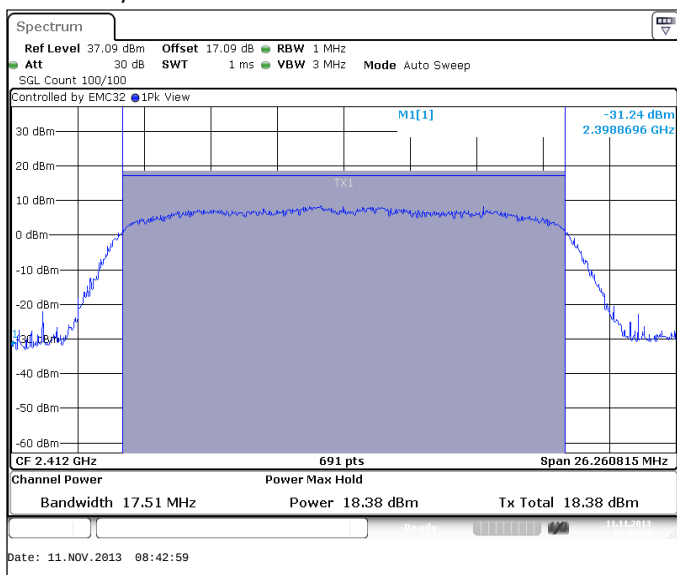

Channel 6 / 2437 MHz

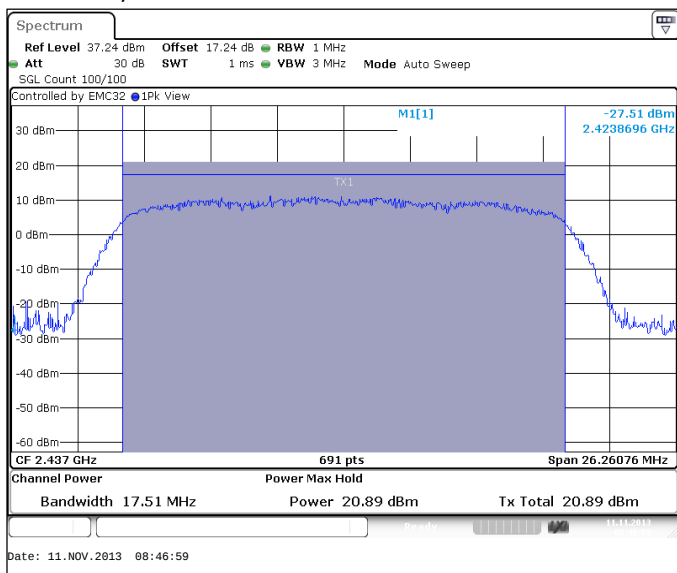


Channel 11 / 2462 MHz

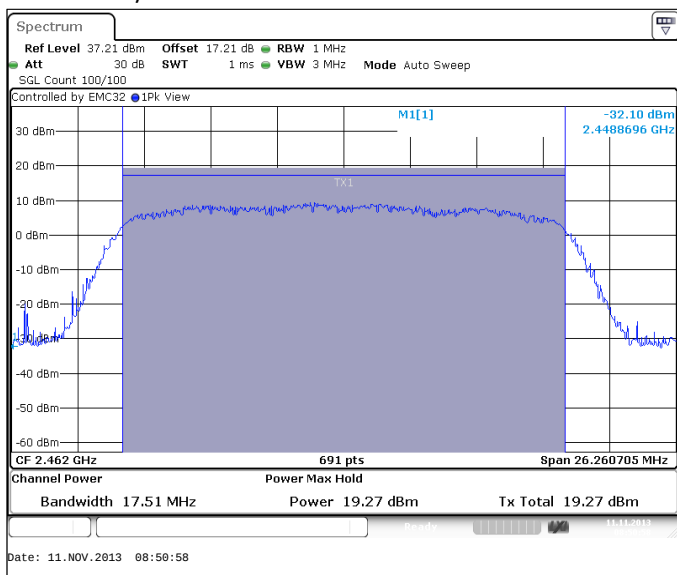

3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-958, DUT 53922
Accessories with DUT numbers	BL-4U, DUT 53928 ; AC-20E, DUT 53929 ; WH-108, DUT 53930
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18.5/32.8/101.3
Date of measurements	06-Nov-2013
Measured by	Zou Ming

3.1.1 Test setup

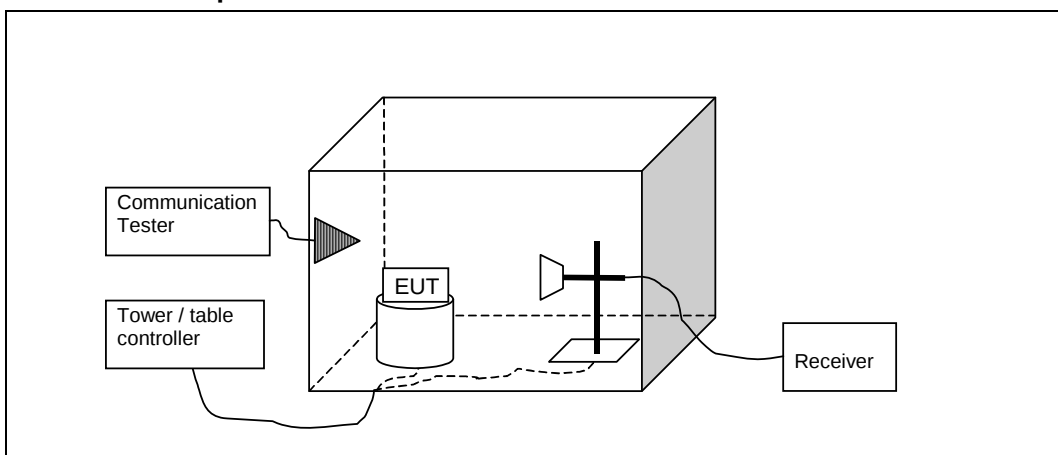

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

3.3. WLAN test results

3.3.1 802.11b, QPSK modulation, 11 Mbps data rate.

Channel 1 / 2412 MHz

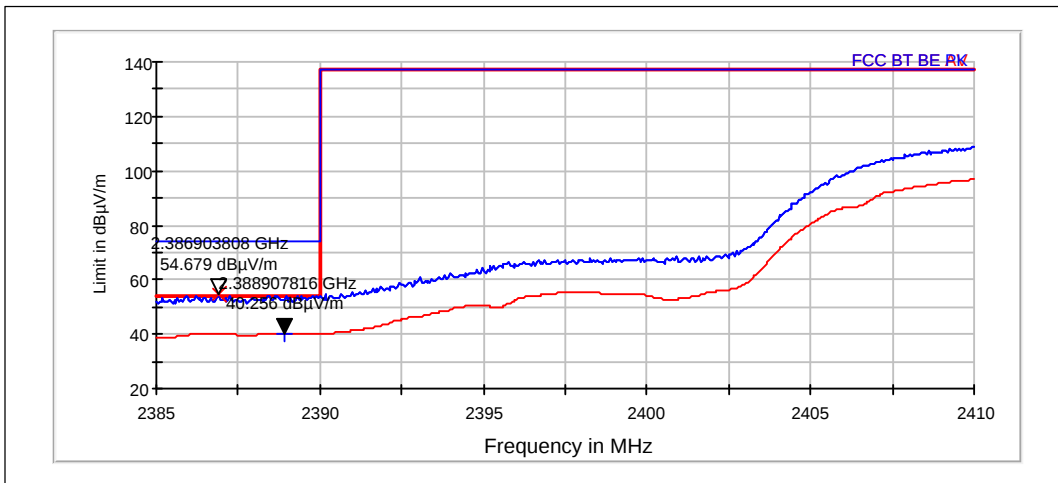


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2387	54.68	541.938	55.12	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	40.26	102.991	40.7	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

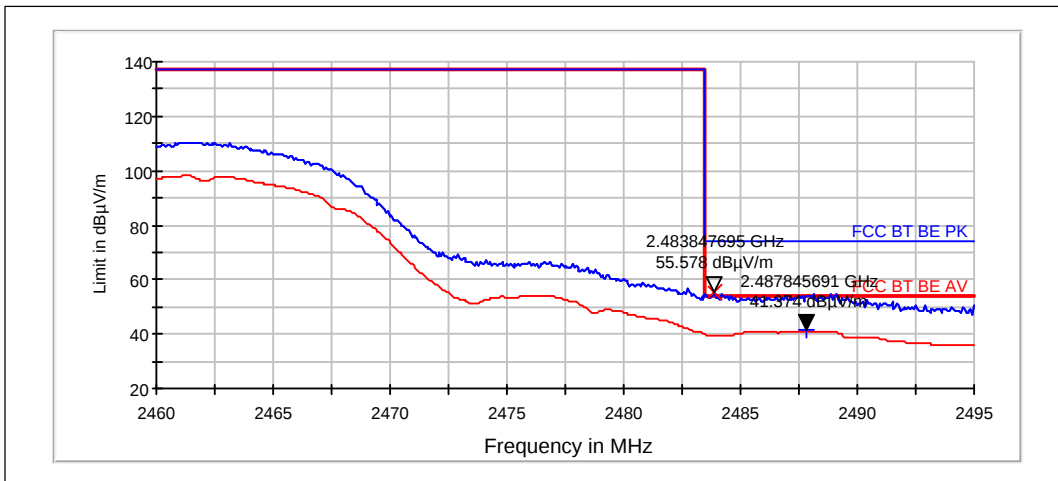

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	55.58	601.035	55.61	-0.03	-0.026	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2488	41.37	117.139	41.4	-0.03	-0.026	PASSED

3.3.2 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 1 / 2412 MHz

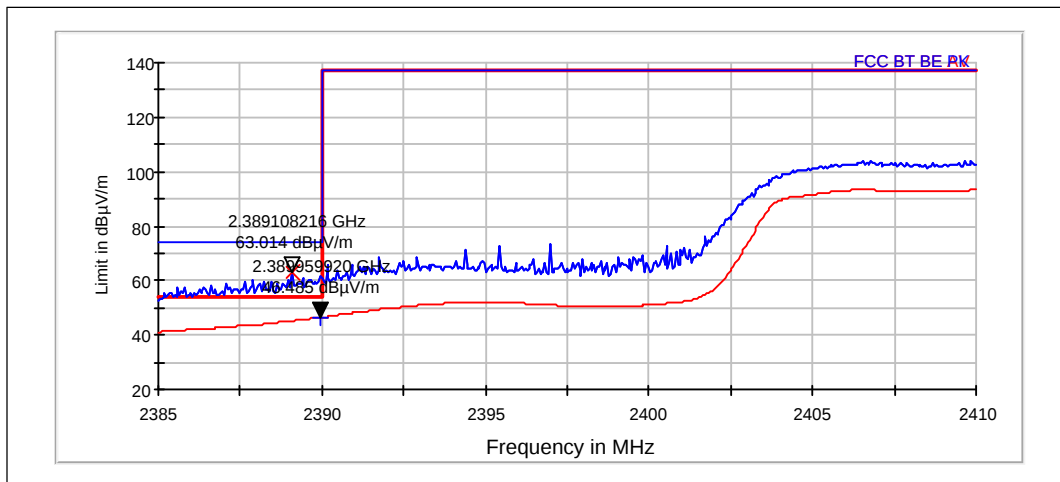


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	63.01	1414.816	63.45	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	46.49	210.984	46.93	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

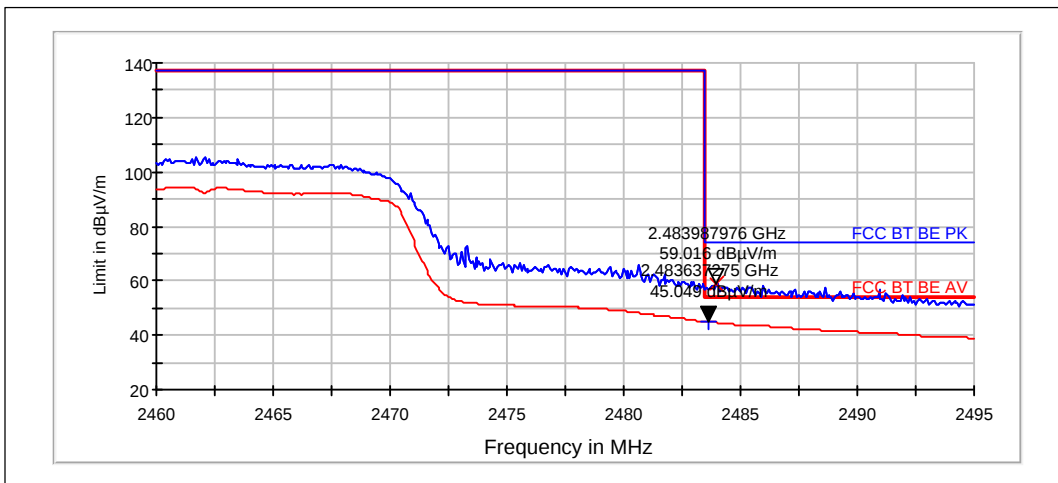

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	59.02	892.894	59.05	-0.03	-0.026	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	45.05	178.834	45.08	-0.03	-0.026	PASSED

3.3.3 802.11n, BPSK modulation, 6.5 / 7.25 Mbps data rate.

Channel 1 / 2412 MHz

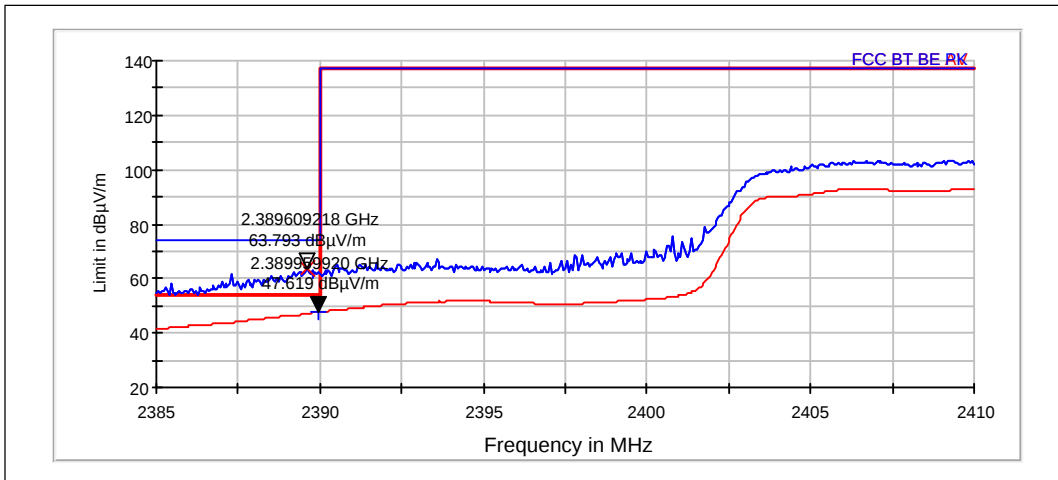


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	63.79	1547.569	64.23	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	47.62	240.409	48.06	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

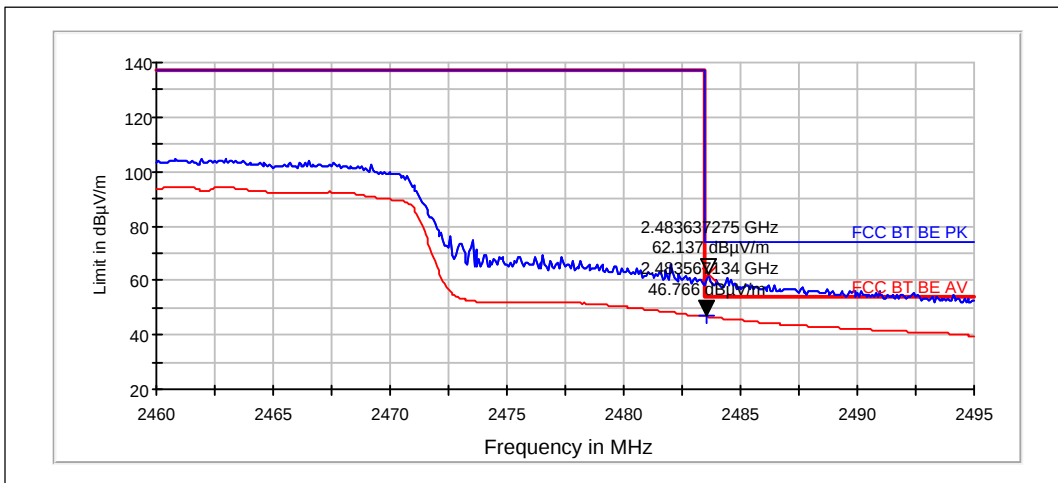

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	62.14	1278.939	62.17	-0.03	-0.026	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	46.77	217.921	46.8	-0.03	-0.026	PASSED

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-958, DUT 53926
Accessories with DUT numbers	BL-4U, DUT 53946 ; AC-20E, DUT 53327 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test was done in conducted RF2 system.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/26/102
Date of measurements	11-Nov-2013
Measured by	Mark Ma

4.1. Test Setup

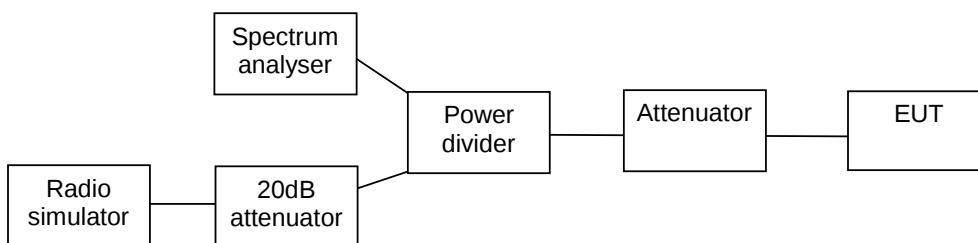

4.2. Test method and limit

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

4.3. WLAN Test results

4.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

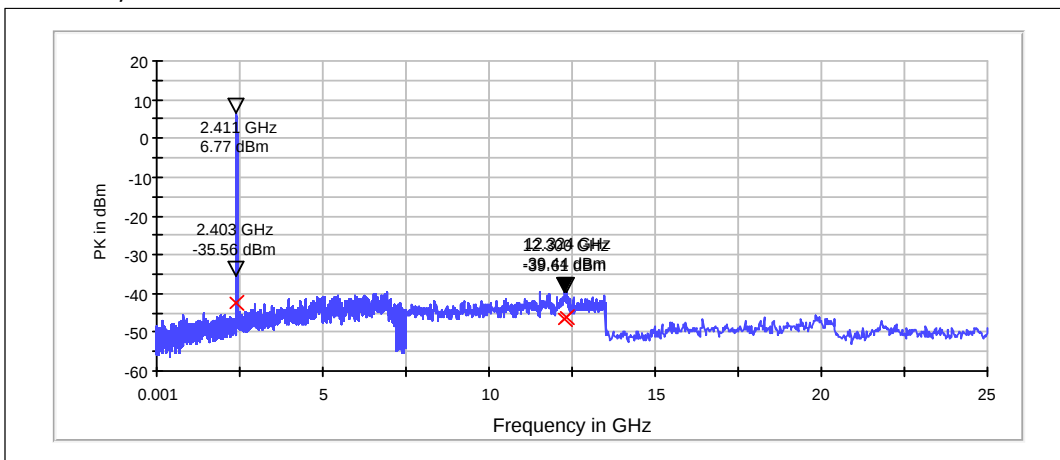

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2403.188	-42.33	PASSED
12324.000	-46.21	PASSED
12300.000	-46.37	PASSED


Channel 6 / 2437 MHz

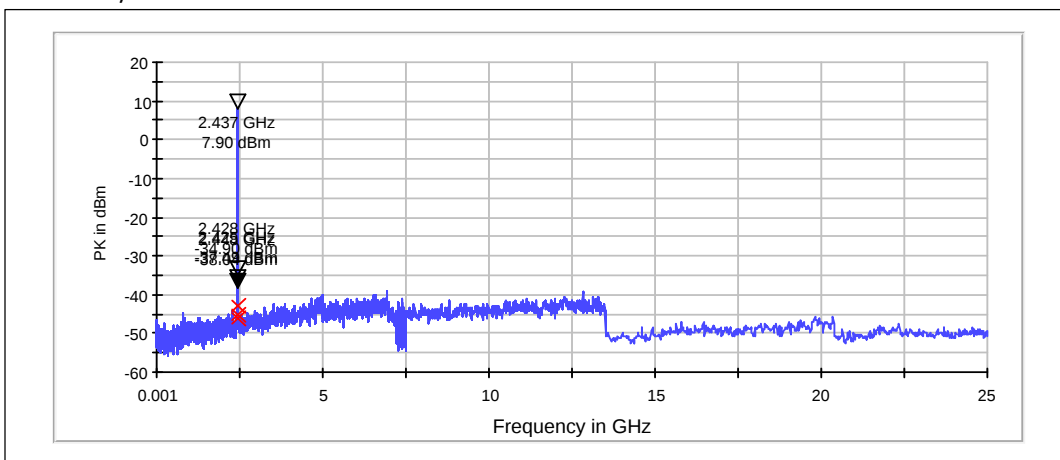

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2428.138	-42.79	PASSED
2425.276	-45.39	PASSED
2447.714	-45.93	PASSED

Channel 11 / 2462 MHz

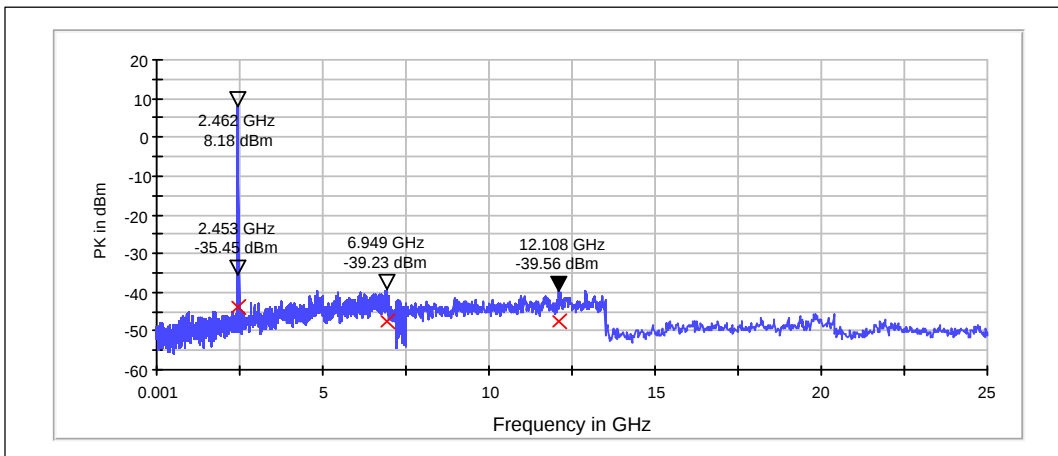


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBm]	Result
2453.088	-43.62	PASSED
6949.200	-47.40	PASSED
12108.000	-47.74	PASSED

4.3.2 802.11g mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

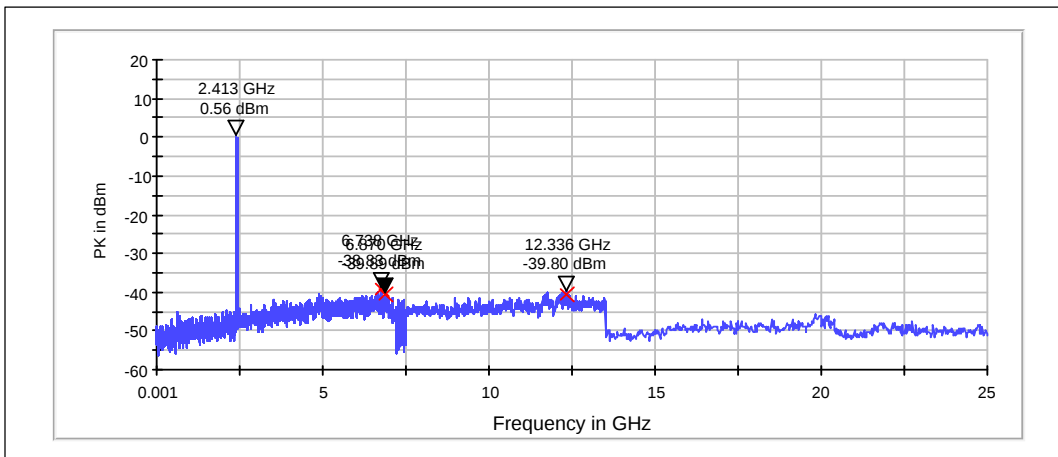

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBm]	Result
6738.000	-39.39	PASSED
12336.000	-40.36	PASSED
6870.000	-40.45	PASSED


Channel 6 / 2437 MHz

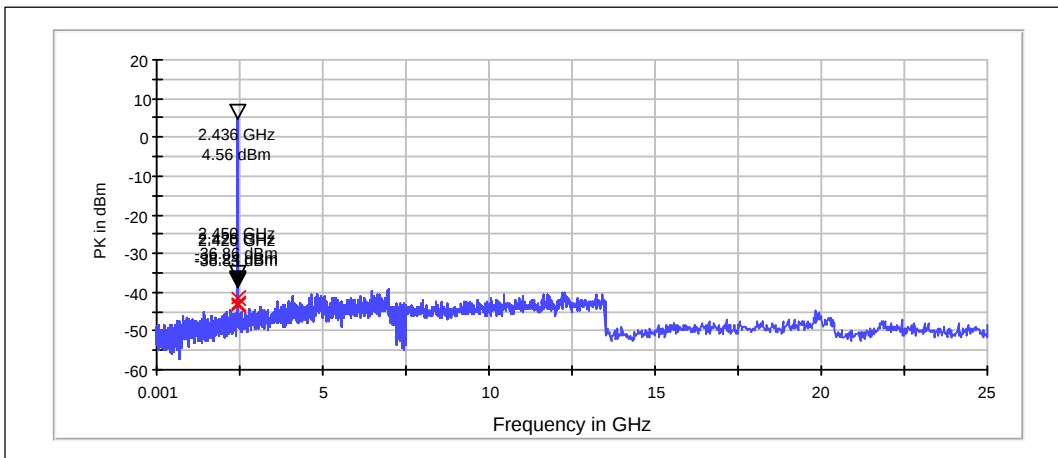

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2449.710	-41.42	PASSED
2426.142	-42.80	PASSED
2420.426	-43.40	PASSED

Channel 11 / 2462 MHz

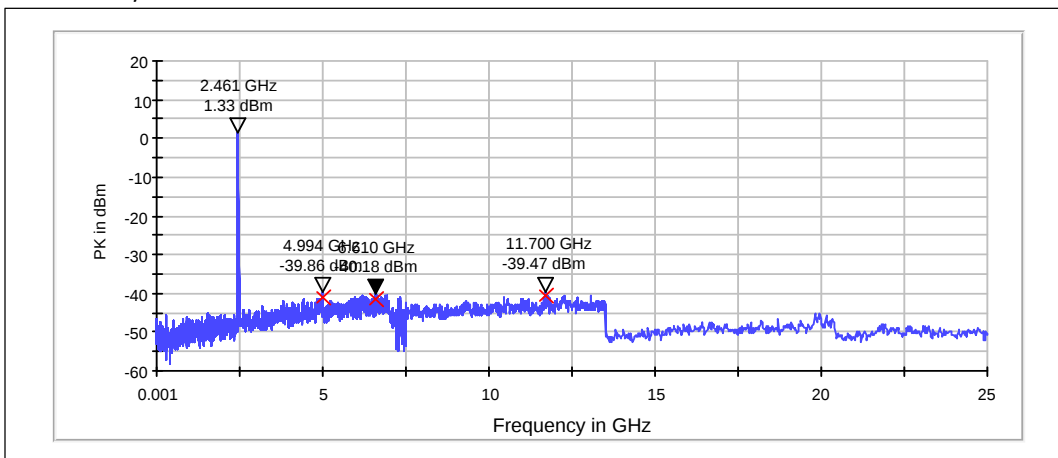


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
11700.000	-40.80	PASSED
4994.000	-41.19	PASSED
6610.400	-41.50	PASSED

4.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate


Channel 1 / 2412 MHz

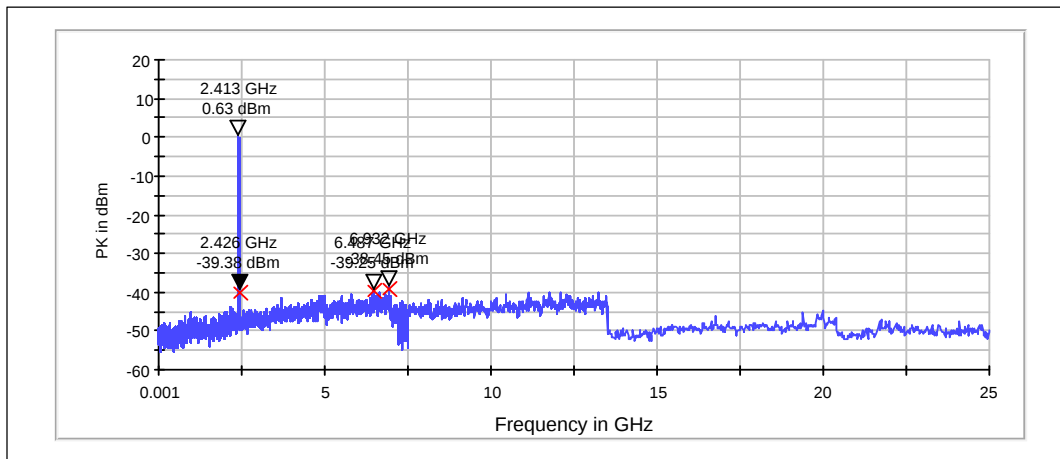

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
6931.600	-39.07	PASSED
6487.200	-39.88	PASSED
2425.758	-40.01	PASSED


Channel 6 / 2437 MHz

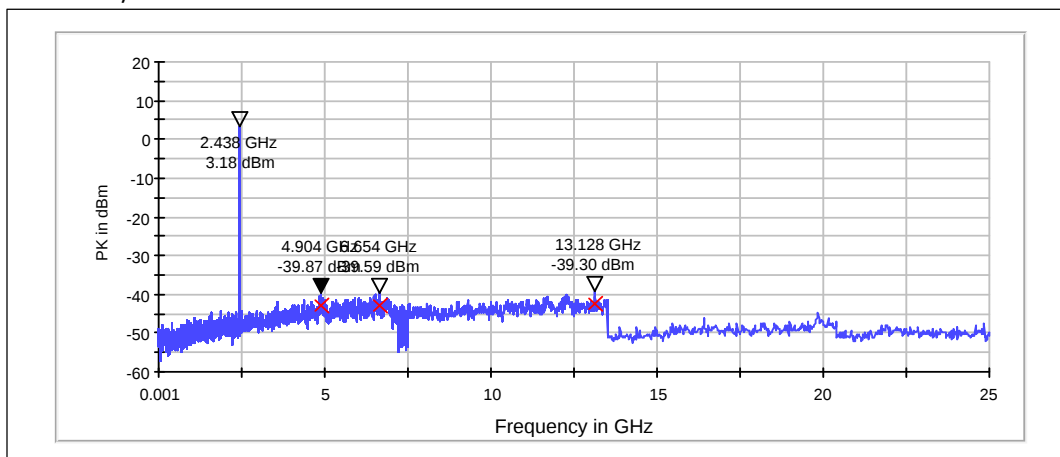

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
13128.000	-42.48	PASSED
6654.400	-42.77	PASSED
4903.600	-43.05	PASSED

Channel 11 / 2462 MHz

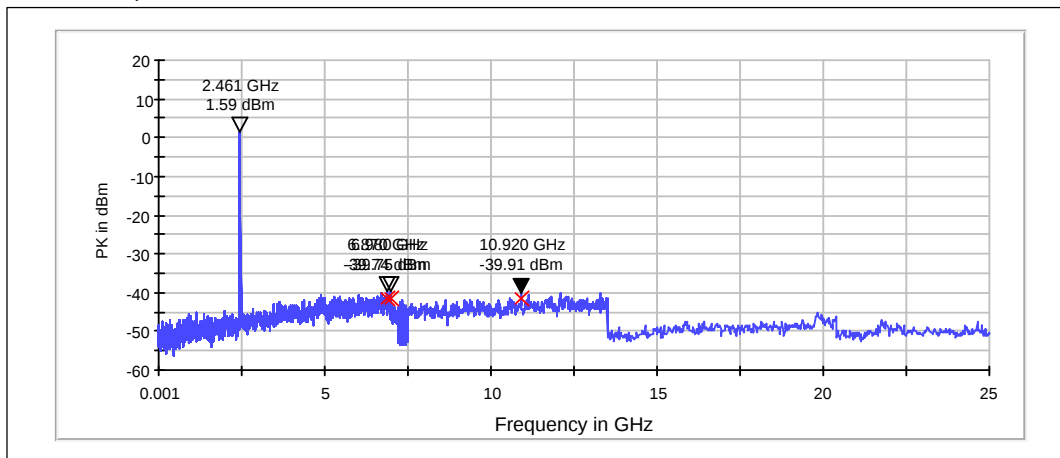


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
6870.000	-41.34	PASSED
6980.000	-41.35	PASSED
10920.000	-41.50	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-958, DUT 53922
Accessories with DUT numbers	BL-4U, DUT 53928 ; AC-20E, DUT 53929 ; WH-108, DUT 53930
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18.5/32.8/101.5
Date of measurements	07-Nov-2013
Measured by	Zou Ming

5.1.1 Test setup

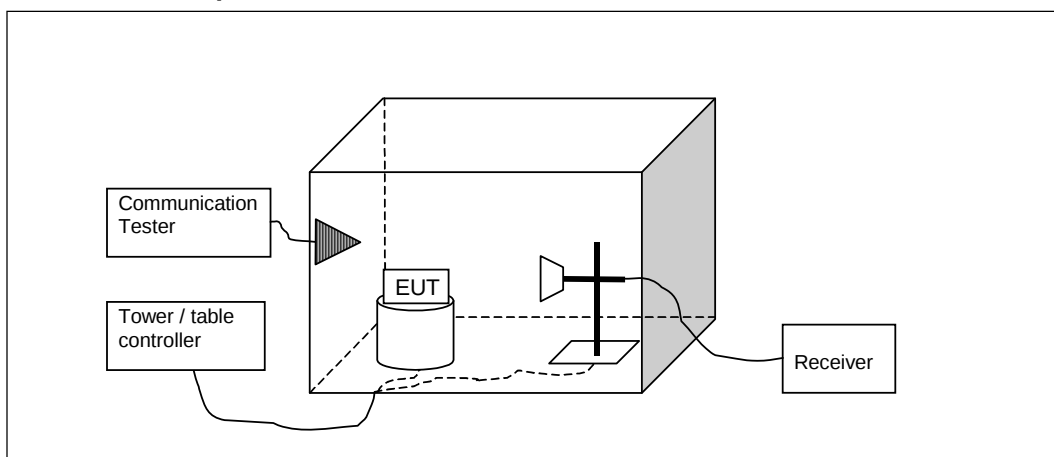

5.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 - 216	150	43.5	Quasi peak
216 - 960	200	46	Quasi peak
960 - 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.3. WLAN test results

5.3.1 802.11b, QPSK modulation, 11 Mbps data rate.

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4878.7	42.23	129.226	40.61	1.62	31.8	74	PASSED
7320.9	48.6	269.215	38.53	10.07	25.4	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
902.312	43.58	151.06	47.56	-3.98	2.4	46	PASSED
904.046	29.94	31.391	33.86	-3.92	16.1	46	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4878.7	29.04	28.317	27.42	1.62	24.9	54	PASSED
7320.9	35.68	60.779	25.61	10.07	18.3	54	PASSED

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.6	41.69	121.507	40.22	1.47	32.3	74	PASSED
7236.3	48.82	275.962	38.62	10.2	46.4	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.6	28.41	26.333	26.94	1.47	25.6	54	PASSED
7236.3	35.83	61.866	25.63	10.2	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.7	42.62	135.207	40.77	1.85	31.4	74	PASSED
7384.6	48.8	275.328	38.45	10.35	25.2	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4924.7	29.31	29.215	27.46	1.85	24.7	54	PASSED
7384.6	35.65	60.583	25.3	10.35	18.3	54	PASSED

5.3.2 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4879.9	41.61	120.365	40.01	1.6	32.4	74	PASSED
7320.9	48.85	277.077	38.78	10.07	25.1	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.978	31.93	39.487	40.45	-8.52	8.1	40	PASSED
910.447	23.36	14.73	27.23	-3.87	22.7	46	PASSED
959.074	23.91	15.684	27.48	-3.57	22.1	46	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4879.9	29.01	28.207	27.41	1.6	25	54	PASSED
7320.9	35.62	60.374	25.55	10.07	18.4	54	PASSED

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.9	41.52	119.165	40.05	1.47	32.5	74	PASSED
7234.1	48.5	266.103	38.32	10.18	46.7	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.9	28.21	25.742	26.74	1.47	25.8	54	PASSED
7234.1	35.54	59.862	25.36	10.18	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4926	42	125.864	40.17	1.83	32	74	PASSED
7387.2	48.69	271.988	38.32	10.37	25.3	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4926	29.35	29.346	27.52	1.83	24.6	54	PASSED
7387.2	35.65	60.569	25.28	10.37	18.3	54	PASSED

5.3.3 802.11n, BPSK modulation, 6.5 / 7.25 Mbps data rate.

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4879.6	41.83	123.41	40.22	1.61	32.2	74	PASSED
7319.3	48.54	267.424	38.49	10.06	25.4	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.59	31.1	35.884	39.37	-8.27	8.9	40	PASSED
31.65	31.35	36.94	39.66	-8.31	8.6	40	PASSED
32.068	30.6	33.888	39.18	-8.58	9.4	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4879.6	28.83	27.628	27.22	1.61	25.2	54	PASSED
7319.3	35.67	60.772	25.62	10.06	18.3	54	PASSED

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4823.4	41.32	116.413	39.86	1.46	32.7	74	PASSED
7235.2	49.31	292.079	39.12	10.2	45.9	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4823.4	28.32	26.056	26.86	1.46	25.7	54	PASSED
7235.2	35.77	61.426	25.58	10.2	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4922.7	42.31	130.422	40.46	1.85	31.7	74	PASSED
7385.5	49.36	293.664	38.99	10.37	24.6	74	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4922.7	29.51	29.881	27.66	1.85	24.5	54	PASSED
7385.5	35.92	62.51	25.55	10.37	18.1	54	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-958, DUT 53924
Accessories with DUT numbers	BL-4U, DUT 53946 ; AC-20E, DUT 53327 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/26/102
Date of measurements	11-Nov-2013
Measured by	Mark Ma

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to procedure KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. WLAN Test results

6.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel 6 / 2437 MHz

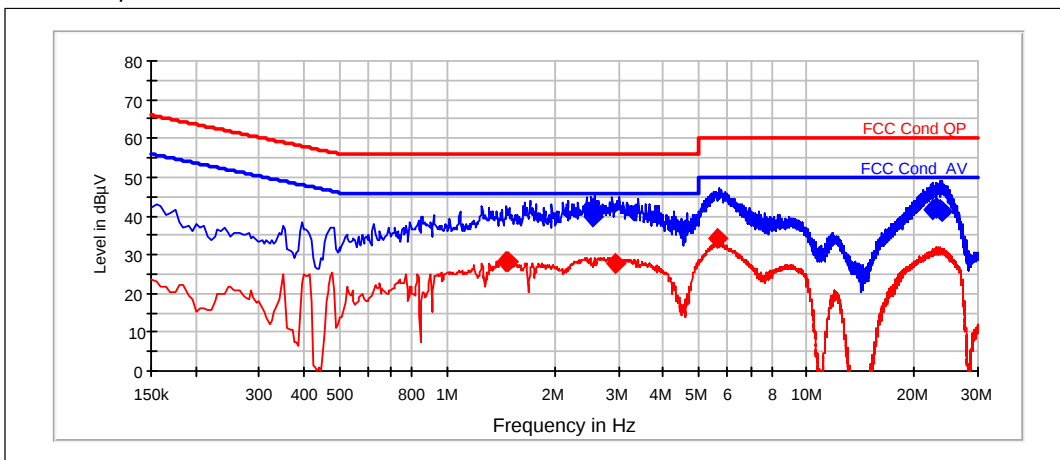

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
2.54	39.73	L1	PASSED
22.55	41.73	L1	PASSED
22.93	41.93	L1	PASSED
22.96	42.15	L1	PASSED
23.57	41.39	L1	PASSED
23.865	41.24	L1	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.45	28.05	N	PASSED
1.47	28.39	N	PASSED
2.95	27.88	L1	PASSED
5.675	34.1	L1	PASSED

7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-958, DUT 53926
Accessories with DUT numbers	BL-4U, DUT 53946 ; AC-20E, DUT 53327 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test was done in conducted RF2 system.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/26/102
Date of measurements	11-Nov-2013
Measured by	Mark Ma

7.1. Test Setup

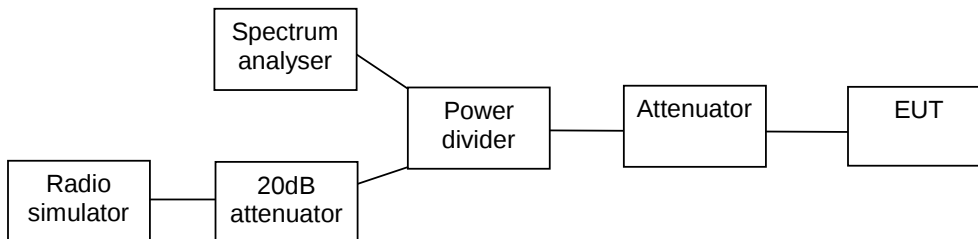

7.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
>= 500

7.3. WLAN Test results


7.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	12416.8	PASSED
6 / 2437	12330	PASSED
11 / 2462	12416.8	PASSED


Channel 1 / 2412 MHz

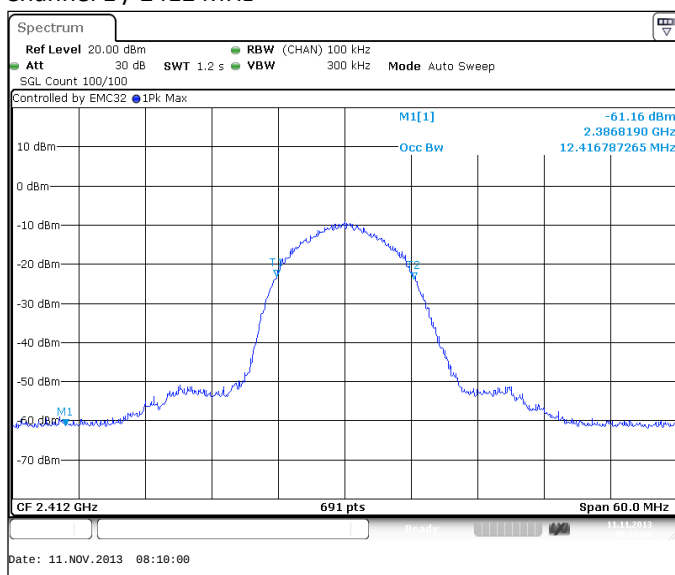

Channel 6 / 2437 MHz

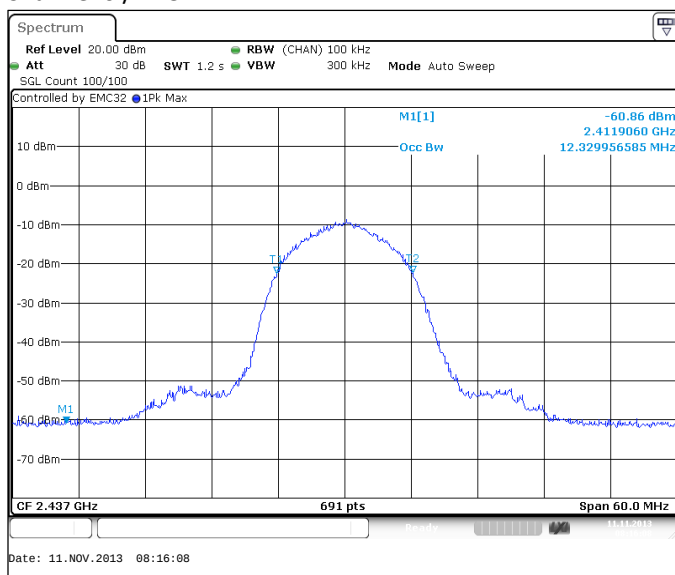


Channel 11 / 2462 MHz

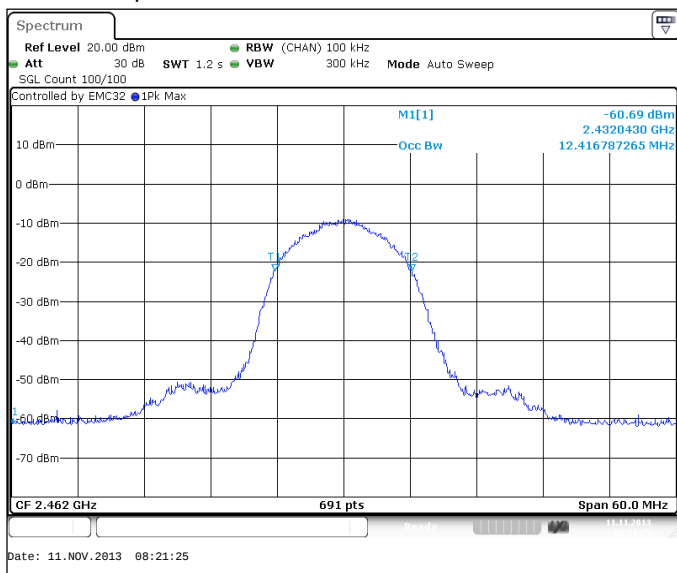


7.3.2 802.11g mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16310.9	PASSED
6 / 2437	16310.6	PASSED
11 / 2462	16348.6	PASSED


Channel 1 / 2412 MHz

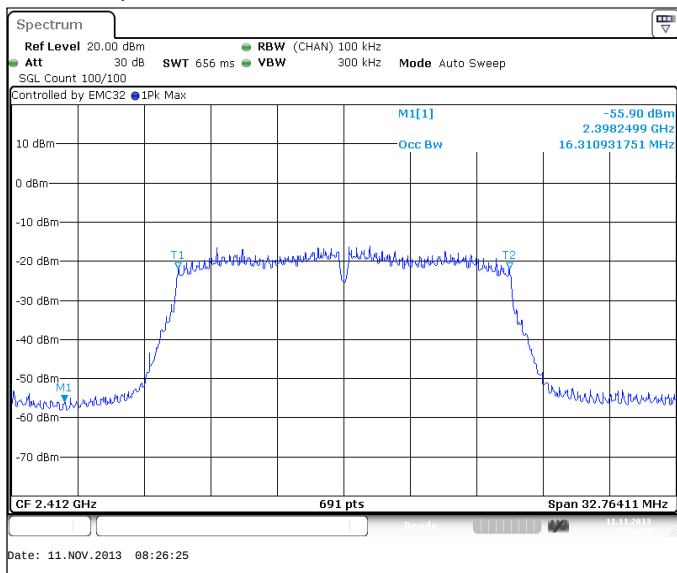

Channel 6 / 2437 MHz

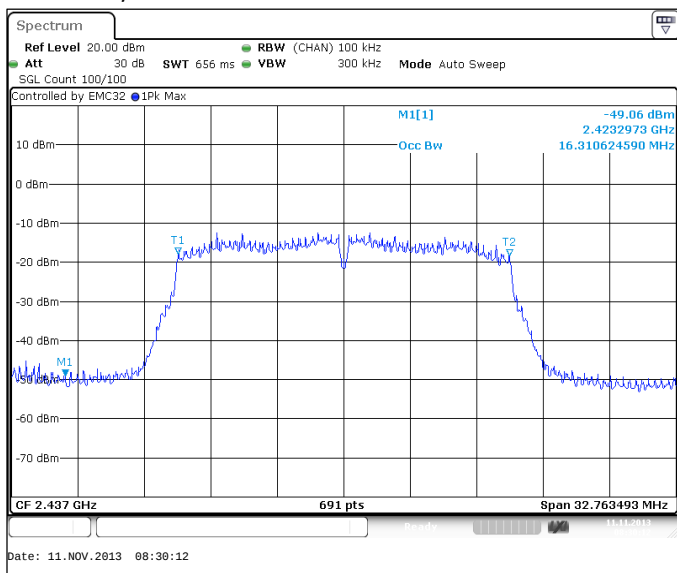


Channel 11 / 2462 MHz

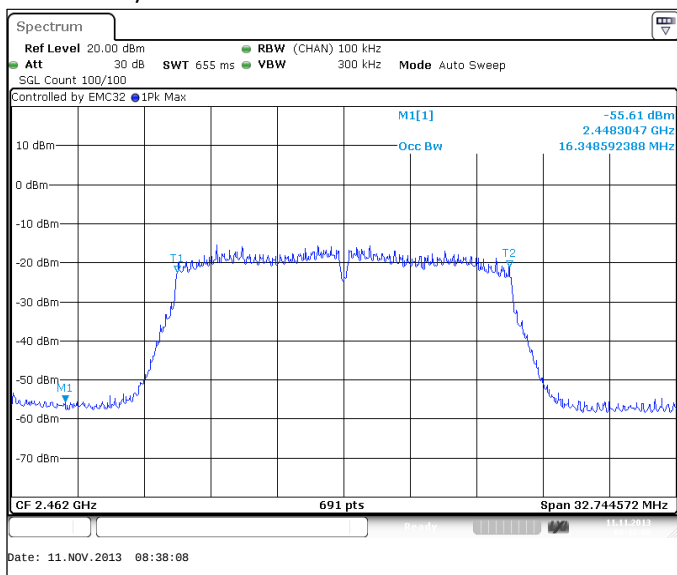


7.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	17507.2	PASSED
6 / 2437	17507.2	PASSED
11 / 2462	17507.1	PASSED


Channel 1 / 2412 MHz

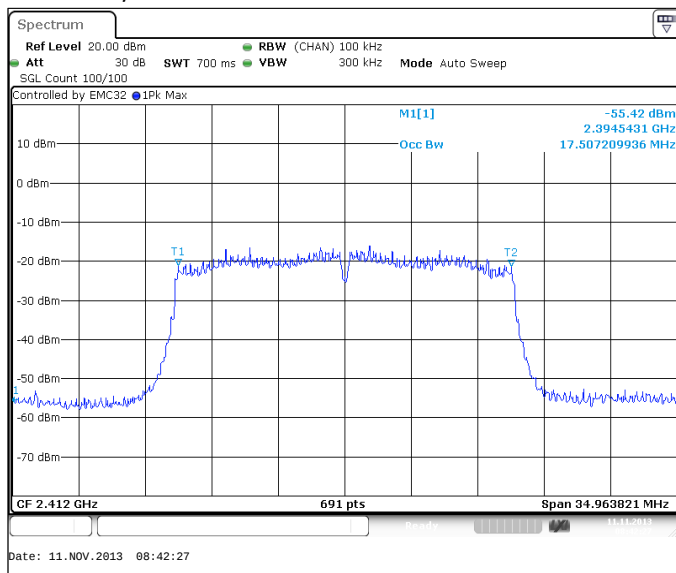

Channel 6 / 2437 MHz

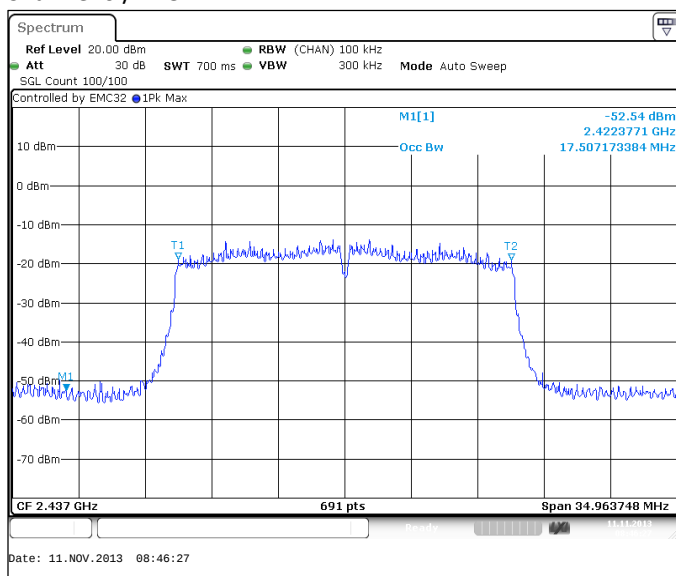


Channel 11 / 2462 MHz

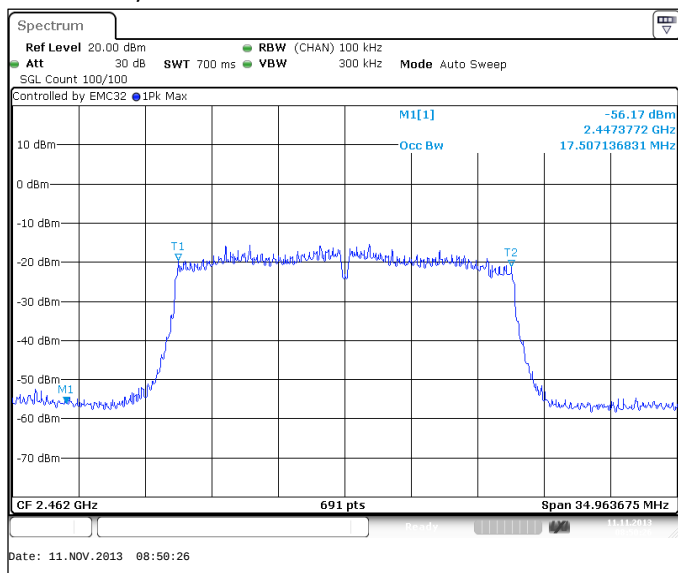

8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-958, DUT 53926
Accessories with DUT numbers	BL-4U, DUT 53946 ; AC-20E, DUT 53327 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test was done in conducted RF2 system.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/26/102
Date of measurements	11-Nov-2013
Measured by	Mark Ma

8.1. Test Setup

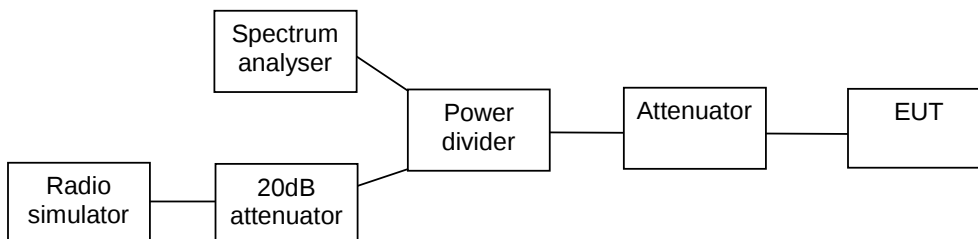

8.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements

Limit [dBm] @ 3 kHz
<= 8


8.3. WLAN Test results

8.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-8.03	PASSED
6 / 2437	-7.66	PASSED
11 / 2462	-6.93	PASSED


Channel 1 / 2412 MHz

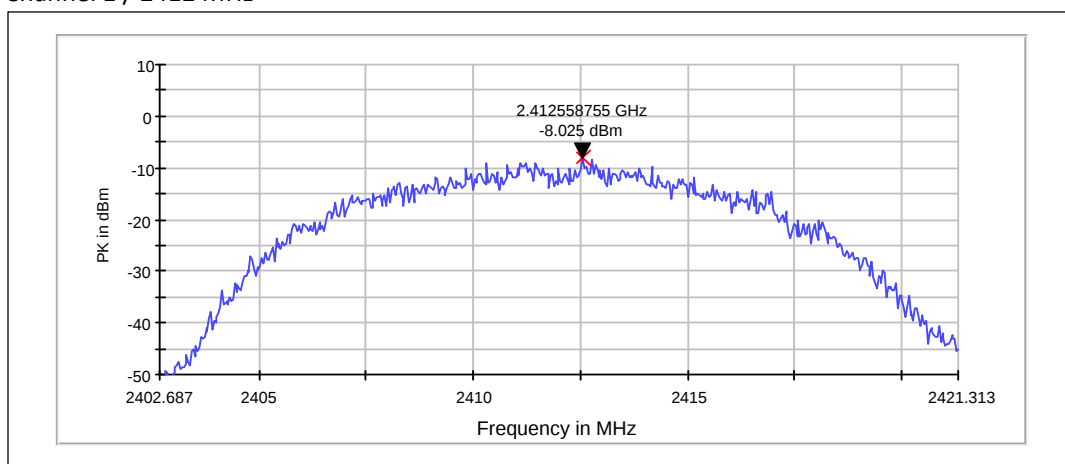

Channel 6 / 2437 MHz

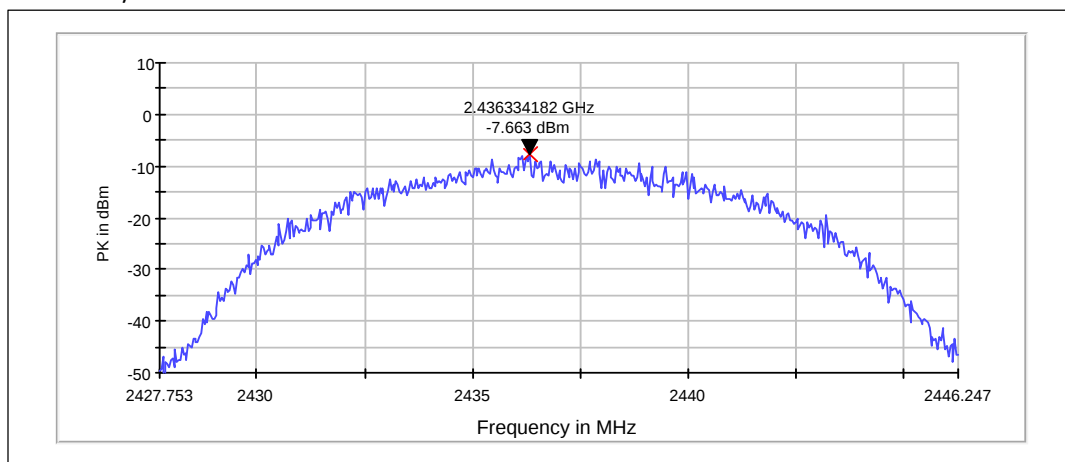

Channel 11 / 2462 MHz

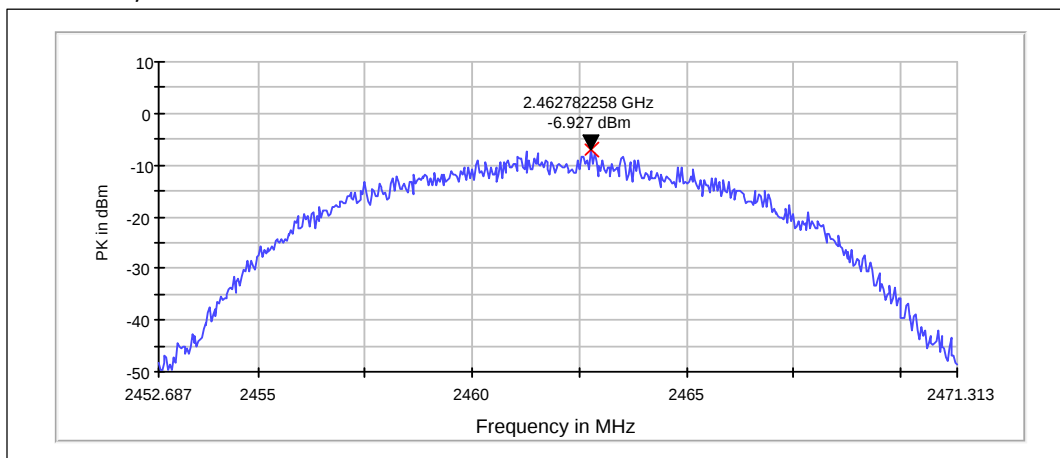


8.3.2 802.11g mode, BPSK modulation, 6 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel 11 / 2462 MHz	P [dBm]	Result
1 / 2412	-13.34	PASSED
6 / 2437	-9.12	PASSED
11 / 2462	-13.1	PASSED


Channel 1 / 2412 MHz

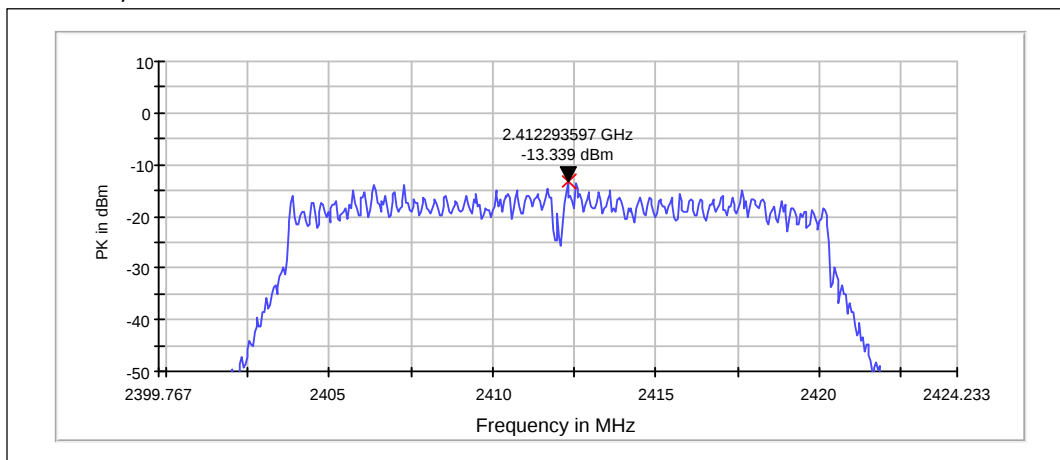

Channel 6 / 2437 MHz

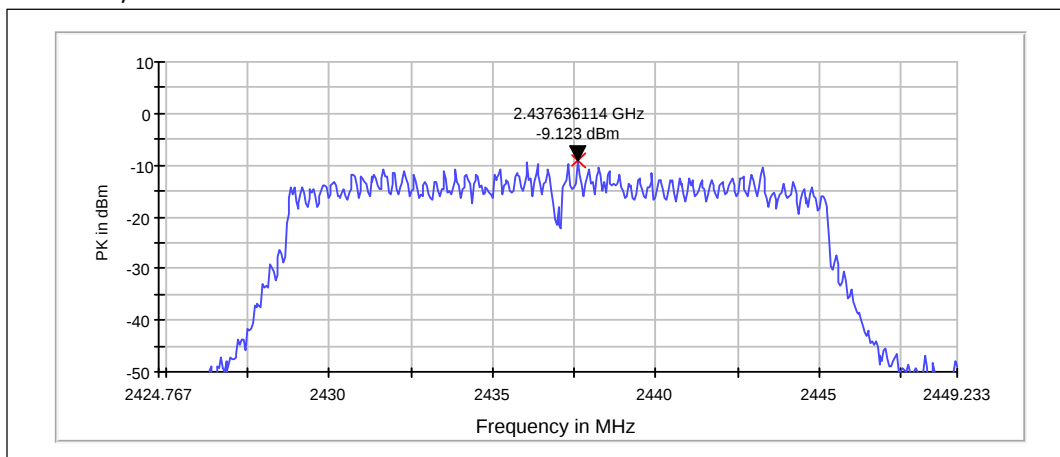

Channel 11 / 2462 MHz

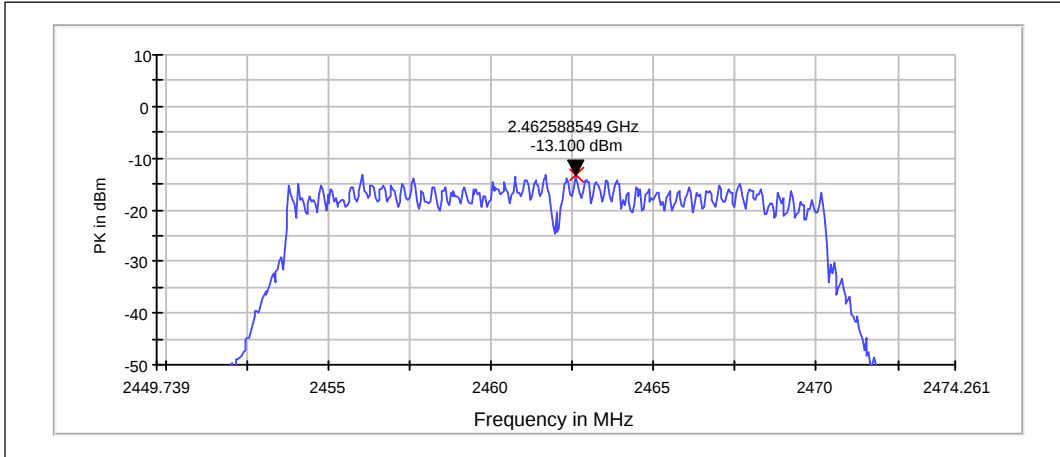


8.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-13.71	PASSED
6 / 2437	-10.72	PASSED
11 / 2462	-12.61	PASSED


Channel 1 / 2412 MHz

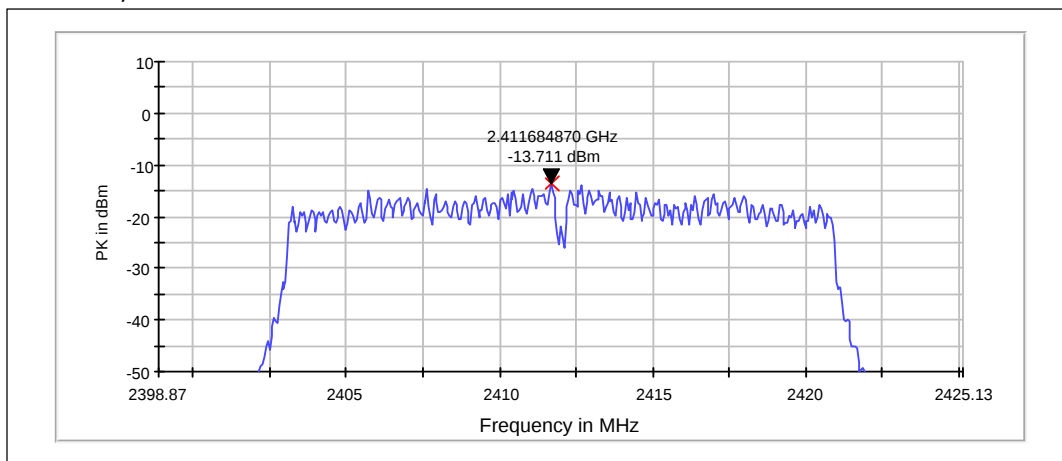

Channel 6 / 2437 MHz

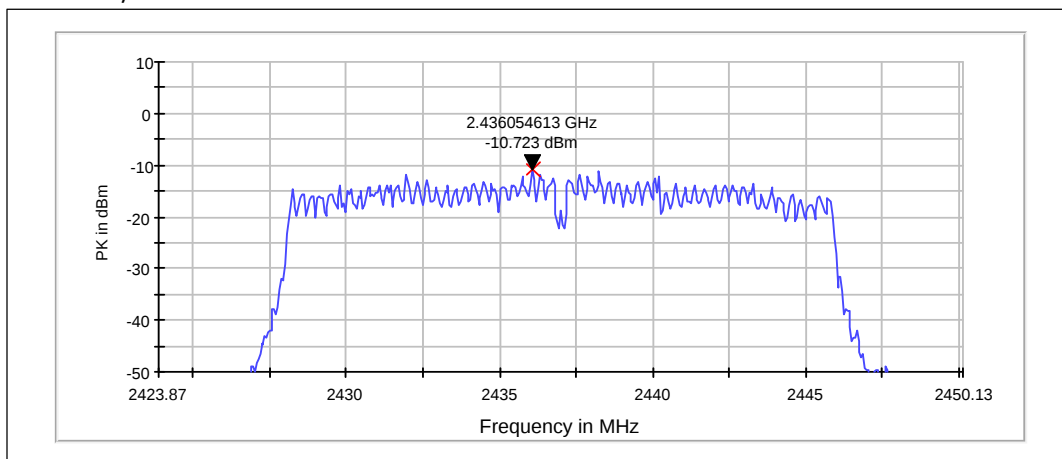

Channel 11 / 2462 MHz

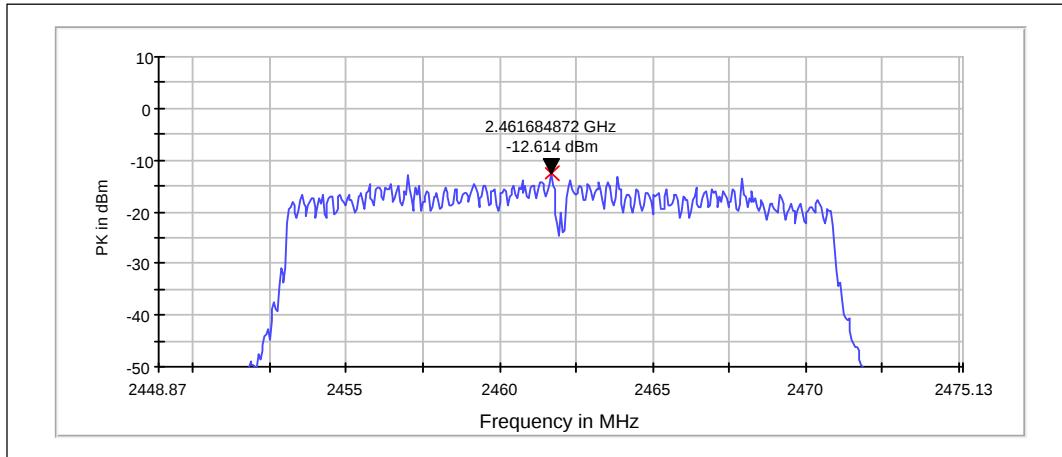

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	HP6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C, 15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0089	Tempreture Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPIO converter	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPIO-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCHW0571	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Tempreture Test chamber	VT4002	Votsch	22/24/27, 15C

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C,15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B,15C
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B,15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B,15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B,15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0318	Preamplifier	AFS42-00101500-25-10P-42	-	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B