

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-995_09.docx	Date of Report:	13-Dec-2013
Number of pages:	46	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-995 / Battery BV-4BWA(Sony) / AC-Charger AC-60E / USB data cable CA-190CD / Headset WH-108		
FCC ID:	QTLRM-995	IC:	661AB-RM995
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Gao Sherina, Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	01-Nov-2013
Testing completed	15-Nov-2013
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-994\TestPlan\RS_testplan_RM-994.xlsm
Notes	-
Document name	FCC15CWLAN_RM-995_09.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-994	004402476325307	1001	-	3052.40000.1342.0000	53797
Battery	BV-4BWA(Sony)	-	Ver.2.0	-	-	53959
AC-Charger	AC-60E	4868673331710300060;0675677	-	-	-	53961
USB data cable	CA-190CD	07304563151628	-	-	-	53962
Headset	WH-108	3323471	-	-	-	53963
Phone	RM-994	004402476326388	1000	-	3052.40000.1341.0000	53932
Battery	BV-4BWA(Sony)	-	Ver.2.0	-	-	53933
AC-charger	AC-60E	4868673343710301247;0675677	-	-	-	53949
USB data cable	CA-190CD	-	-	-	-	53951
Headset	WH-108	3323471	-	-	-	53950
Phone	RM-994	004402476329242	1000	-	3052.40000.1341.0000	53796
Battery	BV-4BWA(Sony)	-	Ver.2.0	-	-	53938
AC-Charger	AC-60E	4868673343710300275;0675677	-	-	-	53942
USB data cable	CA-190CD	07304563151628	-	-	-	53943
Headset	WH-108	3323471	-	-	-	53944

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(4))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8(0.1(1))	6dB(bandwidth)	PASSED
15.247(e)	A8(0.1(2))	Power spectral density	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

The test results of QTLRM-994 are re-used for certification of the QTLRM-995. The table above indicates the results, which will be re-used.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4))	6
2.1. Test Setup.....	6
2.2. Test method and limit.....	6
2.3. Power results summary.....	7
2.4. WLAN Test results	7
3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	13
3.2. Test method and limit.....	13
3.3. WLAN test results	14
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	20
4.1. Test Setup.....	20
4.2. Test method and limit.....	20
4.3. WLAN Test results	21
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	26
5.2. Test method and limit.....	26
5.3. WLAN test results	28
6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2).....	32
6.1. Test Setup.....	32
6.2. Test method and limit.....	32
6.3. WLAN Test results	33
7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1)).....	34
7.1. Test Setup.....	34
7.2. Test method and limit.....	34
7.3. WLAN Test results	35
8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))	40
8.1. Test Setup.....	40
8.2. Test method and limit.....	40

8.3.	WLAN Test results	41
9.	Test Equipment.....	45
9.1.	Conducted measurements	45
9.2.	Radiated measurements	45

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/30/101.4 to 20/30/101.2
Date of measurements	14-Nov-2013 to 15-Nov-2013
Measured by	Gao Sherina

2.1. Test Setup

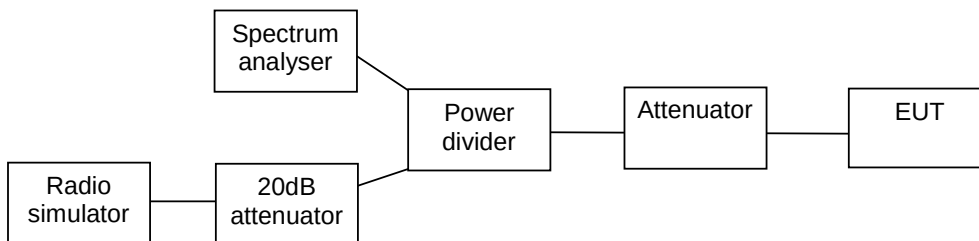

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	<= 1	<= 30

2.3. Power results summary

Channel / f _c [MHz]	Mode	Modulation	Data rate	Level [dBm]
1 / 2412	802.11b	QPSK	11 Mbps	21.74
6 / 2437	802.11b	QPSK	11 Mbps	21.68
11 / 2462	802.11b	QPSK	11 Mbps	22.26
1 / 2412	802.11g	64QAM	48 Mbps	16.9
6 / 2437	802.11g	64QAM	48 Mbps	17.48
11 / 2462	802.11g	64QAM	48 Mbps	17.87
1 / 2412	802.11n	BPSK	6.5 / 7.25 Mbps	16.89
6 / 2437	802.11n	BPSK	6.5 / 7.25 Mbps	17.03
11 / 2462	802.11n	BPSK	6.5 / 7.25 Mbps	17.18


2.4. WLAN Test results

WLAN 2.4 GHz, peak output power [dBm]	
Mode & data speed	Ch 6
b-mode WLAN DSSS 1 Mbps	19.26
b-mode WLAN DSSS 2 Mbps	19.2
b-mode WLAN DSSS 5.5 Mbps	20.67
b-mode WLAN DSSS 11 Mbps	21.77
g-mode WLAN OFDM 6 Mbps	17.18
g-mode WLAN OFDM 9 Mbps	17.22
g-mode WLAN OFDM 12 Mbps	16.81
g-mode WLAN OFDM 18 Mbps	16.84
g-mode WLAN OFDM 24 Mbps	17.18
g-mode WLAN OFDM 36 Mbps	17.22
g-mode WLAN OFDM 48 Mbps	17.29
g-mode WLAN OFDM 54 Mbps	17.2


2.4.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	21.74	149.279	PASSED
6 / 2437	21.68	147.231	PASSED
11 / 2462	22.26	168.267	PASSED


Channel 1 / 2412 MHz

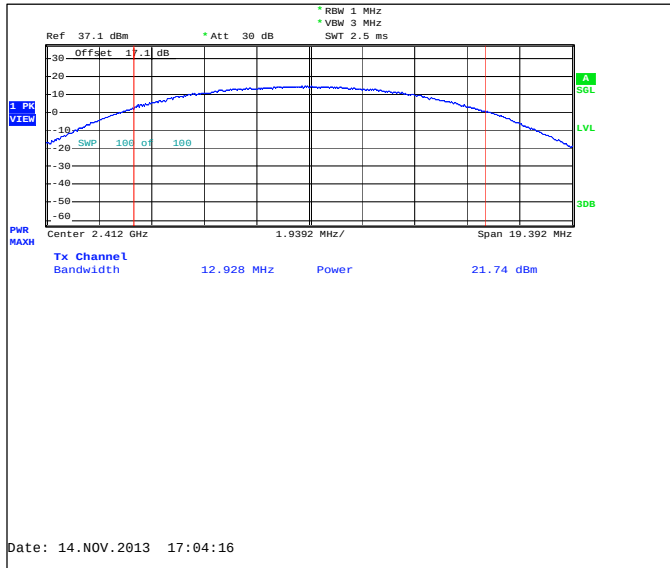

Channel 6 / 2437 MHz

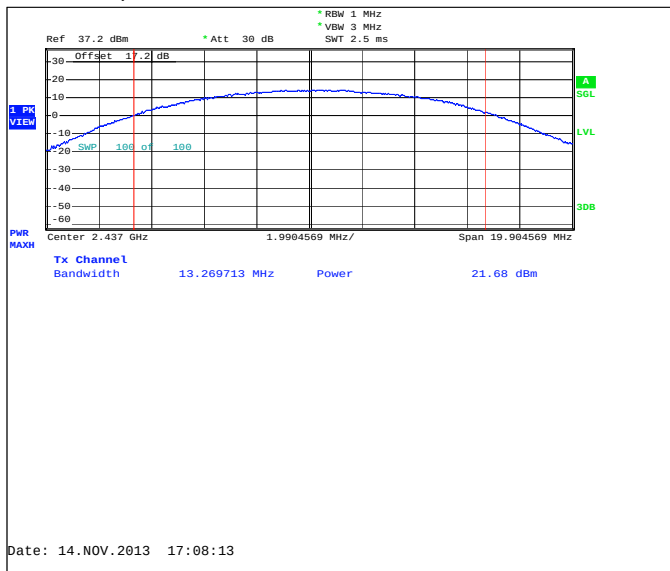


Channel 11 / 2462 MHz

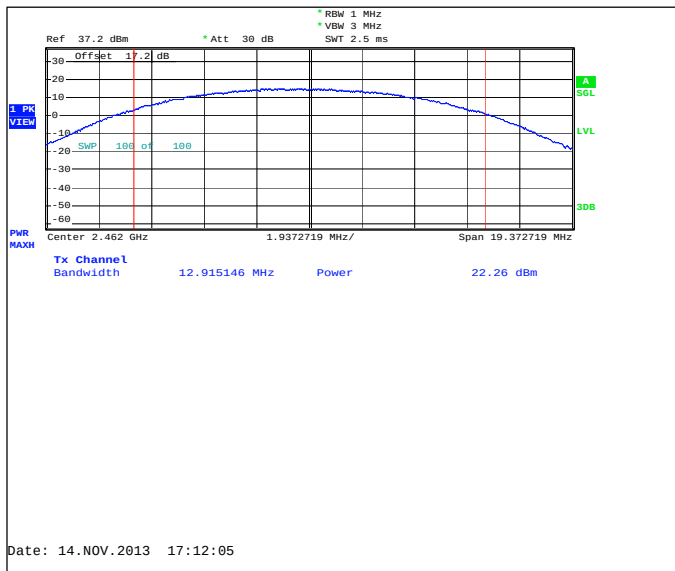


2.4.2 802.11g mode, 64QAM modulation, 48 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	16.9	48.978	PASSED
6 / 2437	17.48	55.976	PASSED
11 / 2462	17.87	61.235	PASSED


Channel 1 / 2412 MHz

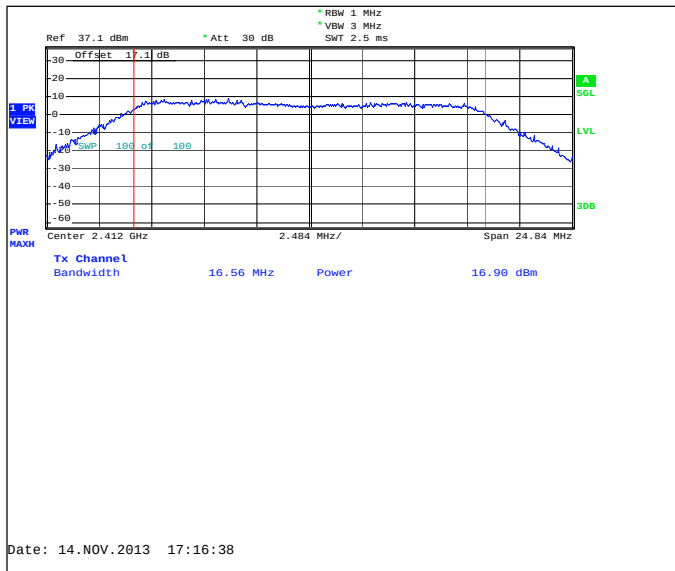

Channel 6 / 2437 MHz

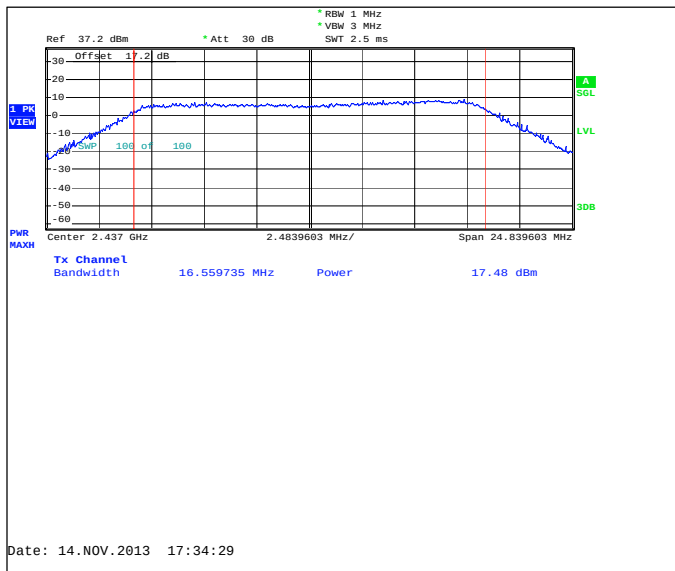


Channel 11 / 2462 MHz

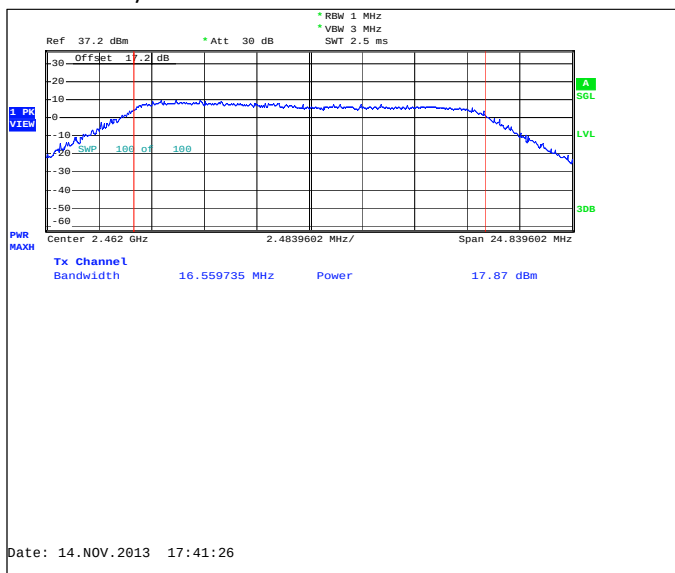


2.4.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	16.89	48.865	PASSED
6 / 2437	17.03	50.466	PASSED
11 / 2462	17.18	52.24	PASSED


Channel 1 / 2412 MHz

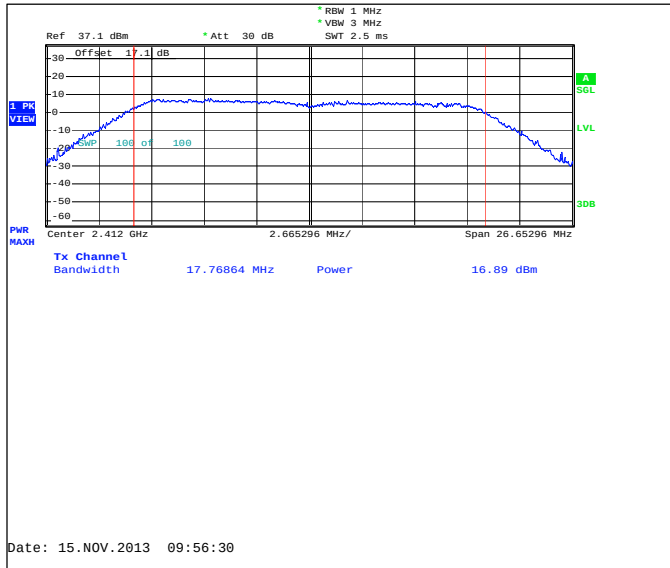

Channel 6 / 2437 MHz

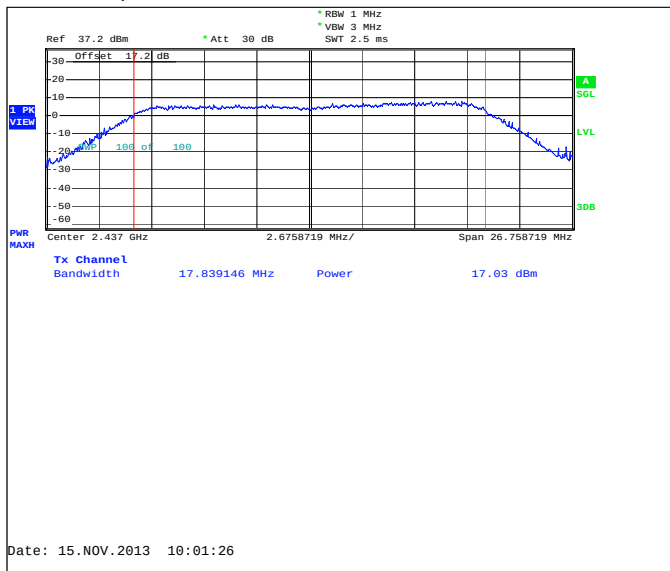


Channel 11 / 2462 MHz

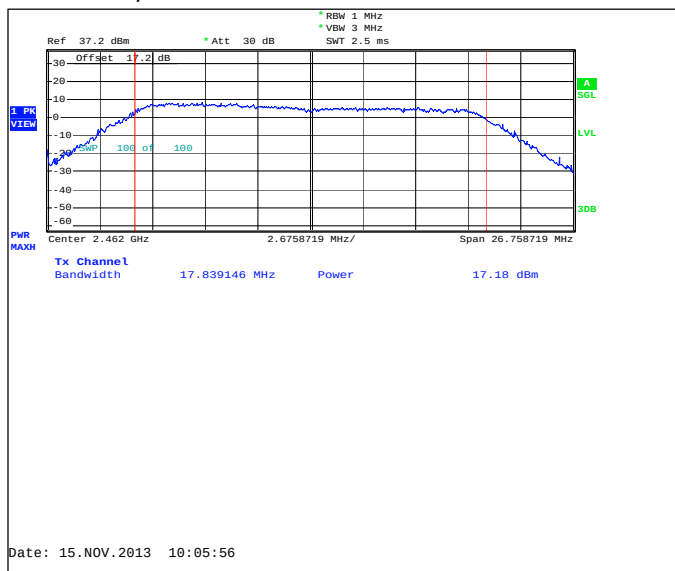

3. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-994, DUT 53932
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53933 ; AC-60E, DUT 53949 ; CA-190CD, DUT 53951 ; WH-108, DUT 53950
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	18 / 34/102
Date of measurements	12-Nov-2013
Measured by	Zou Ming

3.1.1 Test setup

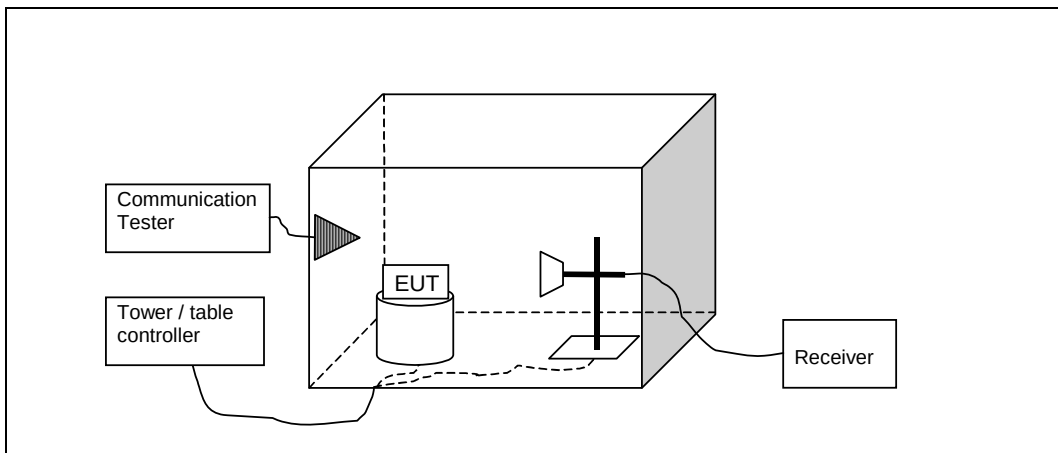

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

3.3. WLAN test results

3.3.1 802.11n, BPSK modulation, 6.5 / 7.25 Mbps data rate.

Channel 1 / 2412 MHz

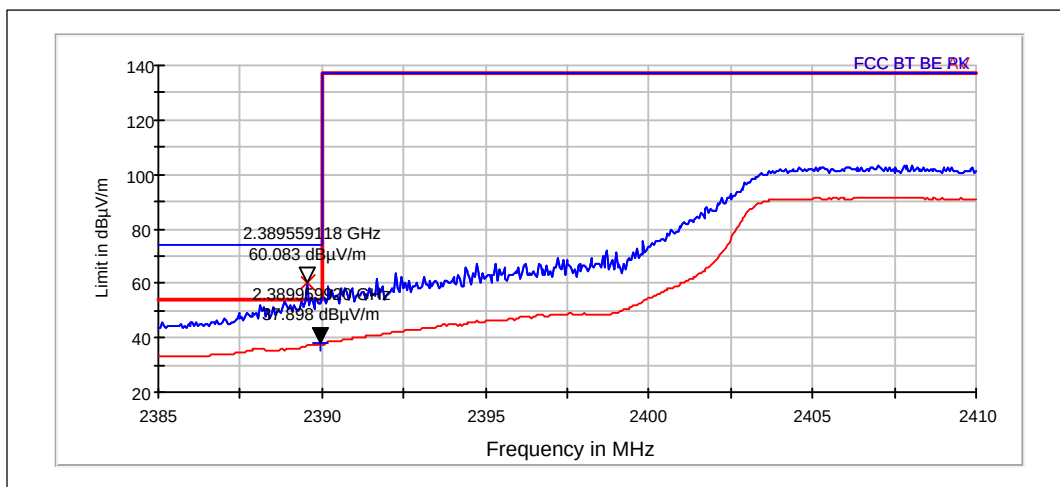


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	60.08	1009.602	60.52	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	37.9	78.505	38.34	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

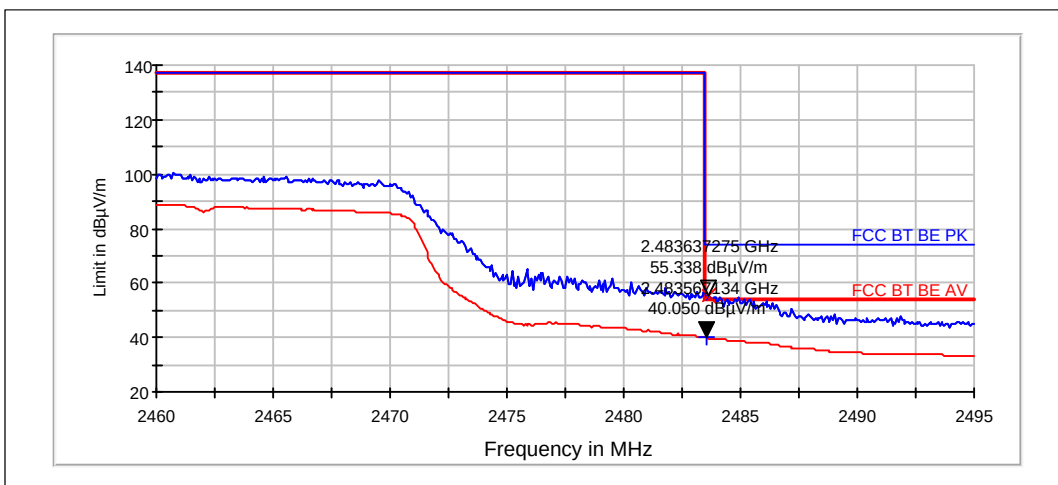

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	55.34	584.655	55.37	-0.03	-0.026	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	40.05	100.577	40.08	-0.03	-0.026	PASSED

3.3.2 802.11b, QPSK modulation, 11 Mbps data rate.

Channel 1 / 2412 MHz

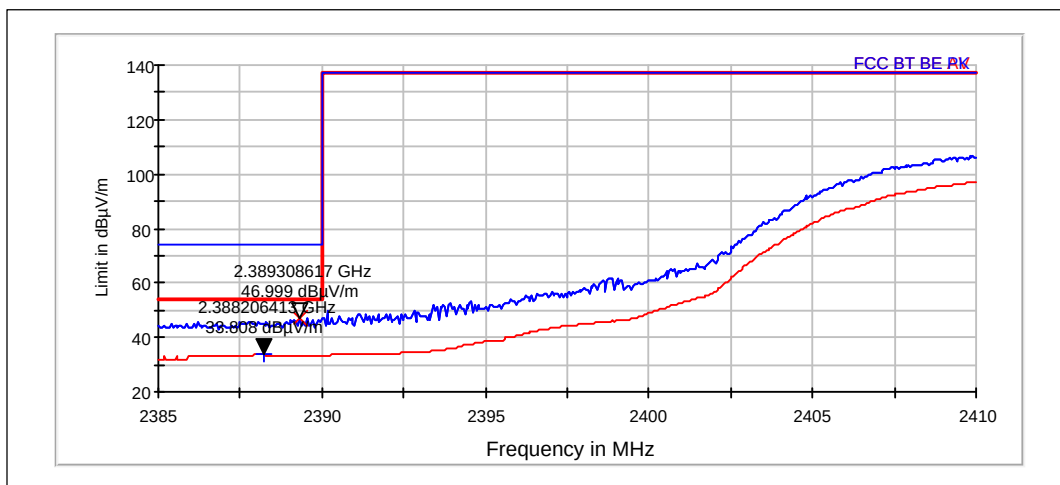


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	47	223.846	47.44	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2388	33.81	49.023	34.25	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

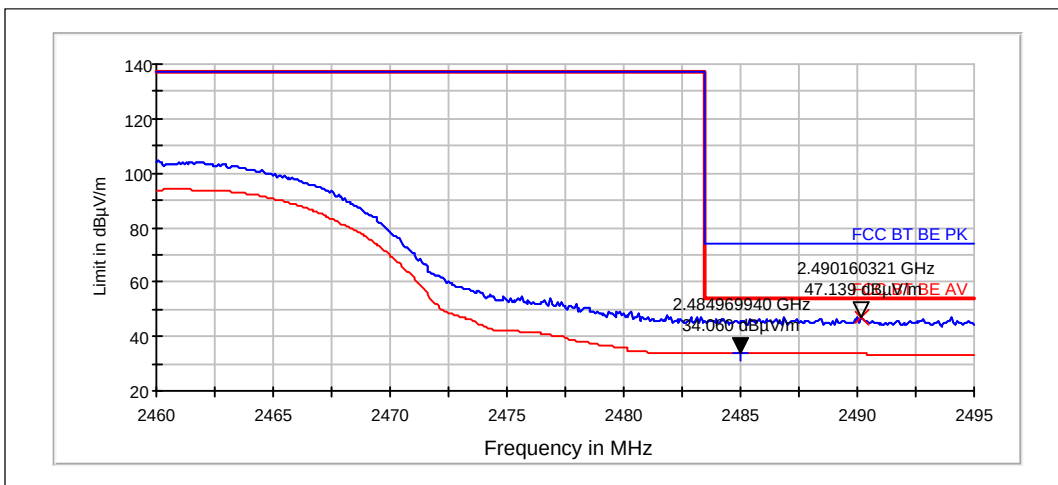

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2490	47.14	227.484	47.17	-0.03	-0.026	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2485	34.06	50.466	34.09	-0.03	-0.026	PASSED

3.3.3 802.11g, 64QAM modulation, 48 Mbps data rate.

Channel 1 / 2412 MHz

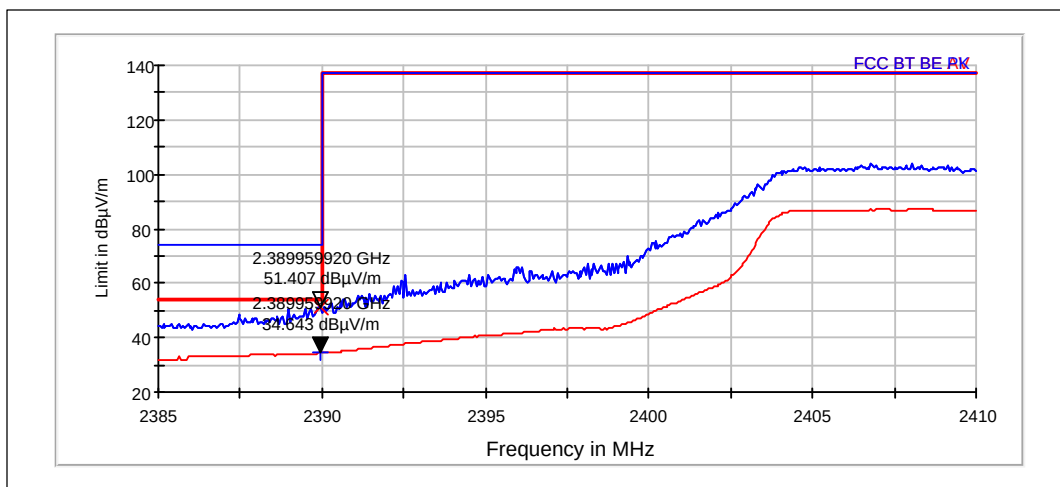


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	51.41	371.835	51.85	-0.44	-0.441	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2390	34.64	53.97	35.08	-0.44	-0.441	PASSED

Channel 11 / 2462 MHz

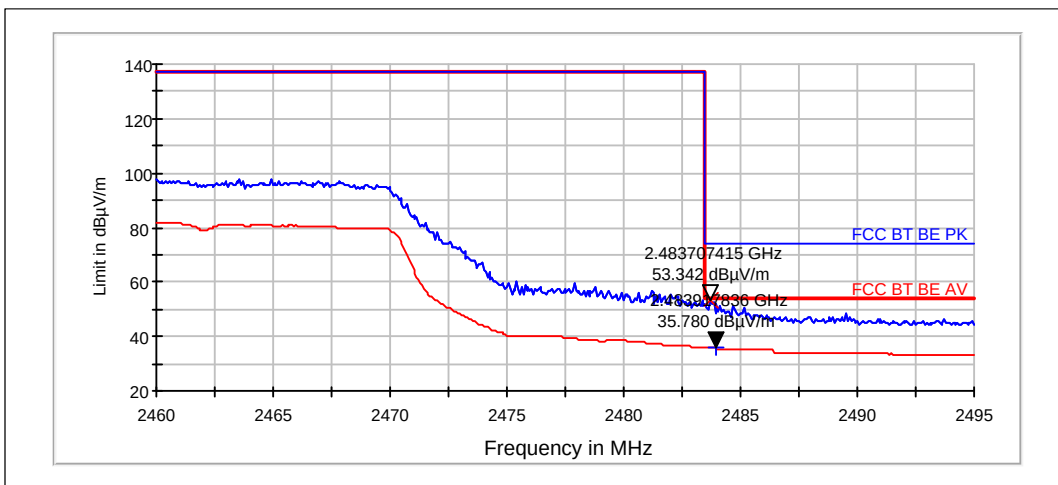

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	53.34	464.622	53.37	-0.03	-0.026	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2484	35.78	61.518	35.81	-0.03	-0.026	PASSED

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/30/101.4 to 20/30/101.2
Date of measurements	14-Nov-2013 to 15-Nov-2013
Measured by	Gao Sherina

4.1. Test Setup

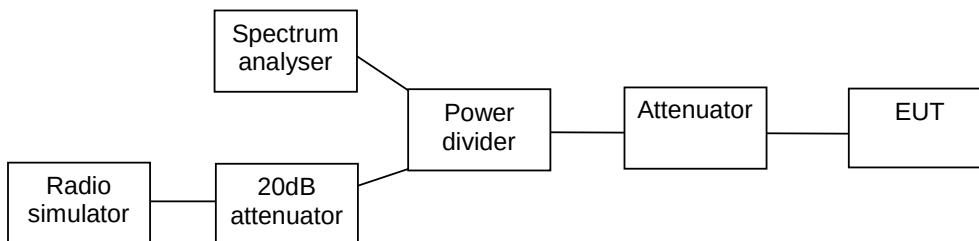

4.2. Test method and limit

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

4.3. WLAN Test results

4.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

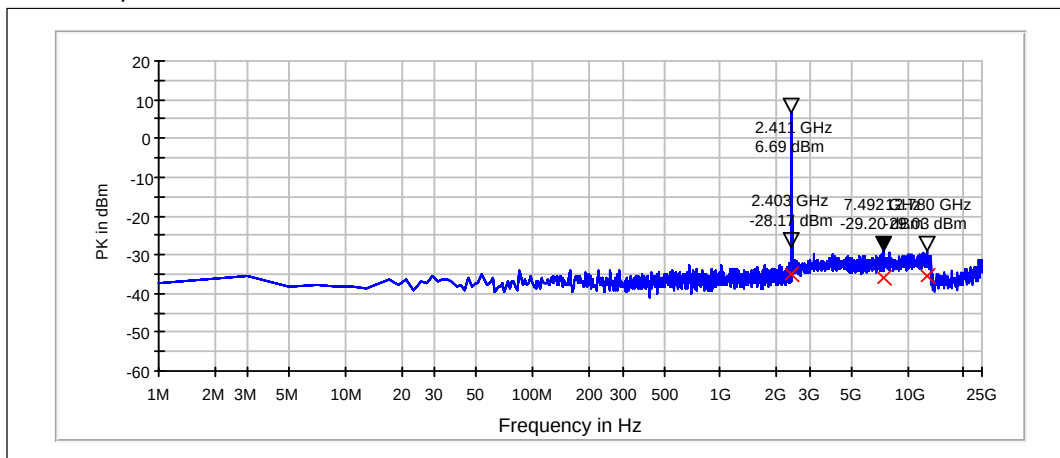

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2403.188	-34.86	PASSED
12780.000	-35.71	PASSED
7492.200	-35.89	PASSED


Channel 6 / 2437 MHz

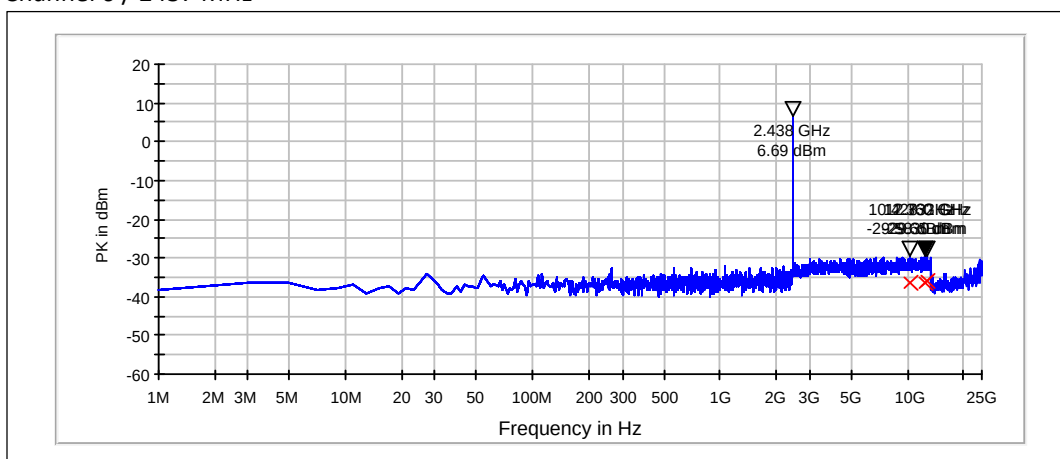

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
12732.000	-35.99	PASSED
10428.000	-36.28	PASSED
12360.000	-36.35	PASSED

Channel 11 / 2462 MHz

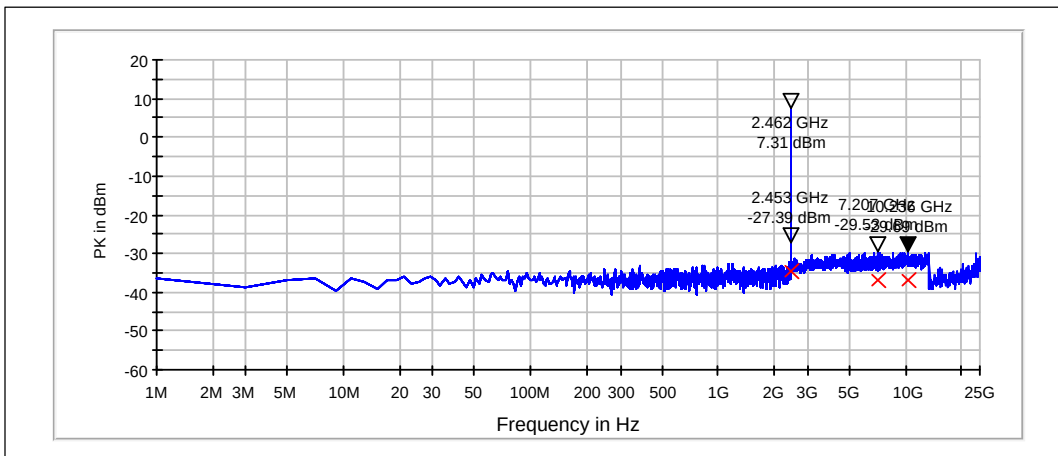


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2453.088	-34.70	PASSED
7207.200	-36.83	PASSED
10236.000	-37.00	PASSED

4.3.2 802.11g mode, 64QAM modulation, 48 Mbps data rate


Channel 1 / 2412 MHz

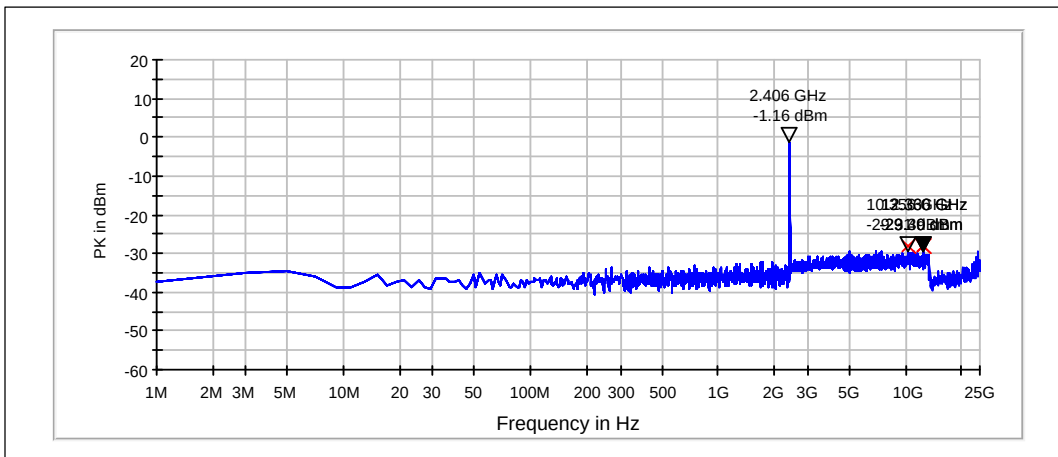

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
10356.000	-28.15	PASSED
12360.000	-28.23	PASSED
12336.000	-28.24	PASSED


Channel 6 / 2437 MHz

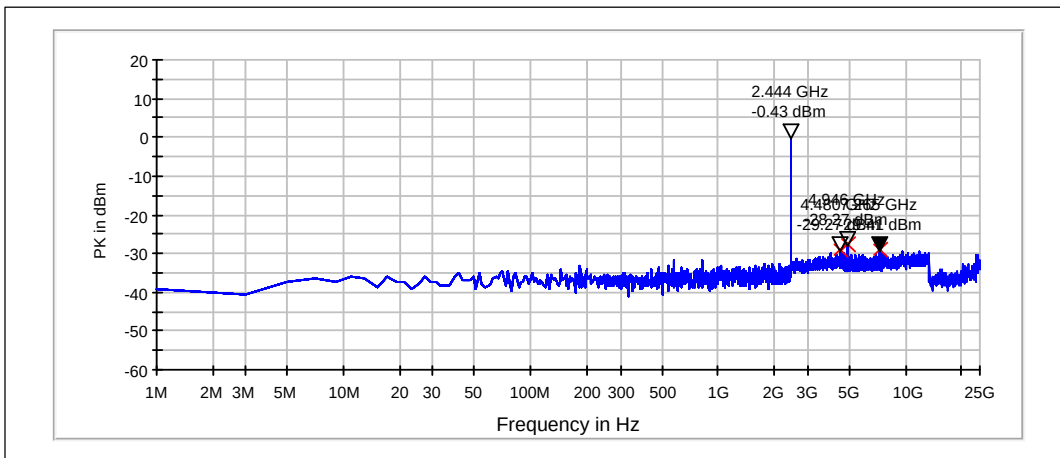

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
4945.600	-27.83	PASSED
4479.720	-28.84	PASSED
7265.400	-28.98	PASSED

Channel 11 / 2462 MHz

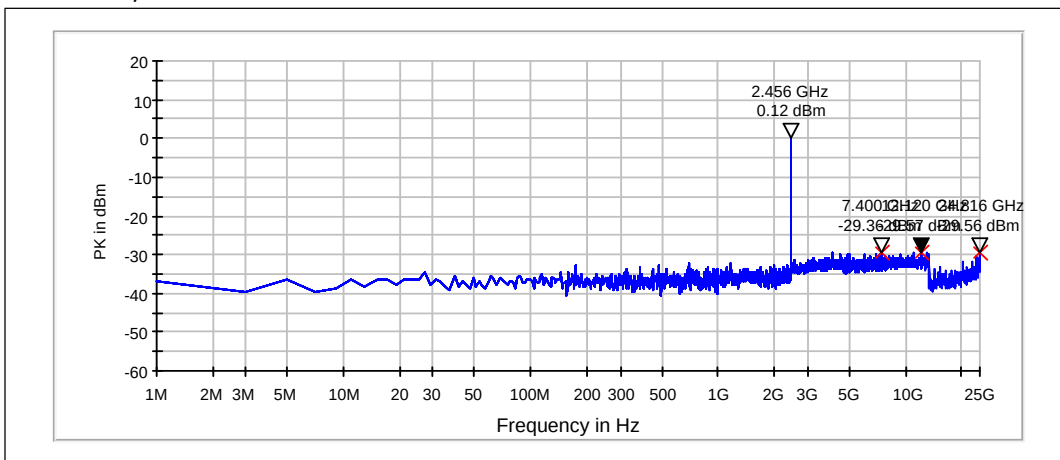


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
7399.800	-29.48	PASSED
24816.000	-29.68	PASSED
12120.000	-29.69	PASSED

4.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate


Channel 1 / 2412 MHz

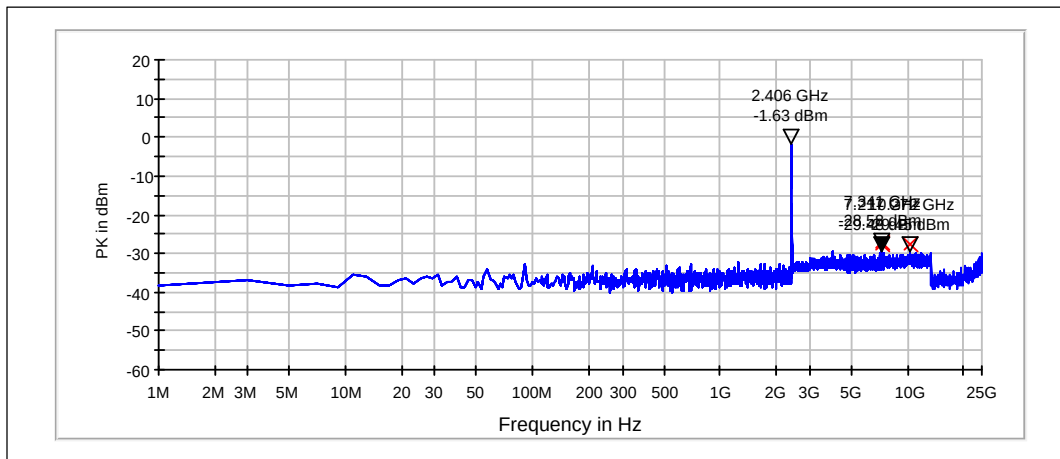

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
7341.000	-26.95	PASSED
10272.000	-27.82	PASSED
7216.800	-27.85	PASSED


Channel 6 / 2437 MHz

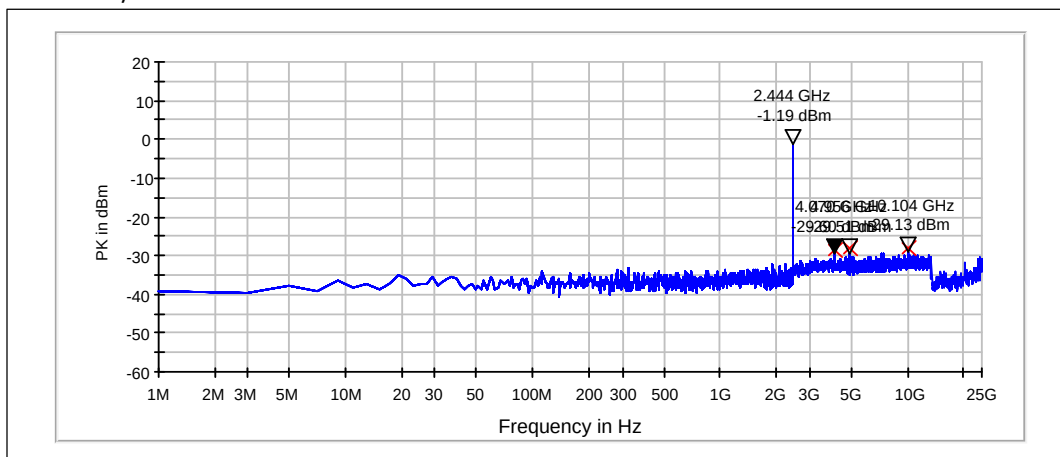

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
10104.000	-27.94	PASSED
4956.000	-28.32	PASSED
4070.260	-28.42	PASSED

Channel 11 / 2462 MHz

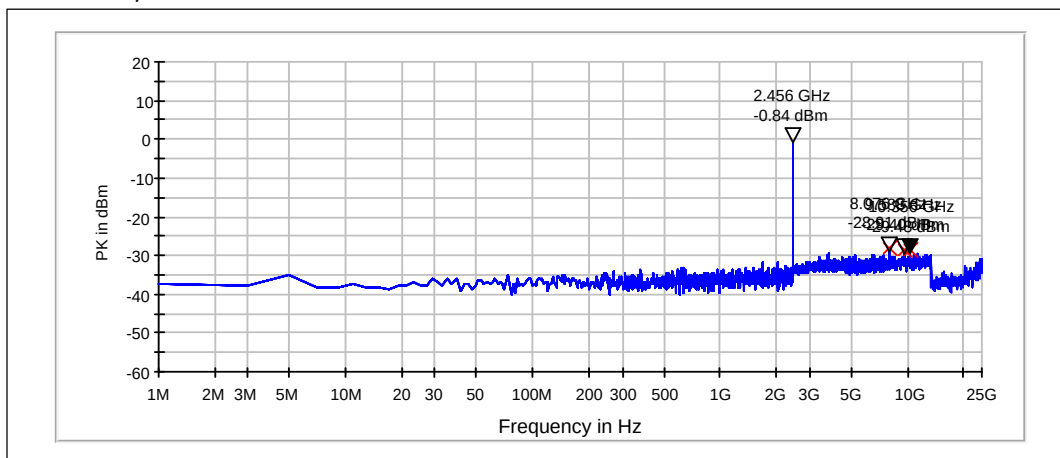


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
8076.000	-28.07	PASSED
9588.000	-28.56	PASSED
10356.000	-28.64	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-994, DUT 53932
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53933 ; AC-60E, DUT 53949 ; CA-190CD, DUT 53951 ; WH-108, DUT 53950
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 34/102
Date of measurements	12-Nov-2013
Measured by	Zou Ming

5.1.1 Test setup

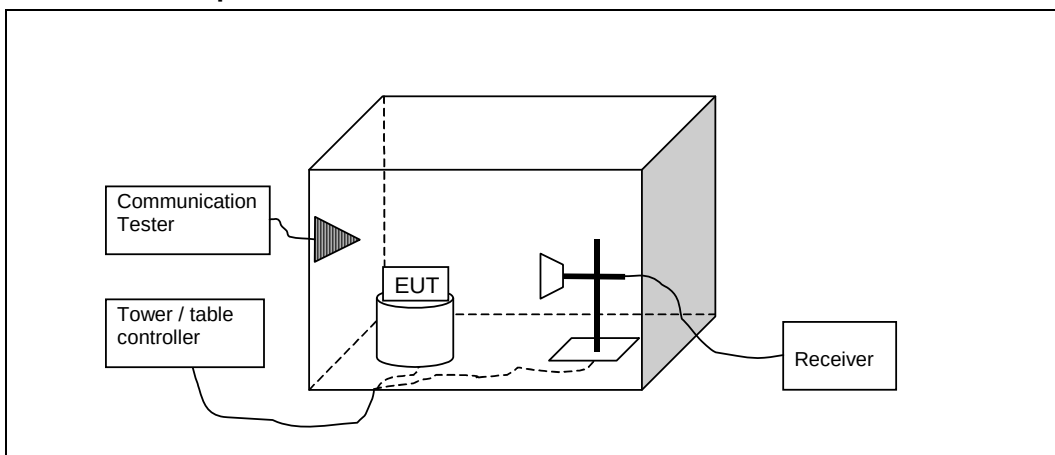

5.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.3. WLAN test results

5.3.1 802.11b, QPSK modulation, 11 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.8	41.4	117.53	39.93	1.47	32.6	74	PASSED
7235.9	48.65	270.645	38.44	10.21	46.6	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824.8	28.68	27.155	27.21	1.47	25.3	54	PASSED
7235.9	35.79	61.56	25.58	10.21	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4925.5	42.97	140.832	41.13	1.84	31	74	PASSED
7384	48.78	274.726	38.44	10.34	25.2	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4925.5	29.75	30.74	27.91	1.84	24.2	54	PASSED
7384	35.88	62.252	25.54	10.34	18.1	54	PASSED

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4880.9	41.88	124.222	40.29	1.59	32.1	74	PASSED
7318.1	48.61	269.588	38.57	10.05	25.4	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
31.95	19.57	9.517	28.07	-8.5	20.4	40	PASSED
35.518	21.83	12.34	32.6	-10.77	18.2	40	PASSED
35.632	30.55	33.671	41.39	-10.84	9.5	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4880.9	29.03	28.294	27.44	1.59	24.9	54	PASSED
7318.1	35.64	60.527	25.6	10.05	18.3	54	PASSED

5.3.2 802.11g, 64QAM modulation, 48 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824	41.4	117.449	39.93	1.47	32.6	74	PASSED
7237.8	48.5	266.195	38.32	10.19	46.7	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4824	28.58	26.857	27.11	1.47	25.4	54	PASSED
7237.8	35.8	61.688	25.62	10.19	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4923.8	42.63	135.363	40.77	1.86	31.3	74	PASSED
7386	49.2	288.37	38.82	10.38	24.8	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4923.8	29.74	30.683	27.88	1.86	24.2	54	PASSED
7386	35.97	62.9	25.59	10.38	18	54	PASSED

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4880.7	42.13	127.732	40.54	1.6	31.9	74	PASSED
7319.6	48.63	269.929	38.57	10.06	25.4	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
35.572	21.69	12.151	32.5	-10.81	18.3	40	PASSED
35.668	21.74	12.215	32.6	-10.86	18.3	40	PASSED
906.697	23.53	15.019	27.42	-3.89	22.5	46	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4880.7	29.08	28.458	27.49	1.6	24.9	54	PASSED
7319.6	35.69	60.849	25.63	10.06	18.3	54	PASSED

5.3.3 802.11n, BPSK modulation, 6.5 / 7.25 Mbps data rate.

Channel 6 / 2437 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4878.1	42.13	127.85	40.51	1.62	31.8	74	PASSED
7318.4	48.96	280.673	38.91	10.05	25	74	PASSED

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
35.428	31.75	38.699	42.47	-10.72	8.2	40	PASSED
35.572	21.59	12.006	32.4	-10.81	18.4	40	PASSED
45.951	18.06	8	35.63	-17.57	21.9	40	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4878.1	29.09	28.487	27.47	1.62	24.9	54	PASSED
7318.4	35.71	61.017	25.66	10.05	18.3	54	PASSED

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4825.5	41.26	115.664	39.78	1.48	32.7	74	PASSED
7237.3	50.1	319.963	39.91	10.19	45.1	95	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4825.5	28.7	27.227	27.22	1.48	25.3	54	PASSED
7237.3	35.9	62.345	25.71	10.19	---	---	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4922.4	42.36	131.144	40.52	1.84	31.6	74	PASSED
7385.5	48.91	278.997	38.54	10.37	25.1	74	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
4922.4	29.79	30.864	27.95	1.84	24.2	54	PASSED
7385.5	36.03	63.278	25.66	10.37	18	54	PASSED

6. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-994, DUT 53796
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53938 ; AC-60E, DUT 53942 ; CA-190CD, DUT 53943 ; WH-108, DUT 53944
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/36/101.3
Date of measurements	06-Nov-2013
Measured by	Gao Sherina

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to procedure KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. WLAN Test results

6.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel 6 / 2437 MHz

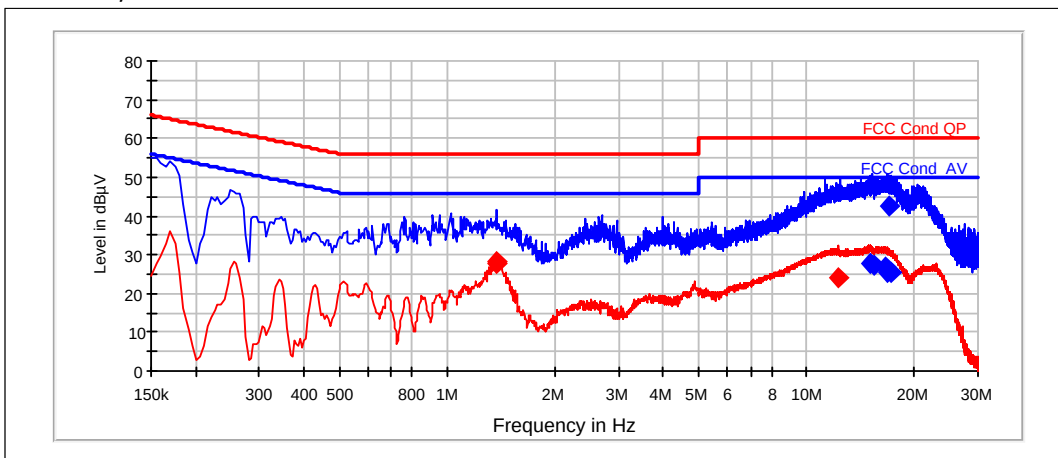

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
15.015	27.52	L1	PASSED
15.365	27.29	L1	PASSED
16.665	26.89	L1	PASSED
16.755	25.62	N	PASSED
17.015	42.35	L1	PASSED
17.15	25.4	N	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.165	-7.08	N	PASSED
1.365	28.12	N	PASSED
1.375	27.85	N	PASSED
12.32	23.91	L1	PASSED
15.315	-0.9	N	PASSED
17.17	-1.7	L1	PASSED

7. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/30/101.4 to 20/30/101.2
Date of measurements	14-Nov-2013 to 15-Nov-2013
Measured by	Gao Sherina

7.1. Test Setup

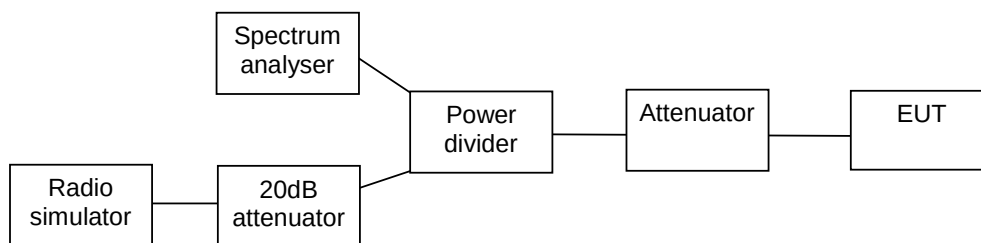

7.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
>= 500

7.3. WLAN Test results


7.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	12928	PASSED
6 / 2437	13269.7	PASSED
11 / 2462	12915.1	PASSED


Channel 1 / 2412 MHz

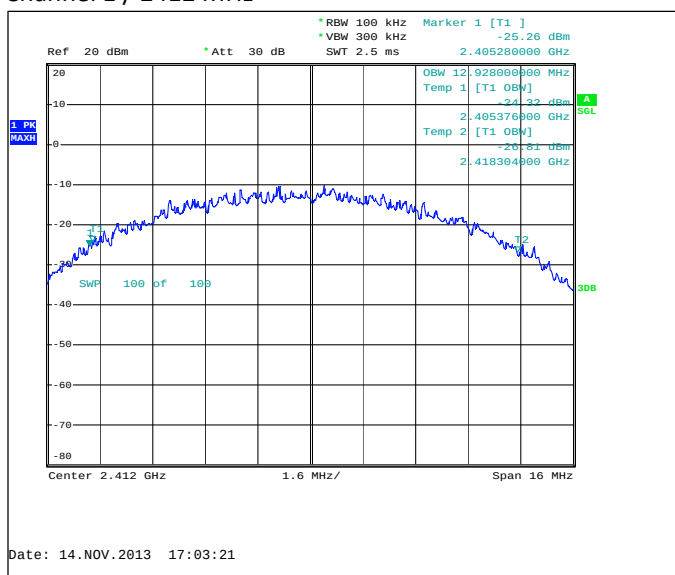

Channel 6 / 2437 MHz

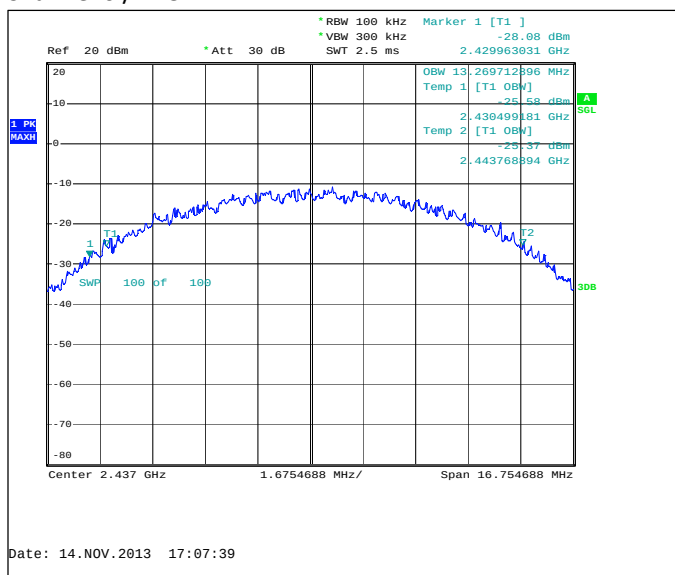


Channel 11 / 2462 MHz

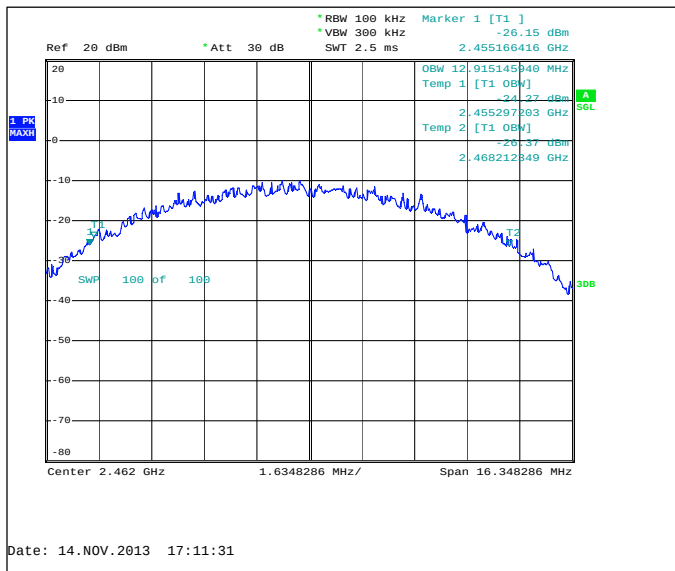


7.3.2 802.11g mode, 64QAM modulation, 48 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16560	PASSED
6 / 2437	16559.7	PASSED
11 / 2462	16559.7	PASSED


Channel 1 / 2412 MHz

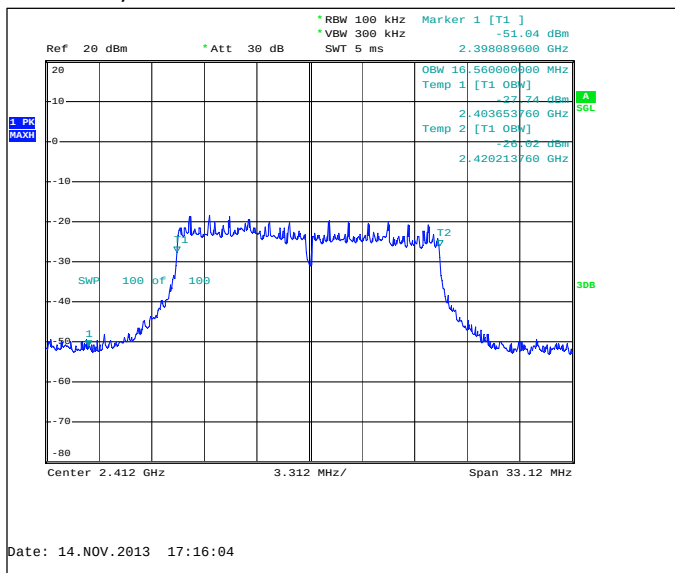

Channel 6 / 2437 MHz

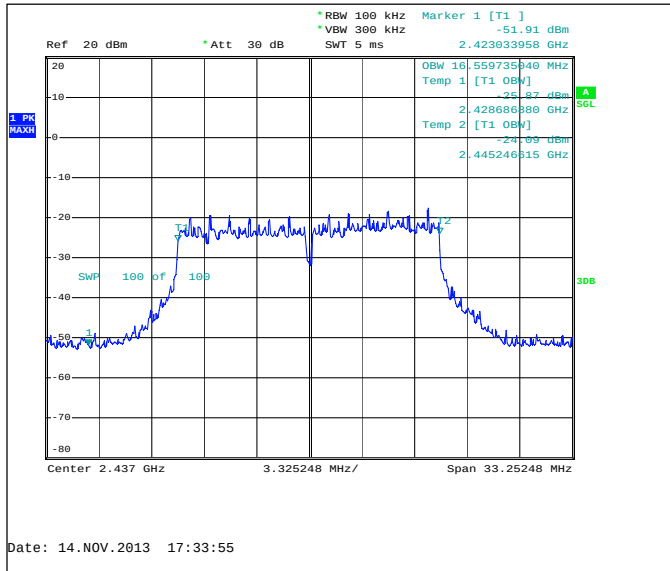


Channel 11 / 2462 MHz

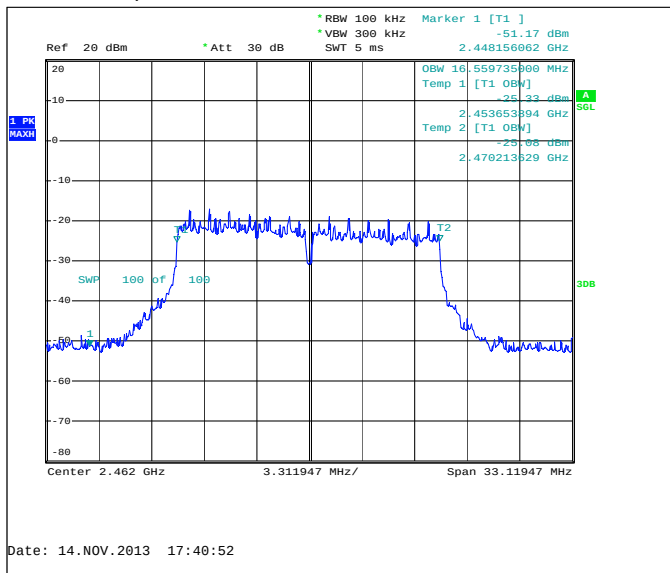


7.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	17768.6	PASSED
6 / 2437	17839.1	PASSED
11 / 2462	17839.1	PASSED


Channel 1 / 2412 MHz

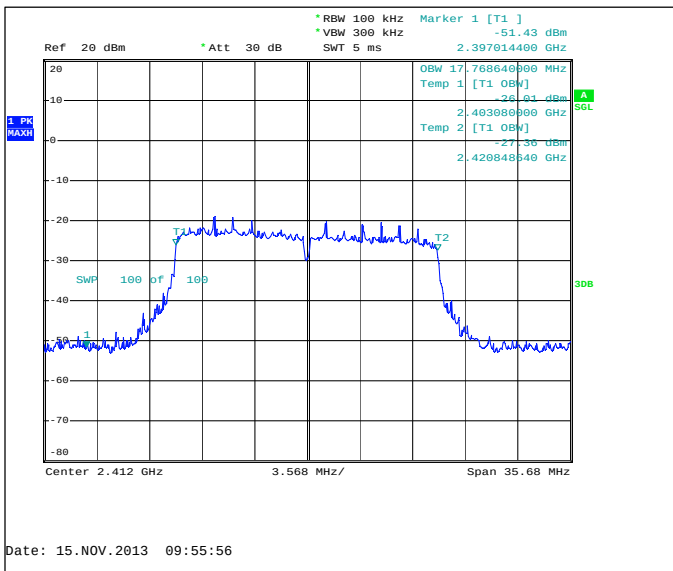

Channel 6 / 2437 MHz

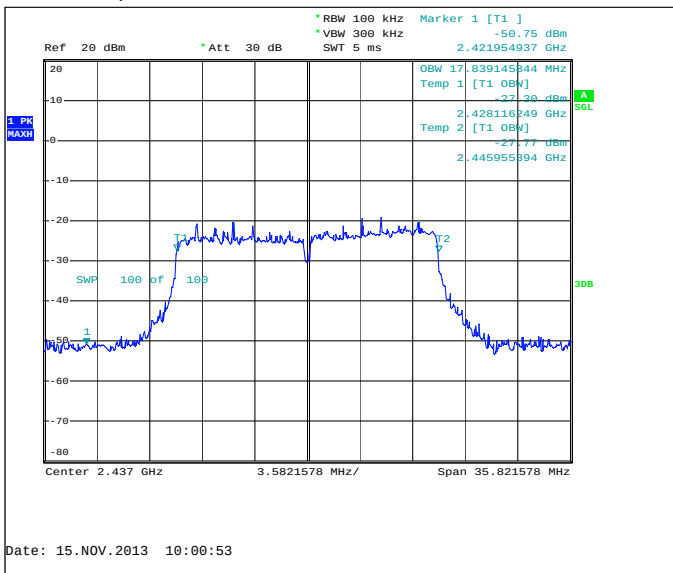


Channel 11 / 2462 MHz

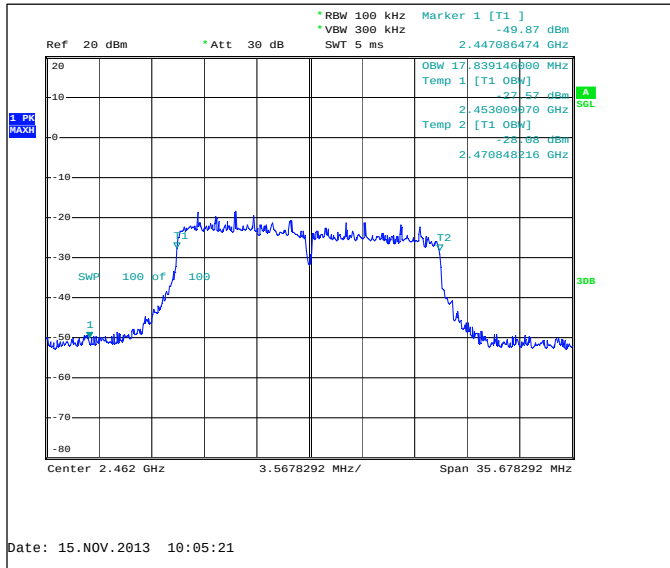

8. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/30/101.4 to 20/30/101.2
Date of measurements	14-Nov-2013 to 15-Nov-2013
Measured by	Gao Sherina

8.1. Test Setup

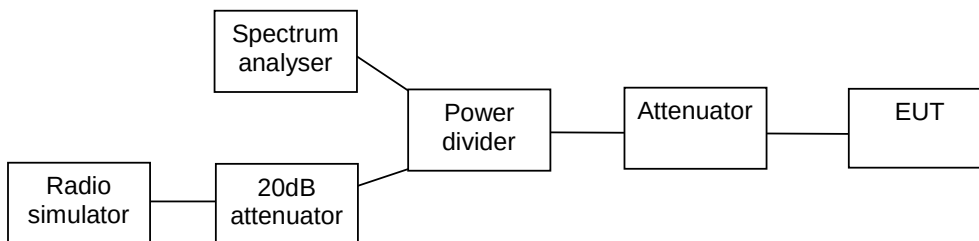

8.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements

Limit [dBm] @ 3 kHz
<= 8


8.3. WLAN Test results

8.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-7.71	PASSED
6 / 2437	-8.13	PASSED
11 / 2462	-8.14	PASSED


Channel 1 / 2412 MHz

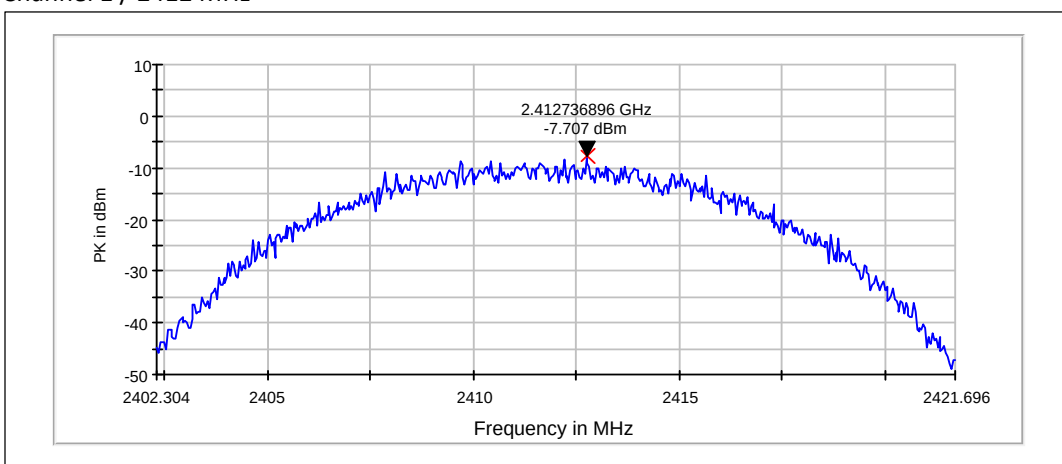

Channel 6 / 2437 MHz

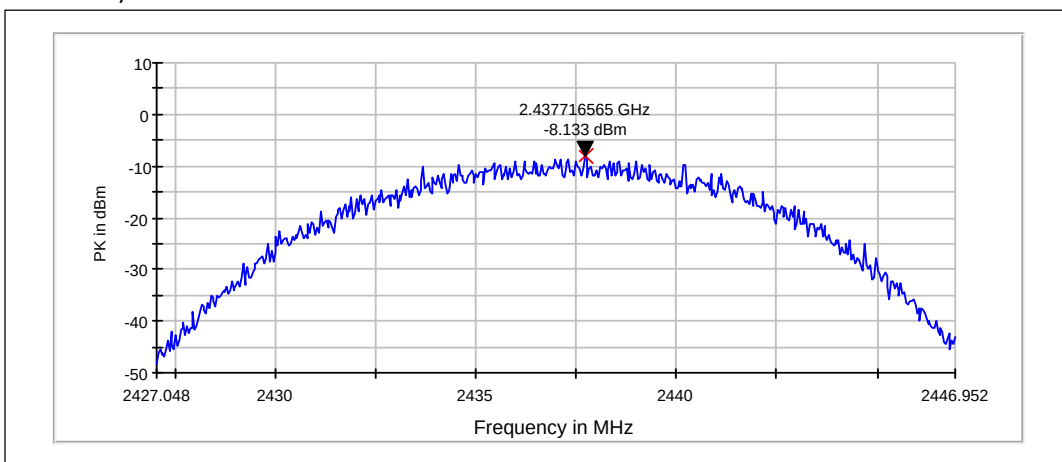

Channel 11 / 2462 MHz

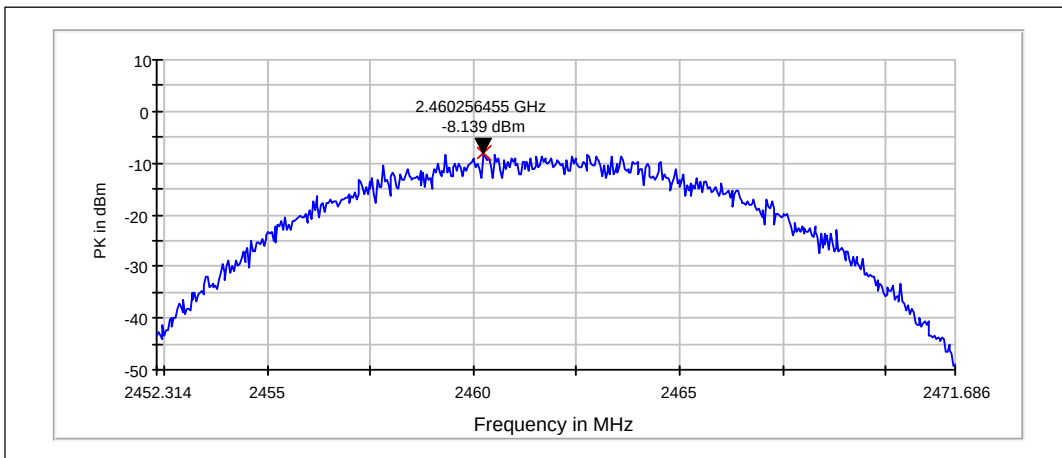


8.3.2 802.11g mode, 64QAM modulation, 48 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-15.87	PASSED
6 / 2437	-15.96	PASSED
11 / 2462	-16.07	PASSED


Channel 1 / 2412 MHz

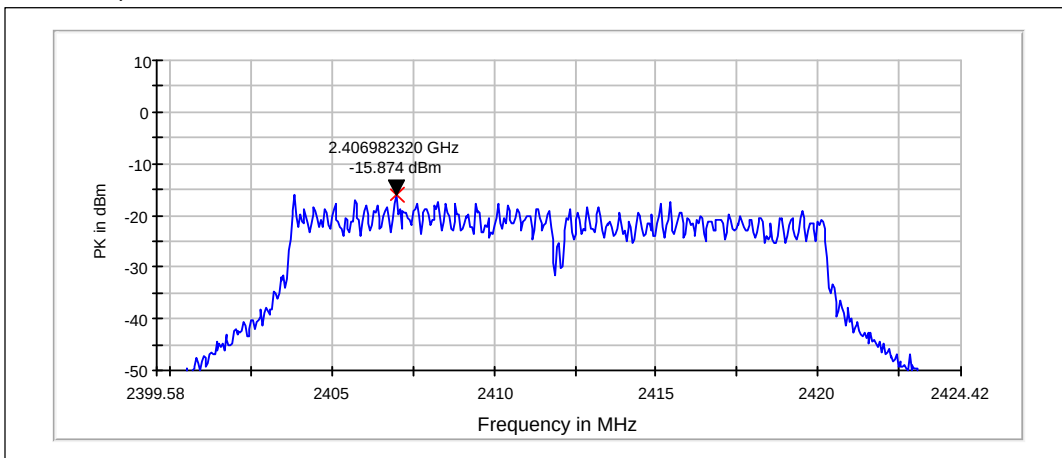

Channel 6 / 2437 MHz

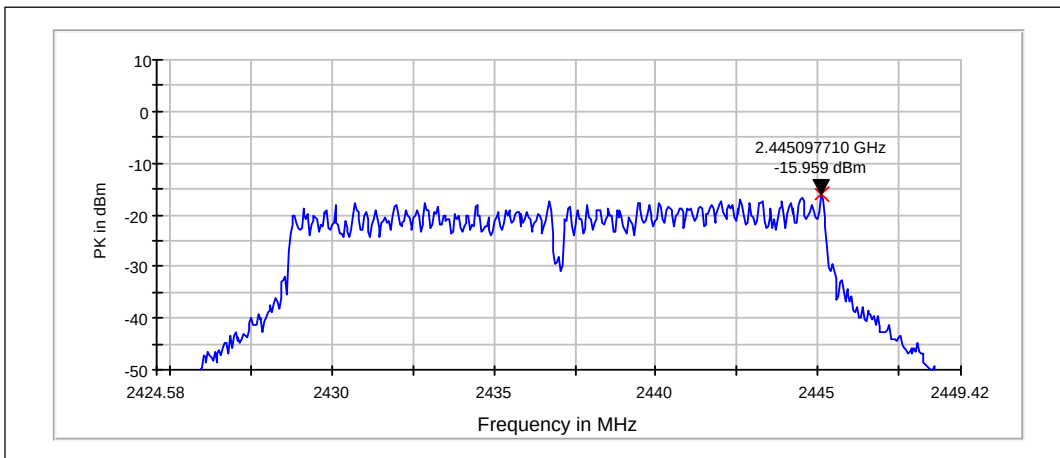

Channel 11 / 2462 MHz

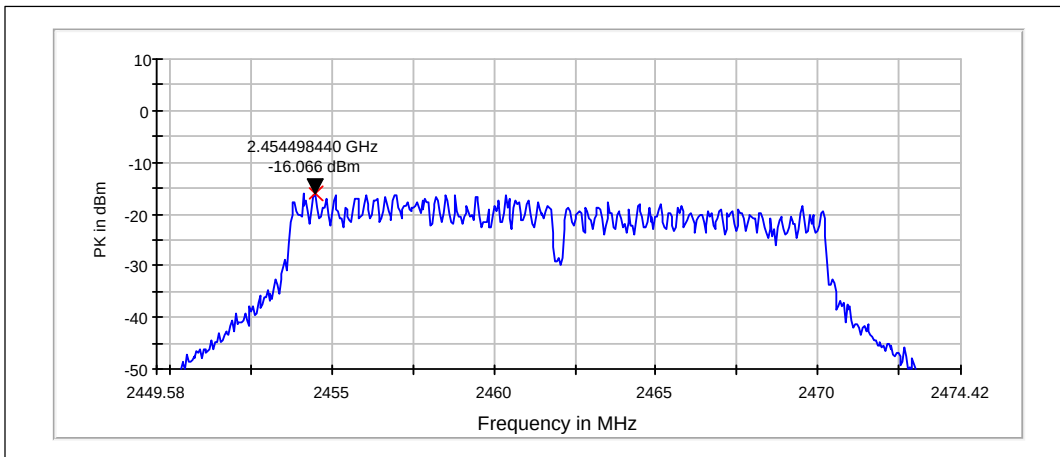


8.3.3 802.11n mode, BPSK modulation, 6.5 / 7.25 Mbps data rate


Peak (RBW: 3 kHz, VBW: 10 kHz, Max hold)

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-16.7	PASSED
6 / 2437	-15.23	PASSED
11 / 2462	-15.87	PASSED


Channel 1 / 2412 MHz

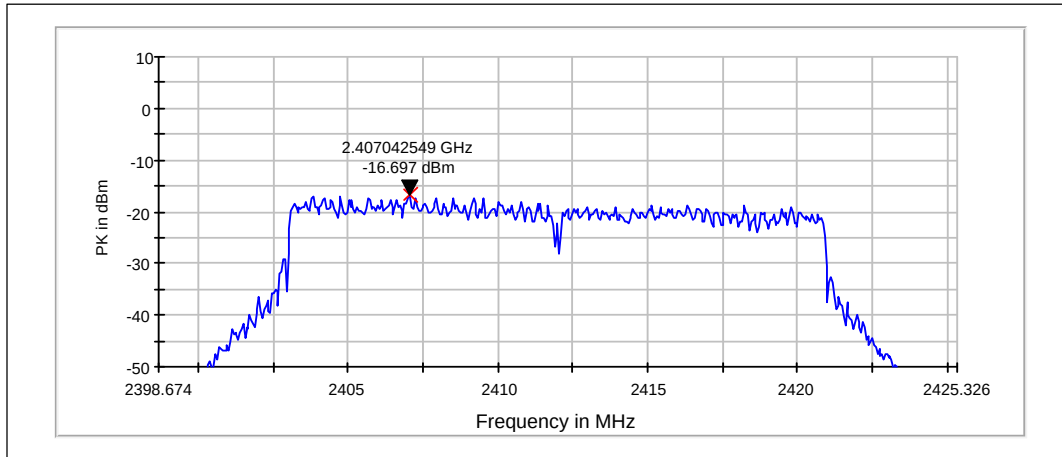

Channel 6 / 2437 MHz

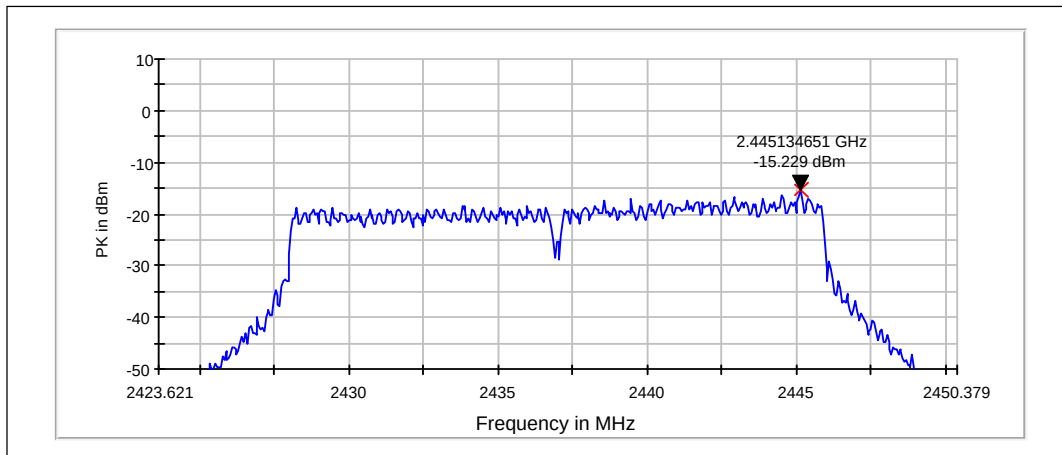

Channel 11 / 2462 MHz

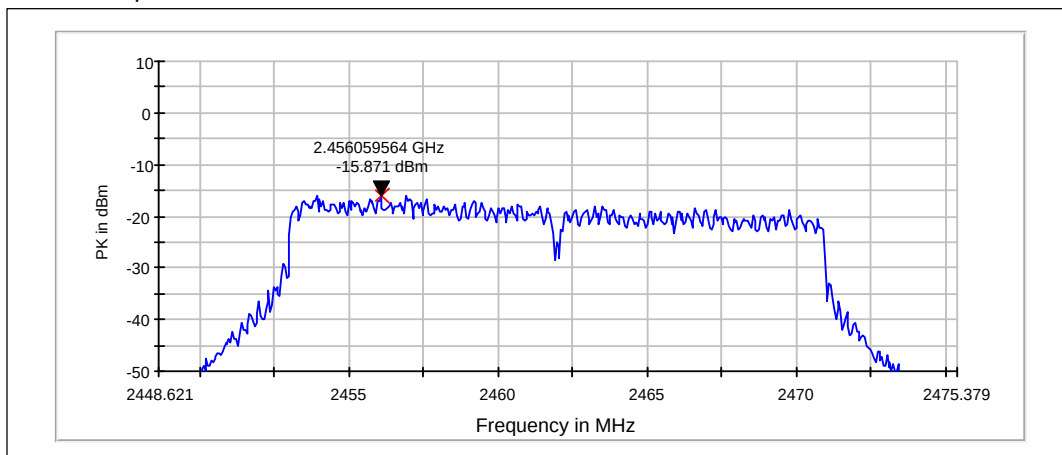

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C.15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B,15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B,15C
BJPCTC0089	Tempreture Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPB-RS232 convertor	GPB-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPB converter	GPB-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPB-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCHW0571	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Tempreture Test chamber	VT4002	Votsch	22/24/27, 15C

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B, 15C
BJPCTC0136	Communication antenna	JTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0318	Preamplifier	AFS42-00101500-25-10P-42	-	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B