

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-995_02.docx	Date of Report:	16-Dec-2013
Number of pages:	12	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-995 / Battery BV-4BWA(Sony)		
FCC ID:	QTLRM-995	IC:	661AB-RM995
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27, TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-130 (Issue 1, October 2013), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Gao Sherina, Engineer, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	13-Nov-2013
Testing completed	10-Dec-2013
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-995\TestPlan\RS_testplan_RM-995.xlsm
Notes	-
Document name	FCC22&24&27_RM-995_02.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-995	004402476460609	1000	-	3055.40000.1344.1000	53964
Battery	BV-4BWA(Sony)	-	-	-	-	53967

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

LTE 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP

§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE1700 (Band 4):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(4)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(h)	6.5	Band edge compliance	NP
§27.53(h), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§27.53(h), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

LTE700 Lower (Band 17):

Section in CFR 47	Section in RSS-GEN or RSS-130	Name of the test	Result
§2.1046 (a)	4.4	Conducted RF output power	NP
§27.50(c)(10)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(g)	4.6	Band edge compliance	NP
§27.53(g), §2.1051	4.6	Spurious emissions at antenna terminals	NP
§27.53(g), §2.1051	4.6	Spurious radiated emissions	NP
§2.1055(a)	4.3 (a)	Frequency stability, temperature variation	NP
§2.1055(d)	4.3 (a)	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), §27.53(g), RSS-132 4.4, RSS-133 6.4)	6
2.2. Test method and limit.....	6
2.3. GSM850 TX test results.....	7
2.4. GSM850-E1 TX test results.....	7
2.5. GSM1900 TX test results.....	7
2.6. GSM1900-E1 TX test results.....	7
2.7. WCDMA 1900 (Band II) test results	7
2.8. WCDMA 850 (Band V) test results.....	8
2.9. WCDMA 1700 (Band IV) test results	8
2.10. LTE700 Lower (Band 17) test results	8
2.11. LTE 1900 (Band II) test results.....	8
2.12. LTE 1700 (Band IV) test results	10
2.13. LTE 850 (Band V) test results	10
3. Test Equipment.....	11
3.1. Conducted measurements	11
3.2. Radiated measurements.....	11

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), §27.50(d)(2), §27.53(h), §27.53(g), §27.50(c) (10), RSS-132 4.4, RSS-133 6.4, RSS-130 4.4)

EUT with DUT number	RM-995, DUT 53964
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53967
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/31/102.1 to 18/31/102.5
Date of measurements	04-Dec-2013 to 10-Dec-2013
Measured by	Zou Ming

2.1.1 Test setup

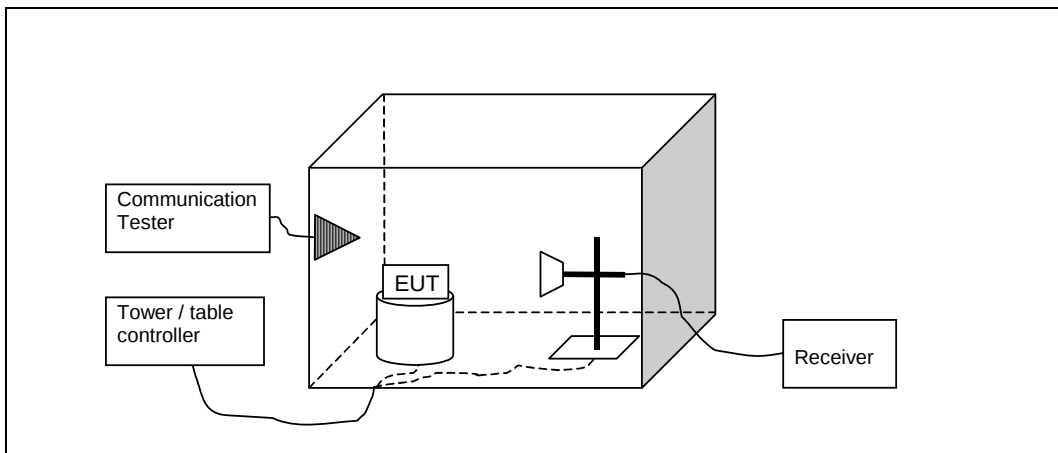

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. The measurement results are obtained as described below:

$$P[dBm] = P_{SUBST\ TX} + P_{MEAS} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where $P_{SUBST\ TX}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{SUBST\ RX}$ is measured power level in substitute measurement. $L_{SUBST\ CABLE}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
704 - 716	3 ERP	34.8
824 - 849	7 ERP	38.5
1710 - 1755	1 EIRP	30
1850 - 1910	2 EIRP	33

2.3. GSM850 TX test results

RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
128 / 824.2	29.45	0.881	-4.96	+10	-30.6	-2.9	3.29	VERTICAL	PASSED
190 / 836.6	27.63	0.579	-5.92	+10	-29.8	-2.82	3.43	HORIZONTAL	PASSED
251 / 848.8	27.06	0.508	-5.47	+10	-28.63	-2.7	3.4	HORIZONTAL	PASSED

2.4. GSM850-E1 TX test results

RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
128 / 824.2	24.09	0.256	-10.32	+10	-30.6	-2.9	3.29	VERTICAL	PASSED
190 / 836.6	23.24	0.211	-10.31	+10	-29.8	-2.82	3.43	HORIZONTAL	PASSED
251 / 848.8	21.75	0.150	-10.78	+10	-28.63	-2.7	3.4	HORIZONTAL	PASSED

2.5. GSM1900 TX test results

RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	30.35	1.084	-14.81	+10	-32.08	8.12	5.04	VERTICAL	PASSED
661 / 1880	31.57	1.435	-13.78	+10	-32.35	8.06	5.06	VERTICAL	PASSED
810 / 1909.8	31.34	1.361	-14.62	+10	-32.77	8.3	5.11	VERTICAL	PASSED

2.6. GSM1900-E1 TX test results

RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	25.37	0.344	-19.79	+10	-32.08	8.12	5.04	VERTICAL	PASSED
661 / 1880	26.49	0.446	-18.86	+10	-32.35	8.06	5.06	VERTICAL	PASSED
810 / 1909.8	26.16	0.413	-19.8	+10	-32.77	8.3	5.11	VERTICAL	PASSED

2.7. WCDMA 1900 (Band II) test results

RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
9262 / 1852.4	20.31	0.107	-24.84	+10	-32.05	8.11	5.04	VERTICAL	PASSED
9400 / 1880	21.59	0.144	-23.71	+10	-32.3	8.06	5.06	VERTICAL	PASSED
9538 / 1907.6	21.68	0.147	-24.16	+10	-32.61	8.3	5.11	VERTICAL	PASSED

2.8. WCDMA 850 (Band V) test results

RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
4132 / 826.4	18.4	0.069	-15.82	+10	-30.42	-2.9	3.29	VERTICAL	PASSED
4183 / 836.6	17.32	0.054	-15.79	+10	-29.36	-2.82	3.43	VERTICAL	PASSED
4233 / 846.6	16.19	0.042	-17.46	+10	-29.74	-2.7	3.4	VERTICAL	PASSED

2.9. WCDMA 1700 (Band IV) test results

RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
1312 / 1712.4	23.11	0.205	-21.16	+10	-30.97	8.10	5.04	VERTICAL	PASSED
1450 / 1740	23.7	0.234	-21.08	+10	-31.51	8.12	5.06	HORIZONTAL	PASSED
1513 / 1752.6	23.41	0.219	-21.24	+10	-31.39	8.20	5.11	HORIZONTAL	PASSED

2.10. LTE700 Lower (Band 17) test results

FDD, CBW 5MHz, QPSK, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
19975 / 1712.5	20.92	0.124	-10.55	+10	-26.98	8.1	4.97	HORIZONTAL	PASSED
20175 / 1732.5	20.72	0.118	-11.19	+10	-27.98	8.14	4.99	HORIZONTAL	PASSED
20375 / 1752.5	20	0.100	-11.36	+10	-27.04	8.19	5.02	HORIZONTAL	PASSED

FDD, CBW 5MHz, 16QAM, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
19975 / 1712.5	20.34	0.108	-11.13	+10	-26.98	8.1	4.97	HORIZONTAL	PASSED
20175 / 1732.5	20.37	0.109	-11.54	+10	-27.98	8.14	4.99	HORIZONTAL	PASSED
20375 / 1752.5	19.73	0.094	-11.63	+10	-27.04	8.19	5.02	HORIZONTAL	PASSED

2.11. LTE 1900 (Band II) test results

FDD, CBW 5MHz, 16QAM, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
18625 / 1852.5	22.21	0.166	-23	+10	-32.24	8.11	5.14	VERTICAL	PASSED
18900 / 1880	23.07	0.203	-22.11	+10	-32.3	8.06	5.18	VERTICAL	PASSED

19175 / 1907.5	22.53	0.179	-23.51	+10	-32.96	8.29	5.21	VERTICAL	PASSED
----------------	-------	-------	--------	-----	--------	------	------	----------	--------

FDD, CBW 5MHz, QPSK, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
18625 / 1852.5	24.61	0.289	-20.6	+10	-32.24	8.11	5.14	VERTICAL	PASSED
18900 / 1880	25.38	0.345	-19.8	+10	-32.3	8.06	5.18	VERTICAL	PASSED
19175 / 1907.5	24.69	0.294	-21.35	+10	-32.96	8.29	5.21	VERTICAL	PASSED

2.12. LTE 1700 (Band IV) test results

FDD, CBW 5MHz, QPSK, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
19975 / 1712.5	24.76	0.299	-19.75	+10	-31.38	8.1	4.97	VERTICAL	PASSED
20175 / 1732.5	24.96	0.313	-19.16	+10	-30.97	8.14	4.99	VERTICAL	PASSED
20375 / 1752.5	25.78	0.378	-18.77	+10	-31.38	8.19	5.02	VERTICAL	PASSED

FDD, CBW 5MHz, 16QAM, 1RB mid, RMS detector

Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
19975 / 1712.5	24.72	0.296	-19.79	+10	-31.38	8.1	4.97	VERTICAL	PASSED
20175 / 1732.5	25.2	0.331	-18.92	+10	-30.97	8.14	4.99	VERTICAL	PASSED
20375 / 1752.5	25.4	0.347	-19.15	+10	-31.38	8.19	5.02	VERTICAL	PASSED

2.13. LTE 850 (Band V) test results

FDD, CBW 5MHz, 16QAM, 1RB mid, RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
20425 / 826.5	21.37	0.137	-12.84	+10	-30.55	-2.88	3.46	VERTICAL	PASSED
20525 / 836.5	19.95	0.099	-13.56	+10	-29.8	-2.82	3.47	HORIZONTAL	PASSED
20625 / 846.5	18.98	0.079	-13.56	+10	-28.75	-2.7	3.51	HORIZONTAL	PASSED

FDD, CBW 5MHz, QPSK, 1RB mid, RMS detector

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX ANT} [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
20425 / 826.5	21.64	0.146	-12.57	+10	-30.55	-2.88	3.46	VERTICAL	PASSED
20525 / 836.5	19.99	0.100	-13.52	+10	-29.8	-2.82	3.47	HORIZONTAL	PASSED
20625 / 846.5	19.25	0.084	-13.29	+10	-28.75	-2.7	3.51	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	HP6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C, 15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0089	Tempreture Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPIO converter	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPIO-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCHW0571	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Tempreture Test chamber	VT4002	Votsch	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0318	Preamplifier	AFS42-00101500-25-10P-42	-	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B