

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD Monitor
MODEL/Serial No. : OR1930SH / NONE
FCC ID : QTM-OR1930SH
Multiple Model Name : H1922P, 19RTV, SV19, KMC-19B, NO1902
BRAND NAME :   
  
APPLICANT : Yuri Electronics Co., Ltd.
122-6, Youngcheon-ri, Dongtan-myeon, Hawseong-shi,
Gyeonggi-do, Korea
Attn. : Oh, Jong-bok / R&D Manager
MANUFACTURER : Yuri Electronics Co., Ltd.
122-6, Youngcheon-ri, Dongtan-myeon, Hawseong-shi,
Gyeonggi-do, Korea
FCC CLASSIFICATION : Class B Personal computers and peripherals
RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : ANSI C63.4-2003
TEST REPORT No. : ETLE090402.09
DATES OF TEST : April 13, 2009 to April 14, 2009
REPORT ISSUE DATE : April 22, 2009
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

This LCD Monitor, Model OR1930SH has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Yo Han, Park / Chief Engineer

ETL Inc.

#584, Sangwhal-ri, Ganam-myeon, Yoju-gun, Gyeonggi-do, 469-885, Korea

Tel: 82-2-858-0786 Fax: 82-2-858-0788

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the ETL Inc.

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. User Manual

FCC MEASUREMENT REPORT

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name	: Yuri Electronics Co., Ltd.
Address	: 122-6, Youngcheon-ri, Dongtan-myeon, Hawseong-shi, Gyeonggi-do, Korea
Attention	: Oh, Jong-bok / R&D Manager

- **EUT Type :** LCD Monitor
- **Model Number :** OR1930SH
- **S/N :** NONE
- **Frequency Range :** X-TAL → 14.31818 MHz
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2003
- **FCC Classification :** Class B Personal computers and peripherals
- **Dates of Tests :** April 13, 2009 to April 14, 2009
- **Place of Tests :** ETL Inc. Testing Lab.
Radiated Emission test;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea
- **Test Report No. :** ETLE090402.09
Conducted Emission test;
ETL Inc. Testing Lab.
371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Yuri Electronics Co., Ltd. Model: OR1930SH

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Yuri Electronics Co., Ltd. (model: OR1930SH)
The model OR1930SH is basic that was tested.

The multi models H1922P, 19RTV, SV19, KMC-19B and NO1902 are identical to basic model, except for model designation.

Brand Name	Model Name
	OR1930SH
	H1922P
	19RTV
	SV19
	KMC-19B
	NO1902

2.2 General Specification

Item	Specification	
Screen size	19"	
Display size	376 mm x 301 mm	
Screen coating	Anti-glare & Hard-coating	
Pixel pitch	0.294 mm x 0.294 mm	
Brightness	300 cd/m ²	
Contrast scaling	1 000:1	
Viewing angle	70°/70°/75°/65° (left/right/up/down)	
Response time	Tf = 2 msec, Tf = 6 msec	
Input Signal	Analog RGB, S-Video In/Out, CVBS 1 In/Out, CVBS 2 In/Out, Audio L/R, Stereo In	
Speaker(Option)	2 W x 2 W	
H-Frequency	30 kHz ~ 81 kHz	
V-Frequency	50 Hz ~ 75 Hz	
Resolution	1 280 x 1 024 @ 75 Hz	
Power consumption	45 W (Normal mode)	
Consumption	2 W (Power-saving mode)	
Product size	495 mm x 155 mm x 508 mm (W x D x H)	
Weight	Monitor	5.4 kg
	Package	7.4 kg

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50Ω / $50 \mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

Operating Mode	The worst operating condition
Stand by mode	X
The EUT was connected as user's guide. And during the executed test program for EMI program with "H" pattern display on monitor.	O

* O: Worst case investigated during the Test

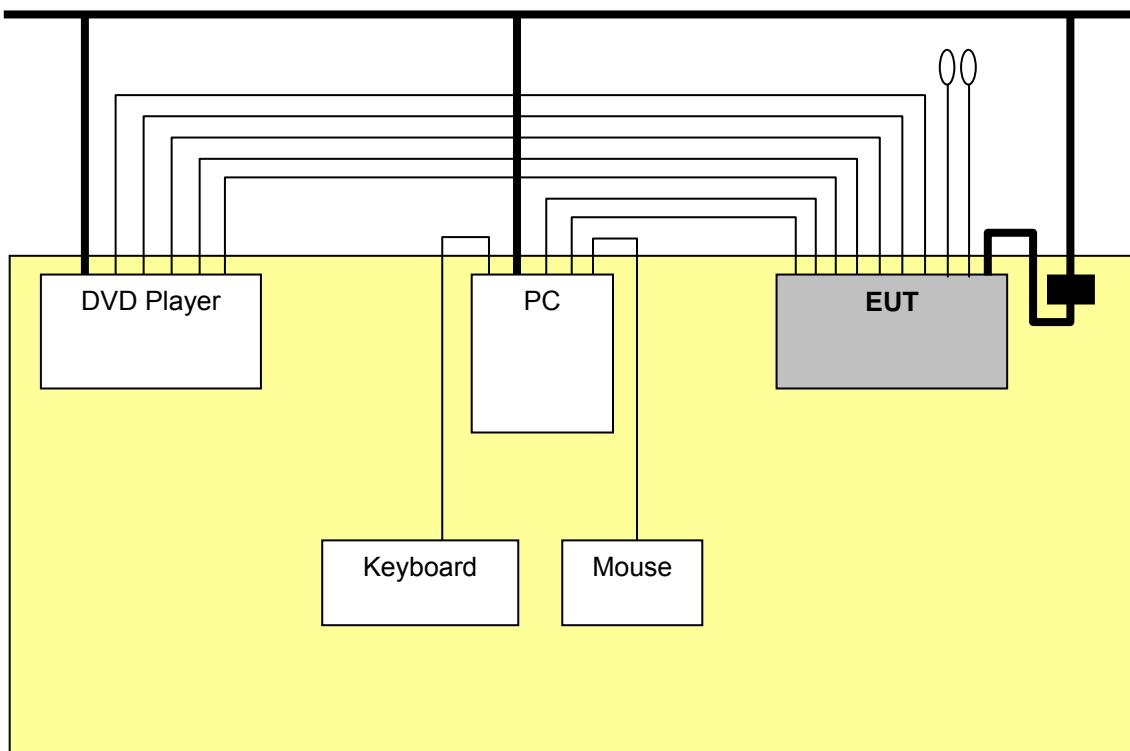
4.3 Support Equipment Used

Description	Model Name	Serial No.	Manufacturer
Adapter (for EUT)	SAD06012-UV	0903003853BB	Yantai Sam Hwa Polymers Co., Ltd.
PC	DCMF	5CW7KBX	Dell Inc.
DVD Player	DVR-530S	NONE	Ellion Digital
Keyboard	SK-8115	NONE	Yet Foundate Ltd
Mouse	MOC5UO	NONE	Dongguan Primax Electronics Ltd

4.4 Type of Cables Used

Device from	Device to	Type of I/O port	Length(m)	Type of shield
EUT	PC	RGB In	1.5	Shielded
EUT	PC	Stereo In	1.5	Shielded
EUT	DVD Player	S-Video In	1.5	Shielded
EUT	DVD Player	S-Video Out	1.5	Shielded
EUT	DVD Player	CVBS In 1	>3.0	Shielded
EUT	DVD Player	CVBS Out 1	>3.0	Shielded
EUT	DVD Player	Audio In	>3.0	Shielded
EUT	Connection Cable	CVBS In 2	>3.0	Shielded
EUT	Connection Cable	CVBS Out 2	>3.0	Shielded
EUT	Adapter	DC Input	1.2	Shielded
PC	Keyboard	USB	1.5	Shielded
PC	Mouse	USB	1.5	Shielded
PC	Power socket	AC Input	1.2	Unshielded

4.5 The setup drawing(s)



: Signal line

: Connection Cable

: Power line

: Adapter

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule	Measurement Required	Result
15.107(a)	Conducted Emission Measurement	Passed by 2.96 dB
15.109(g)	Radiated Emission Measurement	Passed by 3.10 dB

The data collected shows that the **Yuri Electronics Co., Ltd. / LCD Monitor / OR1930SH** complied with technical requirements of above rules part 15.107(a) and 15.109(g) Class B Limits and CISPR Publication 22.

The equipment is modified anything, mechanical or circuits to improve EMI status during a measurement. EMI suppression device(s) was added and/or modified during testing.

5.2 Conducted Emissions Measurement

EUT	LCD Monitor / OR1930SH (S/N: N/A)		
Limit apply to	FCC Part 15.107(a) Class B		
Test Date	April 14, 2009		
Operating Condition	Full "H" pattern display mode		
Result	Passed by 2.96 dB		

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

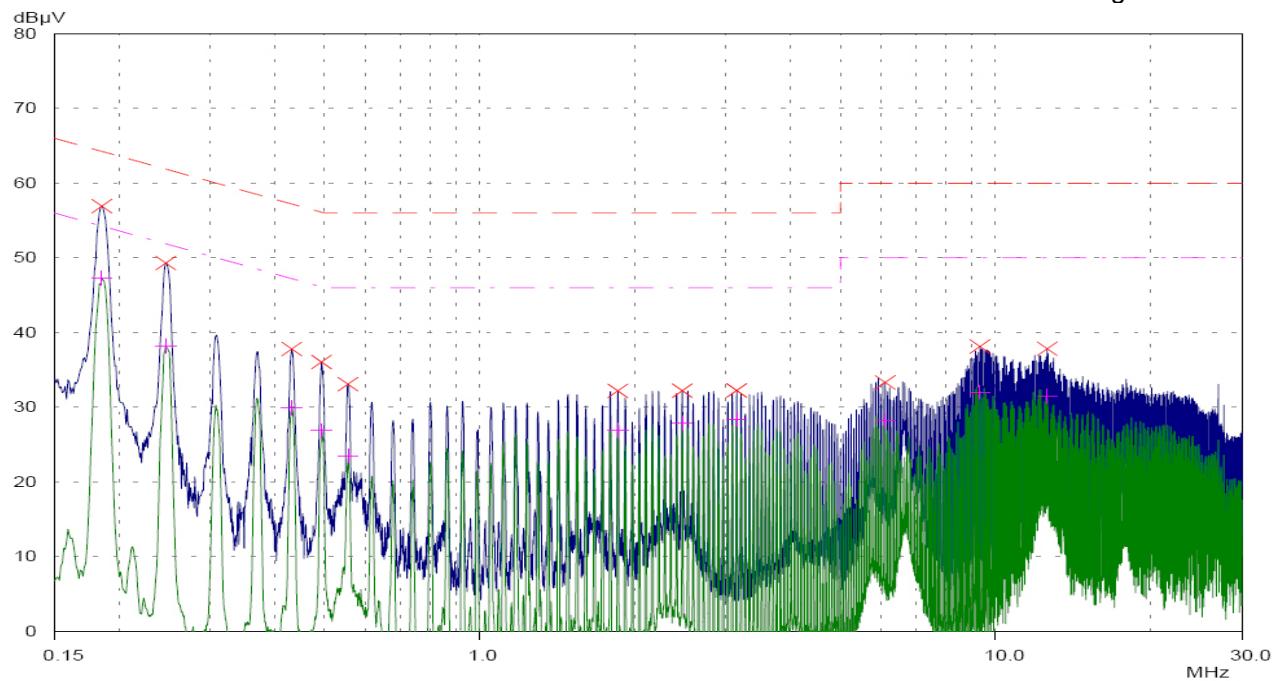
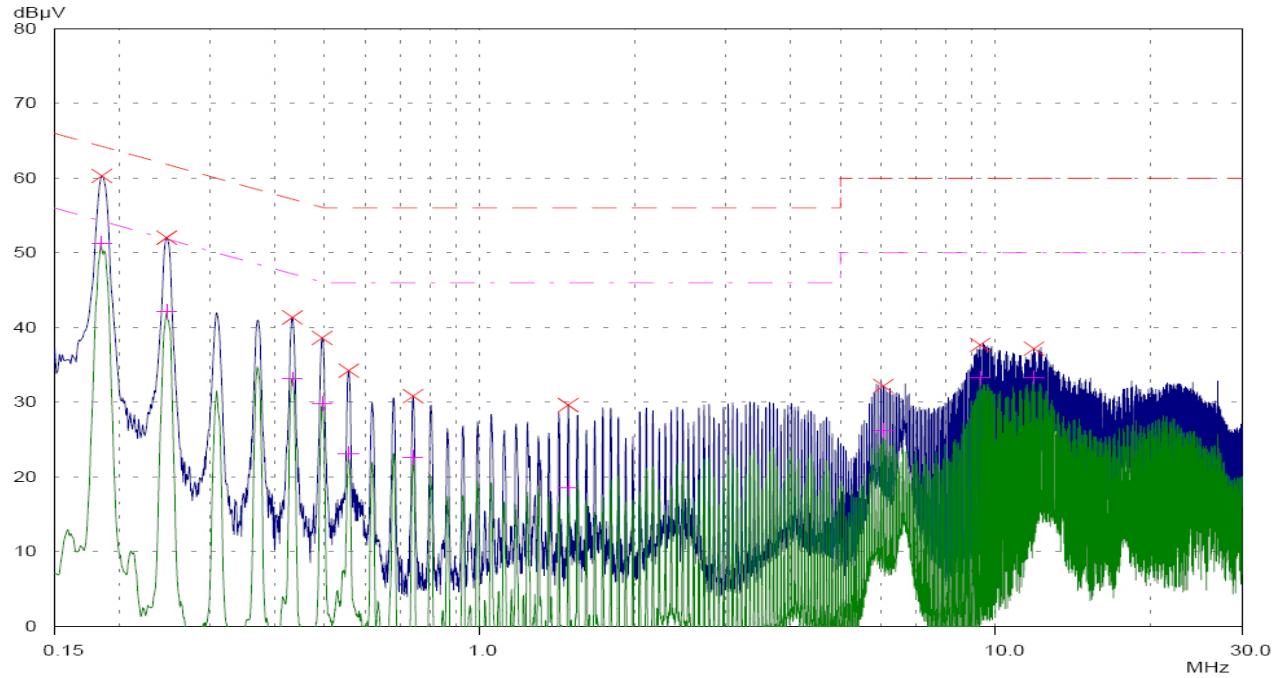
Frequency [MHz]	Result [dB μ V]		Phase (*L/**N)	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.185	60.30	51.30	N	64.26	54.26	3.96	2.96
0.247	52.03	42.20	N	61.86	51.86	9.83	9.66
0.433	41.35	33.11	N	57.19	47.19	15.84	14.08
0.557	34.23	23.13	N	56.00	46.00	21.77	22.87
2.469	32.22	27.90	H	56.00	46.00	23.78	18.10
3.148	32.24	28.32	H	56.00	46.00	23.76	17.68
6.110	33.33	28.20	H	60.00	50.00	26.67	21.80
9.320	38.14	32.01	H	60.00	50.00	21.86	17.99
12.590	37.84	31.49	H	60.00	50.00	22.16	18.51

NOTES:

1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Result
3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15.107(a) Class B
4. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Test Engineer: Jae Young, Kwon

Line: HOT LineLimit :
— Quasi-Peak
- - - Average**Line: Neutral Line**

Quasi-peak

Average

5.3 Radiated Emissions Measurement

EUT	LCD Monitor / OR1930SH (S/N: N/A)
Limit apply to	FCC Part 15.109(g) (CISPR 22 Class B)
Test Date	April 13, 2009
Operating Condition	Full "H" pattern display mode
Result	Passed by 3.10 dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
40.80	13.00	V	11.68	1.02	25.70	30.00	4.30
56.74	12.50	V	11.53	1.27	25.30	30.00	4.70
162.30	11.59	V	12.51	2.60	26.70	30.00	3.30
175.80	12.50	V	11.25	2.75	26.50	30.00	3.50
204.15	14.78	V	9.17	2.95	26.90	30.00	3.10
268.49	17.42	H	11.50	3.38	32.30	37.00	4.70
343.75	14.97	H	13.48	4.05	32.50	37.00	4.50
476.75	12.33	H	16.40	5.17	33.90	37.00	3.10
538.00	9.94	H	17.63	5.63	33.20	37.00	3.80

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz – 1 000 MHz according to FCC Part 15.109(g) and CISPR 22 Class B.



Test Engineer: Jae Young, Kwon

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (uV) : \text{Equation}$$

Example : @ 204.15 MHz

$$\text{Class B Limit} = 30.00 \text{ dBuV/m (CISPR 22 Class B)}$$

$$\text{Reading} = 14.78 \text{ dBuV}$$

$$\text{Antenna Factor + Cable Loss} = 9.17 + 2.95 = 12.12 \text{ dBuV/m}$$

$$\text{Total} = 26.90 \text{ dBuV/m}$$

$$\text{Margin} = 30.00 - 26.90 = 3.10 \text{ dB}$$

$$= 3.10 \text{ dB below Limit}$$

7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESVS10	R & S	835165/001	10.04.02
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESHS 30	R & S	840190/002	10.03.30
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	09.10.01
<input checked="" type="checkbox"/>	LISN	3816-2	EMCO	1002	09.10.01
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	10.01.25
<input checked="" type="checkbox"/>	Turn-Table	MFT-120S	Max-Full Antenna Corp	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	MFA-440E	Max-Full Antenna Corp	-	N/A