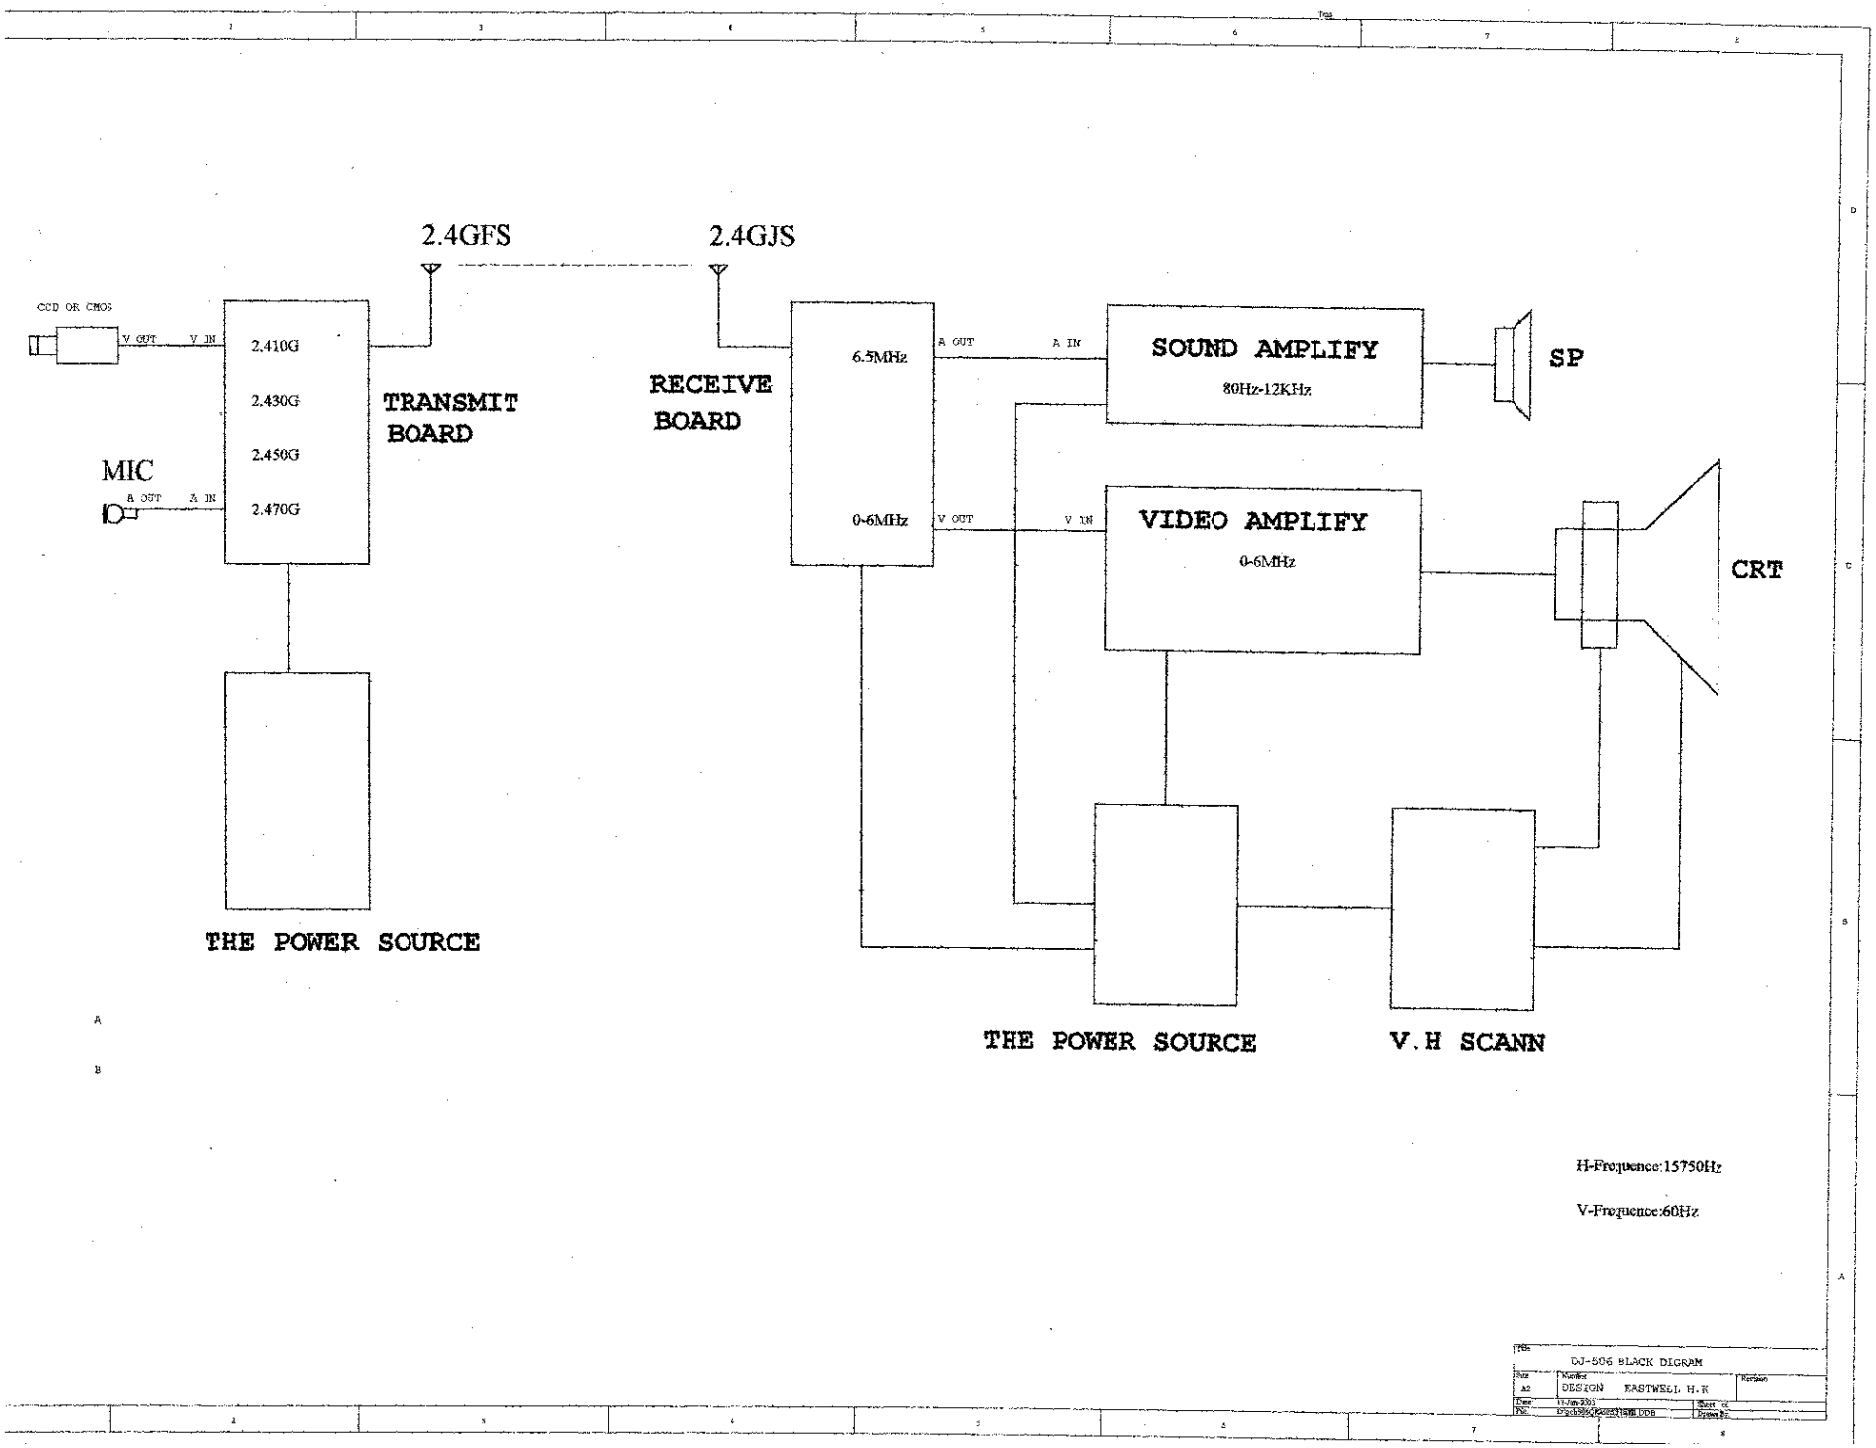
2.4GFS
2.4GJS
CCD OR CMOS
V OUT
V IN
2.410G
2.430G
2.450G
2.470G
TRANSMIT BOARD
MIC
A OUT
A IN
RECEIVE BOARD
6.5MHz
0-6MHz
A OUT
A IN
V OUT
V IN
SOUND AMPLIFY
80Hz-12KHz
SP
VIDEO AMPLIFY
0-6MHz
CRT
THE POWER SOURCE
THE POWER SOURCE
V.H SCANN
H-Frequence:15750Hz
V-Frequence:60Hz
DJ-506 BLACK DIGRAM
DESIGN EASTWELL H.K