

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0913_12.doc	Date of Report:	24-Apr-2009
Number of pages:	14	Customer's Contact person:	Asko Pasanen
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 50 Mattianniemi 6-8 FIN-40101 JYVÄSKYLÄ, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 78000
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-484 (HW 0800), Battery; BL-5K, AC Charger; AC-10E		
FCC ID:	QURRM-484	IC:	661AC-RM484
Supplement reports:	None		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Niels Christian Andersen, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	19-Mar-2009
Testing completed	24-Apr-2009
The customer's contact person	Asko Pasanen
Test Plan referred to	T:\Projects\RM-484\TestPlan_RS\RS_testplan_RM-484.xls
Notes	None
Document name	T:\Projects\RM-484\EMC\Results\FCC\Cph_FCC_0913_12.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-484	004401/10/565905/2	0800		0.527	25267
Battery	BL-5K	4620408441L10103026;0670580	-	-	-	25263
AC Charger	AC-10E	3997918305050506220;0675408	-	-	-	25262

1.2. Summary of Test Results

FM TX:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.239(a)	A2.8	Field strength of the fundamental signal	Passed
15.239(c)	A2.8	Spurious radiated emissions	Passed
15.207	6.6	AC powerline conducted emissions	Passed
15.239(a)	A2.8	26 dB bandwidth	Passed

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP


The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup	4
2.3. Radiated test setup	4
3. Field strength of the fundamental signal (FCC §15.239(a), RSS-210 A2.8).....	5
3.1. Test method and limit	5
3.2. FM TX Test results	6
4. Spurious radiated emissions (FCC §15.239(c), RSS-210 A2.8).....	7
4.1. Test method and limit	7
4.2. FM TX Test results	8
5. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6)	9
5.1. Test method and limit	9
5.2. FM TX Test results	10
6. 26 dB bandwidth (FCC §15.239(a), RSS-210 A2.8)	11
6.1. Test method and limit	11
6.2. FM TX Test results	11
7. Test Equipment.....	13
7.1. Conducted measurements	13
7.2. Radiated measurements	13

2. Test setups


2.1. Conducted RF test setup

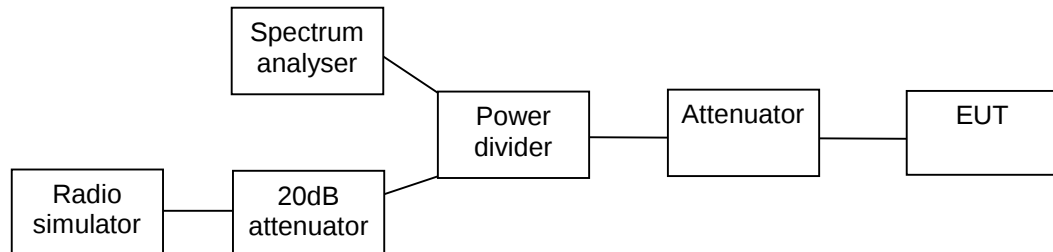

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

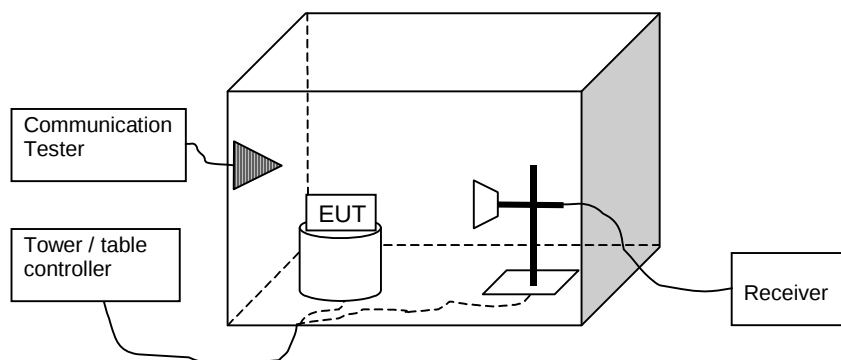

3. Field strength of the fundamental signal (FCC §15.239(a), RSS-210 A2.8)

EUT with DUT number	RM-484 DUT 25267
Accessories with DUT numbers	BL-5K DUT 25263, AC-10E DUT 25262
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.1 / 38 / 101.8
Date of measurements	30-Mar-2009
Measured by	Christian Andersen

3.1. Test method and limit

The measurement is made according to ANSI C63.4 and IC standard RSS-210.

Limits for field strength of the fundamental signal measurements (3 m measurement distance)

Limit [$\mu\text{V/m}$]	Limit [$\text{dB}\mu\text{V/m}$]	Detector
250	48	Average
2500	68	Peak

3.2. FM TX Test results

Peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
88.100000	48.30	260.02	72.60	-24.3	HORIZONTAL	Passed
98.000000	45.50	188.36	69.60	-24.1	VERTICAL	Passed
107.900000	49.60	302.00	73.50	-23.9	VERTICAL	Passed

Average (RBW: 120 kHz, VBW: 300 kHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
Low / 88.1	41.90	124.45	66.20	-24.3	HORIZONTAL	Passed
Middle / 98.0	42.10	127.35	66.20	-24.1	VERTICAL	Passed
High / 107.9	44.30	164.06	68.20	-23.9	VERTICAL	Passed

4. Spurious radiated emissions (FCC §15.239(c), RSS-210 A2.8)

EUT with DUT number	RM-484 DUT 25267
Accessories with DUT numbers	BL-5K DUT 25263, AC-10E DUT 25262
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.1 / 38 / 101.8
Date of measurements	30-Mar-2009
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to ANSI C63.4 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
1000 – 1100	500	54	Average
1000 – 1100	5000	74	Peak

Spurious radiated emissions shall not exceed the field strength of the fundamental signal at any frequencies.

4.2. FM TX Test results

Low channel / 88.1 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U_{RX} [dB μV]	A_{TOT} [dB]	Polarisation	Result
30.700000	23.80	15.49	35.40	-11.6	VERTICAL	Passed
51.790501	28.00	25.12	54.00	-26.0	VERTICAL	Passed
56.778156	28.30	26.00	56.70	-28.4	HORIZONTAL	Passed
56.830180	28.50	26.61	56.90	-28.4	HORIZONTAL	Passed
57.090100	29.90	31.26	58.30	-28.4	HORIZONTAL	Passed

Middle channel / 98.0 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U_{RX} [dB μV]	A_{TOT} [dB]	Polarisation	Result
56.530180	23.80	15.49	52.20	-28.4	HORIZONTAL	Passed
56.578156	24.10	16.03	52.50	-28.4	HORIZONTAL	Passed
56.990100	23.10	14.29	51.50	-28.4	HORIZONTAL	Passed

High channel / 107.9 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U_{RX} [dB μV]	A_{TOT} [dB]	Polarisation	Result
51.640501	26.00	19.95	51.90	-25.9	VERTICAL	Passed
56.780180	28.50	26.61	56.90	-28.4	HORIZONTAL	Passed
56.828156	28.20	25.70	56.60	-28.4	HORIZONTAL	Passed
57.040100	29.50	29.85	57.90	-28.4	HORIZONTAL	Passed

5. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6)

EUT with DUT number	RM-484 DUT 25267
Accessories with DUT numbers	BL-5K DUT 25263, AC-10E DUT 25262
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.2 / 29.5 103.42
Date of measurements	24-Apr-2009
Measured by	Jan Engelbrechtsen

5.1. Test method and limit

The measurement is made according to ANSI C63.4 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. FM TX Test results

Middle channel / 98.0 MHz

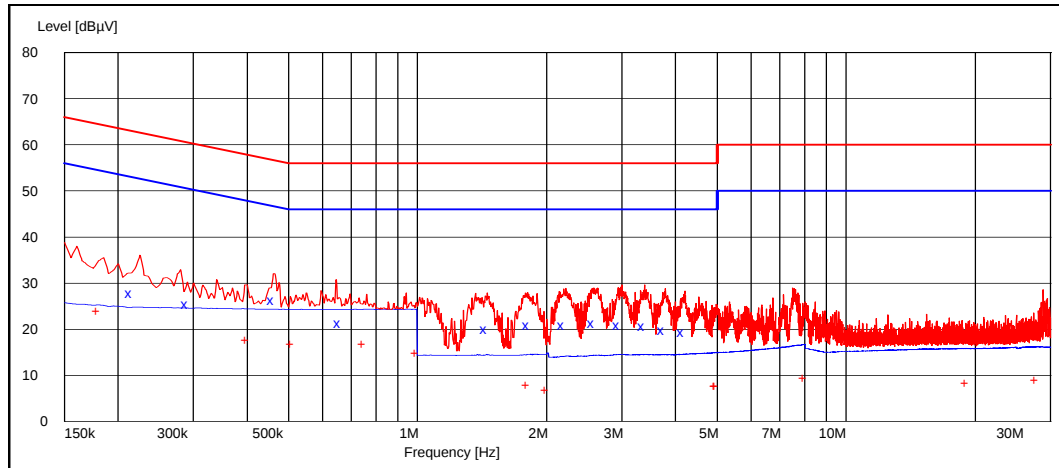

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.215000	27.90	L1	Pass
0.290000	25.50	L1	Pass
0.460000	26.30	N	Pass
0.660000	21.40	L1	Pass
1.445000	20.10	N	Pass
1.815000	21.00	N	Pass
2.195000	21.00	N	Pass
2.580000	21.30	N	Pass
2.955000	21.00	N	Pass
3.380000	20.80	N	Pass
3.750000	19.90	N	Pass
4.175000	19.30	N	Pass

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.180000	23.90	L1	Pass
0.400000	17.70	N	Pass
0.510000	16.70	N	Pass
0.750000	16.80	L1	Pass
0.995000	14.80	N	Pass
1.810000	7.90	N	Pass
2.005000	6.70	N	Pass
4.980000	7.70	N	Pass
4.990000	7.60	N	Pass
8.025000	9.40	N	Pass
19.125000	8.30	N	Pass
27.880000	9.00	L1	Pass

6. 26 dB bandwidth (FCC §15.239(a), RSS-210 A2.8)

EUT with DUT number	RM-484 DUT 25267
Accessories with DUT numbers	BL-5K DUT 25263, AC-10E DUT 25262
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22.1 / 38 / 101.8
Date of measurements	30-Mar-2009
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to ANSI C63.4 and IC standard RSS-210.


Limits for 26 dB bandwidth measurements

Limit [kHz]
≤ 200


6.2. FM TX Test results

Channel / f_c [MHz]	26 dB bandwidth [kHz]	Result
Low / 88.1	125.251	Passed
Middle / 98.0	162.325	Passed
High / 107.9	163.327	Passed


Low channel / 88.1 MHz

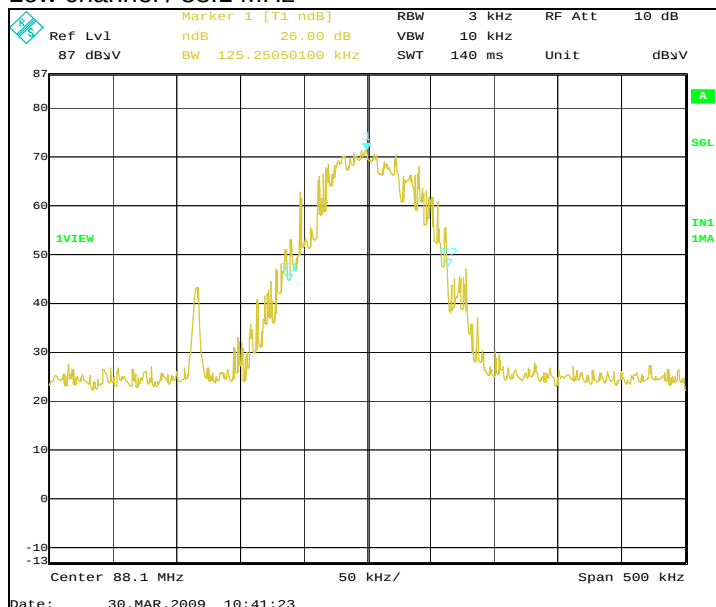

Middle channel / 98.0 MHz

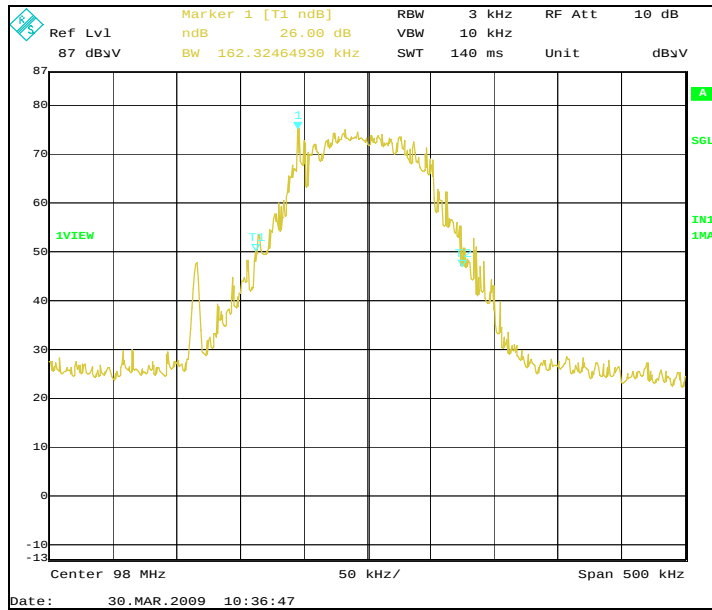

High channel / 107.9 MHz

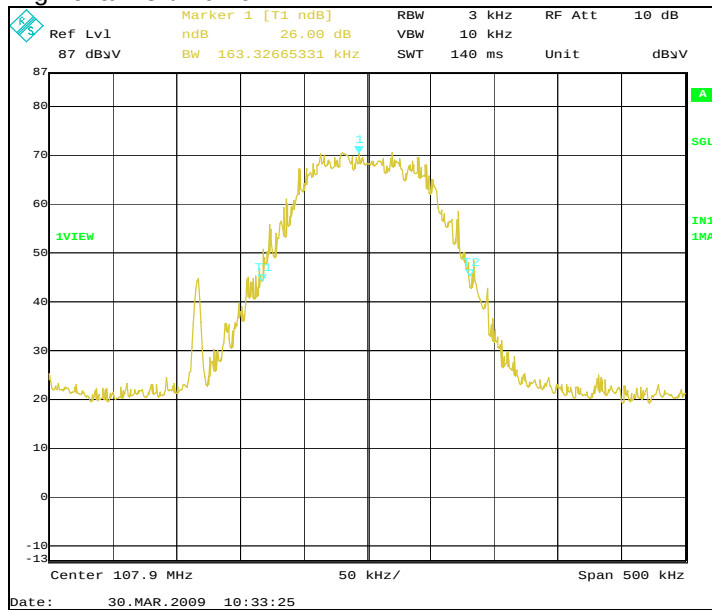

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B