



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04082014
Report No.:FCCA04082014
Page: 1 of 11
Date:Sep. 16, 2004

Product Name: Wireless Power Drive Control
Model No.: 06402
Applicant: Superwinch Inc.
45 Danco Road Putnam, CT 06260, U.S.A.
Date of Receipt: Aug. 20, 2004
Finished date of Test: Sep. 01, 2004
Applicable Standards: 47 CFR Part 15, Subpart B, Class B
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : Ken Su for, Date: 09/16/2004
(Sunyou Chen)

Approved By : J. Ho, Date: Sep. 16, 2004
(Johnson Ho, Director)



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04082014
Report No.: FCCA04082014
Page: 2 of 55
Date:Sep. 16, 2004

Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1 DOCUMENT POLICY.....	3
1.2 TEST STATEMENT	3
1.3 EUT MODIFICATION	3
2. DESCRIPTION OF EUT AND TEST MODE	4
2.1 GENERAL DESCRIPTION OF EUT.....	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE	4
2.3 DESCRIPTION OF TEST MODE.....	4
2.4 DESCRIPTION OF SUPPORT UNIT	5
3. DESCRIPTION OF APPLIED STANDARDS.....	5
4. RADIATED EMISSION TEST	6
4.1 RADIATED EMISSION LIMIT	6
4.2 TEST EQUIPMENT.....	6
4.3 TEST SET-UP	7
4.4 TEST PROCEDURE	8
4.5 EUT OPERATING CONDITION	8
4.6 RADIATED EMISSION TEST RESULT	9
5. PHOTOS OF TESTING	10
6. TERMS OF ABRIVATION.....	11

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	TEST REPORT	Reference No.:A04082014 Report No.: FCCA04082014 Page: 3 of 55 Date:Sep. 16, 2004
---	--------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, 5V, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A04082014 Report No.: FCCA04082014 Page: 4 of 55 Date: Sep. 16, 2004
---	----------------------	---

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Power Drive Control
MODEL NO.	06402
POWER SUPPLY	DC 5V, 8.5mA
CABLE	N/A
I/O PORT/INTERFACE	N/A
OPERATING FREQUENCY	433.92MHz
NUMBER OF CHANNEL	1
MODULATION TYPE	ASK
MODE OF OPERATION	Simplex
BIT RATE OF TRANSMISSION	4KHz
ANTENNA TYPE	Helical antenna
ANTENNA GAIN	-2dBi

NOTE:

The EUT is the receiver part of a remote controller which is designed to use in a vehicle.

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A04082014 Report No.: FCCA04082014 Page: 5 of 55 Date: Sep. 16, 2004
---	----------------------	---

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4: 2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	FAN	NMB	3110KL-04W-B57	N/A	0.1m Unshielded Power Cable
2	FAN	NMB	3110KL-04W-B57	N/A	0.1m Unshielded Power Cable

NOTE: For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of receiver and according to the specifications provided by the applicant, must comply with the requirements of the following standards:
47 CFR Part 15 Subpart B, Class B

All tests have been performed and recorded as per the above standards.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A04082014 Report No.: FCCA04082014 Page: 6 of 66 Date:Sep. 16, 2004
---	----------------------	--

4. RADIATED EMISSION TEST

4.1 RADIATED EMISSION LIMIT

FCC Part 15, Subpart B limit of radiated emission :

Frequency (MHz)	Class B (at 3m)
	dB μ V/m
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
Above 960	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

4.2 TEST EQUIPMENT


The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 MHz TO 1 GHz	ROHDE & SCHWARZ	ESVS30/ 841977/003	SEP. 2004 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2005 SRT
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB(typ.)	HP	8449B/ 3008A01019	DEC. 2004 ETC
SPECTRUM	9KHz TO 26.5GHz	HP	8953E/ 3710A03220	MAY 2005 ETC
HORN ANTENNA	1GHz TO 18GHz	EMCO	3115/ 9602-4681	NOV. 2004 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2005 SRT

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.3 TEST SET-UP

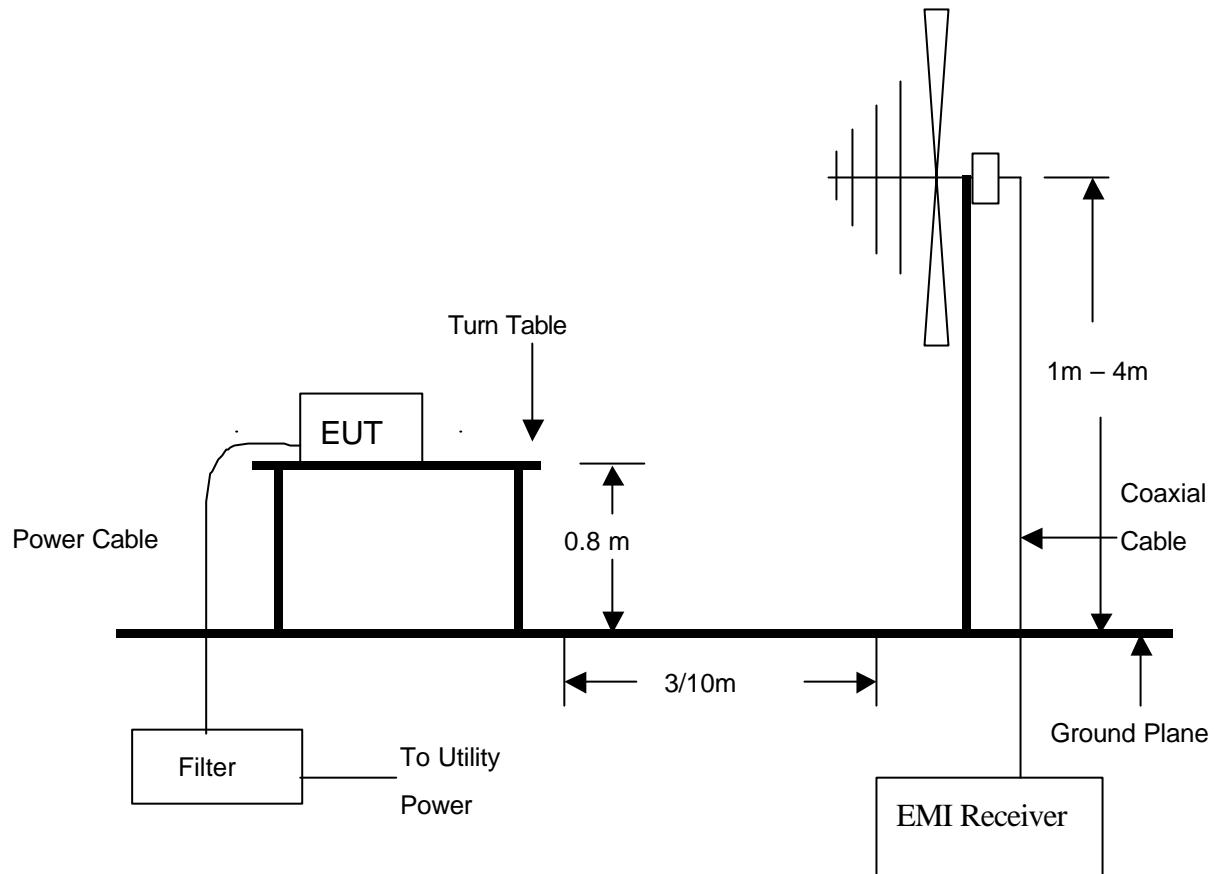

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04082014
Report No.: FCCA04082014
Page: 8 of 88
Date:Sep. 16, 2004

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

The EUT was operated at continue receiver mode.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<p>TEST REPORT</p>	<p>Reference No.:A04082014 Report No.: FCCA04082014 Page: 9 of 99 Date:Sep. 16, 2004</p>
---	---------------------------	--

4.6 RADIATED EMISSION TEST RESULT

Temperature:	27 °C	Humidity:	63 %RH
Ferquency Range:	30 – 1GHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested By:	Kevin Liao
		Tested Date:	Aug. 26, 2004

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data(dB μ V) (Peak)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ (°)	EL (m)
66.2770	1.10	5.92	13.2	20.2	40.0	-19.8	167.3	3.8
76.2810	1.22	6.50	15.4	23.1	40.0	-16.9	186.4	3.5
181.0690	1.52	8.84	12.9	23.3	43.5	-20.2	152.1	3.2
205.6370	2.03	9.84	16.2	28.1	43.5	-15.4	236.9	2.2
432.5500	3.01	16.58	13.5	33.1	46.0	-12.9	96.5	2.6
574.1670	3.69	18.91	10.6	33.2	46.0	-12.8	97.5	2.3

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data(dB μ V) (Peak)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ (°)	EL (m)
66.2770	1.10	5.92	18.2	25.2	40.0	-14.8	85.1	1.0
73.0580	1.19	6.35	19.2	26.7	40.0	-13.3	221.0	1.0
114.2800	1.53	6.17	20.1	27.8	43.5	-15.7	54.4	1.3
171.8320	1.99	8.71	16.7	27.4	43.5	-16.1	67.5	1.2
435.2890	3.00	16.63	14.9	34.5	46.0	-11.5	34.5	1.8
525.6710	3.59	18.18	10.3	32.1	46.0	-13.9	195.4	1.7

NOTE :

1. Measurement uncertainty is +/-2dB.
2. **: Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.





**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04082014
Report No.: FCCA04082014
Page: 10 of 10
Date:Sep. 16, 2004

5. PHOTOS OF TESTING

- Radiated test

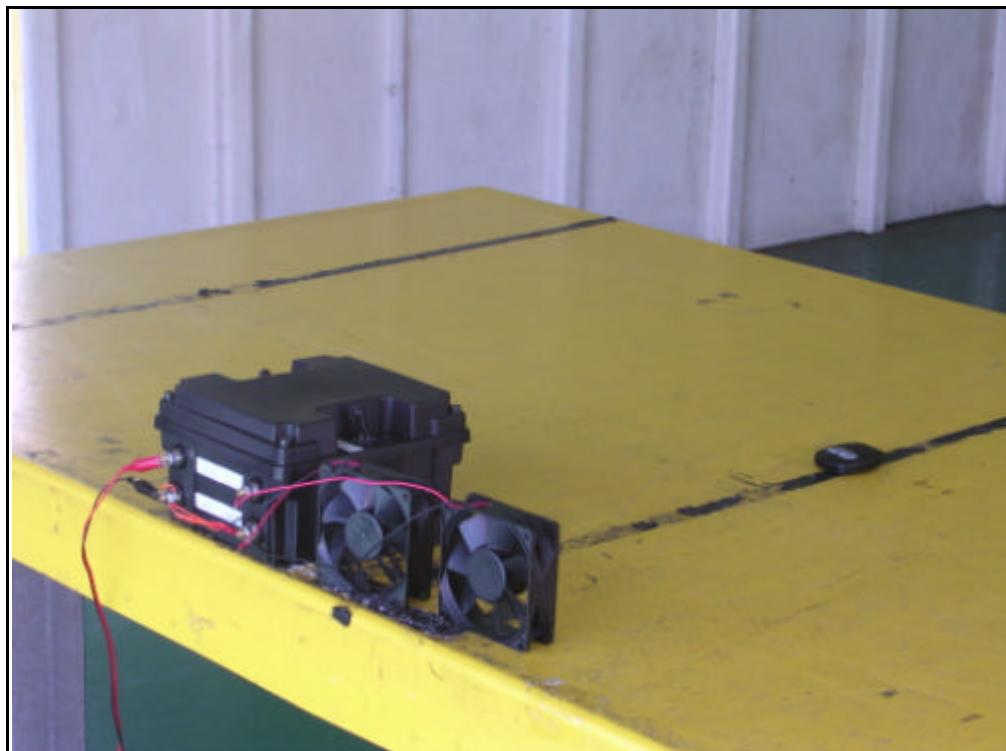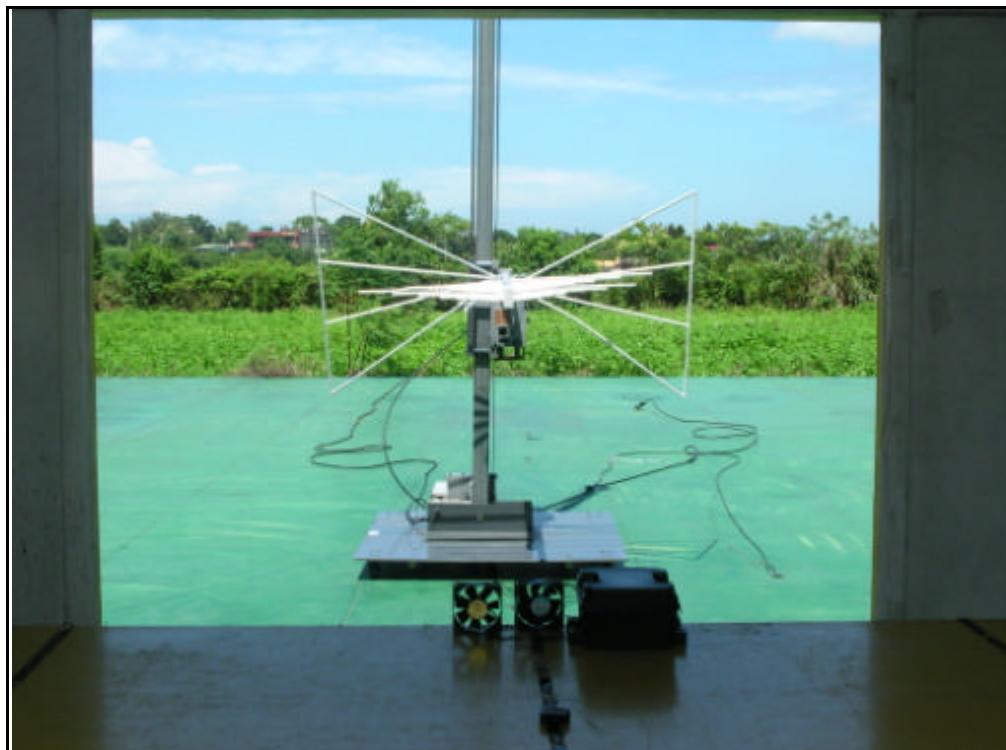



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04082014
Report No.: FCCA04082014
Page: 11 of 11
Date:Sep. 16, 2004

6. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction