




Specification
For
2.4G/5Ghz Dual band PCB Antenna
Rev. 1.0

2012-2023 Well Linkage, Co. Ltd.

This document contain information that is proprietary to Well Linkage, Co. Ltd
Unauthorized reproduction or disclosure of this information in whole or in part is strictly prohibited.



Specification are subject to change without notice

Antenna out looking:

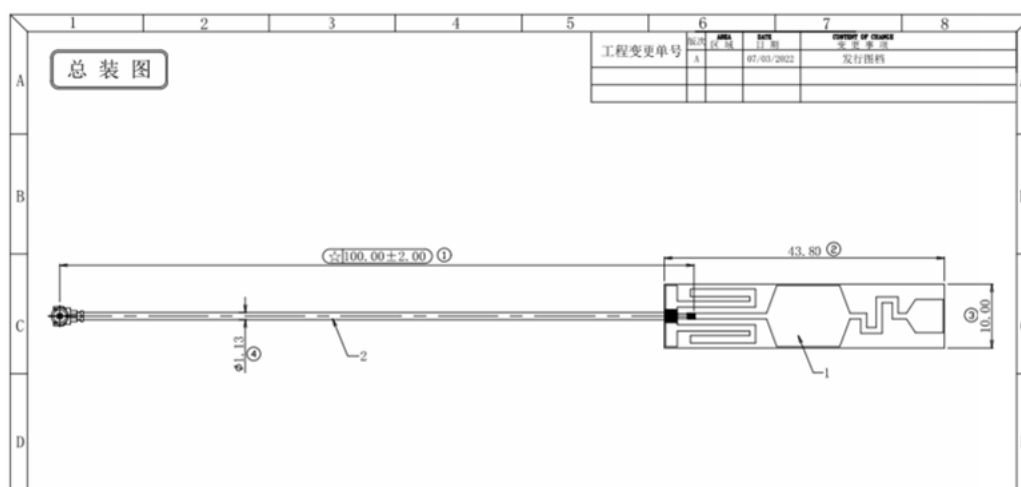


Frequency	2400MHz-2500MHz, 5150MHz-5850MHz
VSWR	≤2.0
Antenna Gain	4dBi
Impedance	50 ohm
Polarization	vertical
Connector loss	0.5db
Antenna size	43.8*10mm
RF Cable	φ 1.13mm normal
Connector	Ipex 1 代

Testing Efficiency / Gain Data

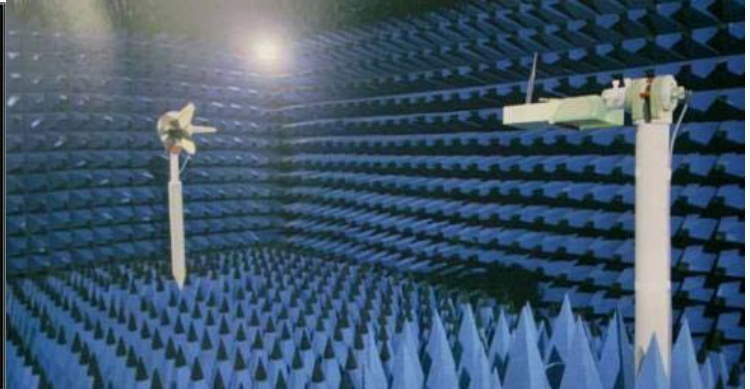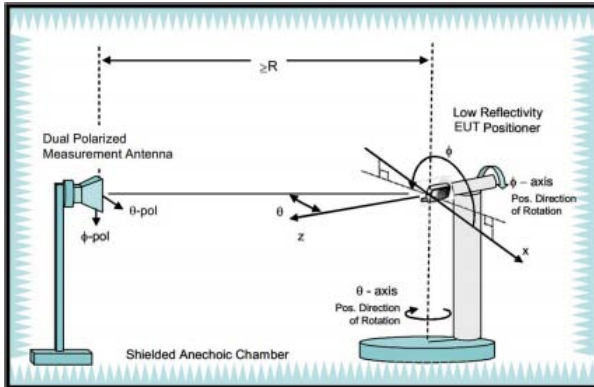



VSWR:

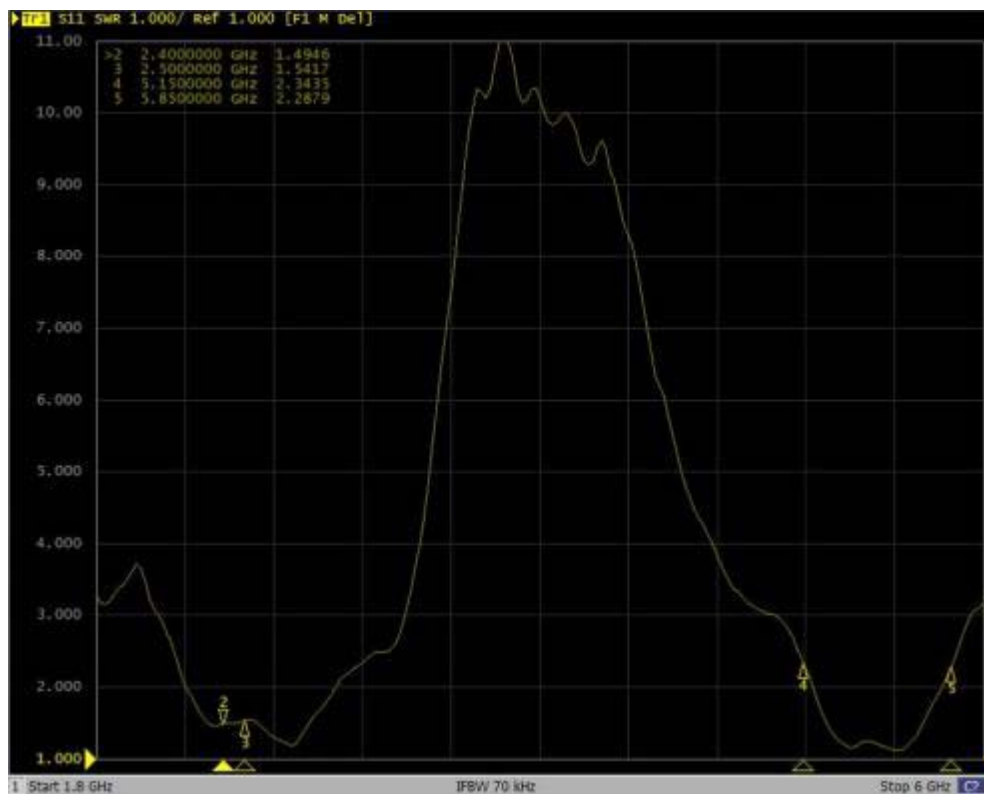

Efficiency / Gain Data :

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	62.44	-2.05	3.58	5100	59.48	-2.26	3.77
2410	66.31	- 1.78	3.91	5150	65.71	- 1.82	4.08
2420	68.06	- 1.67	4.01	5200	64.58	- 1.9	3.83
2430	66.02	- 1.8	4.02	5250	54.53	-2.63	2.89
2440	64.71	- 1.89	3.89	5300	59.6	-2.25	2.97
2450	66.01	- 1.8	3.91	5350	65.57	- 1.83	3.09
2460	62.23	-2.06	3.54	5400	65.9	- 1.81	2.84
2470	63.7	- 1.96	3.45	5450	71.06	- 1.48	2.78
2480	63.59	- 1.97	3.24	5500	73.03	- 1.36	2.79
2490	57.44	-2.41	2.58	5550	71.48	- 1.46	3.34
2500	53.68	-2.7	2.14	5600	62.17	-2.06	2.64
				5650	64.07	- 1.93	2.87
				5700	68.05	- 1.67	2.95
				5750	60.67	-2. 17	2.45
				5800	49.58	-3.05	1.85
				5850	48.96	-3.1	1.83

Test Results – Radiation Pattern :

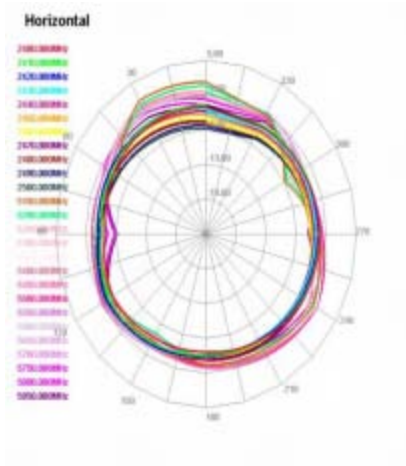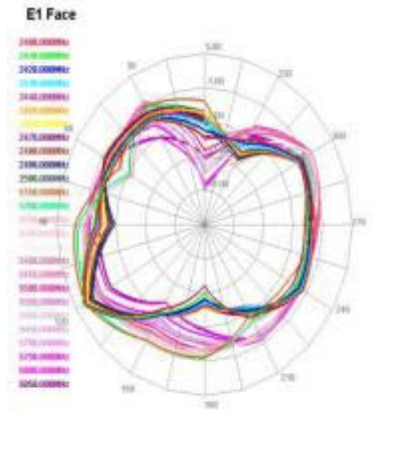Radiation Pattern		
Fre(MHz)		
2400-2500 5100-5850	XY Plane	
	XZ Plane	
	YZ Plane	