
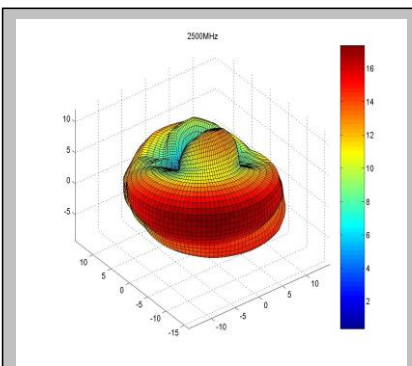
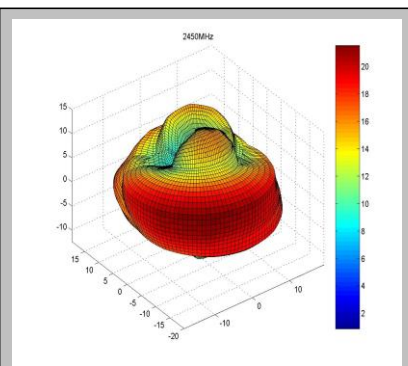
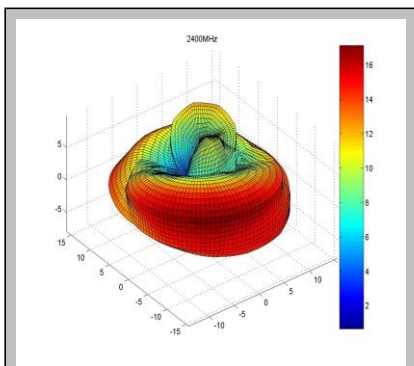



深圳华德昌 3D Antenna Pattern Report

Manufacturer	调试
Model Name	H223-2.4G XIPAN
Tester Name	深圳华德昌
Test Date	2016/7/14 16:56
IF BW	300Hz
Port Power	10dBm
Meas Step	10 `


[illegible]

成品图

ROHS

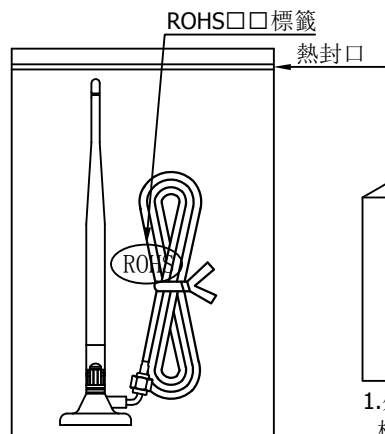


Packing: 1pcs/bag

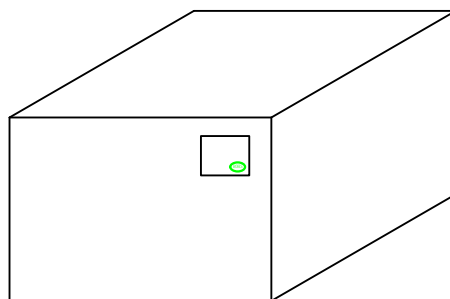

1. 外箱需貼1PCS/ROH 標籤於外箱
2. 外箱需貼1PCS/外箱標籤於 外箱測麥右上角

10	Magnet	NdFeB N35, $\Phi 22 \times T1.5\text{mm}$	1	
9	Cushion	Silicone; 60A	1	
8	Chassis	ABS, Color: Black	1	
7	Connector	SMA Straight Plug/Standard	1	公針
6	H.S Tube	Heat Shrink Tube	1	
5	Cable	RG-174 Cable, Black, 50 Ω	1	
4	Rivet	PBT+PC, Color: Black	2	
3	Antenna Base	PBT+PC, Color: Black	1	
2	Antenna Base	PBT+PC, Color: Black	1	
1	Antenna Body	TPE, Color: Black	1	
NO	DESCRIPTION		Q'TY	REMARK

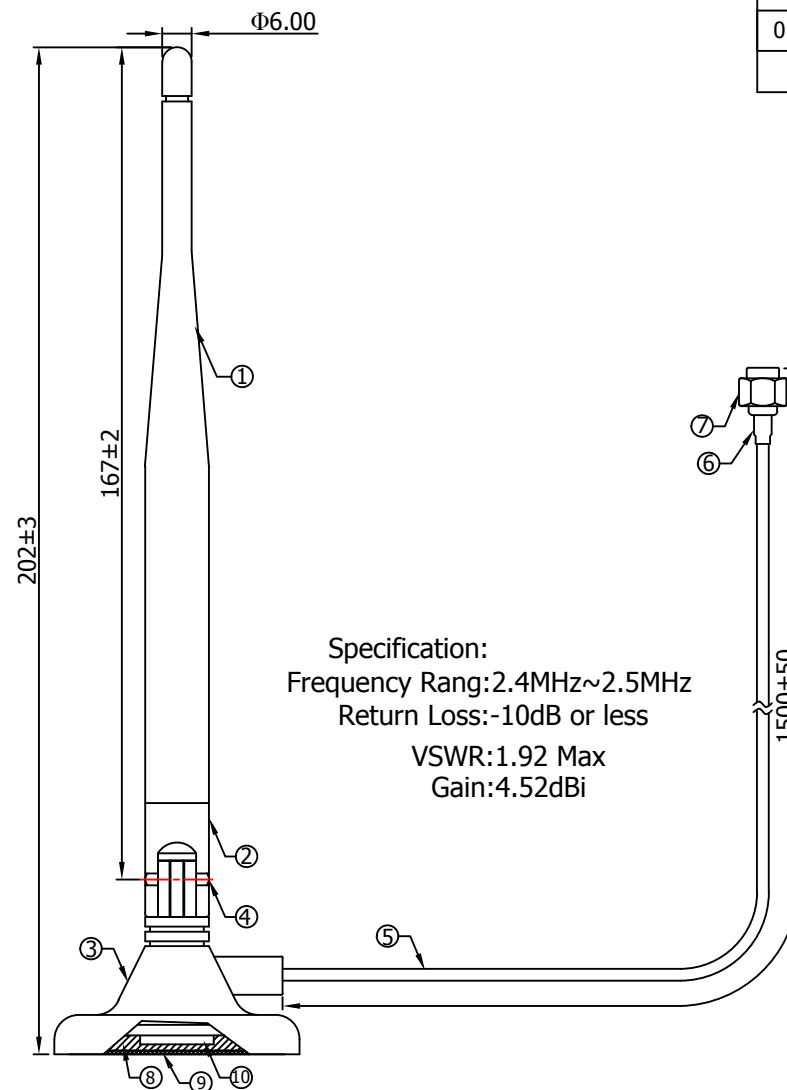

Specification:
Frequency Rang: 2.4MHz~2.5MHz
Return Loss: -10dB or less
VSWR: 1.92 Max
Gain: 4.52dBi

TITLE:		2.4G 4.52dBI □□□□		Well Linkage Co. Ltd. 威利國際			
P/N:		WL_EISS_2400_5d_1500					
CUSTOMER:		HLDC					
DRAW NO.:							
DIMENSIONS TOLERANCES UNLESS OTHERWISE NOTED						APPROVED	
一般公差 TOLERANCE		.XXX ±0.05	XX. ±1.0			SHEET: 1/1	SCALE: 1:1
		.XX ±0.1		UNIT: mm	REV.X2	DRAWED	
		.X ±0.2					
		X. ±0.5					

REV.	Contain	Date
01	Initial version	2016.06.13