



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: QUZ126724
MODEL: PICSE-1

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 15.245, Confidentiality

DATE OF REPORT: March 18, 2003
AMENDED: June 4, 2003

ON THE BEHALF OF THE APPLICANT:

EG & G Technical Services, Inc.

AT THE REQUEST OF:

P.O. Part of A322501712

EG & G Technical Services, Inc.
2420 Comanche Rd., NE., STE D-2
Albuquerque, NM 87107

Attention of:

Marie Stoffer
(505) 998-0677 x 211; FAX: -0671
email: mstoffer@egginc.com

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO.

2 of 23. AMENDED June 4, 2003

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

15.245, Confidentiality

Sub-part 2.1033(c) (1): NAME AND ADDRESS OF APPLICANT:EG & G Technical Services, Inc.
P.O. Box 9100
Albuquerque, NM 87119-9100MANUFACTURER:

Applicant

(c) (2): FCC ID: QUZ126724MODEL NO: PICSE-1(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 182K0F2D(c) (5): FREQUENCY RANGE, MHz: 902 to 928(c) (6): POWER RATING, Watts: 0.0005 to 0.004
 Switchable Variable N/A(c) (7): MAXIMUM POWER RATING, Watts: 50 mv/m @ 3m15.203: ANTENNA REQUIREMENT:

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply

PLEASE NOTE: 1) ALL DEVICES CONTAIN AN R.F. MODULE MANUFACTURED BY LINX TECHNOLOGIES, FCC ID: OJM-TR-916-SC.

2) Uses surface mount "Splatch" antenna with -1 dbi gain.

PAGE NO.

5 of 23. AMENDED June 4, 2003

Sub-part
2.1033(b):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.1031, 2.1033, 2.1035, 2.1041, 2.1043, 2.1045, and the following individual Parts:

- _____ 15.209 Radiated emission limits; general requirements
- _____ 15.211 Tunnel radio systems
- _____ 15.213 Cable locating equipment
- _____ 15.214 Cordless telephones
- _____ 15.217 Operation in the band 160-190 kHz
- _____ 15.219 Operation in the band 510-1705 kHz
- _____ 15.221 Operation in the band 525-1705 kHz (leaky coax)
- _____ 15.223 Operation in the band 1.705-10 MHz
- _____ 15.225 Operation in the band 13.553-13.567 MHz
- _____ 15.227 Operation in the band 26-27.28 MHz (remote control)
- _____ 15.229 Operation in the band 40.66-40.70 MHz
- _____ 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz
- _____ 15.233 Operation within the bands 43.71-44.49, 46.60-46.98 MHz 48.75-49.51 MHz and 49.66-50.0 MHz
- _____ 15.235 Operation within the band 49.82-49.90 MHz
- _____ 15.237 Operation within the bands 72.0-73.0 MHz, 74.6-74.8 MHz and 75.2-76.0 MHz (auditory assistance)
- _____ 15.239 Operation in band 88-108 MHz
- _____ 15.241 Operation in the band 174-216 MHz (biomedical)
- _____ 15.243 Operation in the band 890-940 MHz (materials)
- _____ x 15.245 Operation within the bands 902-928 MHz, 2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz, and 24075-24175 MHz (field disturbance sensors)
- _____ 15.247 Operation within bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz (spread spectrum)
- _____ 15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz
- _____ 15.251 Operation within the bands 2.9-3.26 GHz, 3.267-3.332 GHz, 3.339-3.3458 GHz, and 3.358-3.6 GHz (vehicle identification systems)
- _____ 15.321 Specific requirements for asynchronous devices operating in the 1910-1920 MHz and 2390-2400 MHz bands (Unlicensed PCS)
- _____ 15.323 Specific requirements for isochronous devices operating in the 1920-1930 MHz sub-band (Unlicensed PCS)

PAGE NO.

7 of 23. AMENDED June 4, 2003

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

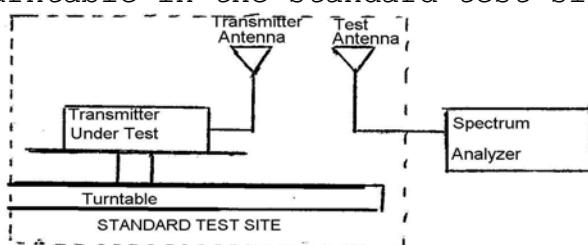

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \sum 10(LVL - LOSS) / 10 \text{ (dBm)}$$

RESULTS		Path Loss, db
916.48 MHZ	LVL, dbm	
0°	-16.5	1.8
45°	-20.5	1.8
90°	-15.8	1.8
135°	-29.0	1.8
180°	-11.2	1.8
225°	-17.2	1.8
270°	-20.4	1.8
315°	-23.4	1.8
916.48 MHZ		
Av. Radiated Power:		-17.45 dbm
Worst Case = -11.2 dbm, maximum		
= 62 millivolts		

PAGE NO.

11 of 23. AMENDED June 4, 2003

NAME OF TEST: Field Strength of Spurious Radiation
g0330082: 2003-Mar-11 Tue 09:22:00
STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
916.480000	1832.855666	≤ -47.0	≤ -77.6
916.480000	2749.262333	≤ -47.0	≤ -77.6
916.480000	3665.854000	≤ -47.0	≤ -77.6
916.480000	4582.384000	≤ -47.0	≤ -77.6
916.480000	5498.435666	≤ -47.0	≤ -77.6
916.480000	6414.885666	≤ -47.0	≤ -77.6
916.480000	7331.635666	≤ -47.0	≤ -77.6
916.480000	8248.610666	≤ -47.0	≤ -77.6
916.480000	9164.805666	≤ -47.0	≤ -77.6

Worst Case = -47.0 dbm
= 1 millivolt