

TEST REPORT NUMBER: (8525)078-0127

TEST REPORT

Applicant:	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.LTD	Fax:	---
		E-mail:	---
Address :	NO.2 WEST XINGYE ROAD LAIMEI TINDUSTRIALAREA CHENGHAI Shantou China		
Test Date :	2025-3-26 to 2025-4-2		

Manufacturer or Supplier :	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.LTD
Address :	NO.2 WEST XINGYE ROAD LAIMEI TINDUSTRIALAREA CHENGHAI Shantou China
Sample Description:	DRONE
Model number:	S026H
Additional Model :	N/A
Rated Voltage:	TX: DC6V (4*1.5V LR6 AAA batteries)
FCC ID :	QV7-GC88752-108
The submitted sample of the above equipment has been tested according to following standard(s)	
47 CFR Part 15, Subpart C 249	
CONCLUSION: The submitted sample was found to COMPLY with the test requirement	

Assistant Manager



Name: Nick Lung

Date: APR 16,2025

TEST REPORT NUMBER: (8525)078-0127**1 Test Summary**

Test Item	IC Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10-2013	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10-2013	PASS

N/A: Since the EUT is powered by battery, this AC power line conducted emission test should be not applicable

NOTE: The following test items are all using new batteries

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST ENVIRONMENT AND MODE	7
3.4 DESCRIPTION OF SUPPORT UNITS	7
3.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
3.6 TEST LOCATION	9
3.7 TSTERS AND AUDITORS	9
3.8 TEST FACILITY	9
3.9 DEVIATION FROM STANDARDS	9
3.10 ABNORMALITIES FROM STANDARD CONDITIONS	9
3.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
3.12 EQUIPMENT LIST	10
4 TEST RESULTS AND MEASUREMENT DATA	11
4.1 ANTENNA REQUIREMENT	11
4.2 RADIATED EMISSION	12
4.3 20DB BANDWIDTH	20
5 PHOTOGRAPHS	23
5.1 EUT CONSTRUCTIONAL DETAILS	23

3 General Information

3.1 Client Information

Applicant:	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.LTD
Address of Applicant:	NO.2 WEST XINGYE ROAD LAIMEI TINDUSTRIALAREA CHENGHAI Shantou China
Manufacturer:	GUANGDONG SYMA MODEL AIRCRAFT INDUSTRIAL CO.LTD
Address of Manufacturer:	NO.2 WEST XINGYE ROAD LAIMEI TINDUSTRIALAREA CHENGHAI Shantou China

3.2 General Description of EUT

Name:	DRONE
Test Model No.:	S026H
Trade Mark :	N/A
Software Version:	0xC417B0
Hardware Version:	1.0
Frequency Range:	2405MHz ~ 2478MHz
Modulation Type:	GFSK
Number of Channels:	74
Sample Type:	Portable product
Antenna Type:	Internal antenna
Antenna Gain:	0dBi

TEST REPORT NUMBER: (8525)078-0127

Channel	Frequency (MHz)						
1	2405	21	2425	41	2445	61	2465
2	2406	22	2426	42	2446	62	2466
3	2407	23	2427	43	2447	63	2467
4	2408	24	2428	44	2448	64	2468
5	2409	25	2429	45	2449	65	2469
6	2410	26	2430	46	2450	66	2470
7	2411	27	2431	47	2451	67	2471
8	2412	28	2432	48	2452	68	2472
9	2413	29	2433	49	2453	69	2473
10	2414	30	2434	50	2454	70	2474
11	2415	31	2435	51	2455	71	2475
12	2416	32	2436	52	2456	72	2476
13	2417	33	2437	53	2457	73	2477
14	2418	34	2438	54	2458	74	2478
15	2419	35	2439	55	2459		
16	2420	36	2440	56	2460		
17	2421	37	2441	57	2461		
18	2422	38	2442	58	2462		
19	2423	39	2443	59	2463		
20	2424	40	2444	60	2464		

TEST REPORT NUMBER: (8525)078-0127

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2405MHz
The Middle channel	2441MHz
The Highest channel	2478MHz

TEST REPORT NUMBER: (8525)078-0127

3.3 Test Environment and Mode

Operating Environment:	
Temperature:	29 °C
Humidity:	59 % RH
Atmospheric Pressure:	100.9Kpa
Test mode:	
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	/

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8 °C
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	time	0.6 %.
14	Frequency Error	5.5 Hz

TEST REPORT NUMBER: (8525)078-0127

3.6 Test Location

Subcontraction to External 3rd party lab

The analysis was performed by a Bureau Veritas assessed external subcontractor

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.7 Testers and auditors

The tester in this report is Timo Lei, *Timo Lei*

The auditor of this report is Lewis Zhou, *Lewis Zhou*

The test site is: Shenzhen Huaxia Testing Technology Co., Ltd.

3.8 Test Facility

- **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

- **CAB identifier:CN0055**

Shenzhen Huaxia Testing Technology Co., Ltd.CAB identifier No.:CN0055

3.9 Deviation from Standards

None.

3.10 Abnormalities from Standard Conditions

None.

3.11 Other Information Requested by the Customer

None.

TEST REPORT NUMBER: (8525)078-0127**3.12 Equipment List**

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	VULB 9163	CQA-101	2024/9/4	2025/9/3
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
EUT Antenna:	Please refer to the photos Appendix B
The antenna is soldered on the PCB, no need to consider replacement. best case gain Antenna is 0dBi.	

TEST REPORT NUMBER: (8525)078-0127

4.2 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249(a) and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)	Remark		
	2400MHz-2483.5MHz	94.0	Average Value		
		114.0	Peak Value		
Test Setup:					

TEST REPORT NUMBER: (8525)078-0127

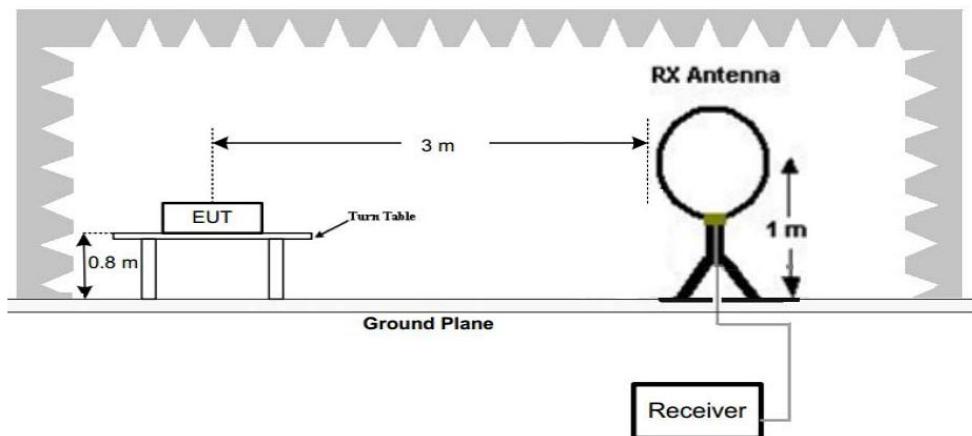


Figure 1. Below 30MHz

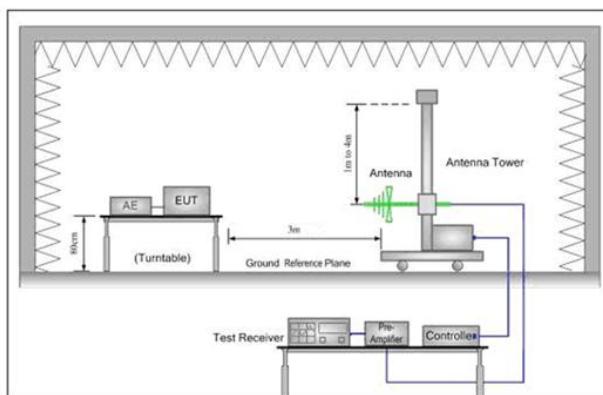


Figure 2. 30MHz to 1GHz

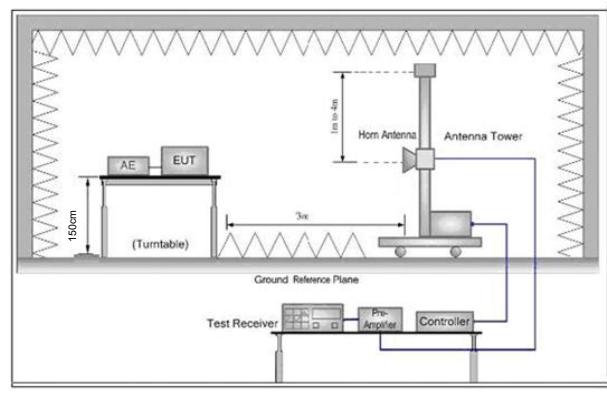


Figure 3. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit
-----------------	--


TEST REPORT NUMBER: (8525)078-0127

	<p>specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Voltage:	DC6.0V (AAA*4)
Test Results:	Pass

TEST REPORT NUMBER: (8525)078-0127

Measurement Data


30MHz~1GHz (the worst case)		
Test mode:	Transmitting (Lowest channel)	Vertical

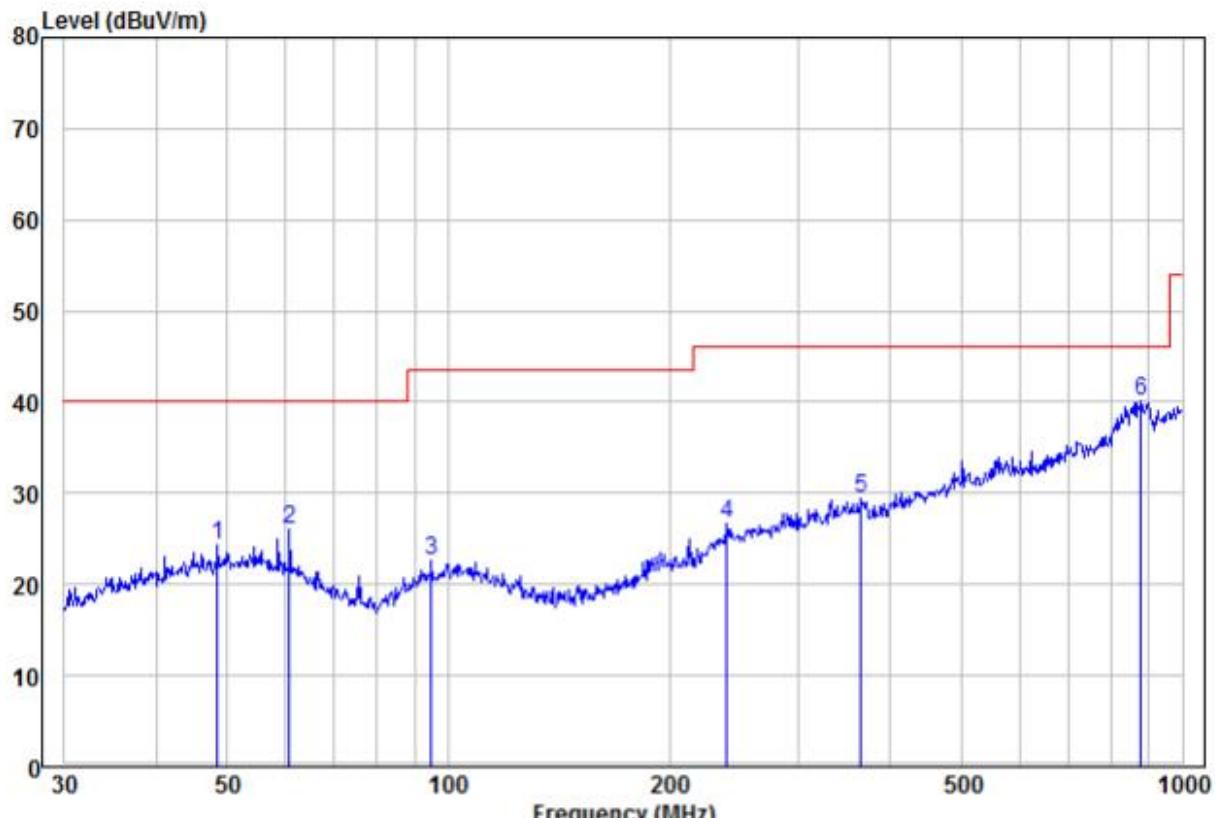

Read	Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase	APos	TPos
									MHz	dBuV
									dB	cm
										deg
1	48.50	10.76	13.52	24.28	40.00	-15.72	Peak	VERTICAL	100	339
2	60.70	13.43	12.67	26.10	40.00	-13.90	Peak	VERTICAL	100	245
3	94.76	10.42	12.15	22.57	43.50	-20.93	Peak	VERTICAL	100	142
4	239.99	10.67	15.90	26.57	46.00	-19.43	Peak	VERTICAL	100	79
5	365.54	10.11	19.37	29.48	46.00	-16.52	Peak	VERTICAL	100	250
6 pp	878.32	10.70	29.48	40.18	46.00	-5.82	Peak	VERTICAL	100	82

TEST REPORT NUMBER: (8525)078-0127

30MHz~1GHz (the worst case)		
Test mode:	Transmitting (Lowest channel)	Horizontal

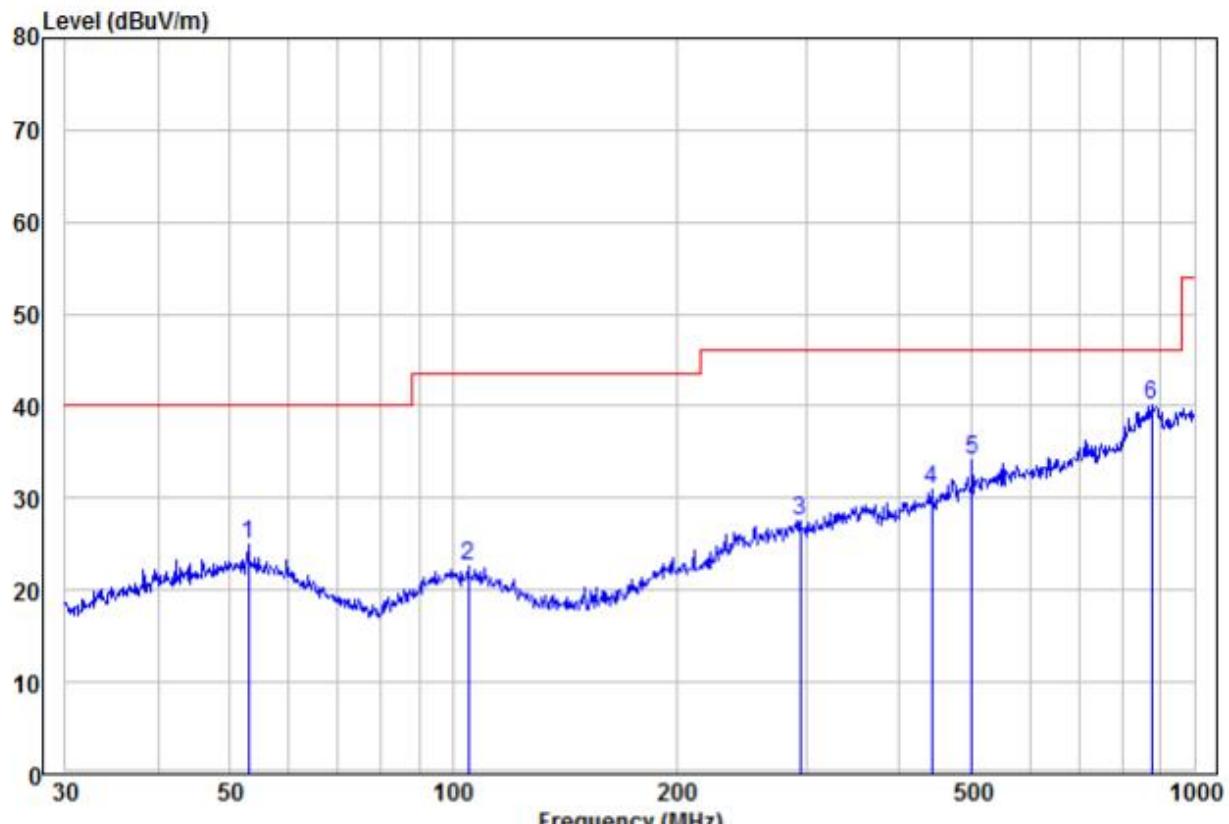

Freq	Read			Frequency (MHz)			Pol/Phase	APos	TPos	
	Freq	Level	Factor	Limit	Over	Line				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	deg	
1	52.95	11.24	13.80	25.04	40.00	-14.96	Peak	HORIZONTAL	100	199
2	104.90	9.70	12.86	22.56	43.50	-20.94	Peak	HORIZONTAL	100	233
3	294.11	9.97	17.60	27.57	46.00	-18.43	Peak	HORIZONTAL	100	272
4	441.74	10.84	20.09	30.93	46.00	-15.07	Peak	HORIZONTAL	100	205
5	501.18	12.26	21.84	34.10	46.00	-11.90	Peak	HORIZONTAL	100	356
6 pp	875.25	10.59	29.43	40.02	46.00	-5.98	Peak	HORIZONTAL	100	32

TEST REPORT NUMBER: (8525)078-0127

Above 1GHz									
Test mode:		Transmitting		Test channel:			Lowest		
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2390	58.89	-9.2	49.69	74	-24.31	Peak	H	1.5	234
2390	44.92	-9.2	35.72	54	-18.28	AVG	H	1.5	336
2400	59.96	-9.39	50.57	74	-23.43	Peak	H	1.5	334
2400	46.12	-9.39	36.73	54	-17.27	AVG	H	1.5	277
2405	100.95	-9.33	91.62	114	-22.38	peak	H	1.5	33
2405	96.53	-9.33	87.20	94	-6.80	AVG	H	1.5	113
4810	55.98	-4.28	51.70	74	-22.30	peak	H	1.5	148
4810	42.50	-4.28	38.22	54	-15.78	AVG	H	1.5	106
7215	52.04	1.13	53.17	74	-20.83	peak	H	1.5	313
7215	35.86	1.13	36.99	54	-17.01	AVG	H	1.5	93
2390	59.03	-9.2	49.83	74	-24.17	peak	V	1.5	17
2390	44.54	-9.2	35.34	54	-18.66	AVG	V	1.5	311
2400	59.69	-9.39	50.30	74	-23.70	peak	V	1.5	219
2400	46.01	-9.39	36.62	54	-17.38	AVG	V	1.5	44
2405	100.63	-9.33	91.30	114	-22.70	peak	V	1.5	8
2405	97.08	-9.33	87.75	94	-6.25	AVG	V	1.5	316
4810	54.76	-4.28	50.48	74	-23.52	peak	V	1.5	122
4810	43.18	-4.28	38.90	54	-15.10	AVG	V	1.5	214
7215	53.53	1.13	54.66	74	-19.34	peak	V	1.5	118
7215	38.45	1.13	39.58	54	-14.42	AVG	V	1.5	332

TEST REPORT NUMBER: (8525)078-0127

Test mode:		Transmitting		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emissio n Level (dB μ V/ m)	Limits (dB μ V/ m)	Over (dB)	Detector Type	Ant. Pol.	Antenna Height (m)	Table Angle (Degree)
2441	99.65	-9.37	90.28	114	-23.72	peak	H	1.5	180
2441	95.92	-9.37	86.55	94	-7.45	AVG	H	1.5	27
4882	57.31	-4.28	53.03	74	-20.97	peak	H	1.5	244
4882	42.36	-4.28	38.08	54	-15.92	AVG	H	1.5	311
7323	53.25	1.13	54.38	74	-19.62	peak	H	1.5	118
7323	36.74	1.13	37.87	54	-16.13	AVG	H	1.5	83
2441	95.95	-9.36	86.59	114	-27.41	peak	V	1.5	175
2441	93.37	-9.36	84.01	94	-9.99	AVG	V	1.5	163
4882	55.97	-4.28	51.69	74	-22.31	peak	V	1.5	192
4882	41.78	-4.28	37.50	54	-16.50	AVG	V	1.5	238
7323	52.05	1.13	53.18	74	-20.82	peak	V	1.5	356
7323	37.32	1.13	38.45	54	-15.55	AVG	V	1.5	111


TEST REPORT NUMBER: (8525)078-0127

Test mode:		Transmitting		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emissio n Level (dB μ V/ m)	Limits (dB μ V/ m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2478	99.53	-9.23	90.30	114	-23.70	peak	H	1.5	81
2478	97.82	-9.23	88.59	94	-5.41	AVG	H	1.5	25
2483.5	61.33	-9.2	52.13	74	-21.87	Peak	H	1.5	112
2483.5	46.18	-9.2	36.98	54	-17.02	AVG	H	1.5	176
4956	57.35	-4.28	53.07	74	-20.93	peak	H	1.5	105
4956	42.65	-4.28	38.37	54	-15.63	AVG	H	1.5	268
7434	51.70	1.13	52.83	74	-21.17	peak	H	1.5	231
7434	38.05	1.13	39.18	54	-14.82	AVG	H	1.5	348
2478	96.58	-9.23	87.35	114	-26.65	peak	V	1.5	307
2478	93.32	-9.23	84.09	94	-9.91	AVG	V	1.5	156
2483.5	60.00	-9.2	50.80	74	-23.20	peak	V	1.5	189
2483.5	43.81	-9.2	34.61	54	-19.39	AVG	V	1.5	320
4956	57.15	-4.28	52.87	74	-21.13	peak	V	1.5	146
4956	43.10	-4.28	38.82	54	-15.18	AVG	V	1.5	116
7434	50.95	1.13	52.08	74	-21.92	peak	V	1.5	207
7434	38.20	1.13	39.33	54	-14.67	AVG	V	1.5	178

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 8GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

TEST REPORT NUMBER: (8525)078-0127**4.3 20dB Bandwidth**

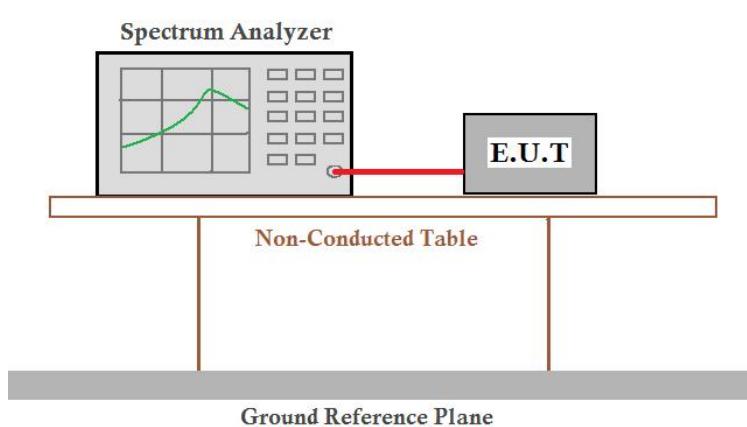Test Requirement:	47 CFR Part 15C Section 15.215(c)
Test Method:	ANSI C63.10:2013
Test Setup:	
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass


Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	3.567	Pass
Middle	2.500	Pass
Highest	1.173	Pass

TEST REPORT NUMBER: (8525)078-0127

Test plot as follows:


Test channel: Lowest

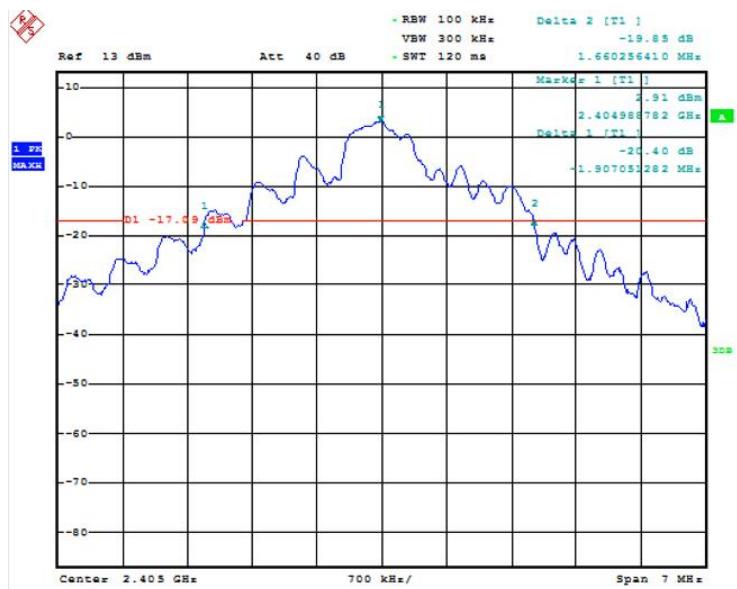


Date: 31.MAR.2025 15:55:57

TEST REPORT NUMBER: (8525)078-0127

Test channel:	Middle
---------------	--------

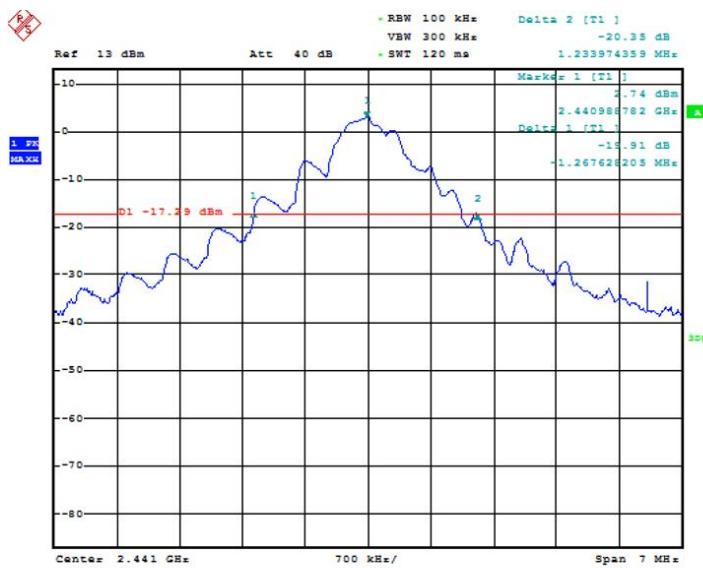

Test channel:	Highest
---------------	---------

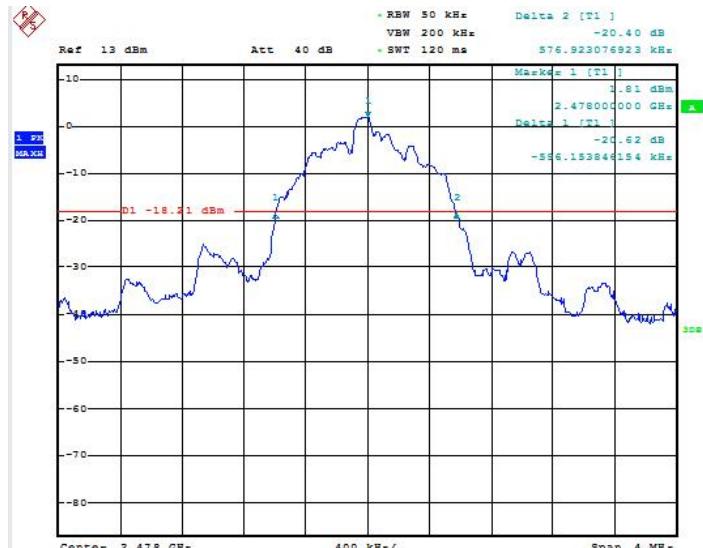

TEST REPORT NUMBER: (8525)078-0127

5 Photographs

Please refer to the photos Appendix A

5.1 EUT Constructional Details

Please refer to the photos Appendix B

*** END OF REPORT ***