



# FCC TEST REPORT

According to

## FCC CFR Title 47 Part 15 Subpart C

|              |                                                         |
|--------------|---------------------------------------------------------|
| Applicant    | : BQT Solutions ( Australia ) Pty Ltd.                  |
| Address      | : Unit 29,1 Talavera Road,North Ryde,NSW2113, Australia |
| Manufacturer | : BQT Solutions ( Australia ) Pty Ltd.                  |
| Address      | : Unit 29,1 Talavera Road,North Ryde,NSW2113, Australia |
| Equipment    | : Contactless Smart Card Reader with Optional keypad    |
| Trade Mark   | : BQT                                                   |
| Model No.    | : BT817-2, BT815M2B                                     |
| FCC ID       | : QVL-BT817-2                                           |

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology (Suzhou) Co., Ltd.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Rules and Regulations Part 15. The test report has been issued separately.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



## Table of Contents

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>1. Report of Measurements and Examinations.....</b>              | <b>5</b>  |
| <b>2. Test Configuration of Equipment under Test.....</b>           | <b>6</b>  |
| 2.1. Feature of Equipment under Test .....                          | 6         |
| 2.2. Carrier Frequency of Channels .....                            | 6         |
| 2.3. Test Mode & Test Software .....                                | 7         |
| 2.4. Description of Test System .....                               | 7         |
| 2.5. General Information of Test .....                              | 7         |
| 2.6. Measurement Uncertainty .....                                  | 8         |
| <b>3. Antenna Requirements .....</b>                                | <b>9</b>  |
| 3.1. Standard Applicable .....                                      | 9         |
| 3.2. Limit .....                                                    | 9         |
| 3.3. Antenna Construction .....                                     | 9         |
| <b>4. Test of Conducted Emission .....</b>                          | <b>10</b> |
| 4.1. Test Limit.....                                                | 10        |
| 4.2. Test Procedures.....                                           | 10        |
| 4.3. Typical Test Setup.....                                        | 11        |
| 4.4. Measurement Equipment .....                                    | 11        |
| 4.5. Test Result and Data .....                                     | 11        |
| <b>5. Out-of-band Emission (15.225 (d), 15.209) Test Limit.....</b> | <b>12</b> |
| 5.1. Test Procedures.....                                           | 13        |
| 5.2. Typical Test Setup.....                                        | 14        |
| 5.3. Measurement Equipment .....                                    | 14        |
| 5.4. Test Result and Data .....                                     | 15        |
| <b>6. In-band Emission (15.225 (a)).....</b>                        | <b>18</b> |
| 6.1. Minimum Standard.....                                          | 18        |
| 6.2. Measurement Procedure .....                                    | 18        |
| 6.3. Test Result.....                                               | 19        |
| <b>7. In-band Emission (15.225 (b)(c)) .....</b>                    | <b>20</b> |
| 7.1. Regulation.....                                                | 20        |
| 7.2. Test Result.....                                               | 20        |
| <b>8. Frequency tolerance (15.225 (e)).....</b>                     | <b>22</b> |
| 8.1. Regulation.....                                                | 22        |
| 8.2. Test Result.....                                               | 22        |

[illegible]



# FCC TEST REPORT

according to

## FCC CFR Title 47 Part 15 Subpart C

Applicant : BQT Solutions ( Australia ) Pty Ltd.

Address : Unit 29,1 Talavera Road,North Ryde,NSW2113, Australia

Manufacturer : BQT Solutions ( Australia ) Pty Ltd.

Address : Unit 29,1 Talavera Road,North Ryde,NSW2113, Australia

Equipment : Contactless Smart Card Reader with Optional keypad

Trade Mark : BQT

Model No. BT817-2, BT815M2B

FCC ID : QVL-BT817-2

### I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2009** and the energy emitted by this equipment was **passed CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Dec.07,2014 at **Cerpass Technology (Suzhou) Co., Ltd.**

Signature

Miro Chueh/ Technical director



## 1. Report of Measurements and Examinations

| FCC CFR Title 47 Part 15 Subpart C |                               |                |        |
|------------------------------------|-------------------------------|----------------|--------|
| ANSI C63.4: 2009                   |                               |                |        |
| Clause                             | Test Parameter                | Test Performed | Remark |
| 15.203                             | . Antenna Requirement         | YES            | PASS   |
| 15.225 (a)                         | In-band Emission              | YES            | PASS   |
| 15.225 (b)                         | In-band Emission              | YES            | PASS   |
| 15.225 ©                           | In-band Emission              | YES            | PASS   |
| 15.225 (d)<br>15.209               | Out-of –band Emission         | YES            | PASS   |
| 15.225 (e)                         | Frequency Stability Tolerance | YES            | PASS   |
| 15.207                             | Conducted Emissions           | YES            | PASS   |



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| Equipment         | Contactless Smart Card Reader with Optional keypad                  |
| Model No.         | BT817-2, BT815M2B                                                   |
| Trade Mark        | BQT                                                                 |
| Frequency         | 13.56MHz                                                            |
| Number of Channel | 1 channel                                                           |
| Modulation type   | ASK                                                                 |
| Transmit Power    | 73.55dBuV/m(3M)                                                     |
| Antenna type      | N/A                                                                 |
| Power Supply      | 12V DC                                                              |
| Model Differences | The model BT817with keypad function and the model BT815M2B without. |

### 2.2. Carrier Frequency of Channels

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 01      | 13.56          | ---     | ---            |
| ---     | ---            | ---     | ---            |
| ---     | ---            | ---     | ---            |



### 2.3. Test Mode & Test Software

- A. Test Mode & Test Software
- B. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- C. The complete test system included EUT for RF test.
- D. The EUT was executed to keep transmitting and receiving data via Bluetooth.
- E. The following test mode was performed for conduction and radiation test:

### 2.4. Description of Test System

| No | Device          | Manufacturer | Model No. | FCC ID | Series No. | Data Cable | Power Cord |
|----|-----------------|--------------|-----------|--------|------------|------------|------------|
| 1  | DC Power Supply | TOPWARD      | 3303D     | N/A    | N/A        | Unshielded | Ushielded  |

### 2.5. General Information of Test

|                            |                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site:                 | Cerpass Technology (Suzhou) Co., Ltd.                                                                                                                                 |
| Performand Location :      | No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China                                                                                                  |
| NVLAP LAB Code :           | 200814-0                                                                                                                                                              |
| FCC Registration Number :  | 916572, 331395                                                                                                                                                        |
| IC Registration Number :   | 7290A-1, 7290A-2                                                                                                                                                      |
| VCCI Registration Number : | T-343 for Telecommunication Test<br>C-2919 for Conducted emission test<br>R-2670 for Radiated emission test below 1GHz<br>G-227 for Radiated emission test above 1GHz |



## 2.6. Measurement Uncertainty

| Measurement Item          | Measurement Frequency | Polarization | Uncertainty   |
|---------------------------|-----------------------|--------------|---------------|
| Conducted Emission        | 9 kHz ~ 30 MHz        | LINE/NEUTRAL | $\pm 2.71$ dB |
| Radiated Emission         | 30 MHz ~ 25GHz        | Vertical     | $\pm 4.11$ dB |
|                           |                       | Horizontal   | $\pm 4.10$ dB |
| Occupied Bandwidth        | ---                   | ---          | $\pm 7500$ Hz |
| Maximum Peak Output Power | ---                   | ---          | $\pm 1.4$ dB  |
| Band Edges                | ---                   | ---          | $\pm 2.2$ dB  |
| Power Spectral Density    | ---                   | ---          | $\pm 2.2$ dB  |





### 3. Antenna Requirements

#### 3.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

with the device.

#### 3.2. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### 3.3. Antenna Construction

N/A



## 4. Test of Conducted Emission

### 4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

| Frequency<br>(MHz) | Quasi Peak<br>(dB $\mu$ V) | Average<br>(dB $\mu$ V) |
|--------------------|----------------------------|-------------------------|
| 0.15 – 0.5         | 66-56*                     | 56-46*                  |
| 0.5 – 5.0          | 56                         | 46                      |
| 5.0 – 30.0         | 60                         | 50                      |

\*Decreases with the logarithm of the frequency.

### 4.2. Test Procedures

The EUT was setup according to ANSI C63.4, 2009 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The diagram illustrates the experimental setup. A table is used to hold various components. On the left, a LISN (Line Impedance Stabilization Network) is connected to the power line. A power supply unit (EUT) is connected to the power line and the LISN. A computer is connected to the EUT. A power meter is connected to the power line. A LISN is also connected to the power line. Dimensions are indicated: 10cm for the distance between the EUT and the power meter, 80cm for the height of the table, 40cm for the height of the LISN, and 40cm for the distance between the LISN and the power meter.

| Instrument/Ancillary                | Manufacturer | Model No.   | Serial No. | Calibration Date | Valid Date. |
|-------------------------------------|--------------|-------------|------------|------------------|-------------|
| Test Receiver                       | R&S          | ESCI        | 100564     | 2014.03.01       | 2015.02.28  |
| LISN                                | SCHWARZBECK  | NSLK 8127   | 8127748    | 2014.10.13       | 2015.10.12  |
| LISN                                | SCHWARZBECK  | NSLK 8127   | 8127749    | 2014.10.13       | 2015.10.12  |
| Pulse Limiter with 10dB Attenuation | SCHWARZBECK  | VTSD 9561-F | 9561-F106  | 2014.10.13       | 2015.10.12  |
| Temperature/ Humidity Meter         | mingle       | ETH529      | N/A        | 2014.03.07       | 2015. 03.06 |

Not Applicable since the EUT supplied by DC power.



## 5. Out-of-band Emission (15.225 (d), 15.209) Test Limit

15.225 (d) The Field Strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30-88           | 100*                               | 3                        |
| 88-216          | 150*                               | 3                        |
| 216-960         | 200*                               | 3                        |
| Above 960       | 500                                | 3                        |

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.



## 5.1. Test Procedures

The spurious emissions from the EuT will be measured on an 10m Anechoic chamber in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EuT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB $\mu$ V/m, is arrived at by taking the reading from the EMI receiver (Level dB $\mu$ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.


The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the BILOG antenna.

To obtain the final measurement data, the EUT was arranged on a turntable situated on a 10m chamber. The EUT was tested at a distance 3 meters.

Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.



## 5.2. Typical Test Setup

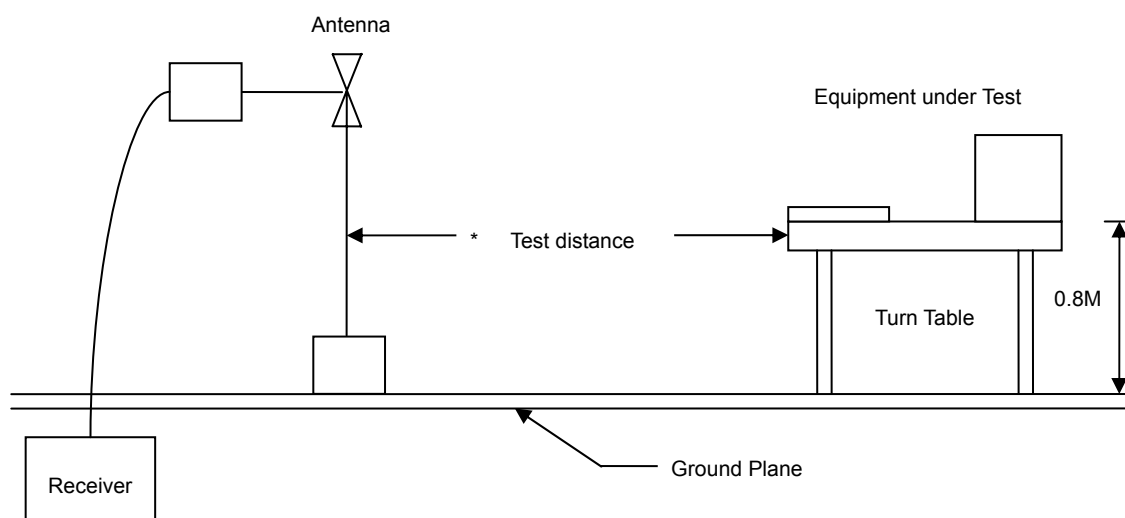

## 5.3. Measurement Equipment

| Instrument/Ancillary        | Manufacturer  | Model No. | Serial No. | Calibration Date | Valid Date. |
|-----------------------------|---------------|-----------|------------|------------------|-------------|
| EMI Test Receiver           | R&S           | ESCI      | 100563     | 2014.02.10       | 2015.02.09  |
| H64 Preamplifier            | HP            | 8447F     | 3113A05582 | 2014.03.24       | 2015.03.23  |
| Preamplifier                | Agilent       | 8449B     | 3008A02342 | 2014.03.24       | 2015.03.23  |
| Bilog Antenna               | Sunol Science | JB1       | A072414-2  | 2014.08.05       | 2015.08.04  |
| Broad-Band Horn Antenna     | Schwarzbeck   | BBHA9120D | 9120D-619  | 2014.05.24       | 2015.05.23  |
| Broad-Band Horn Antenna     | Schwarzbeck   | BBHA9170  | 9170-348   | 2014.11.04       | 2015.11.03  |
| Spectrum Analyzer           | R&S           | FSP40     | 100324     | 2014.03.23       | 2015.03.24  |
| Loop Antenna                | R&S           | HFH2-Z2   | 100150     | 2014.05.10       | 2015.05.09  |
| Temperature/ Humidity Meter | Zhicheng      | ZC1-11    | CEP-TH-002 | 2014.03.31       | 2015.03.30  |



#### 5.4. Test Result and Data


##### 9K-30MHz

All spurious emissions (9kHz-30MHz) are below fundamental emissions field strength and the levels exceed the level of 20 dB below the applicable limit.



## 30M-1000MHz

|                                                           |                    |
|-----------------------------------------------------------|--------------------|
| Engineer :Matt                                            |                    |
| Site : EMC Lab AC 102                                     | Time : 2014-12-07  |
| Limit : FCC_CLASS_B_03M_QP                                | Margin : 6         |
| EUT : Biometric Contactless Smart Card Reader with keypad | Probe : HORIZONTAL |
| Power : AC 120V/60Hz                                      | Note : Normal Link |

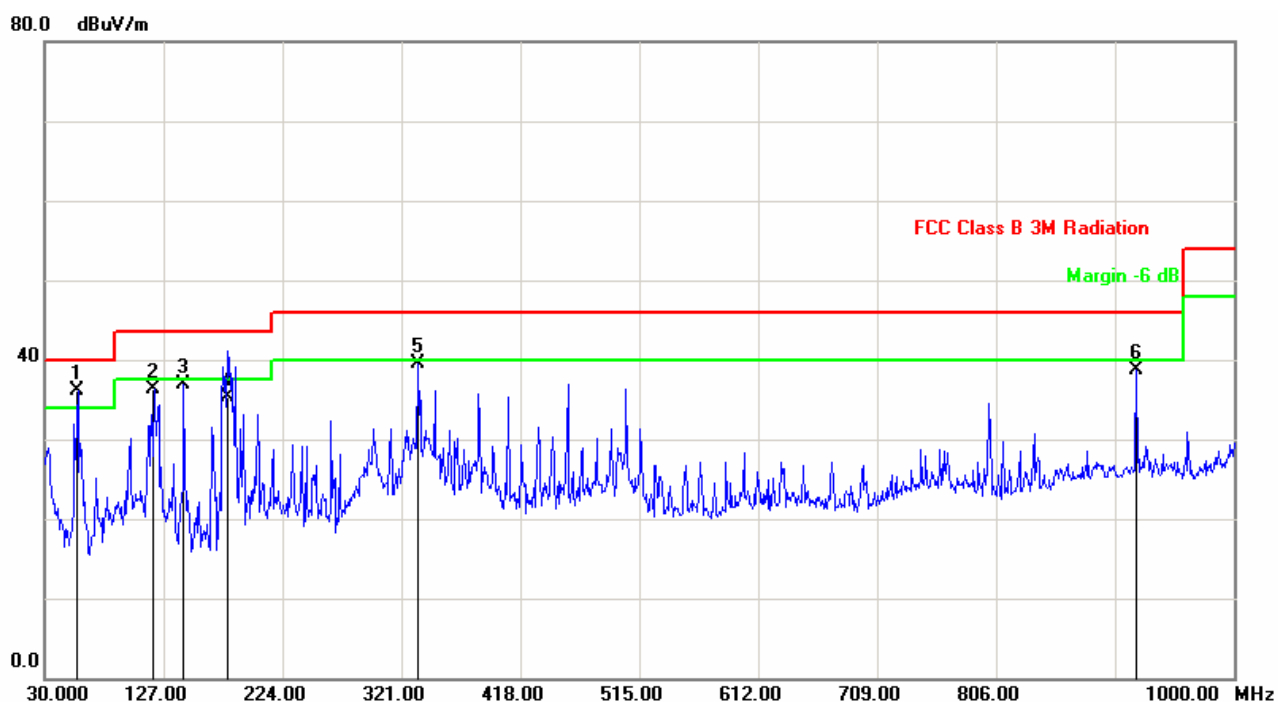


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 57.1599         | -15.53        | 51.64          | 36.11          | 40.00          | -3.89       | QP   | 200         | 290           |
| 2   | 119.2399        | -8.17         | 44.46          | 36.29          | 43.50          | -7.21       | QP   | 300         | 311           |
| 3   | 143.4900        | -10.80        | 47.66          | 36.86          | 43.50          | -6.64       | QP   | 100         | 0             |
| 4   | 179.3799        | -11.75        | 47.10          | 35.35          | 43.50          | -8.15       | QP   | 400         | 260           |
| 5   | 334.5799        | -4.19         | 43.73          | 39.54          | 46.00          | -6.46       | QP   | 100         | 275           |
| 6   | 920.4600        | 3.76          | 34.94          | 38.70          | 46.00          | -7.30       | QP   | 200         | 247           |

Note: Measurement Level = Reading Level + Correct Factor





|                                                           |                    |
|-----------------------------------------------------------|--------------------|
| Engineer :Matt                                            |                    |
| Site : EMC Lab AC 102                                     | Time : 2014-12-07  |
| Limit : FCC_CLASS_B_03M_QP                                | Margin : 6         |
| EUT : Biometric Contactless Smart Card Reader with keypad | Probe : VERTICAL   |
| Power : AC 120V/60Hz                                      | Note : Normal Link |

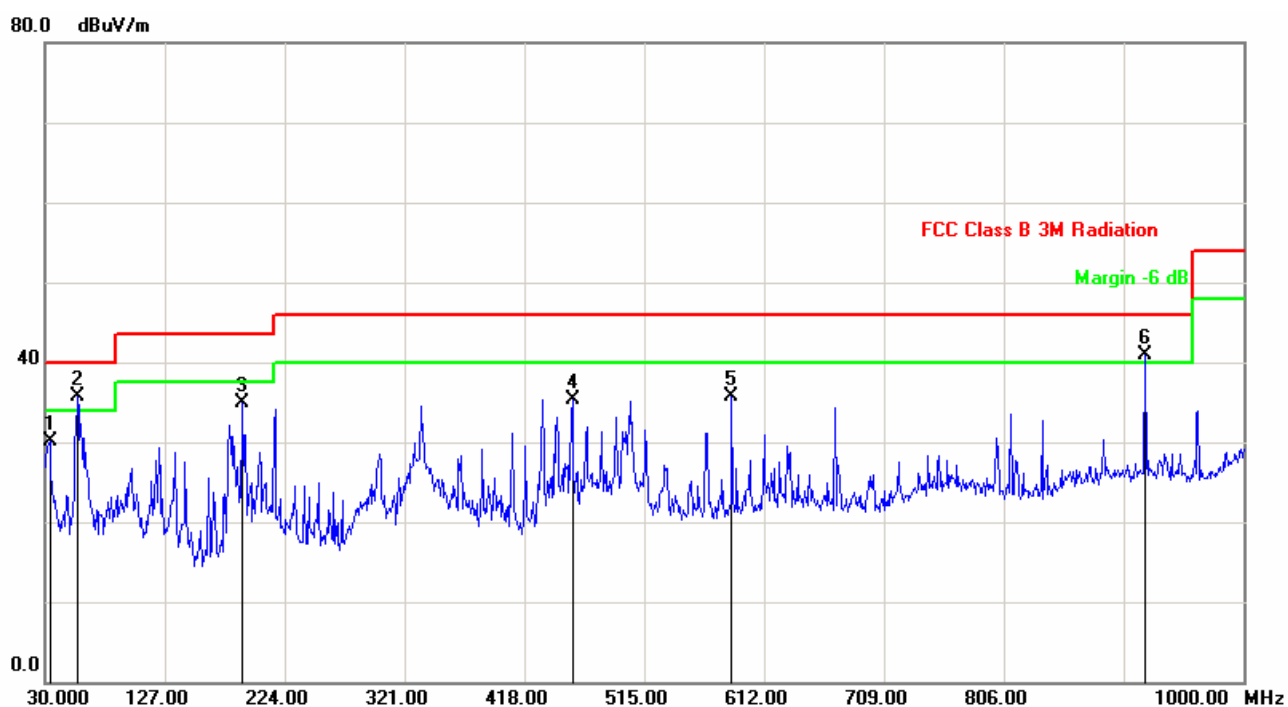

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 33.8800         | -5.41         | 35.58          | 30.17          | 40.00          | -9.83       | QP   | 100         | 288           |
| 2   | 56.1900         | -15.44        | 51.23          | 35.79          | 40.00          | -4.21       | QP   | 100         | 9             |
| 3   | 190.0500        | -10.28        | 45.23          | 34.95          | 43.50          | -8.55       | QP   | 100         | 47            |
| 4   | 456.8000        | -3.00         | 38.39          | 35.39          | 46.00          | -10.61      | QP   | 100         | 350           |
| 5   | 585.8100        | -2.42         | 38.10          | 35.68          | 46.00          | -10.32      | QP   | 100         | 0             |
| 6   | 920.4600        | 3.76          | 37.07          | 40.83          | 46.00          | -5.17       | QP   | 100         | 239           |

Note: Measurement Level = Reading Level + Correct Factor



## 6. In-band Emission (15.225 (a))

### 6.1. Minimum Standard

15.225 (a) The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

### 6.2. Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

Frequency : From 30MHz to 1GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector. The radiated emission measurements were made with the following detector function of the test receiver (below 1GHz).

| Freq          | 9-90kHz | 90-110kHz | 150-490kHz | 490kHz-30MHz | 490kHz-30MHz |
|---------------|---------|-----------|------------|--------------|--------------|
| Detector type | PK/AV   | QP        | PK/AV      | QP           | QP           |
| IF bandwidth  | 200Hz   | 200Hz     | 9kHz       | 9kHz         | 120kHz       |

**Note:** Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])




### 6.3. Test Result

| Frequency             | Reading (dBuV) | Correction Factor | field strength dBuV/m at 3 m |
|-----------------------|----------------|-------------------|------------------------------|
| 13.56 MHz             | 51.23          | 22.32             | 73.55                        |
| Maximum Level(dBuV/m) |                |                   | 73.55                        |
| Limit(dBuV/m) at 3m   |                |                   | 124 dBuV/m                   |
| margin                |                |                   | 50.45                        |

Note: Field strength limit was calculated with 40dB/dec.

### Test Plot

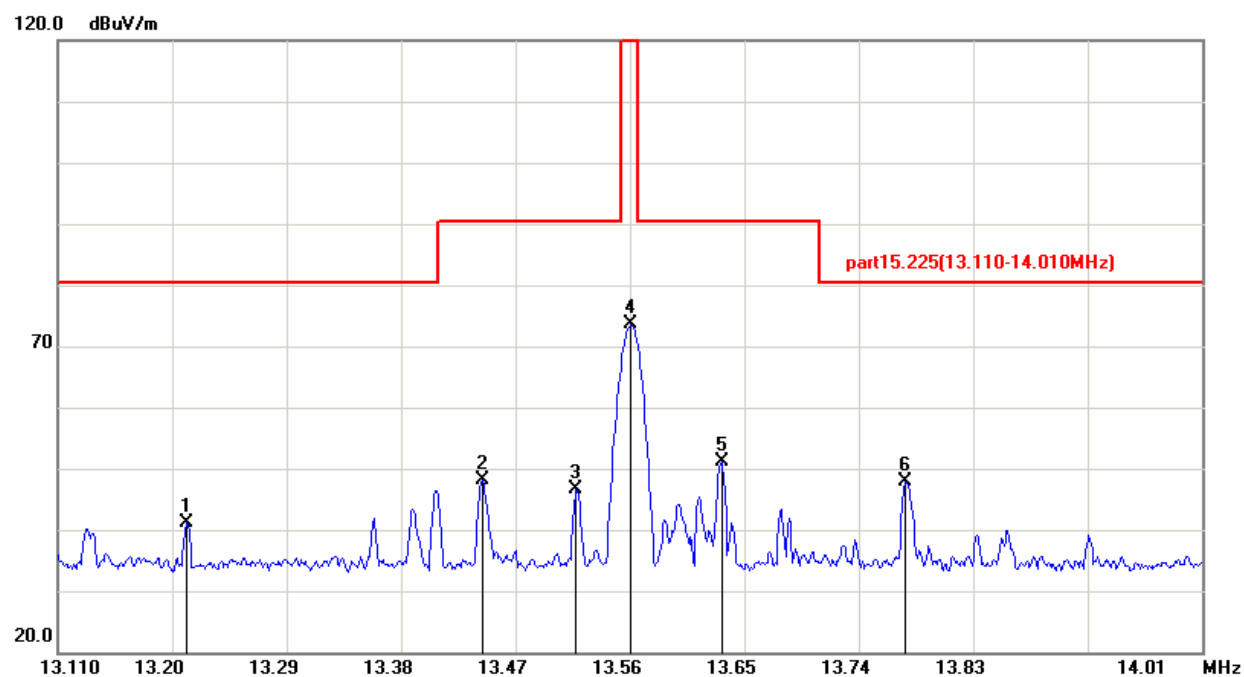



## 7. In-band Emission (15.225 (b)(c))

### 7.1. Regulation

15.225 (b) With in the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.


15.225 (c) With in the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### 7.2. Test Result

| Freq. | Ant.Pol. | Reading | Correct | Measure  | Limit 3m | Safe Margin | Detector |
|-------|----------|---------|---------|----------|----------|-------------|----------|
| (MHz) | H/V      | Level   | Factor  | Level    | (dBuV/m) | (dB)        | Mode     |
|       |          | (dBuV)  | (dB)    | (dBuV/m) |          |             | (PK/QP)  |
| 13.21 | V        | 18.72   | 22.34   | 41.06    | 80.5     | -39.44      | Peak     |
|       |          |         |         |          |          |             |          |
| 13.44 | V        | 25.76   | 22.32   | 48.08    | 90.5     | -42.42      | Peak     |
|       |          |         |         |          |          |             |          |
| 13.52 | V        | 24.25   | 22.32   | 46.57    | 90.5     | -43.93      | Peak     |
|       |          |         |         |          |          |             |          |
| 13.63 | V        | 28.84   | 22.31   | 51.15    | 90.5     | -39.35      | Peak     |
|       |          |         |         |          |          |             |          |
| 13.78 | V        | 25.28   | 22.3    | 47.88    | 80.5     | -32.62      | Peak     |



## Test Plot

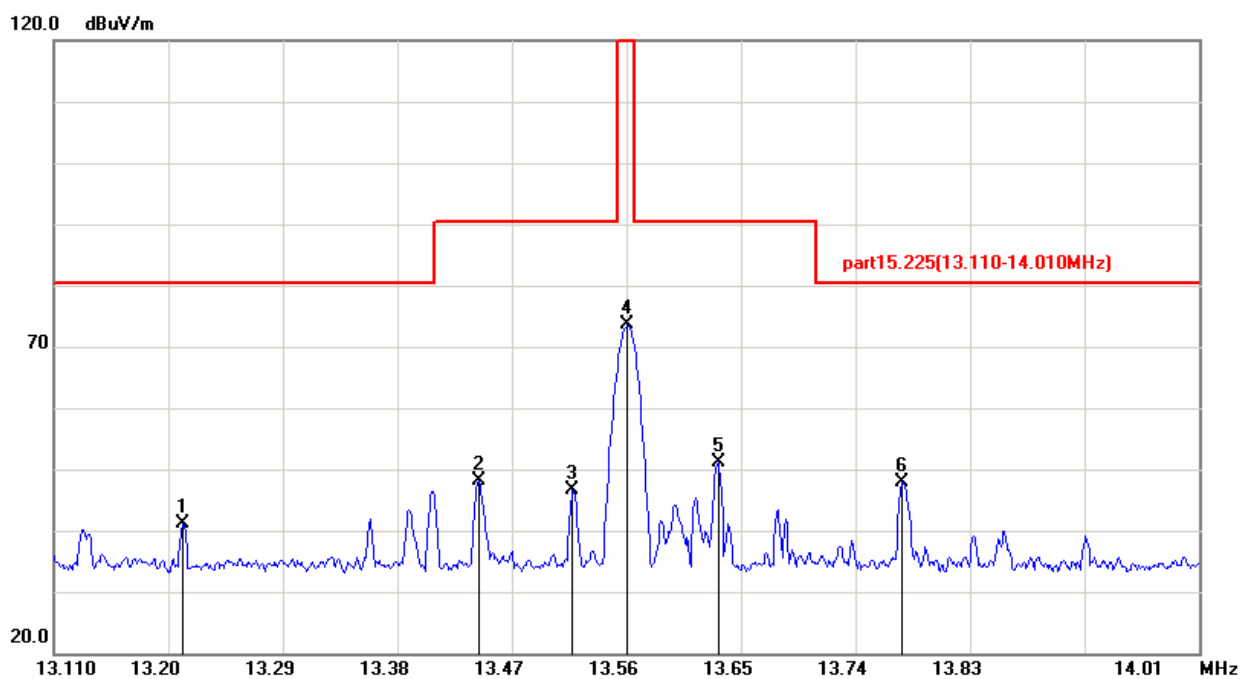



## 8. Frequency tolerance (15.225 (e))

### 8.1. Regulation

15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 8.2. Test Result

| VOLTAGE<br>(%) | POWER<br>(V) | TEMP<br>(°C) | FREQ<br>(Hz) | Deviation<br>(%) | Limit<br>(%) |
|----------------|--------------|--------------|--------------|------------------|--------------|
| 100            | 12           | 20           | 13560547     | 0.00403%         | $\pm 0.01\%$ |
|                |              | -20          | 13560558     | 0.00412%         | $\pm 0.01\%$ |
|                |              | -10          | 13560589     | 0.00434%         | $\pm 0.01\%$ |
|                |              | 0            | 13560554     | 0.00409%         | $\pm 0.01\%$ |
|                |              | 10           | 13560625     | 0.00461%         | $\pm 0.01\%$ |
|                |              | 20           | 13560745     | 0.00549%         | $\pm 0.01\%$ |
|                |              | 25           | 13560620     | 0.00457%         | $\pm 0.01\%$ |
|                |              | 30           | 13560605     | 0.00446%         | $\pm 0.01\%$ |
|                |              | 40           | 13560589     | 0.00434%         | $\pm 0.01\%$ |
|                |              | 50           | 13560548     | 0.00404%         | $\pm 0.01\%$ |
| 85             | 10.2         | 20           | 13560542     | 0.00400%         | $\pm 0.01\%$ |
| 115            | 13.8         | 20           | 13560545     | 0.00402%         | $\pm 0.01\%$ |