

GSM 850 Test Report for RH-68

Test Report no.:	DTX12720-EN	Date of Report:	04-11-2004
Number of pages:	18	Customer's Contact person:	Robert Binder
		Responsible Test engineer:	Ruben Hansen
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaj DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01 FCC Reg. # 99059, June 2003 IC File # 4820, January 2004 IC File # 4820-1, February 2004	Client:	Nokia Corporation Arco Tower Shimomeguro 1-8-1 Meguro-ku TOKYO 153-0064 JAPAN Tel. +81 3 5759 7001 Fax. +81 3 5740 6858
Tested devices/ accessories:	Phone; RH-68, Battery; BL-5C, MMC card; MU-1		
Supplement reports:			
Testing has been carried out in accordance with:	The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 22 and IC standard RSS-132.		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Copenhagen.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signatures for the contents:	04-11-2004 		

Allan Franch Henriksen
Test engineer

CONTENTS

1. Summary of test results.....	4
2. EUT Information.....	4
2.1. EUT description.....	4
3. EUT Test Setup	4
4. Applicable Standards	5
5. 99% occupied bandwidth.....	6
5.1. Test setup	6
5.2. EUT operation mode	6
5.3. Results	6
5.4. Screen shot.....	7
6. Radiated Bandedge Compliance.....	8
6.1. Test setup	8
6.2. Test method	8
6.3. EUT operation mode	9
6.4. Limit.....	9
6.5. Results	9
6.6. Screen shots	10
7. Spurious radiated emission.....	12
7.1. Test setup	12
7.2. Test method	12
7.3. EUT operation mode	13
7.4. Limit.....	13
7.5. Results	13
8. Frequency stability, temperature variation	14
8.1. Test setup	14
8.2. EUT operation mode	14
8.3. Limit.....	14
8.4. Test method	14
8.5. Results	15
9. Frequency stability, voltage variation.....	16
9.1. Test setup	16
9.2. EUT operation mode	16
9.3. Limit.....	16
9.4. Test method	16
9.5. Results	16

10.	Test equipment.....	17
10.1.	Conducted measurements	17
10.2.	Radiated measurements	17

1. Summary of test results

Section in CFR 47	Section in RSS-132		Result
§2.1046 (a), 22.913 (a)	6.4	Conducted RF output power	NA
§22.913 (a)	6.4	Radiated RF output power	-
§2.1049 (h)	4.2	99% occupied bandwidth	X
§22.917 (e)	4.5	Bandedge compliance	PASS
§22.917 (e), §2.1051	4.5	Spurious emissions at antenna terminals	NA
§22.917 (e), §2.1053	4.5	Spurious radiated emission	PASS
§2.1055 (a)(1)(b)	6.3	Frequency stability, temperature variation	PASS
§2.1055 (d)(1)(2)	6.3	Frequency stability, voltage variation	PASS

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

NA Not Applicable

2. EUT Information

Product	Type	SN	HW	MV	SW	DUT
Phone	RH-68	004400/51/174201/5	2004		3.0431. 0	234484
Battery	BL-5C	0670400363563 L075520101789				234486
Phone	RH-68	004400/51/174206/4	2004		3.0431. 0	234511
Phone	RH-68	004400/51/174051/4	2004		3.0431. 0	234639
Battery	BL-5C	067040063807334632				233246
64 Mbyte MMC card	MU-1	MC12U64DACA-0QA00 S7LC611AA403				233534

2.1. EUT description

The EUT is a triple band (850MHz/1800MHz/1900MHz) GSM mobile phone with Bluetooth.
The EUT was not modified during the tests.

3. EUT Test Setup

For each test the EUT was exercised to find the worst case of operation modes and device configuration.

The test setup photographs are in Appendix A

4. Applicable Standards


The tests were performed in guidance of CFR 47 part 22, part 2, ANSI/TIA/EIA-603-A and RSS-132. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

5. 99% occupied bandwidth

EUT	RH-68 dut 234484		
Accessories	BL-5C dut 234486		
Temp, Humidity, Air Pressure	21.4 °C	48.0 RH%	1016.2 mbar
Date of measurement	8/24/2004		
FCC rule part	§2.1049 (h)		
RSS-133 section	4.2		
Measured by	Jan Engelbrechtsen		

5.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

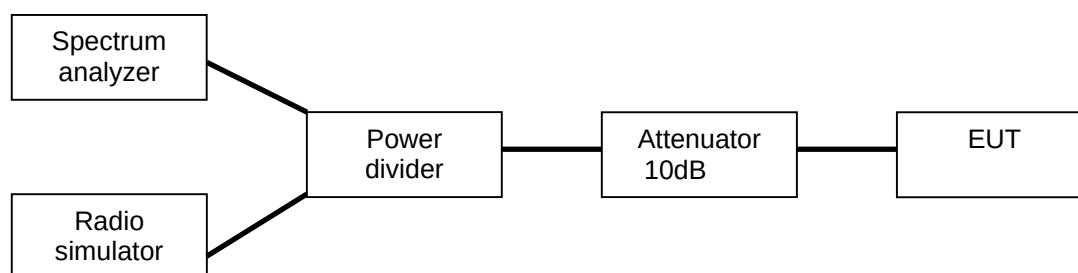

5.2. EUT operation mode


EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 Data transmission
EUT channel	190
EUT TX power level	5 (Max.)

5.3. Results

The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.

EUT Channel	99% occupied bandwidth [kHz]
190	241.5

5.4. Screen shot

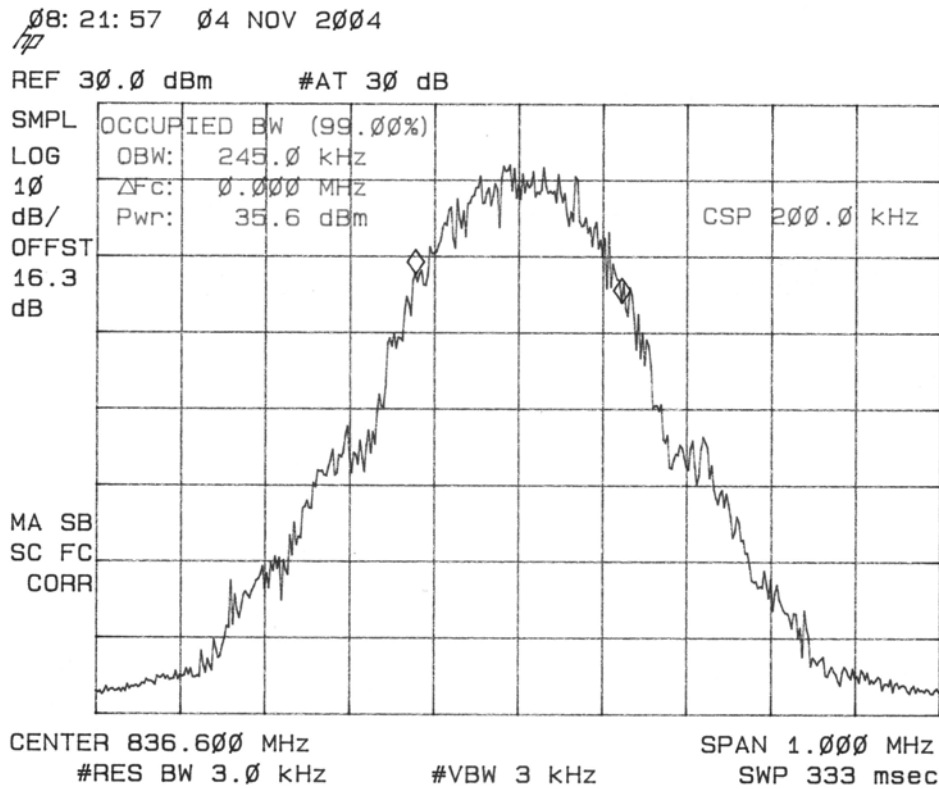

RBW: 3 KHz, VBW: 3 KHz


Picture 4. 99% occupied bandwidth, channel 190

6. Radiated Bandedge Compliance

EUT	RH-68 dut#234639		
Accessories	BL-5C dut#233246, MU-1 dut#233534		
Temp, Humidity, Air Pressure	20.5°C	41.5RH%	1018mbar
Date of measurement	10/9/2004		
FCC rule part	§22.917 (e)		
RSS-132 section	4.5		
Measured by	Jesper Nielsen		
Result	Passed		

6.1. Test setup

The EUT was set on a non-conductive turntable in a semi anechoic chamber. In the corner of the chamber there was a communication antenna, which was connected to the BS simulator located outside the chamber. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

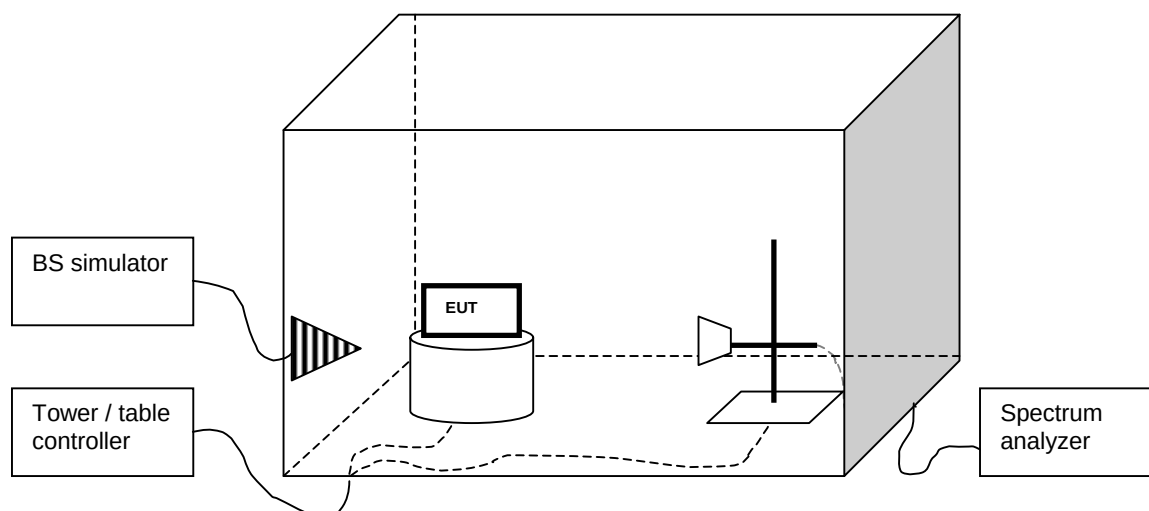

6.2. Test method

- The EUT and antenna was adjusted to the position/polarity that created the maximum radiated power.
- The maximum radiated power was used as an calibration offset for the spectrum analyzer.
- A screendump of the measurement with a marker set to the highest peak outside the band edge was recorded.

6.3. EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 Data transmission
EUT channel	See section 7.4
EUT TX power level	5 (Max.)

6.4. Limit


Frequency [MHz]	Level [dBm]
<824 or 849<	-13

6.5. Results

The line in the screen shots is the -13dBm limit line. The results were corrected with measurement path loss set as "offset" in the spectrum analyzer.


EUT Channel	Level [dBm]
128	-13.16
251	-15.37

6.6. Screen shots

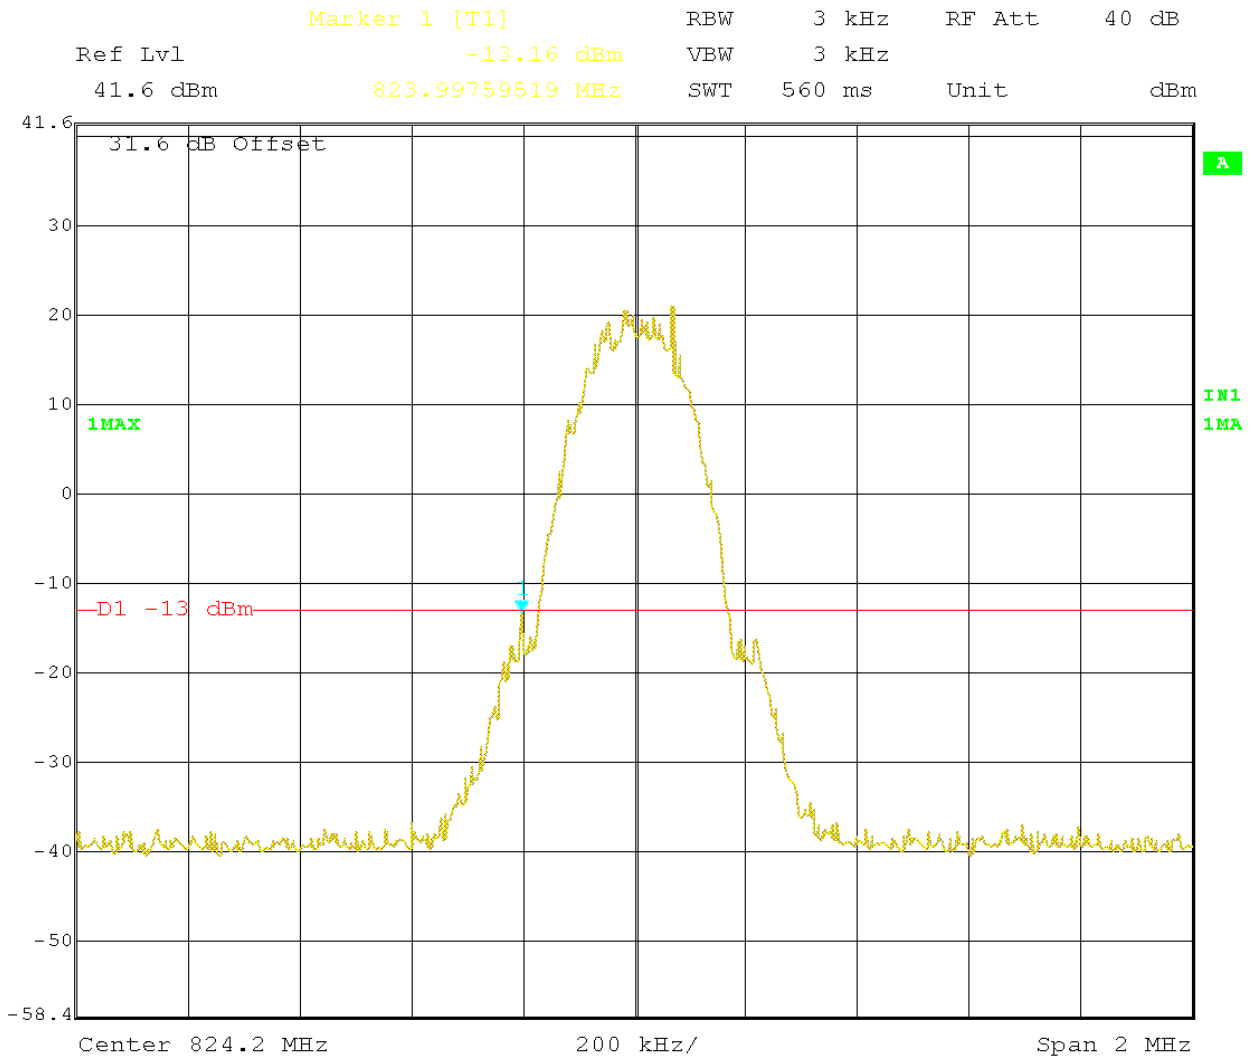

Date: 8.OCT.2004 18:40:54

Picture 5. Lower bandedge, channel 128 RBw 3KHz, VBw 3KHz

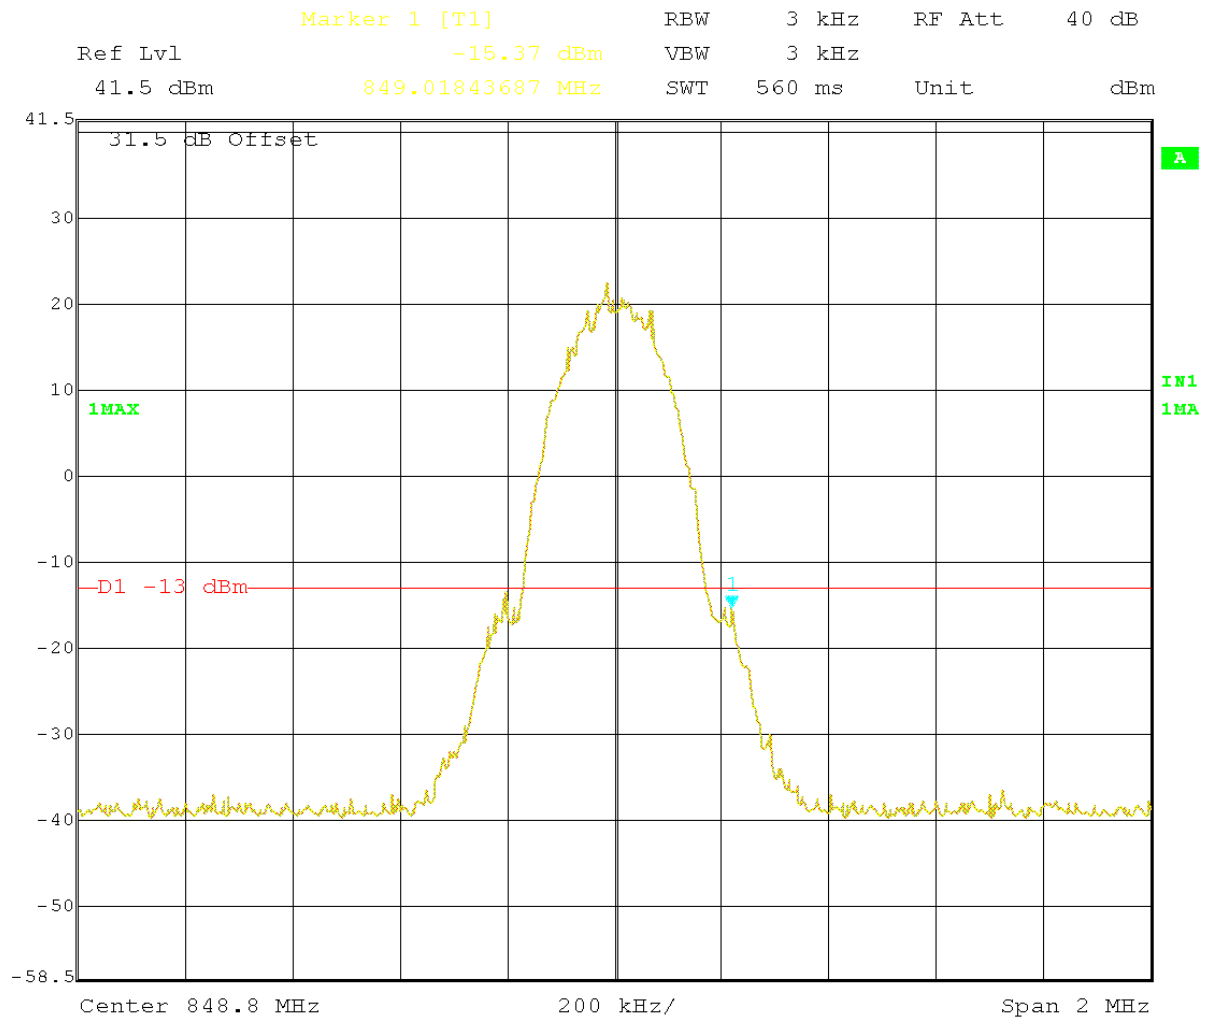

Date: 8.OCT.2004 18:26:57


Picture 6. Upper bandedge, channel 251 RBw 3KHz VBw 3KHz

7. Spurious radiated emission

EUT	RH-68 dut#234511		
Accessories	BL-5C dut#233246, MU-1 dut#233534		
Temp, Humidity, Air Pressure	20.5°C	41.0RH%	1031mbar
Date of measurement	10/12/2004		
FCC rule part	§22.917 (e), §2.1053		
RSS-133 section	4.5		
Measured by	Jesper Nielsen		
Result	Passed		

7.1. Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done manually.

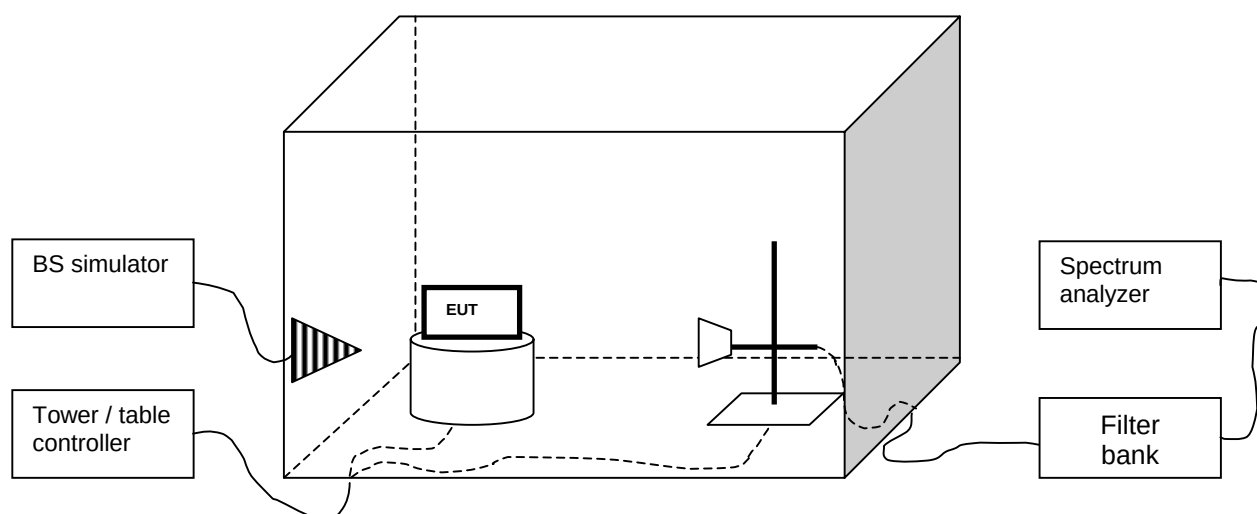

7.2. Test method

- The emissions were searched and maximized by moving the turn table and measuring antenna and manipulating the EUT.
- All suspicious frequencies with emission levels were recorded.
- The EUT was replaced with a substituting antenna.
- For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported.

7.3. EUT operation mode

	GSM
EUT operation mode	TX on, 1 time slot transmission, GSM/GPRS
EUT channel	190
EUT TX power level	5 (Max.)

7.4. Limit

Frequency [MHz]	Level [dBm]
30 – 19100	-13

7.5. Results

The formula below was used to calculate the ERP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were documented only at the transmitter's mid-channel harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBi]}$$

where the variables are as follows:

$P_{Measured} [dBm]$	Measured emission level (from step b in 7.2)
$P_{Subst_TX} [dBm]$	Signal generator power (from step d in 7.2) fed to the substituting antenna
$L_{Cable} [dB]$	Loss of the cable between antenna and signal generator (from step d in 7.2)
$G_{Antenna} [dBi]$	Gain of the substitutive antenna over isotropic radiator

Emission levels, channel 190, GMSK


Frequency [MHz]	$P_{Measured} [dBm]$	$P_{Subst_TX} [dBm]$	$L_{Cable} [dB]$	$G_{Antenna} [dBi]$	$P_{Emission} [dBm]$
1673.2	-69.47	-33.98	5.81	12.4	-27.39
2509.8	-67.60	-30.94	7.11	14.1	-23.95

8. Frequency stability, temperature variation

EUT	RH-68 dut 234484		
Accessories	BL-5Cdut 234486		
Temp, Humidity, Air Pressure	21.0 °C	59.5 RH%	1007.8 mbar
Date of measurement	8/30/2004		
FCC rule part	§2.1055 (a)(1)(b)		
RSS-132 section	6.3		
Measured by	Jan Engelbrechtsen		
Result	Passed		

8.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

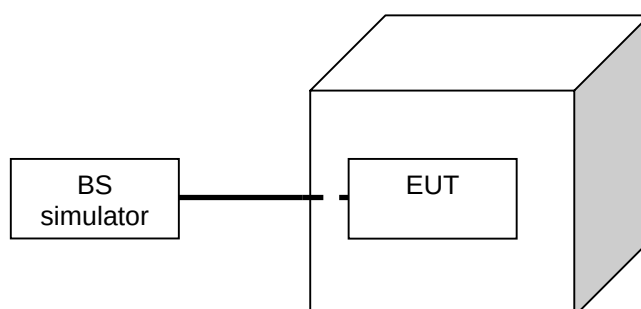

8.2. EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 Data transmission
EUT channel	661
EUT TX power level	0 (Max.)

8.3. Limit

Frequency deviation [ppm]
± 2.5

8.4. Test method

- The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
- The EUT was placed in the chamber

- c) Temperature changed and The EUT was set in idle mode for 45 minutes.
- d) The EUT was set to transmit.
- e) The transmit frequency error was measured immediately
- f) The steps c - e were repeated for each temperature

8.5. Results

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-30	2	0.002
-20	0	0
-10	4	0.004
0	12	0.015
10	10	0,01
20	0, reference	0
30	1	0.001
40	4	0.004
50	9	0.01

Table 15. Frequency deviation, temperature variation

9. Frequency stability, voltage variation

EUT	RH-68 dut 234484		
Accessories	Battery eliminator BTD-8 FL2703618		
Temp, Humidity, Air Pressure	21.0 °C	59.5 RH%	1007.8 mbar
Date of measurement	8/30/2004		
FCC rule part	§2.1055 (a)(1)(b)		
RSS-132 section	6.3		
Measured by	Jan Engelbrechtsen		
Result	Passed		

9.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



9.2. EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1Data transmission
EUT channel	661
EUT TX power level	0 (Max.)

9.3. Limit

Frequency deviation [ppm]
± 2.5

9.4. Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

9.5. Results

Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Nominal	3.7	-36	0.019
Battery cut-off point	3.38	-27	0.015

Table 16. Frequency deviation, voltage variation

10. Test equipment

Each test equipment is calibrated once a year, except antennas which are calibrated every second year.

10.1. Conducted measurements

Equipment #	Equipment	Type	Serial #	Manufacturer
13357	Signal Generator	SMP 02		Rohde & Schwarz
13302	Spectrum Analyzer	8596E		Hewlett Packard
13524	BS Simulator	CMD-55		Rohde & Schwartz
17277	Multimeter	34401A		Agilent
15761	DC Power Supply	E3632A		Hewlett Packard
13371	Temperature chamber	2800		Thermotron
-	RF Attenuator	23-10-34		Weinchel
-	Power Divider	-		Suhner
17796	BS Simulator	4400M		Wavetek
-	Antenna Mast	-		Deisel
14900	Antenna Mast Controller	HD-100		Deisel
15191	Turn Table	G-800SDX		Yaesu
13668	Antenna	CBL6112A		Chase
13935	Two Line Artificial Mains Network	ESH-3-Z5		Rohde & Schwarz
13666	EMI Test Receiver	ESPC		Rohde & Schwarz

10.2. Radiated measurements

Equipment #	Equipment	Type	Serial #	Manufacturer
	10 meter OATS			
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	847124/001	Rohde&Schwarz
15191	Turntable Contoller Unit	G-800SDX	ONO10000	YAESU
14900	Antenna Controller	HD100	100\552	HD GmbH
18792	Multi Device Controller	2090	1606	ETS-EMCO
13829	Turntable Controller	4630-100	100/510	Comtest
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	571131	Miteq/NMP Cph

13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	2259	Chase
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	833362/004	Rohde&Schwarz
12679	Dual Log Periodic Antenna 1-26.5 GHz	HL025	-----	Rohde&Schwarz
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	100154	Rohde&Schwarz
18773	Shielded Chamber	RFD-100	2420	ETS-Lindgren
18774	Shielded Chamber	RFSD-F/A-100	2425	ETS-Lindgren
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	1	Wainwright
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	1	Wainwright
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS		Wainwright Instruments
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS		Wainwright Instruments
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS		Wainwright Instruments
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS		Wainwright Instruments