

FCC Part 15C Compliance Test Report

Test Report no.:	Salo_FCC_0916_06.doc	Date of Report:	23-Apr-2009
Number of pages:	15	Customer's Contact person:	Futoshi Kimura
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Arco Tower Shimomeguro 1-8-1 Meguro-ku TOKYO 153-0064 JAPAN Tel. +81 3 5759 7001 Fax. +81 3 5740 6858
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-506 / Battery BP-4L / AC-Charger AC-10C / Data Cable CA-101 / Audio Adapter AD-54 / Headset HS-45		
FCC ID:	QVVRM-506	IC:	661AE-RM506
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	09-Mar-2009
Testing completed	20-Apr-2009
The customer's contact person	Futoshi Kimura
Test Plan referred to	T:\Projects\RM-506\TestPlan_RS\RS_Testplan_RM-506.xls
Notes	-
Document name	T:\Projects\RM-506\EMC\Results\FCC\Salo_FCC_0916_06.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth and FM transmitter. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-506	004401103743635	2201	-	V52.50.2009.08	13671
Battery	BP-4L	3932138504160863822;0670520	-	-	-	13520
AC-Charger	AC-10C	3997918271100200421;0675412	-	-	-	13521
Data Cable	CA-101	07306348221M1206557	-	-	-	13522
Audio Adapter	AD-54	0750838837362108307	-	-	-	13524
Headset	HS-45	06942358116C1M21321	-	-	-	13523

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Test Equipment.....	14
5.1. Conducted measurements	14
5.2. Radiated measurements	14

2. Test setups

2.1. Conducted RF test setup

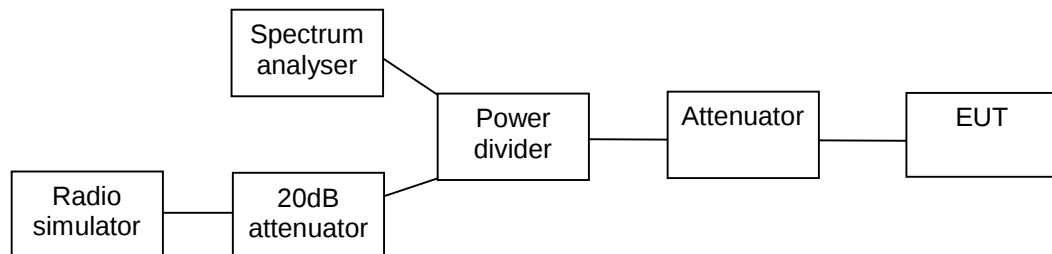

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup



3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-506, DUT 13671
Accessories with DUT numbers	BP-4L, DUT 13520; AD-54, DUT 13524; HS-45, DUT 13523; AC-10C, DUT 13521, CA-101, DUT 13522
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Phone tested slide closed mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 42 / 102.9
Date of measurements	20-Apr-2009
Measured by	Sami Lehtonen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

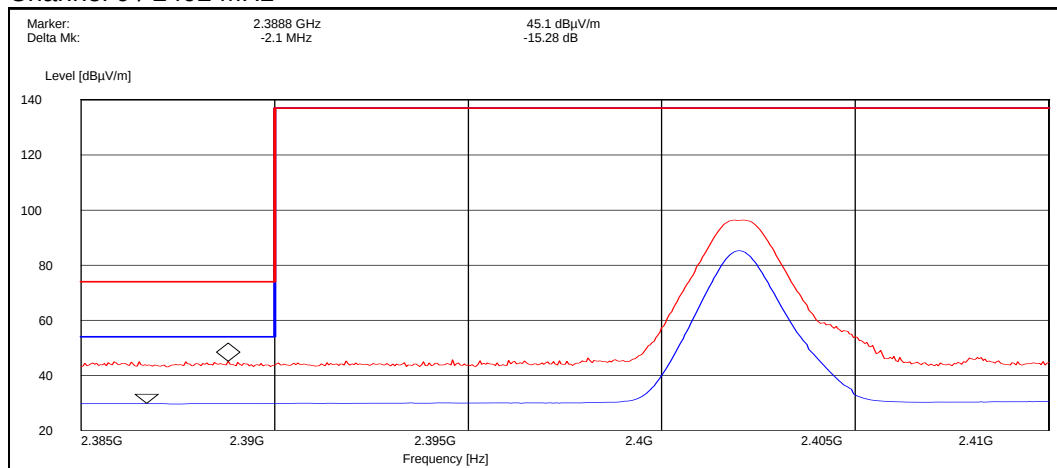


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	45.10	PASSED
Average	29.80	PASSED

Channel 78 / 2480 MHz

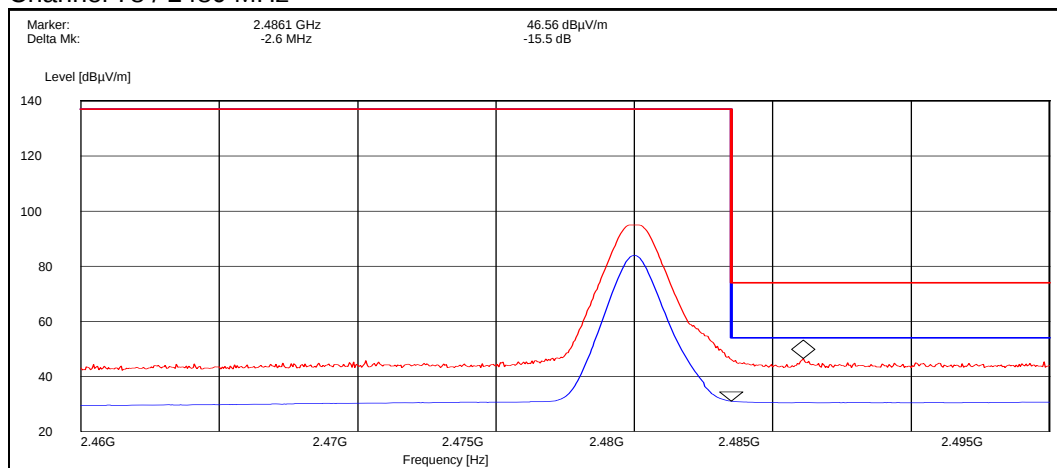


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	46.60	PASSED
Average	31.10	PASSED

Hopping on, low end

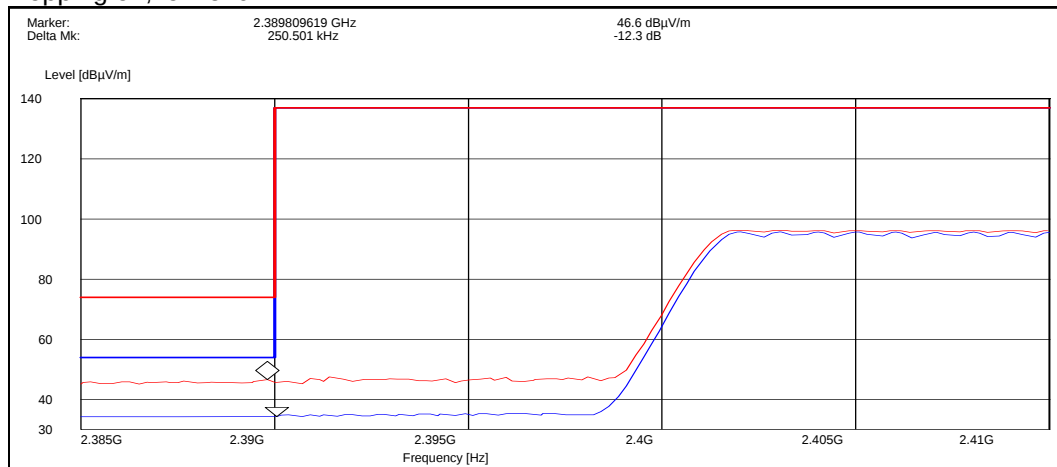

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	46.60	PASSED
Average	34.30	PASSED


Hopping on, high end

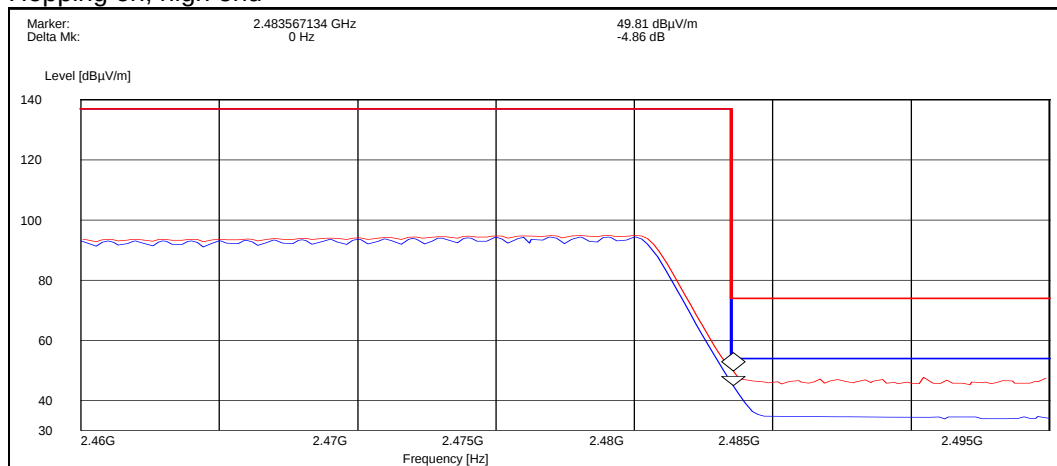

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	49.80	PASSED
Average	45.00	PASSED


3.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

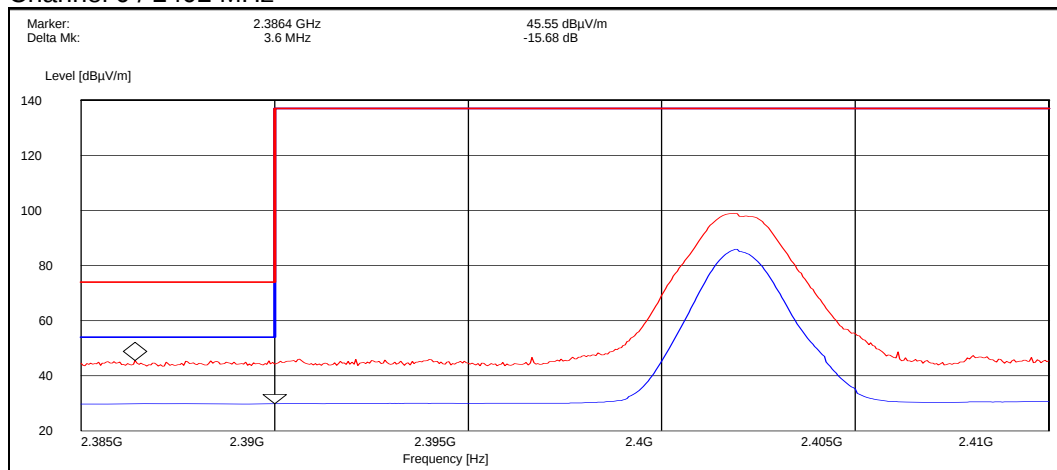


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	45.60	PASSED
Average	29.90	PASSED

Channel 78 / 2480 MHz

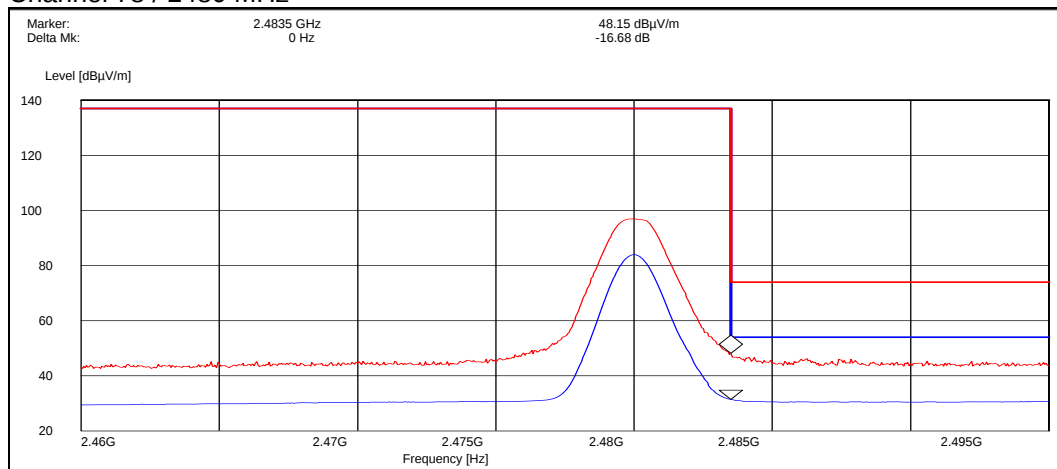


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	48.20	PASSED
Average	31.50	PASSED

Hopping on, low end

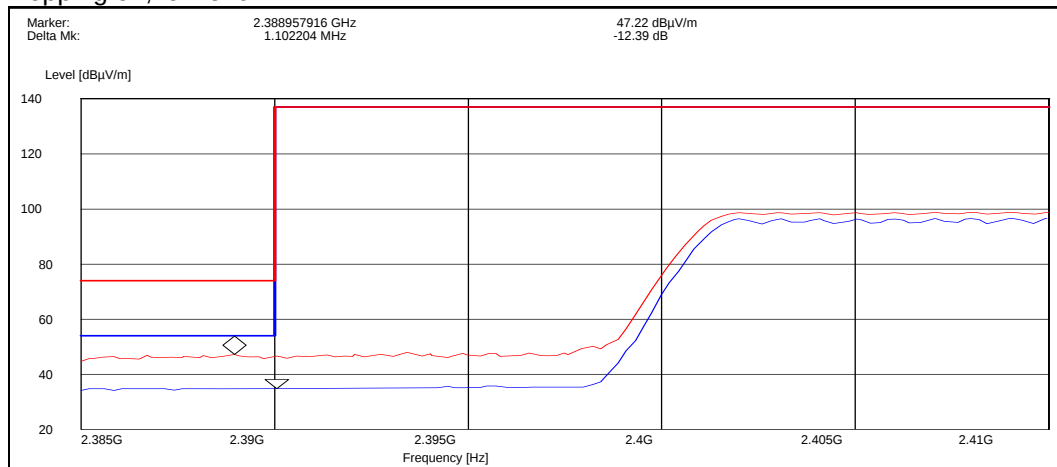

Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	47.20	PASSED
Average	34.80	PASSED

Hopping on, high end

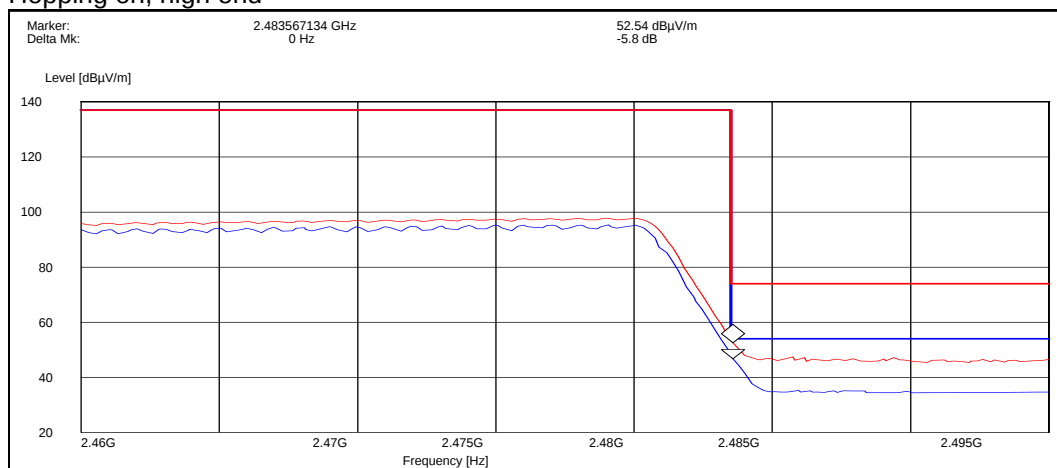

Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	52.50	PASSED
Average	46.70	PASSED

4. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-506, DUT 13671
Accessories with DUT numbers	BP-4L, DUT 13520; AD-54, DUT 13524; HS-45, DUT 13523; AC-10C, DUT 13521, CA-101, DUT 13522
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Phone tested slide closed mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 42 / 102.9
Date of measurements	20-Apr-2009
Measured by	Sami Lehtonen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	53.60	478.63	52.60	1.0	HORIZONTAL	PASSED
7206.000000	54.40	524.81	51.50	2.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	41.60	120.23	40.60	1.0	HORIZONTAL	PASSED
7206.000000	39.80	97.72	36.90	2.9	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.595391	18.70	8.61	37.20	-18.5	VERTICAL	PASSED
130.099599	18.80	8.71	47.00	-28.2	VERTICAL	PASSED
150.000000	17.40	7.41	47.00	-29.6	VERTICAL	PASSED
164.227054	19.60	9.55	49.90	-30.3	VERTICAL	PASSED
170.640281	21.90	12.45	53.00	-31.1	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4884.269539	54.60	537.03	53.30	1.3	HORIZONTAL	PASSED
7325.653307	55.40	588.84	52.10	3.3	HORIZONTAL	PASSED
12113.730461	52.70	431.52	40.50	12.2	HORIZONTAL	PASSED
12502.000000	53.10	451.86	41.40	11.7	HORIZONTAL	PASSED
15371.245491	56.20	645.65	38.00	18.2	HORIZONTAL	PASSED
15968.429860	54.60	537.03	37.10	17.5	VERTICAL	PASSED
16045.598196	57.30	732.82	36.70	20.6	VERTICAL	PASSED
17947.895792	57.70	767.36	37.90	19.8	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	41.50	118.85	40.20	1.3	HORIZONTAL	PASSED
7326.153307	40.90	110.92	37.60	3.3	HORIZONTAL	PASSED
12112.730461	40.00	100.00	27.80	12.2	HORIZONTAL	PASSED
12502.500000	40.00	100.00	28.30	11.7	HORIZONTAL	PASSED
15374.745491	43.50	149.62	25.10	18.4	HORIZONTAL	PASSED
15965.429860	41.80	123.03	24.20	17.6	VERTICAL	PASSED
16047.598196	44.60	169.82	23.90	20.7	VERTICAL	PASSED
17951.395792	44.60	169.82	24.70	19.9	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	53.10	451.86	52.90	0.2	VERTICAL	PASSED
7440.000000	53.30	462.38	48.90	4.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.80	109.65	40.60	0.2	VERTICAL	PASSED
7440.000000	39.60	95.50	35.20	4.4	HORIZONTAL	PASSED

4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	54.70	543.25	53.70	1.0	VERTICAL	PASSED
7206.000000	58.80	870.96	55.90	2.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	45.90	197.24	44.90	1.0	VERTICAL	PASSED
7206.000000	45.90	197.24	43.00	2.9	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.595391	18.90	8.81	37.40	-18.5	VERTICAL	PASSED
129.378156	19.90	9.89	48.00	-28.1	VERTICAL	PASSED
164.528858	20.50	10.59	50.80	-30.3	VERTICAL	PASSED
169.840882	19.60	9.55	50.60	-31.0	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	56.80	691.83	55.50	1.3	VERTICAL	PASSED
7325.651303	57.60	758.58	54.30	3.3	VERTICAL	PASSED
7326.153307	57.50	749.89	54.20	3.3	VERTICAL	PASSED
12455.411824	53.70	484.17	42.00	11.7	VERTICAL	PASSED
15370.247495	56.00	630.96	37.90	18.1	VERTICAL	PASSED
15929.857715	54.50	530.88	36.40	18.1	VERTICAL	PASSED
16049.106212	58.30	822.24	37.60	20.7	VERTICAL	PASSED
17968.929860	57.50	749.89	37.20	20.3	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	47.70	242.66	46.40	1.3	VERTICAL	PASSED
7326.153307	45.80	194.98	42.50	3.3	VERTICAL	PASSED
7326.651303	43.90	156.68	40.60	3.3	VERTICAL	PASSED
12456.911824	40.10	101.16	28.40	11.7	VERTICAL	PASSED
15375.247495	43.50	149.62	25.10	18.4	VERTICAL	PASSED
15929.357715	41.90	124.45	23.80	18.1	VERTICAL	PASSED
16054.606212	44.30	164.06	24.00	20.3	VERTICAL	PASSED
17963.429860	44.50	167.88	24.30	20.2	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	55.40	588.84	55.20	0.2	VERTICAL	PASSED
7440.000000	55.30	582.10	50.90	4.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	45.60	190.55	45.40	0.2	VERTICAL	PASSED
7440.000000	42.90	139.64	38.50	4.4	HORIZONTAL	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B