


A B C D E F G H

03/07/04 Initial Design
 04/02/04 Changed C2 from 100pF to 0.01uF
 04/19/04 Changed C4 to 1pf, C3 to 6pf
 04/20/04 Changed key assignments to fully match PCB layout

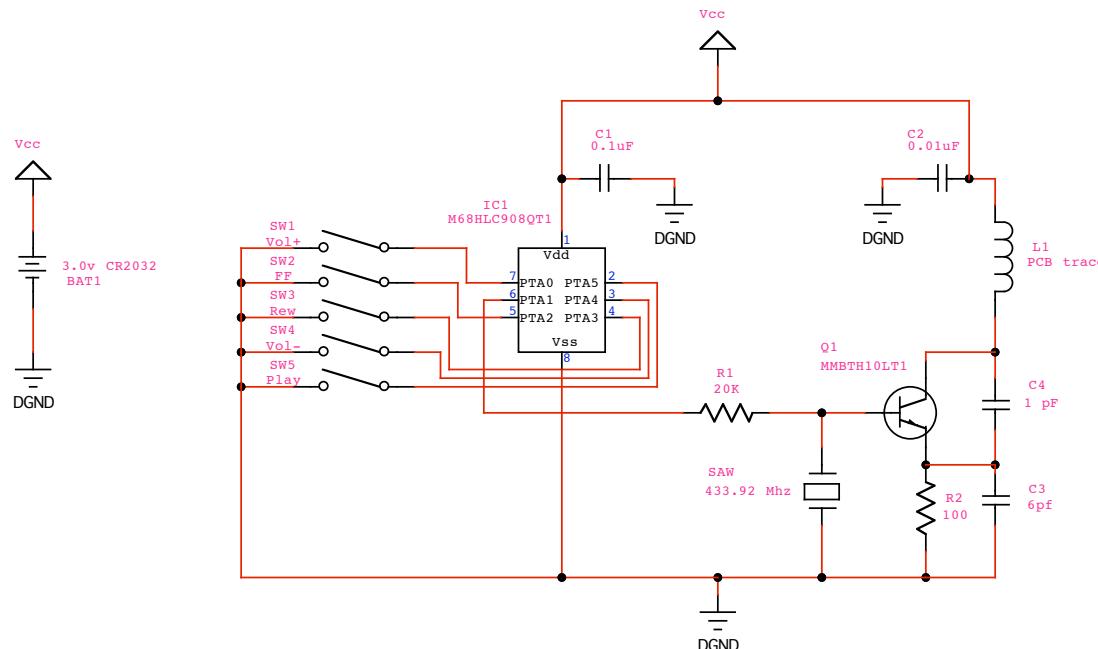

Operating Frequency: 433.92Mhz (saw stabilized)
 Operating voltage: 2.7 to 3.0 volts
 Operating temperature: 0 deg. C - 55 deg. C
 Resistors: 0603 5% Carbon unless otherwise noted
 Capacitors: 0603 xx Ceramic unless otherwise noted

Drawn by	mls	Engineered Audio	Rev 2.1
Date	04/20/04	15924 Sandalwood Creek	Page B
Des. chk		Wildwood, Missouri 63011	size
chk'd by			SHT 1 OF 1
Rel. date		TITLE: iPod transmitter Rev 2	PT#:

A B C D E F G H