


Antenna Specification

Model Type	DTXLB2.4G-IPEX-22cm
Frequency Range	2400 ~ 2500MHz
Efficiency (dB)	-2.26
Efficiency (%)	59.45%
Max Gain(dBi)	4.36
Input Impedence (ohm)	50
Polarization Type	Vertical & Horizontal
V.S.W.R	< 2.0

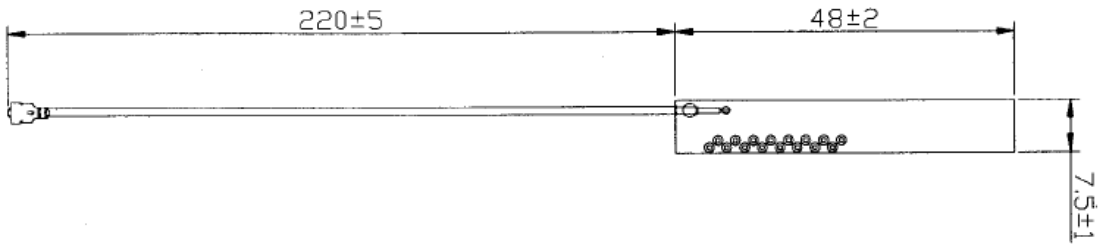

Guangzhou Huadu Datang Communication Antenna Factor

113#,Pingshi West Road, Huadu District, Guangzhou, Guangdong, China

Gain& Efficiency& PhaseCenter

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	4.36	-2.26	59.45
2410	3.59	-2.42	57.28
2420	3.50	-2.58	55.16
2430	3.53	-2.63	54.53
2440	3.28	-2.58	55.19
2450	3.58	-2.49	56.34
2460	3.91	-2.30	58.82
2470	3.92	-2.29	58.96
2480	3.78	-2.48	56.45
2490	3.55	-2.70	53.69
2500	3.72	-2.64	54.49

