



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Portable PA System

Model: PPA2000BT

Brand:



Test Report Number:

C131105Z03-RP1

Prepared for

MUSIC Group Macao Commercial Offshore Limited

Rua Du Pequim, No 202-A Macau Finance Centre 9/J, Macau

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: November 18, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C131105Z03-RP1	Initial Issue	ALL	Sinphy Xie

**TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	7
3.1 DESCRIPTION OF TEST MODES	7
4. FACILITIES AND ACCREDITATIONS	8
4.1 FACILITIES.....	8
4.2 ACCREDITATIONS	8
4.3 MEASUREMENT UNCERTAINTY	8
5. SETUP OF EQUIPMENT UNDER TEST.....	9
5.1 SETUP CONFIGURATION OF EUT	9
5.2 SUPPORT EQUIPMENT	9
6. FCC PART 15.247 REQUIREMENTS.....	10
6.1 20DB BANDWIDTH	10
6.2 PEAK POWER.....	14
6.3 PEAK POWER SPECTRAL DENSITY	19
6.4 BAND EDGES MEASUREMENT	20
6.5 FREQUENCY SEPARATION	30
6.6 NUMBER OF HOPPING FREQUENCY	33
6.7 TIME OF OCCUPANCY (DWELL TIME).....	36
6.8 SPURIOUS EMISSIONS	43
6.9 POWERLINE CONDUCTED EMISSIONS	74



1. TEST RESULT CERTIFICATION

Product:	Portable PA System
Model:	PPA2000BT
Brand:	 behringer
Tested:	November 5~18, 2013
Applicant:	MUSIC Group Macao Commercial Offshore Limited Rua Du Pequim, No 202-A Macau Finance Centre 9/J, Macau
Manufacture	MUSIC Group Macao Commercial Offshore Limited Rua Du Pequim, No 202-A Macau Finance Centre 9/J, Macau
Factory	Zhongshan Eurotec Electronics Ltd. Eurotec Industrial Park #1 Junjing Rd., Min Zhong Town, Zhongshan, Guangdong 528441 China.


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:



Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	Portable PA System
Model Number	PPA2000BT
Brand	 behringer
Model Discrepancy	N/A
Identify Number	C131105Z03-RP1
Power Supply	100-120Vac, 50/60Hz;
MIC cable	Unshielded, 4.45m
Speaker out Cable	Unshielded, 3.00m×2
Received Date	November 5, 2013
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK : 1.47dBm 8DPSK : 0.31dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB layout Inverted-F Antenna with 2.12dBi gain(Max)
Temperature Range	0°C ~ +55°C

Note: This submittal(s) (test report) is intended for FCC ID: QWHPPA2000BT filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



Table 1

frequency range 2402 MHz ~ 2480 MHz					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402	28	2429	55	2456
2	2403	29	2430	56	2457
3	2404	30	2431	57	2458
4	2405	31	2432	58	2459
5	2406	32	2433	59	2460
6	2407	33	2434	60	2461
7	2408	34	2435	61	2462
8	2409	35	2436	62	2463
9	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453	79	2480
26	2427	53	2454		
27	2428	54	2455		

Note: The table 1 shows a list of the frequency range and the use of channels.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

1. Set up all computers like the setup diagram.
2. The "Bluetest 3" software was used for testing
3. Choose Transport "SPI" and Port "LPT1"

Hopping mode:

GFSK(DH1):

CFG PKT > Packet 4 Length 27, Power (EXT, INT) 20、 54, TX data2

GFSK(DH3):

CFG PKT > Packet 11 Length 183, Power (EXT, INT) 20、 54, TX data2

GFSK(DH5):

CFG PKT > Packet 15 Length 339, Power (EXT, INT) 20、 54, TX data2

8-DPSK(3DH1):

CFG PKT > Packet 24 Length 83, Power (EXT, INT) 20、 54, TX data2

8-DPSK(3DH3):

CFG PKT > Packet 27 Length 552, Power (EXT, INT) 20、 54, TX data2

8-DPSK(3DH5):

CFG PKT > Packet 31 Length 1021, Power (EXT, INT) 20、 54, TX data2

Hopping stopped with continuous transmission:

GFSK(DH1):

CFG PKT > Packet 4 Length 27, Power (EXT, INT) 20、 54, Freq 2402/2441/2480, TX data1

8-DPSK(3DH1):

CFG PKT > Packet 24 Length 83, Power (EXT, INT) 20、 54, Freq 2402/2441/2480, TX data1



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	B475	WB04861612	N/A	LENOVO	Unshielded 1.80m	Unshielded 0.80m (AC Cable) Unshielded 1.20m (DC Cable)
2	IPOD#1	A1285	YM91546Y3QY	N/A	APPLE	Unshielded 1.50m	Shielded 1.20m
3	IPOD#2	A1285	YM914GQH3RO	N/A	APPLE	Unshielded 1.80m	N/A
4	IPOD#3	A1285	YM91545C3QY	N/A	APPLE	Unshielded 1.50m	N/A
5	IPOD#4	A1285	YM914GTH3RO	N/A	APPLE	Unshielded 1.20m	N/A
6	IPOD#5	A1285	YM9149223QX	N/A	APPLE	Unshielded 1.30m	N/A
7	speaker#1	N/A	N/A	N/A	N/A	Unshielded 1.80m	N/A
8	speaker#2	N/A	N/A	N/A	N/A	Unshielded 1.80m	N/A
9	Load	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20dB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

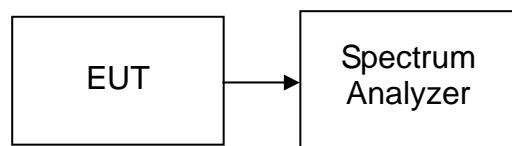

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.


TEST RESULTS

No non-compliance noted





Test plot GFSK

20dB Bandwidth(CH Low)

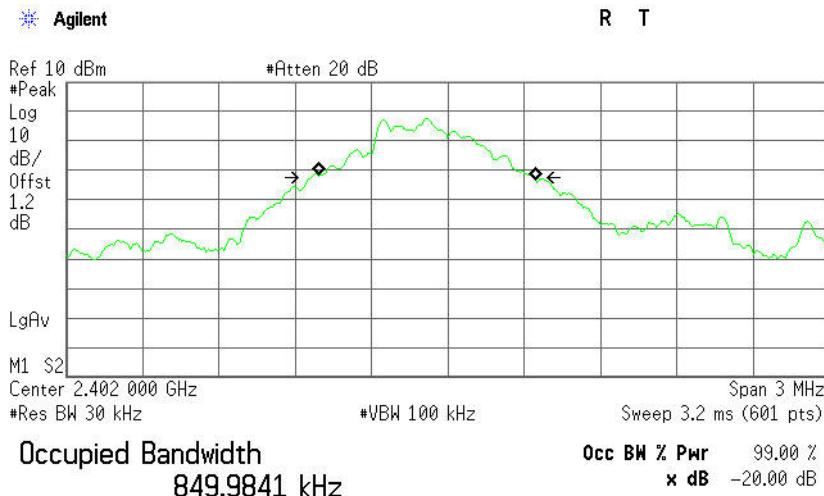


20dB Bandwidth (CH Mid)

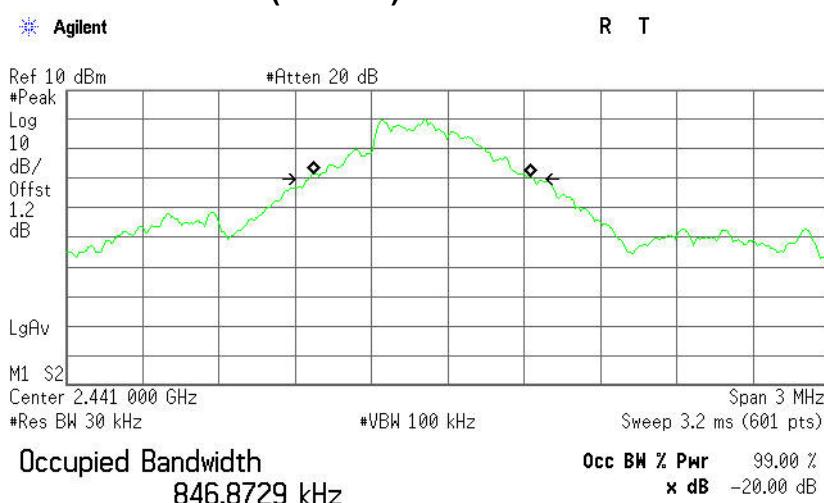

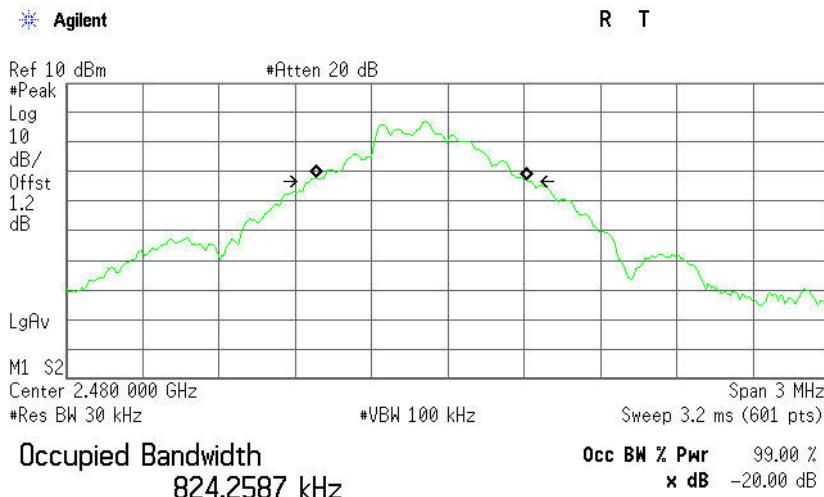**20dB Bandwidth (CH High)**


Transmit Freq Error -104.361 kHz
x dB Bandwidth 852.771 kHz

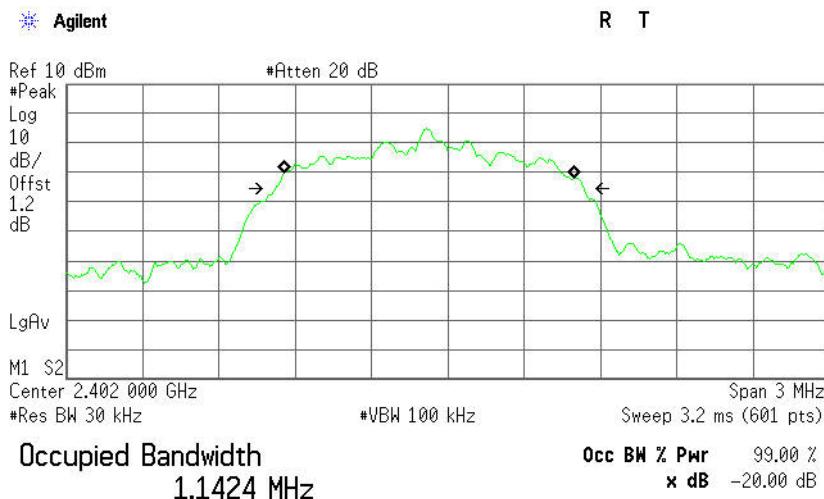8DPSK**20dB Bandwidth (CH Low)**


Transmit Freq Error -74.949 kHz
x dB Bandwidth 1.209 MHz



20dB Bandwidth (CH Mid)

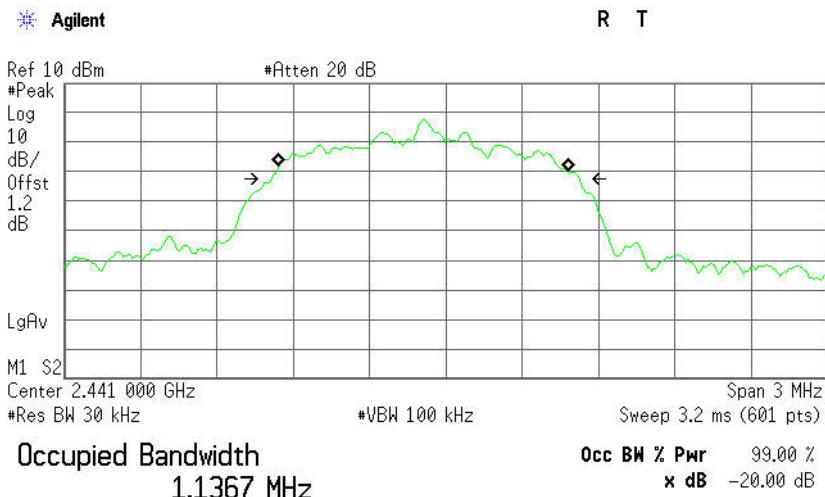

20dB Bandwidth (CH High)

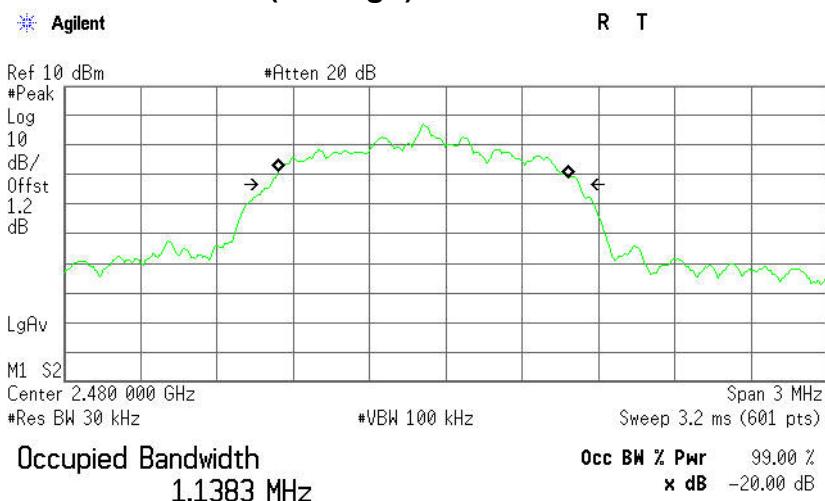



6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

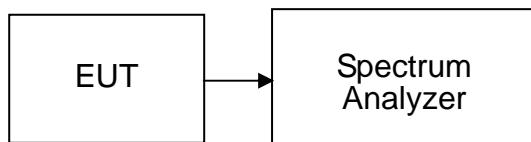

TEST PROCEDURE

The transmitter output is connected to the RF Spectrum Analyzer. The RF Spectrum Analyzer is set to the peak detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-2.46	1.20	-1.26	0.00075	1	PASS
Mid	2441	0.27	1.20	1.47	0.00140		PASS
High	2480	-0.28	1.20	0.92	0.00124		PASS

8DPSK


Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-2.65	1.20	-1.45	0.00072	1	PASS
Mid	2441	-0.89	1.20	0.31	0.00107		PASS
High	2480	-1.93	1.20	-0.73	0.00085		PASS

Remark: Factor=offset=cable loss




Test plot GFSK

Peak power (CH Low)

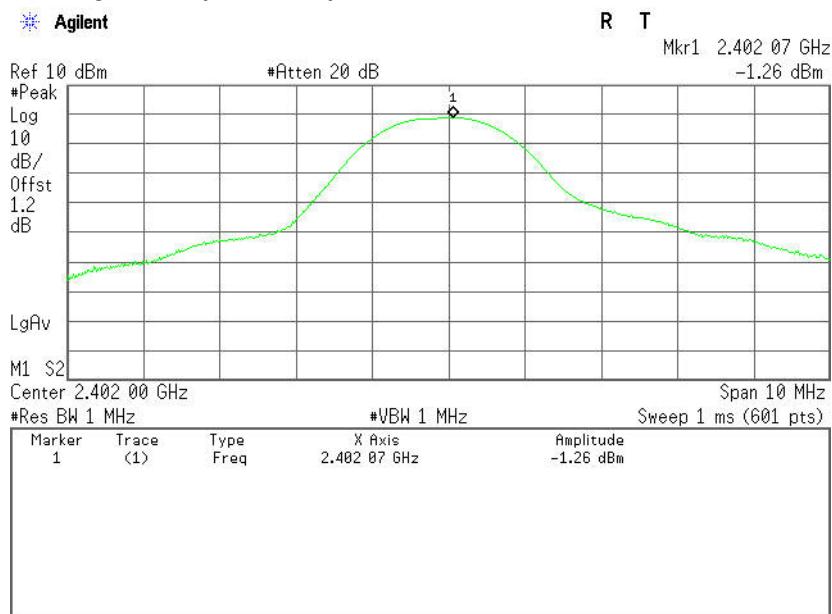


Peak power (CH Mid)

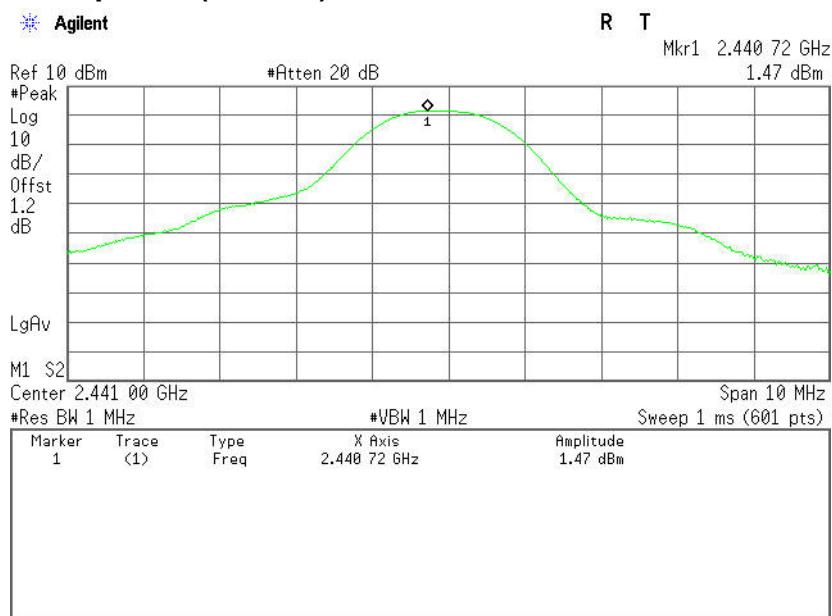




Peak power (CH High)

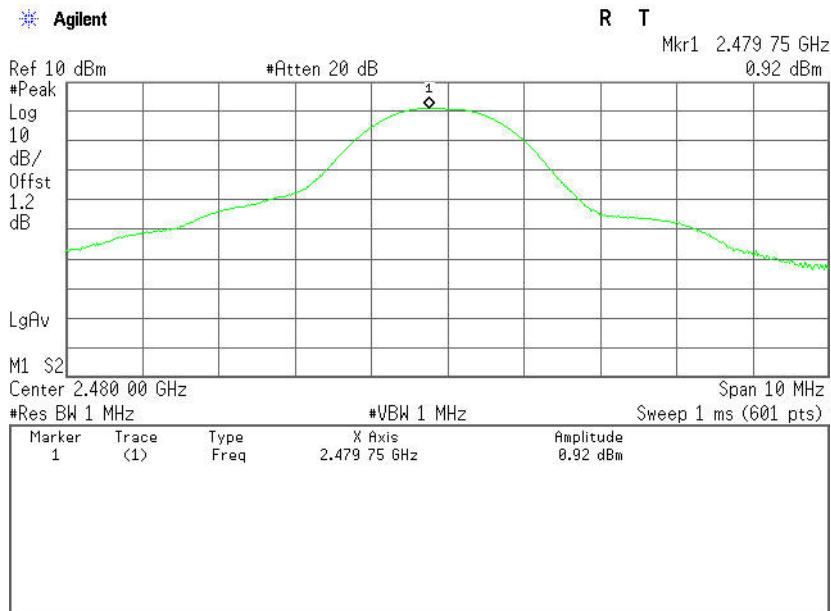


8DPSK

Peak power (CH Low)

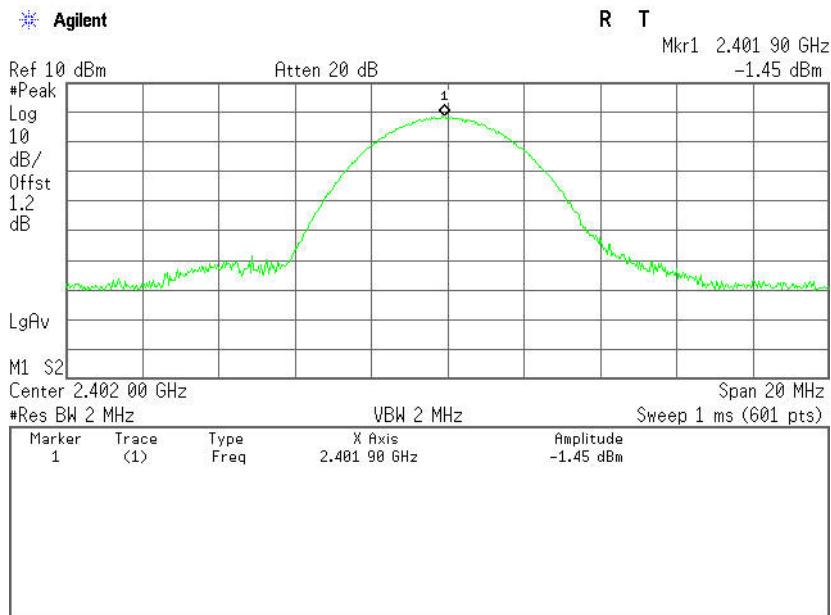




Peak power (CH Mid)

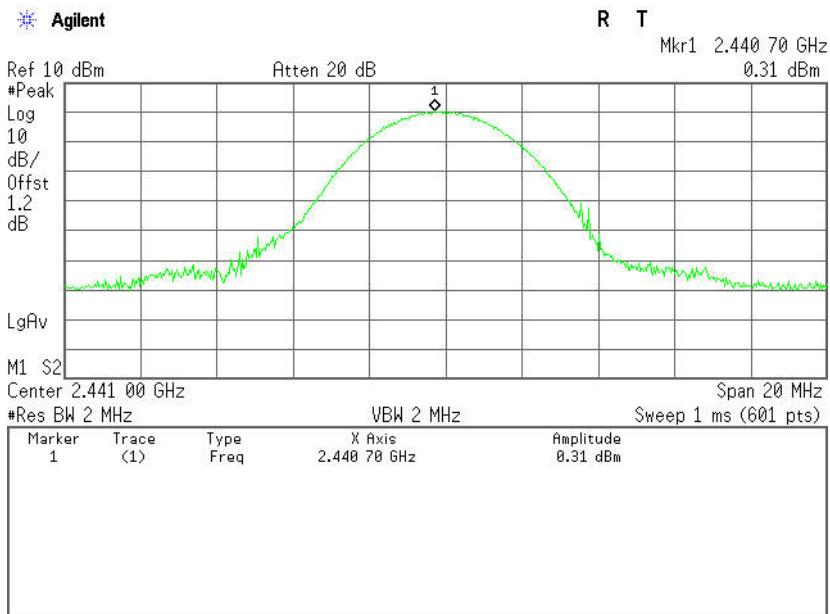

Peak power (CH High)

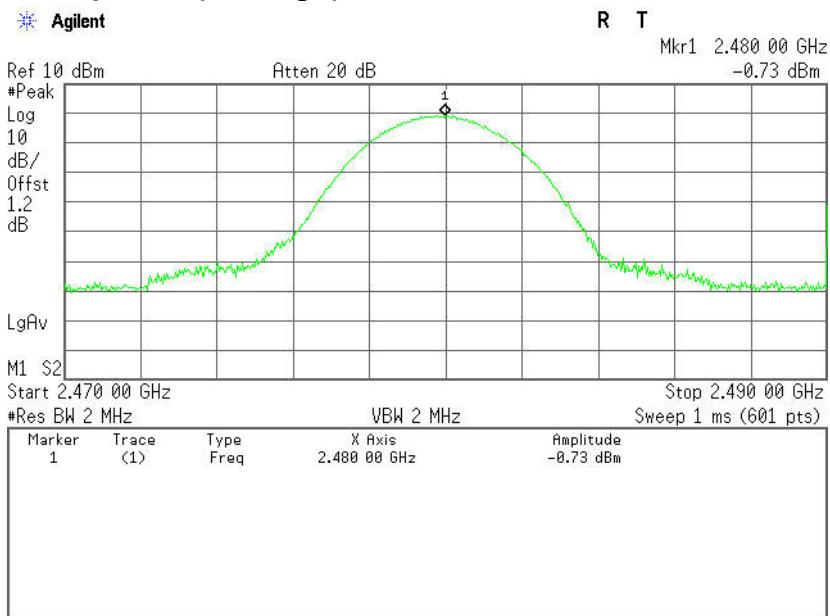



6.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A. R. A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

Test Configuration

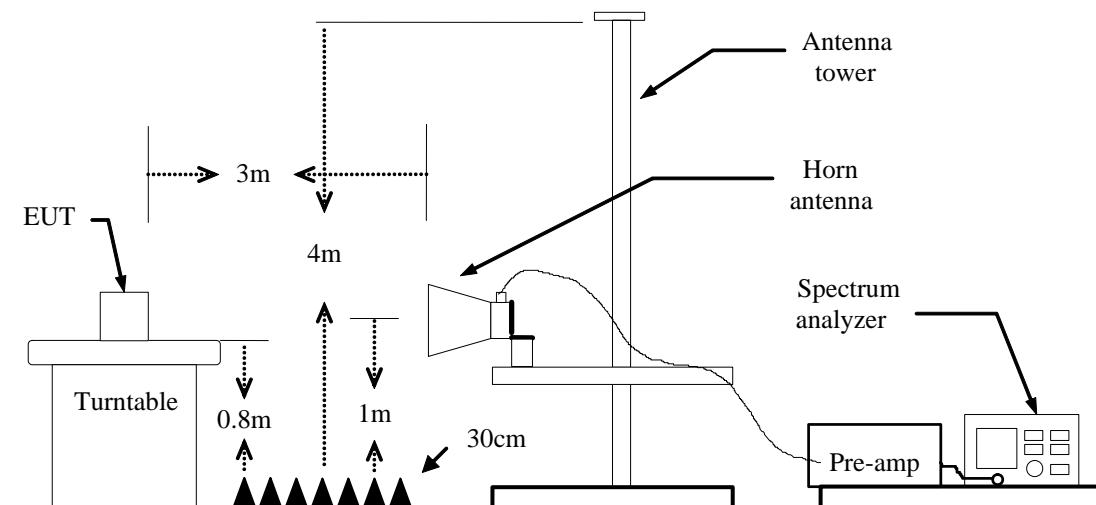





TEST PROCEDURE



1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=2.4kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

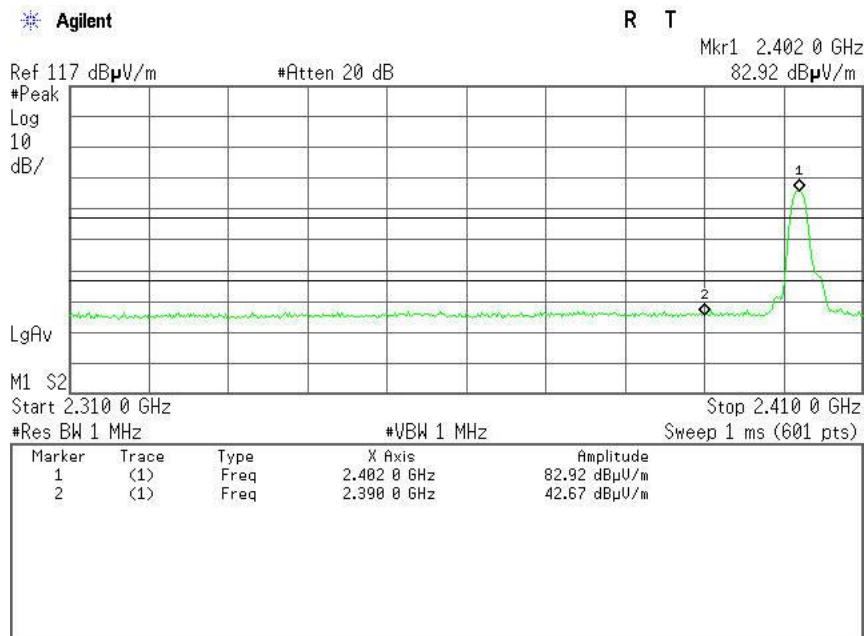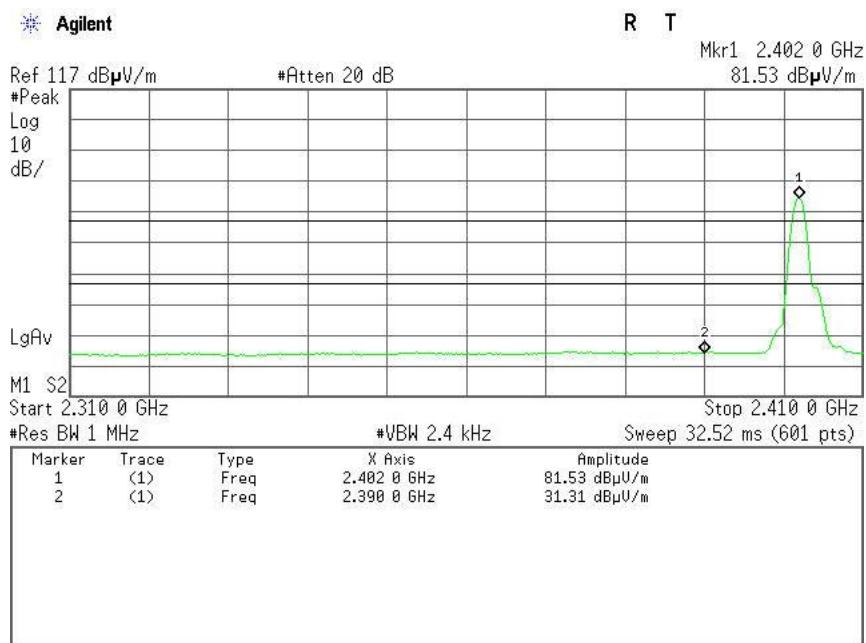Test Data (GFSK)**Band Edges (CH-Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	36.07	-6.60	42.67	74.00	-31.33	Peak	Vertical
2	2390.0000	24.71	-6.60	31.31	54.00	-22.69	Average	Vertical

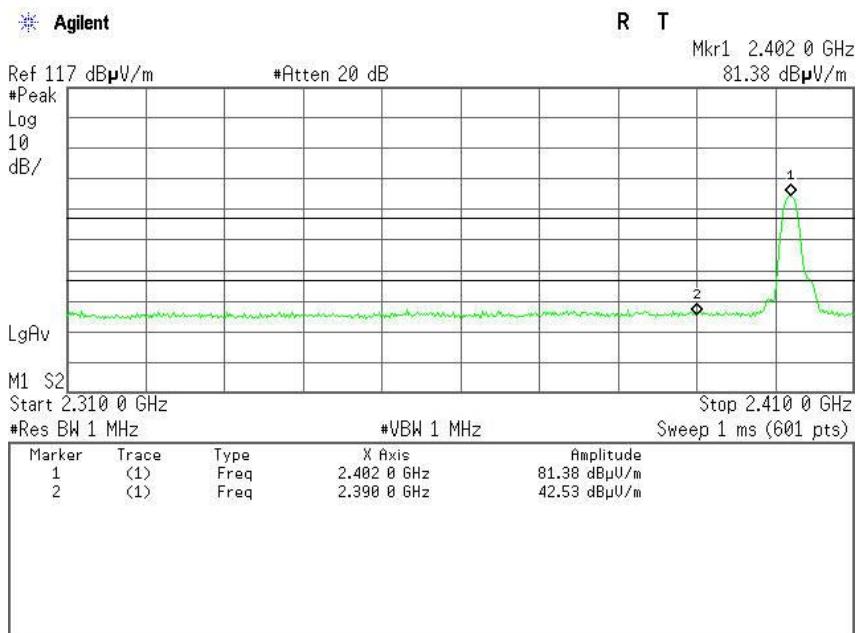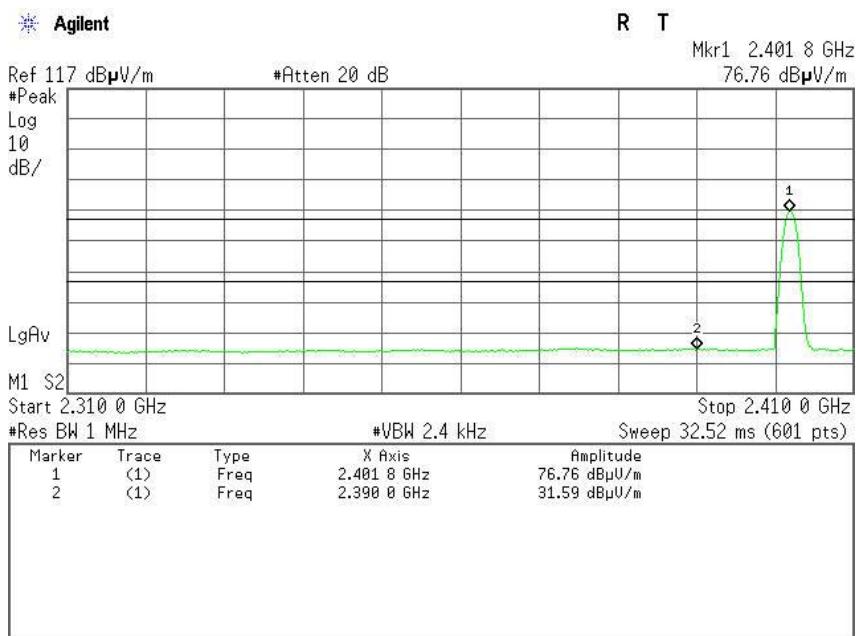**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	35.93	-6.60	42.53	74.00	-31.47	Peak	Horizontal
2	2390.0000	24.99	-6.60	31.59	54.00	-22.41	Average	Horizontal




Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

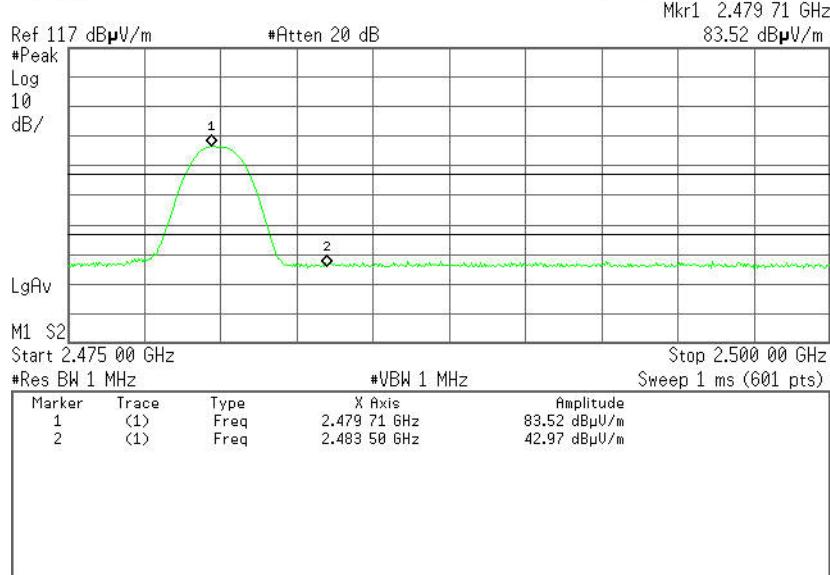


Detector mode: Average

Polarity: Vertical

Agilent

R T

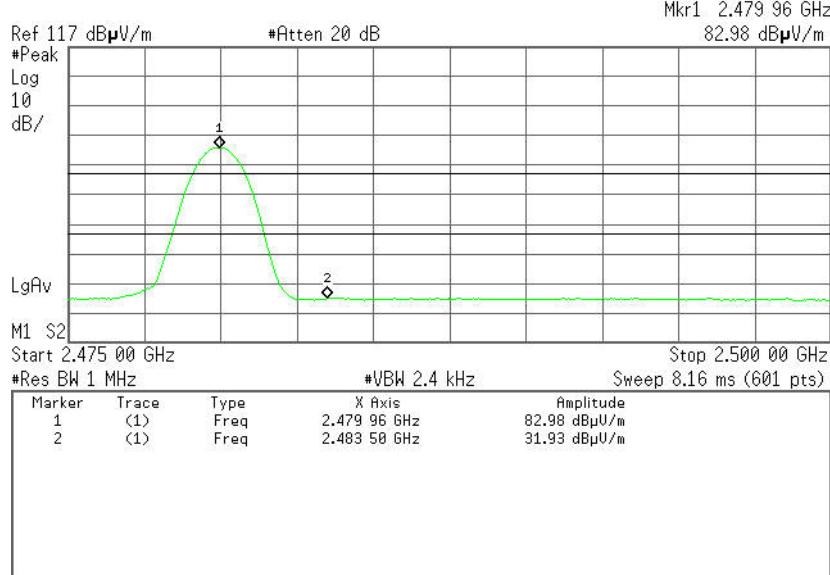


No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	36.73	-6.24	42.97	74.00	-31.03	Peak	Vertical
2	2483.5000	25.69	-6.24	31.93	54.00	-22.07	Average	Vertical




Detector mode: Peak

Polarity: Horizontal


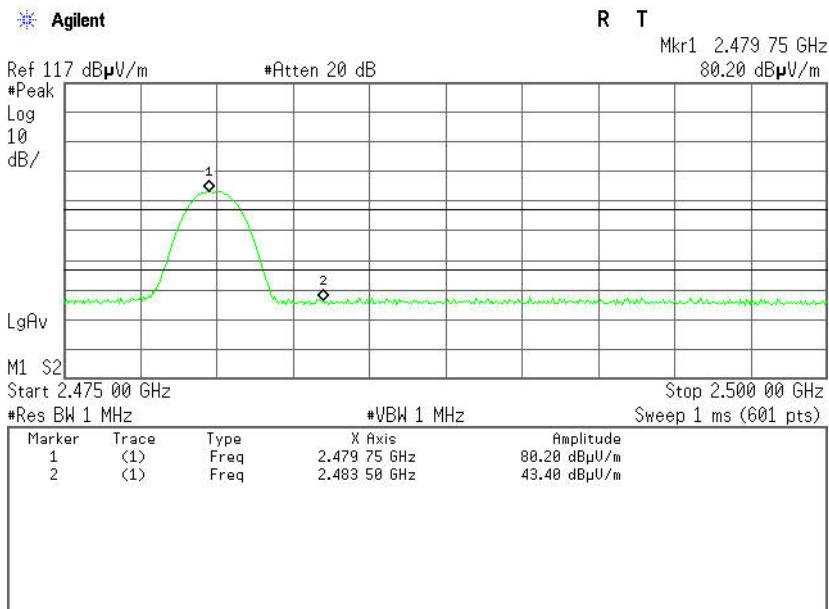


Detector mode: Average



Polarity: Horizontal

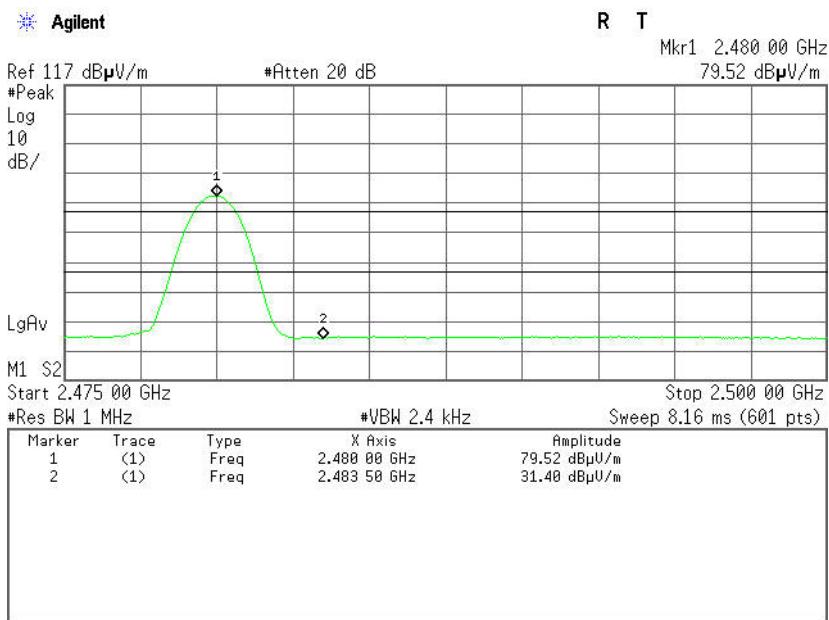



No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	37.16	-6.24	43.40	74.00	-30.60	Peak	Horizontal
2	2483.5000	25.16	-6.24	31.40	54.00	-22.60	Average	Horizontal

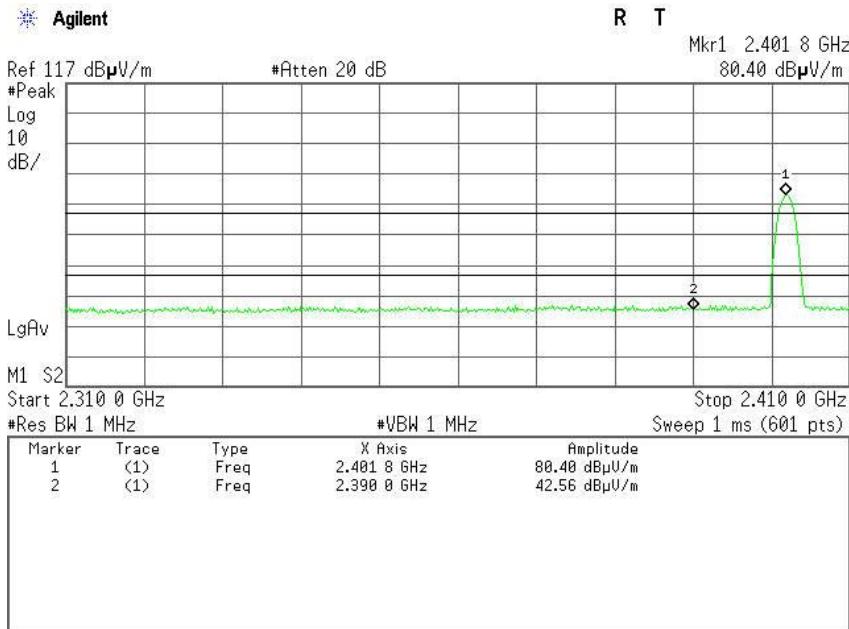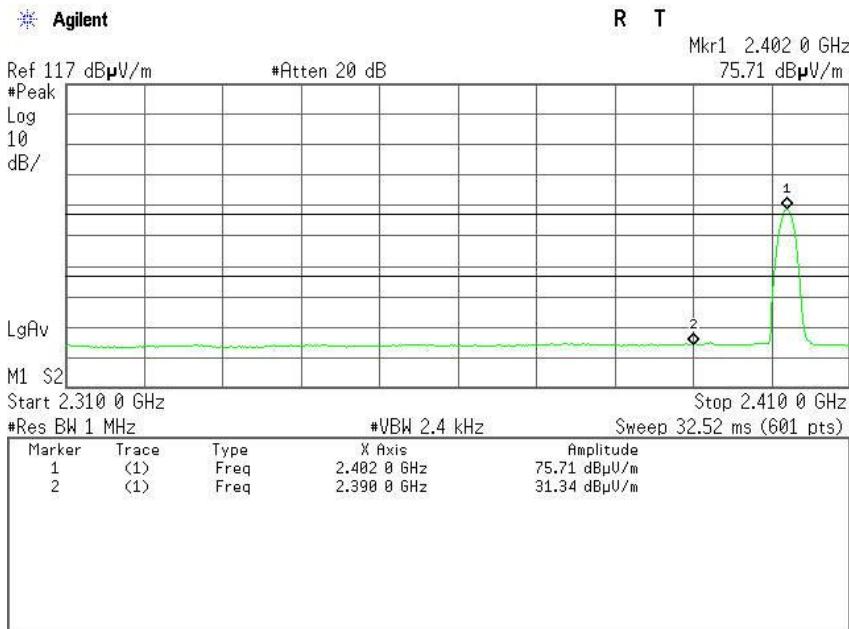**8DPSK****Band Edges (CH-Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	35.96	-6.60	42.56	74.00	-31.44	Peak	Vertical
2	2390.0000	24.74	-6.60	31.34	54.00	-22.66	Average	Vertical

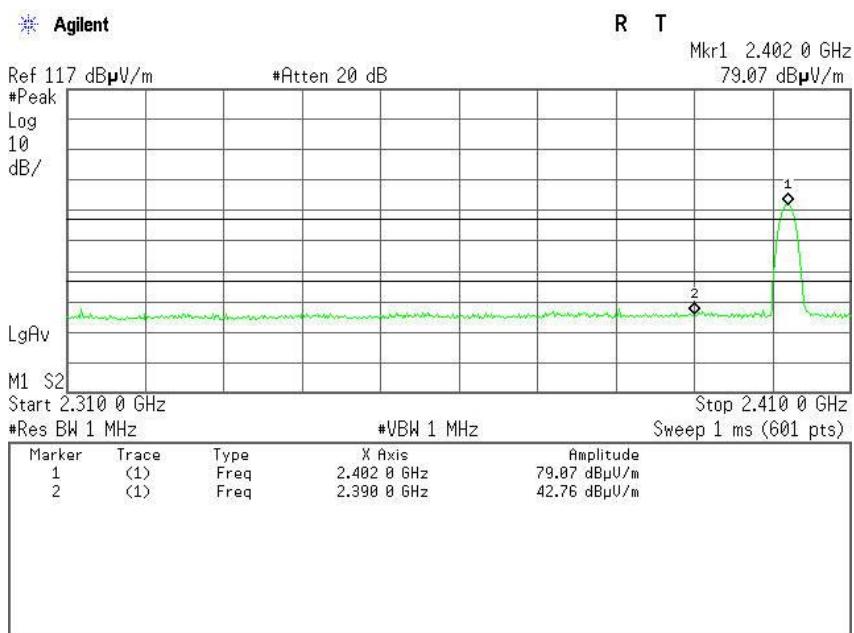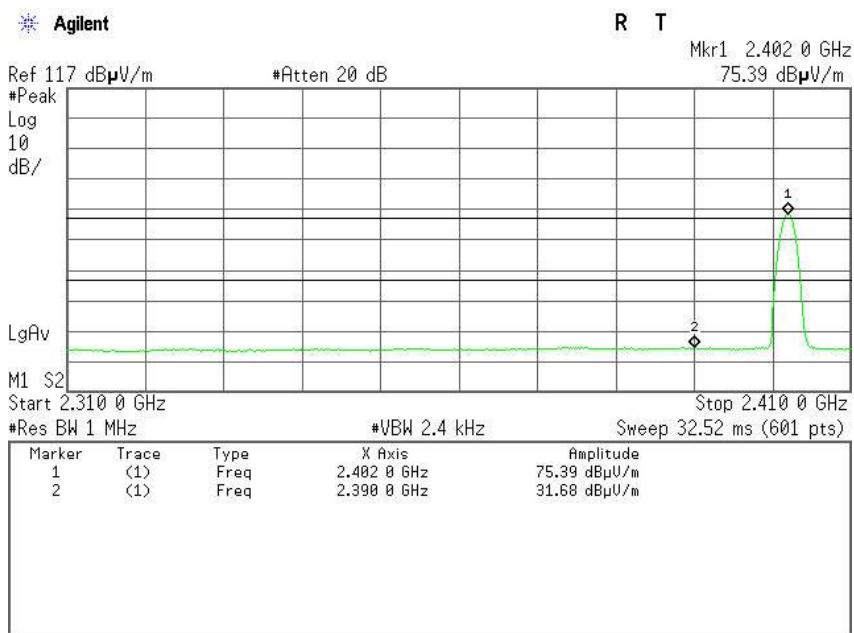**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	36.16	-6.60	42.76	74.00	-31.24	Peak	Horizontal
2	2390.0000	25.08	-6.60	31.68	54.00	-22.32	Average	Horizontal

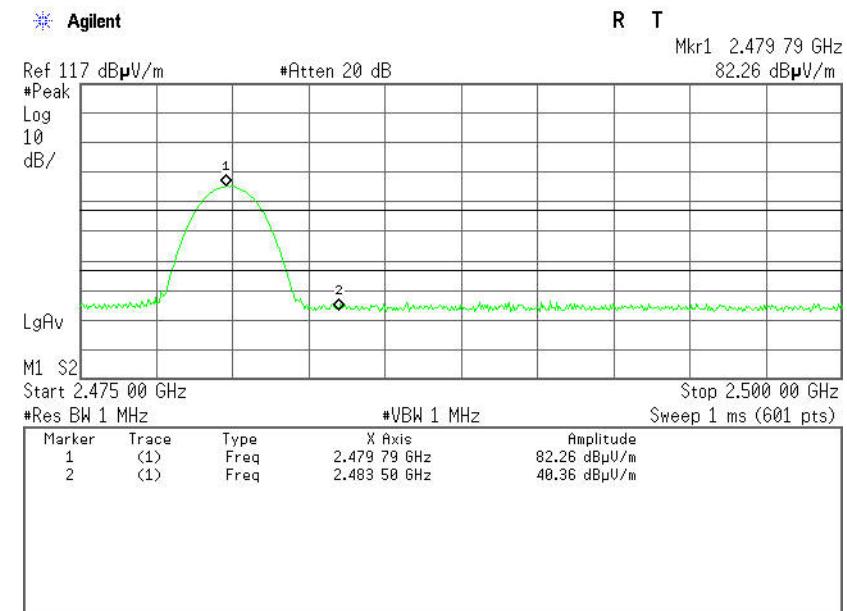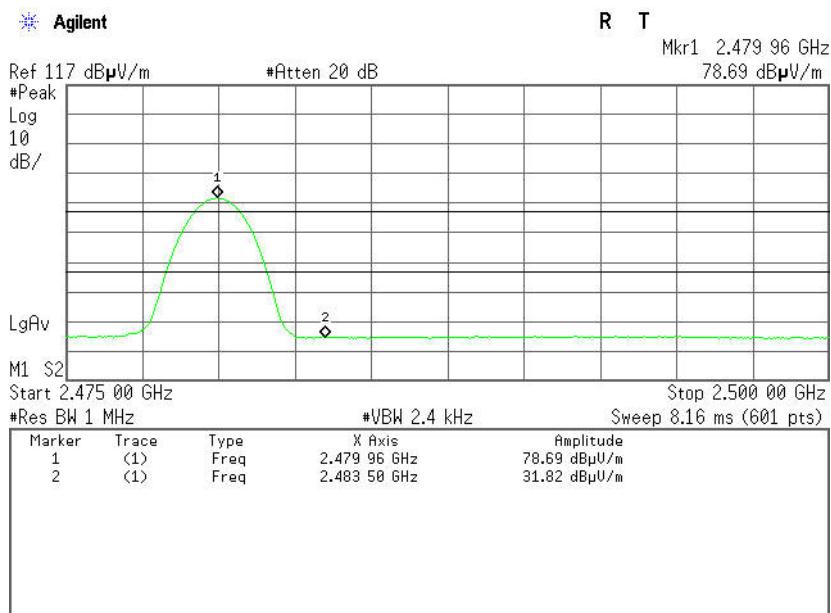**Band Edges (CH-High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	34.12	-6.24	40.36	74.00	-33.64	Peak	Vertical
2	2483.5000	25.58	-6.24	31.82	54.00	-22.18	Average	Vertical

**Detector mode: Peak**


* Agilent

Ref 117 dB μ V/m

#Atten 20 dB

Polarity: Horizontal

R T

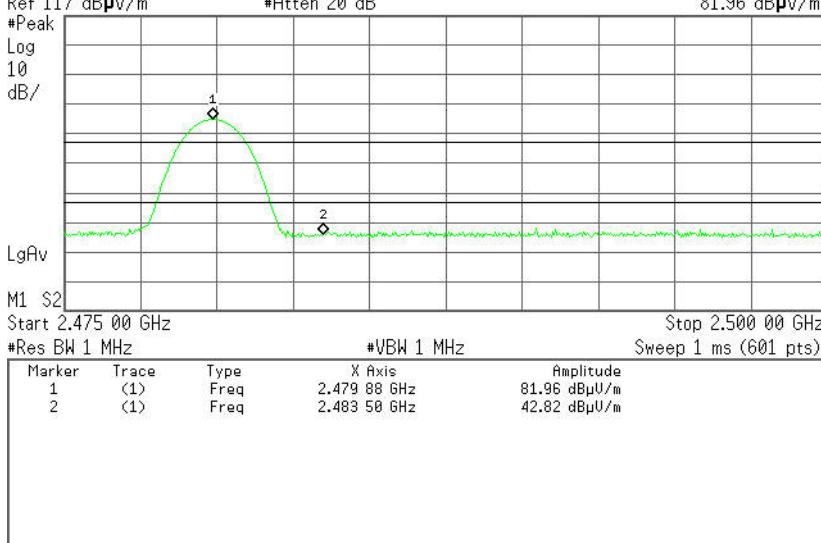Mkr1 2.479 88 GHz
81.96 dB μ V/m**Detector mode: Average**


* Agilent

Ref 117 dB μ V/m

#Atten 20 dB

Polarity: Horizontal

R T

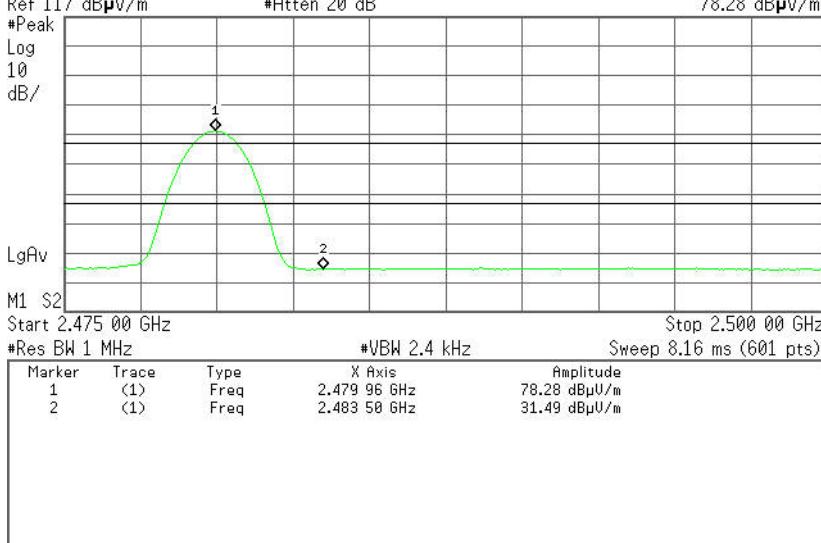Mkr1 2.479 96 GHz
78.28 dB μ V/m

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	36.58	-6.24	42.82	74.00	-31.18	Peak	Horizontal
2	2483.5000	25.25	-6.24	31.49	54.00	-22.51	Average	Horizontal



6.5 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted



Test Data



GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	586.722	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	808.667	> Two-thirds of the 20 dB Bandwidth	Pass

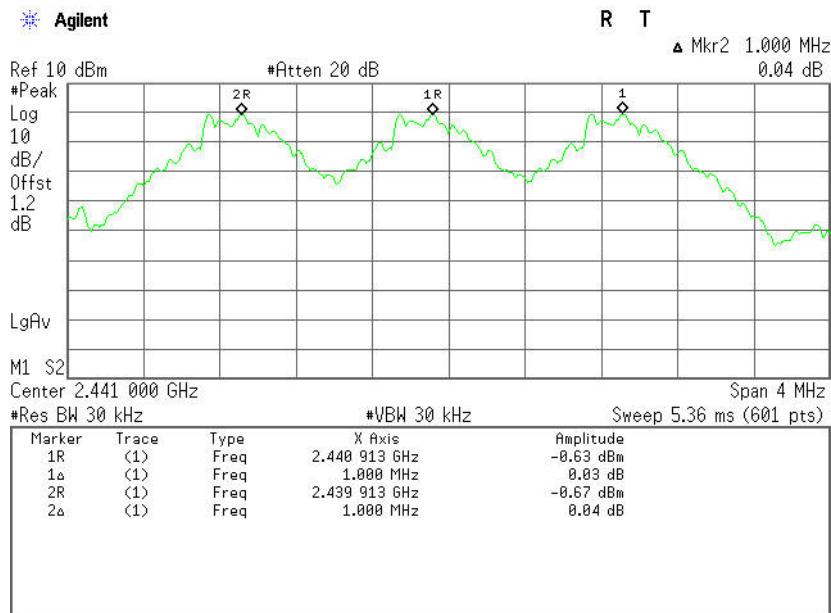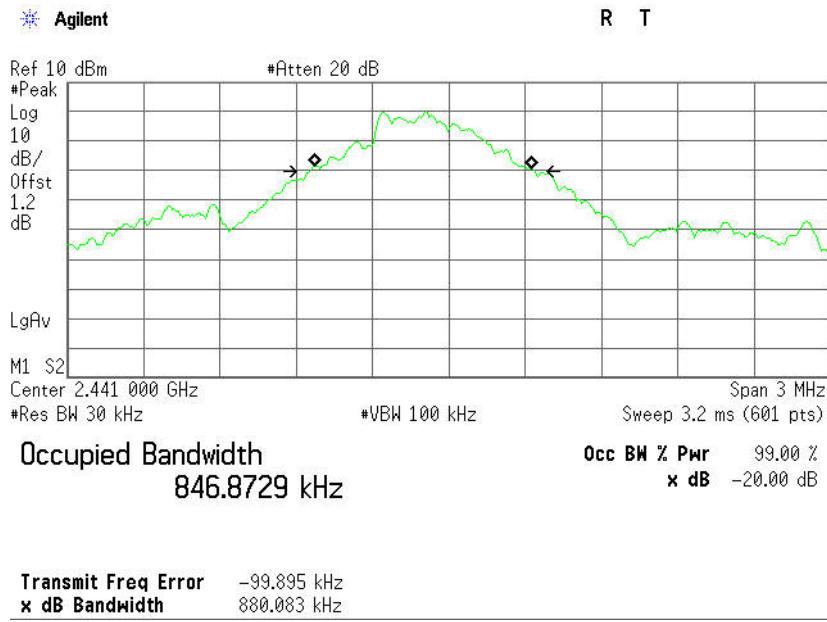**GFSK****Test Plot****Measurement of Channel Separation****20 dB bandwidth(CH Mid)**

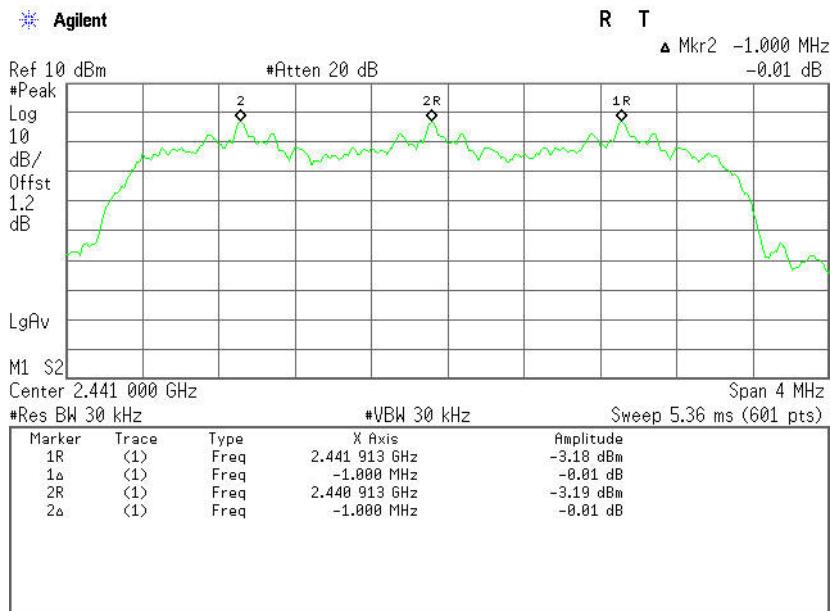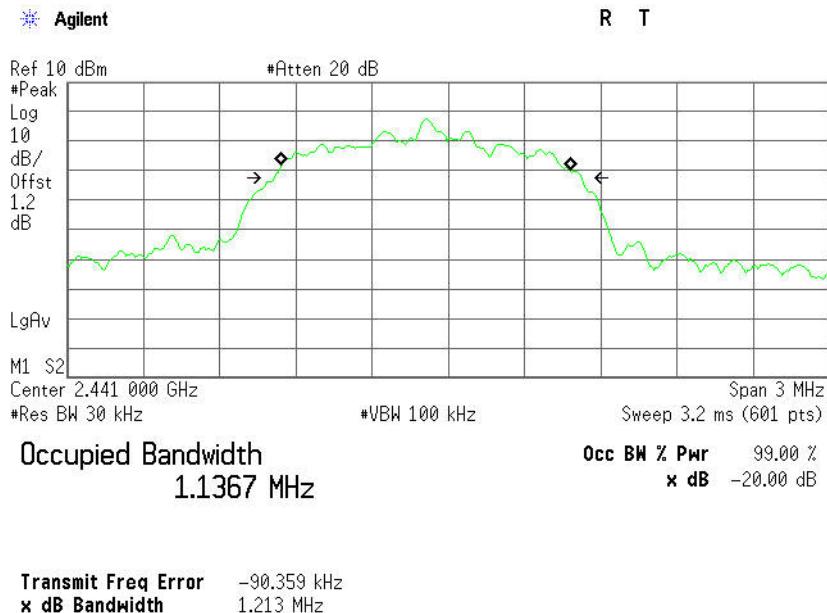**8DPSK****Test Plot****Measurement of Channel Separation****20 dB bandwidth(CH Mid)**



6.6 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot (GFSK)

Channel Number

2.400 GHz – 2.4415 GHz

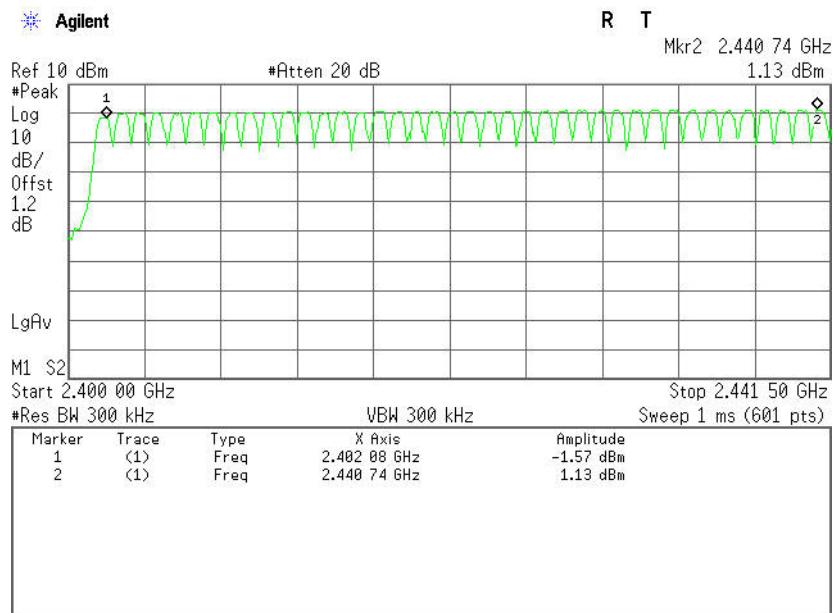

2.4415 GHz – 2.4835 GHz

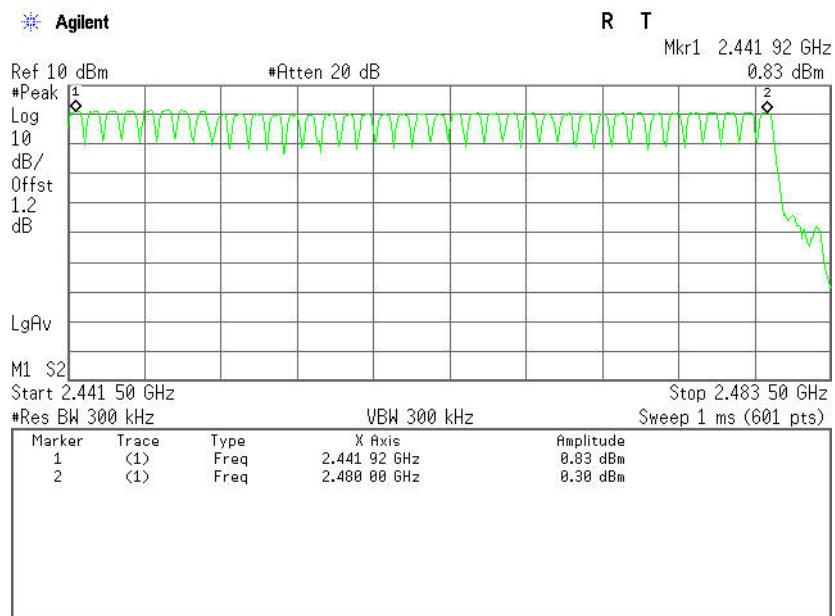





Test Plot (8DPSK)

Channel Number

2.400 GHz – 2.4415 GHz

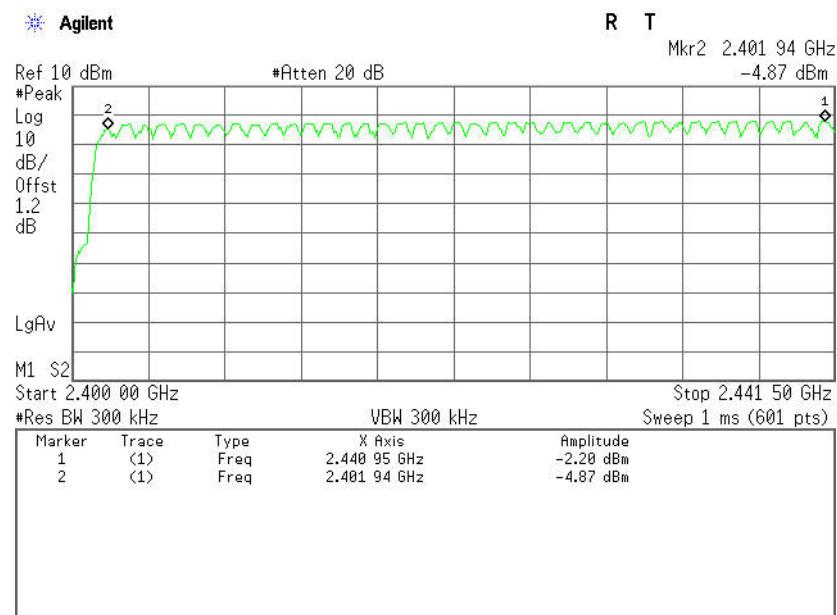

2.4415 GHz – 2.4835 GHz

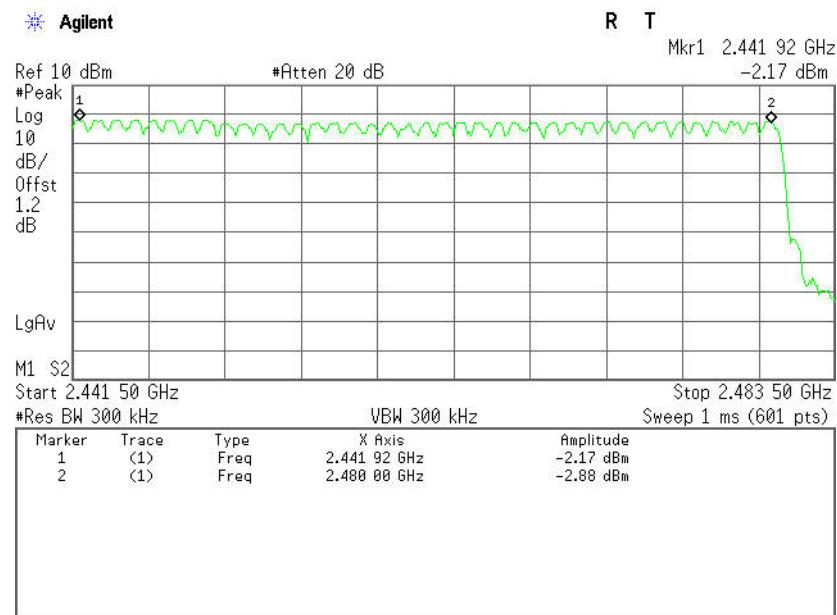



6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Mid: $0.428 * (1600/2)/79 * 31.6 = 136.960$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.428	136.960	31.60	400.00	PASS

DH 3

CH Mid: $1.690 * (1600/4)/79 * 31.6 = 270.400$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.690	270.400	31.60	400.00	PASS

DH 5

CH Mid: $2.940 * (1600/6)/79 * 31.6 = 313.600$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.940	313.600	31.60	400.00	PASS



Test Data

8DPSK

DH 1

CH Mid: $0.442 * (1600/2)/79 * 31.6 = 141.440$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.442	141.440	31.60	400.00	PASS

DH 3

CH Mid: $1.700 * (1600/4)/79 * 31.6 = 272.000$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.700	272.000	31.60	400.00	PASS

DH 5

CH Mid: $2.953 * (1600/6)/79 * 31.6 = 314.987$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.953	314.987	31.60	400.00	PASS




Test Plot

GFSK


DH 1

(CH Mid)

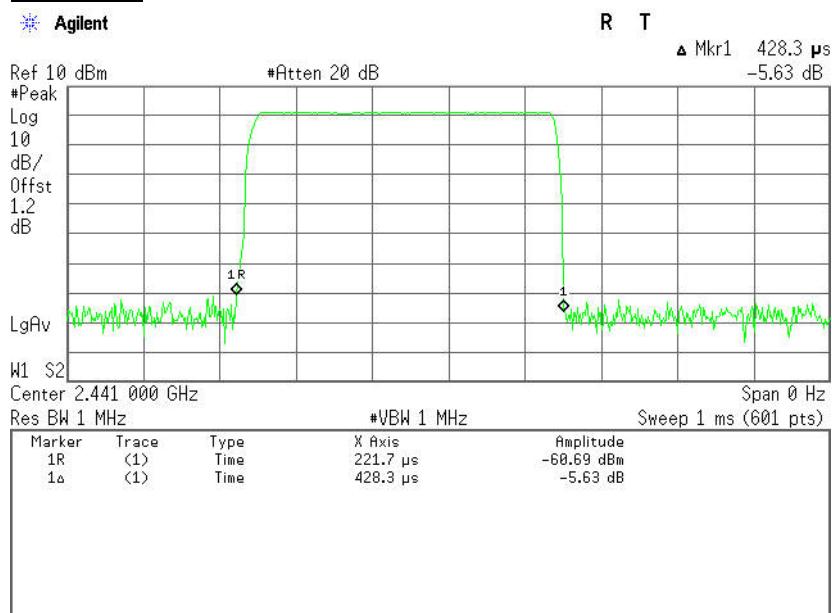

DH 3

(CH Mid)

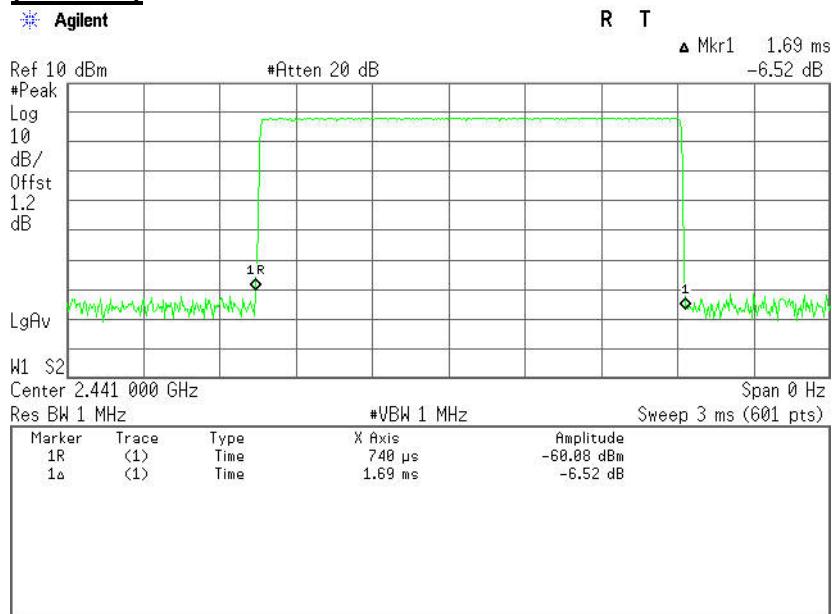




DH 5


(CH Mid)

Agilent

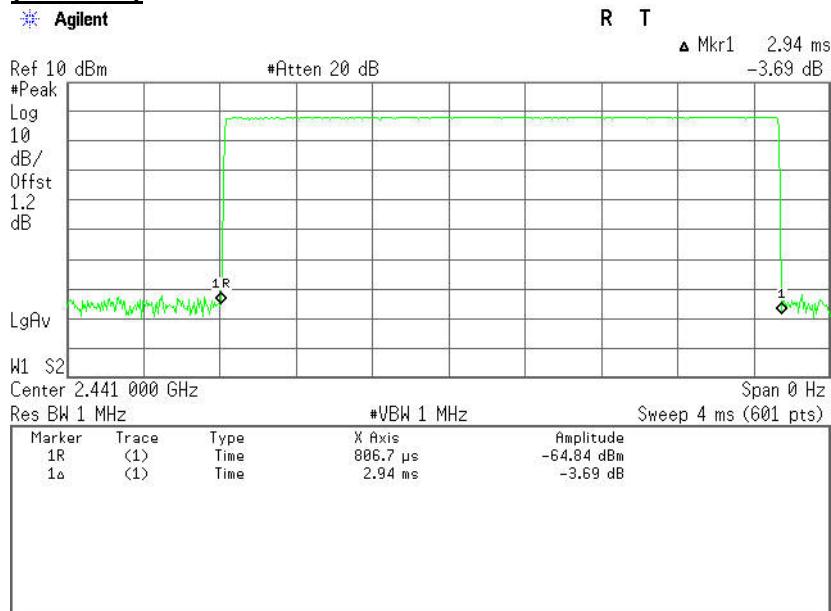


**Test Plot**
8DPSK**DH 1****(CH Mid)**

Agilent

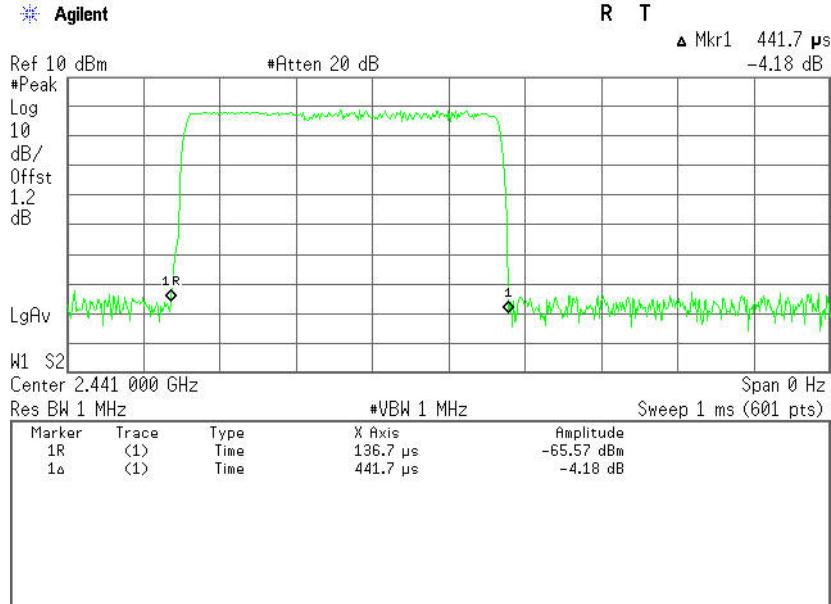**DH 3****(CH Mid)**

Agilent

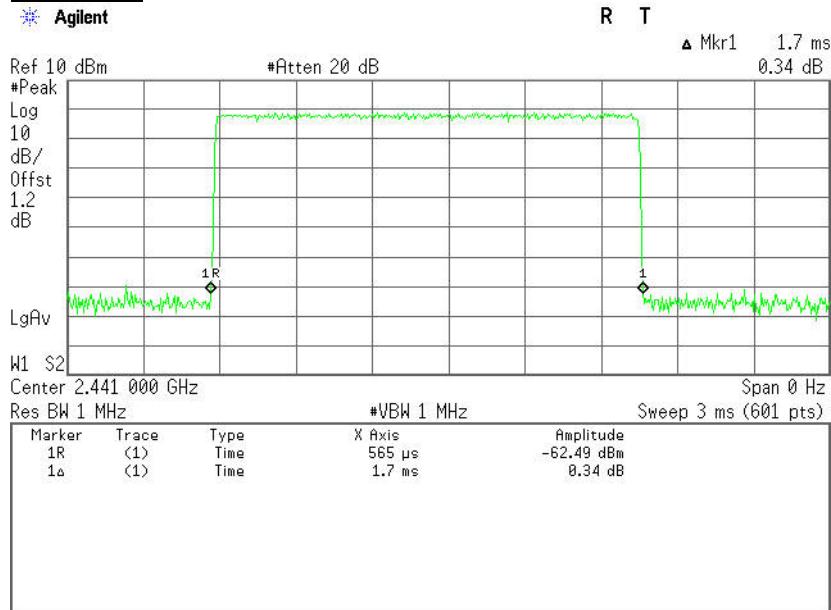




DH 5

(CH Mid)

Agilent

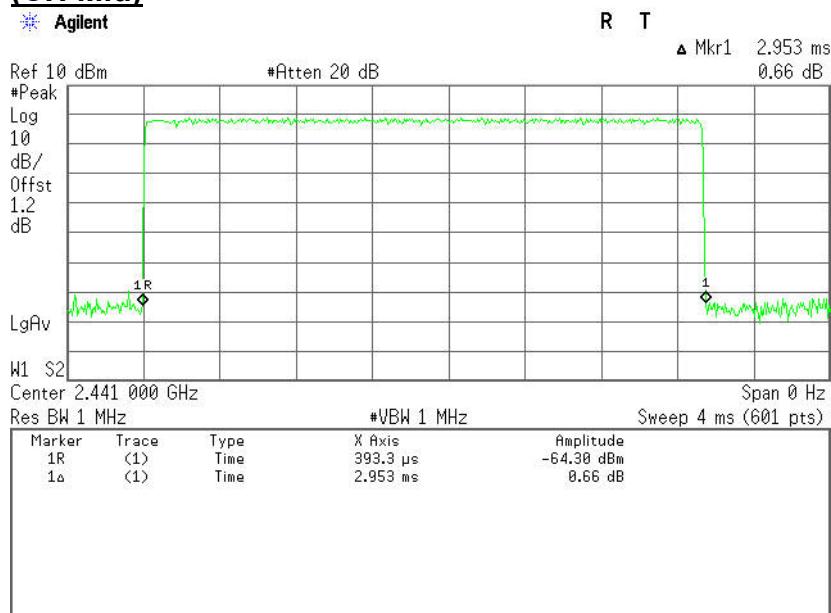



6.8 SPURIOUS EMISSIONS

6.8.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted




Test Plot (GFSK)

CH Low (2.31GHz ~2.45GHz)

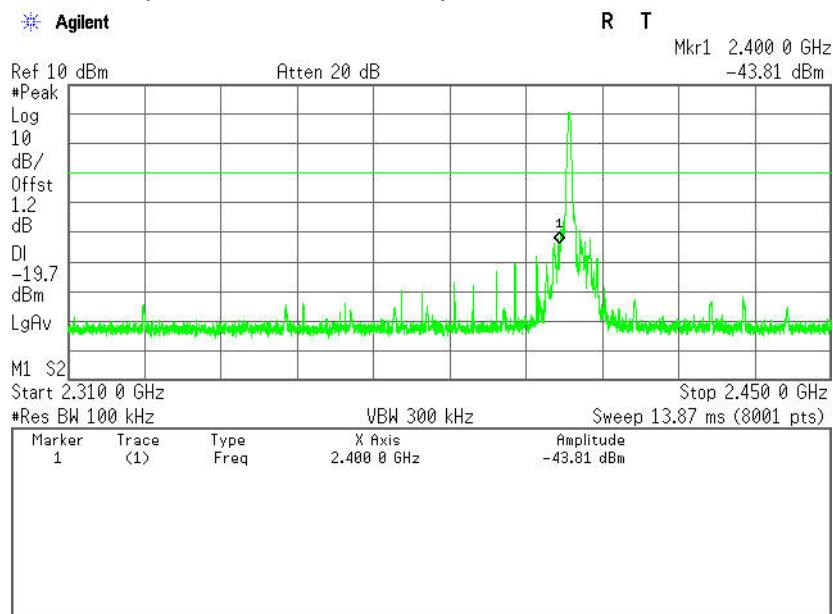


CH Low (30MHz ~3GHz)

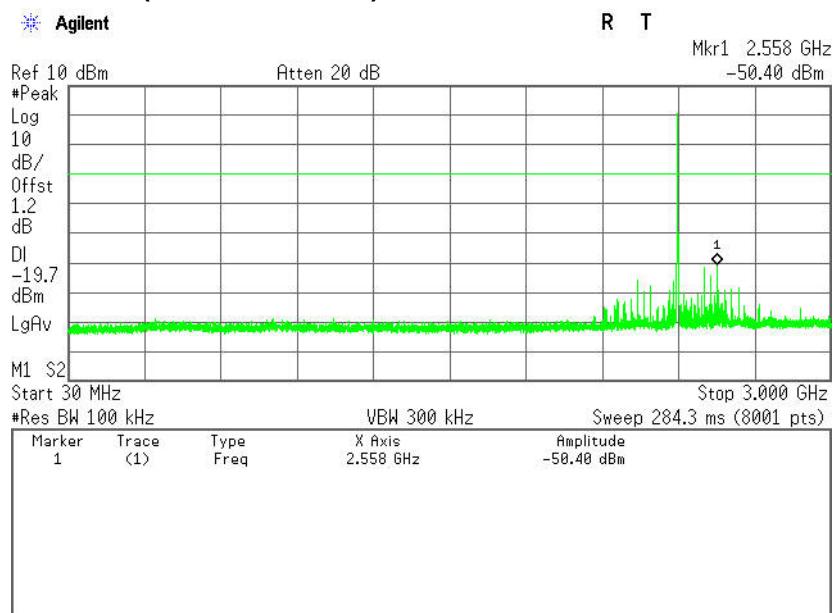




CH Low (3GHz ~ 10GHz)

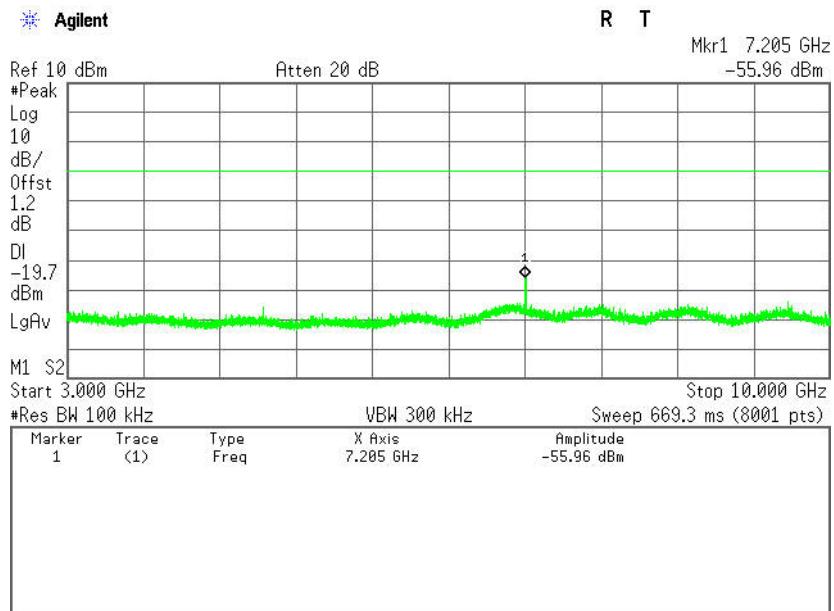




CH Low (10GHz ~ 18GHz)

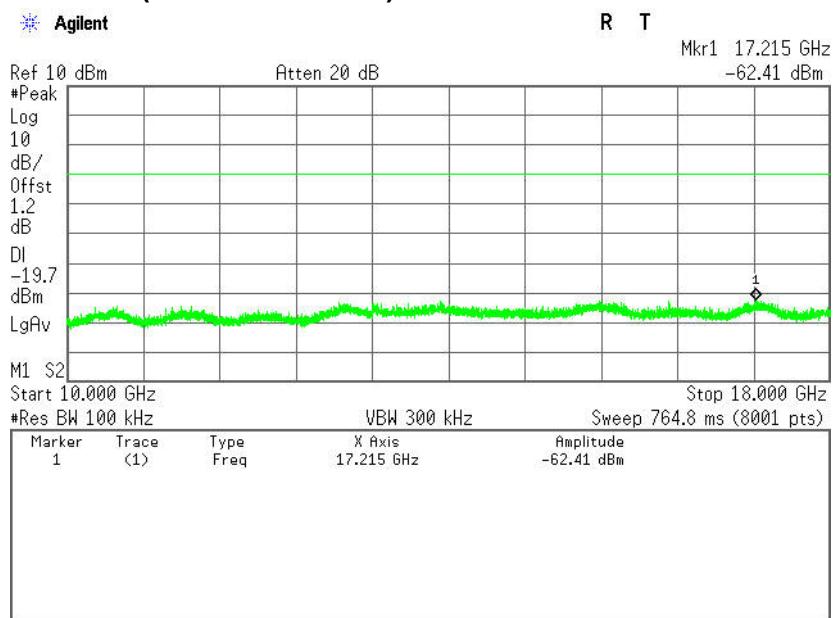




CH Low (18GHz ~ 25GHz)

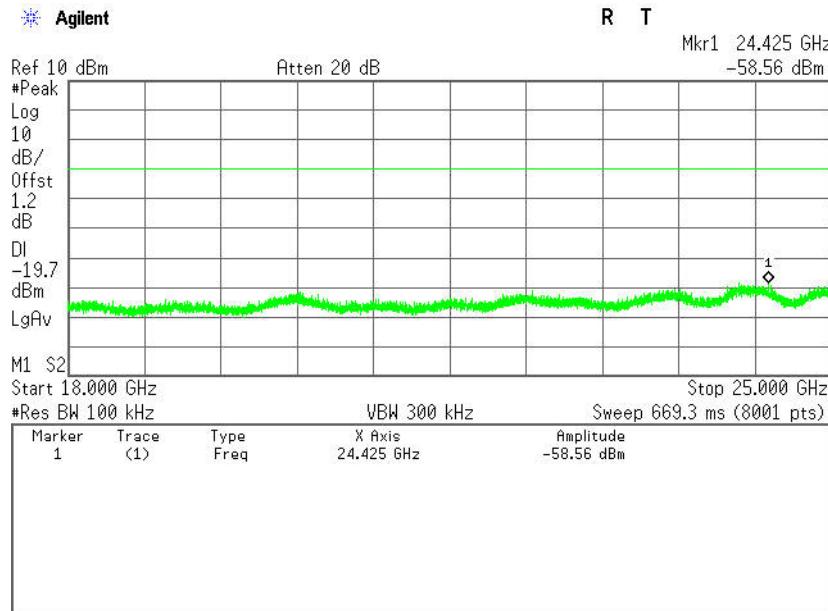

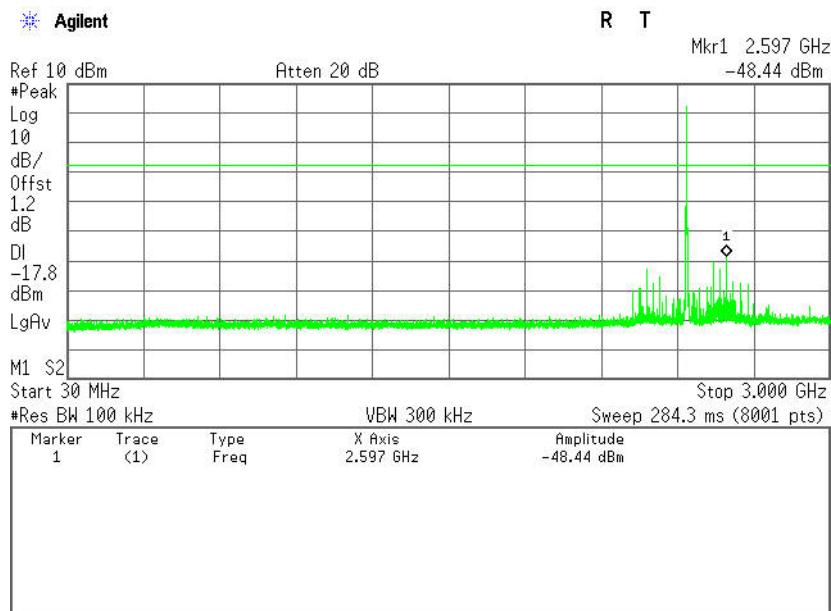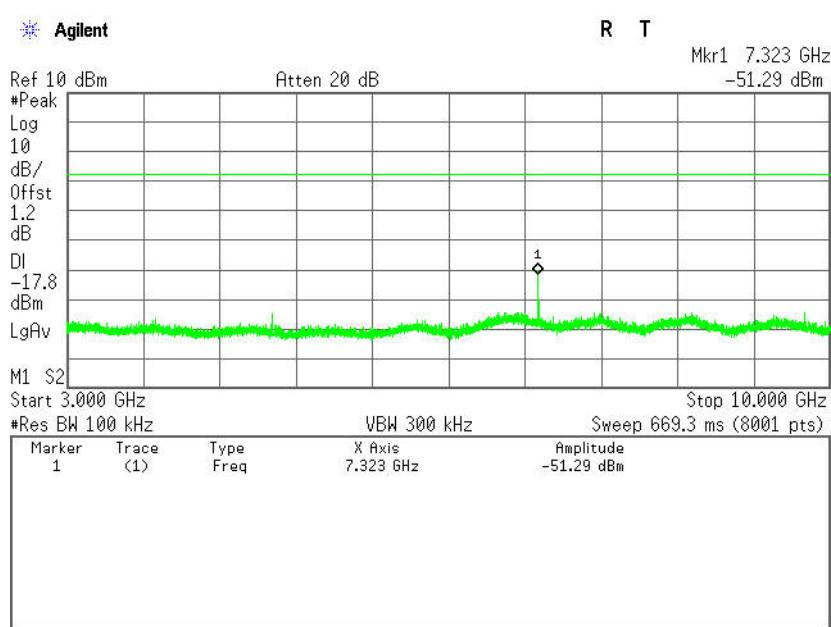**CH Mid (30MHz ~3GHz)****CH Mid (3GHz ~10GHz)**




CH Mid (3GHz ~10GHz)

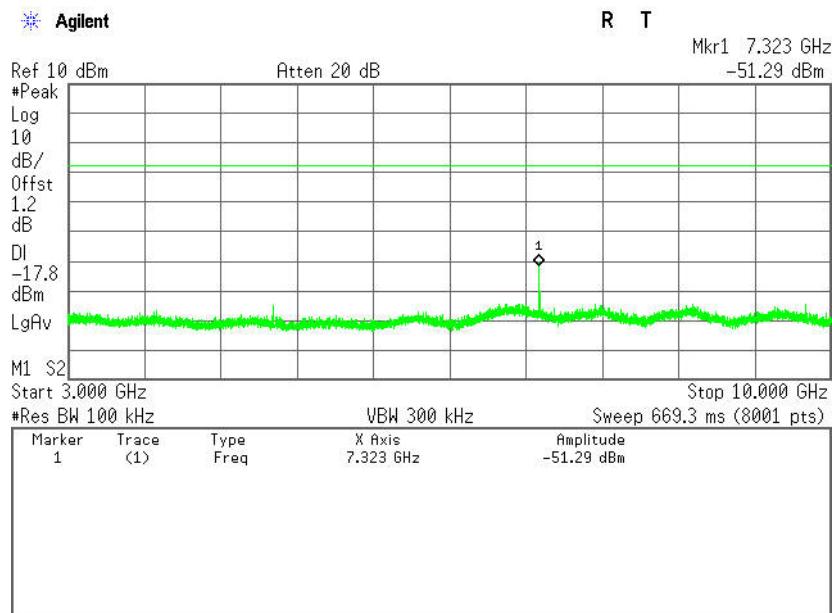




CH Mid (10GHz ~ 18GHz)

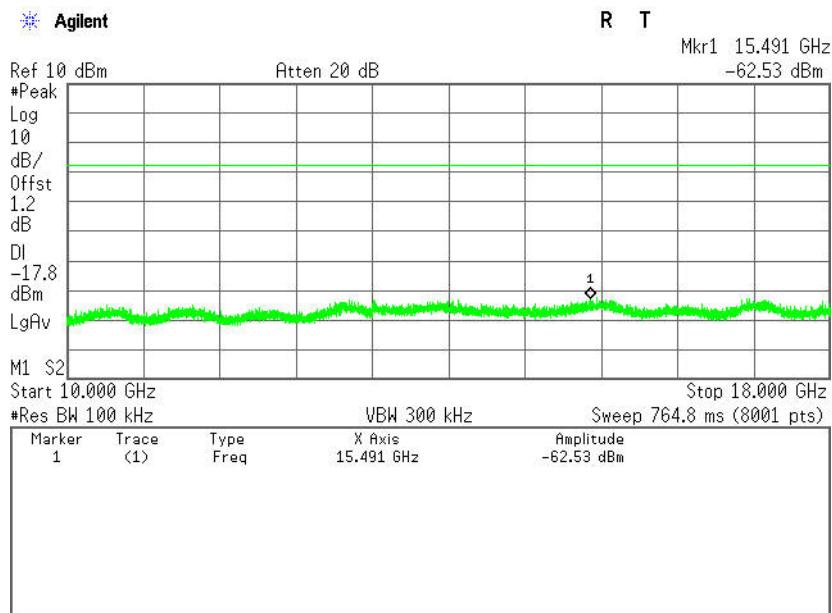


CH Mid (18GHz ~ 25GHz)

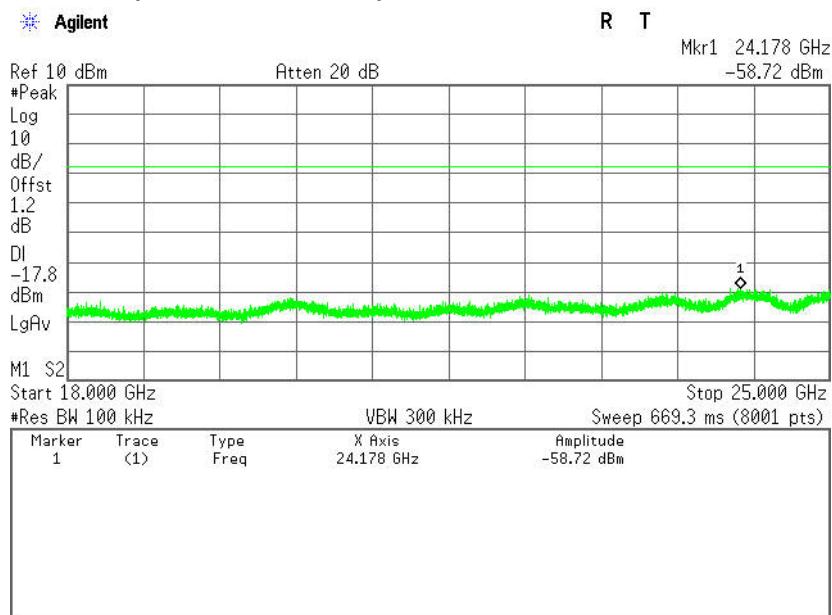




CH High (2.45GHz ~ 2.5GHz)

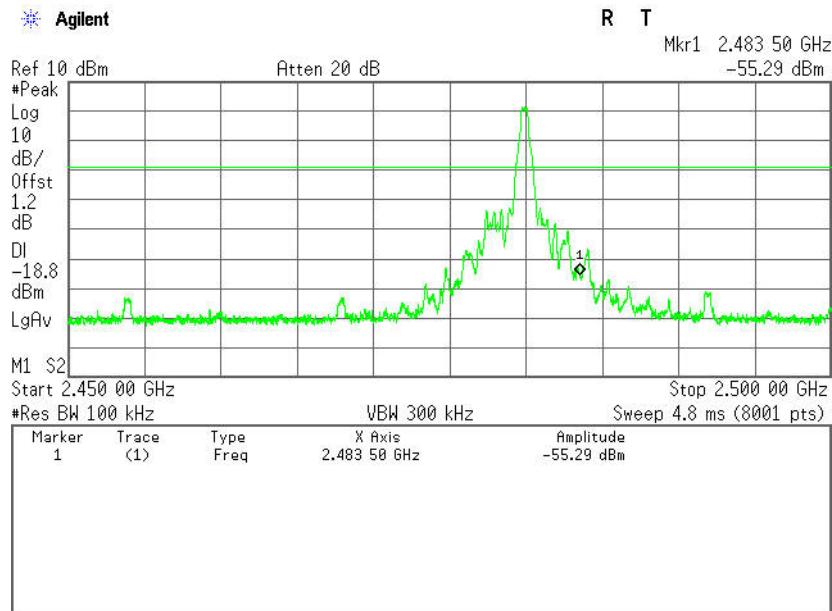


CH High (30MHz ~ 3GHz)

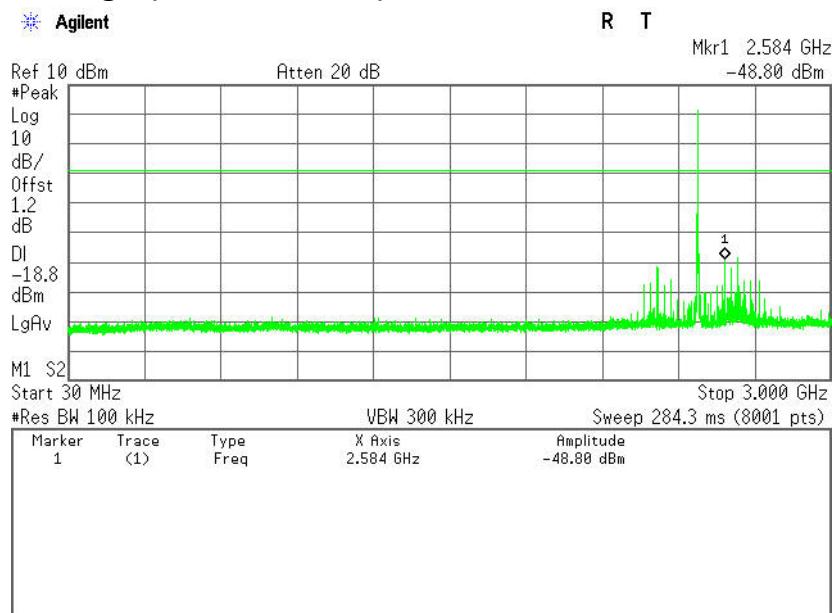




CH High (3GHz ~ 10GHz)

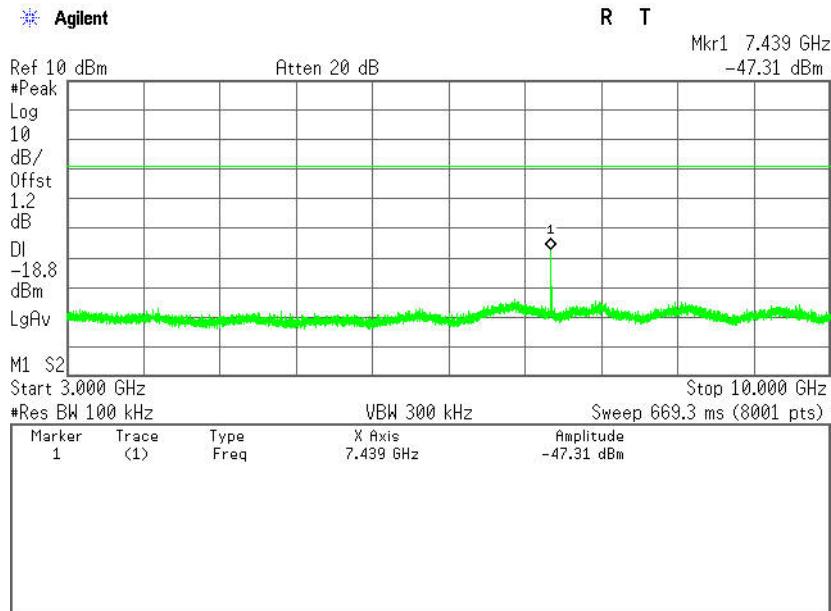


CH High (10GHz ~ 18GHz)

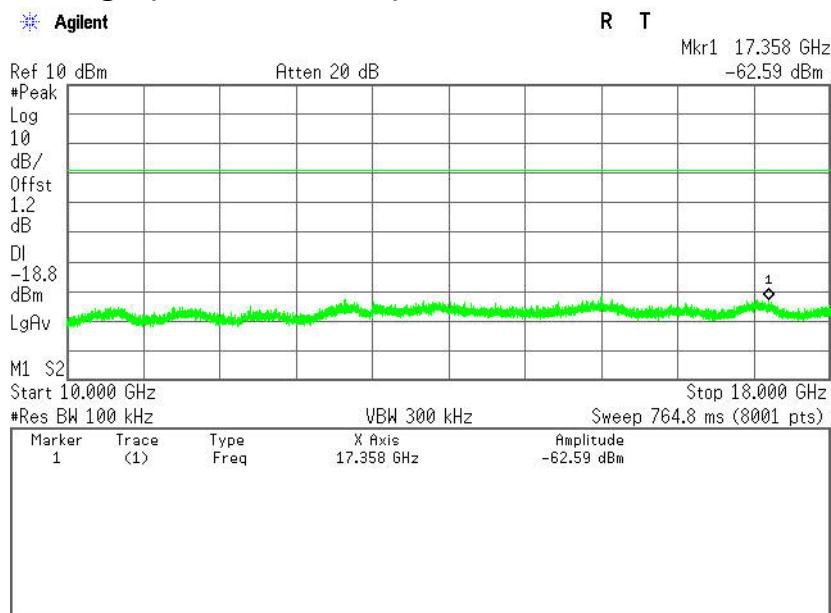




CH High (18GHz ~ 25GHz)

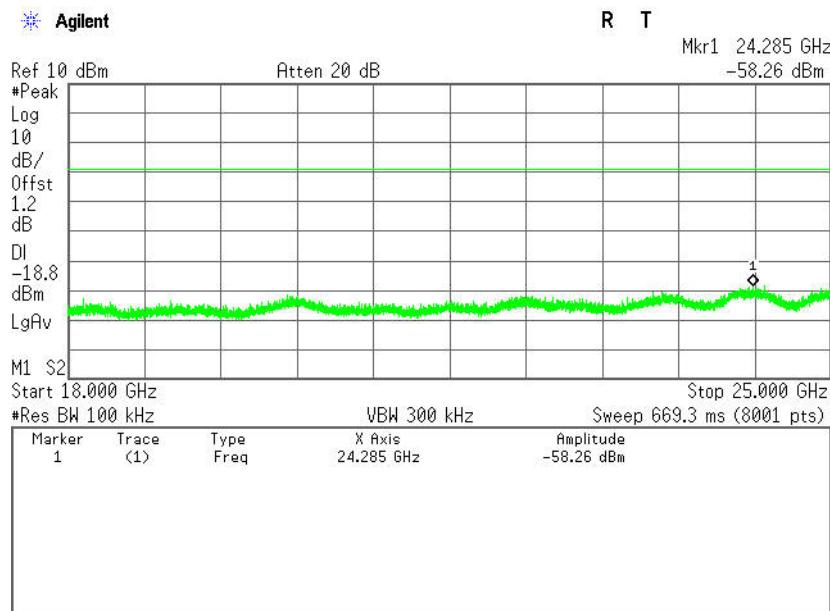




Test Plot (8DPSK)

CH Low (2.31GHz ~2.45GHz)

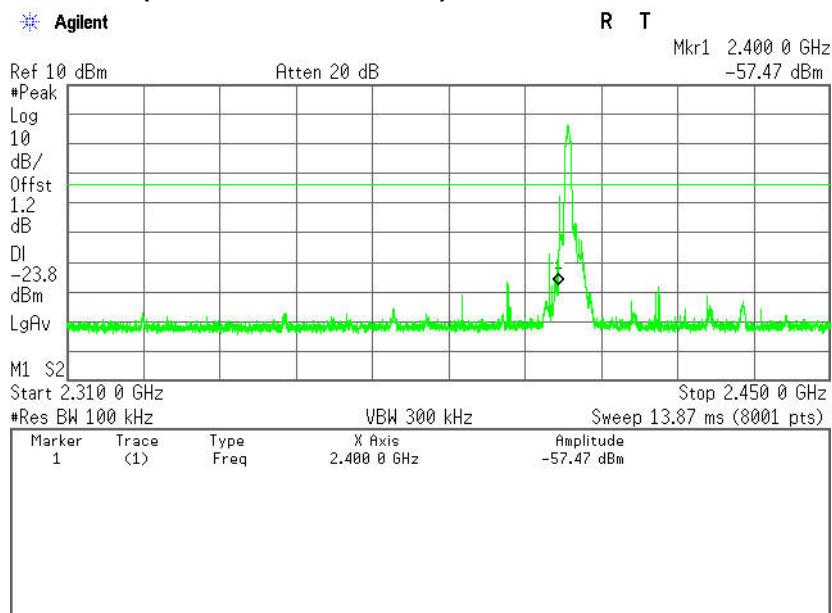


CH Low (30MHz ~3GHz)

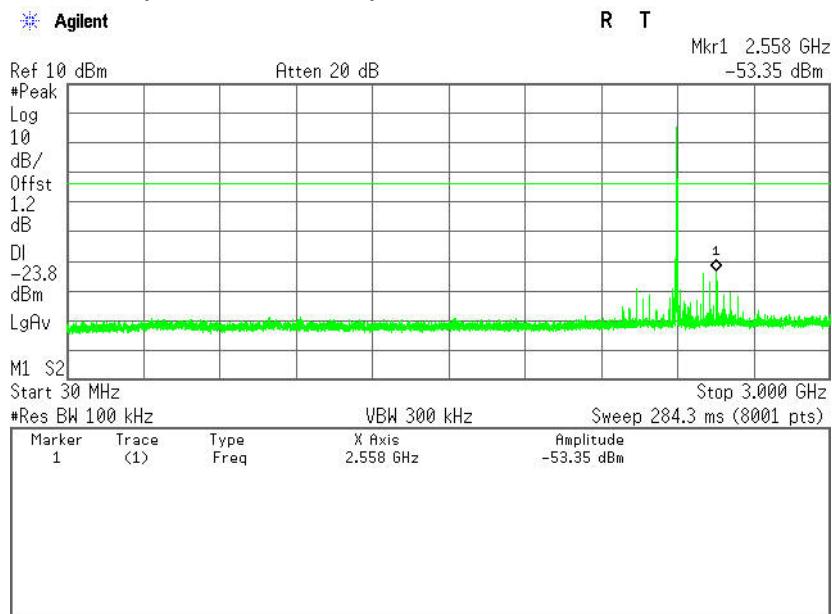




CH Low (3GHz ~ 10GHz)

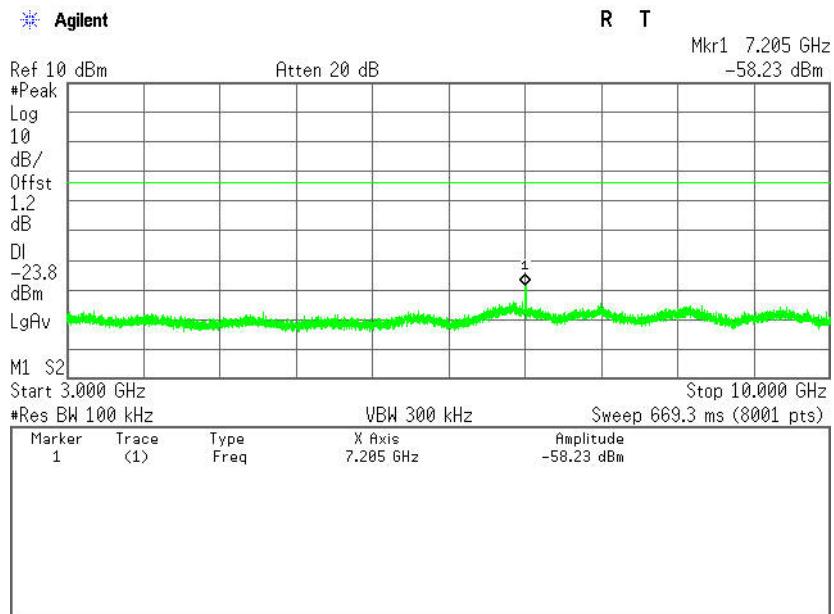


CH Low (10GHz ~ 18GHz)

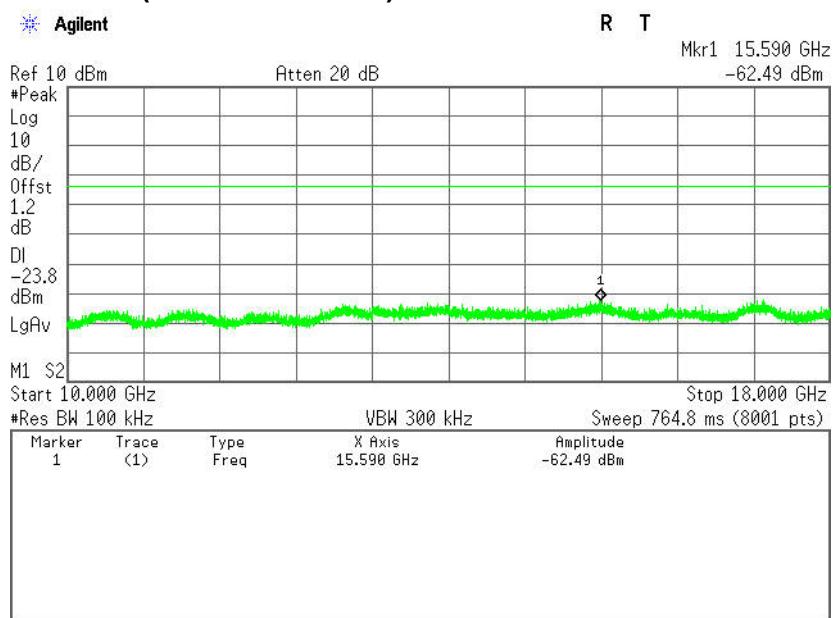




CH Low (18GHz ~ 25GHz)

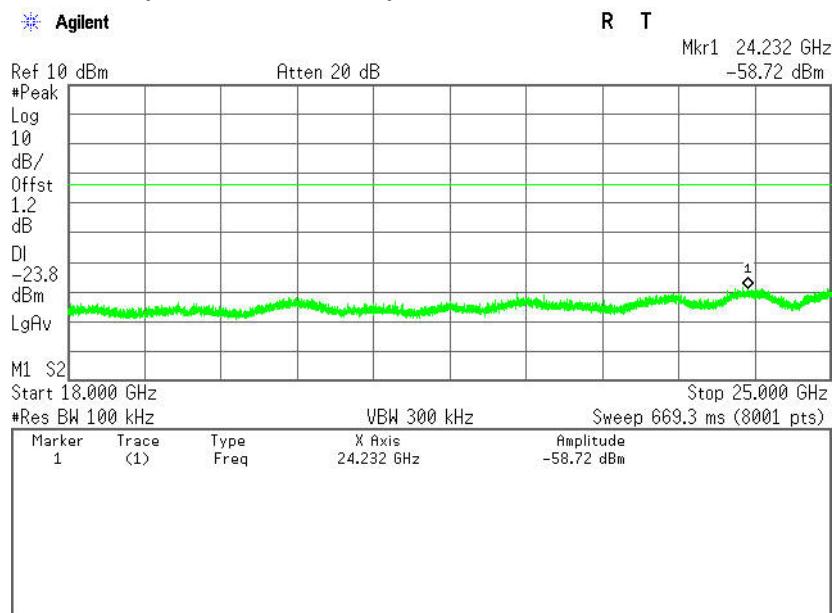




CH Mid (30MHz ~ 3GHz)

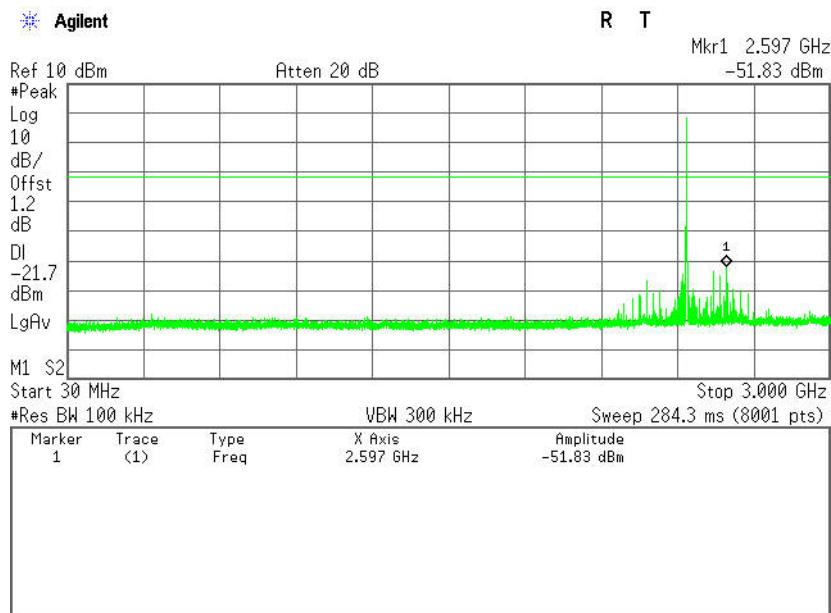


CH Mid (3GHz ~ 10GHz)

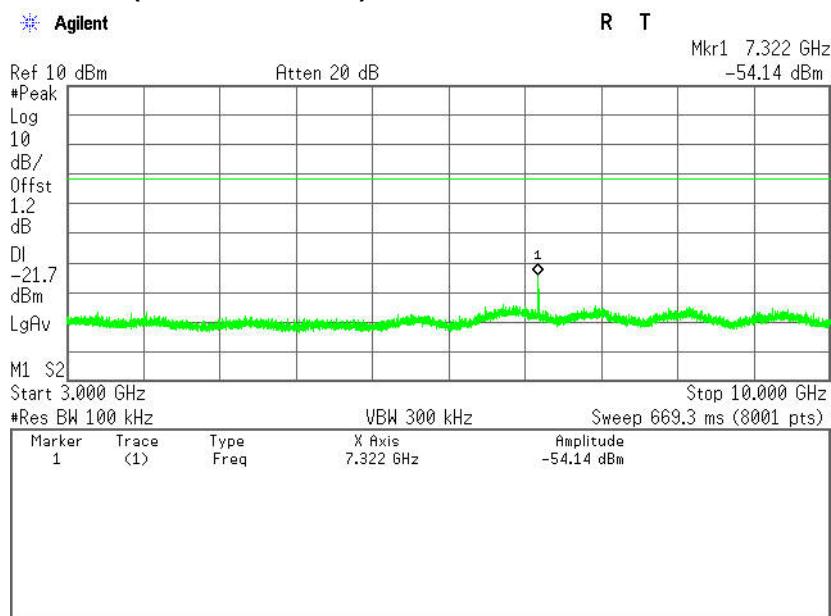




CH Mid (10GHz ~ 18GHz)

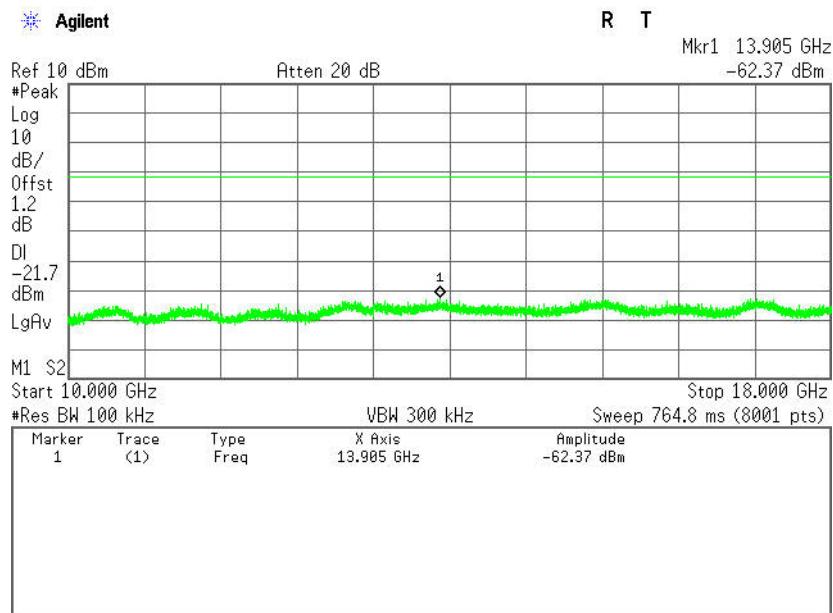


CH Mid (18GHz ~ 25GHz)

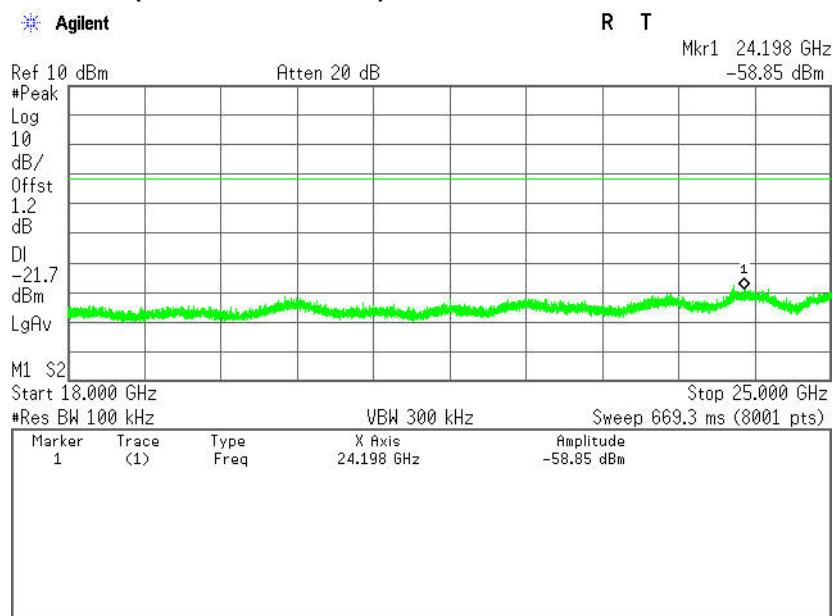




CH High (2.45GHz ~ 2.5GHz)

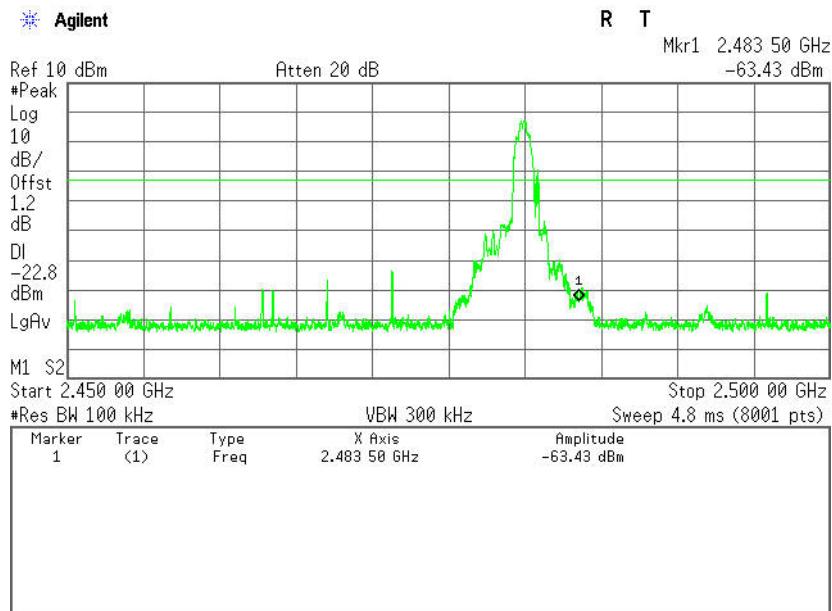


CH High (30MHz ~ 3GHz)

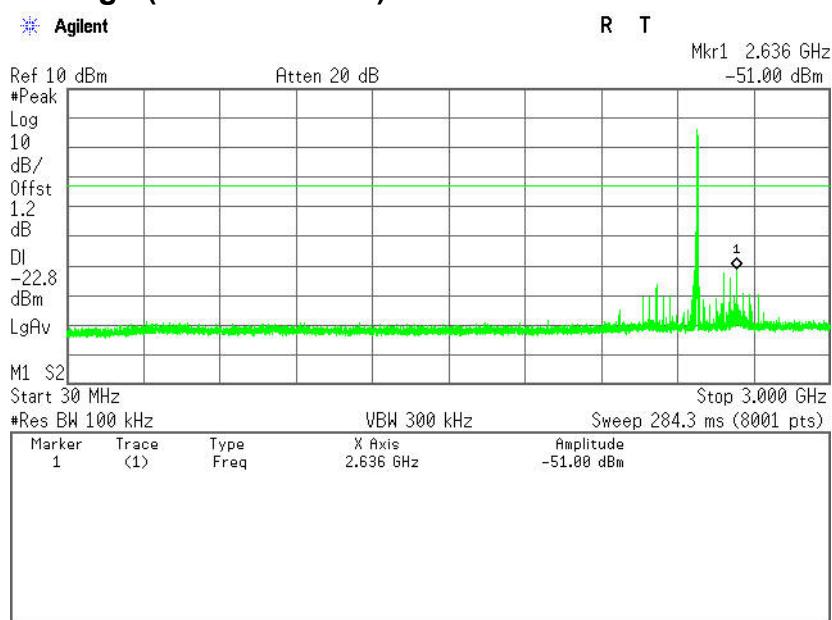




CH High (3GHz ~ 10GHz)

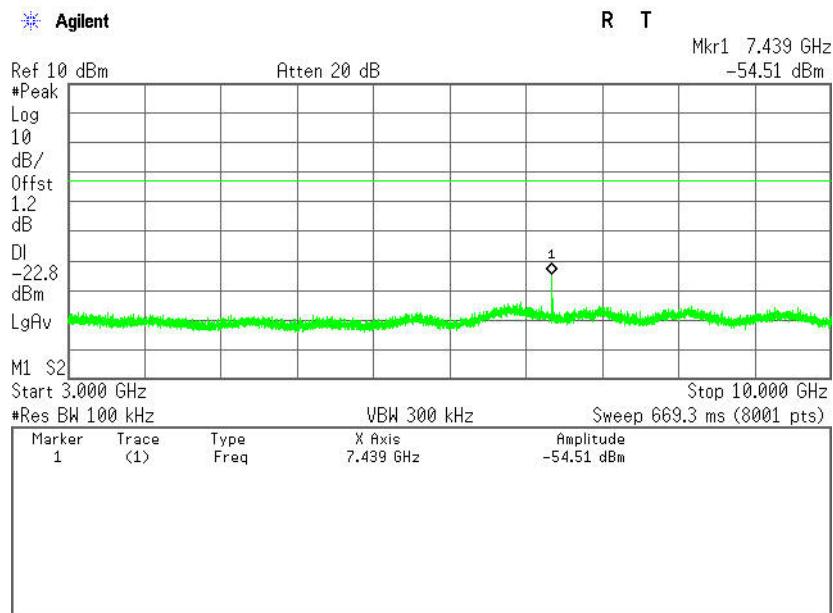


CH High (10GHz ~ 18GHz)

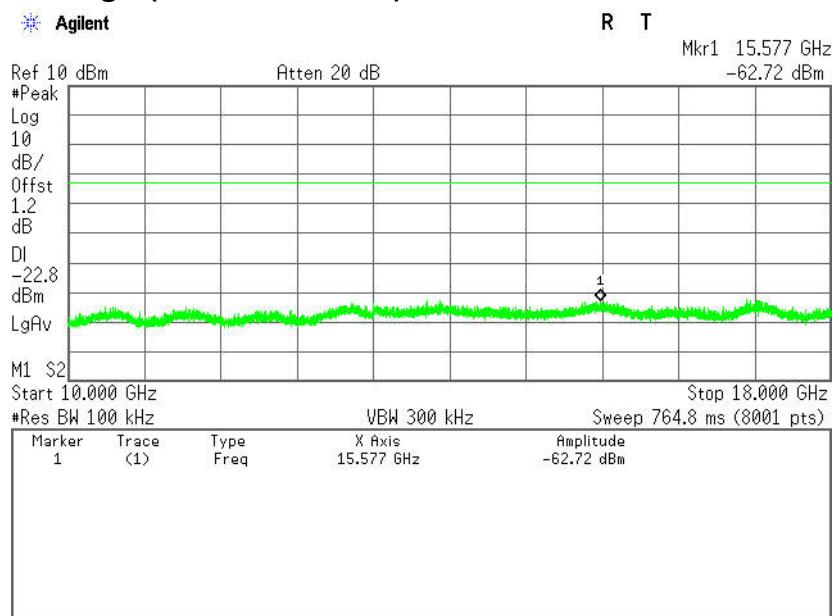



CH High (18GHz ~ 25GHz)

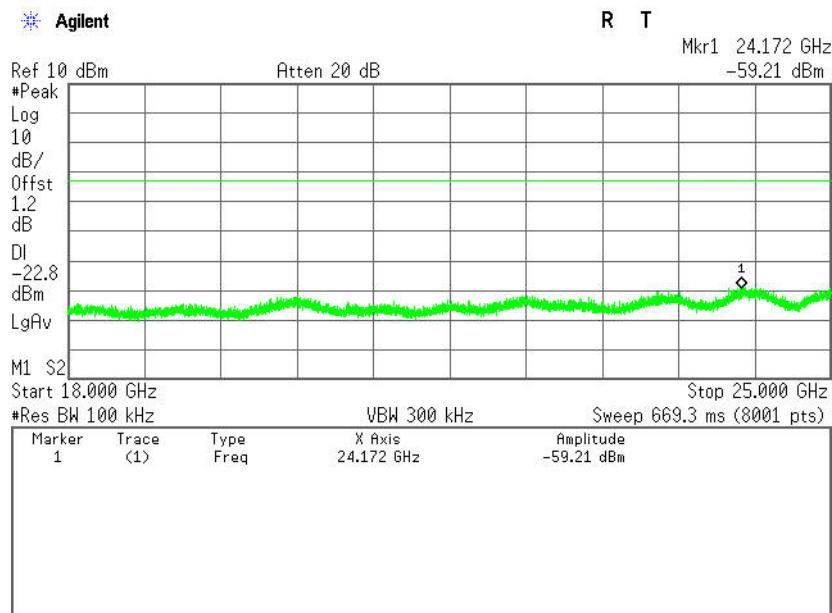



6.8.2. RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A, R, A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


Remark: Each piece of equipment is scheduled for calibration once a year.


TEST CONFIGURATION

Below 30MHz

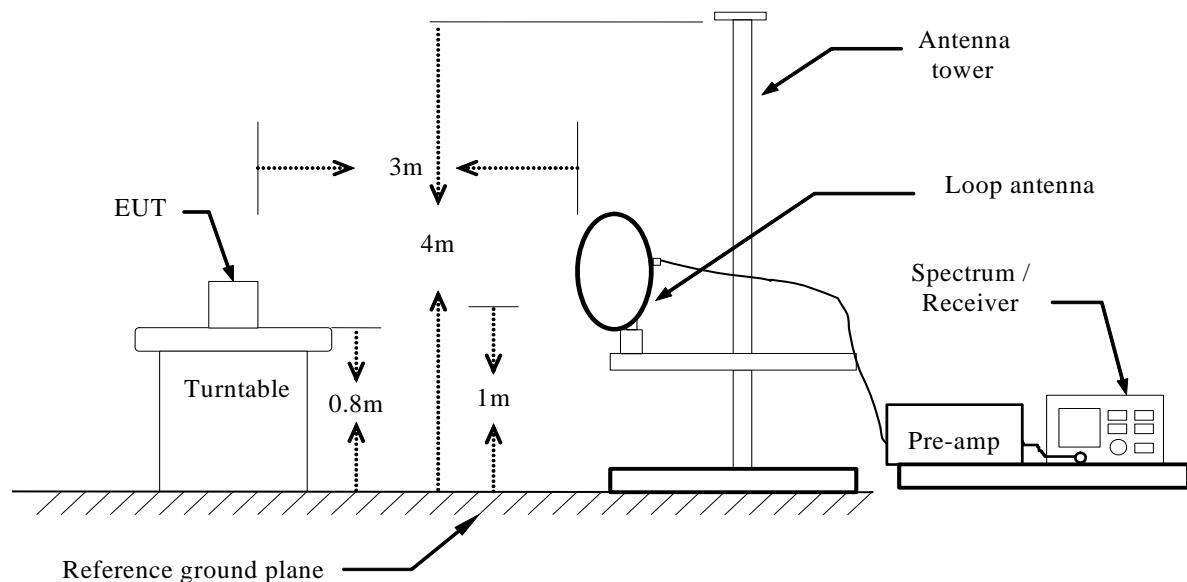

Below 1 GHz

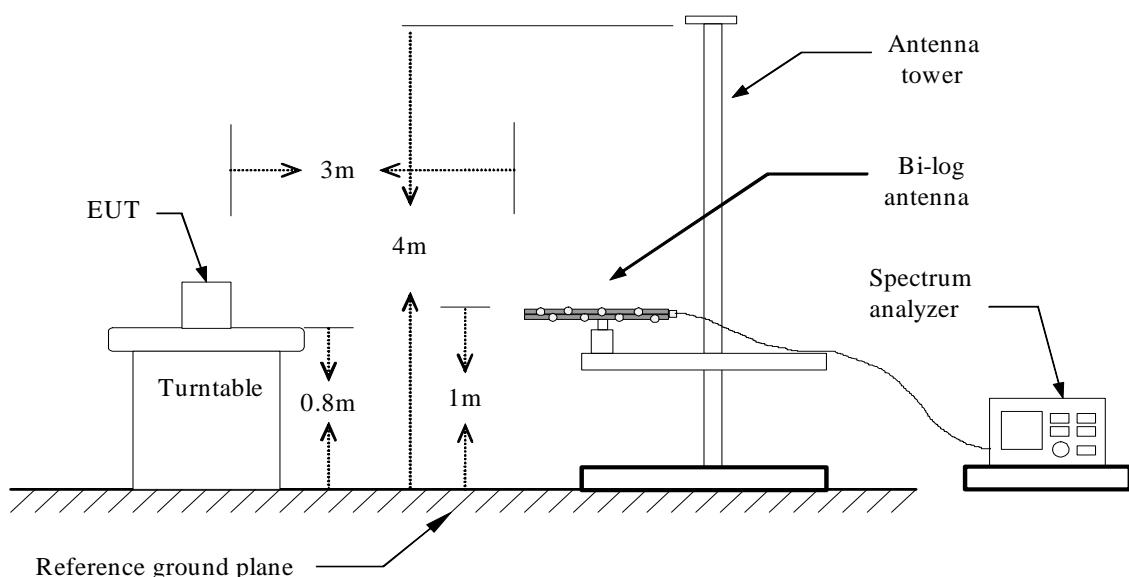

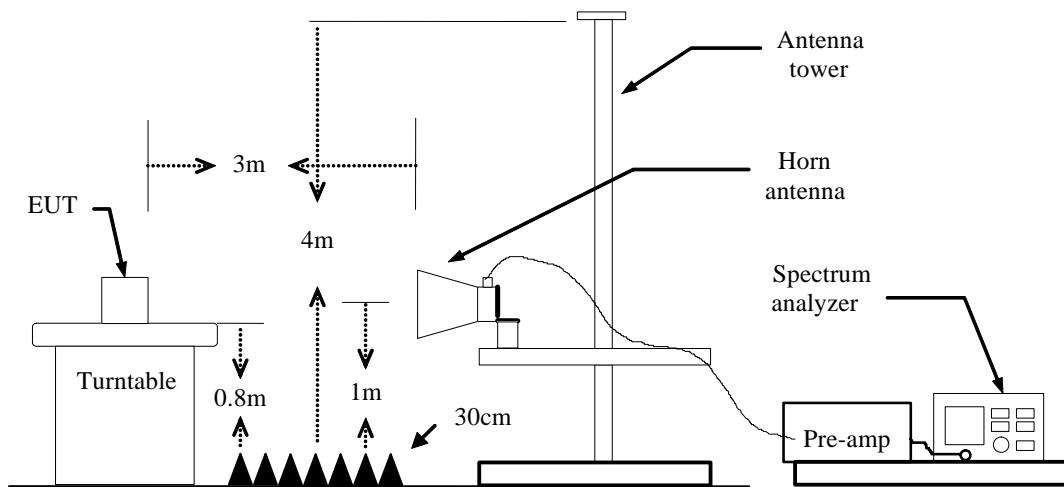Above 1 GHz



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: TX


Temperature: 24°C

Humidity: 52% RH

Test Date: November 13, 2013

Tested by: Sunday Hu

Polarity: Vertical

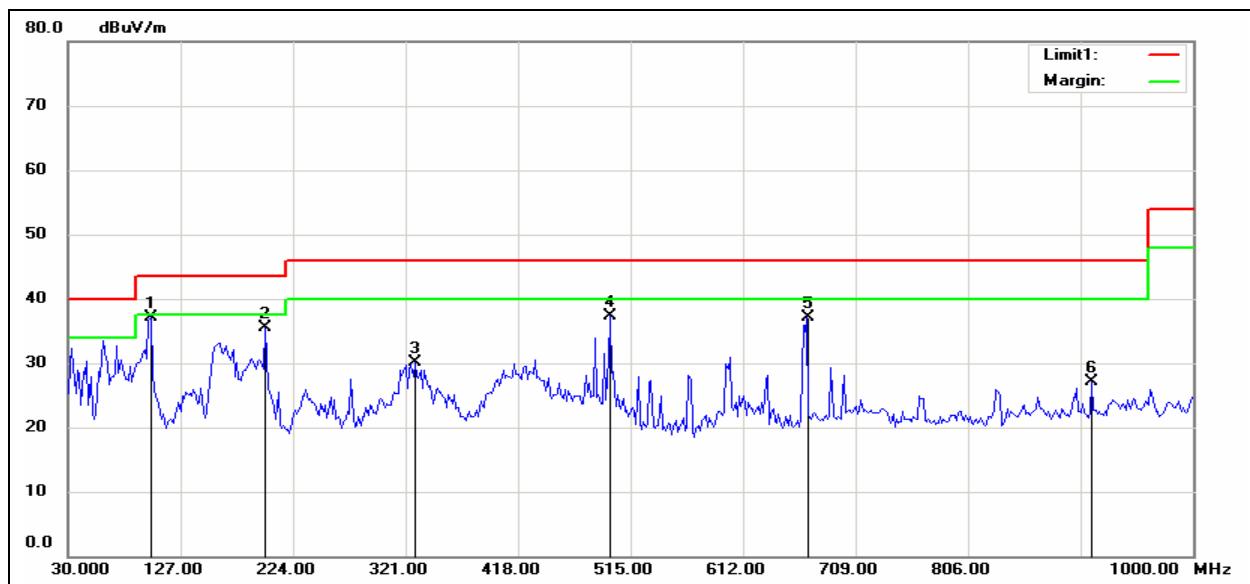

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
101.1333	59.35	-22.33	37.02	43.50	-6.48	V	QP
199.7500	54.14	-18.72	35.42	43.50	-8.08	V	QP
329.0833	47.64	-17.48	30.16	46.00	-15.84	V	QP
497.2167	51.50	-14.27	37.23	46.00	-8.77	V	QP
666.9667	48.42	-11.37	37.05	46.00	-8.95	V	QP
912.7000	36.49	-9.35	27.14	46.00	-18.86	V	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.


Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz
Reading (dB μ V) = Receiver reading
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain
Actual FS (dB μ V/m) = Reading (dB μ V) + Corr. Factor (dB/m)
Limit (dB μ V/m) = Limit stated in standard
Margin(dB) = Measured (dB μ V/m) – Limits (dB μ V/m)
Antenna Pole(V/H) = Current carrying line of reading



Operation Mode: TX
Temperature: 24°C
Humidity: 52% RH

Test Date: November 13, 2013
Tested by: Sunday Hu
Polarity: Horizontal

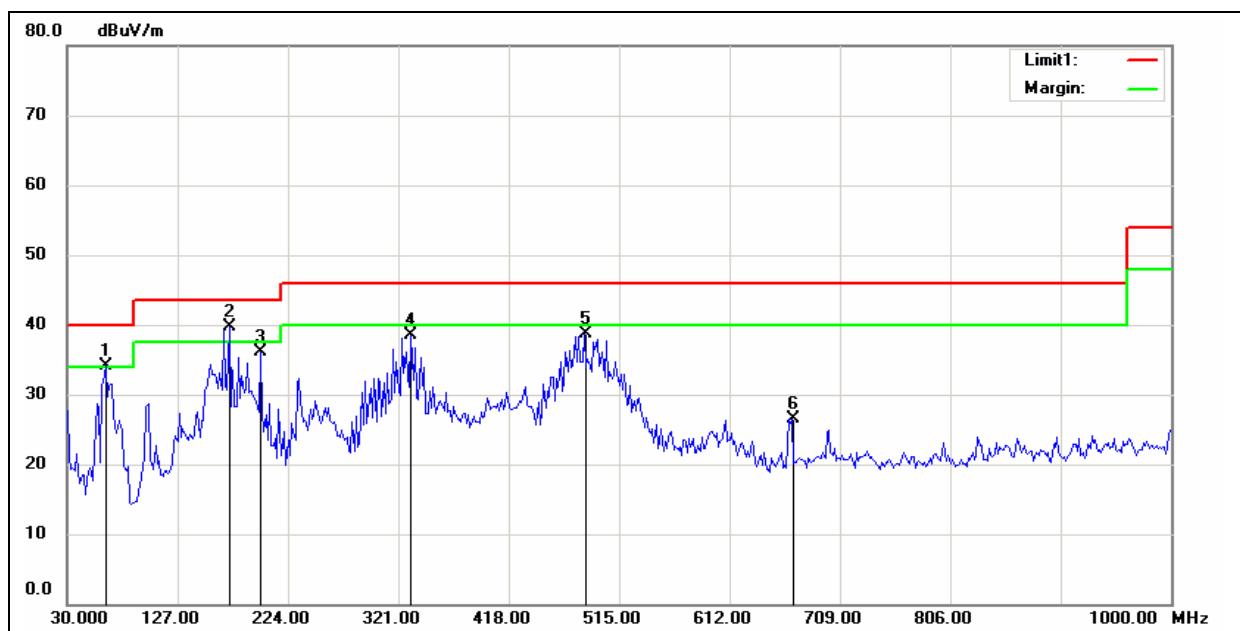

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
63.9500	56.05	-21.95	34.10	40.00	-5.90	H	QP
172.2666	58.47	-18.71	39.76	43.50	-3.74	H	QP
199.7500	54.84	-18.72	36.12	43.50	-7.38	H	QP
332.3167	55.99	-17.49	38.50	46.00	-7.50	H	QP
484.2833	53.21	-14.60	38.61	46.00	-7.39	H	QP
666.9667	37.96	-11.37	26.59	46.00	-19.41	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz
Reading (dB μ V) = Receiver reading
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain
Actual FS (dB μ V/m) = Reading (dB μ V) + Corr. Factor (dB/m)
Limit (dB μ V/m) = Limit stated in standard
Margin(dB) = Measured (dB μ V/m) – Limits (dB μ V/m)
Antenna Pole(V/H) = Current carrying line of reading

**Above 1 GHz****GFSK**

Operation Mode: TX(CH Low)
Temperature: 24°C
Humidity: 52% RH

Test Date: November 13, 2013
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	49.95	-8.77	41.18	74.00	-32.82	V	peak
1600.0000	50.94	-8.68	42.26	74.00	-31.74	V	peak
3145.0000	45.61	-4.13	41.48	74.00	-32.52	V	peak
3895.0000	45.46	-2.51	42.95	74.00	-31.05	V	peak
4390.0000	44.69	-0.86	43.83	74.00	-30.17	V	peak
5260.0000	44.78	1.54	46.32	74.00	-27.68	V	peak
<hr/>							
1195.0000	51.31	-8.77	42.54	74.00	-31.46	H	peak
1600.0000	49.99	-8.68	41.31	74.00	-32.69	H	peak
3040.0000	46.40	-4.21	42.19	74.00	-31.81	H	peak
3745.0000	45.24	-2.63	42.61	74.00	-31.39	H	peak
4285.0000	44.57	-1.26	43.31	74.00	-30.69	H	peak
4885.0000	43.63	0.80	44.43	74.00	-29.57	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON)
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** November 13, 2013**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	50.95	-8.77	42.18	74.00	-31.82	V	peak
3280.0000	45.72	-4.05	41.67	74.00	-32.33	V	peak
3895.0000	45.96	-2.51	43.45	74.00	-30.55	V	peak
4570.0000	43.97	-0.51	43.46	74.00	-30.54	V	peak
5875.0000	43.36	2.90	46.26	74.00	-27.74	V	peak
6700.0000	44.33	5.16	49.49	74.00	-24.51	V	peak
3040.0000	46.40	-4.21	42.19	74.00	-31.81	H	peak
3910.0000	45.56	-2.51	43.05	74.00	-30.95	H	peak
5020.0000	43.72	1.34	45.06	74.00	-28.94	H	peak
5845.0000	44.02	2.85	46.87	74.00	-27.13	H	peak
6490.0000	43.61	4.51	48.12	74.00	-25.88	H	peak
7450.0000	43.07	7.63	50.70	74.00	-23.30	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON)
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:**

November 9, 2013

Temperature: 24 °C**Tested by:**

Sunday Hu

Humidity: 52% RH**Polarity:**

Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	50.75	-8.77	41.98	74.00	-32.02	V	peak
1600.0000	50.88	-8.68	42.20	74.00	-31.80	V	peak
2635.0000	50.68	-5.70	44.98	74.00	-29.02	V	peak
3640.0000	45.87	-2.91	42.96	74.00	-31.04	V	peak
4435.0000	43.93	-0.76	43.17	74.00	-30.83	V	peak
5620.0000	43.75	2.02	45.77	74.00	-28.23	V	peak
<hr/>							
1195.0000	51.40	-8.77	42.63	74.00	-31.37	H	peak
1420.0000	48.32	-7.92	40.40	74.00	-33.60	H	peak
2995.0000	46.15	-4.26	41.89	74.00	-32.11	H	peak
3895.0000	46.44	-2.51	43.93	74.00	-30.07	H	peak
4555.0000	44.11	-0.54	43.57	74.00	-30.43	H	peak
4945.0000	45.06	1.07	46.13	74.00	-27.87	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON).
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**8DPSK****Operation Mode:** TX(CH Low)**Test Date:** November 13, 2013**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	50.15	-8.77	41.38	74.00	-32.62	V	peak
1600.0000	50.01	-8.68	41.33	74.00	-32.67	V	peak
2560.0000	48.50	-5.98	42.52	74.00	-31.48	V	peak
3355.0000	46.76	-4.02	42.74	74.00	-31.26	V	peak
3610.0000	46.91	-2.98	43.93	74.00	-30.07	V	peak
4735.0000	43.65	0.13	43.78	74.00	-30.22	V	peak
<hr/>							
1195.0000	51.09	-8.77	42.32	74.00	-31.68	H	peak
1600.0000	47.90	-8.68	39.22	74.00	-34.78	H	peak
3445.0000	45.39	-3.78	41.61	74.00	-32.39	H	peak
3850.0000	44.81	-2.50	42.31	74.00	-31.69	H	peak
4285.0000	44.79	-1.26	43.53	74.00	-30.47	H	peak
5305.0000	44.08	1.53	45.61	74.00	-28.39	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON).
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dB μ V/m) = Limit stated in standard
 Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** November 13, 2013**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	50.15	-8.77	41.38	74.00	-32.62	V	peak
3610.0000	47.41	-2.98	44.43	74.00	-29.57	V	peak
4750.0000	44.12	0.19	44.31	74.00	-29.69	V	peak
5785.0000	43.86	2.72	46.58	74.00	-27.42	V	peak
6430.0000	44.69	4.34	49.03	74.00	-24.97	V	peak
6910.0000	43.38	5.89	49.27	74.00	-24.73	V	peak
<hr/>							
1195.0000	49.09	-8.77	40.32	74.00	-33.68	H	peak
3040.0000	45.58	-4.21	41.37	74.00	-32.63	H	peak
4285.0000	44.79	-1.26	43.53	74.00	-30.47	H	peak
5200.0000	43.08	1.55	44.63	74.00	-29.37	H	peak
5755.0000	43.56	2.59	46.15	74.00	-27.85	H	peak
6745.0000	43.44	5.31	48.75	74.00	-25.25	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON).
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** November 13, 2013**Temperature:** 24 °C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1060.0000	56.42	-9.85	46.57	74.00	-27.43	V	peak
1195.0000	52.42	-8.77	43.65	74.00	-30.35	V	peak
1600.0000	51.71	-8.68	43.03	74.00	-30.97	V	peak
3775.0000	45.80	-2.55	43.25	74.00	-30.75	V	peak
4780.0000	44.84	0.32	45.16	74.00	-28.84	V	peak
5155.0000	44.30	1.50	45.80	74.00	-28.20	V	peak
1195.0000	51.68	-8.77	42.91	74.00	-31.09	H	peak
1600.0000	49.25	-8.68	40.57	74.00	-33.43	H	peak
2965.0000	46.58	-4.38	42.20	74.00	-31.80	H	peak
3895.0000	45.87	-2.51	43.36	74.00	-30.64	H	peak
4270.0000	44.72	-1.31	43.41	74.00	-30.59	H	peak
4945.0000	44.48	1.07	45.55	74.00	-28.45	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=PEAK-20LOG((ON+OFF)/ON).
5. Frequency (MHz) = Emission frequency in MHz
Reading (dB μ V/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dB μ V/m) = Limit stated in standard
Margin (dB) = Result (dB μ V/m) - Limit (dB μ V/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading



6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2013	04/19/2014
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD		EZ-EMC/ CCS-3A1-CE		

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

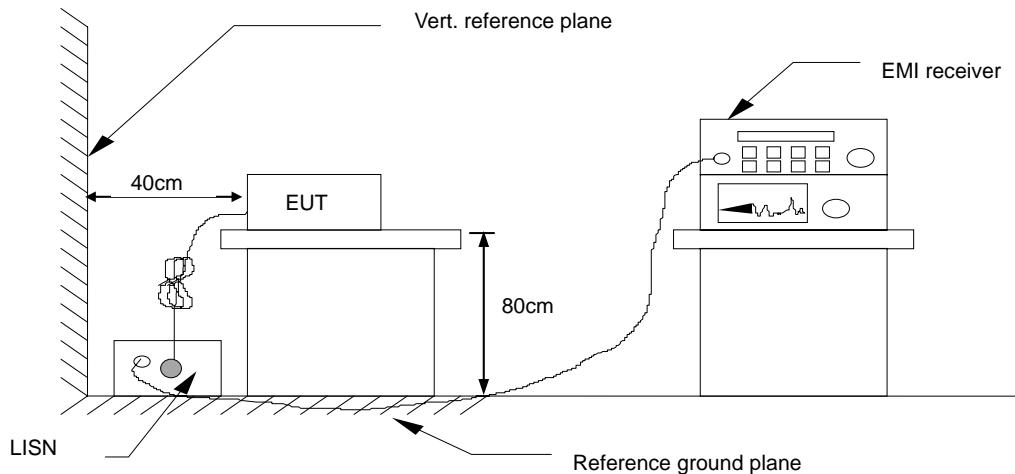

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data****Operation Mode:** Normal Operation**Test Date:** November 12, 2013**Temperature:** 26°C**Humidity:** 60% RH**Tested by:** Sunday Hu

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.2460	21.31	13.36	9.69	31.00	23.05	61.89	51.89	-30.89	-28.84	L1
0.3860	25.65	24.30	9.68	35.33	33.98	58.15	48.15	-22.82	-14.17	L1
0.6900	24.75	15.93	9.78	34.53	25.71	56.00	46.00	-21.47	-20.29	L1
1.1539	16.91	11.43	9.71	26.62	21.14	56.00	46.00	-29.38	-24.86	L1
3.1900	16.55	14.59	9.71	26.26	24.30	56.00	46.00	-29.74	-21.70	L1
11.9500	17.69	6.15	9.89	27.58	16.04	60.00	50.00	-32.42	-33.96	L1
<hr/>										
0.2460	19.81	11.36	9.77	29.58	21.13	61.89	51.89	-32.31	-30.76	L2
0.3700	24.12	14.69	9.72	33.84	24.41	58.50	48.50	-24.66	-24.09	L2
0.6900	24.43	16.23	9.69	34.12	25.92	56.00	46.00	-21.88	-20.08	L2
1.1580	15.76	8.93	9.79	25.55	18.72	56.00	46.00	-30.45	-27.28	L2
3.0860	17.30	10.64	9.75	27.05	20.39	56.00	46.00	-28.95	-25.61	L2
4.5380	20.18	16.43	9.77	29.95	26.20	56.00	46.00	-26.05	-19.80	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)