

Report on the Radio Testing
For
Cambium Networks Ltd
on
PMP 450m
Report no. TRA-029590-47-00B
29th September 2016

RF930

Report Number: TRA-029590-47-00B
Issue: B

REPORT ON THE RADIO TESTING OF A
Cambium Networks Ltd
PMP 450m
WITH RESPECT TO SPECIFICATION
FCC 47CFR Subpart E

TEST DATE: 10th August - 1st September 2016

Written by: D Winstanley

D Winstanley
Radio Senior Test Engineer

Approved by:

J Charters
Department Manager - Radio

Date: 29th September 2016

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF930

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	26th September 2016	Original
B	29 th September 2016	Correction of model number error

2 Summary

TEST REPORT NUMBER:	TRA-029590-47-00B
WORKS ORDER NUMBER	TRA-029590-04
PURPOSE OF TEST:	Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.
TEST SPECIFICATION:	47CFR15 Subpart E
EQUIPMENT UNDER TEST (EUT):	PMP 450m
FCC IDENTIFIER:	QWP-50450M
MANUFACTURER/AGENT:	Cambium Networks Ltd
ADDRESS:	Unit B2 Linhay Business Park Eastern Road Ashburton Devon TQ13 7UP United Kingdom
CLIENT CONTACT:	Don Reid ☎ 01364 655667 ✉ don.reid@cambiumnetworks.com
ORDER NUMBER:	Not Applicable
TEST DATE:	10th August - 1st September 2016
TESTED BY:	A Tosif, S Hodgkinson, D Winstanley Element

2.1 Test Summary

Test Method and Description		Requirement Clause	Applicable to this equipment	Result / Note
		47CFR15		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.205	X	Pass
AC power line conducted emissions		15.207	X	Pass
Occupied bandwidth		15.407(e)	X	Pass
Output power	EIRP	15.407(a)	X	Pass
	PSD		X	
	RPE		X	
Conducted / radiated RF power out-of-band		15.407(b) 15.209	X	Pass
Duty cycle		15.35(c)	☐	Pass
TPC and DFS		15.407(h)	☐	N/A Note 1
U-NII detection bandwidth		15.407(h)(2)	☐	N/A Note 1
CAC		15.407(h)(2)(ii)	☐	N/A Note 1
In-service monitoring		15.407(h)(2)(iii) & 15.407(h)(2)(iv)	☐	N/A Note 1
Statistical performance check		-	☐	N/A Note 1

Notes:

Note 1: This report covers operation only in the 5.725GHz – 5.850GHz band, therefore these tests are not applicable.

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set-up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the applied standards have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	6
4	Introduction	8
5	Test Specifications	9
5.1	Normative References	9
5.2	Deviations from Test Standards	9
5.3	Minimisation of reflections	9
5.4	Open area test site information	10
6	Glossary of Terms	11
7	Equipment Under Test	12
7.1	EUT Identification	12
7.2	System Equipment	12
7.3	EUT Mode of Operation	13
7.3.1	Transmission	13
7.4	EUT Radio Frequency Parameters	14
7.4.1	General	14
7.4.2	Antennas	14
7.4.3	Product specific declarations	14
7.5	EUT Description	15
8	Modifications	16
9	EUT Test Setup	17
9.1	Block Diagram	17
9.2	General Set-up Photograph	18
10	General Technical Parameters	20
10.1	Normal Conditions	20
10.2	Varying Test Conditions	20
11	Radiated emissions	21
11.1	Definitions	21
11.2	Test Parameters	21
11.3	Test Method	22
11.4	Test Equipment	23
11.5	Test Results	24
12	AC power-line conducted emissions	30
12.1	Definition	30
12.2	Test Parameters	30
12.3	Test Method	30
12.4	Test Equipment	31
12.5	Test Results	32
13	Occupied Bandwidth	34
13.1	Definition	34
13.2	Test Parameters	34
13.3	Test Method	34
13.4	Test Equipment	35
13.5	Test Results	36
14	Maximum conducted output power	42
14.1	Definition	42
14.2	Test Parameters	42
14.3	Test Method	43
14.4	Test Equipment	43
14.5	Test Results	44
15	Power spectral density	51
15.1	Definition	51
15.2	Test Parameters	51
15.3	Test Method	52
15.4	Test Equipment	52
15.5	Test Results	53
16	Out-of-band spurious emissions	60

16.1	Definition.....	60
16.2	Test Parameters	60
16.3	Test Limits	60
16.4	Test Method.....	61
16.5	Test Equipment	61
	Test Results	62
17	Measurement Uncertainty	74

4 Introduction

This report TRA-029590-47-00B presents the results of the Radio testing on a Cambium Networks Ltd, PMP 450m to specification 47CFR15 Radio Frequency Devices

The testing was carried out for Cambium Networks Ltd by Element, at the address(es) detailed below.

- | | | | |
|-------------------------------------|--|-------------------------------------|--|
| ☐ | Element Hull
Unit E
South Orbital Trading Park
Hedon Road
Hull
HU9 1NJ
UK | ☒ | Element Skelmersdale
Unit 1
Pendle Place
Skelmersdale
West Lancashire
WN8 9PN
UK |
| ☒ | 30 Meter Open Area Test Site
Persore Airfield,
Long Lane,
Throckmorton,
Worcs,
WR10 2JH
UK | | |

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

FCC Site Listing:

The test laboratory is accredited for the above sites under the US-EU MRA, Designation number UK0009.

ISED Registration Number(s):

Element Skelmersdale	3930B
Element Hull	3483A

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- KDB 789033 D02 General UNII Test Procedures
- KDB 662911 D01 Multiple Transmitter Output

5.2 Deviations from Test Standards

Maximum conducted output power

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

Spectral Power Density

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

5.3 Minimisation of reflections

Due to the use of a 30 meter open area test site with no RF absorbing material for the measurement of the fundamental attempts were made to minimise the influence of reflections.

To minimise the reflections the following precautions were taken.


Test performed over a grassed area to try and ensure no sub surface artefacts produce reflections.

The EUT was raised to a height of 4 meters above the ground plane to help reduce the effects of any reflected paths at 30 meters

The EUTs antennas are set with a 2 degree down tilt, and an 8 degree beam width, to negate this down tilt the EUT was rotated 180 degrees though the vertical plane (ie turned upside down to normal operation) and the EUT was angled so the bore sight was parallel to the grassed area.

Due to the increased height of the EUT the measurement antenna was varied between 1 and 6 meters to encompass the height of the EUT and its potential bandwidth

5.4 Open area test site information

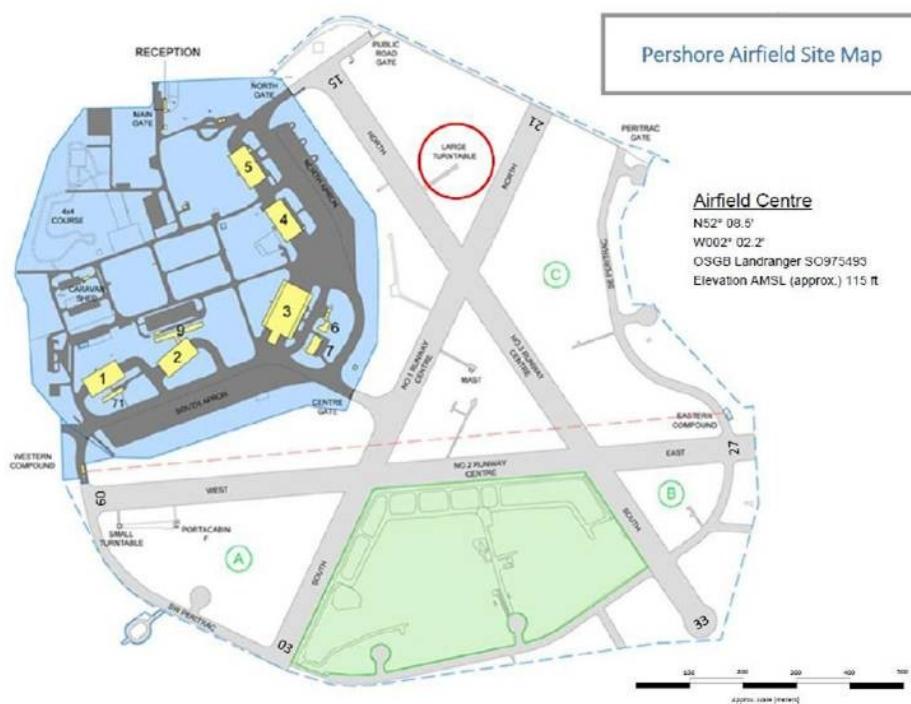

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CAC	Channel Availability Check
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DFS	Dynamic Frequency Selection
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada (now ISED)
ISED	Innovation, Science and Economic Development Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
LE-LAN	Licence-Exempt Local Area Network
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
MU-MIMO	Multiuser Multiple Input and Multiple Output
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
PSD	Power Spectral Density
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
TPC	Transmitter Power Control
Tx	transmitter
UKAS	United Kingdom Accreditation Service
U-NII	Unlicensed-National Information Infrastructure
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: PMP 450m
- MAC Address: 0a-00-3e-60-31-90
- Model Number: A005251
- Software Revision: CANOPY 15.0 (Build 579) AP-DES
- Build Level / Revision Number: P5

All testing excluding 30MHz – 1GHz and AC power line conducted emissions

- Name: PMP 450m
- MAC Address: 0a-00-3e-60-31-99
- Model Number: A005251
- Software Revision: CANOPY 15.0 (Build 619) AP-DES
- Build Level / Revision Number: P5

30MHz – 1GHz and AC power line conducted emissions

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- Name: Cambium Networks Power Injector AC + DC
- Serial Number: 1611000125
- Model Number: E100109B G
- Build Level / Revision Number: 02
- Name: Netgear 5 port 10/100/1000M switch
- Serial Number: 2N211B3D00F3C
- Model Number: GS605 v4
- Name: Dell Latitude Laptop PC
- Serial Number:
- Model Number: E6440

All testing excluding 30MHz – 1GHz radiated spurious emissions and AC power line conducted emissions

- Name: Cambium Networks Power Injector AC + DC
- Serial Number: 1451008904
- Model Number: E100109B G
- Build Level / Revision Number: 02
- Name: Netgear 5 port 10/100/1000M switch
- Serial Number: 2N211B3D00F3C
- Model Number: GS605 v4
- Name: Dell Latitude Laptop PC
- Serial Number:
- Model Number: E6440

30MHz – 1GHz radiated spurious emissions and AC power line conducted emissions

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for Tx tests was as follows...

EUT is set to permanently transmit on the required frequency, modulation type, operational mode and MIMO mode

Operating Frequencies

Operating frequencies tested 5735MHz, 5788MHz* and 5840MHz.
*for 30 MHz -1 GHz emissions EUT set to 5780MHz.

Operating modes

There are three unique operating modes. These only affect the antenna radiation pattern.

Sector Mode

This mode produces a broad antenna radiation beam.

Beamforming Mode

This produces a narrow, focused antenna beam.

MU-MIMO mode

This produces several narrow, focused antenna beams.

Modulation Modes

Supported modulation modes are QPSK, 16QAM, 64QAM and 256QAM. Each of these four modulation mode can be configured to be MIMO A or MIMO B. The differences between these MIMO modes are described below.

MIMO A

The data streams transmitted in both horizontal and vertical antenna polarisations are identical.

MIMO B

The data streams transmitted in the horizontal and vertical polarisations are independent.

Test modes are selected through a manufactures test GUI; cambium networks regulatory RF control V4.3

EUT Operational combinations used during test					
EUT Mode	Modulation	MIMO Mode	Frequency		
			5735MHz	5788MHz	5840MHz
Sector	256QAM	A	X	X	X
		B	X	X	X
	64 QAM	A	-	X	-
		B	-	X	-
	16 QAM	A	-	X	-
		B	-	X	-
	QPSK	A	-	X	-
		B	-	X	-
MU-MIMO	256QAM	A	X	-	X
		B	X	-	X
Beamforming	256QAM	A	X	-	X
		B	X	-	X

*for 30 MHz -1 GHz emissions EUT set to 5780MHz.

7.4 EUT Radio Frequency Parameters

7.4.1 General

Frequency band of operation:	5725 – 5850 MHz
Highest/Lowest Centre Frequencies:	5735 – 5840 MHz
Modulation type(s):	QPSK, 16QAM, 64QAM, 256QAM
Modulation Mode(s):	MIMO A, MIMO B
Occupied channel bandwidth(s):	20 MHz
Channel spacing:	2.5 MHz increments
Declared output power(s):	+36 dBm eirp
Warning against use of alternative antennas in user manual (yes/no):	Not applicable
Nominal Supply Voltage:	-48Vdc (POE)
Location of notice for license exempt use:	Label / user manual / both.
Method of prevention of use on non-US frequencies:	Digitally signed software / licence key

7.4.2 Antennas

Type:	Integrated dual polarised seven-element adaptive array smart antenna
Frequency range:	5150 MHz – 5925 MHz
Impedance:	Not Applicable
SWR:	Not Applicable
Gain:	15 dBi
Polarisation:	Dual polarised
Beam width:	8° in Elevation 90° in azimuth
Connector type:	Integral
Length:	Not applicable
Weight:	14.2 Kg (fully assembled unit)
Environmental limits:	-40°C to +60°C
Mounting:	Pole / Wall / Tower mount

7.4.3 Product specific declarations

Multiple antenna configuration(s), e.g. MIMO:	MIMO, Beamforming, Sector, MU-MIMO
Fixed pt-pt / pt-mtp / N/A operation (select One):	pt-mtp
Software security description:	See PMP-10088.PDF
TDWR interference information in users manual (yes/no):	Yes

7.5 EUT Description

The EUT is a point to multipoint access point with a seven-element dual-polarised adaptive array smart antenna and multi-user MIMO (MU-MIMO) capabilities


8 Modifications

Shielded cables used for radiated emissions measurements in the range 30MHz – 1GHz

9 EUT Test Setup

9.1 Block Diagram


The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

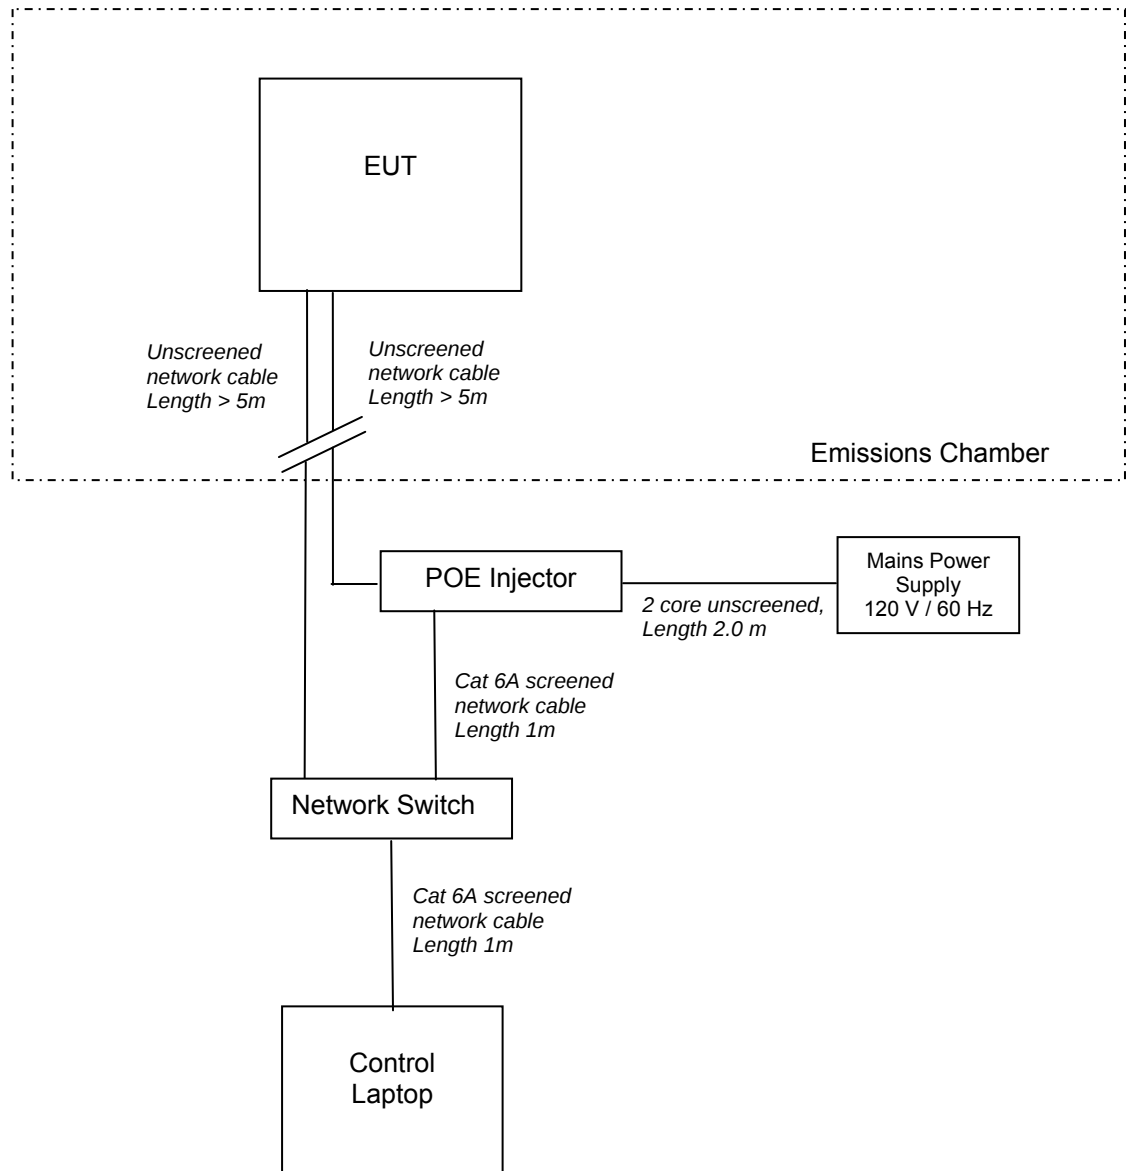

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



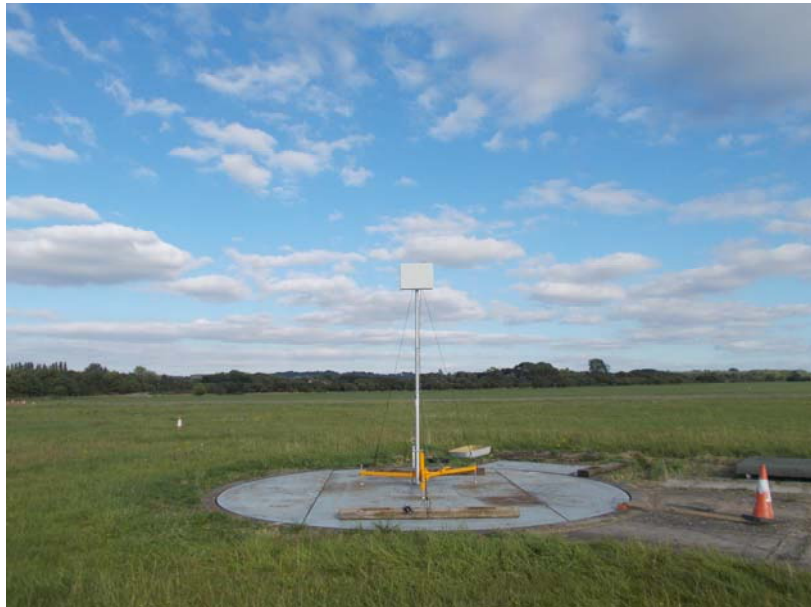

10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 48 V dc from the POE adaptor.

10.2 Varying Test Conditions

Variation of supply voltage is required to ensure stability of the declared output power and frequency. During carrier power testing the following variations were made:

	<i>Category</i>	<i>Nominal</i>	<i>Variation</i>
☐	Mains	110V ac +/-2%	85% and 115%
☐	Battery	New battery	N/A
☒	Other	-48Vdc	POE

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber (REF940)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6 KDB 789033 D02 II G
EUT Channels / Frequencies Measured:	5735 MHz / 5788 MHz / 5840 MHz
EUT Channel Bandwidths:	20 MHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

Test Limits

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies Above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3m)</i>
30-88	100
88-216	150
216-960	200
Above 960	500

11.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. where average detector on pulsed harmonic understates the power);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

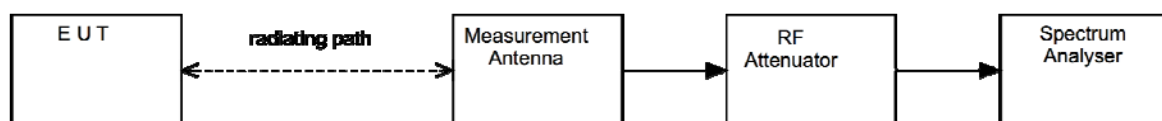

EUT operation was limited to MIMO A as this id deemed to be worst case.

Test Setup Photograph(s)





11.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Bilog	Chase	CBL611/A	UH191	26/02/2015	24	26/02/2017
ESVS10	R&S	ESVS10	L352	18/07/2016	12	18/07/2017
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017
Pre-Amplifier	Agilent	8449B	L572	16/02/2016	12	16/02/2017
Horn Antenna	Flann	20240-20	L300	07/04/2016	24	07/04/2018
Horn Antenna	Flann	22240-20	L301	11/07/2016	12	11/07/2017
6 dB Attenuator	Bird	8304-060-N	U376	Calibrate in Use		
10 dB Attenuator	Bird	8304-100-N	L222	Calibrate in Use		
High Pass Filter	Atlantic Microwave Ltd	AFH-0700	U558	Calibrate in Use		

11.5 Test Results


Channel: 5735 MHz, Sector Mode; 256QAM; MIMO A

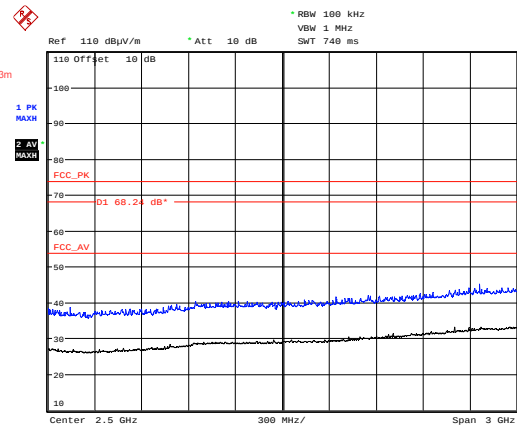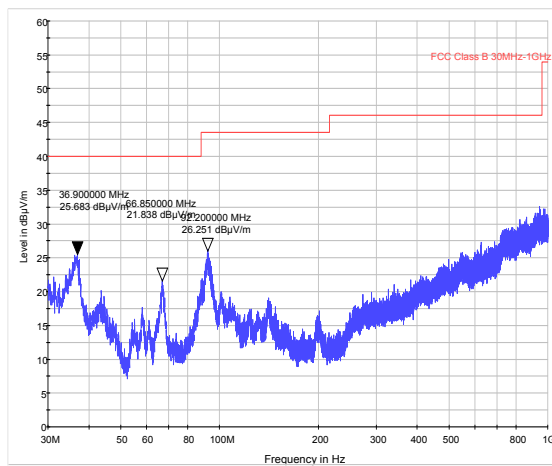

Date: 23.AUG.2016 13:14:12


30 MHz – 1 GHz

1 GHz – 4 GHz

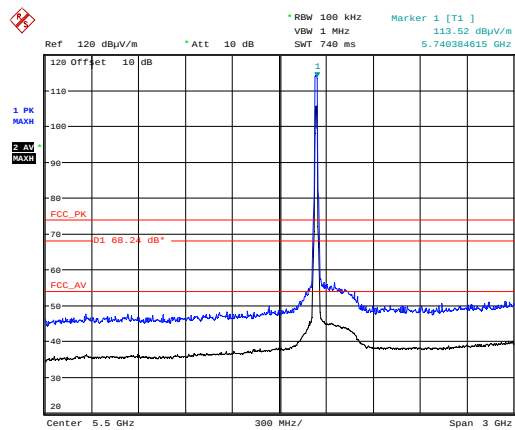


Date: 23.AUG.2016 13:15:33

4 GHz – 7 GHz

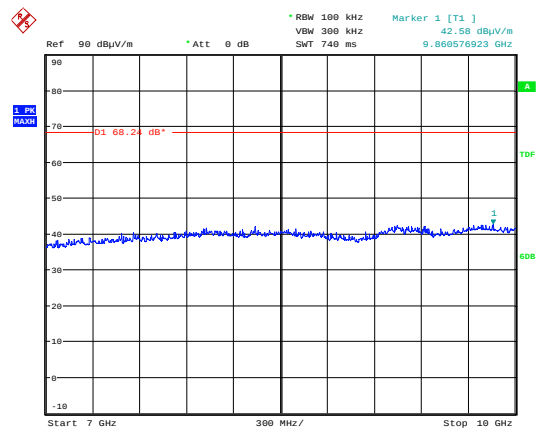


Date: 18.AUG.2016 17:00:56

7 GHz – 10 GHz

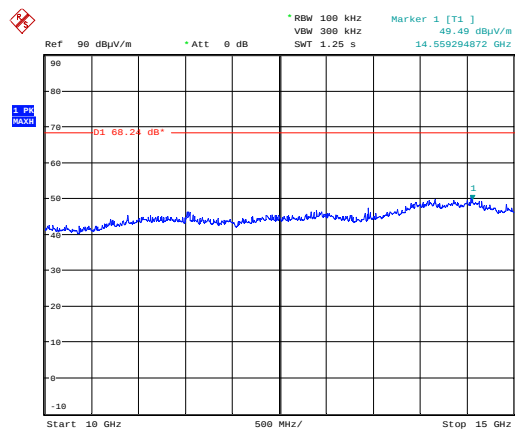


Date: 18.AUG.2016 17:03:26

10 GHz – 15 GHz

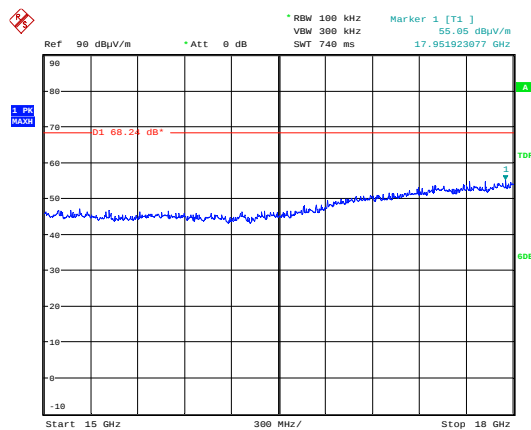


Date: 18.AUG.2016 17:05:33

15 GHz – 18 GHz

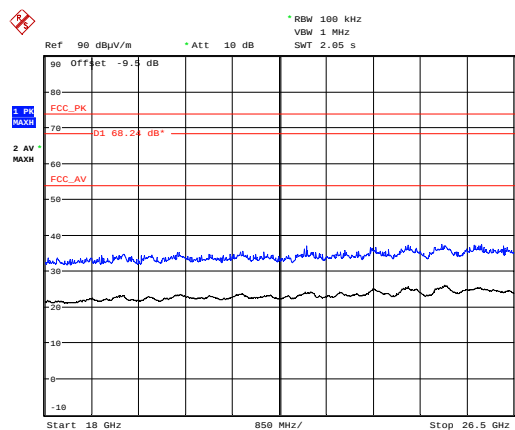

Date: 24.AUG.2016 15:24:22

18 GHz – 26.5 GHz

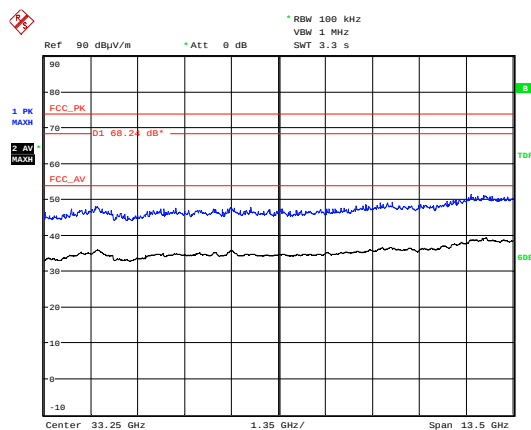



Date: 24.AUG.2016 10:22:04

26.5 GHz – 40 GHz

Channel: 5735 MHz, Sector Mode; 256QAM; MIMO A										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	36.10	4.50	1.00	15.84	N/A	0.00	0.00	21.34	11.67	100
QP	66.94	8.00	1.30	6.19	N/A	0.00	0.00	15.49	5.95	100
QP	91.10	10.60	1.43	9.30	N/A	0.00	0.00	21.33	11.65	150

Emissions noted are present regardless of EUT transmit state of operation


Channel: 5788 MHz, Sector Mode; 256QAM; MIMO A

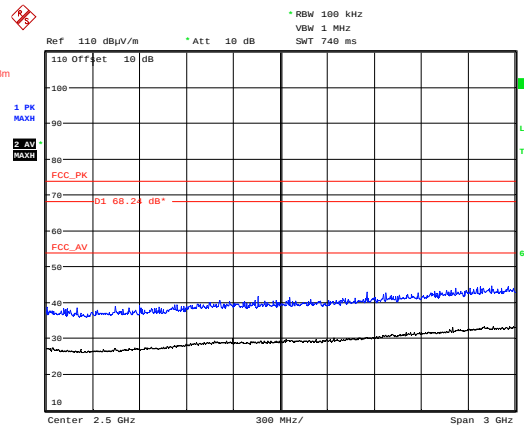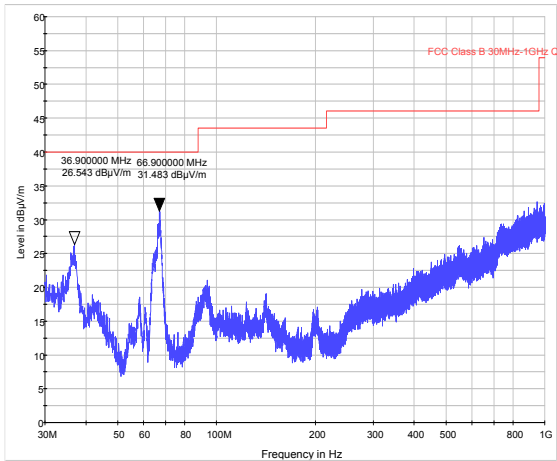

Date: 23.AUG.2016 15:24:44


30 MHz – 1 GHz

1 GHz – 4 GHz

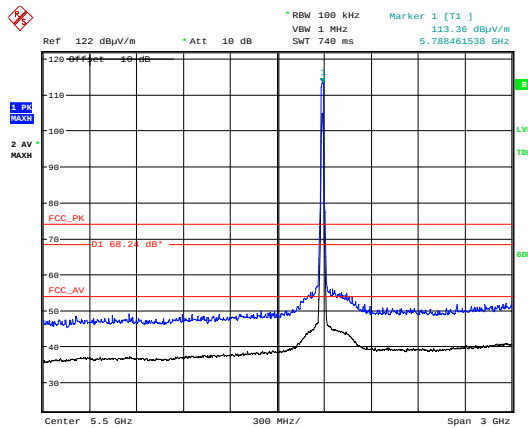


Date: 23.AUG.2016 15:27:22

4 GHz – 7 GHz

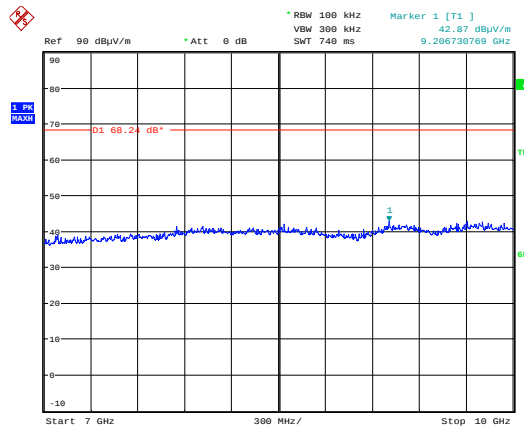


Date: 18.AUG.2016 15:22:03

7 GHz – 10 GHz

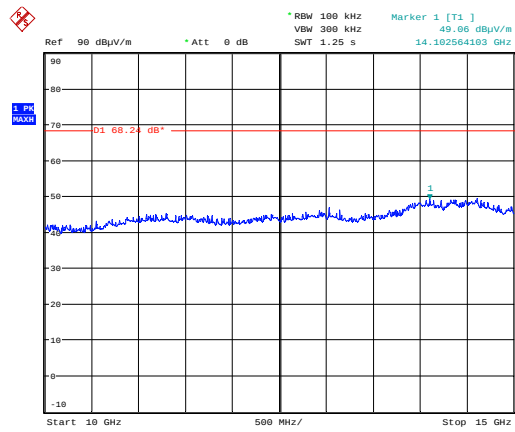


Date: 18.AUG.2016 15:38:59

10 GHz – 15 GHz

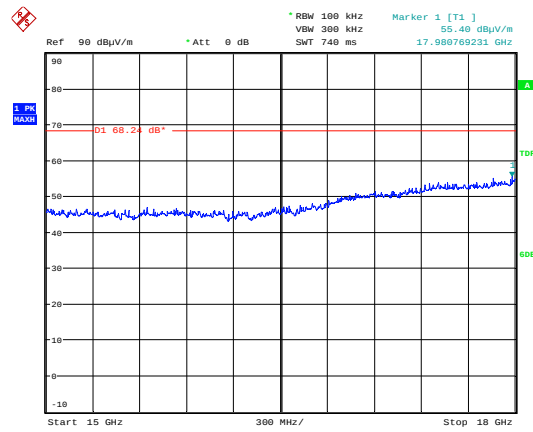


Date: 18.AUG.2016 15:40:39

15 GHz – 18 GHz

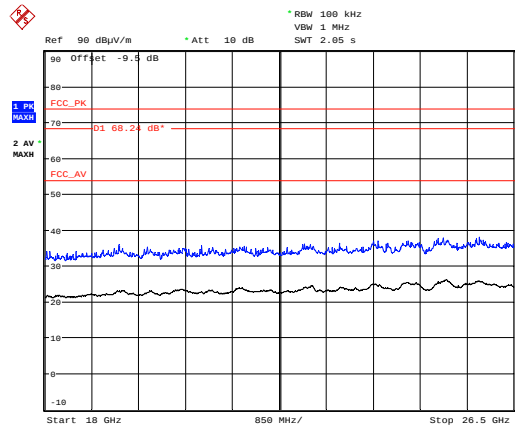

Date: 24.AUG.2016 13:48:53

18 GHz – 26.5 GHz

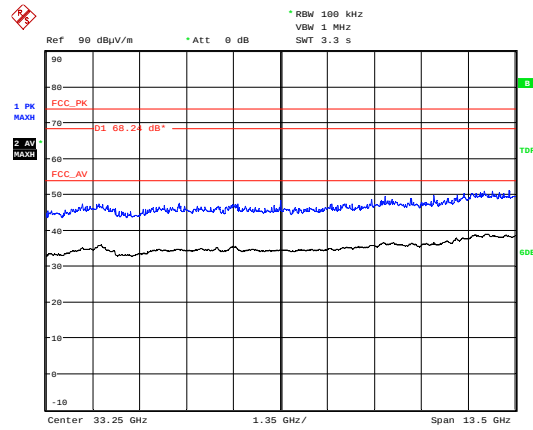

Date: 24.AUG.2016 11:01:03



26.5 GHz – 40 GHz

Channel: 5788 MHz, Sector Mode; 256QAM; MIMO A

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	36.10	4.50	1.00	15.84	N/A	0.00	0.00	21.34	11.67	100
QP	66.94	8.00	1.30	6.19	N/A	0.00	0.00	15.49	5.95	100
QP	91.10	10.60	1.43	9.30	N/A	0.00	0.00	21.33	11.65	150

Emissions noted are present regardless of EUT transmit state of operation


Channel: 5840 MHz, Sector Mode; 256QAM; MIMO A

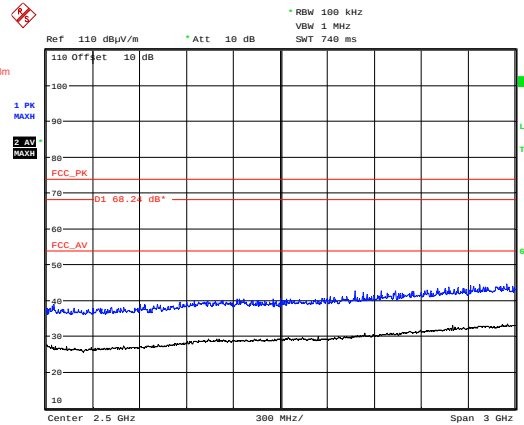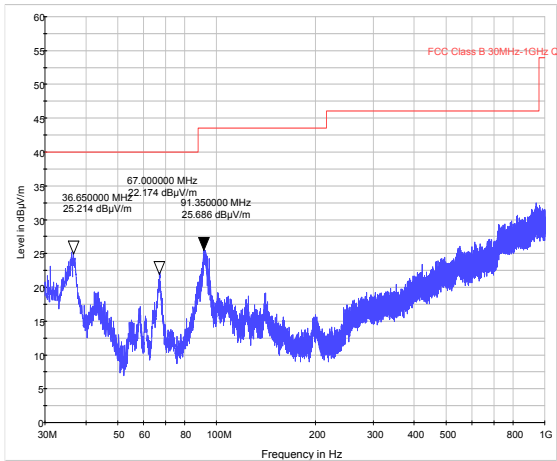

Date: 23.AUG.2016 15:35:50


30 MHz – 1 GHz

1 GHz – 4 GHz

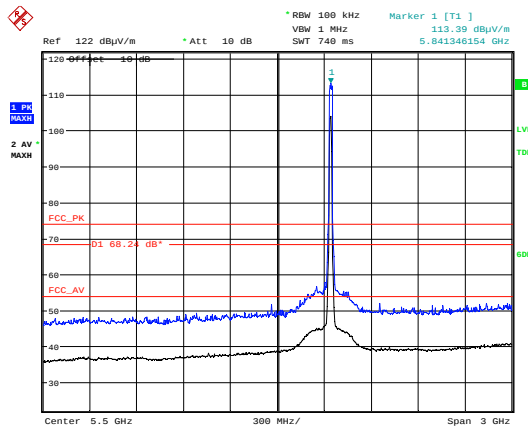


Date: 23.AUG.2016 15:34:36

4 GHz – 7 GHz

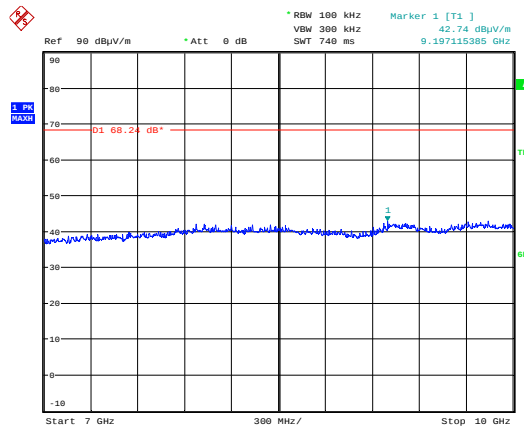


Date: 18.AUG.2016 17:38:29

7 GHz – 10 GHz

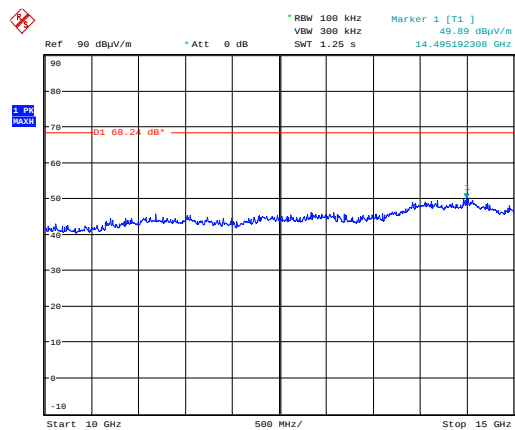


Date: 18.AUG.2016 17:40:30

10 GHz – 15 GHz

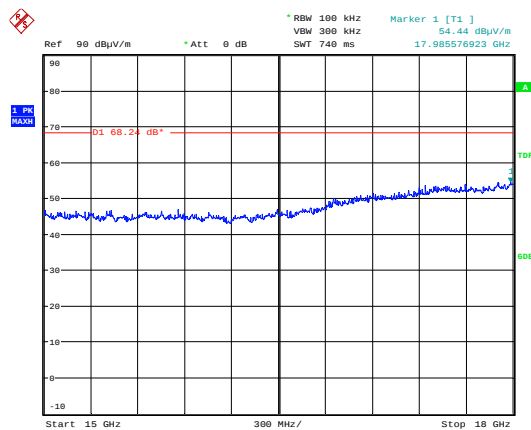


Date: 18.AUG.2016 17:45:30

15 GHz – 18 GHz

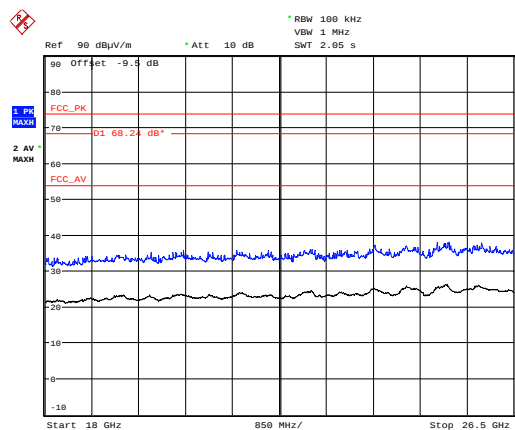

Date: 24.AUG.2016 13:40:01

18 GHz – 26.5 GHz

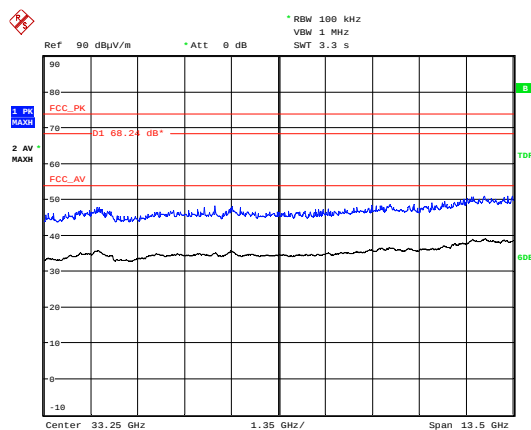

Date: 24.AUG.2016 12:14:05

26.5 GHz – 40 GHz

Channel: 5840 MHz, Sector Mode; 256QAM; MIMO A

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Field Strength (dBμV/m)	Distance Extrap'n Factor (dB)	Field Strength (μV/m)	Limit (μV/m)
QP	36.10	4.50	1.00	15.84	N/A	0.00	0.00	21.34	11.67	100
QP	66.94	8.00	1.30	6.19	N/A	0.00	0.00	15.49	5.95	100
QP	91.10	10.60	1.43	9.30	N/A	0.00	0.00	21.33	11.65	150

Emissions noted are present regardless of EUT transmit state of operation

12 AC power-line conducted emissions

12.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Transient Lab (U390)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels / Frequencies Measured:	5840 MHz
EUT Channel Bandwidths:	20 MHz
EUT Modulation:	QPSK MIMO A
Deviations From Standard:	None
Measurement BW:	10 kHz
Measurement Detectors:	Quasi-Peak and Average, RMS

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 41 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

Test Limits

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in Table 3.

Table 3 – AC Power Line Conducted Emission Limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average**
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5.0	56	46
5.0 – 30.0	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.


12.3 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in a worst case mode of transmit operation.

Figure ii Test Setup

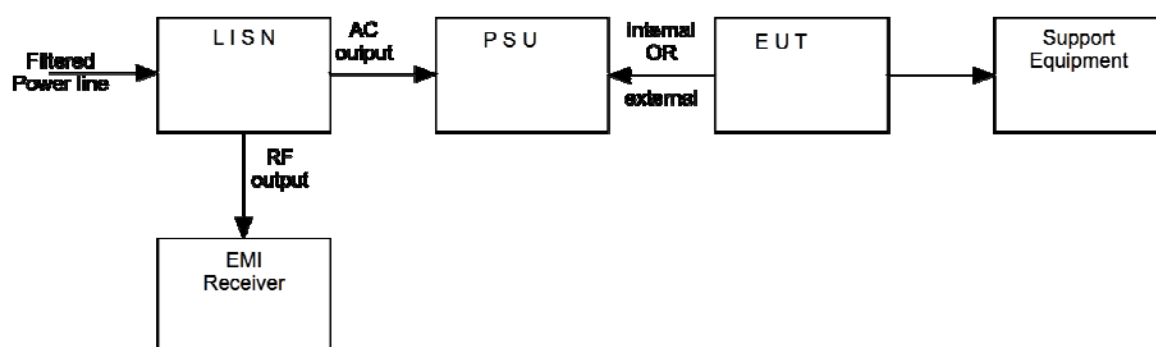

Test Setup Photograph(s)




12.4 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
LISN	R&S	ENV216	U396	29/06/2016	12	29/06/2017
EMI Receiver	R&S	ESHS10	U003	25/06/2016	12	25/06/2017

12.5 Test Results

Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH396

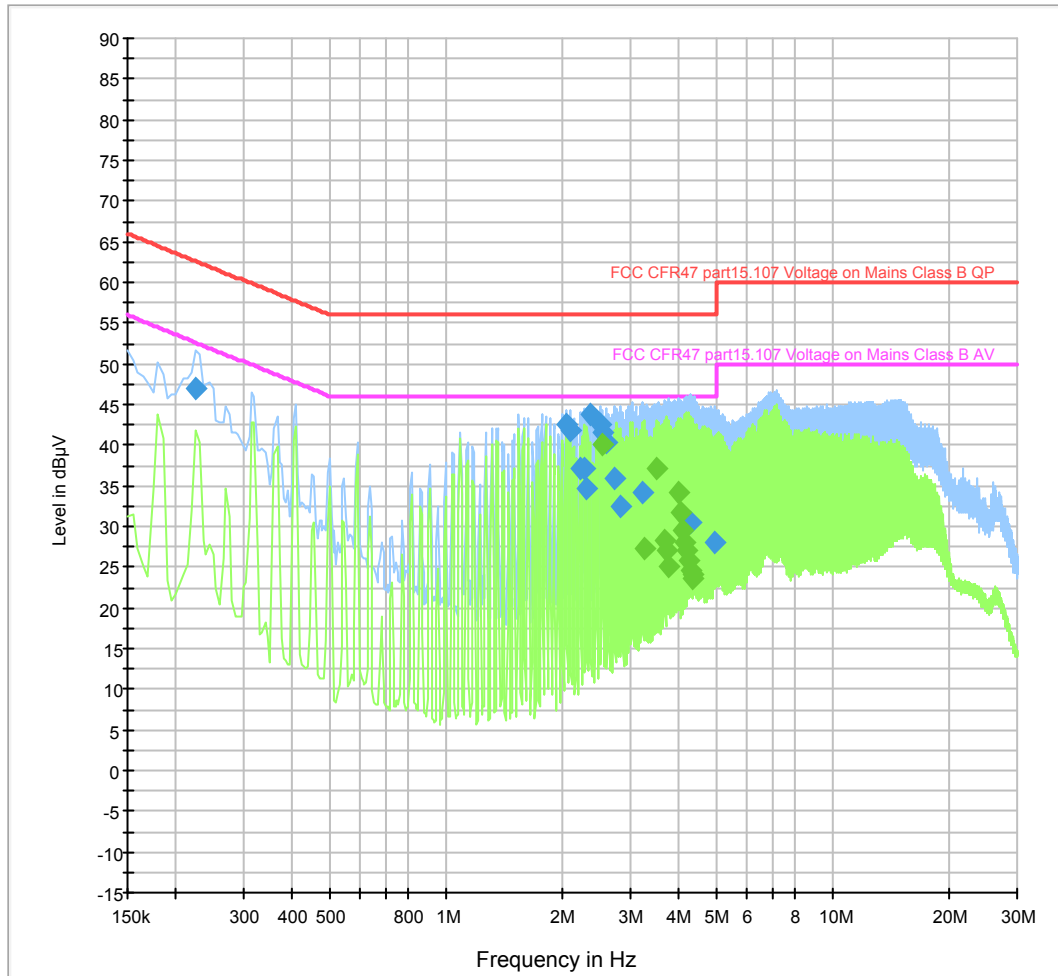

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.225000	47.0	2000.0	10.000	On	N	9.6	15.6	62.6
2.045000	42.6	2000.0	10.000	On	N	9.7	13.4	56.0
2.090000	41.7	2000.0	10.000	On	N	9.7	14.3	56.0
2.225000	37.1	2000.0	10.000	On	N	9.7	18.9	56.0
2.270000	37.0	2000.0	10.000	On	N	9.7	19.0	56.0
2.315000	34.8	2000.0	10.000	On	N	9.7	21.2	56.0
2.365000	43.8	2000.0	10.000	On	N	9.7	12.2	56.0
2.500000	42.6	2000.0	10.000	On	N	9.7	13.4	56.0
2.545000	41.6	2000.0	10.000	On	N	9.7	14.4	56.0
2.590000	40.4	2000.0	10.000	On	N	9.7	15.6	56.0
2.725000	36.0	2000.0	10.000	On	N	9.7	20.0	56.0
2.815000	32.4	2000.0	10.000	On	N	9.7	23.6	56.0
3.225000	34.3	2000.0	10.000	On	N	9.7	21.7	56.0
4.270000	30.6	2000.0	10.000	On	N	9.7	25.4	56.0
4.950000	28.1	2000.0	10.000	On	N	9.7	27.9	56.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.545000	40.1	2000.0	10.000	On	N	9.7	5.9	46.0
3.270000	27.3	2000.0	10.000	On	N	9.7	18.7	46.0
3.500000	37.1	2000.0	10.000	On	N	9.7	8.9	46.0
3.680000	28.3	2000.0	10.000	On	N	9.7	17.7	46.0
3.725000	27.1	2000.0	10.000	On	N	9.7	18.9	46.0
3.770000	25.1	2000.0	10.000	On	N	9.7	20.9	46.0
4.000000	34.2	2000.0	10.000	On	N	9.7	11.8	46.0
4.045000	31.7	2000.0	10.000	On	N	9.7	14.3	46.0
4.090000	29.4	2000.0	10.000	On	N	9.7	16.6	46.0
4.135000	28.1	2000.0	10.000	On	N	9.7	17.9	46.0
4.180000	27.0	2000.0	10.000	On	N	9.7	19.0	46.0
4.225000	25.8	2000.0	10.000	On	N	9.7	20.2	46.0
4.270000	24.7	2000.0	10.000	On	N	9.7	21.3	46.0
4.315000	24.0	2000.0	10.000	On	N	9.7	22.0	46.0
4.360000	23.6	2000.0	10.000	On	N	9.7	22.4	46.0

13 Occupied Bandwidth

13.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber (REF940)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Channels / Frequencies Measured:	5735 MHz / 5788 MHz / 5840 MHz
EUT Channel Bandwidths:	20 MHz
EUT Test Modulations:	QPSK / 16 QAM / 64QAM / 256QAM
EUT Data Mode:	MIMO A / MIMO B
Deviations From Standard:	None
Measurement BW:	100kHz
(FCC requirement: 100 kHz)	
Spectrum Analyzer Video BW:	300kHz
(requirement at least 3x RBW)	
Measurement Span:	50MHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 44 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

Test Limits


Within the 5.725–5.85 GHz band, the minimum 6 dB bandwidth of U–NII devices shall be at least 500 kHz.

13.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup

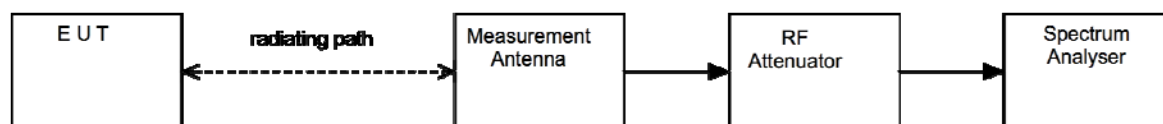


13.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017


13.5 Test Results

Modulation Mode: 5735 MHz					
Modulation Mode	MIMO Mode	F_L (MHz)	F_H (MHz)	6dB Bandwidth (MHz)	Result
QPSK	A	5725.785256	5744.054407	18.269	PASS
QPSK	B	5725.705128	5744.294072	18.589	PASS
16QAM	A	5725.705128	5744.054407	18.349	PASS
16QAM	B	5725.785256	5744.054407	18.269	PASS
64QAM	A	5725.705128	5743.974359	18.269	PASS
64QAM	B	5725.705128	5744.054407	18.349	PASS
256QAM	A	5725.705128	5744.214744	18.509	PASS
256QAM	B	5725.705128	5744.134615	18.429	PASS

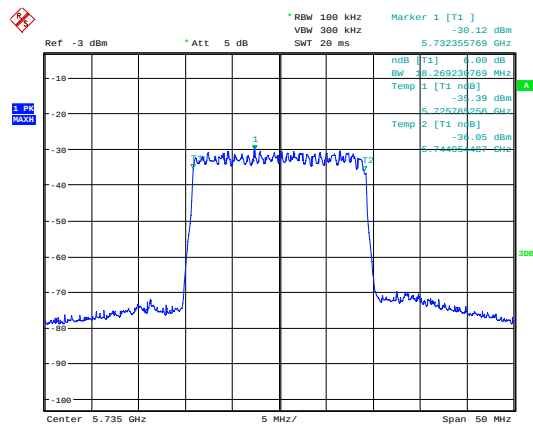

Date: 17.AUG.2016 11:39:14


MIMO A

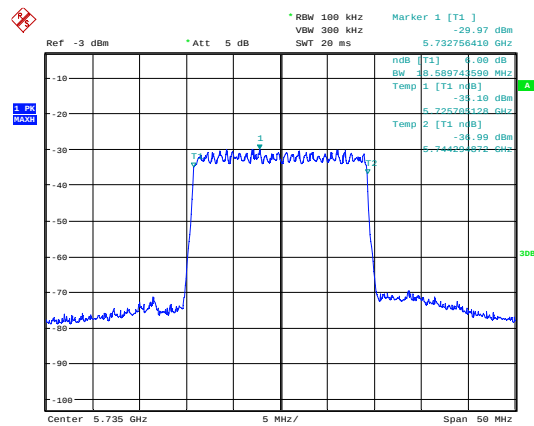

Date: 17.AUG.2016 11:42:01


QPSK 5735 MHz

MIMO B

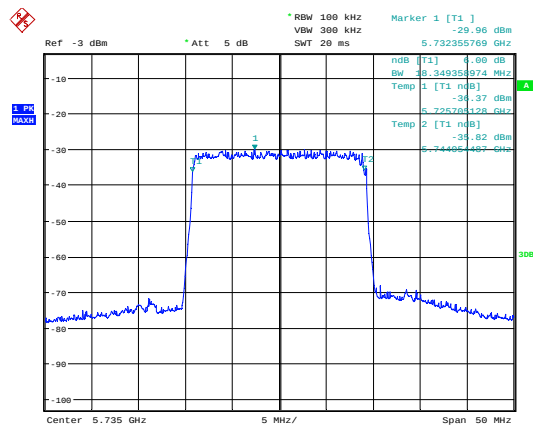

Date: 17.AUG.2016 11:45:18


MIMO A

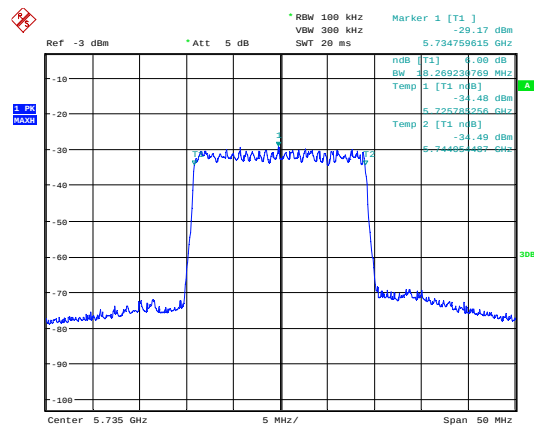


Date: 17.AUG.2016 11:47:04

16QAM 5735 MHz

MIMO B

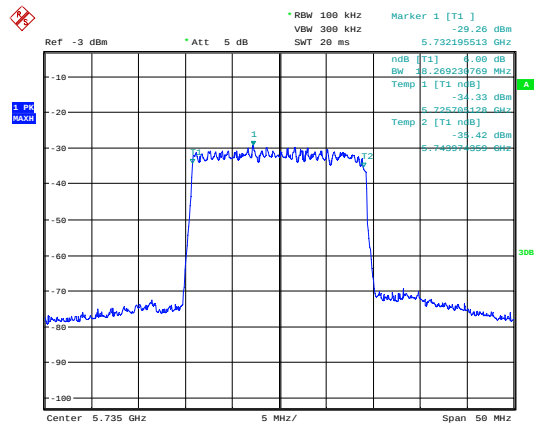

Date: 17.AUG.2016 11:49:07

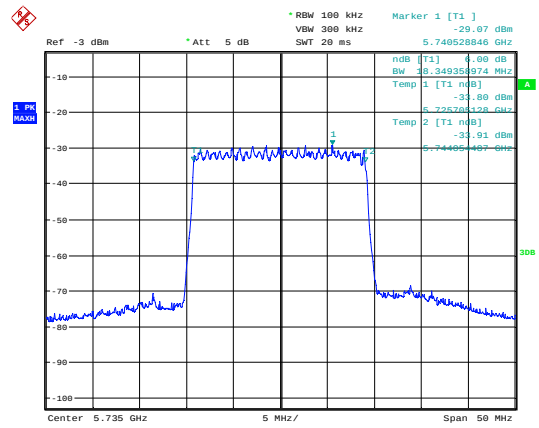


Date: 17.AUG.2016 11:51:52


MIMO A

64QAM 5735 MHz

MIMO B

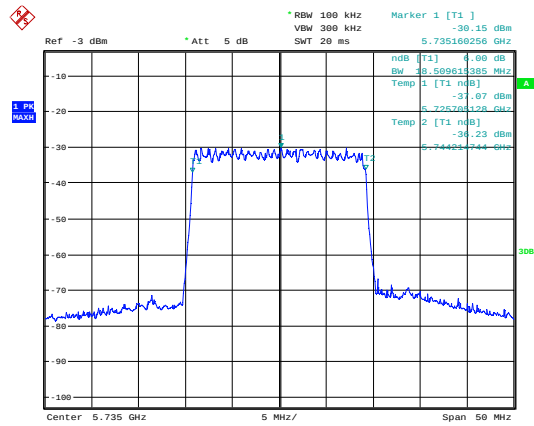

Date: 17.AUG.2016 11:55:07

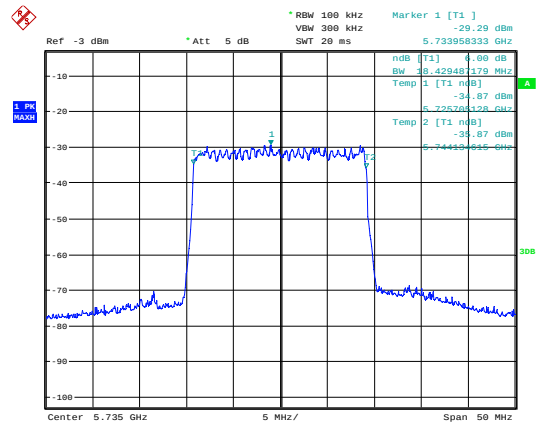


Date: 17.AUG.2016 12:00:04

MIMO A

256QAM 5735 MHz


MIMO B

Modulation Mode: 5788 MHz					
Modulation Mode	MIMO Mode	F_L (MHz)	F_H (MHz)	6dB Bandwidth (MHz)	Result
QPSK	A	5778.705128	5797.294072	18.589	PASS
QPSK	B	5778.705128	5797.214744	18.509	PASS
16QAM	A	5778.785256	5797.054407	18.269	PASS
16QAM	B	5778.705128	5797.054407	18.349	PASS
64QAM	A	5778.705128	5769.974359	18.269	PASS
64QAM	B	5778.705128	5797.054487	18.349	PASS
256QAM	A	5778.705128	5797.214744	18.509	PASS
256QAM	B	5778.705128	5797.134615	18.429	PASS

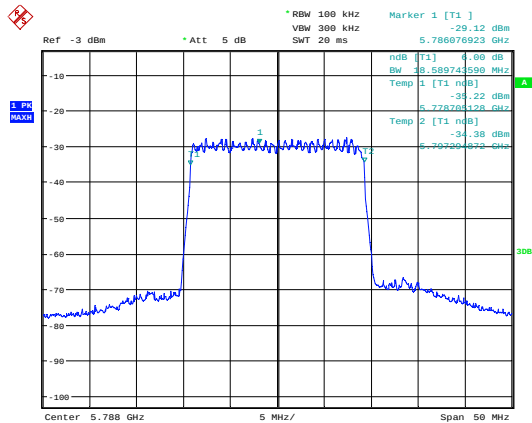

Date: 16.AUG.2016 17:28:12


MIMO A

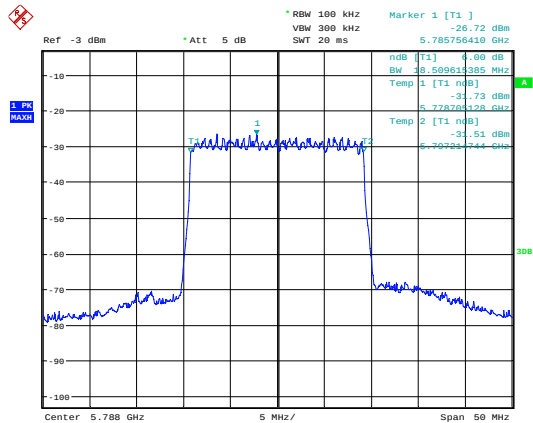

Date: 17.AUG.2016 19:28:19


QPSK 5788 MHz

MIMO B

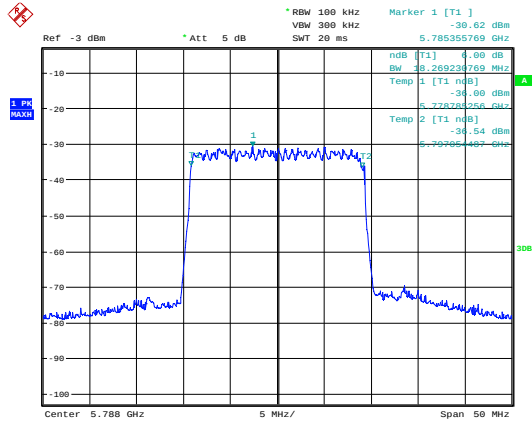

Date: 17.AUG.2016 13:06:41


MIMO A

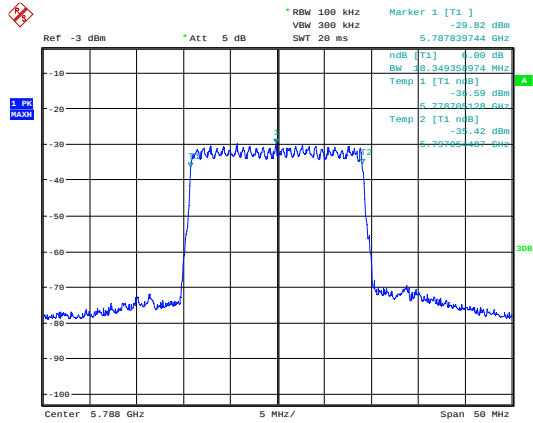

Date: 17.AUG.2016 13:08:13


16QAM 5788 MHz

MIMO B

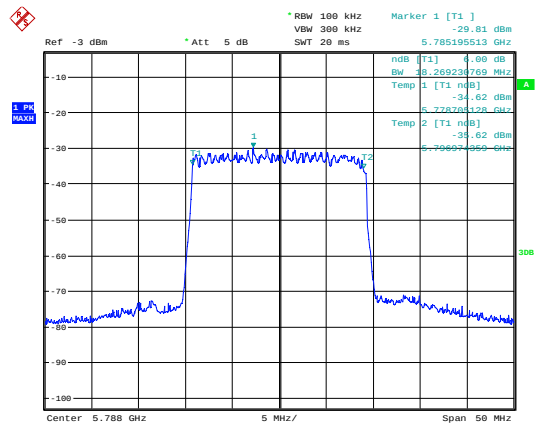

Date: 17.AUG.2016 13:09:08


MIMO A

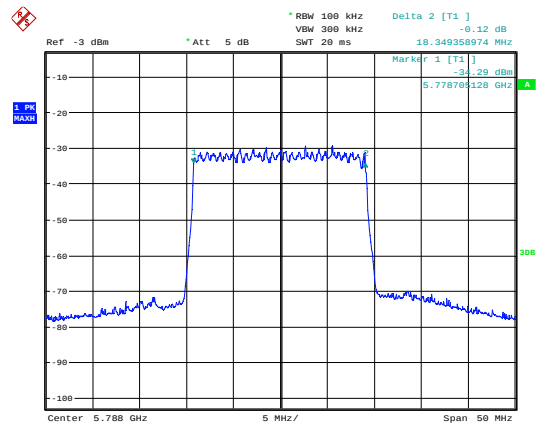

Date: 17.AUG.2016 13:23:07


64QAM 5788 MHz

MIMO B

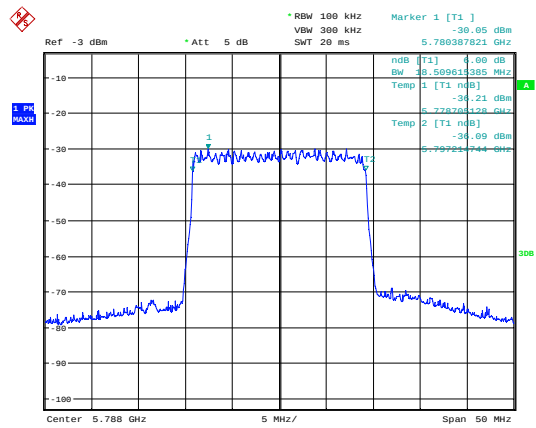

Date: 17.AUG.2016 13:27:42

MIMO A

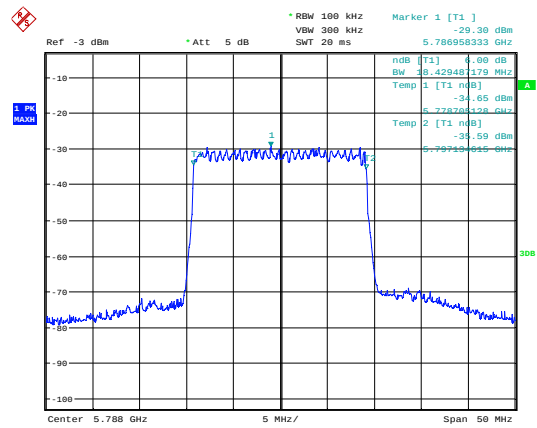


Date: 17.AUG.2016 13:29:04

256QAM 5788 MHz


MIMO B

Modulation Mode: 5840 MHz					
Modulation Mode	MIMO Mode	F_L (MHz)	F_H (MHz)	6dB Bandwidth (MHz)	Result
QPSK	A	5830.785256	5849.054487	18.269	PASS
QPSK	B	5830.705128	5849.214744	18.509	PASS
16QAM	A	5830.785256	5848.974359	18.189	PASS
16QAM	B	5830.705128	5849.054487	18.349	PASS
64QAM	A	5830.705128	5848.974359	18.269	PASS
64QAM	B	5830.705128	5849.054487	18.349	PASS
256QAM	A	5830.705128	5849.054487	18.349	PASS
256QAM	B	5830.705128	5849.137615	18.429	PASS

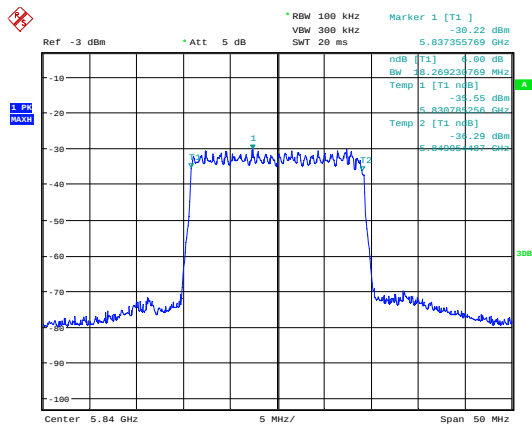

Date: 17.AUG.2016 15:28:38


MIMO A

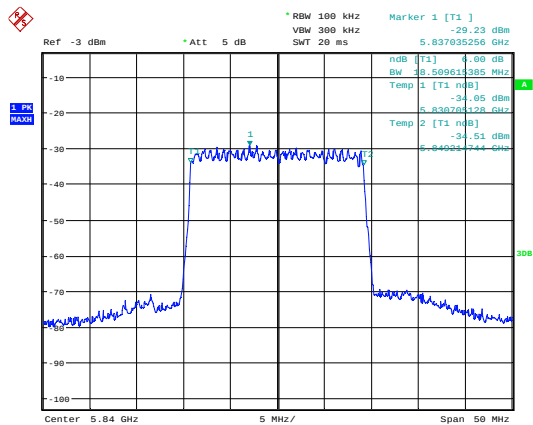

Date: 17.AUG.2016 15:29:29


QPSK 5840 MHz

MIMO B

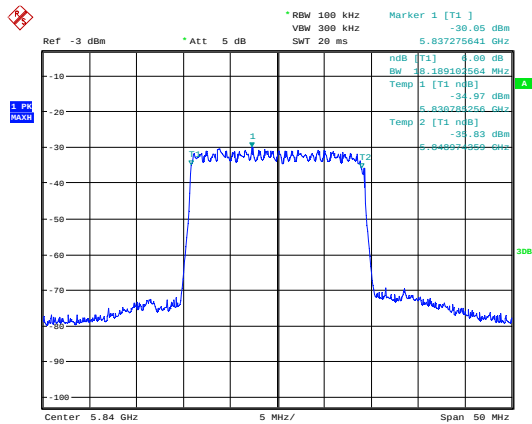

Date: 17.AUG.2016 15:30:47


MIMO A

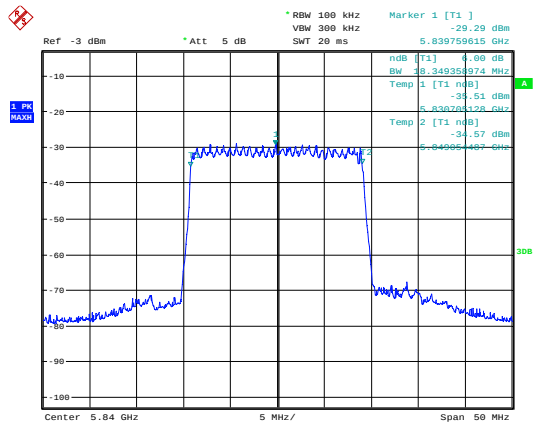

Date: 17.AUG.2016 15:32:48


16QAM 5840 MHz

MIMO B

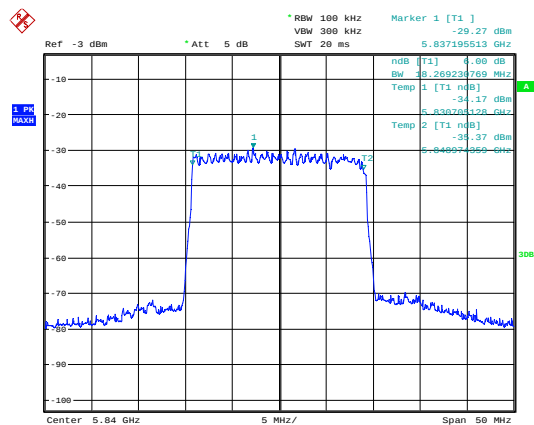

Date: 17.AUG.2016 15:33:33


MIMO A

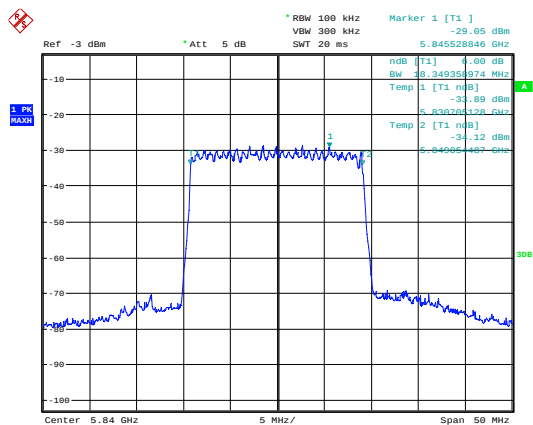

Date: 17.AUG.2016 15:35:52


64QAM 5840 MHz

MIMO B

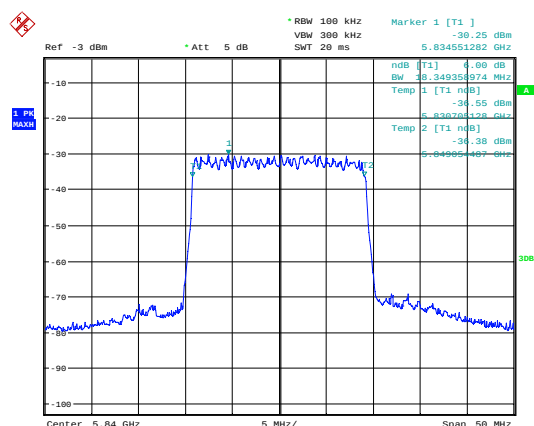

Date: 17.AUG.2016 15:36:50

MIMO A

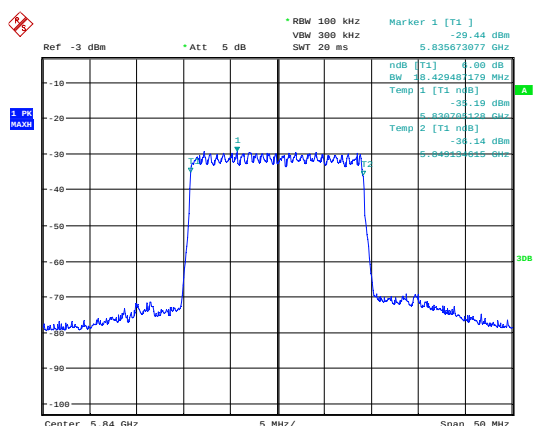

Date: 17.AUG.2016 15:37:42

256QAM 5840 MHz

MIMO B

14 Maximum conducted output power

14.1 Definition

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

14.2 Test Parameters

Test Location:	30 Meter Open Area Test Site
Test Chamber:	Not Applicable
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.3 KDB 789033 D02 Clauses II A1 and E3 KDB 662911 D01 Clause E
EUT Channels / Frequencies Measured:	5735 MHz / 5788 MHz / 5840 MHz
EUT Occupied Bandwidths:	20 MHz
EUT Duty Cycle:	100%
Deviations From Standard:	None
Measurement BW:	Not Applicable
Measurement Span:	Not Applicable
Measurement Points:	Not Applicable
Measurement Detector:	RMS
Measurement Distance:	30 meters
Voltage Extreme Environment Test Range:	-48Vdc POE

Environmental Conditions (Normal Environment)

Temperature: 18 °C	+15 °C to +35 °C (as declared)
Humidity: 42 %RH	20%RH to 75%RH (as declared)

Test Limits

For an access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Fixed point-to-point U–NII devices operating in the band 5.725–5.85 GHz may employ antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

Fixed point-to-point U-NII devices operating in other bands may employ antennas with directional gain up to 23dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

14.3 Test Method

The EUT was setup as per section 9 of this report and, as per Figure iv, once maximised for a particular polarisation the power meter was used to measure each polarisation in turn. The results were summed to determine total power for both polarisations at the maximised angle as shown in the tables below to ensure compliance with the limit. The measurement was repeated by maximising in the other polarisation and summing. The measurements were performed with EUT set at its maximum duty cycle. All modulation schemes, data rates and EUT operating modes were used on one frequency to determine worst case. Worst case modes used on all frequencies. Results recorded for highest total power orientation only. EIRP was determined using substitution method.

Figure iv Test Setup

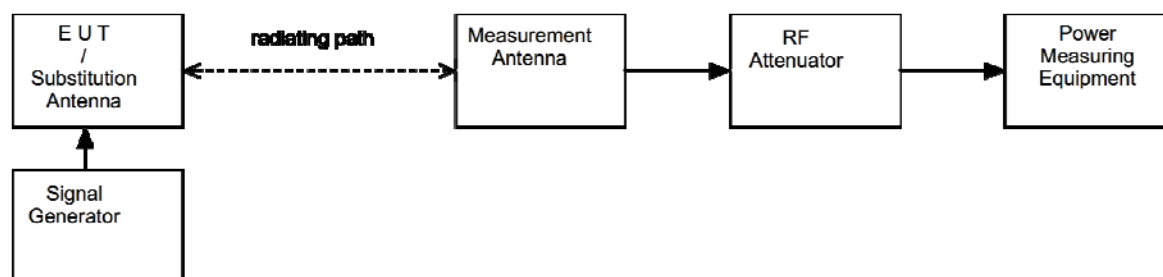

14.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU26	RF909	26/04/2016	12	26/04/2017
Horn Antenna	Emco	3115	UH223	13/10/2015	24	13/10/2017
Pre Amplifier	Agilent	8449B	L572	16/02/2016	12	16/02/2017
Signal Generator	HP	83711B	U345	Measure levels with Calibrated instrument		
Power Meter	Dare	RPR3006W	REF2083	17/11/2015	12	17/11/2016
Octave Horn Antenna	EMCO	3161-03	N/A*	18/02/2015	36	18/02/2018

* Not applicable, hired equipment

14.5 Test Results

Channel: 5735 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2432.2	33.86
V	1183.04	30.73
Total: dBm		35.58
Result:		PASS

Channel: 5735 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2387.81	33.78
V	1419.06	31.52
Total: dBm		35.81
Result:		PASS

Channel: 5735 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1324.34	31.22
H	2443.43	33.88
Total: dBm		35.76
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2449.06	33.89
V	1412.54	31.50
Total: dBm		35.87
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1527.57	31.84
V	2393.32	33.79
Total: dBm		35.93
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1412.54	31.50
H	2349.63	33.71
Total: dBm		35.75
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	2398.83	33.80
H	1233.10	30.91
Total: dBm		35.60
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1599.56	32.04
V	2182.73	33.39
Total: dBm		35.78
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1778.28	32.50
H	2094.11	33.21
Total: dBm		35.88
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2243.88	33.51
V	1348.96	31.30
Total: dBm		35.55
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1425.61	31.54
V	2285.60	33.59
Total: dBm		35.70
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1999.86	33.01
V	1288.25	31.10
Total: dBm		35.17
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	2290.87	33.60
H	1415.79	31.51
Total: dBm		35.69
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1527.57	31.84
V	2233.57	33.49
Total: dBm		35.75
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1584.89	32.00
H	1954.34	32.91
Total: dBm		35.49
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	1999.86	33.01
V	1845.02	32.66
Total: dBm		35.85
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1887.99	32.76
H	1741.81	32.41
Total: dBm		35.60
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2142.89	33.31
V	1761.98	32.46
Total: dBm		35.92
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2685.34	34.29
V	1258.93	31.00
Total: dBm		35.96
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	2685.34	34.29
V	1258.93	31.00
Total: dBm		35.82
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	2685.34	34.29
H	1258.93	31.00
Total: dBm		35.93
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	1949.84	32.90
H	1866.38	32.71
Total: dBm		35.82
Result:		PASS

15 Power spectral density

15.1 Definition

The power spectral density is the total energy output per unit bandwidth from a pulse or sequence of pulses for which the transmit power is at its maximum level, divided by the total duration of the pulses.

Due to the nature of the equipment it is not possible to measure the power conducted so a radiated measurement was performed. This measurement was performed at 30m to ensure the measurement was made in the antenna far field.

15.2 Test Parameters

Test Location:	30 Meter Open Area Test Site
Test Chamber:	Not Applicable
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.5 KDB 789033 D02 Clauses II A1 and F KDB 662911 D01 Clause E
EUT Channels / Frequencies Measured:	5735 MHZ / 5788 MHZ / 5840 MHZ
EUT Channel Bandwidths:	20 MHz
Deviations From Standard:	None
Measurement BW:	500 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	2MHz
Measurement Span: (requirement 1.5 times Channel BW)	>30MHz
Measurement Detector:	RMS

Environmental Conditions (Normal Environment)

Temperature: 18 °C	+15 °C to +35 °C (as declared)
Humidity: 42 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

Test Limits

For an access point operating in the band 5.15–5.25 GHz the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Fixed point- to-point U-NII devices may employ antennas with directional gain up to 23dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

15.3 Test Method

The EUT was setup as per section 9 of this report and, as per Figure iv, once maximised for a particular polarisation the spectrum analyser was used to measure each polarisation in turn. The results were summed to determine total power for both polarisations at the maximised angle as shown in the tables below to ensure compliance with the limit.

The measurement was repeated by maximising in the other polarisation and summing

The measurements were performed with EUT set at its maximum duty cycle.


All modulation schemes, data rates and EUT operating modes were used on one frequency to determine worst case.

Worst case modes used on all frequencies

Results recorded for highest PSD orientation only

PSD EIRP was determined using substitution method.

Figure v Test Setup

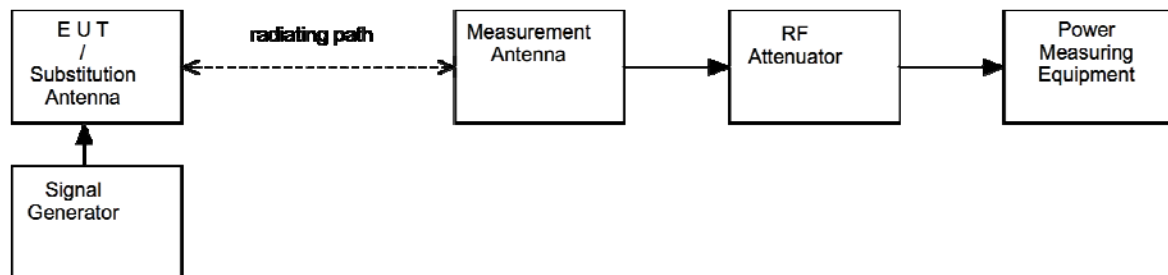

15.4 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU26	RF909	26/04/2016	12	26/04/2017
Horn Antenna	Emco	3115	UH223	13/10/2015	24	13/10/2017
Pre Amplifier	Agilent	8449B	L572	16/02/2016	12	16/02/2017
Signal Generator	HP	83711B	U345	Measure levels with Calibrated instrument		
Power Meter	Dare	RPR3006W	REF2083	17/11/2015	12	17/11/2016
Octave Horn Antenna	EMCO	3161-03	N/A*	18/02/2015	36	18/02/2018

* Not applicable, hired equipment

15.5 Test Results

Channel: 5735 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	80.17	19.04
V	36.56	15.63
Total: dBm		20.67
Result:		PASS

Channel: 5735 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	77.62	18.90
V	46.45	16.67
Total: dBm		20.94
Result:		PASS

Channel: 5735 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	43.75	16.41
H	77.80	18.91
Total: dBm		20.85
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	68.23	18.34
H	53.09	17.25
Total: dBm		20.84
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	70.96	18.51
V	45.50	16.58
Total: dBm		20.66
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	45.39	16.57
H	70.79	18.50
Total: dBm		20.65
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	76.56	18.84
H	41.59	16.19
Total: dBm		20.72
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	68.71	18.37
V	43.85	16.42
Total: dBm		20.51
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	55.21	17.42
H	62.95	17.99
Total: dBm		20.72
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	60.26	17.80
H	49.43	16.94
Total: dBm		20.40
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	70.63	18.49
V	43.45	16.38
Total: dBm		20.57
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	69.66	18.43
V	41.98	16.23
Total: dBm		20.48
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	69.50	18.42
H	45.71	16.60
Total: dBm		20.61
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	69.50	18.42
V	46.13	16.64
Total: dBm		20.63
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	51.64	17.13
H	61.38	17.88
Total: dBm		20.53
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	61.94	17.92
V	58.34	17.66
Total: dBm		20.80
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM ; EUT Mode: BEAMFORMING; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	59.02	17.71
V	60.12	17.79
Total: dBm		20.76
Result:		PASS

Channel: 5840 MHz ; Modulation: 256QAM A ; EUT Mode: MU-MIMO; EUT Data Mode: MIMO A		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	70.47	18.48
V	54.95	17.40
Total: dBm		20.98
Result:		PASS

Channel: 5788 MHz ; Modulation: 256QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	88.31	19.46
V	40.74	16.10
Total: dBm		21.11
Result:		PASS

Channel: 5788 MHz ; Modulation: 64QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	77.09	18.87
V	46.34	16.66
Total: dBm		20.91
Result:		PASS

Channel: 5788 MHz ; Modulation: 16QAM ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
V	55.85	17.47
H	64.27	18.08
Total: dBm		20.80
Result:		PASS

Channel: 5788 MHz ; Modulation: QPSK ; EUT Mode: SECTOR; EUT Data Mode: MIMO B		
Antenna Pol	EIRP (mW)	EIRP (dBm)
H	73.28	18.65
V	45.71	16.60
Total: dBm		20.76
Result:		PASS

16 Out-of-band spurious emissions

16.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 12.7.3 KDB 789033 D02 II G
EUT Channels / Frequencies Measured: (requirement as close to upper and lower frequency band edges as the design of the equipment permits).	5735 MHz / 5840 MHz
EUT Channel Bandwidths:	20 MHz
Deviations From Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	3 MHz
Measurement Detector:	Peak
Measurement Range:	1 GHz to 40 GHz
Antenna Gain: (required if conducted measurement made)	Not Applicable

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: -48Vdc POE	-48Vdc POE

16.3 Test Limits

15.407(b):

(1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


(4)(i) For transmitters operating in the 5.725–5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vii Test Setup

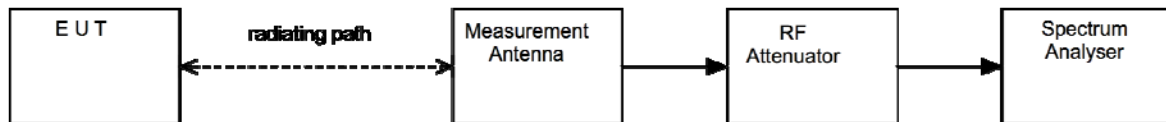

16.5 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	U281	07/06/2016	12	07/06/2017
Horn Antenna	EMCO	3115	L139	25/09/2015	24	25/09/2017
Pre Amplifier	Agilent	8449B	L572	16/02/2016	12	16/02/2017
6 dB Attenuator	Bird	8304-060-N	U376	Calibrate in Use		
10 dB Attenuator	Bird	8304-100-N	L222	Calibrate in Use		

Conversion from field strength to eirp is as follows:

$$\text{EIRP} = E + 20\log(d) - 104.77, \text{ where}$$

EIRP is the equivalent isotropically radiated power in dBm;

E is field strength in dB μ V/m;

d is the measurement distance in meters.

Measurements taken at offsets up to 100 MHz were performed at a distance of 5.4 meters

All other measurements were performed at 3 meters.


Test Results

Channel: 5735 MHz						
Emission Frequency (MHz)	Peak Field Strength (dBμV/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
See plots for emissions Up to 100 MHz from Band edge						PASS
No Significant Emissions >100 MHz from Band edge						PASS


Sector Mode

5735 MHz

MIMO A

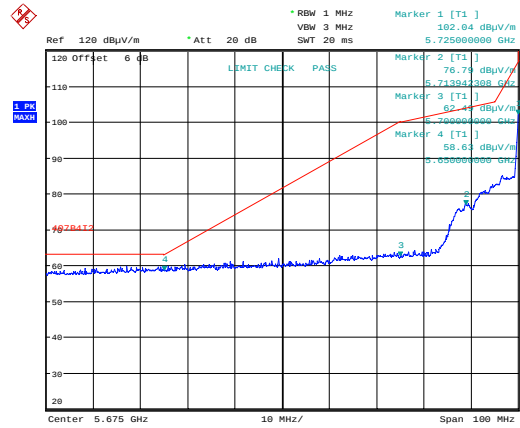


Date: 23.AUG.2016 10:18:37

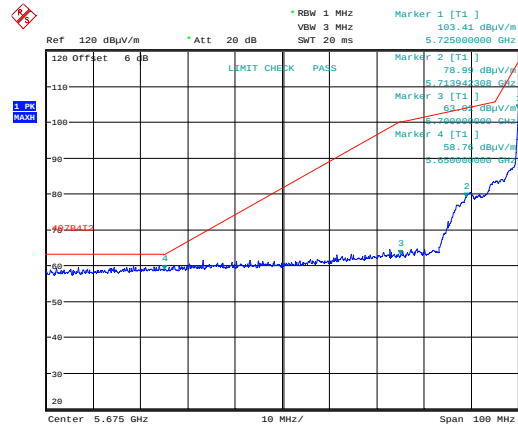


Date: 23.AUG.2016 10:24:13

QPSK

16QAM

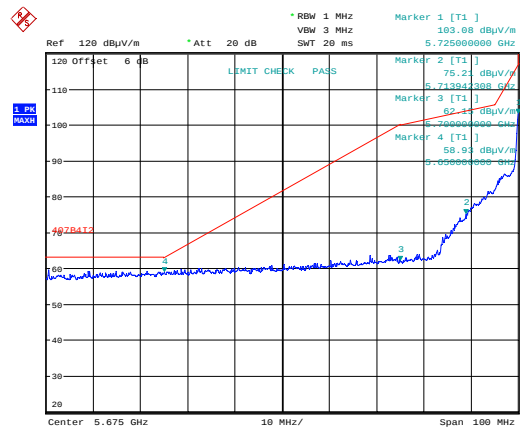

Date: 23.AUG.2016 10:27:27

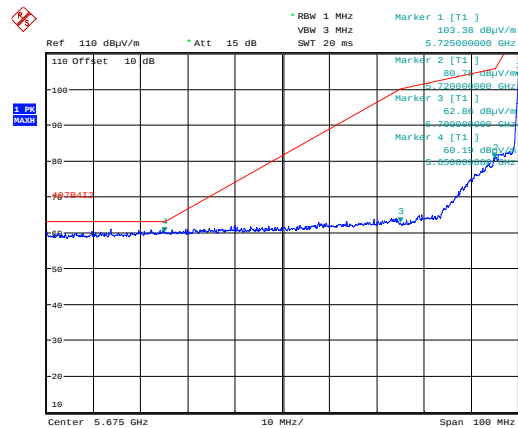

Date: 22.AUG.2016 12:05:24


64QAM

256QAM


Beamforming Mode

5735 MHz

MIMO A

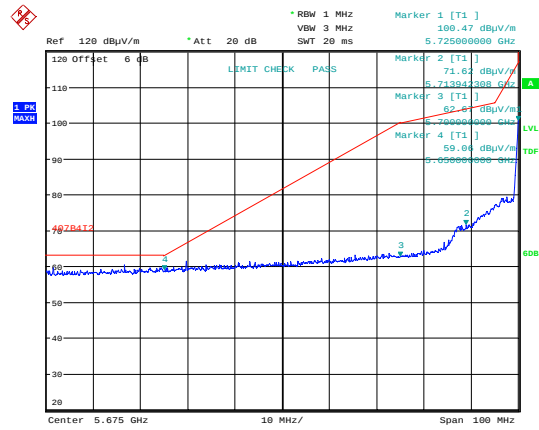


Date: 23.AUG.2016 11:22:27

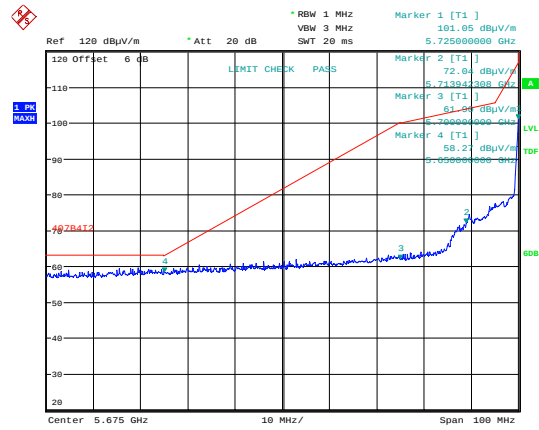


Date: 23.AUG.2016 11:25:13

QPSK

16QAM

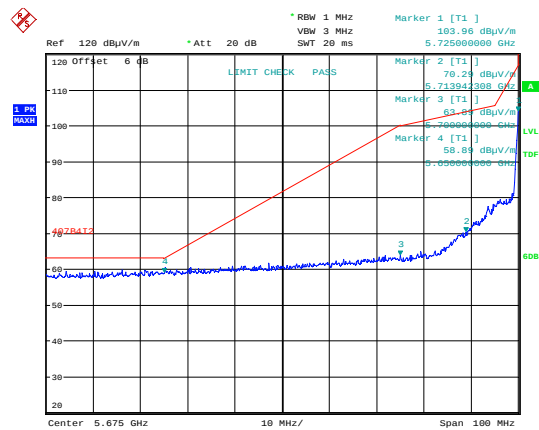

Date: 23.AUG.2016 11:10:02

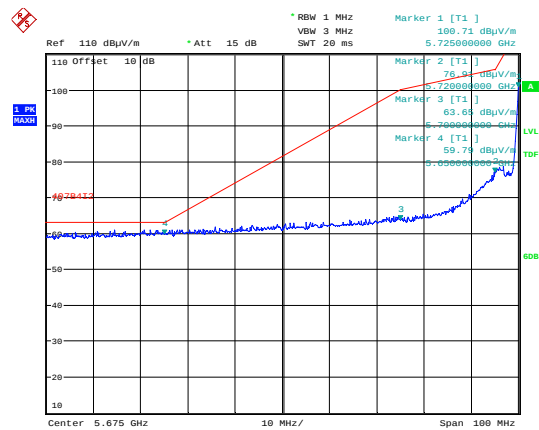

Date: 22.AUG.2016 12:22:14


64QAM

256QAM


MU-MIMO Mode

5735 MHz

MIMO A

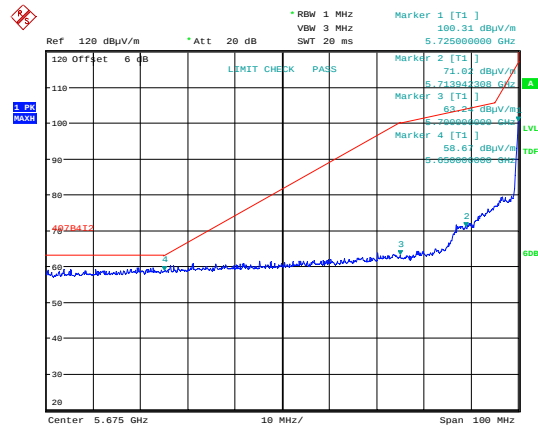


Date: 23.AUG.2016 11:31:47

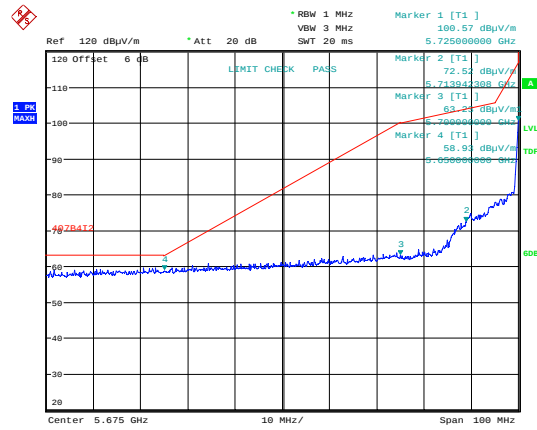


Date: 23.AUG.2016 11:35:36

QPSK

16QAM

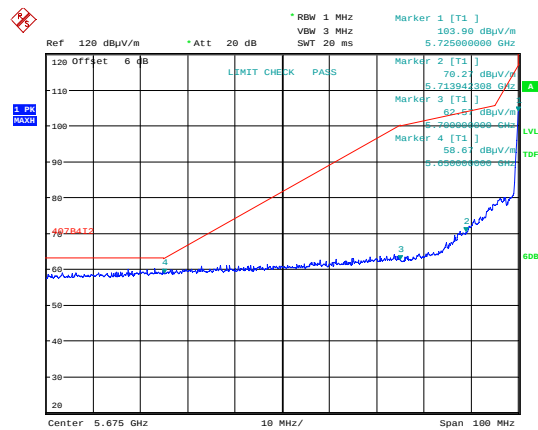

Date: 23.AUG.2016 11:43:07

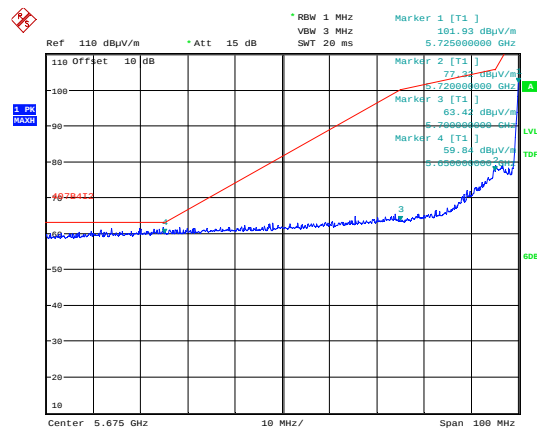

Date: 22.AUG.2016 12:36:13


64QAM

256QAM


Sector Mode

5735 MHz

MIMO B

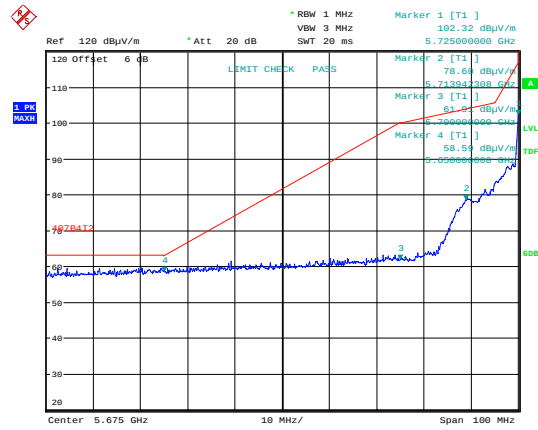


Date: 23.AUG.2016 10:47:37

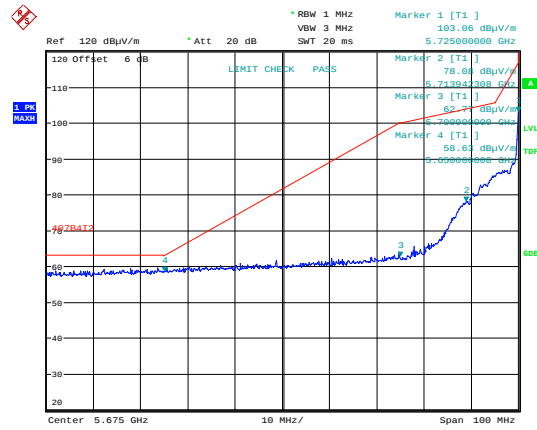


Date: 23.AUG.2016 10:43:00

QPSK

16QAM

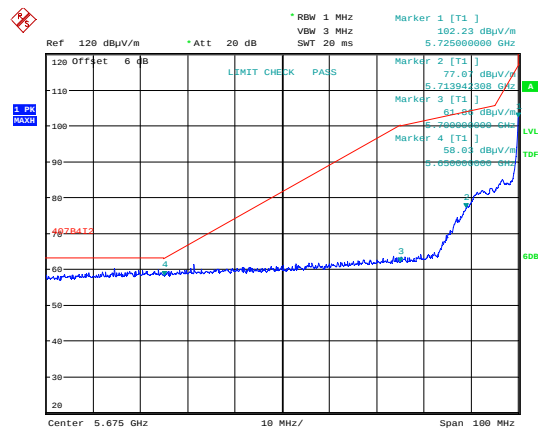

Date: 23.AUG.2016 10:33:05

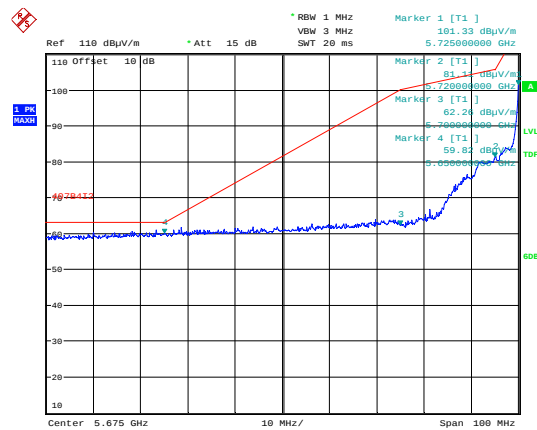

Date: 22.AUG.2016 13:08:34


64QAM

256QAM


Beamforming Mode

5735 MHz

MIMO B

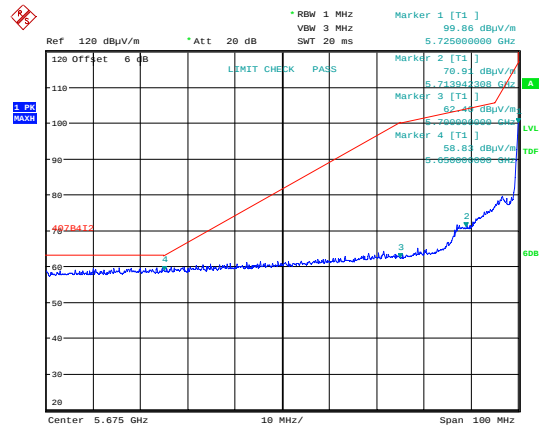


Date: 23.AUG.2016 10:56:13

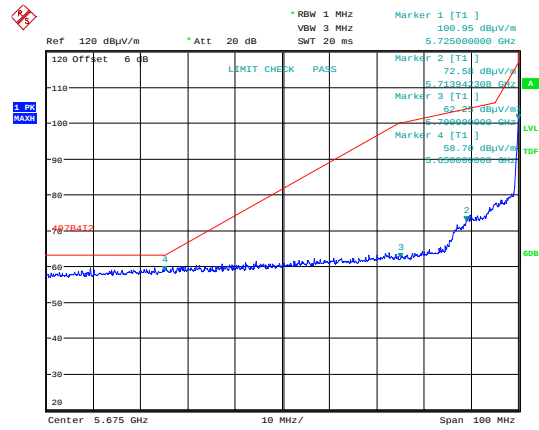


Date: 23.AUG.2016 10:59:19

QPSK

16QAM

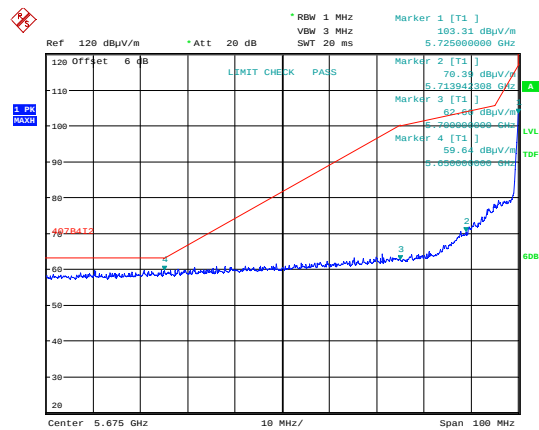

Date: 23.AUG.2016 11:03:04

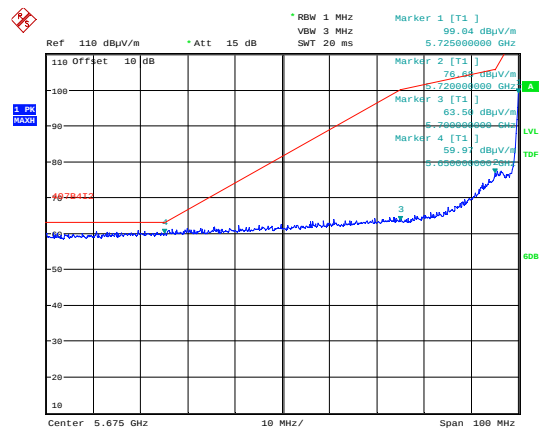

Date: 22.AUG.2016 13:01:54


64QAM

256QAM


MU-MIMO Mode

5735 MHz

MIMO B

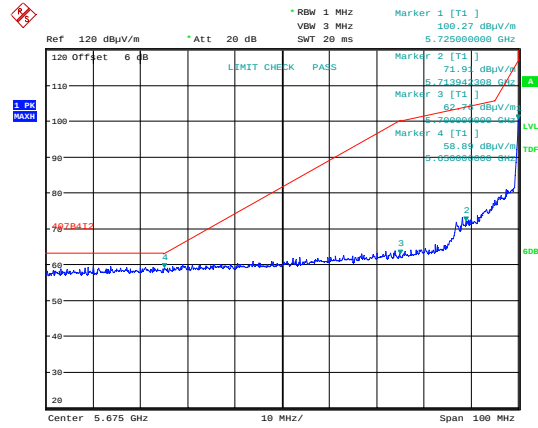


Date: 23.AUG.2016 11:58:08

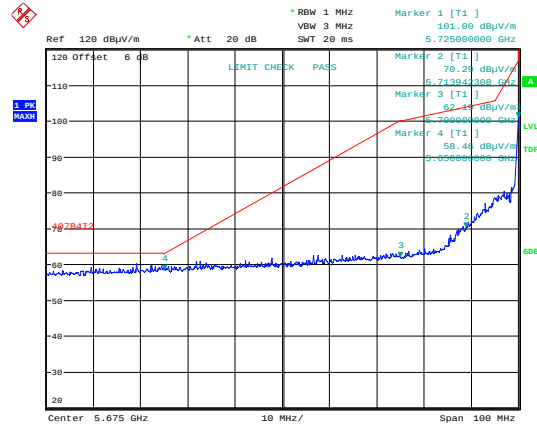


Date: 23.AUG.2016 11:53:34

QPSK

16QAM

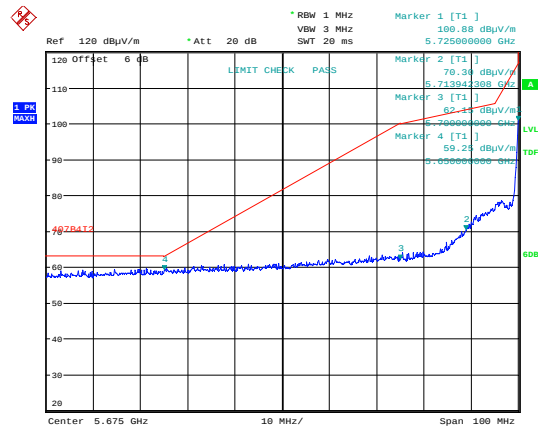

Date: 23.AUG.2016 11:46:06

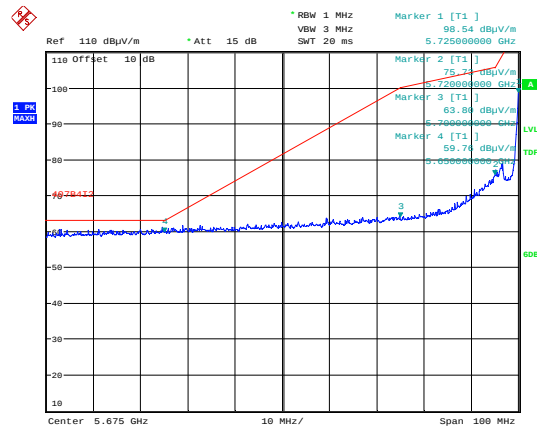

Date: 22.AUG.2016 12:50:30

64QAM



256QAM

Channel: 5840 MHz; Modulation						
Emission Frequency (MHz)	Peak Field Strength (dBμV/m)	Distance (m)	Power, eirp (dBm)	Limit (dBm)	Margin (dB)	Result
See plots for emissions Upto 100 MHz from Band edge						PASS
No Significant Emissions >100 MHz from Band edge						PASS

Sector Mode



5840 MHz

MIMO A

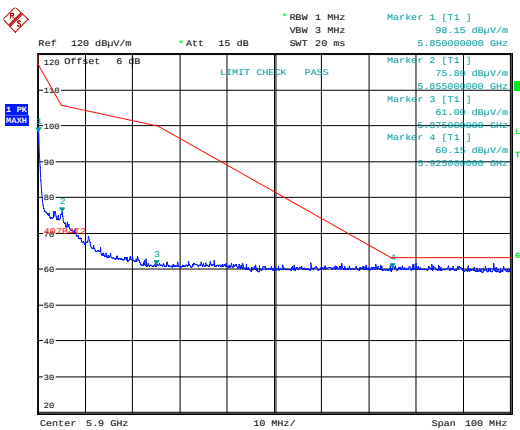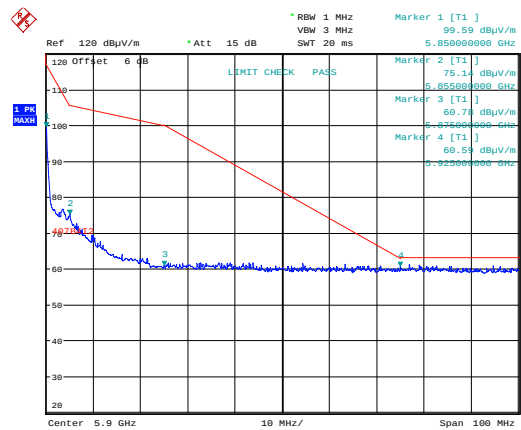

QPSK

16QAM

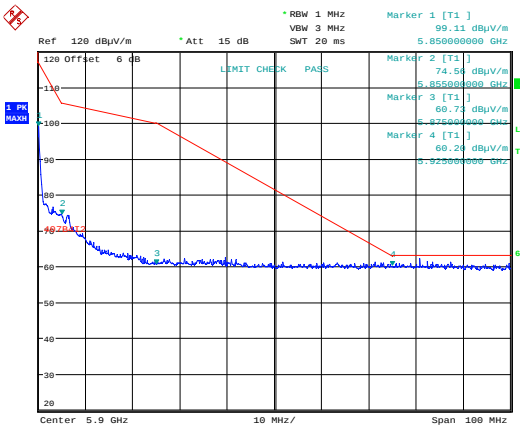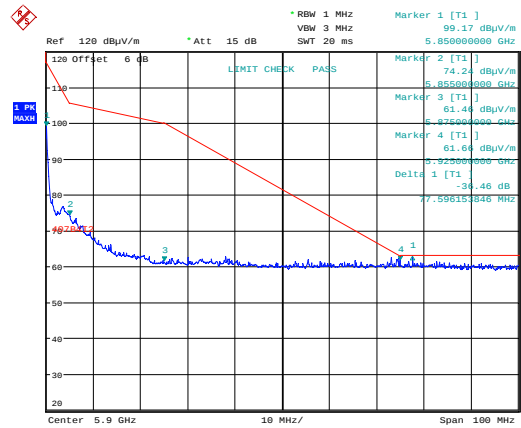


64QAM

256QAM


Beamforming Mode

5840 MHz

MIMO A

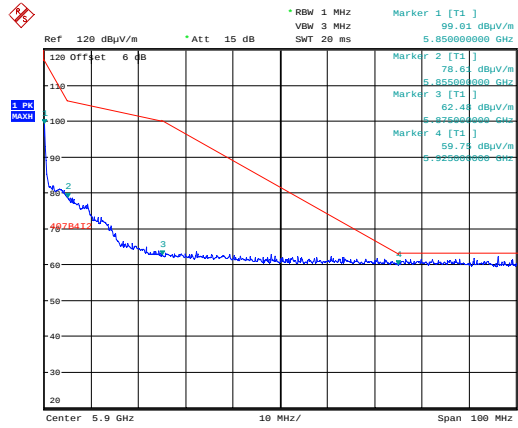


Date: 22.AUG.2016 15:47:41

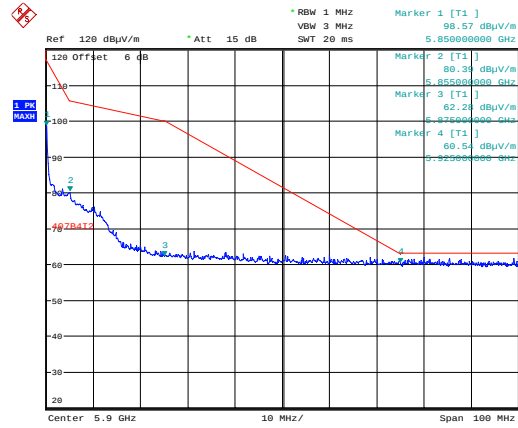


Date: 22.AUG.2016 15:44:19

QPSK

16QAM

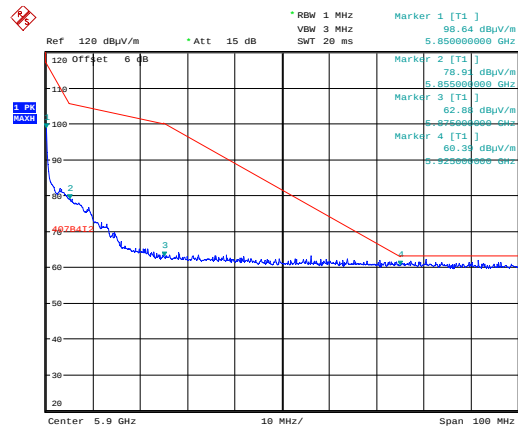

Date: 22.AUG.2016 15:38:26

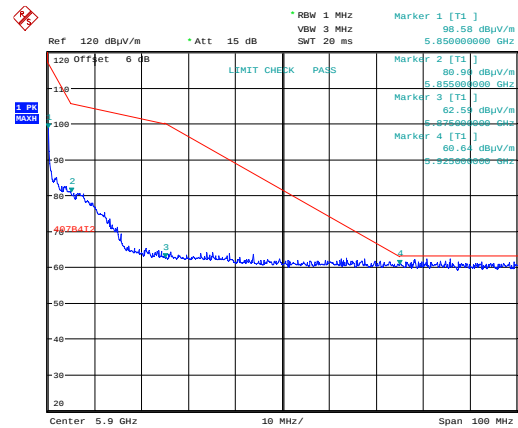

Date: 31.AUG.2016 10:22:10


64QAM

256QAM


MU-MIMO Mode

5840 MHz

MIMO A

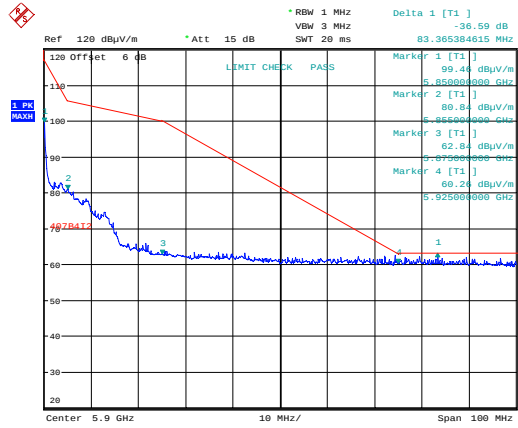


Date: 22.AUG.2016 17:51:49

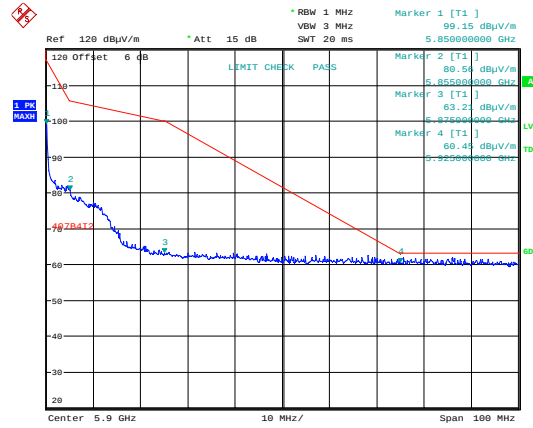


Date: 22.AUG.2016 17:37:50

QPSK

16QAM

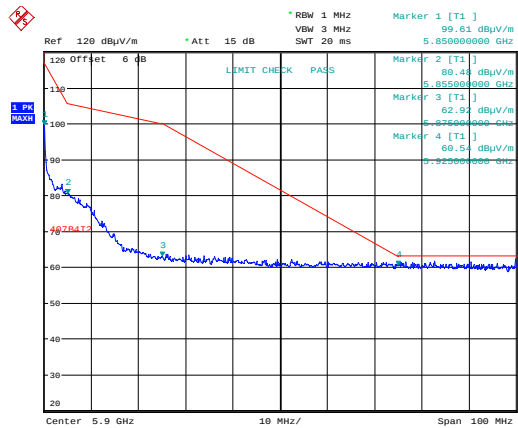

Date: 22.AUG.2016 17:40:12

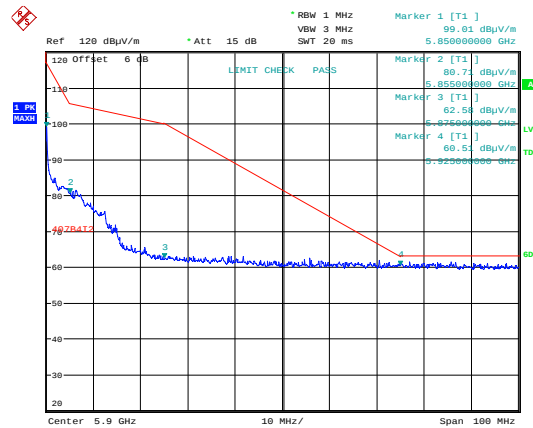

Date: 22.AUG.2016 17:41:29


64QAM

256QAM


Sector Mode

5840 MHz

MIMO B

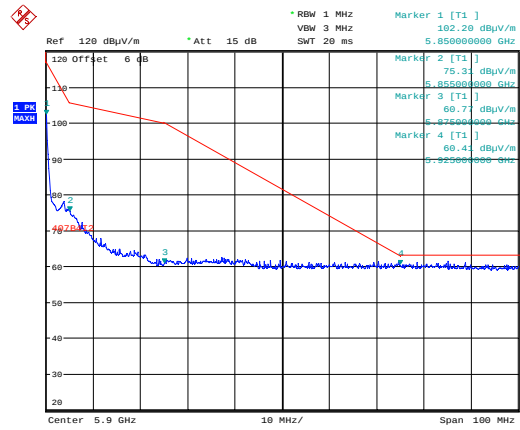


Date: 22.AUG.2016 16:11:54

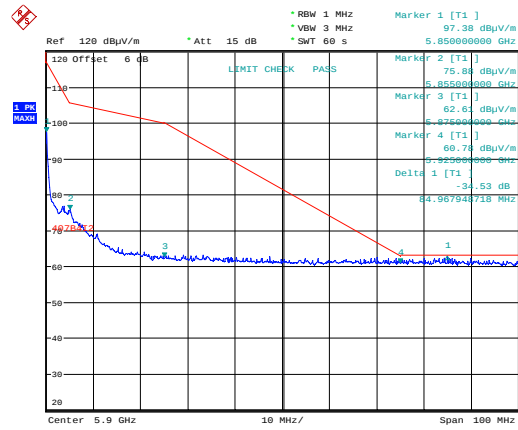


Date: 26.AUG.2016 10:39:44

QPSK

16QAM

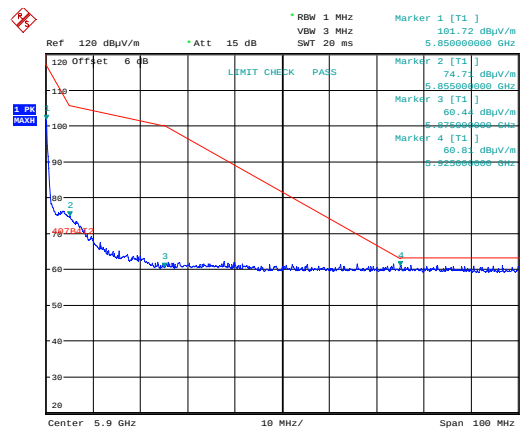

Date: 22.AUG.2016 16:53:57

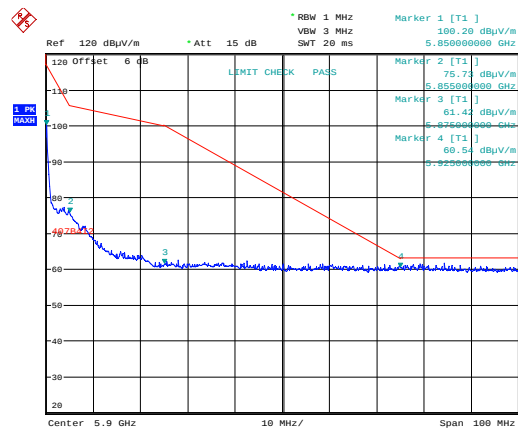

Date: 22.AUG.2016 16:58:16


64QAM

256QAM


Beamforming Mode

5840 MHz

MIMO B

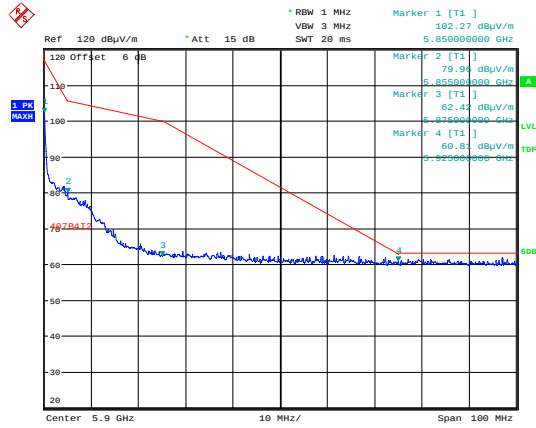


Date: 22.AUG.2016 16:06:45

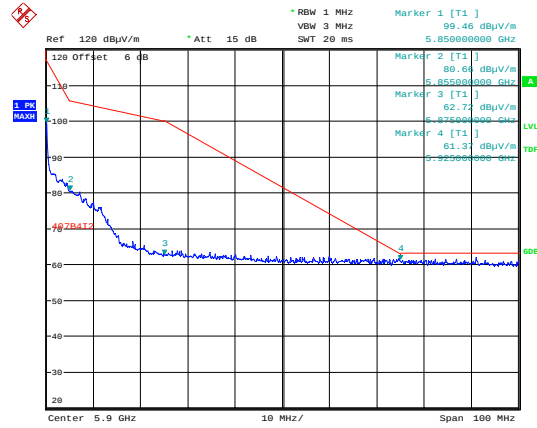


Date: 22.AUG.2016 16:03:47

QPSK

16QAM

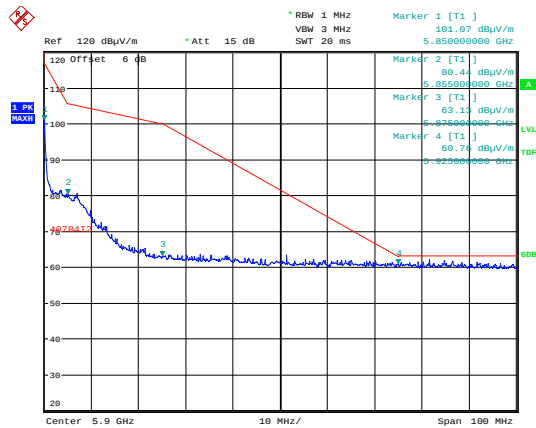

Date: 22.AUG.2016 15:58:17

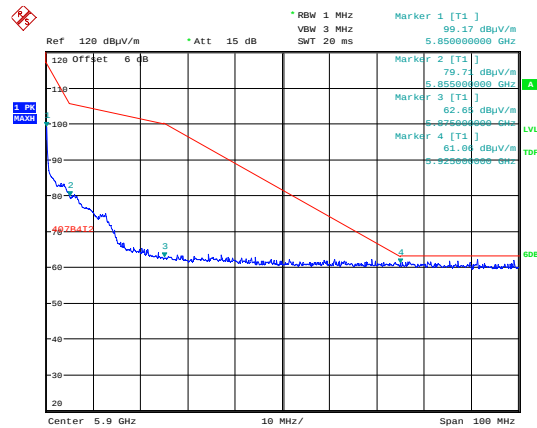

Date: 22.AUG.2016 15:55:05


64QAM

256QAM


MU-MIMO Mode

5840 MHz

MIMO B

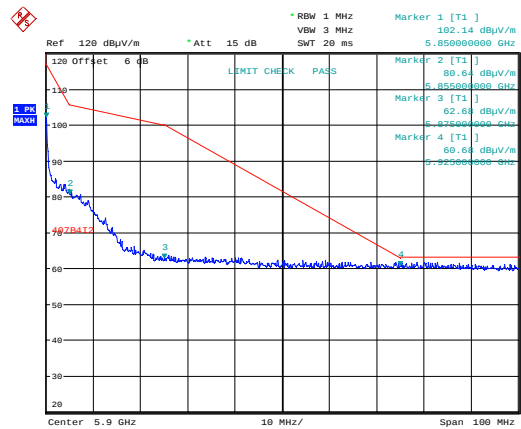


Date: 22.AUG.2016 17:49:12

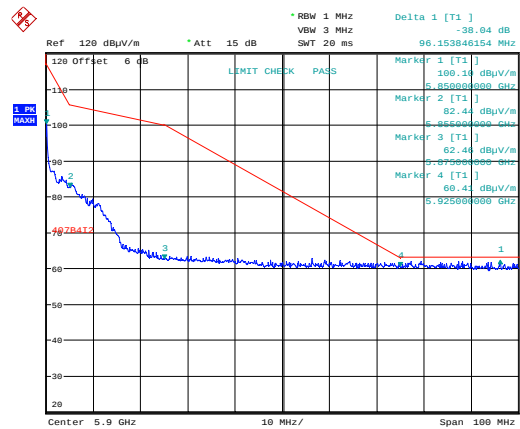


Date: 22.AUG.2016 17:47:38

QPSK

16QAM

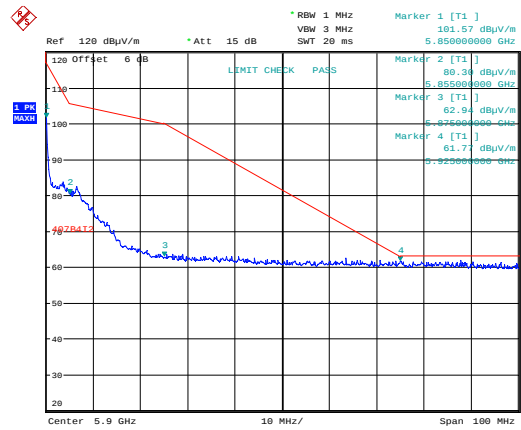

Date: 22.AUG.2016 17:45:33

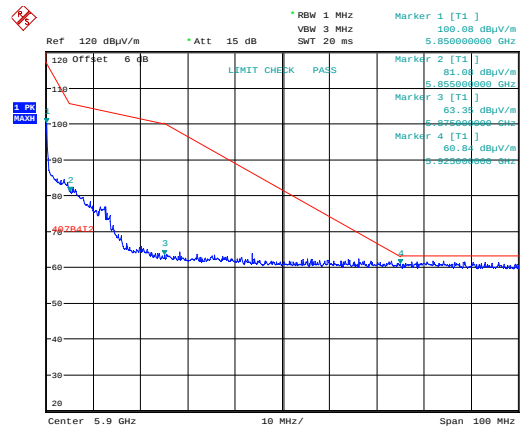

Date: 22.AUG.2016 17:43:25

64QAM

256QAM

17 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.4dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.5%**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08dB**

[5] Conducted / radiated RF power out-of-band

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[6] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[7] Carrier power EIRP at 30m

Uncertainty in test result 4.26 dB (Expanded Uncertainty, coverage factor of 2)