



A D T

FCC TEST REPORT (15.407)

REPORT NO.: RF990419C04A

MODEL NO.: APL21-06E

FCC ID: QWU-06E

RECEIVED: Apr. 22, 2010

TESTED: Apr. 22 ~ May 22, 2010

ISSUED: Feb. 16, 2011

APPLICANT: Sonicwall, Inc.

ADDRESS: 2001 Logic Drive San Jose, CA 95124, USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 111 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product, certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	11
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4 DESCRIPTION OF SUPPORT UNITS	15
4. TEST TYPES AND RESULTS	16
4.1 RADIATED EMISSION MEASUREMENT	16
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	16
4.1.3 TEST INSTRUMENTS	17
4.1.4 TEST PROCEDURES	18
4.1.5 DEVIATION FROM TEST STANDARD	18
4.1.6 TEST SETUP	19
4.1.7 EUT OPERATING CONDITION	19
4.1.8 TEST RESULTS	20
4.2 CONDUCTED EMISSION MEASUREMENT	45
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	45
4.2.2 TEST INSTRUMENTS	45
4.2.3 TEST PROCEDURES	46
4.2.4 DEVIATION FROM TEST STANDARD	46
4.2.5 TEST SETUP	47
4.2.6 EUT OPERATING CONDITIONS	47
4.2.7 TEST RESULTS	48
4.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	60
4.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	60
4.3.2 TEST INSTRUMENTS	60
4.3.3 TEST PROCEDURE	61
4.3.4 DEVIATION FROM TEST STANDARD	61



A D T

4.3.5	TEST SETUP	61
4.3.6	EUT OPERATING CONDITIONS	61
4.3.7	TEST RESULTS	62
4.4	PEAK POWER EXCURSION MEASUREMENT	67
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	67
4.4.2	TEST INSTRUMENTS	67
4.4.3	TEST PROCEDURE	67
4.4.4	DEVIATION FROM TEST STANDARD	68
4.4.5	TEST SETUP	68
4.4.6	EUT OPERATING CONDITIONS	68
4.4.7	TEST RESULTS	69
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	75
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	75
4.5.2	TEST INSTRUMENTS	75
4.5.3	TEST PROCEDURES	75
4.5.4	DEVIATION FROM TEST STANDARD	76
4.5.5	TEST SETUP	76
4.5.6	EUT OPERATING CONDITIONS	76
4.5.7	TEST RESULTS	77
4.6	FREQUENCY STABILITY	80
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	80
4.6.2	TEST INSTRUMENTS	80
4.6.3	TEST PROCEDURE	80
4.6.4	DEVIATION FROM TEST STANDARD	81
4.6.5	TEST SETUP	81
4.6.6	EUT OPERATING CONDITION	81
4.6.7	TEST RESULTS	82
4.7	BAND EDGES MEASUREMENT	83
4.7.1	TEST INSTRUMENTS	83
4.7.2	TEST PROCEDURE	84
4.7.3	EUT OPERATING CONDITION	84
4.7.4	TEST RESULTS	84
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	109
6.	INFORMATION ON THE TESTING LABORATORIES	110
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	111



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Feb. 16, 2011

1. CERTIFICATION

PRODUCT: Access Point 802.11 a/b/g/n

MODEL: APL21-06E

BRAND: SonicWALL

APPLICANT: Sonicwall, Inc.

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Apr. 22 ~ May 22, 2010

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.4-2003

ANSI C63.10-2009

The above equipment (Model: APL21-06E) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Feb. 16, 2011
Pettie Chen / Specialist

APPROVED BY : , DATE : Feb. 16, 2011
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.46dB at 0.193MHz.
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 5470 & 5725 & 10520 & 10600 MHz.
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Access Point 802.11 a/b/g/n
MODEL NO.	APL21-06E
FCC ID	QWU-06E
POWER SUPPLY	12Vdc (adapter) 48Vdc (POE)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	5260 ~ 5320MHz, 5500 ~ 5700MHz
NUMBER OF CHANNEL	5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz)
OUTPUT POWER	115.8mW for 5260 ~ 5320MHz 121.5mW for 5500 ~ 5700MHz
ANTENNA TYPE	Dipole antenna with 4.0dBi gain
ANTENNA CONNECTER	RSMA
DATA CABLE	NA
I/O PORTS	RJ45, Console
ACCESSORY DEVICES	AC Adapter

NOTE:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report is adding frequency band from 5.26 to 5.32GHz and 5.50 to 5.70GHz by software.
2. The EUT is an Access Point 802.11 a/b/g/n. The test data are separated into following test reports.

	TEST STANDARD	REFERENCE REPORT
WLAN 802.11a, 802.11n	FCC Part 15, Subpart E (Section 15.407)	RF990419C04A
WLAN 802.11a, 802.11n (For DFS report)		RF990419C04A-1

3. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	5260~5320	5500~5700
802.11a	√	√
802.11n (20MHz)	√	√
802.11n (40MHz)	√	√

4. The EUT uses following adapters & POE.

Adapter 1	
BRAND	SINO-AMERICAN
MODEL	SA124C-12V
INPUT POWER	100-240Vac, 0.8A, 50-60Hz
OUTPUT POWER	12Vdc, 1.5A, 18W
POEWR LINE	1.8 m non-shielded cable with one core

Adapter 2	
BRAND	Sunny
MODEL	SYS1319-1812-T3
INPUT POWER	100-240Vac, 1A, 50-60Hz
OUTPUT POWER	12Vdc, 1.5A
POEWR LINE	1.8 m non-shielded cable with one core

POE	
BRAND	EnGenius
MODEL	NPE-7530G
OUTPUT POWER	48Vdc

POE's Adapter	
BRAND	MW
MODEL	ES18U48-480
INPUT POWER	100-240Vac, 50/60Hz, 0.5A
OUTPUT POWER	48Vdc, 0.375A, 18W
POEWR LINE	1.8 m non-shielded cable with one core

**POE & POE's adapter were for the optional accessories

5. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX FUNCTION
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX

6. The EUT has disabled the 5600-5650MHz band by Software.
7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

Operated in 5500 ~ 5700MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		


POWER SETTING

802.11a			802.11n (20MHz)		
CHANNEL		POWER SETTING	CHANNEL		POWER SETTING
52	Chain 0	13.9	52	Chain 0	13.9
	Chain 1	14.5		Chain 1	14.6
	Chain 2	13.9		Chain 2	13.9
60	Chain 0	13.9	60	Chain 0	13.9
	Chain 1	13.7		Chain 1	13.8
	Chain 2	13.4		Chain 2	13.5
64	Chain 0	13.8	64	Chain 0	13.8
	Chain 1	13.6		Chain 1	13.7
	Chain 2	13.3		Chain 2	13.4
100	Chain 0	15.4	100	Chain 0	15.4
	Chain 1	15.0		Chain 1	15.1
	Chain 2	15.0		Chain 2	15.0
116	Chain 0	16.3	116	Chain 0	16.3
	Chain 1	16.2		Chain 1	16.2
	Chain 2	15.6		Chain 2	15.7
132	Chain 0	15.5	132	Chain 0	15.5
	Chain 1	15.6		Chain 1	15.6
	Chain 2	15.0		Chain 2	15.1
140	Chain 0	13.8	140	Chain 0	13.8
	Chain 1	13.2		Chain 1	13.2
	Chain 2	12.4		Chain 2	12.5


802.11n (40MHz)					
CHANNEL		POWER SETTING	CHANNEL		POWER SETTING
54	Chain 0	15.9	110	Chain 0	16.0
	Chain 1	15.9		Chain 1	15.3
	Chain 2	15.8		Chain 2	15.2
62	Chain 0	10.8	134	Chain 0	14.0
	Chain 1	11.1		Chain 1	13.9
	Chain 2	10.9		Chain 2	13.9
102	Chain 0	10.5			
	Chain 1	10.6			
	Chain 2	10.7			

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A & B

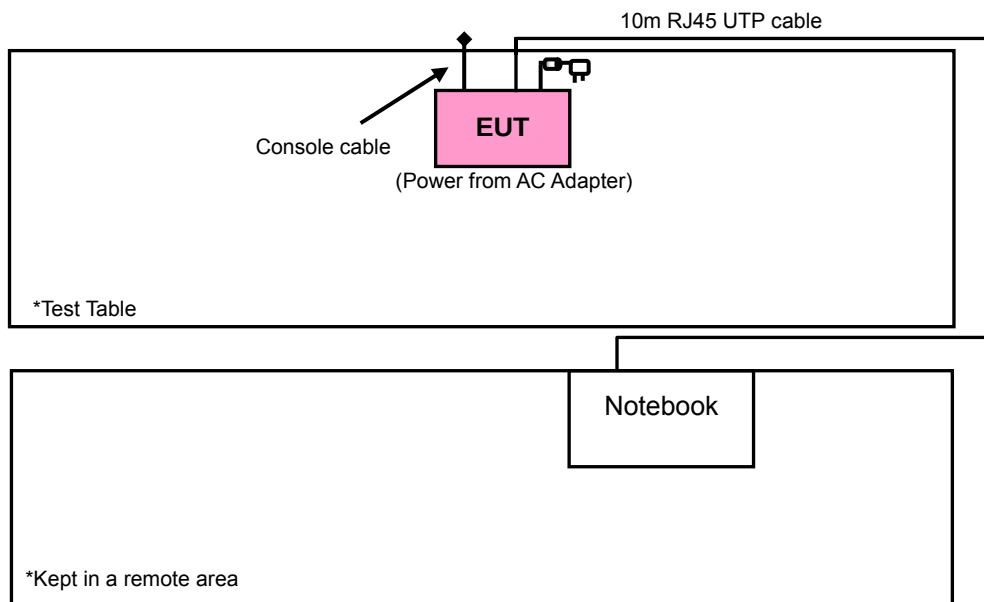

TEST MODE C

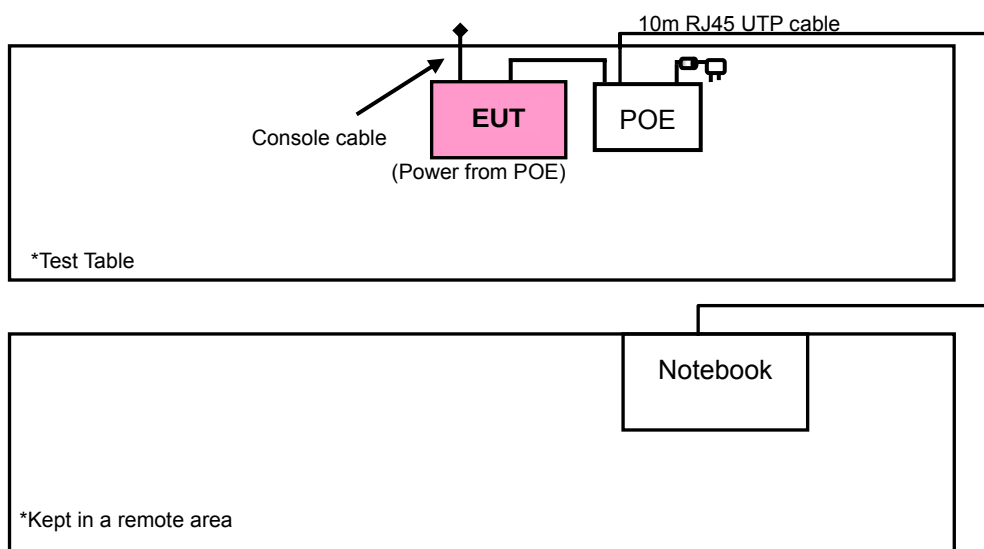

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from AC adapter1: SA124C-12V
B	-	√	√	-	Power from AC adapter2: SYS1319-1812-T3
C	-	√	√	-	Power from POE

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
A	802.11a	5500-5700	100 to 140	100, 116, 132, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 132, 140	OFDM	BPSK	7.2
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11n (40MHz)	5260-5320	54 to 62	54	OFDM	BPSK	15.0
A, B, C	802.11n (20MHz)	5500-5700	100 to 140	116	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11n (40MHz)	5260-5320	54 to 62	54	OFDM	BPSK	15.0
A, B, C	802.11n (20MHz)	5500-5700	100 to 140	116	OFDM	BPSK	7.2

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	7.2
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
A	802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	7.2
A	802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
A	802.11a	5500-5700	100 to 140	100, 116, 132, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 132, 140	OFDM	BPSK	7.2
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE $\geq$ 1G	23deg. C, 70%RH, 1006 hPa	120Vac, 60Hz	Dean Wang
RE<1G	23deg. C, 70%RH, 1006 hPa	120Vac, 60Hz	Dean Wang
PLC	24deg. C, 60%RH, 1007 hPa	120Vac, 60Hz	Mick Chou
APCM	23deg. C, 70%RH, 1006 hPa	120Vac, 60Hz	Dean Wang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	25191592336	E2K24CLNS
2	POE	EnGenius	NPE-7530G	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP RJ45 cable
2	3m UTP RJ45 cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
 2. Item 1 acted as a communication partner to transfer data.
 3. Item 2 was supplied from client.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

FREQUENCIES (MHz)	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m) *NOTE 3
	PK	PK
5250 ~ 5350	-27	68.3
5470 ~ 5725	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 21, 2009	Dec. 20, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-403	Sep. 04, 2009	Sep. 03, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 10, 2009	Aug. 09, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8449B	3008A01910	Sep. 11, 2009	Sep. 10, 2010
Preamplifier Agilent	8447D	2944A10638	Dec. 21, 2009	Dec. 20, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 17, 2009	Aug. 16, 2010
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Aug. 27, 2009	Aug. 26, 2010

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

4.1.6 TEST SETUP

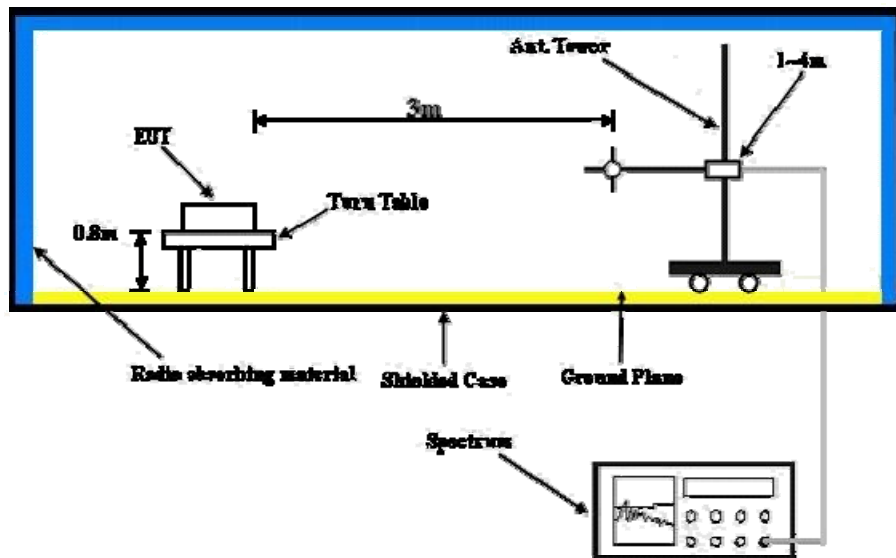

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- Placed the EUT on the testing table.
- Prepared notebook system to act as a communication partner and placed them outside of testing area.
- The communication partners connected with EUT via a UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partners sent data to EUT by command "PING".

4.1.8 TEST RESULTS

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	1.00 H	149	11.80	39.00
2	5150.00	37.4 AV	54.0	-16.6	1.00 H	149	-1.60	39.00
3	*5260.00	104.5 PK			1.00 H	149	65.40	39.10
4	*5260.00	94.4 AV			1.00 H	149	55.30	39.10
5	#7013.00	55.3 PK	68.3	-13.0	1.28 H	246	11.30	44.00
6	#10520.00	60.9 PK	68.3	-7.4	1.15 H	23	11.90	49.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.3 PK	74.0	-20.7	1.05 V	8	14.30	39.00
2	5150.00	41.2 AV	54.0	-12.8	1.05 V	8	2.20	39.00
3	*5260.00	116.8 PK			1.00 V	19	77.70	39.10
4	*5260.00	106.7 AV			1.00 V	19	67.60	39.10
5	#7013.00	59.0 PK	68.3	-9.3	1.39 V	7	15.00	44.00
6	#10520.00	67.2 PK	68.3	-1.1	1.41 V	12	18.20	49.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	104.9 PK			1.04 H	148	65.70	39.20
2	*5300.00	94.8 AV			1.04 H	148	55.60	39.20
3	#7066.00	53.6 PK	68.3	-14.7	1.05 H	159	9.50	44.10
4	10600.00	58.3 PK	74.0	-15.7	1.03 H	56	9.10	49.20
5	10600.00	45.6 AV	54.0	-8.4	1.03 H	56	-3.60	49.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	117.1 PK			1.12 V	188	77.90	39.20
2	*5300.00	107.0 AV			1.12 V	188	67.80	39.20
3	#7066.00	57.5 PK	68.3	-10.8	1.37 V	7	13.40	44.10
4	10600.00	67.1 PK	74.0	-6.9	1.42 V	14	17.90	49.20
5	10600.00	52.8 AV	54.0	-1.2	1.42 V	14	3.60	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	104.7 PK			1.00 H	146	65.50	39.20
2	*5320.00	94.6 AV			1.00 H	146	55.40	39.20
3	5350.00	58.9 PK	74.0	-15.1	1.09 H	146	19.60	39.30
4	5350.00	39.6 AV	54.0	-14.4	1.09 H	146	0.30	39.30
5	#7093.00	53.9 PK	68.3	-14.4	1.03 H	162	9.70	44.20
6	10640.00	58.5 PK	74.0	-15.5	1.01 H	67	9.20	49.30
7	10640.00	45.8 AV	54.0	-8.2	1.01 H	67	-3.50	49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	117.0 PK			1.00 V	183	77.80	39.20
2	*5320.00	106.9 AV			1.00 V	183	67.70	39.20
3	5350.00	71.4 PK	74.0	-2.6	1.11 V	188	32.10	39.30
4	5350.00	52.1 AV	54.0	-1.9	1.11 V	188	12.80	39.30
5	#7093.00	58.1 PK	68.3	-10.2	1.76 V	29	13.90	44.20
6	10640.00	66.8 PK	74.0	-7.2	1.49 V	14	17.50	49.30
7	10640.00	52.7 AV	54.0	-1.3	1.49 V	14	3.40	49.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	1.00 H	331	11.00	39.40
2	5460.00	35.8 AV	54.0	-18.2	1.00 H	331	-3.60	39.40
3	#5470.00	52.8 PK	68.3	-15.5	1.00 H	331	13.40	39.40
4	*5500.00	100.7 PK			1.04 H	27	61.20	39.50
5	*5500.00	90.6 AV			1.04 H	27	51.10	39.50
6	7333.00	54.6 PK	74.0	-19.4	1.00 H	281	9.90	44.70
7	7333.00	41.6 AV	54.0	-12.4	1.00 H	281	-3.10	44.70
8	11000.00	59.3 PK	74.0	-14.7	1.05 H	28	9.50	49.80
9	11000.00	45.8 AV	54.0	-8.2	1.05 H	28	-4.00	49.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	1.07 V	17	18.20	39.40
2	5460.00	39.9 AV	54.0	-14.1	1.07 V	17	0.50	39.40
3	#5470.00	67.2 PK	68.3	-1.1	1.07 V	17	27.80	39.40
4	*5500.00	116.1 PK			1.08 V	8	76.60	39.50
5	*5500.00	106.0 AV			1.08 V	8	66.50	39.50
6	7333.00	57.9 PK	74.0	-16.1	1.28 V	15	13.20	44.70
7	7333.00	51.6 AV	54.0	-2.4	1.28 V	15	6.90	44.70
8	11000.00	63.0 PK	74.0	-11.0	1.42 V	26	13.20	49.80
9	11000.00	50.5 AV	54.0	-3.5	1.42 V	26	0.70	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	102.5 PK			1.00 H	31	62.90	39.60
2	*5580.00	92.5 AV			1.00 H	31	52.90	39.60
3	7440.00	54.6 PK	74.0	-19.4	1.00 H	283	9.60	45.00
4	7440.00	41.5 AV	54.0	-12.5	1.00 H	283	-3.50	45.00
5	11160.00	59.6 PK	74.0	-14.4	1.00 H	171	9.50	50.10
6	11160.00	46.2 AV	54.0	-7.8	1.00 H	171	-3.90	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	118.1 PK			1.05 V	51	78.50	39.60
2	*5580.00	107.9 AV			1.05 V	51	68.30	39.60
3	7440.00	56.1 PK	74.0	-17.9	1.33 V	329	11.10	45.00
4	7440.00	47.5 AV	54.0	-6.5	1.33 V	329	2.50	45.00
5	11160.00	65.5 PK	74.0	-8.5	1.00 V	34	15.40	50.10
6	11160.00	52.8 AV	54.0	-1.2	1.00 V	34	2.70	50.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 132	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	102.4 PK			1.00 H	37	62.60	39.80
2	*5660.00	92.3 AV			1.00 H	37	52.50	39.80
3	7546.00	54.3 PK	74.0	-19.7	1.00 H	268	9.10	45.20
4	7546.00	41.4 AV	54.0	-12.6	1.00 H	268	-3.80	45.20
5	11320.00	59.4 PK	74.0	-14.6	1.00 H	182	9.10	50.30
6	11320.00	46.0 AV	54.0	-8.0	1.00 H	182	-4.30	50.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	118.2 PK			1.00 V	36	78.40	39.80
2	*5660.00	108.0 AV			1.00 V	36	68.20	39.80
3	7546.00	55.5 PK	74.0	-18.5	1.33 V	318	10.30	45.20
4	7546.00	46.9 AV	54.0	-7.1	1.33 V	318	1.70	45.20
5	11320.00	65.2 PK	74.0	-8.8	1.00 V	19	14.90	50.30
6	11320.00	52.5 AV	54.0	-1.5	1.00 V	19	2.20	50.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	100.5 PK			1.03 H	19	60.60	39.90
2	*5700.00	90.4 AV			1.03 H	19	50.50	39.90
3	#5725.00	48.9 PK	68.3	-19.4	1.03 H	19	8.90	40.00
4	7600.00	54.1 PK	74.0	-19.9	1.00 H	221	8.80	45.30
5	7600.00	41.3 AV	54.0	-12.7	1.00 H	221	-4.00	45.30
6	11400.00	59.6 PK	74.0	-14.4	1.05 H	7	9.20	50.40
7	11400.00	46.2 AV	54.0	-7.8	1.05 H	7	-4.20	50.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	116.3 PK			1.13 V	12	76.40	39.90
2	*5700.00	106.2 AV			1.13 V	12	66.30	39.90
3	#5725.00	67.1 PK	68.3	-1.2	1.10 V	10	27.10	40.00
4	7600.00	55.4 PK	74.0	-18.6	1.05 V	46	10.10	45.30
5	7600.00	42.9 AV	54.0	-11.1	1.05 V	46	-2.40	45.30
6	11400.00	60.8 PK	74.0	-13.2	1.42 V	25	10.40	50.40
7	11400.00	48.1 AV	54.0	-5.9	1.42 V	25	-2.30	50.40

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	1.11 H	137	11.90	39.00
2	5150.00	37.8 AV	54.0	-16.2	1.11 H	137	-1.20	39.00
3	*5260.00	104.7 PK			1.11 H	137	65.60	39.10
4	*5260.00	94.5 AV			1.11 H	137	55.40	39.10
5	#7013.00	55.9 PK	68.3	-12.4	1.05 H	217	11.90	44.00
6	#10520.00	60.4 PK	68.3	-7.9	1.33 H	102	11.40	49.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.2 PK	74.0	-20.8	1.02 V	100	14.20	39.00
2	5150.00	40.9 AV	54.0	-13.1	1.02 V	100	1.90	39.00
3	*5260.00	116.4 PK			1.02 V	100	77.30	39.10
4	*5260.00	106.5 AV			1.02 V	100	67.40	39.10
5	#7013.00	59.3 PK	68.3	-9.0	1.27 V	166	15.30	44.00
6	#10520.00	67.1 PK	68.3	-1.2	1.39 V	16	18.10	49.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	104.6 PK			1.05 H	200	65.40	39.20
2	*5300.00	94.5 AV			1.05 H	200	55.30	39.20
3	#7066.00	53.2 PK	68.3	-15.1	1.00 H	37	9.10	44.10
4	10600.00	59.1 PK	74.0	-14.9	1.26 H	312	9.90	49.20
5	10600.00	45.7 AV	54.0	-8.3	1.26 H	312	-3.50	49.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	116.9 PK			1.11 V	120	77.70	39.20
2	*5300.00	107.1 AV			1.11 V	120	67.90	39.20
3	#7066.00	57.6 PK	68.3	-10.7	1.11 V	120	13.50	44.10
4	10600.00	67.6 PK	74.0	-6.4	1.36 V	208	18.40	49.20
5	10600.00	52.9 AV	54.0	-1.1	1.36 V	208	3.70	49.20

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	104.6 PK			1.01 H	156	65.40	39.20
2	*5320.00	94.5 AV			1.01 H	156	55.30	39.20
3	5350.00	59.2 PK	74.0	-14.8	1.01 H	156	19.90	39.30
4	5350.00	40.2 AV	54.0	-13.8	1.01 H	156	0.90	39.30
5	#7093.00	54.2 PK	68.3	-14.1	1.26 H	2	10.00	44.20
6	10640.00	58.9 PK	74.0	-15.1	1.28 H	166	9.60	49.30
7	10640.00	46.3 AV	54.0	-7.7	1.28 H	166	-3.00	49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	116.7 PK			1.02 V	163	77.50	39.20
2	*5320.00	106.6 AV			1.02 V	163	67.40	39.20
3	5350.00	71.6 PK	74.0	-2.4	1.02 V	163	32.30	39.30
4	5350.00	52.6 AV	54.0	-1.4	1.02 V	163	13.30	39.30
5	#7093.00	58.2 PK	68.3	-10.1	1.36 V	214	14.00	44.20
6	10640.00	66.9 PK	74.0	-7.1	1.49 V	288	17.60	49.30
7	10640.00	52.8 AV	54.0	-1.2	1.49 V	288	3.50	49.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	50.2 PK	74.0	-23.8	1.00 H	319	10.80	39.40
2	5460.00	35.6 AV	54.0	-18.4	1.00 H	319	-3.80	39.40
3	#5470.00	52.5 PK	68.3	-15.8	1.00 H	319	13.10	39.40
4	*5500.00	100.4 PK			1.03 H	29	60.90	39.50
5	*5500.00	90.3 AV			1.03 H	29	50.80	39.50
6	7333.00	54.4 PK	74.0	-19.6	1.00 H	287	9.70	44.70
7	7333.00	41.5 AV	54.0	-12.5	1.00 H	287	-3.20	44.70
8	11000.00	59.1 PK	74.0	-14.9	1.04 H	31	9.30	49.80
9	11000.00	45.7 AV	54.0	-8.3	1.04 H	31	-4.10	49.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	57.5 PK	74.0	-16.5	1.08 V	16	18.10	39.40
2	5460.00	39.7 AV	54.0	-14.3	1.08 V	16	0.30	39.40
3	#5470.00	67.0 PK	68.3	-1.3	1.08 V	16	27.60	39.40
4	*5500.00	115.9 PK			1.07 V	8	76.40	39.50
5	*5500.00	105.8 AV			1.07 V	8	66.30	39.50
6	7333.00	57.8 PK	74.0	-16.2	1.26 V	17	13.10	44.70
7	7333.00	51.4 AV	54.0	-2.6	1.26 V	17	6.70	44.70
8	11000.00	62.8 PK	74.0	-11.2	1.39 V	31	13.00	49.80
9	11000.00	50.2 AV	54.0	-3.8	1.39 V	31	0.40	49.80

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	102.3 PK			1.00 H	28	62.70	39.60
2	*5580.00	92.4 AV			1.00 H	28	52.80	39.60
3	7440.00	54.4 PK	74.0	-19.6	1.00 H	279	9.40	45.00
4	7440.00	41.3 AV	54.0	-12.7	1.00 H	279	-3.70	45.00
5	11160.00	59.5 PK	74.0	-14.5	1.00 H	169	9.40	50.10
6	11160.00	46.1 AV	54.0	-7.9	1.00 H	169	-4.00	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	117.8 PK			1.03 V	62	78.20	39.60
2	*5580.00	107.7 AV			1.03 V	62	68.10	39.60
3	7440.00	55.8 PK	74.0	-18.2	1.29 V	314	10.80	45.00
4	7440.00	47.2 AV	54.0	-6.8	1.29 V	314	2.20	45.00
5	11160.00	65.3 PK	74.0	-8.7	1.00 V	42	15.20	50.10
6	11160.00	52.6 AV	54.0	-1.4	1.00 V	42	2.50	50.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 132	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	102.2 PK			1.00 H	43	62.40	39.80
2	*5660.00	92.1 AV			1.00 H	43	52.30	39.80
3	7546.00	54.2 PK	74.0	-19.8	1.00 H	271	9.00	45.20
4	7546.00	41.2 AV	54.0	-12.8	1.00 H	271	-4.00	45.20
5	11320.00	59.5 PK	74.0	-14.5	1.00 H	196	9.20	50.30
6	11320.00	46.1 AV	54.0	-7.9	1.00 H	196	-4.20	50.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	117.9 PK			1.00 V	42	78.10	39.80
2	*5660.00	107.8 AV			1.00 V	42	68.00	39.80
3	7546.00	55.3 PK	74.0	-18.7	1.28 V	334	10.10	45.20
4	7546.00	46.8 AV	54.0	-7.2	1.28 V	334	1.60	45.20
5	11320.00	65.3 PK	74.0	-8.7	1.00 V	22	15.00	50.30
6	11320.00	52.7 AV	54.0	-1.3	1.00 V	22	2.40	50.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	100.3 PK			1.04 H	22	60.40	39.90
2	*5700.00	90.1 AV			1.04 H	22	50.20	39.90
3	#5725.00	49.1 PK	68.3	-19.2	1.04 H	22	9.10	40.00
4	7600.00	53.9 PK	74.0	-20.1	1.00 H	234	8.60	45.30
5	7600.00	41.2 AV	54.0	-12.8	1.00 H	234	-4.10	45.30
6	11400.00	59.5 PK	74.0	-14.5	1.03 H	11	9.10	50.40
7	11400.00	46.0 AV	54.0	-8.0	1.03 H	11	-4.40	50.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	115.6 PK			1.00 V	9	75.70	39.90
2	*5700.00	105.4 AV			1.00 V	9	65.50	39.90
3	#5725.00	66.9 PK	68.3	-1.4	1.10 V	12	26.90	40.00
4	7600.00	55.2 PK	74.0	-18.8	1.03 V	53	9.90	45.30
5	7600.00	42.7 AV	54.0	-11.3	1.03 V	53	-2.60	45.30
6	11400.00	60.6 PK	74.0	-13.4	1.38 V	31	10.20	50.40
7	11400.00	47.9 AV	54.0	-6.1	1.38 V	31	-2.50	50.40

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.0 PK	74.0	-19.0	1.10 H	123	16.00	39.00
2	5150.00	44.3 AV	54.0	-9.7	1.10 H	123	5.30	39.00
3	*5270.00	103.1 PK			1.10 H	123	63.90	39.20
4	*5270.00	93.0 AV			1.10 H	123	53.80	39.20
5	#7026.00	55.1 PK	68.3	-13.2	1.29 H	26	11.10	44.00
6	#10540.00	60.9 PK	68.3	-7.4	1.10 H	217	11.80	49.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	1.01 V	25	16.30	39.00
2	5150.00	44.9 AV	54.0	-9.1	1.01 V	25	5.90	39.00
3	*5270.00	115.2 PK			1.01 V	25	76.00	39.20
4	*5270.00	103.3 AV			1.01 V	25	64.10	39.20
5	#7026.00	62.1 PK	68.3	-6.2	1.58 V	15	18.10	44.00
6	#10540.00	64.2 PK	68.3	-4.1	1.22 V	16	15.10	49.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 62	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	97.4 PK			1.08 H	255	58.20	39.20
2	*5310.00	87.6 AV			1.08 H	255	48.40	39.20
3	5350.00	60.5 PK	74.0	-13.5	1.08 H	255	21.20	39.30
4	5350.00	40.8 AV	54.0	-13.2	1.08 H	255	1.50	39.30
5	#7080.00	51.1 PK	68.3	-17.2	1.05 H	167	6.90	44.20
6	10620.00	55.4 PK	74.0	-18.6	1.31 H	160	6.10	49.30
7	10620.00	44.6 AV	54.0	-9.4	1.31 H	160	-4.70	49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	109.5 PK			1.00 V	1	70.30	39.20
2	*5310.00	97.7 AV			1.00 V	1	58.50	39.20
3	5350.00	72.2 PK	74.0	-1.8	1.01 V	18	32.90	39.30
4	5350.00	44.9 AV	54.0	-9.1	1.01 V	18	5.60	39.30
5	#7080.00	58.5 PK	68.3	-9.8	1.34 V	349	14.30	44.20
6	10620.00	57.9 PK	74.0	-16.1	1.11 V	248	8.60	49.30
7	10620.00	46.2 AV	54.0	-7.8	1.11 V	248	-3.10	49.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 102	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	50.3 PK	74.0	-23.7	1.03 H	32	10.90	39.40
2	5460.00	35.7 AV	54.0	-18.3	1.03 H	32	-3.70	39.40
3	#5470.00	52.3 PK	68.3	-16.0	1.03 H	32	12.90	39.40
4	*5510.00	92.7 PK			1.03 H	32	53.20	39.50
5	*5510.00	82.6 AV			1.03 H	32	43.10	39.50
6	7346.00	54.3 PK	74.0	-19.7	1.00 H	284	9.50	44.80
7	7346.00	41.4 AV	54.0	-12.6	1.00 H	284	-3.40	44.80
8	11020.00	59.1 PK	74.0	-14.9	1.03 H	36	9.20	49.90
9	11020.00	45.6 AV	54.0	-8.4	1.03 H	36	-4.30	49.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.5 PK	74.0	-15.5	1.05 V	287	19.10	39.40
2	5460.00	42.6 AV	54.0	-11.4	1.05 V	287	3.20	39.40
3	#5470.00	67.2 PK	68.3	-1.1	1.05 V	29	27.80	39.40
4	*5510.00	108.1 PK			1.04 V	34	68.60	39.50
5	*5510.00	98.0 AV			1.04 V	34	58.50	39.50
6	7346.00	57.1 PK	74.0	-16.9	1.57 V	14	12.30	44.80
7	7346.00	50.1 AV	54.0	-3.9	1.57 V	14	5.30	44.80
8	11020.00	59.4 PK	74.0	-14.6	1.04 V	16	9.50	49.90
9	11020.00	46.4 AV	54.0	-7.6	1.04 V	16	-3.50	49.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 110	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	98.9 PK			1.02 H	25	59.30	39.60
2	*5550.00	88.8 AV			1.02 H	25	49.20	39.60
3	7400.00	54.6 PK	74.0	-19.4	1.00 H	297	9.70	44.90
4	7400.00	41.6 AV	54.0	-12.4	1.00 H	297	-3.30	44.90
5	11100.00	59.7 PK	74.0	-14.3	1.05 H	28	9.70	50.00
6	11100.00	46.3 AV	54.0	-7.7	1.05 H	28	-3.70	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	114.4 PK			1.06 V	3	74.80	39.60
2	*5550.00	104.3 AV			1.06 V	3	64.70	39.60
3	7400.00	57.5 PK	74.0	-16.5	1.56 V	14	12.60	44.90
4	7400.00	51.0 AV	54.0	-3.0	1.56 V	14	6.10	44.90
5	11100.00	63.0 PK	74.0	-11.0	1.39 V	27	13.00	50.00
6	11100.00	50.8 AV	54.0	-3.2	1.39 V	27	0.80	50.00

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 134	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	98.6 PK			1.01 H	24	58.70	39.90
2	*5670.00	88.5 AV			1.01 H	24	48.60	39.90
3	#5725.00	49.2 PK	68.3	-19.1	1.01 H	24	9.20	40.00
4	7560.00	54.0 PK	74.0	-20.0	1.00 H	236	8.80	45.20
5	7560.00	41.1 AV	54.0	-12.9	1.00 H	236	-4.10	45.20
6	11340.00	59.4 PK	74.0	-14.6	1.03 H	12	9.10	50.30
7	11340.00	46.1 AV	54.0	-7.9	1.03 H	12	-4.20	50.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	114.1 PK			1.12 V	6	74.20	39.90
2	*5670.00	104.0 AV			1.12 V	6	64.10	39.90
3	#5725.00	67.2 PK	68.3	-1.1	1.03 V	7	27.20	40.00
4	7560.00	55.9 PK	74.0	-18.1	1.03 V	51	10.70	45.20
5	7560.00	43.4 AV	54.0	-10.6	1.03 V	51	-1.80	45.20
6	11340.00	61.2 PK	74.0	-12.8	1.35 V	33	10.90	50.30
7	11340.00	48.3 AV	54.0	-5.7	1.35 V	33	-2.00	50.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA :

FOR 5260-5320MHz BAND: 802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	109.62	31.1 QP	43.5	-12.4	1.50 H	274	20.60	10.50
2	249.60	40.8 QP	46.0	-5.2	1.00 H	223	27.90	12.90
3	375.98	35.5 QP	46.0	-10.5	1.00 H	127	20.00	15.50
4	500.42	36.5 QP	46.0	-9.5	1.50 H	229	17.20	19.30
5	626.80	41.2 QP	46.0	-4.8	1.00 H	295	19.00	22.20
6	801.78	36.9 QP	46.0	-9.1	1.00 H	4	11.50	25.40
7	877.61	39.9 QP	46.0	-6.1	1.50 H	253	14.00	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.95	33.2 QP	40.0	-6.8	1.00 V	145	20.30	12.90
2	111.56	32.4 QP	43.5	-11.1	1.00 V	283	21.60	10.80
3	249.60	33.3 QP	46.0	-12.7	1.00 V	178	20.40	12.90
4	375.98	35.6 QP	46.0	-10.4	1.25 V	196	20.10	15.50
5	626.80	40.8 QP	46.0	-5.2	1.25 V	211	18.60	22.20
6	801.78	35.2 QP	46.0	-10.8	1.25 V	253	9.80	25.40
7	877.61	37.8 QP	46.0	-8.2	1.50 V	184	11.90	25.90

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	208.77	30.8 QP	43.5	-12.7	1.00 H	121	19.80	11.00
2	249.60	38.7 QP	46.0	-7.3	1.00 H	211	25.80	12.90
3	375.98	35.0 QP	46.0	-11.0	1.00 H	229	19.50	15.50
4	626.80	38.1 QP	46.0	-7.9	1.00 H	151	15.90	22.20
5	751.23	35.8 QP	46.0	-10.2	1.00 H	244	11.80	24.00
6	801.78	36.9 QP	46.0	-9.1	1.00 H	22	11.50	25.40
7	877.61	39.3 QP	46.0	-6.7	1.00 H	58	13.40	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.84	31.2 QP	40.0	-8.8	1.00 V	103	19.00	12.20
2	111.56	32.3 QP	43.5	-11.2	1.00 V	277	21.50	10.80
3	375.98	38.7 QP	46.0	-7.3	1.00 V	172	23.20	15.50
4	500.42	33.7 QP	46.0	-12.3	1.00 V	118	14.40	19.30
5	626.80	40.2 QP	46.0	-5.8	1.25 V	208	18.00	22.20
6	801.78	34.9 QP	46.0	-11.1	1.25 V	262	9.50	25.40
7	877.61	38.9 QP	46.0	-7.1	1.50 V	181	13.00	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.17	39.5 QP	43.5	-4.0	1.50 H	259	27.50	12.00
2	199.05	36.1 QP	43.5	-7.4	1.50 H	202	25.40	10.70
3	375.98	39.7 QP	46.0	-6.3	1.00 H	196	24.20	15.50
4	626.80	40.0 QP	46.0	-6.0	1.50 H	142	17.80	22.20
5	803.73	40.2 QP	46.0	-5.8	1.25 H	154	14.80	25.40
6	877.61	40.9 QP	46.0	-5.1	1.50 H	229	15.00	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.90	35.8 QP	40.0	-4.2	1.00 V	67	23.30	12.50
2	117.39	37.6 QP	43.5	-5.9	1.25 V	304	26.10	11.50
3	500.42	37.4 QP	46.0	-8.6	1.00 V	181	18.10	19.30
4	626.80	39.3 QP	46.0	-6.7	1.25 V	7	17.10	22.20
5	762.90	39.0 QP	46.0	-7.0	1.25 V	178	14.70	24.30
6	877.61	40.5 QP	46.0	-5.5	1.50 V	196	14.60	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

FOR 5500-5700MHz BAND: 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	208.77	33.3 QP	43.5	-10.2	1.00 H	169	22.30	11.00
2	249.60	41.4 QP	46.0	-4.6	1.00 H	229	28.50	12.90
3	375.98	35.4 QP	46.0	-10.6	1.00 H	85	19.90	15.50
4	626.80	41.9 QP	46.0	-4.1	1.00 H	289	19.70	22.20
5	751.23	33.6 QP	46.0	-12.4	1.00 H	250	9.60	24.00
6	801.78	38.6 QP	46.0	-7.4	1.00 H	10	13.20	25.40
7	877.61	39.4 QP	46.0	-6.6	1.00 H	223	13.50	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.95	32.2 QP	40.0	-7.8	1.00 V	55	19.30	12.90
2	107.67	32.6 QP	43.5	-10.9	1.00 V	313	22.30	10.30
3	249.60	33.5 QP	46.0	-12.5	1.00 V	175	20.60	12.90
4	375.98	35.2 QP	46.0	-10.8	1.25 V	184	19.70	15.50
5	500.42	33.7 QP	46.0	-12.3	1.00 V	127	14.40	19.30
6	626.80	40.6 QP	46.0	-5.4	1.00 V	10	18.40	22.20
7	801.78	34.0 QP	46.0	-12.0	1.00 V	244	8.60	25.40
8	877.61	38.0 QP	46.0	-8.0	1.50 V	178	12.10	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	199.05	33.5 QP	43.5	-10.0	1.00 H	352	22.80	10.70
2	249.60	34.9 QP	46.0	-11.1	1.00 H	346	22.00	12.90
3	375.98	32.7 QP	46.0	-13.3	1.00 H	124	17.20	15.50
4	626.80	36.8 QP	46.0	-9.2	1.25 H	154	14.60	22.20
5	751.23	32.8 QP	46.0	-13.2	1.00 H	250	8.80	24.00
6	801.78	36.6 QP	46.0	-9.4	1.25 H	334	11.20	25.40
7	877.61	39.2 QP	46.0	-6.8	1.00 H	58	13.30	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.95	30.0 QP	40.0	-10.0	1.00 V	154	17.10	12.90
2	111.56	32.7 QP	43.5	-10.8	1.00 V	289	21.90	10.80
3	375.98	38.3 QP	46.0	-7.7	1.00 V	166	22.80	15.50
4	500.42	34.3 QP	46.0	-11.7	1.00 V	115	15.00	19.30
5	626.80	40.6 QP	46.0	-5.4	1.25 V	208	18.40	22.20
6	751.23	34.1 QP	46.0	-11.9	1.25 V	328	10.10	24.00
7	801.78	35.2 QP	46.0	-10.8	1.25 V	268	9.80	25.40
8	877.61	39.6 QP	46.0	-6.4	1.50 V	172	13.70	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1006 hPa	TESTED BY	Dean Wang
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.39	40.1 QP	43.5	-3.4	1.50 H	286	28.60	11.50
2	375.98	39.0 QP	46.0	-7.0	1.00 H	199	23.50	15.50
3	626.80	41.1 QP	46.0	-4.9	1.25 H	157	18.90	22.20
4	753.18	35.2 QP	46.0	-10.8	1.00 H	229	11.10	24.10
5	803.73	39.7 QP	46.0	-6.3	1.00 H	358	14.30	25.40
6	877.61	40.5 QP	46.0	-5.5	1.50 H	232	14.60	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.84	34.7 QP	40.0	-5.3	1.00 V	10	22.40	12.30
2	64.90	35.9 QP	40.0	-4.1	1.00 V	169	23.40	12.50
3	117.39	37.8 QP	43.5	-5.7	1.25 V	310	26.30	11.50
4	375.98	36.8 QP	46.0	-9.2	1.00 V	193	21.30	15.50
5	500.42	37.3 QP	46.0	-8.7	1.25 V	73	18.00	19.30
6	626.80	39.5 QP	46.0	-6.5	1.25 V	22	17.30	22.20
7	877.61	40.0 QP	46.0	-6.0	1.50 V	199	14.10	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 24, 2009	Sep. 23, 2010
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2009	Dec. 30, 2010
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Aug. 24, 2009	Aug. 23, 2010
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 29, 2009	Jul. 28, 2010
Software ADT	ADT_Conc_ V7.3.7	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.


4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

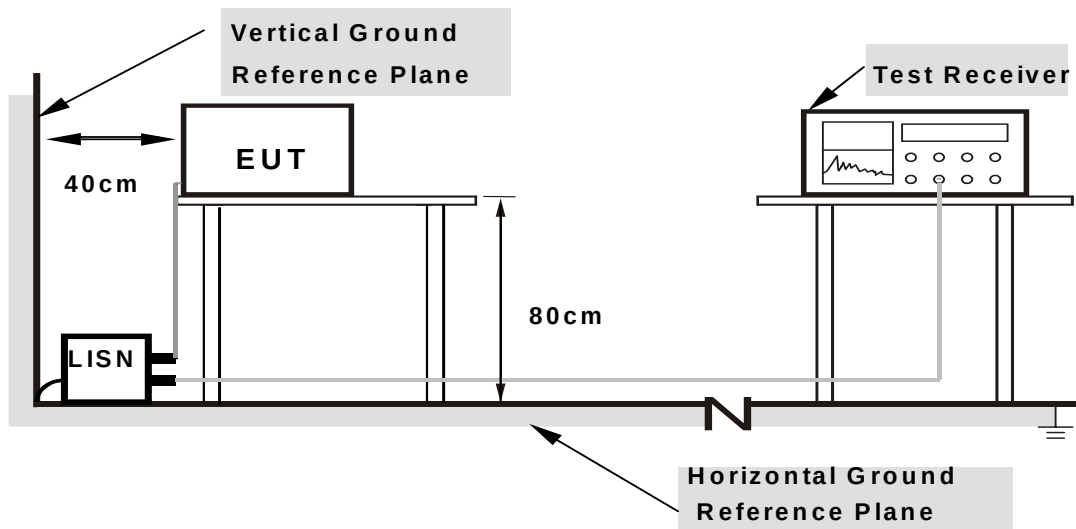

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

FOR 5260-5320MHz BAND: 802.11n (40MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.16	48.82	-	48.98	-	63.58	53.58	-14.60	-
2	0.259	0.17	46.01	-	46.18	-	61.45	51.45	-15.28	-
3	0.334	0.17	42.69	-	42.86	-	59.36	49.36	-16.50	-
4	0.420	0.18	42.78	-	42.96	-	57.46	47.46	-14.50	-
5	0.451	0.18	43.22	-	43.40	-	56.86	46.86	-13.46	-
6	0.966	0.23	35.30	-	35.53	-	56.00	46.00	-20.47	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

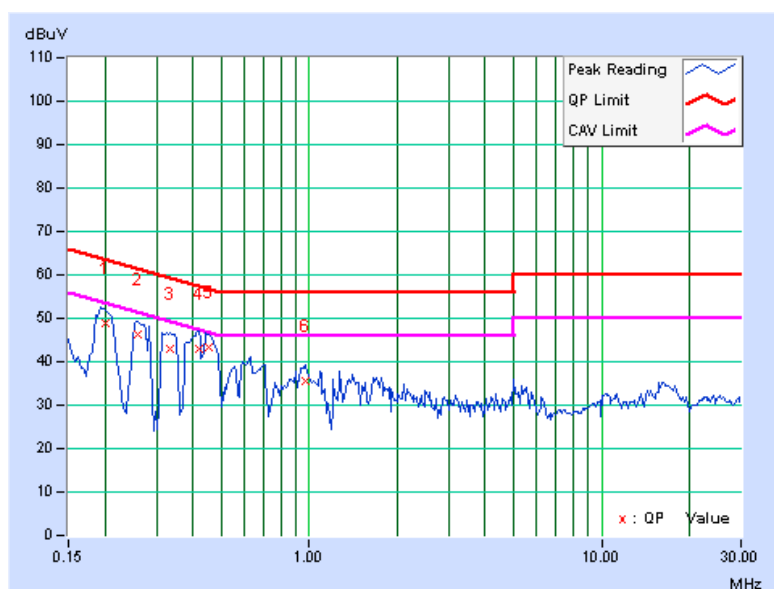

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.13	52.32	-	52.45	-	63.91	53.91	-11.46	-
2	0.271	0.14	46.27	-	46.41	-	61.08	51.08	-14.67	-
3	0.334	0.15	44.97	-	45.12	-	59.36	49.36	-14.24	-
4	0.392	0.16	44.34	-	44.50	-	58.02	48.02	-13.52	-
5	0.451	0.17	45.10	-	45.27	-	56.86	46.86	-11.60	-
6	0.615	0.18	37.11	-	37.29	-	56.00	46.00	-18.71	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

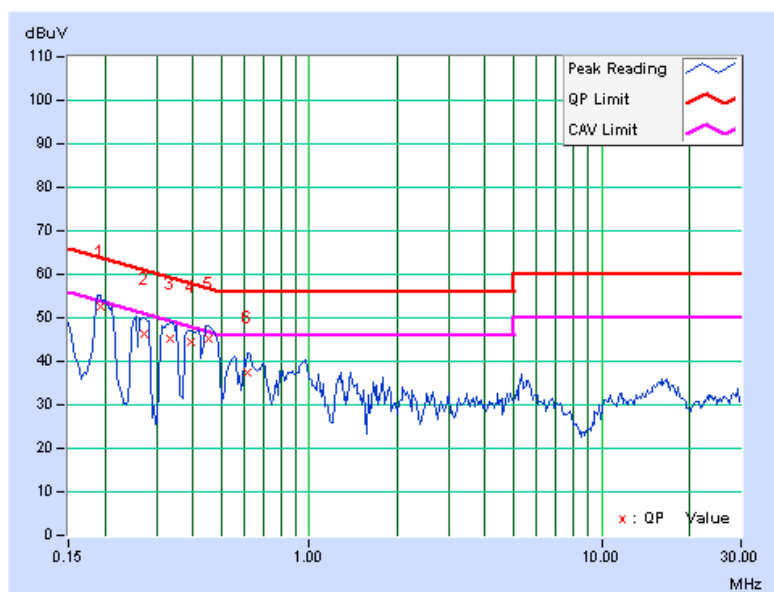

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.16	45.93	-	46.09	-	66.00	56.00	-19.91	-
2	0.185	0.16	41.84	-	42.00	-	64.25	54.25	-22.25	-
3	0.369	0.18	34.68	-	34.86	-	58.53	48.53	-23.67	-
4	2.414	0.32	31.06	-	31.38	-	56.00	46.00	-24.62	-
5	5.449	0.35	34.55	-	34.90	-	60.00	50.00	-25.10	-
6	13.285	0.45	28.58	-	29.03	-	60.00	50.00	-30.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

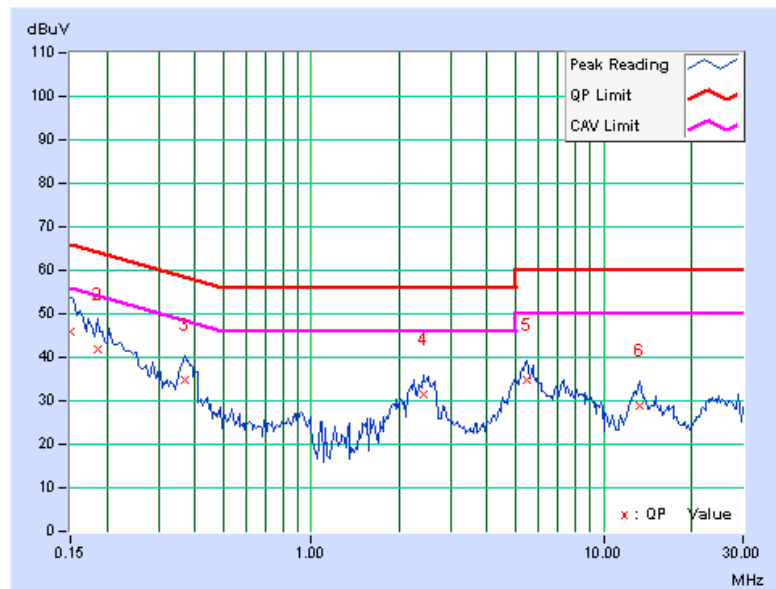

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.13	47.02	-	47.15	-	65.79	55.79	-18.64	-
2	0.193	0.13	40.55	-	40.68	-	63.91	53.91	-23.23	-
3	0.380	0.16	33.91	-	34.07	-	58.27	48.27	-24.20	-
4	2.473	0.31	32.11	-	32.42	-	56.00	46.00	-23.58	-
5	5.531	0.38	31.49	-	31.87	-	60.00	50.00	-28.13	-
6	13.027	0.57	29.83	-	30.40	-	60.00	50.00	-29.60	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

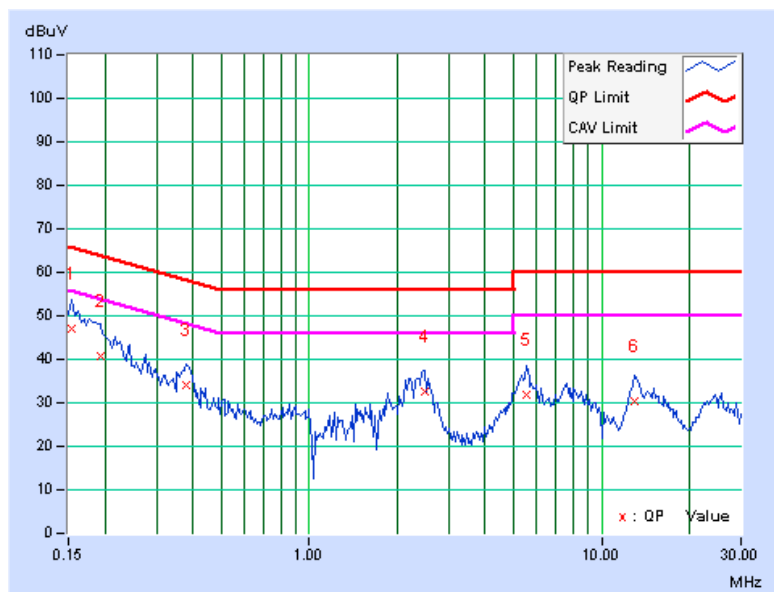

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.16	43.59	-	43.75	-	64.61	54.61	-20.86	-
2	0.451	0.18	33.16	-	33.34	-	56.86	46.86	-23.52	-
3	0.900	0.22	32.95	-	33.17	-	56.00	46.00	-22.83	-
4	3.328	0.34	33.37	-	33.71	-	56.00	46.00	-22.29	-
5	4.230	0.35	34.94	-	35.29	-	56.00	46.00	-20.71	-
6	11.070	0.38	33.24	-	33.62	-	60.00	50.00	-26.38	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

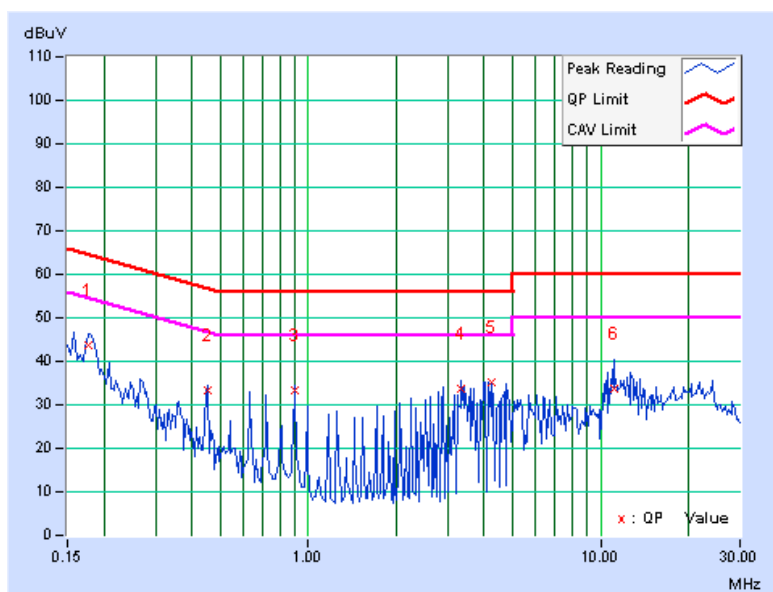

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.13	44.41	-	44.54	-	64.43	54.43	-19.89	-
2	0.451	0.17	29.37	-	29.54	-	56.86	46.86	-27.33	-
3	0.900	0.21	29.52	-	29.73	-	56.00	46.00	-26.27	-
4	3.418	0.34	34.20	-	34.54	-	56.00	46.00	-21.46	-
5	10.520	0.46	32.99	-	33.45	-	60.00	50.00	-26.55	-
6	24.102	0.87	29.18	-	30.05	-	60.00	50.00	-29.95	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

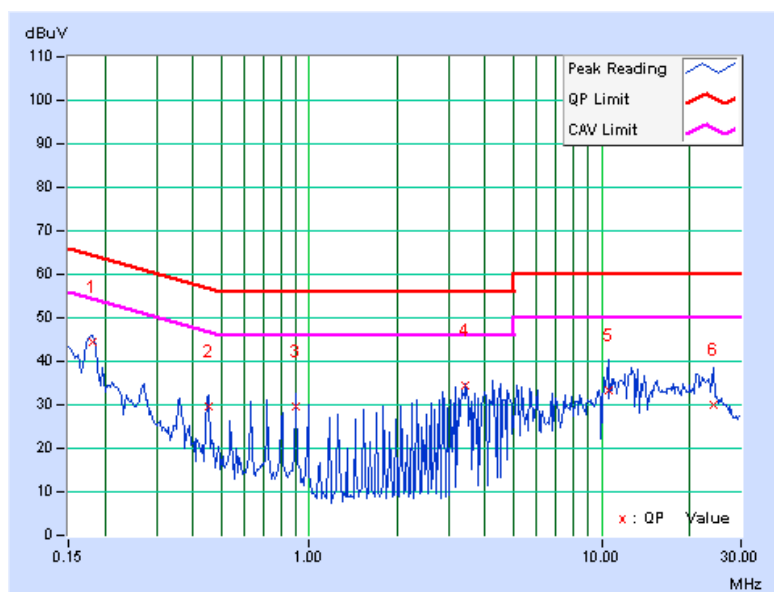


FOR 5500-5700MHz BAND: 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.16	49.87	-	50.03	-	63.91	53.91	-13.88	-
2	0.259	0.17	45.91	-	46.08	-	61.45	51.45	-15.38	-
3	0.341	0.17	42.61	-	42.78	-	59.17	49.17	-16.38	-
4	0.412	0.18	43.09	-	43.27	-	57.61	47.61	-14.34	-
5	0.439	0.18	42.02	-	42.20	-	57.08	47.08	-14.88	-
6	0.619	0.20	36.92	-	37.12	-	56.00	46.00	-18.88	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

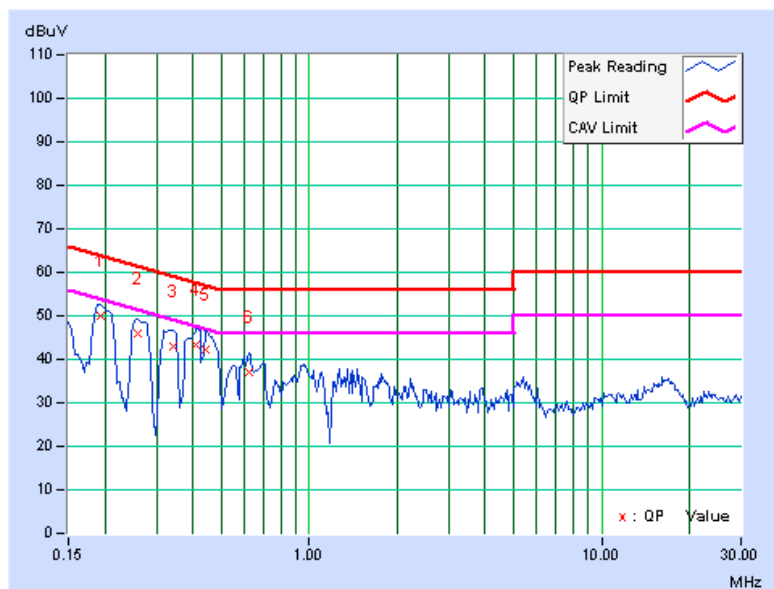

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.13	51.40	-	51.53	-	64.08	54.08	-12.55	-
2	0.252	0.14	45.35	-	45.49	-	61.71	51.71	-16.22	-
3	0.341	0.15	45.15	-	45.30	-	59.17	49.17	-13.87	-
4	0.400	0.16	43.98	-	44.14	-	57.85	47.85	-13.71	-
5	0.451	0.17	45.00	-	45.17	-	56.86	46.86	-11.70	-
6	0.619	0.18	37.25	-	37.43	-	56.00	46.00	-18.57	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

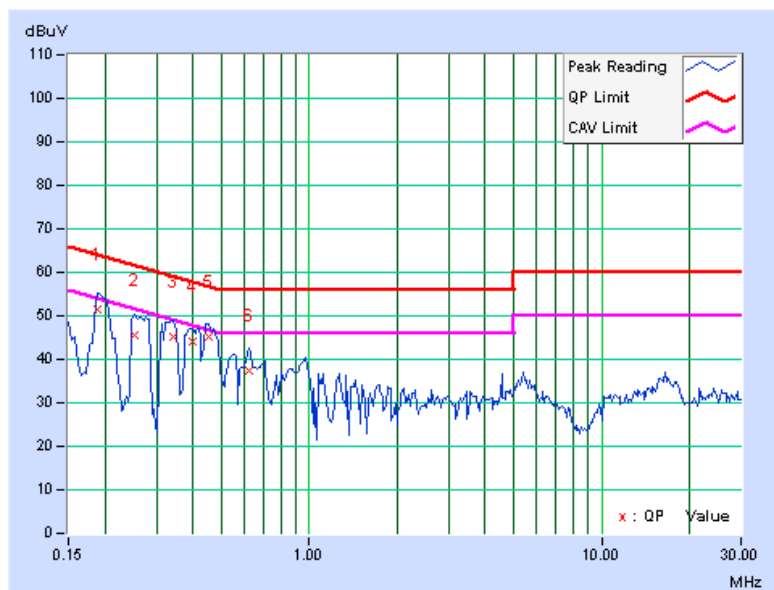

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.16	45.54	-	45.70	-	65.38	55.38	-19.68	-
2	0.224	0.16	36.87	-	37.03	-	62.66	52.66	-25.63	-
3	0.373	0.18	34.94	-	35.12	-	58.44	48.44	-23.32	-
4	2.508	0.32	31.37	-	31.69	-	56.00	46.00	-24.31	-
5	5.668	0.35	33.42	-	33.77	-	60.00	50.00	-26.23	-
6	12.977	0.44	29.38	-	29.82	-	60.00	50.00	-30.18	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

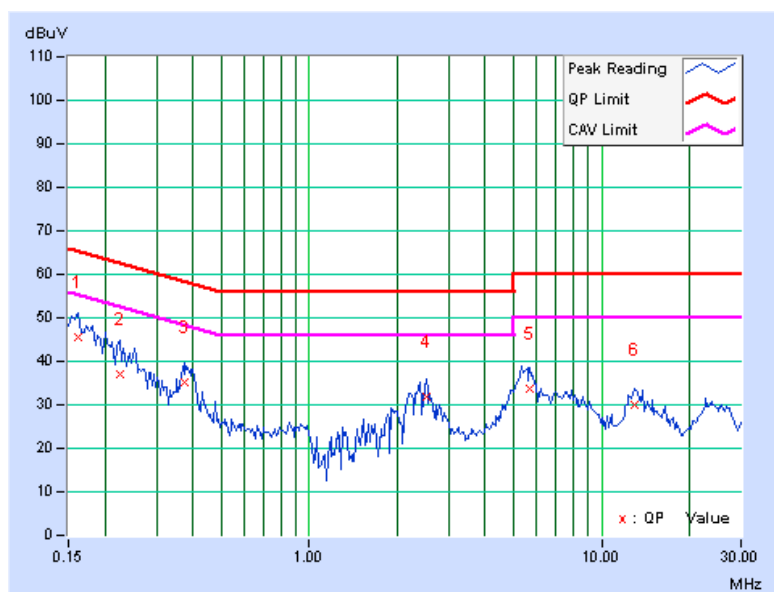

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.13	46.44	-	46.57	-	65.58	55.58	-19.01	-
2	0.197	0.13	38.71	-	38.84	-	63.74	53.74	-24.90	-
3	0.380	0.16	33.23	-	33.39	-	58.27	48.27	-24.88	-
4	2.305	0.31	31.40	-	31.71	-	56.00	46.00	-24.29	-
5	5.469	0.38	31.76	-	32.14	-	60.00	50.00	-27.86	-
6	12.984	0.57	30.11	-	30.68	-	60.00	50.00	-29.32	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

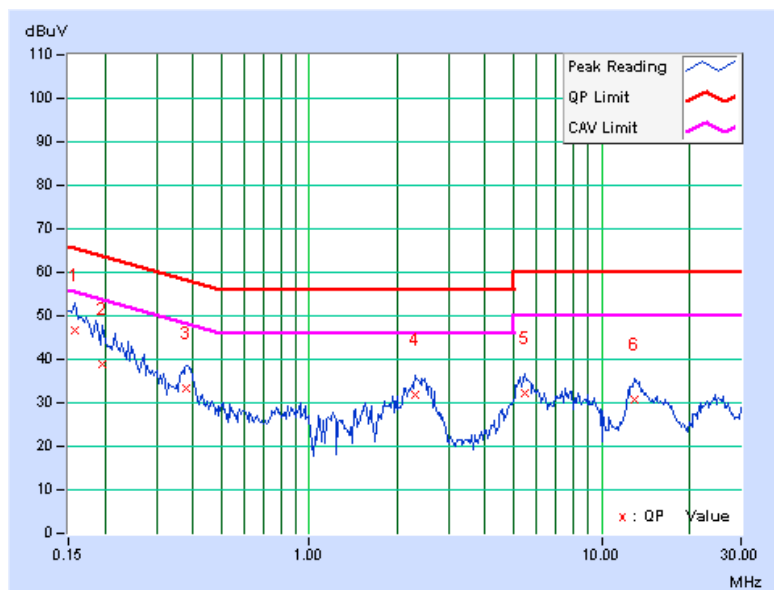

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.16	43.51	-	43.67	-	64.43	54.43	-20.76	-
2	0.451	0.18	33.79	-	33.97	-	56.86	46.86	-22.89	-
3	0.900	0.22	33.70	-	33.92	-	56.00	46.00	-22.08	-
4	3.699	0.34	35.03	-	35.37	-	56.00	46.00	-20.63	-
5	4.328	0.35	35.40	-	35.75	-	56.00	46.00	-20.25	-
6	12.703	0.43	35.17	-	35.60	-	60.00	50.00	-24.40	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

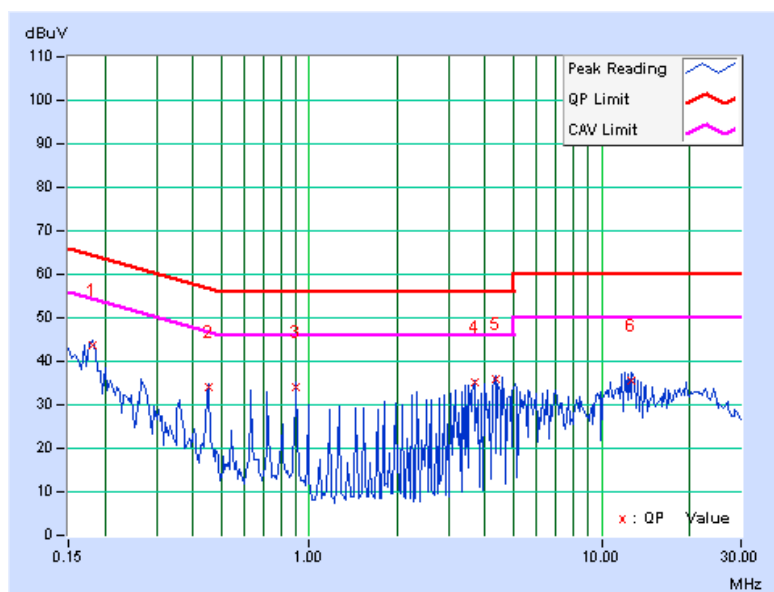

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.13	43.73	-	43.86	-	64.43	54.43	-20.57	-
2	0.451	0.17	29.99	-	30.16	-	56.86	46.86	-26.71	-
3	0.904	0.21	28.44	-	28.65	-	56.00	46.00	-27.35	-
4	3.695	0.35	35.03	-	35.38	-	56.00	46.00	-20.62	-
5	4.777	0.37	33.30	-	33.67	-	56.00	46.00	-22.33	-
6	12.395	0.55	36.10	-	36.65	-	60.00	50.00	-23.35	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

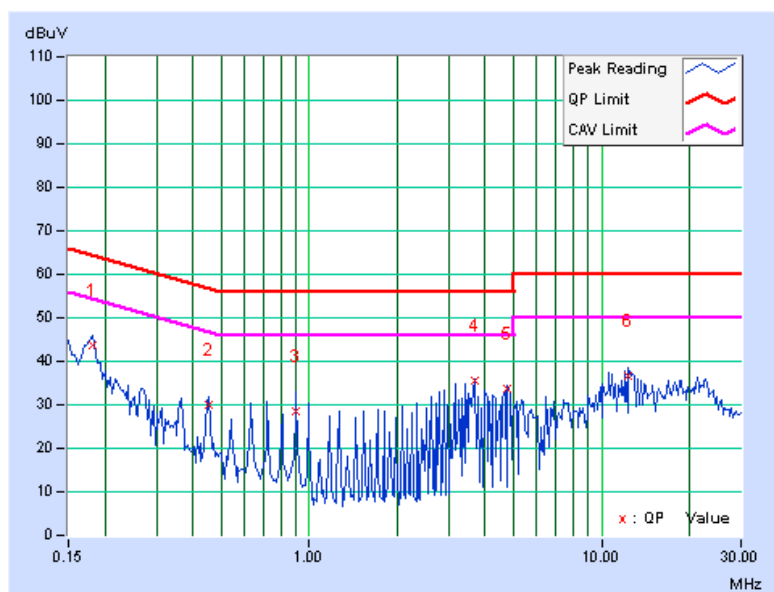

4.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

4.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 10, 2009	Aug. 09, 2010
Power Sensor	MA2411B	0738138	Aug. 10, 2009	Aug. 09, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 26dB bandwidth of emission.

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

FOR POWER OUTPUT MEASUREMENT

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

FOR 26dB OCCUPIED BANDWIDTH


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

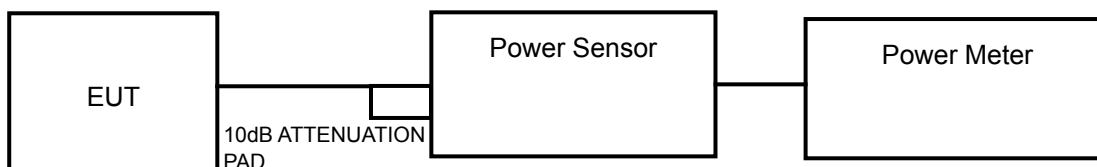

FOR 26dB OCCUPIED BANDWIDTH



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT: 802.11a

CHAN.	CHAN. FREQ. (MHz)	POWER OUTPUT (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	PEAK LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
52	5260	13.9	14.5	13.9	77.3	18.9	21.23	PASS
60	5300	13.9	13.7	13.4	69.9	18.4	21.23	PASS
64	5320	13.8	13.6	13.3	68.3	18.3	21.23	PASS
100	5500	15.4	15.0	15.0	97.9	19.9	21.23	PASS
116	5580	16.3	16.2	15.6	120.7	20.8	21.23	PASS
132	5660	15.5	15.6	15.0	103.4	20.1	21.23	PASS
140	5700	13.8	13.2	12.4	62.3	17.9	21.23	PASS

**Directional gain = 4dBi + 10log(3) = 8.77dBi > 6dBi, conducted power limit is reduced from 24dBm down to 24-(8.77-6)=21.23dBm

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	POWER OUTPUT (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	PEAK LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
52	5260	13.9	14.6	13.9	77.9	18.9	24	PASS
60	5300	13.9	13.8	13.5	70.9	18.5	24	PASS
64	5320	13.8	13.7	13.4	69.3	18.4	24	PASS
100	5500	15.4	15.1	15.0	98.7	19.9	24	PASS
116	5580	16.3	16.2	15.7	121.5	20.8	24	PASS
132	5660	15.5	15.6	15.1	104.1	20.2	24	PASS
140	5700	13.8	13.2	12.5	62.7	18.0	24	PASS


802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	POWER OUTPUT (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	PEAK LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
54	5270	15.9	15.9	15.8	115.8	20.6	24	PASS
62	5310	10.8	11.1	10.9	37.2	15.7	24	PASS
102	5510	10.5	10.6	10.7	34.5	15.4	24	PASS
110	5550	16.0	15.3	15.2	106.8	20.3	24	PASS
134	5670	14.0	13.9	13.9	74.2	18.7	24	PASS

26dB OCCUPIED BANDWIDTH: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)			PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	
52	5260	24.37	23.66	23.43	PASS
60	5300	24.82	24.43	24.36	PASS
64	5320	24.45	23.59	23.28	PASS
100	5500	26.44	24.17	23.45	PASS
116	5580	25.03	23.67	24.36	PASS
132	5660	23.70	23.48	24.12	PASS
140	5700	24.83	23.87	23.78	PASS


FOR CHAIN 0: CH 100

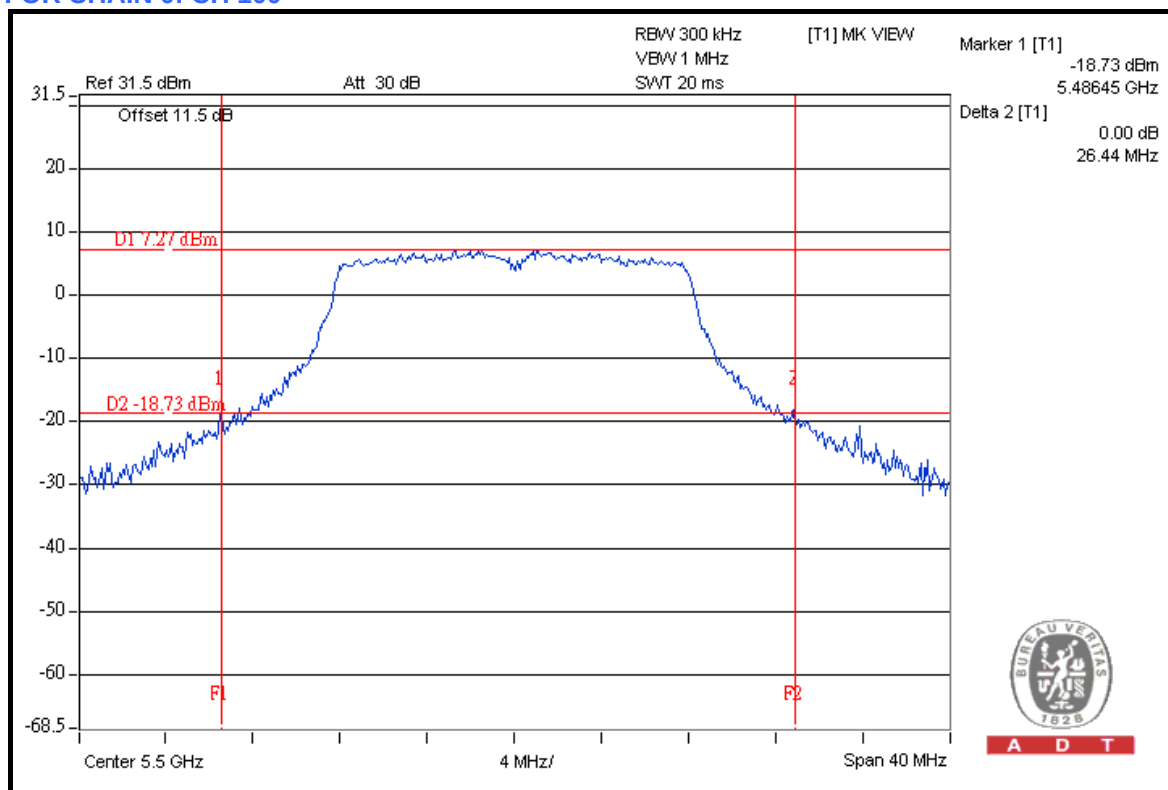

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)			PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	
52	5260	25.48	24.51	24.75	PASS
60	5300	25.14	24.58	25.75	PASS
64	5320	24.97	23.96	25.45	PASS
100	5500	25.20	25.79	26.42	PASS
116	5580	25.26	24.32	24.51	PASS
132	5660	25.62	24.46	24.43	PASS
140	5700	25.52	24.23	24.86	PASS


FOR CHAIN 2: CH 100

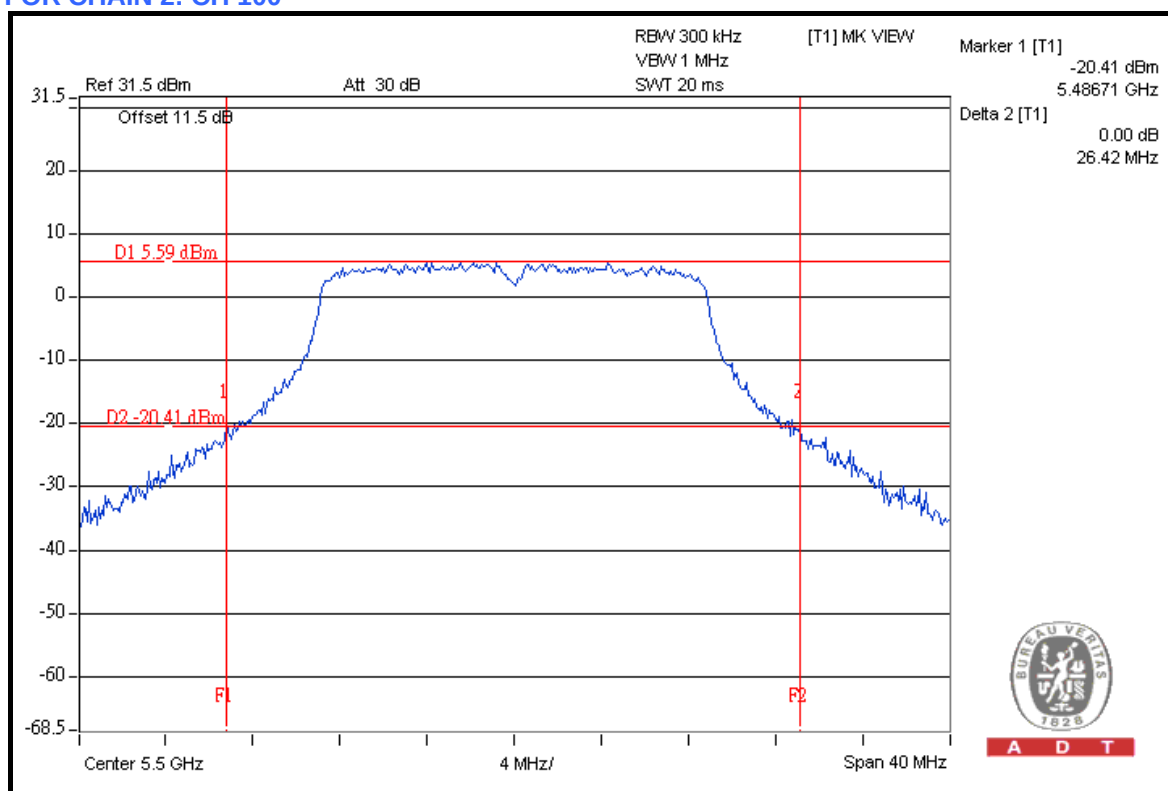

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)			PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	
54	5270	47.00	46.60	45.24	PASS
62	5310	45.77	45.58	45.94	PASS
102	5510	45.85	45.81	46.43	PASS
110	5550	47.32	45.42	45.96	PASS
134	5670	46.09	47.85	45.88	PASS

CHAIN 1: CH 134

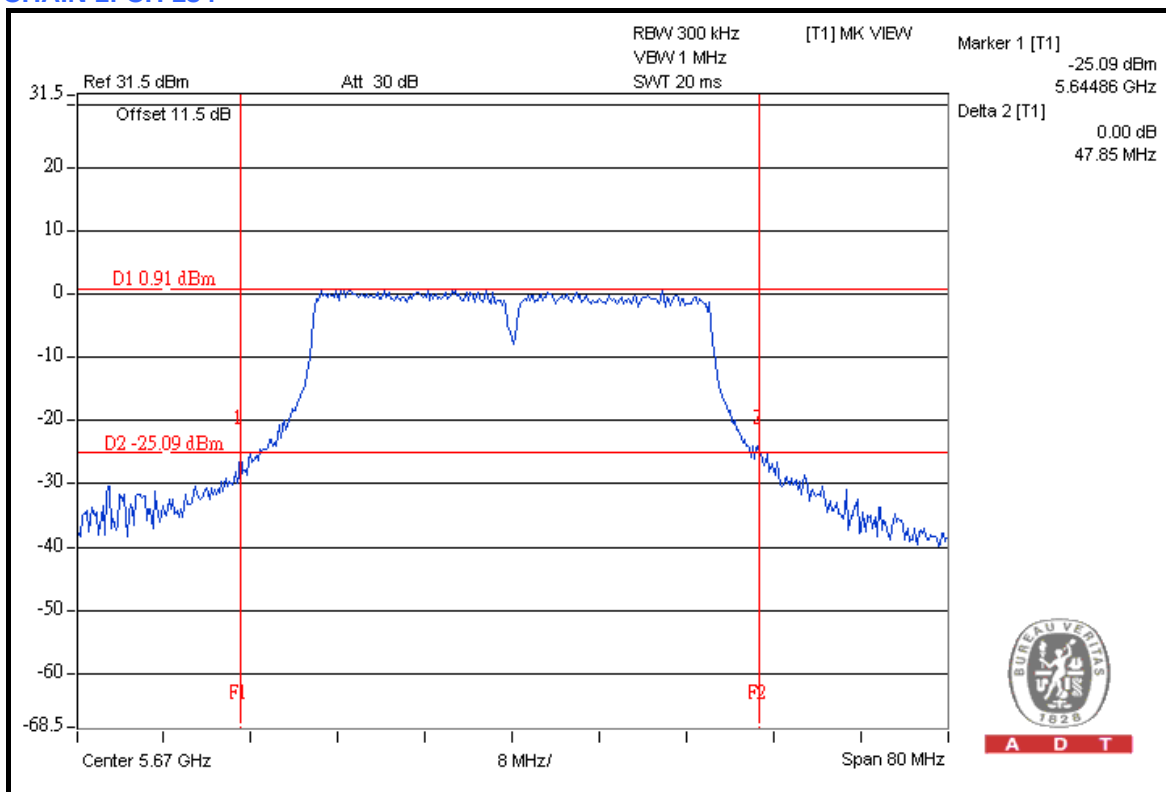

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

FREQUENCY BAND	LIMIT
5.250 ~ 5.350GHz	13dB
5.470 ~ 5.725GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

- The transmitter output was connected to the spectrum analyzer.
- Set the spectrum bandwidth span to view the entire spectrum.
- Using peak detector and Max-hold function for Trace 1 (RB = 1MHz, VB = 3MHz) and 2 (RB = 1MHz, VB = 300kHz).
- The differences between Trace1 and Trace 2 in any 1MHz band at f1 to f2 range were recorded and showed to another trace.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

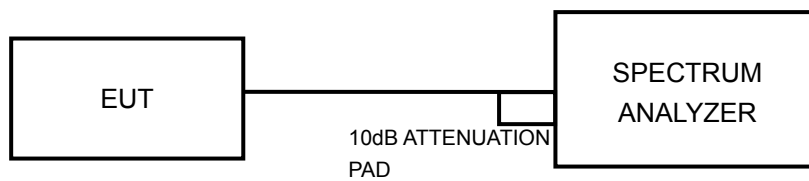

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS



802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
52	5260	9.79	9.50	9.97	13	PASS
60	5300	9.46	8.71	8.03	13	PASS
64	5320	9.04	8.28	8.95	13	PASS
100	5500	9.98	8.88	9.03	13	PASS
116	5580	10.07	9.11	9.61	13	PASS
132	5660	9.62	8.73	9.23	13	PASS
140	5700	10.23	8.74	8.32	13	PASS



A D T

CHAIN 0: CH 140

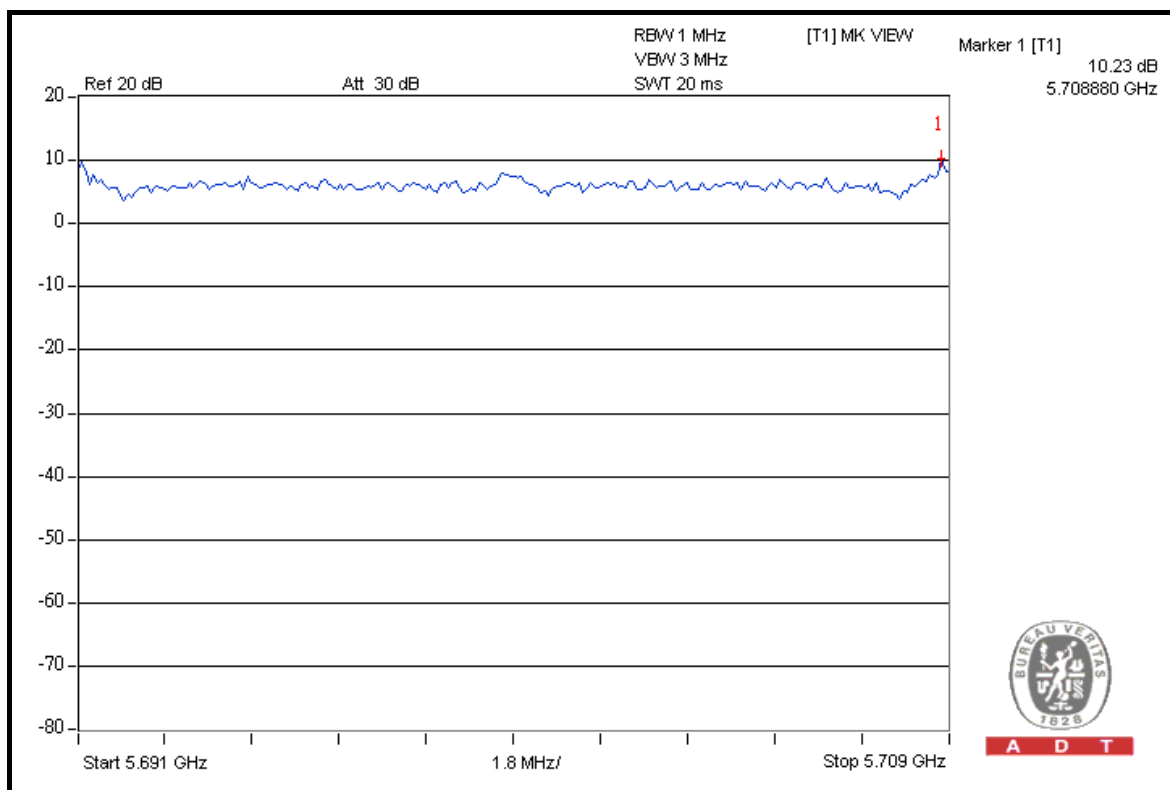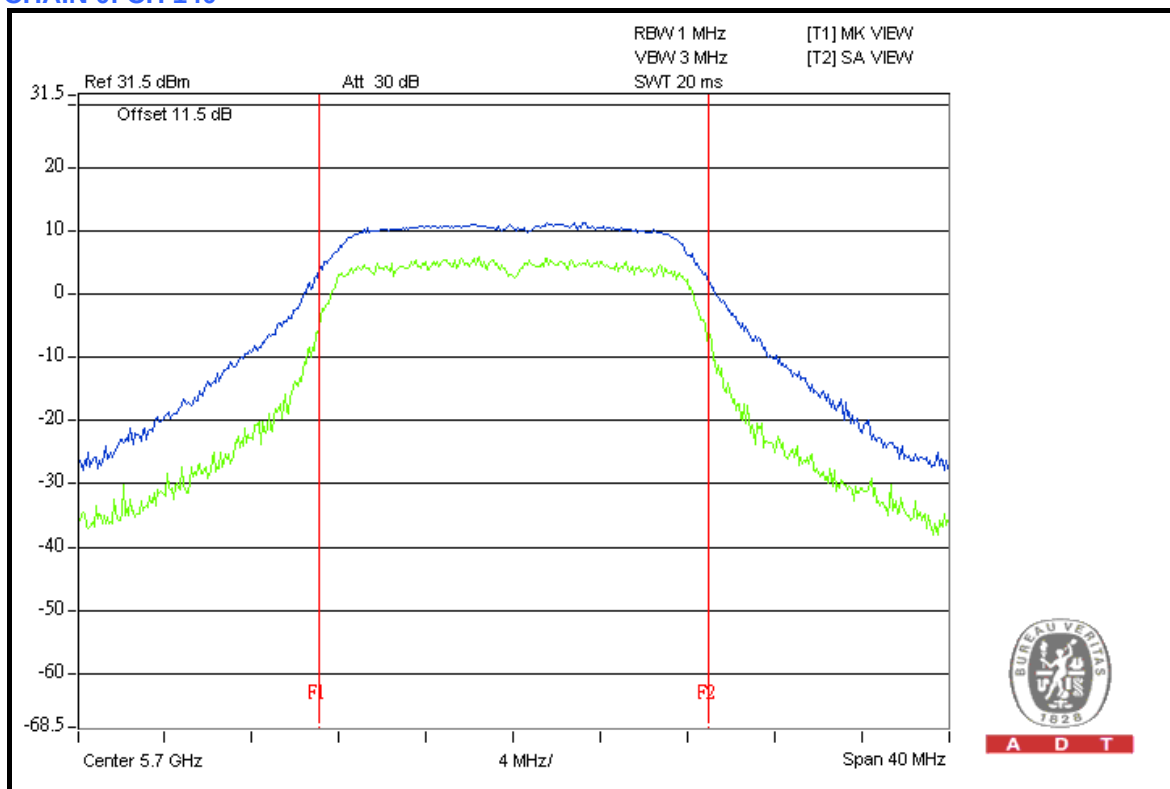



A D T



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
52	5260	7.75	7.74	7.99	13	PASS
60	5300	8.19	8.13	7.96	13	PASS
64	5320	7.68	8.29	7.82	13	PASS
100	5500	7.68	8.50	8.31	13	PASS
116	5580	7.72	8.25	7.84	13	PASS
132	5660	8.07	7.68	8.06	13	PASS
140	5700	7.85	7.57	7.67	13	PASS



A D T

CHAIN 1: CH 100

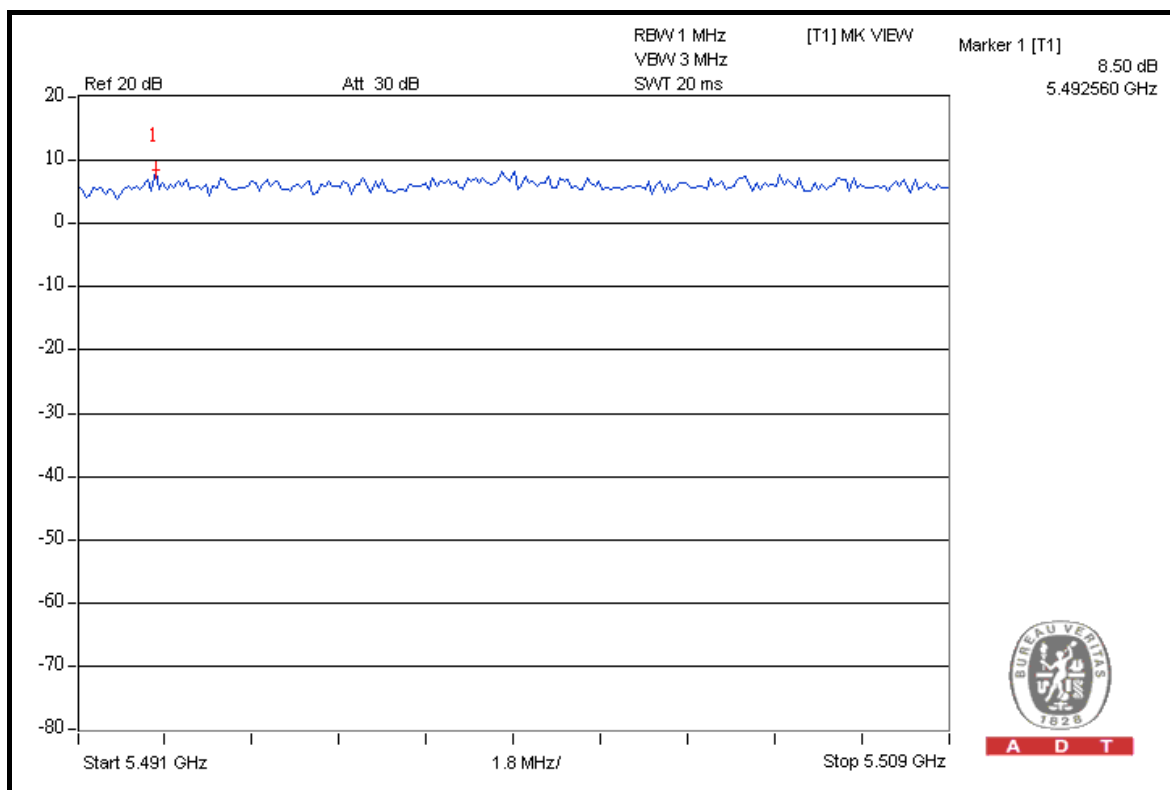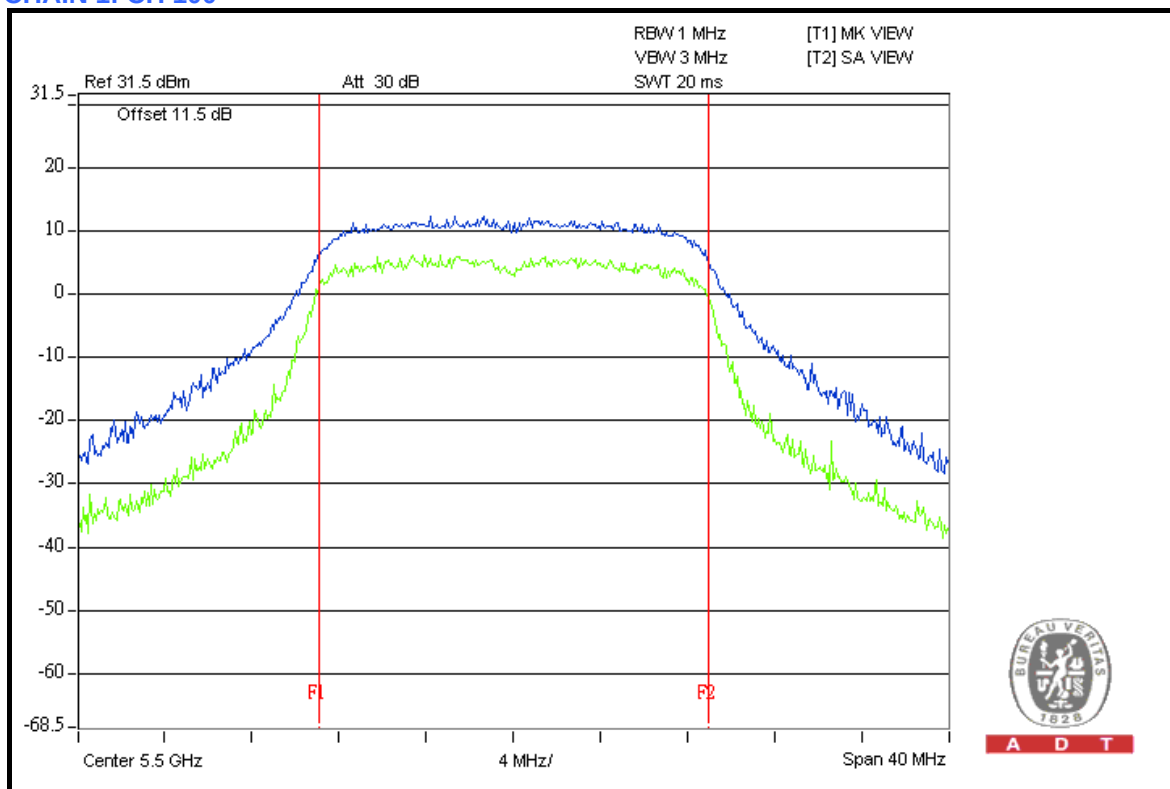



A D T



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
54	5270	9.79	8.89	9.17	13	PASS
62	5310	8.81	9.17	9.35	13	PASS
102	5510	10.79	9.16	8.38	13	PASS
110	5550	8.72	8.76	8.65	13	PASS
134	5670	10.40	8.87	9.38	13	PASS



A D T

CHAIN 0: CH 102

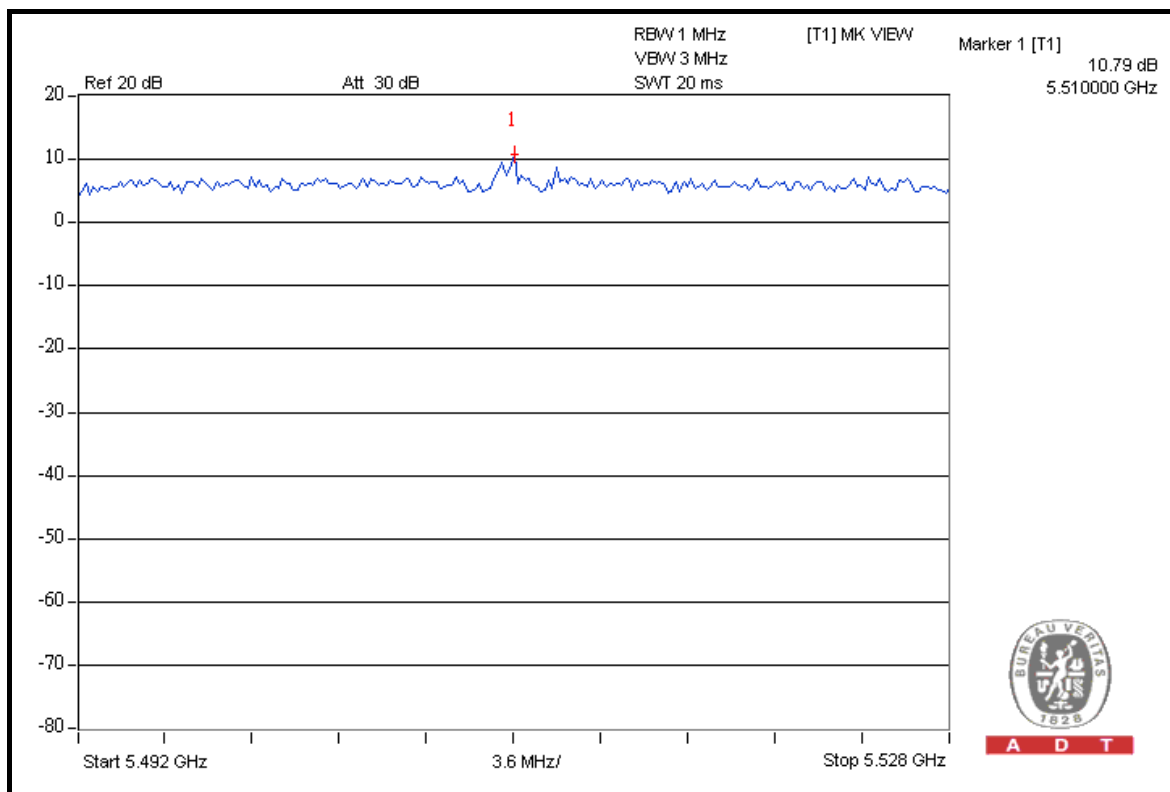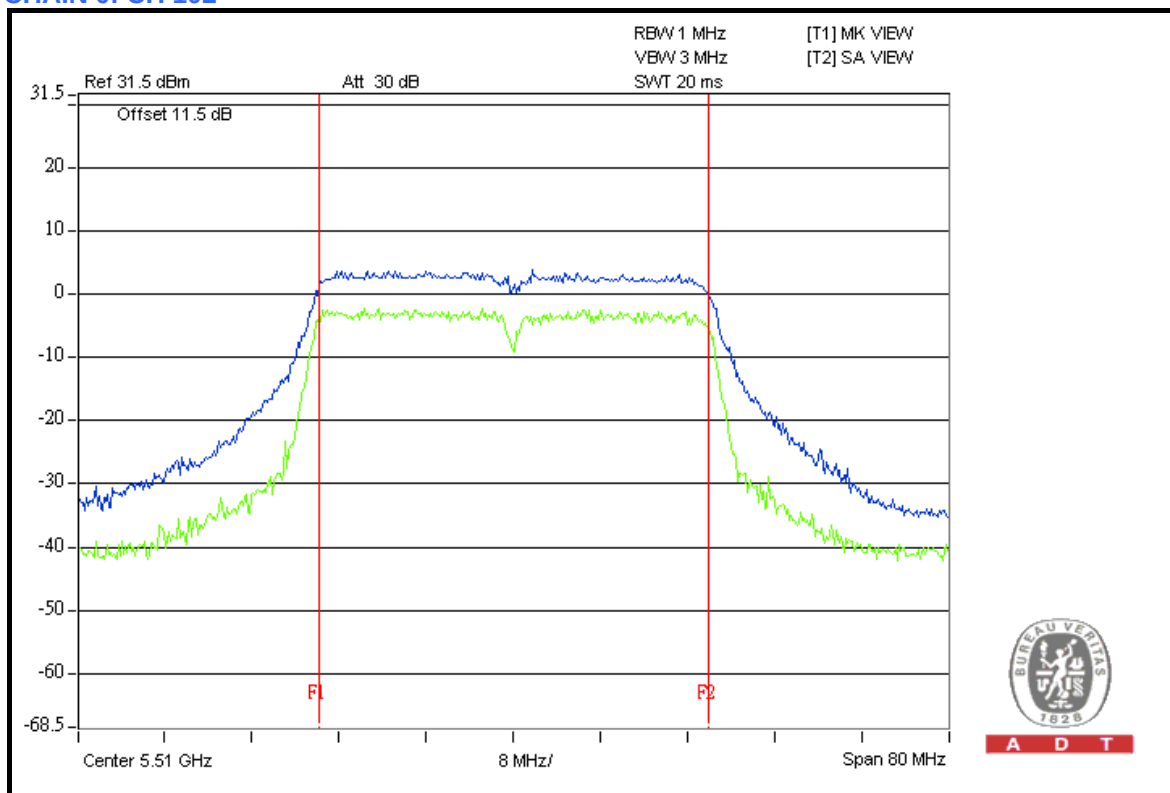

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.250 ~ 5.350GHz	11dBm
5.470 ~ 5.725GHz	11dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

- The transmitter output was connected to the spectrum analyzer.
- Set RBW = 1MHz, VBW = 3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

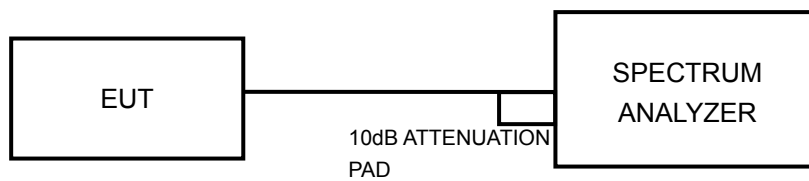

4.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6.


4.5.7 TEST RESULTS

802.11a

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
52	5260	0.31	0.85	-0.34	3.215	5.07	8.23	PASS
60	5300	0.32	-0.13	-0.75	2.888	4.61	8.23	PASS
64	5320	0.40	-0.10	-0.94	2.879	4.59	8.23	PASS
100	5500	2.50	1.12	0.77	4.266	6.30	8.23	PASS
116	5580	3.37	2.40	1.48	5.317	7.26	8.23	PASS
132	5660	2.35	1.72	0.83	4.414	6.45	8.23	PASS
140	5700	0.87	-0.63	-1.64	2.772	4.43	8.23	PASS

**Directional gain = $4\text{dBi} + 10\log(3) = 8.77\text{dBi} > 6\text{dBi}$, power density limit is reduced from 11dBm down to $11-(8.77-6)=8.23\text{dBm}$


CHAIN 0: CH 116

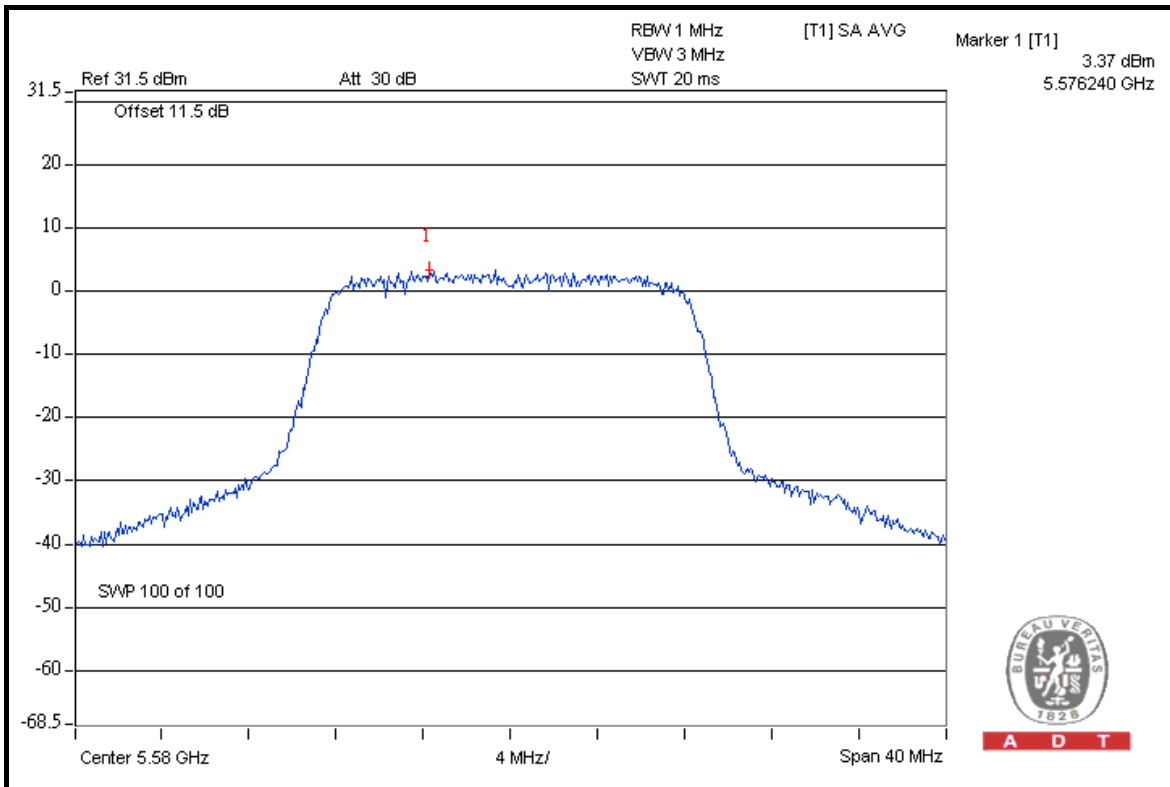

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
52	5260	-0.04	0.69	-0.67	3.020	4.80	11	PASS
60	5300	-0.02	-0.00	-1.04	2.782	4.44	11	PASS
64	5320	-0.13	-0.42	-1.11	2.653	4.24	11	PASS
100	5500	1.42	1.19	0.33	3.781	5.78	11	PASS
116	5580	2.38	2.27	1.21	4.738	6.76	11	PASS
132	5660	1.63	1.89	0.30	4.072	6.10	11	PASS
140	5700	-0.09	-0.78	-2.01	2.445	3.88	11	PASS


CHAIN 0: CH 116

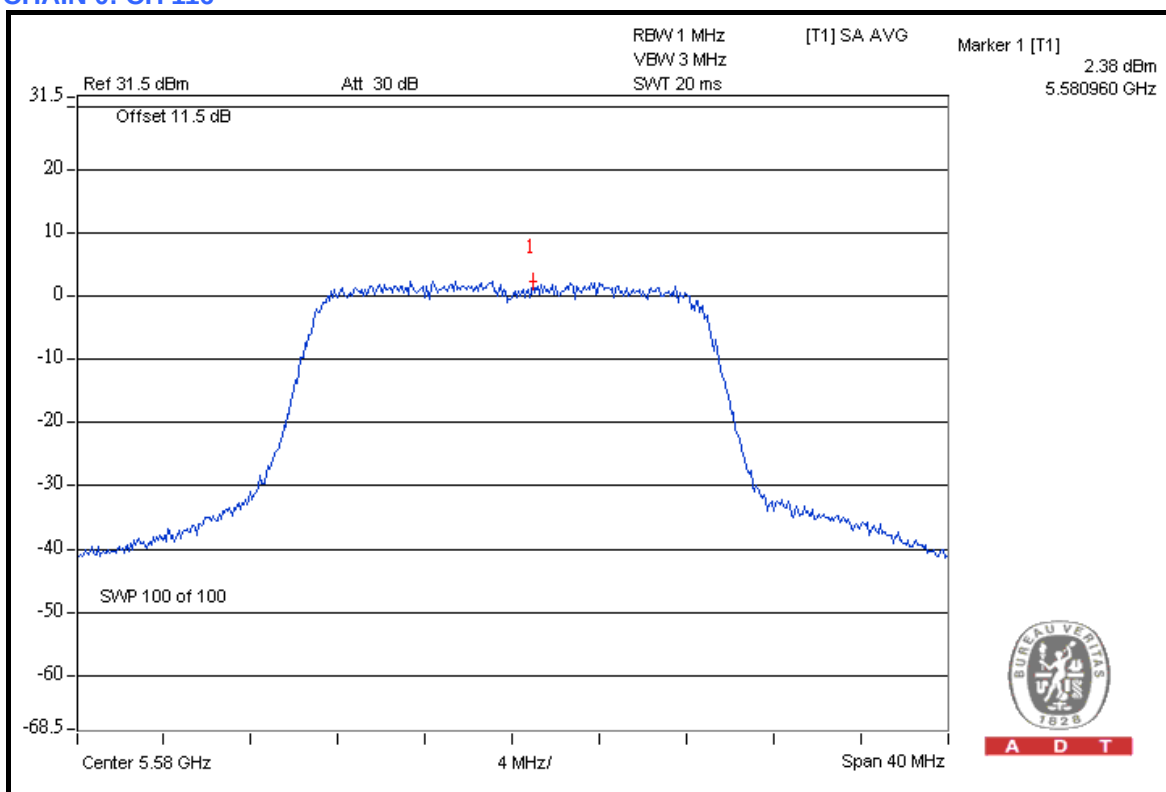

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
54	5270	-2.09	-1.72	-1.79	1.953	2.91	11	PASS
62	5310	-7.18	-6.64	-6.80	0.617	-2.10	11	PASS
102	5510	-7.70	-6.80	-6.74	0.591	-2.28	11	PASS
110	5550	-2.05	-2.44	-2.22	1.794	2.54	11	PASS
134	5670	-3.93	-3.52	-3.52	1.294	1.12	11	PASS

CHAIN 1: CH 54

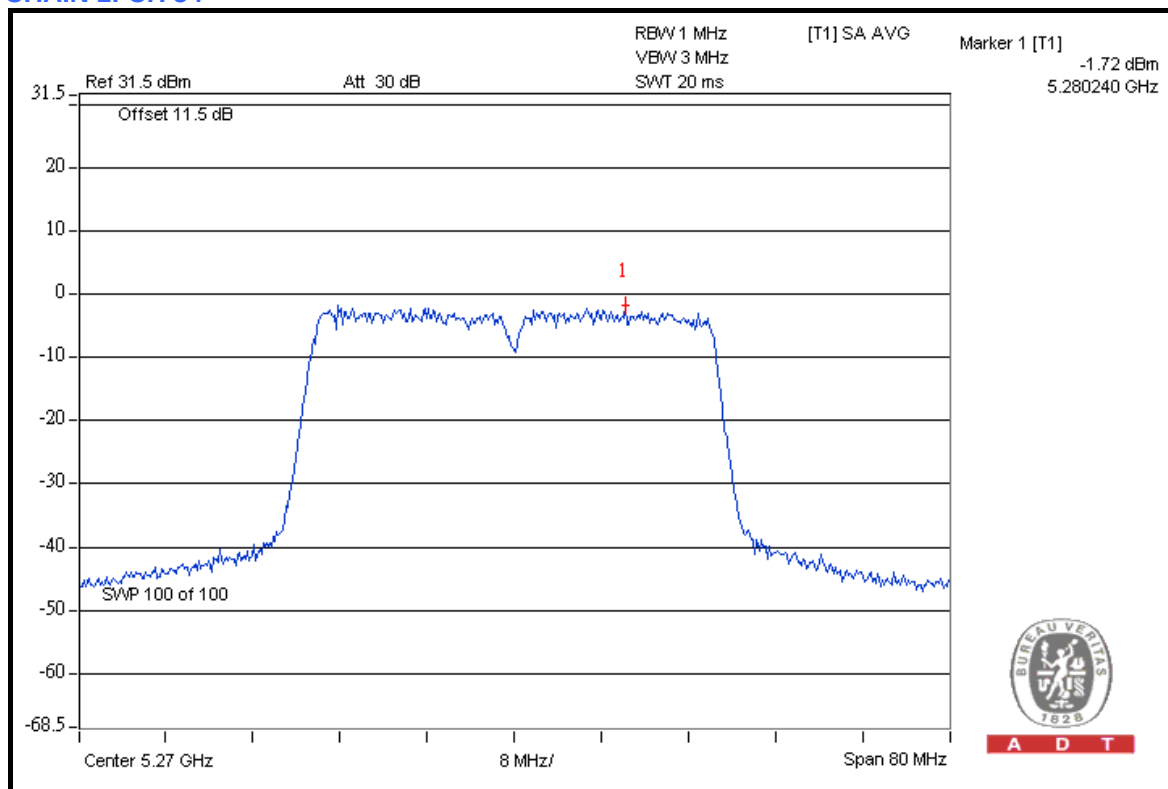

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within the band of operation frequency over a temperature variation of –30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 24, 2009	Jun. 23, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

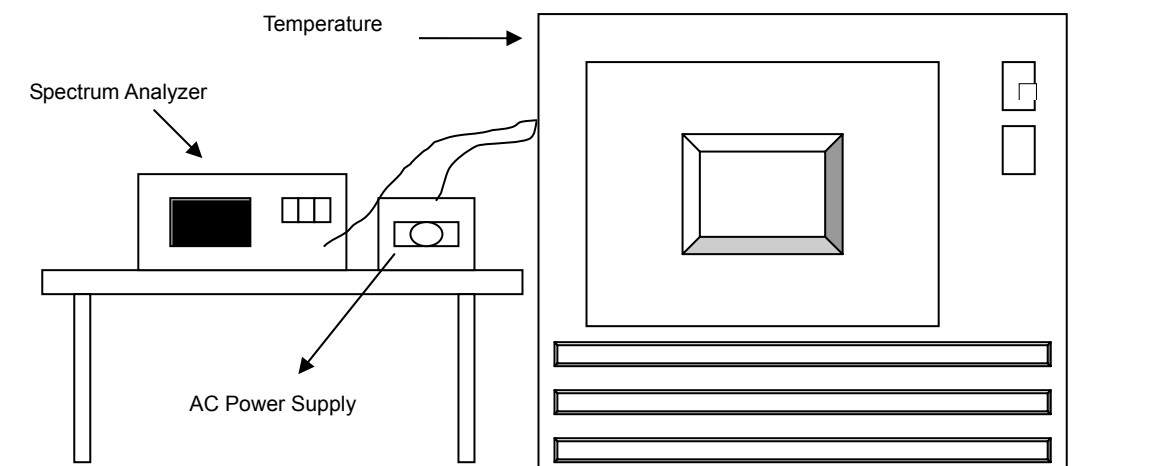

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6.

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
55	110.0	5319.988863	-2.093	5319.988814	-2.103	5319.988710	-2.122	5319.988672	-2.129
50	110.0	5319.989060	-2.056	5319.988875	-2.091	5319.989218	-2.027	5319.988586	-2.145
40	110.0	5319.988806	-2.104	5319.988566	-2.149	5319.988959	-2.075	5319.988886	-2.089
30	110.0	5319.990219	-1.839	5319.990159	-1.850	5319.989993	-1.881	5319.989614	-1.952
20	110.0	5319.991347	-1.627	5319.991440	-1.609	5319.991504	-1.597	5319.991641	-1.571
10	110.0	5319.992400	-1.429	5319.992759	-1.361	5319.992178	-1.470	5319.992797	-1.354
0	110.0	5319.991517	-1.595	5319.991536	-1.591	5319.991330	-1.630	5319.991486	-1.600
-10	110.0	5319.990743	-1.740	5319.990161	-1.849	5319.990556	-1.775	5319.990201	-1.842
-20	110.0	5319.989887	-1.901	5319.989240	-2.023	5319.989193	-2.031	5319.989461	-1.981

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
20	93.5	5319.990356	-1.813	5319.990322	-1.819	5319.990790	-1.731	5319.990725	-1.743
	110.0	5319.991345	-1.627	5319.991612	-1.577	5319.991771	-1.547	5319.991182	-1.658
	126.5	5319.992799	-1.354	5319.992958	-1.324	5319.992998	-1.316	5319.993128	-1.292

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 21, 2009	Dec. 20, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-403	Sep. 04, 2009	Sep. 03, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 10, 2009	Aug. 09, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8449B	3008A01910	Sep. 11, 2009	Sep. 10, 2010
Preamplifier Agilent	8447D	2944A10638	Dec. 21, 2009	Dec. 20, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 17, 2009	Aug. 16, 2010
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Aug. 27, 2009	Aug. 26, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35GHz and 5.47 to 5.725GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

802.11a

FOR 5260-5320MHz BAND:

RESTRICT BAND (4500 ~ 5150 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5260.00 (PK)	116.8	57.26	59.54	74.00
5260.00 (AV)	106.7	58.39	48.31	54.00

RESTRICT BAND (5350 ~ 5460 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5320.00 (PK)	117.0	46.63	70.37	74.00
5320.00 (AV)	106.9	55.65	51.25	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.







A D T

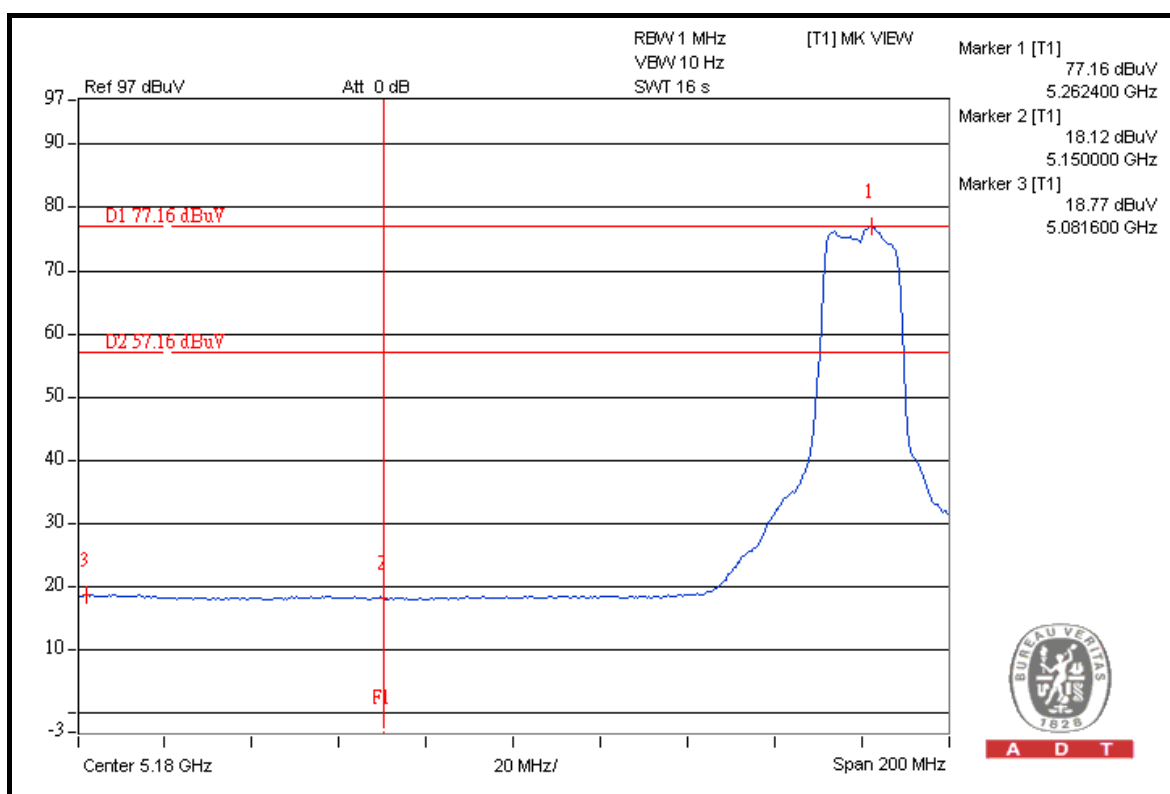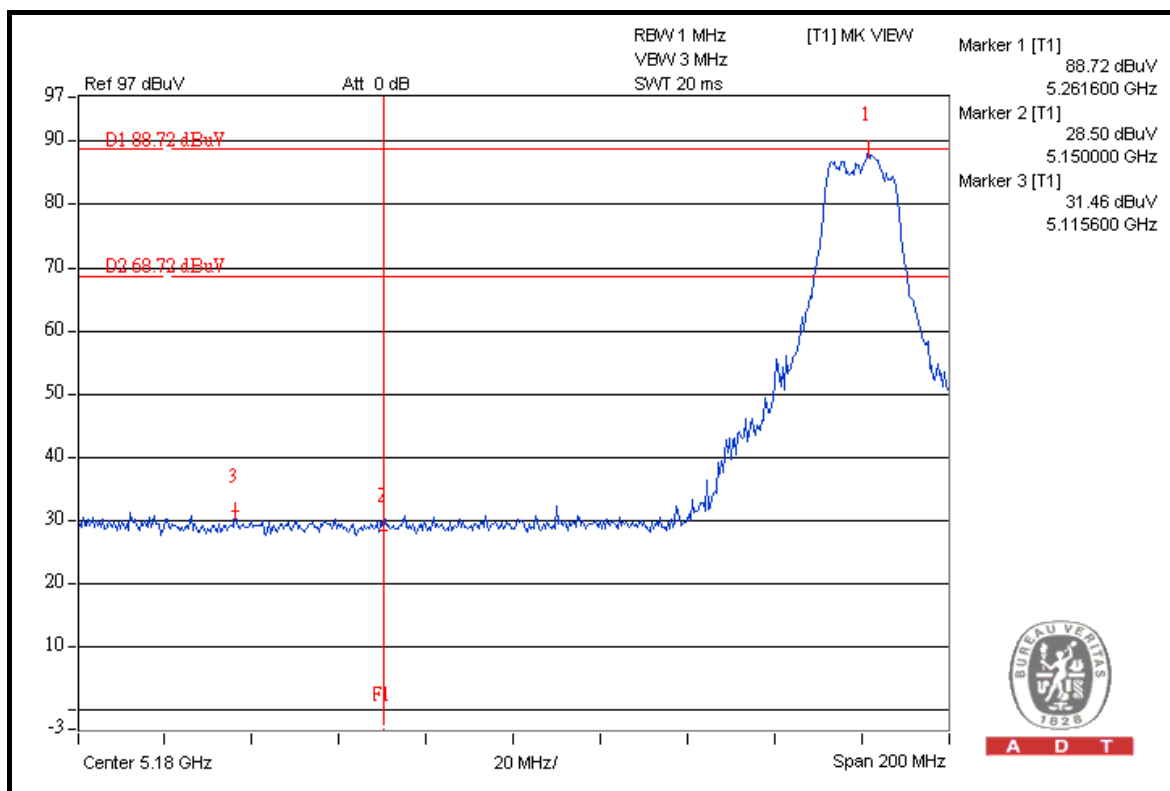



A D T

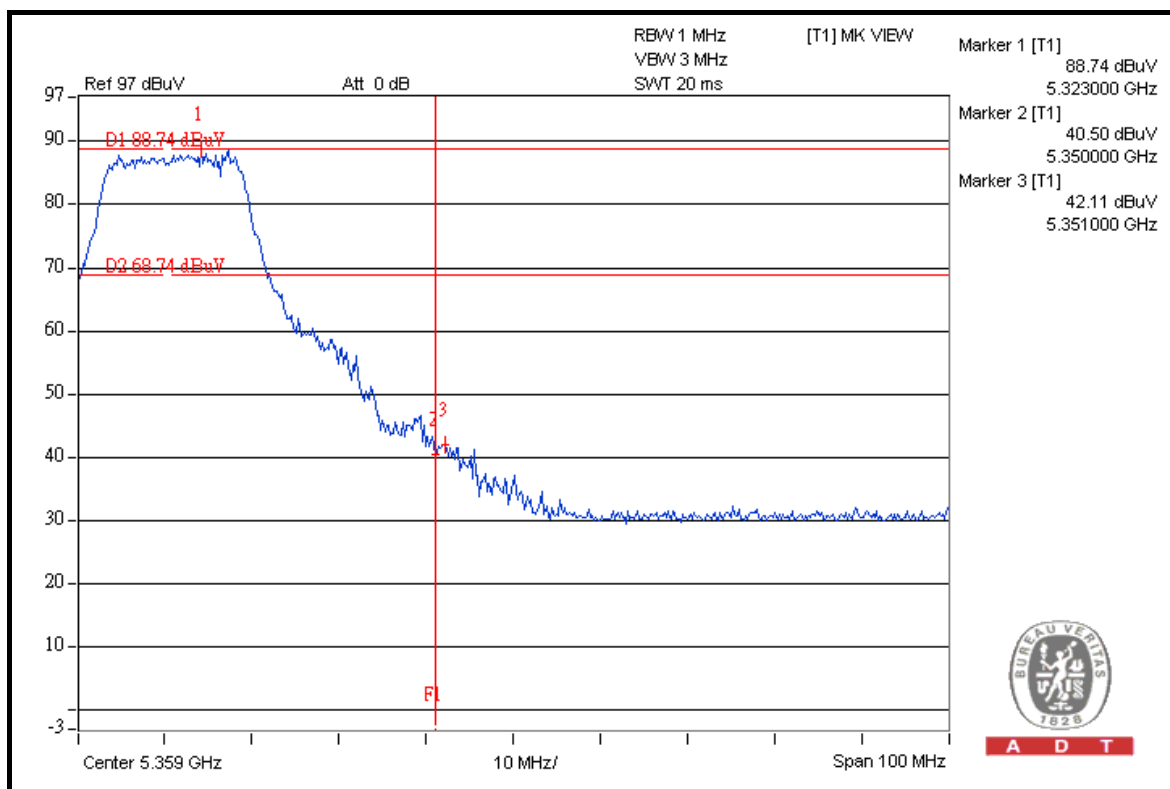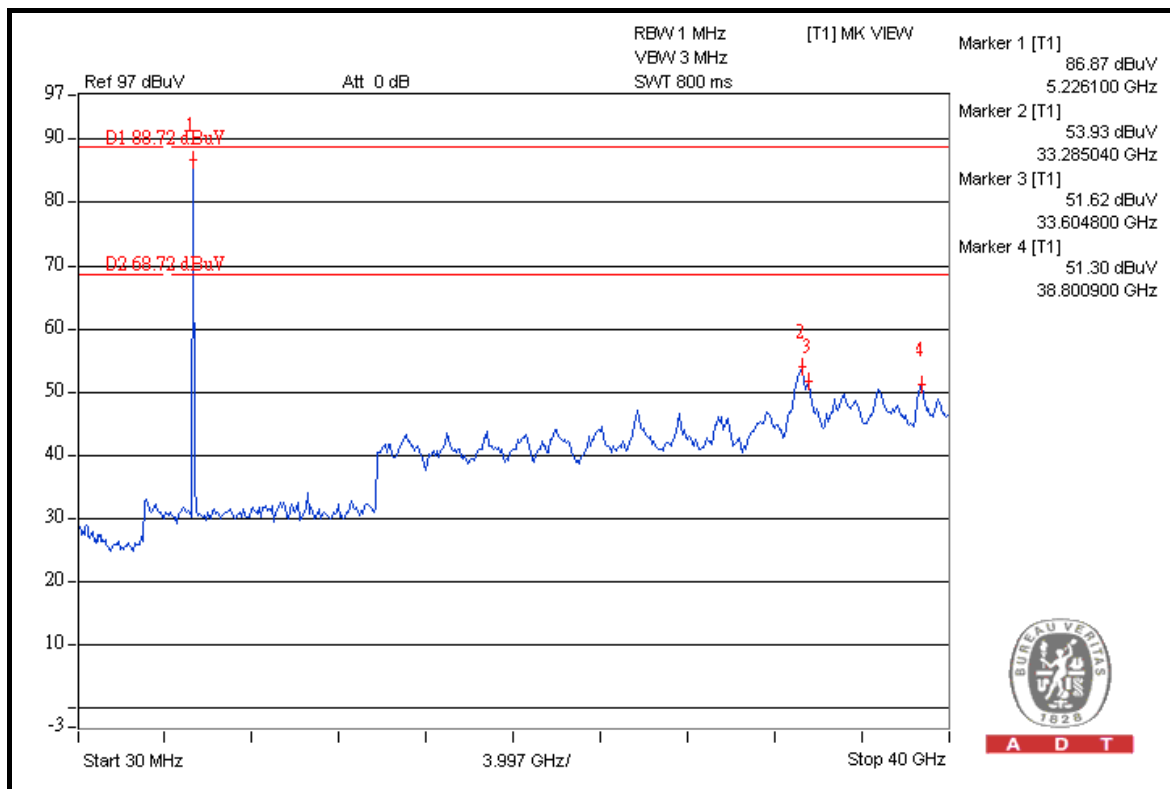

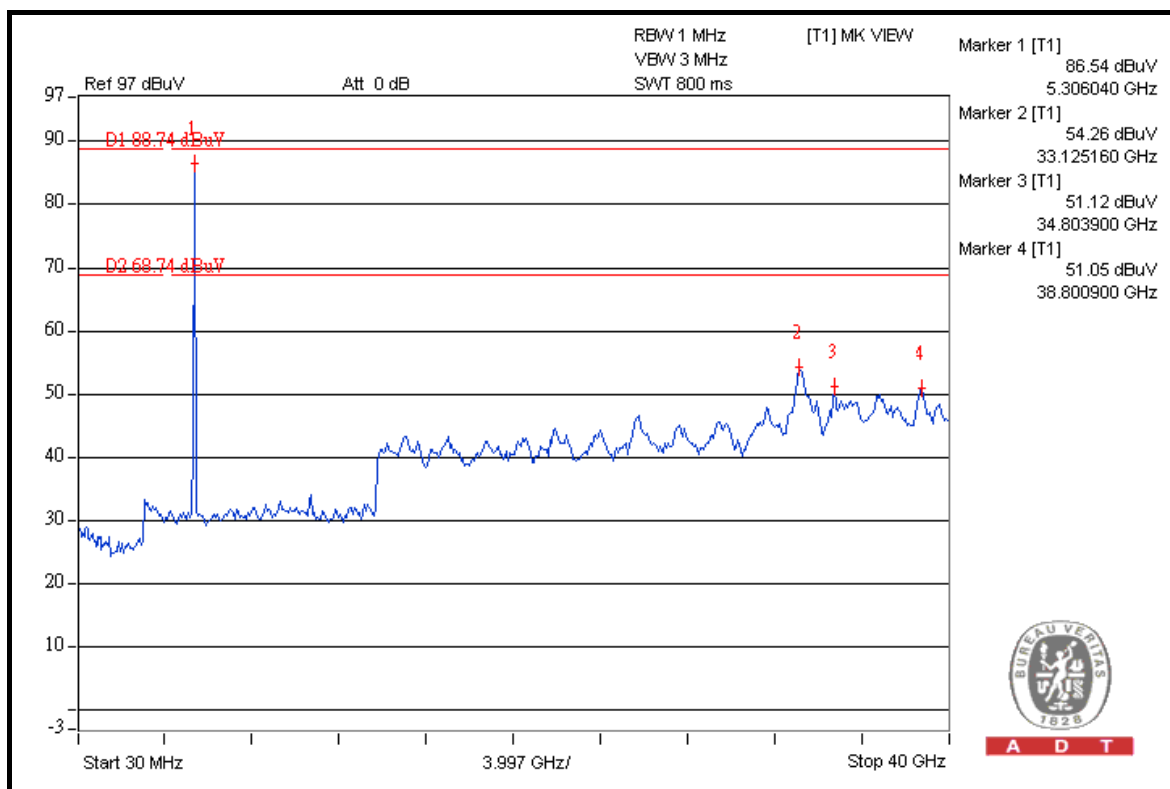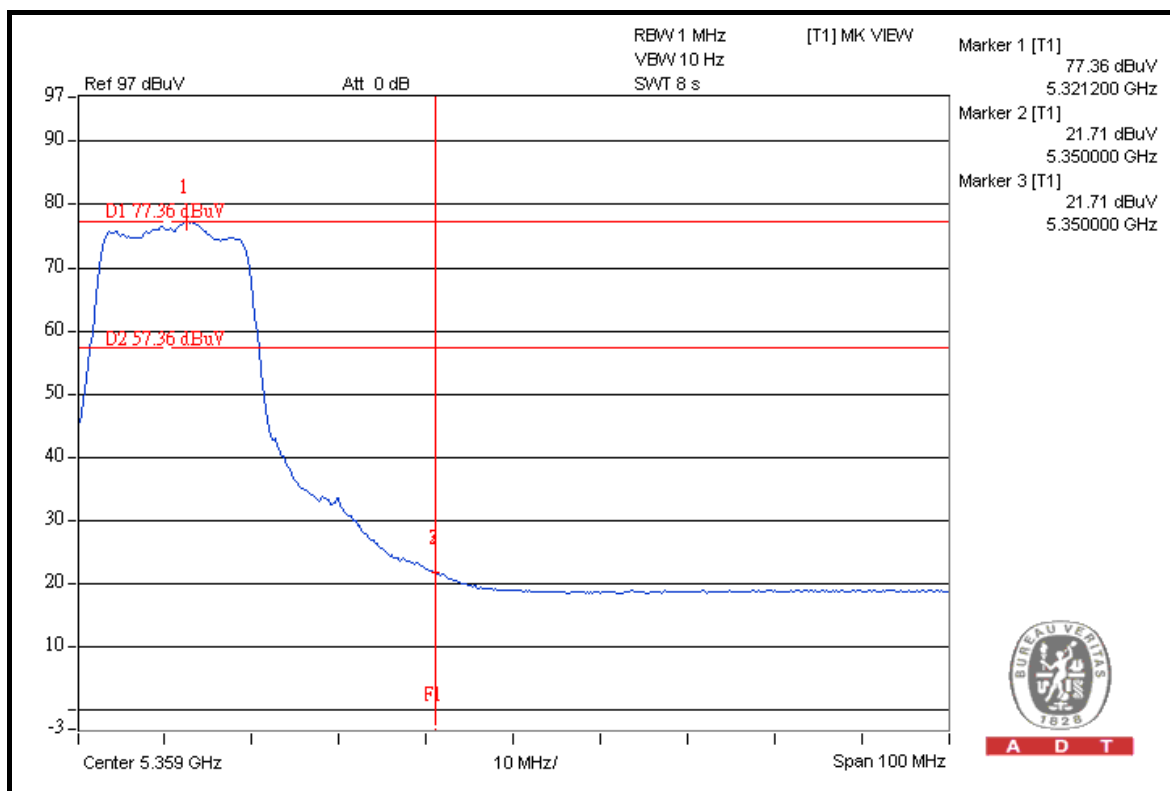

FOR 5500-5700MHz BAND:

RESTRICT BAND (5350 ~ 5460 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5500.00 (PK)	116.1	54.51	61.59	74.00
5500.00 (AV)	106.0	56.67	49.33	54.00

FREQUENCY BAND (5460 ~ 5470 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5500.00 (PK)	116.1	49.59	66.51	68.30

5700MHz

ABOVE 5725 MHz


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5700.00 (PK)	116.3	49.87	66.43	68.30

NOTE:


- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
- Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

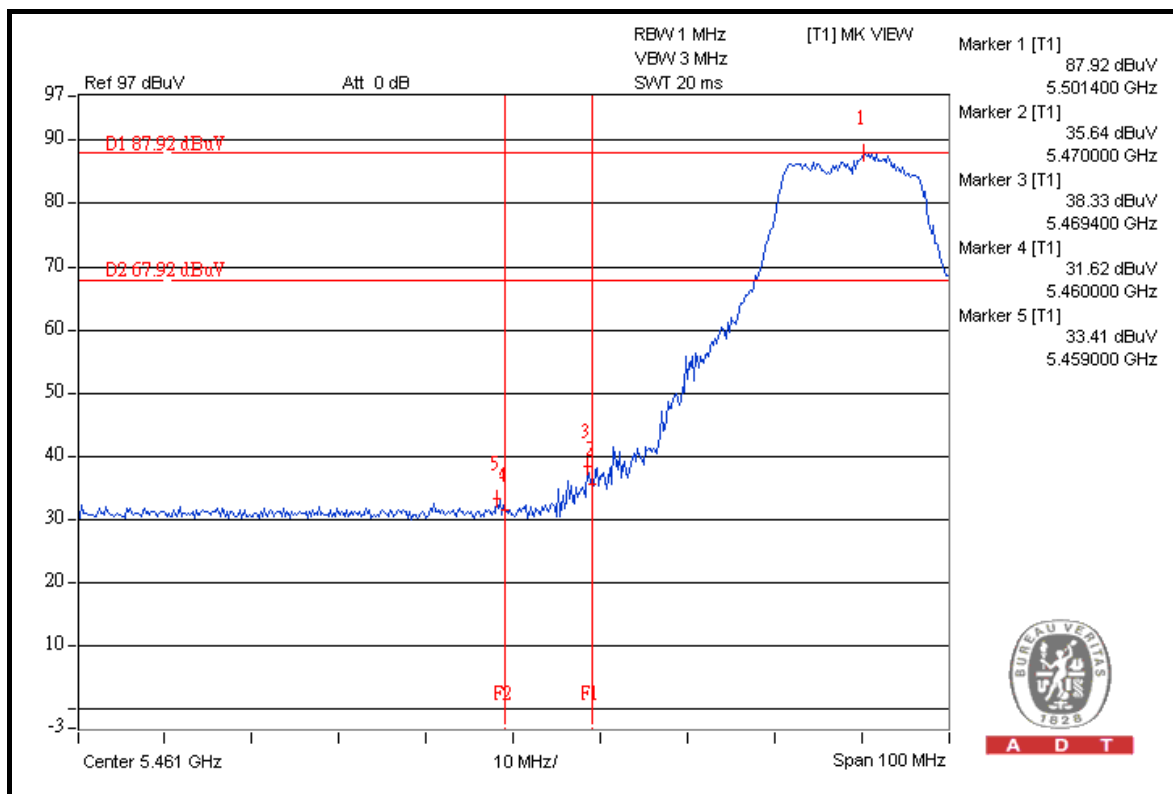


A D T

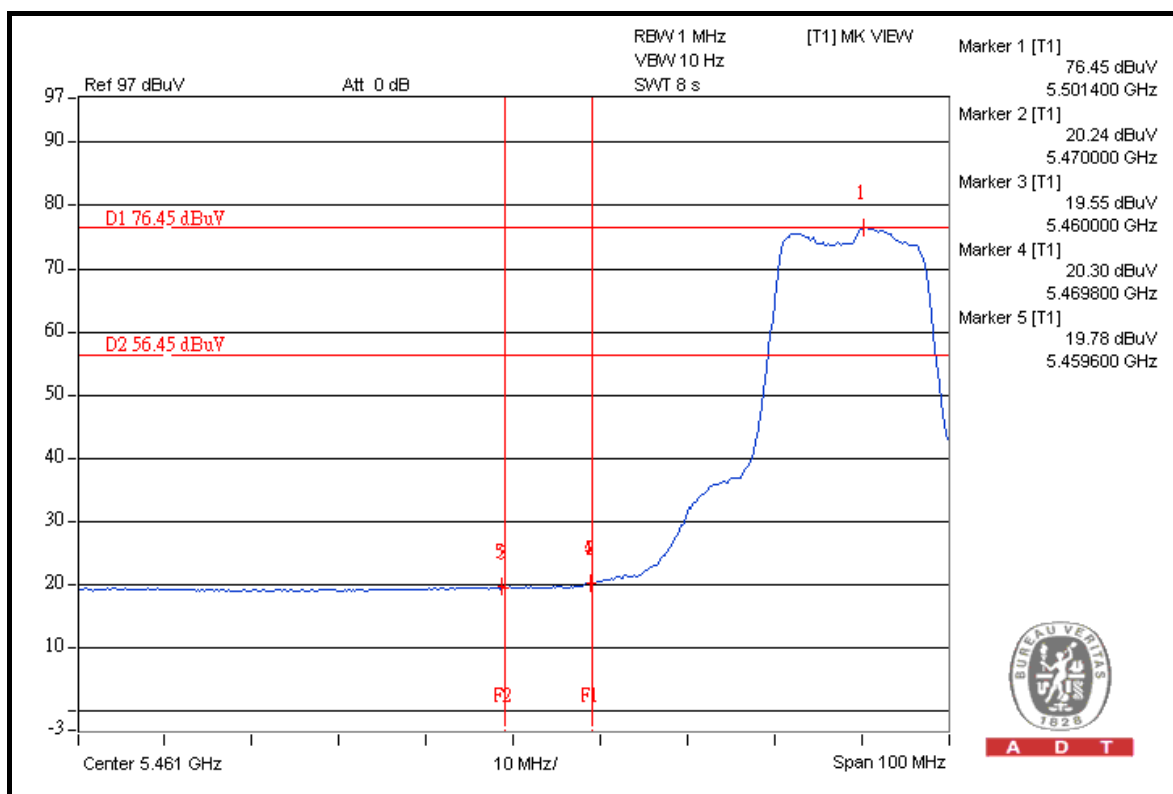


A D T



A D T

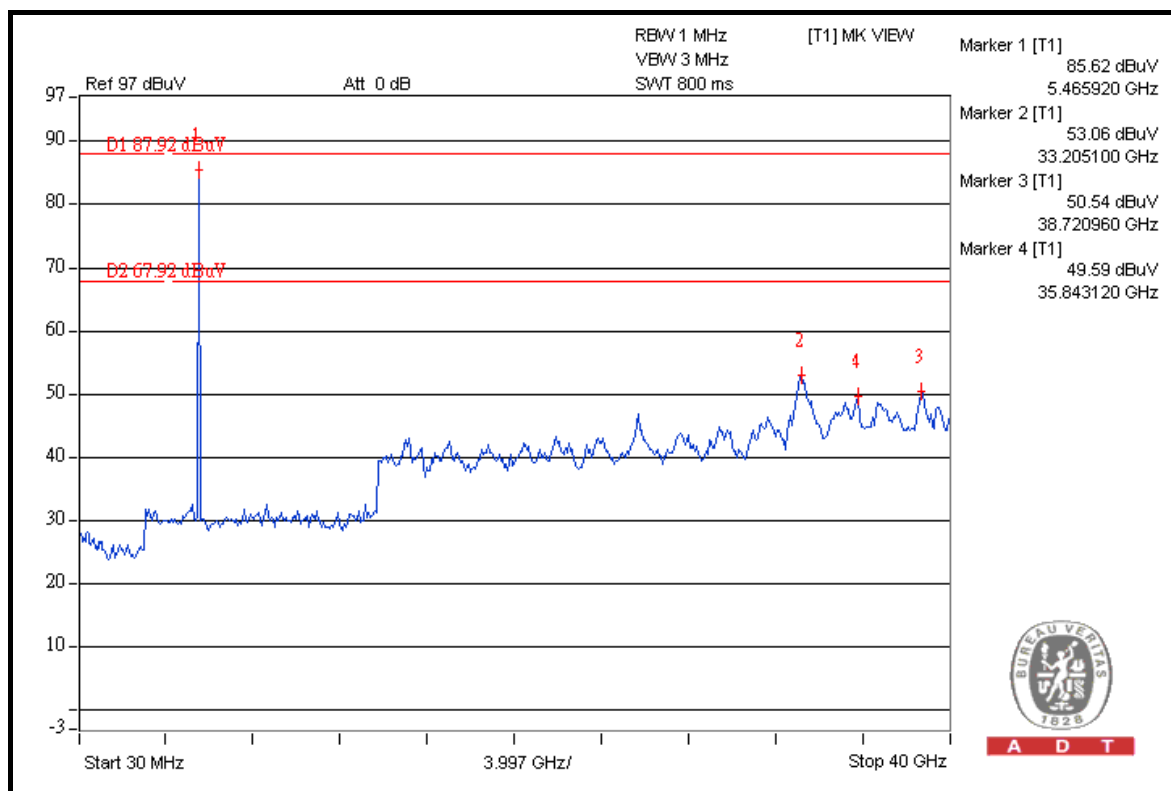


A D T

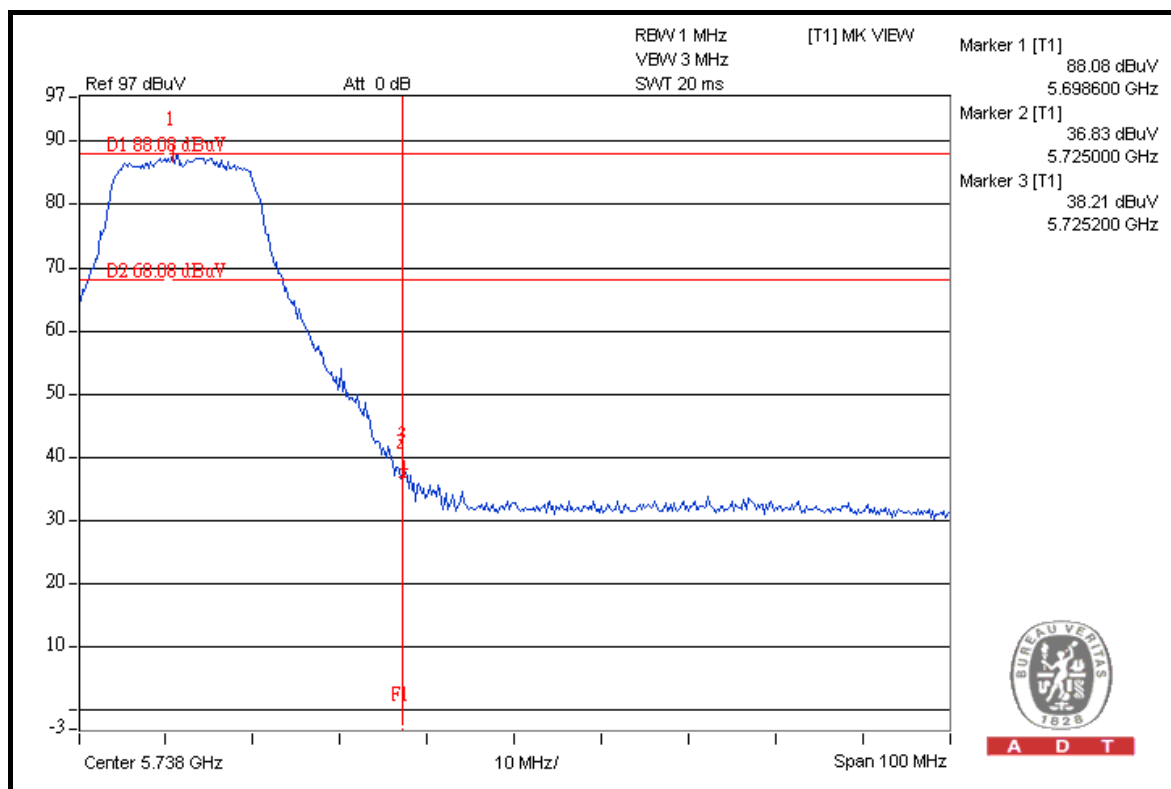


A D T



A D T

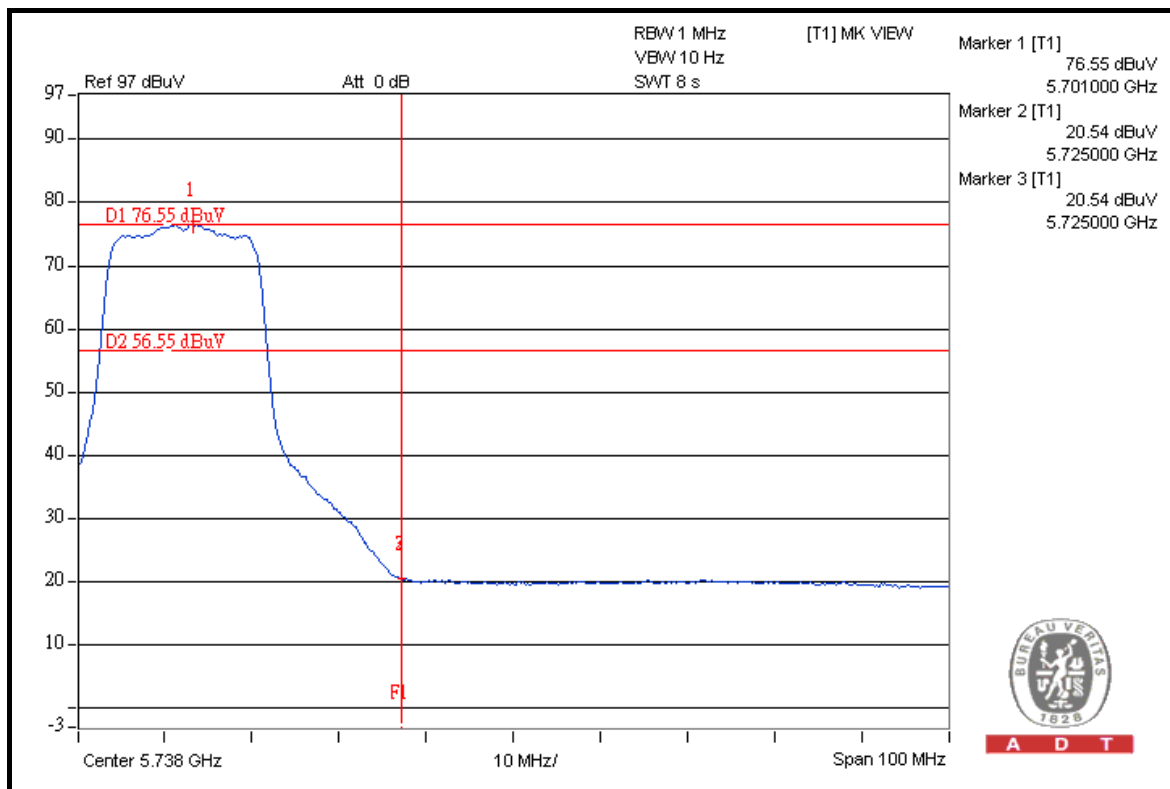

A D T

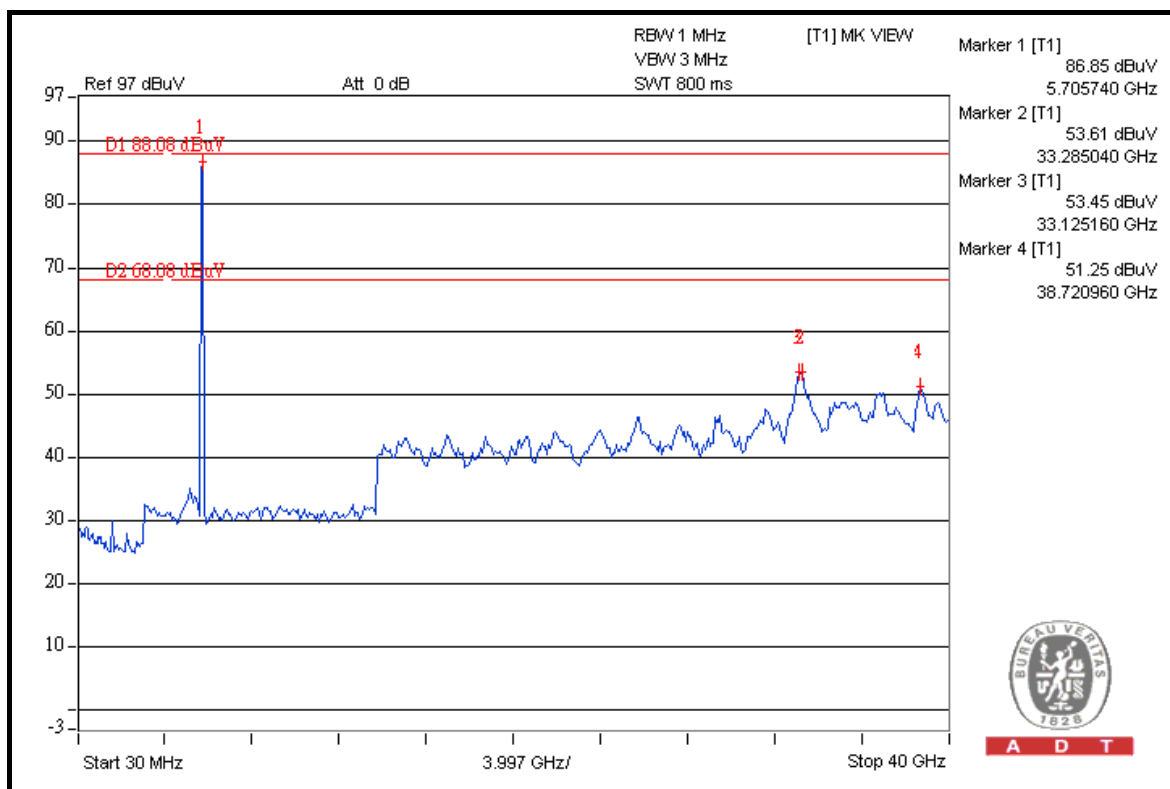

A D T

802.11n (20MHz)

FOR 5260-5320MHz BAND:

RESTRICT BAND (4500 ~ 5150 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5260.00 (PK)	116.4	55.99	60.41	74.00
5260.00 (AV)	106.5	57.41	49.09	54.00

RESTRICT BAND (5350 ~ 5460 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5320.00 (PK)	116.7	44.38	72.32	74.00
5320.00 (AV)	106.6	54.43	52.17	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.




A D T

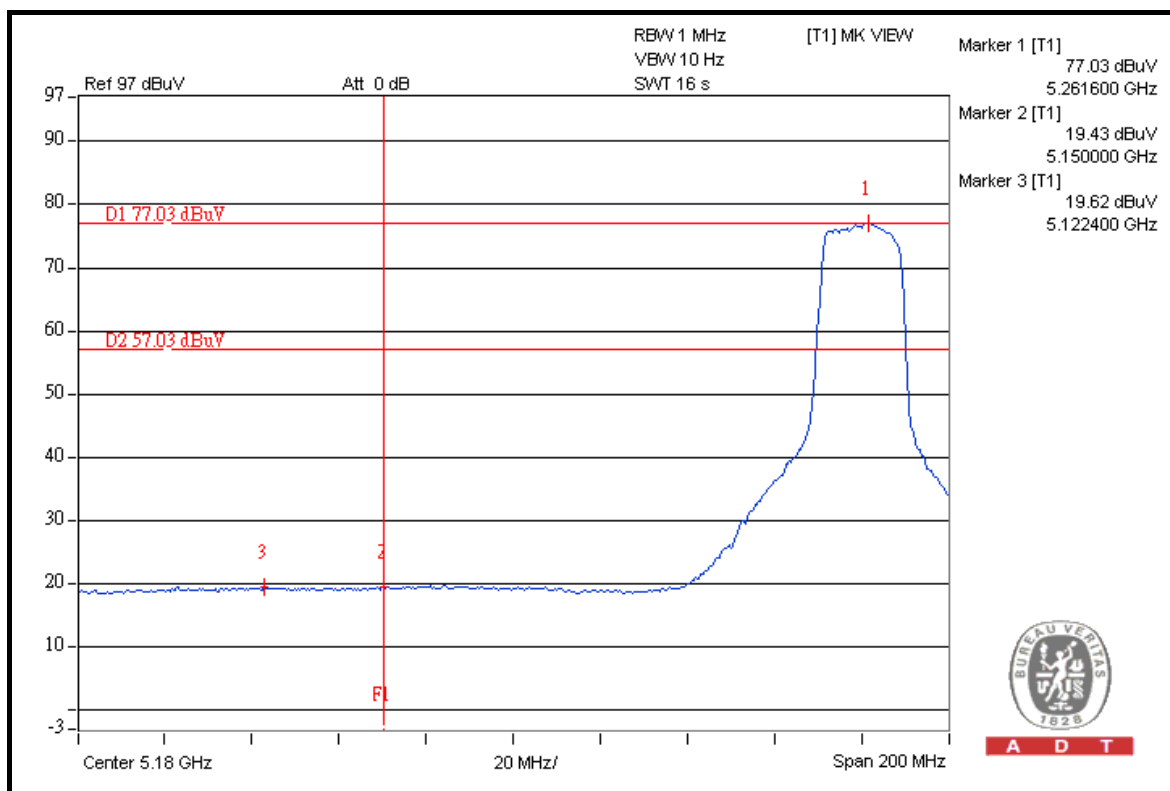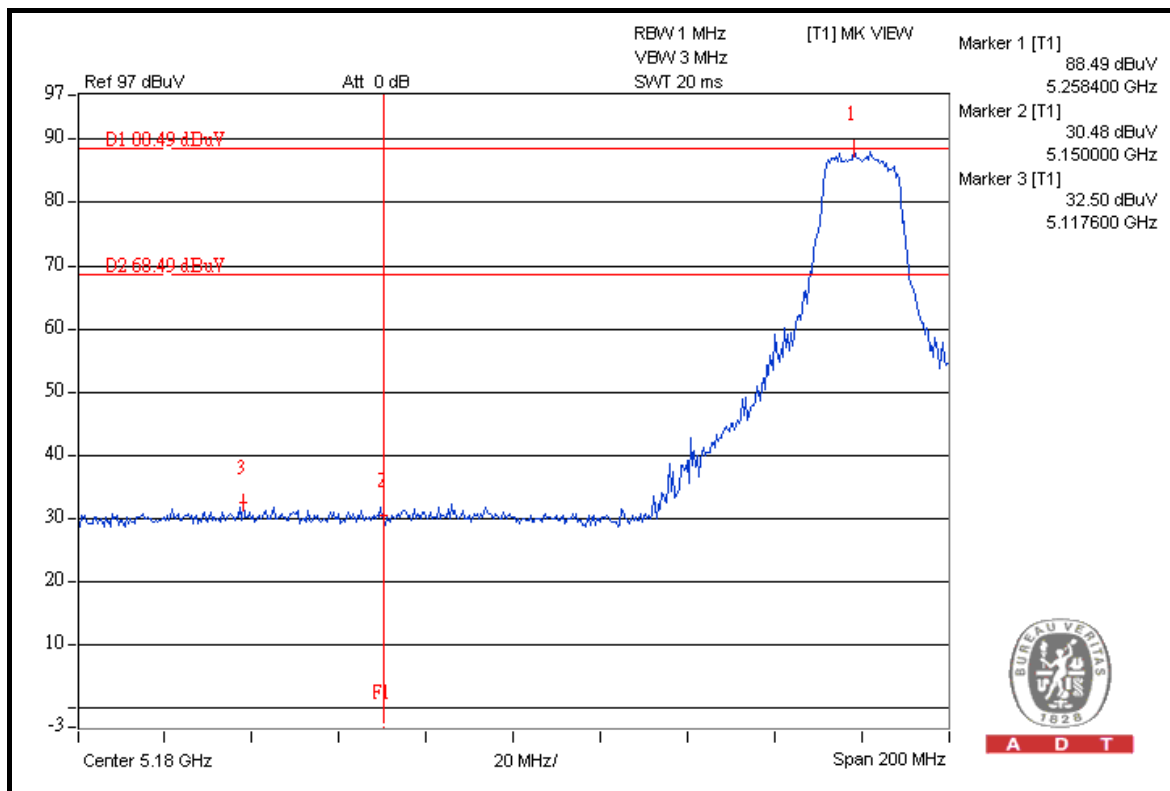




A D T

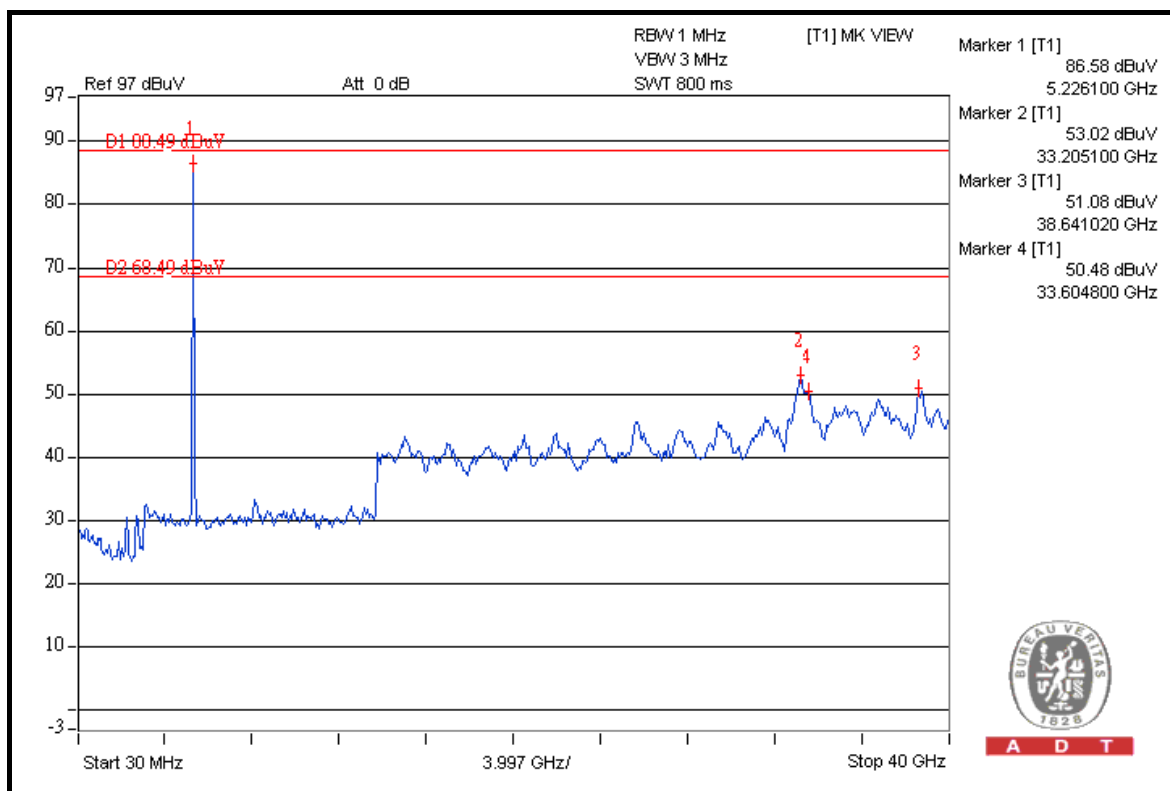



A D T

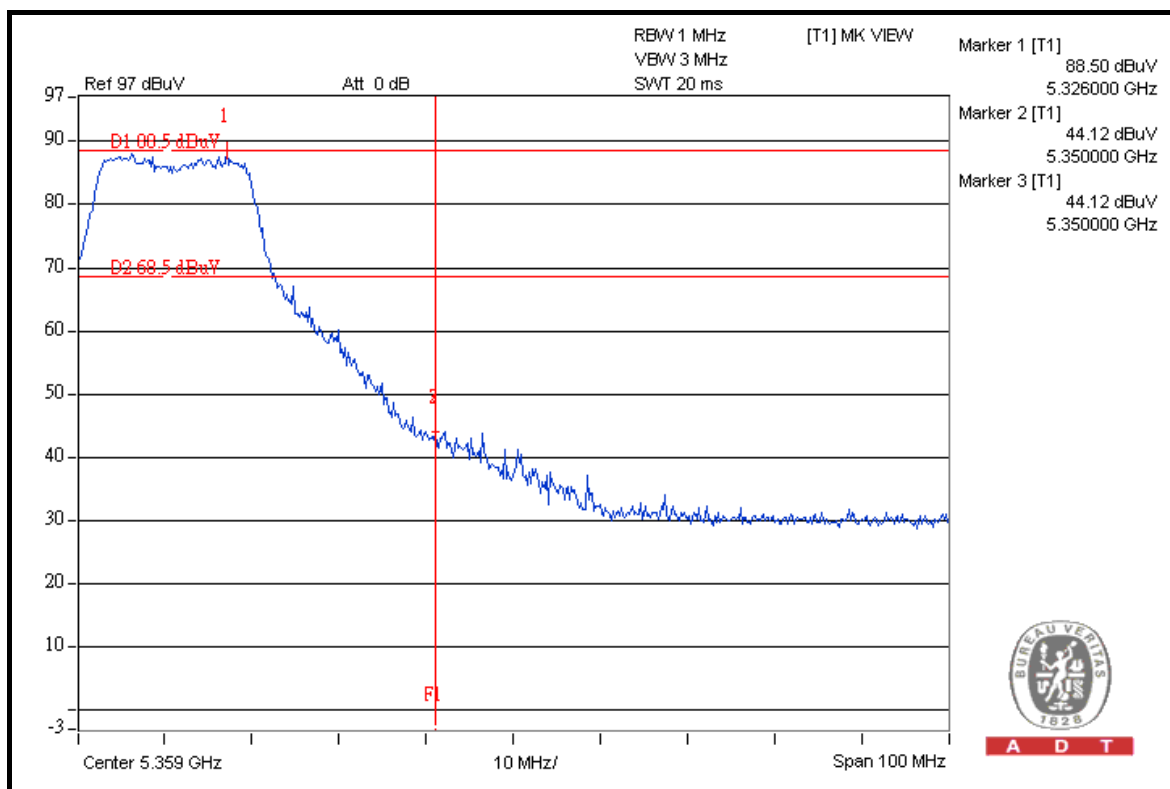

A D T



A D T

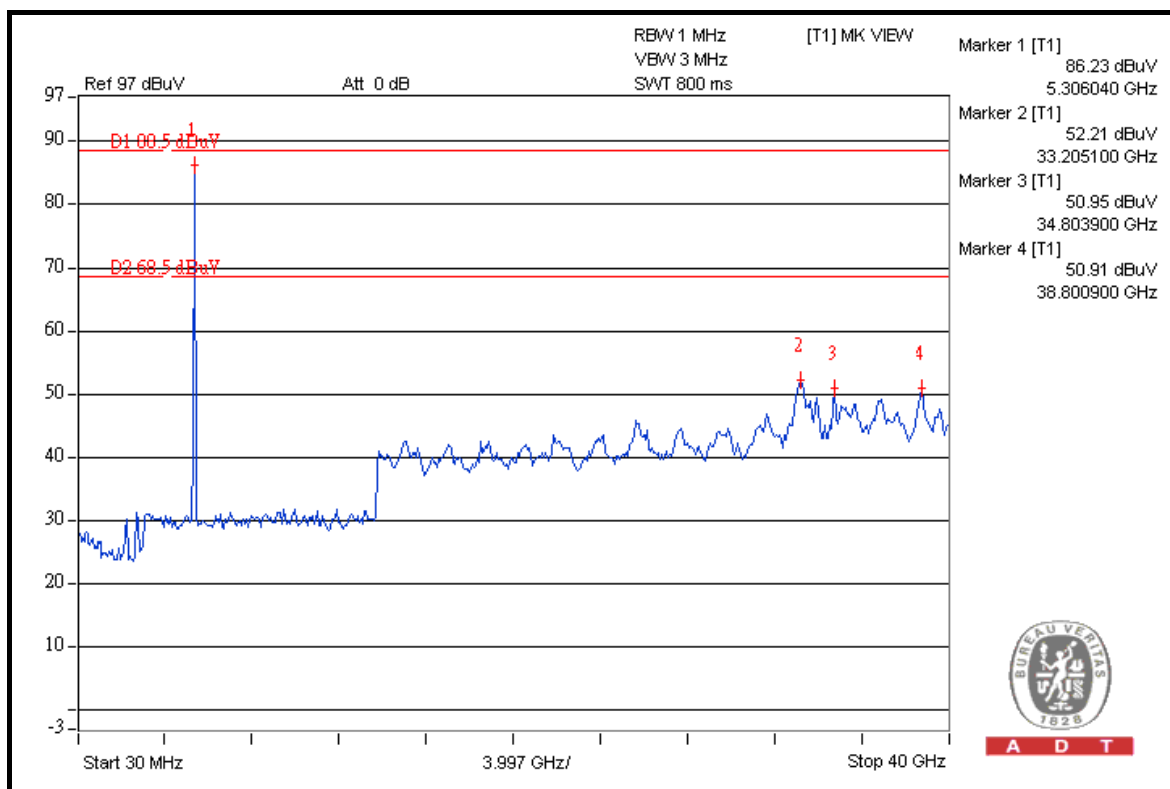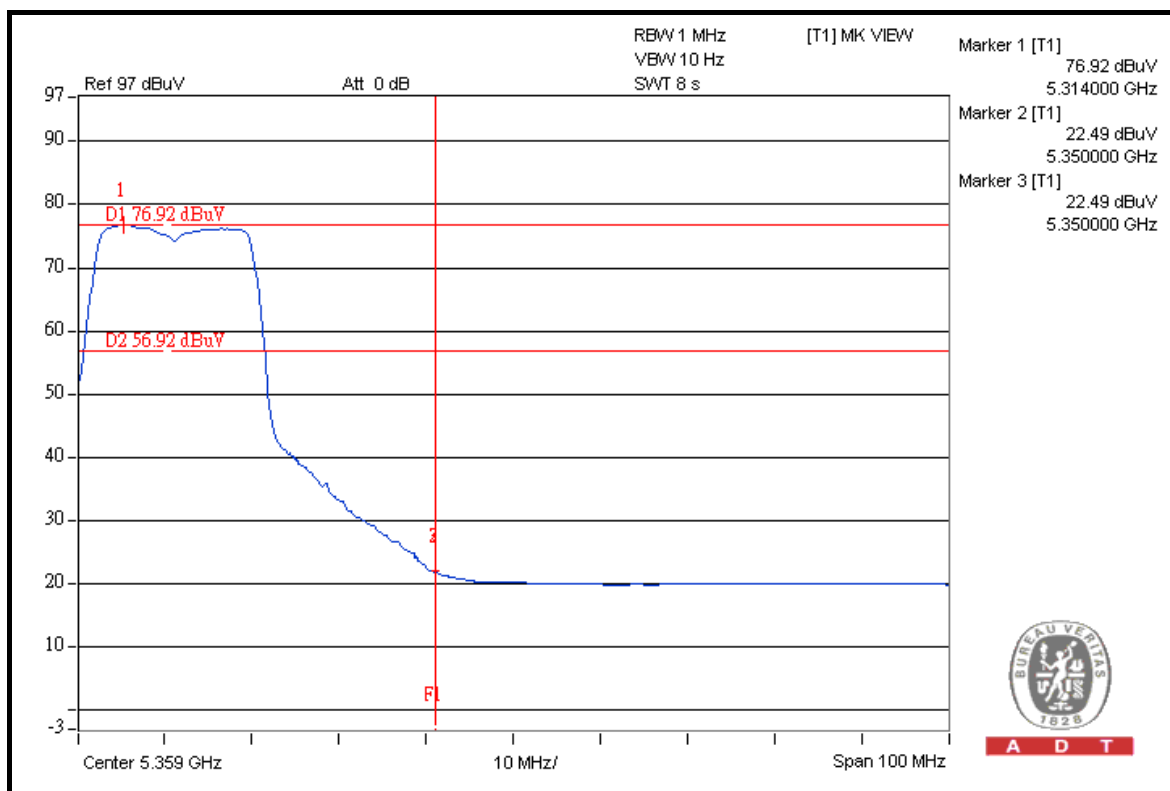

FOR 5500-5700MHz BAND:

5500MHz

RESTRICT BAND (5350 ~ 5460 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5500.00 (PK)	115.9	54.99	60.91	74.00
5500.00 (AV)	105.8	56.41	49.39	54.00

FREQUENCY BAND (5460 ~ 5470 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5500.00 (PK)	115.9	48.61	67.29	68.30

5700MHz

ABOVE 5725 MHz



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5700.00 (PK)	115.6	48.62	66.98	68.30

NOTE:

- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
- Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

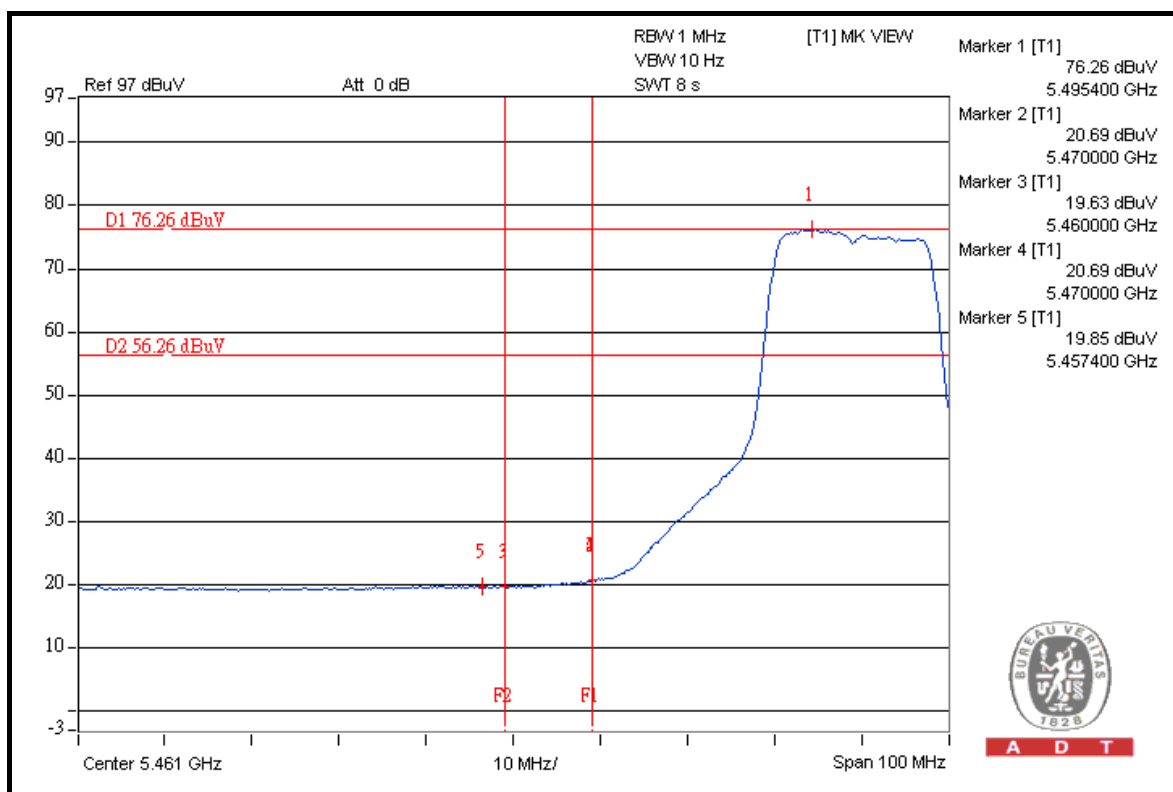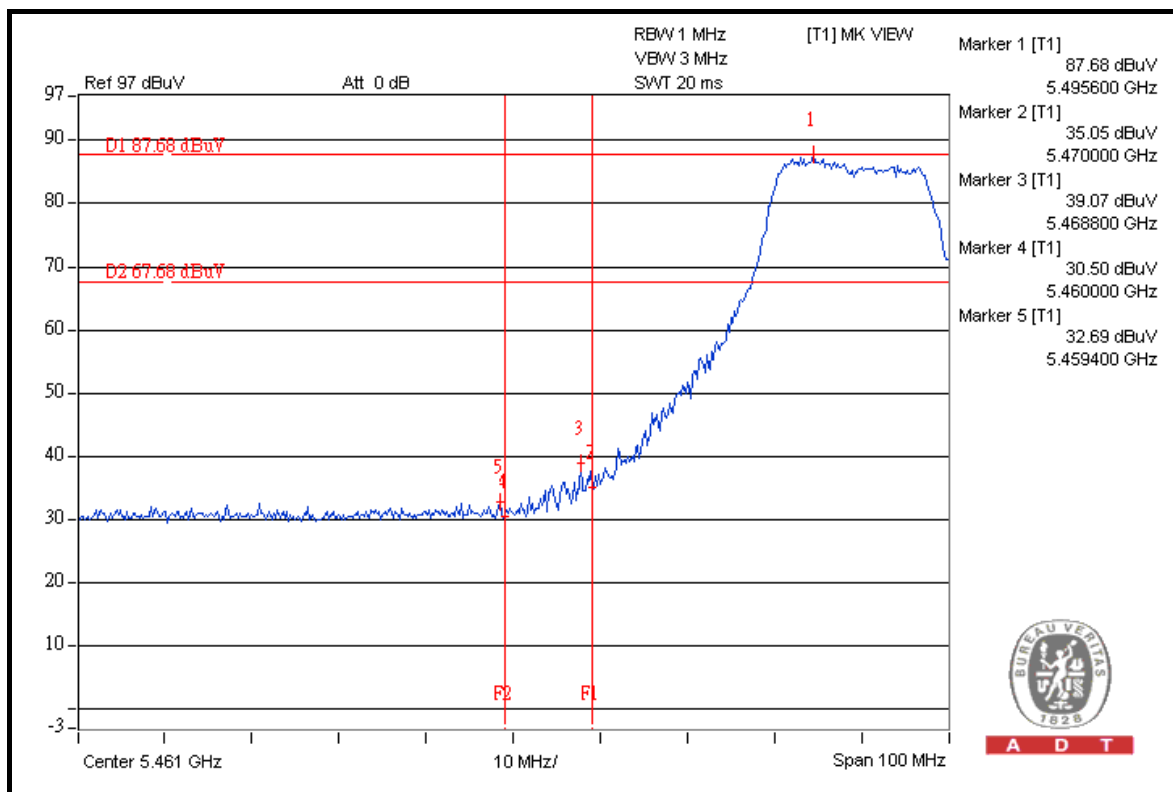





A D T

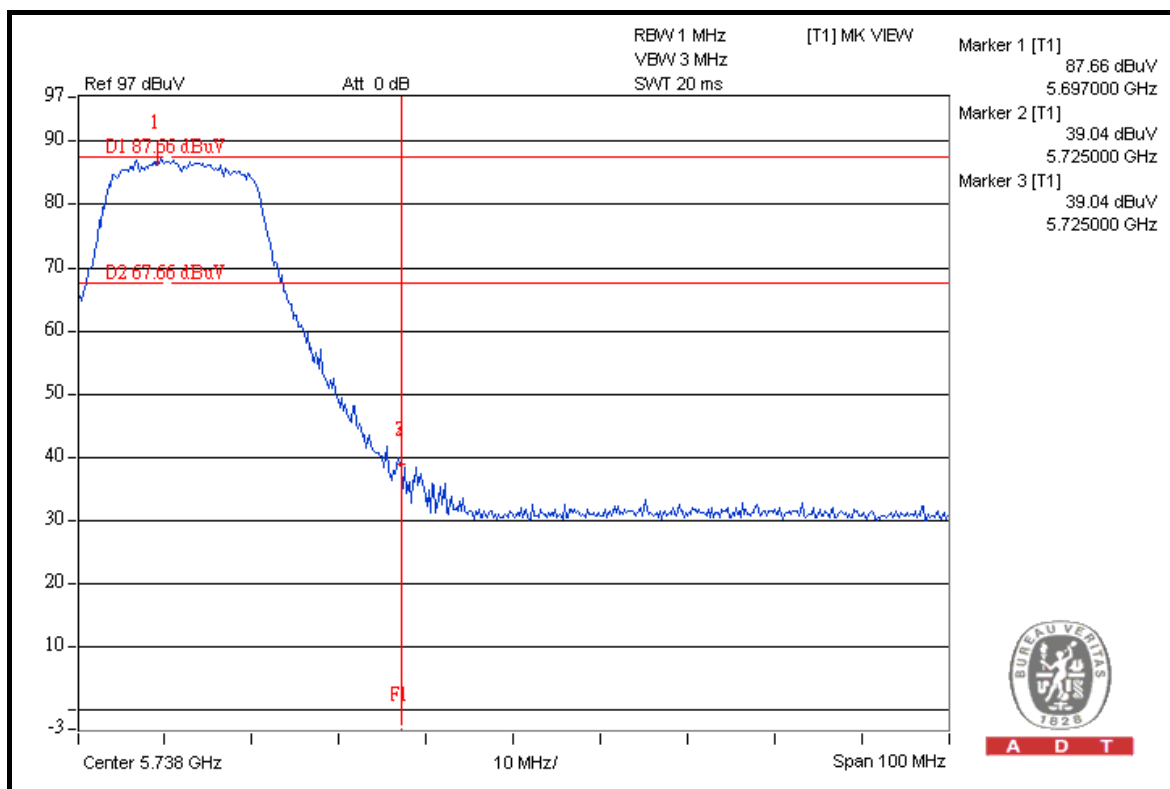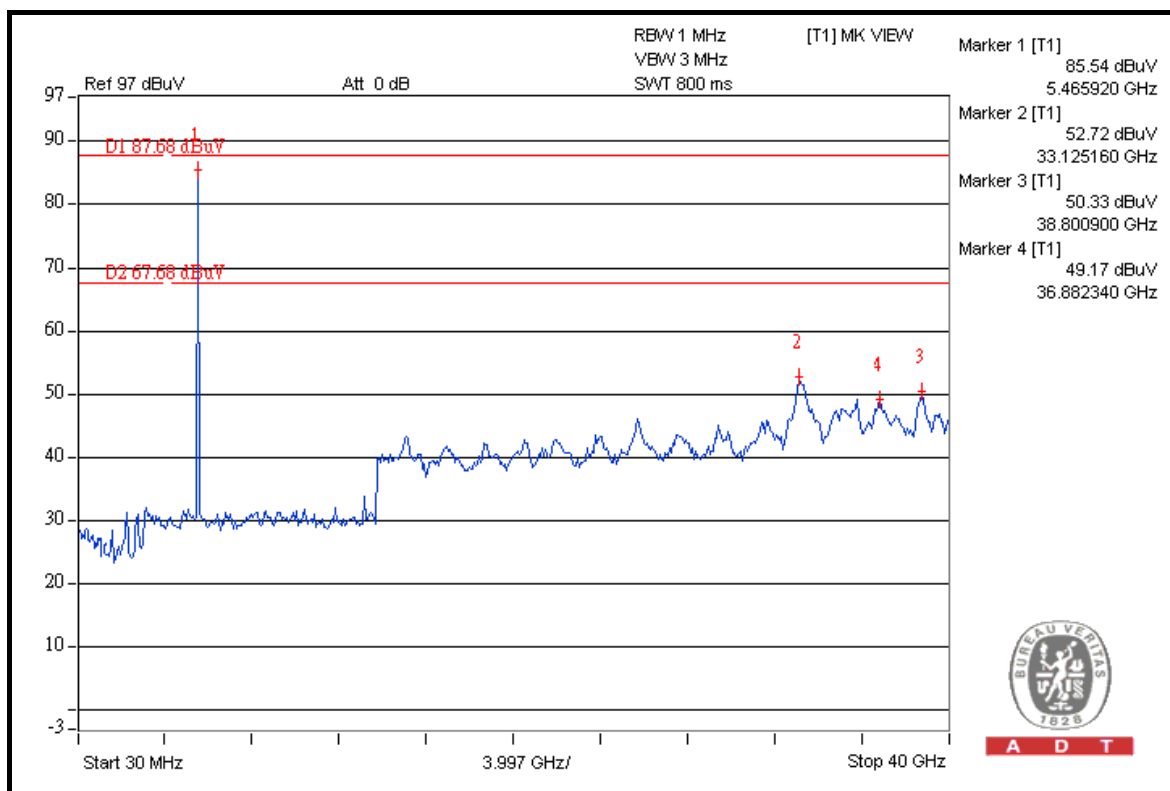



A D T

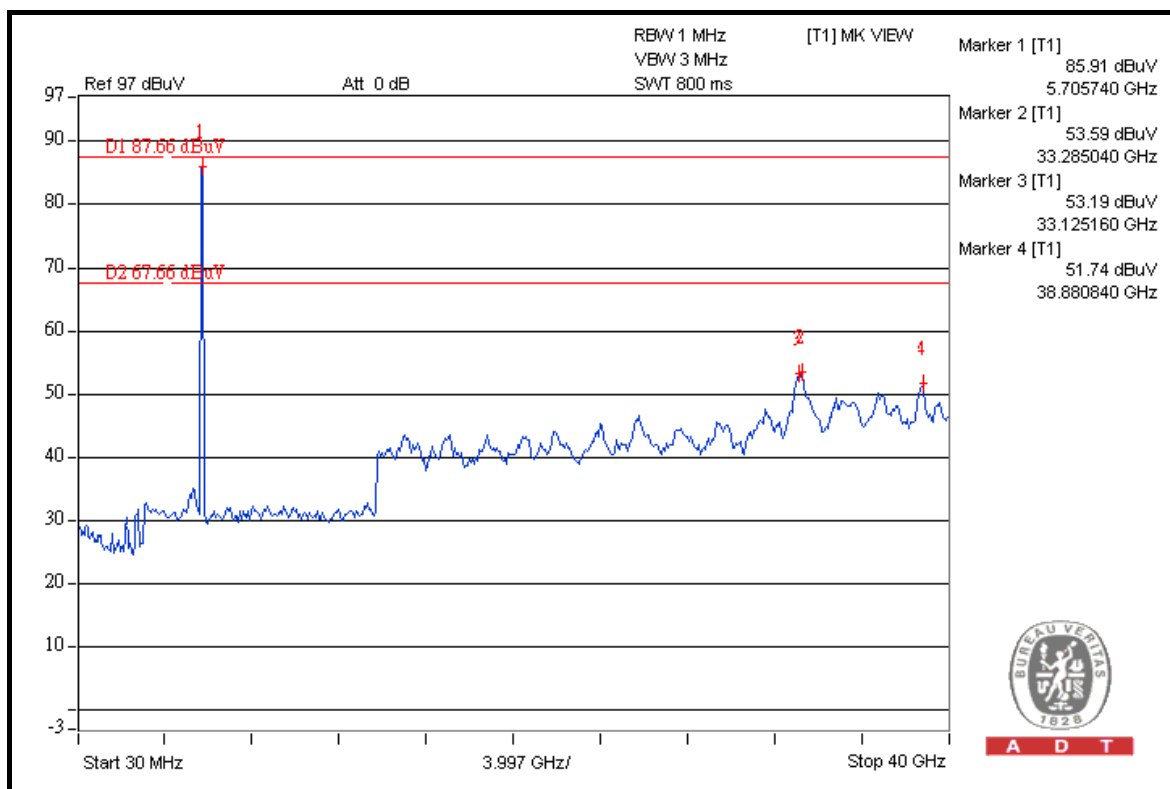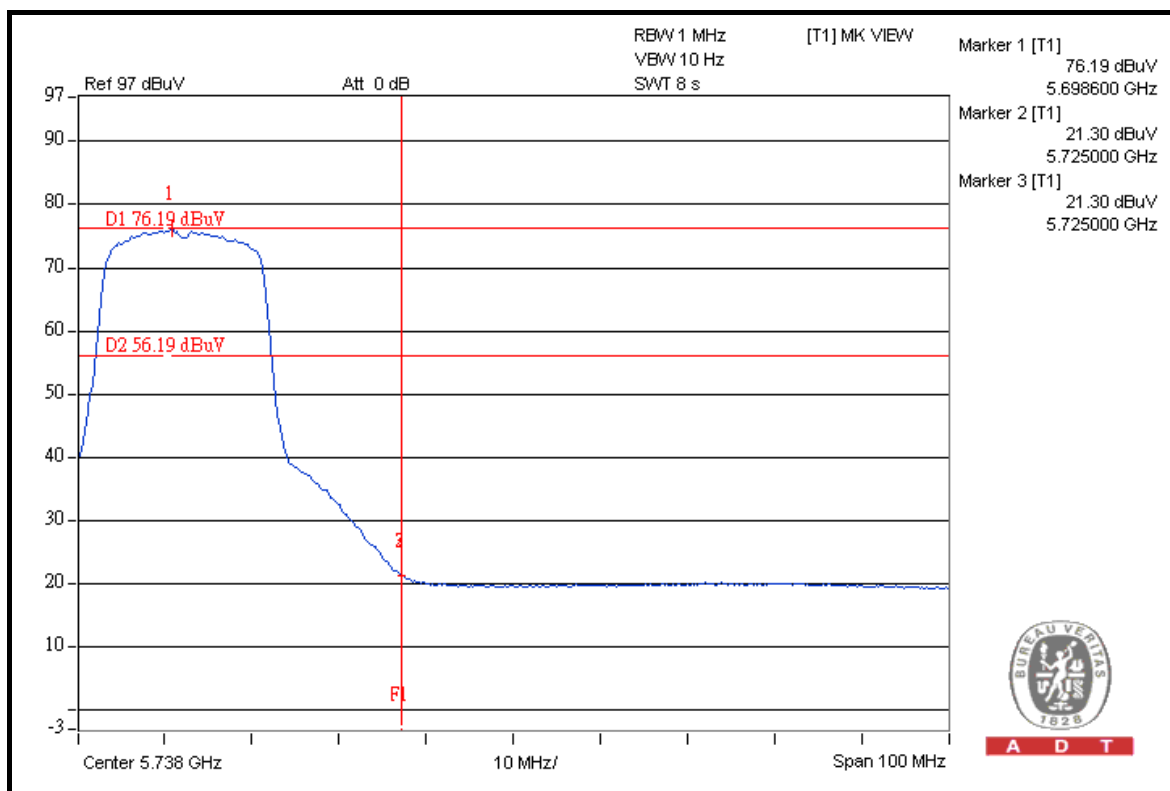

802.11n (40MHz)

FOR 5260-5320MHz BAND:

RESTRICT BAND (4500 ~ 5150 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5270.00 (PK)	115.2	48.90	66.30	74.00
5270.00 (AV)	103.3	50.95	52.35	54.00

RESTRICT BAND (5350 ~ 5460 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5310.00 (PK)	109.5	40.83	68.67	74.00
5310.00 (AV)	97.7	48.43	49.27	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.




A D T

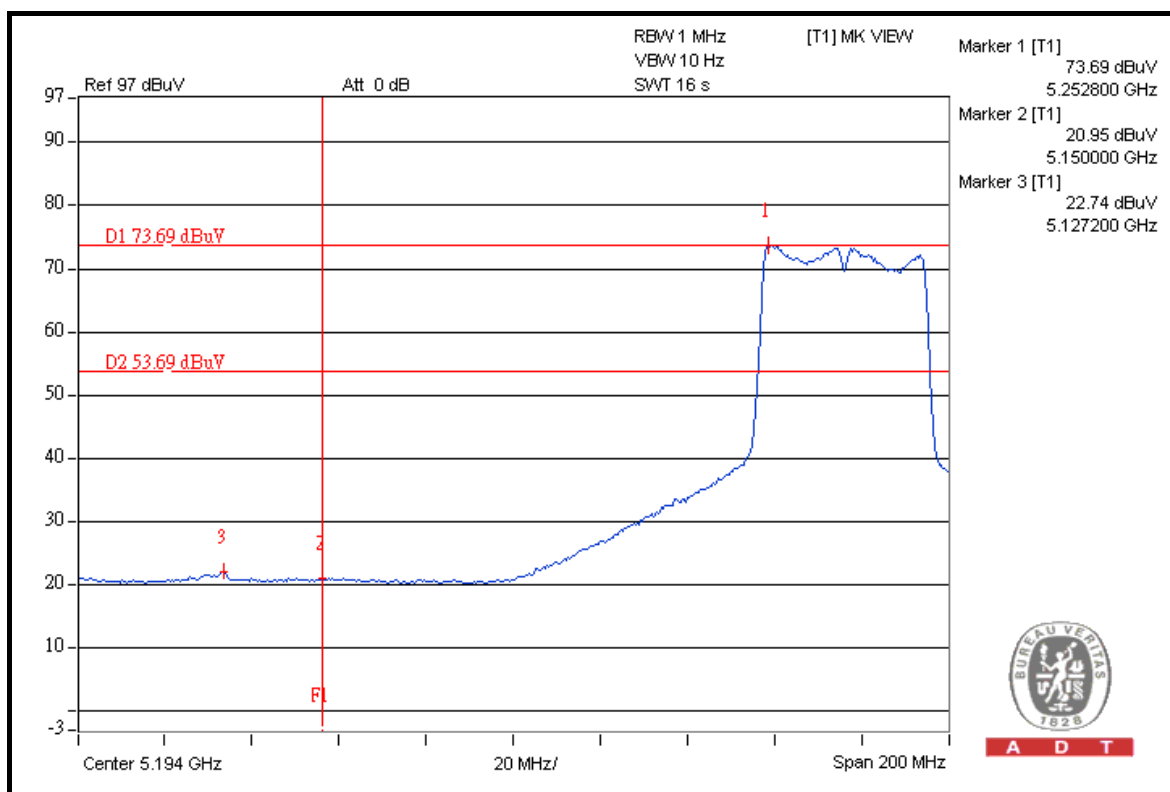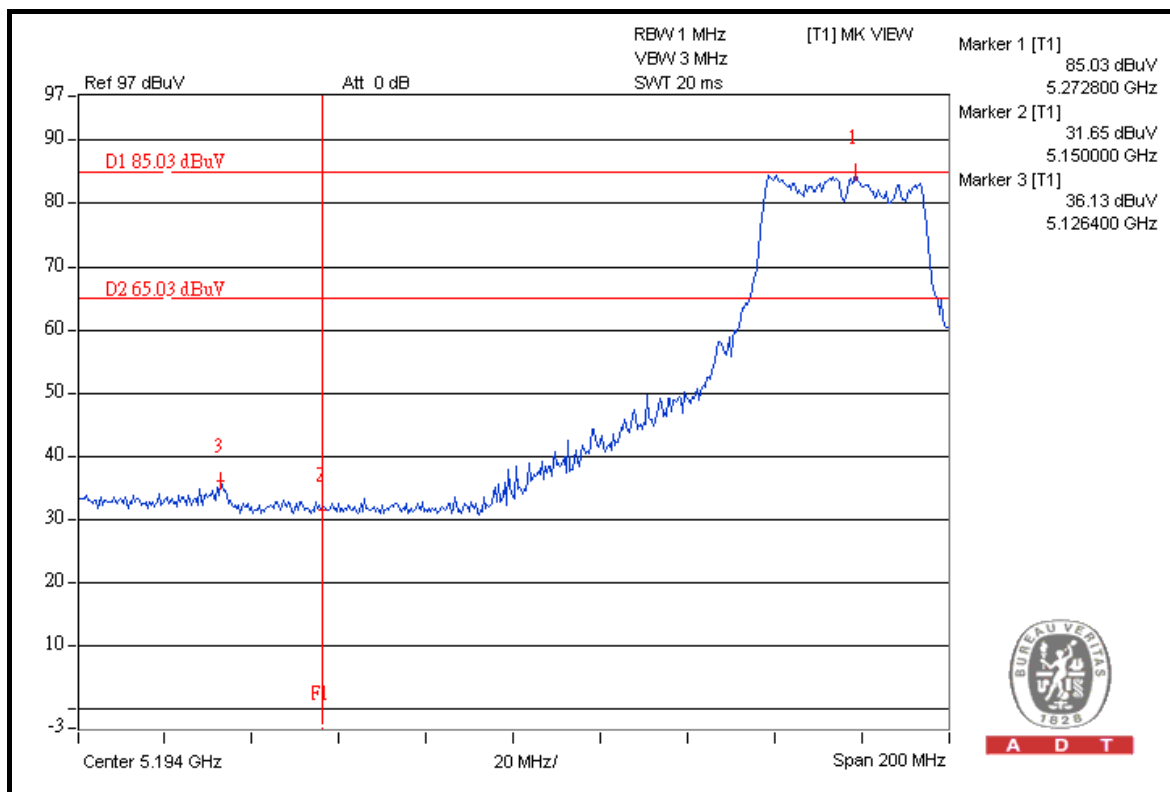




A D T

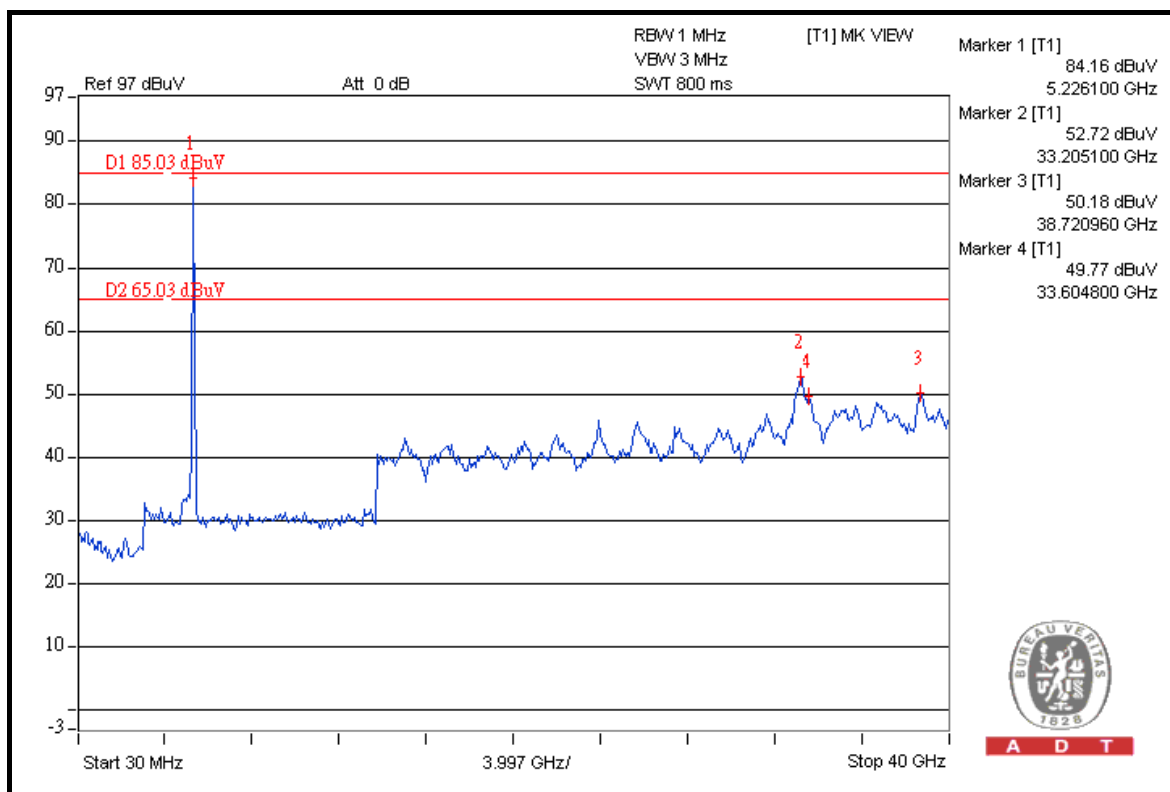



A D T

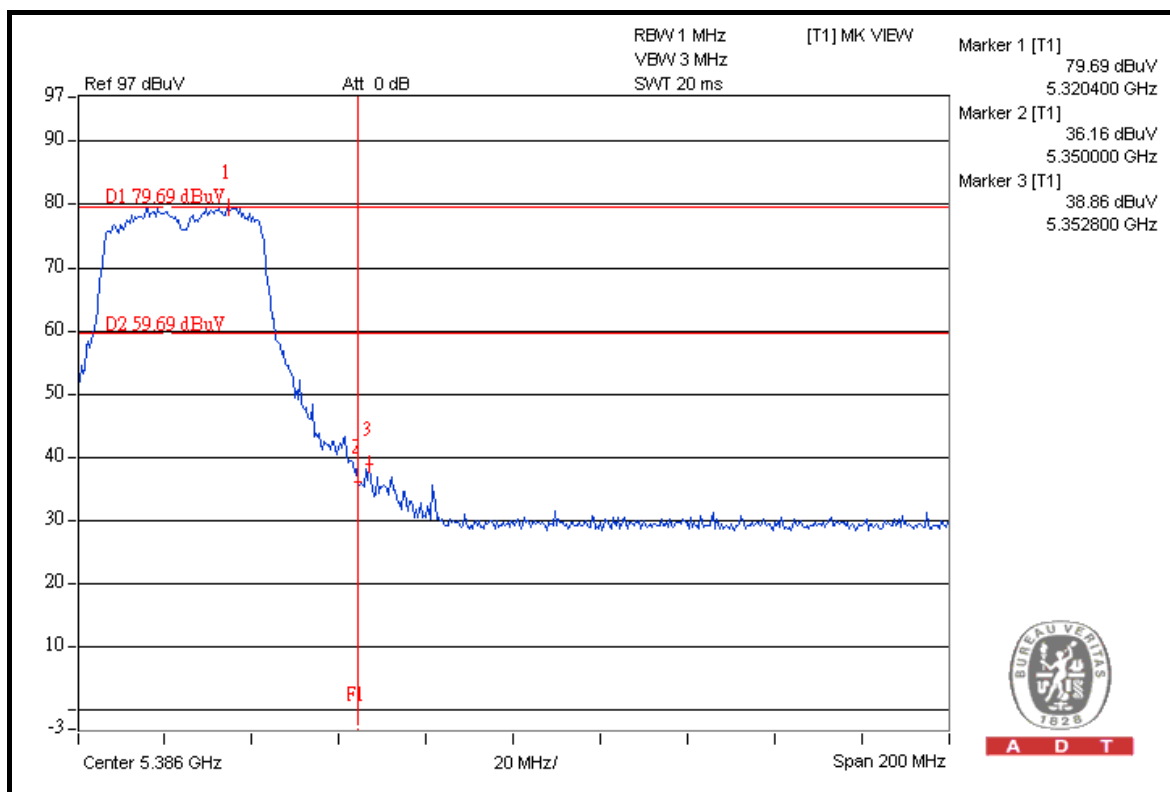

A D T



A D T

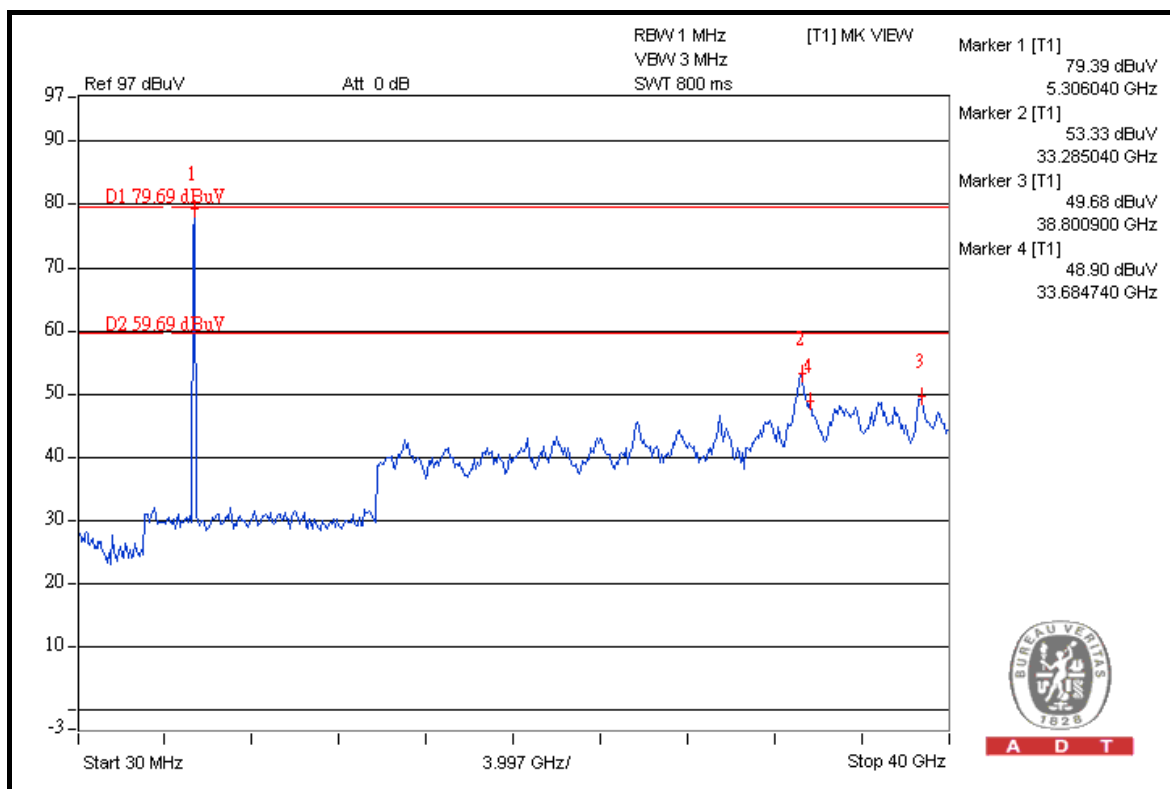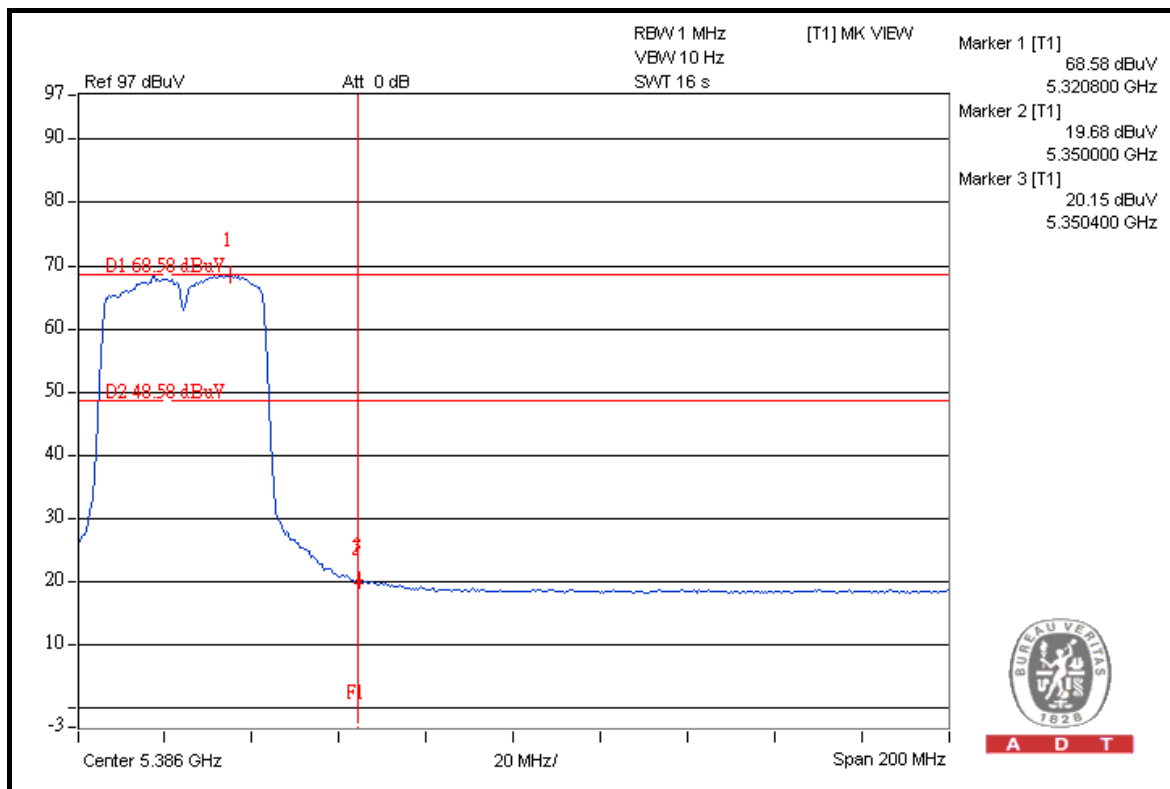

FOR 5500-5700MHz BAND:

5510MHz

RESTRICT BAND (5350 ~ 5460 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
5510.00 (PK)	108.1	45.63	62.47	74.00
5510.00 (AV)	98.0	47.36	50.64	54.00

FREQUENCY BAND (5460 ~ 5470 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5510.00 (PK)	108.1	41.67	66.43	68.30

5670MHz

ABOVE 5725 MHz



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH (dBuV/m)	LIMIT (dBuV/m)
5670.00 (PK)	114.1	52.00	62.10	68.30

NOTE:

- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
- Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

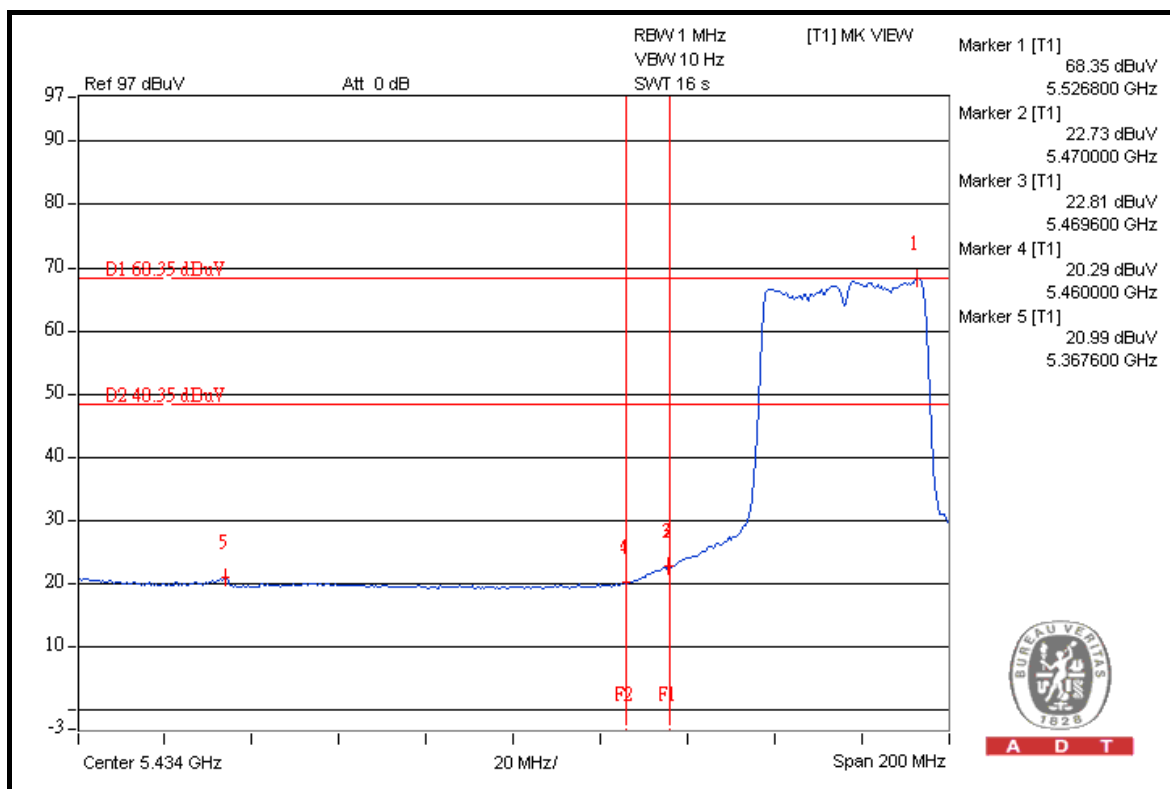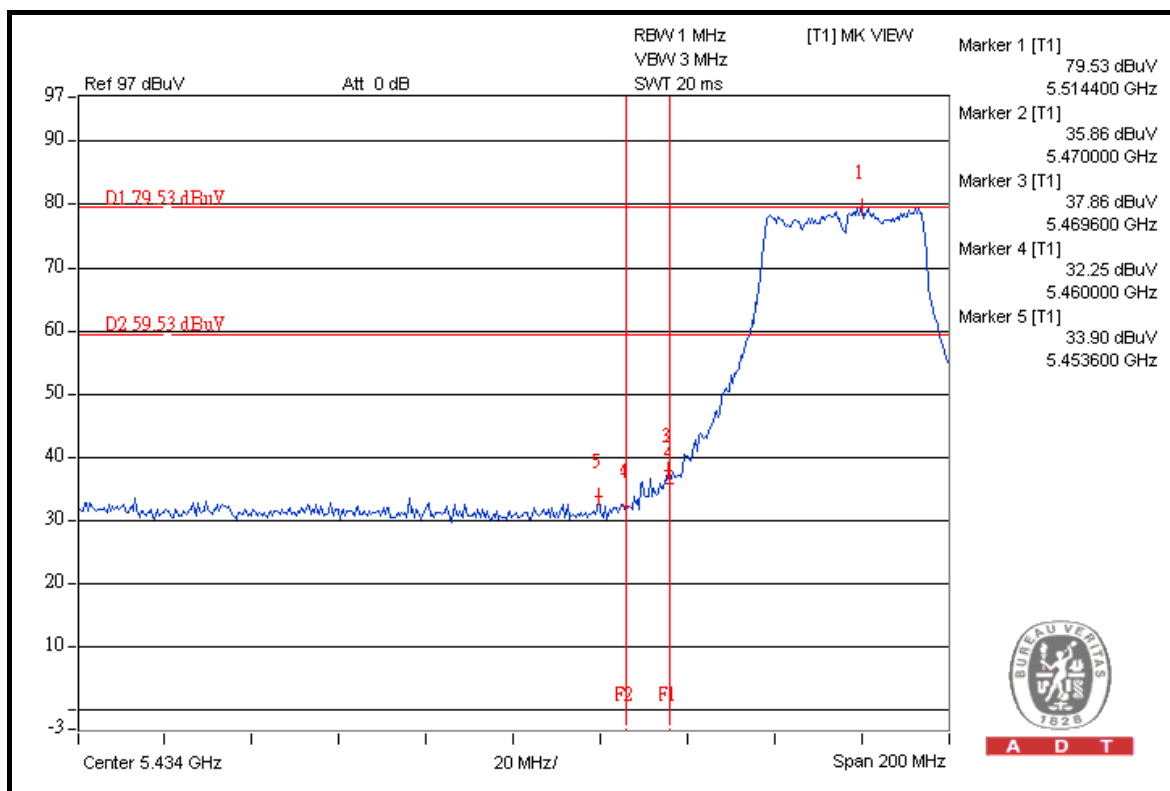





A D T

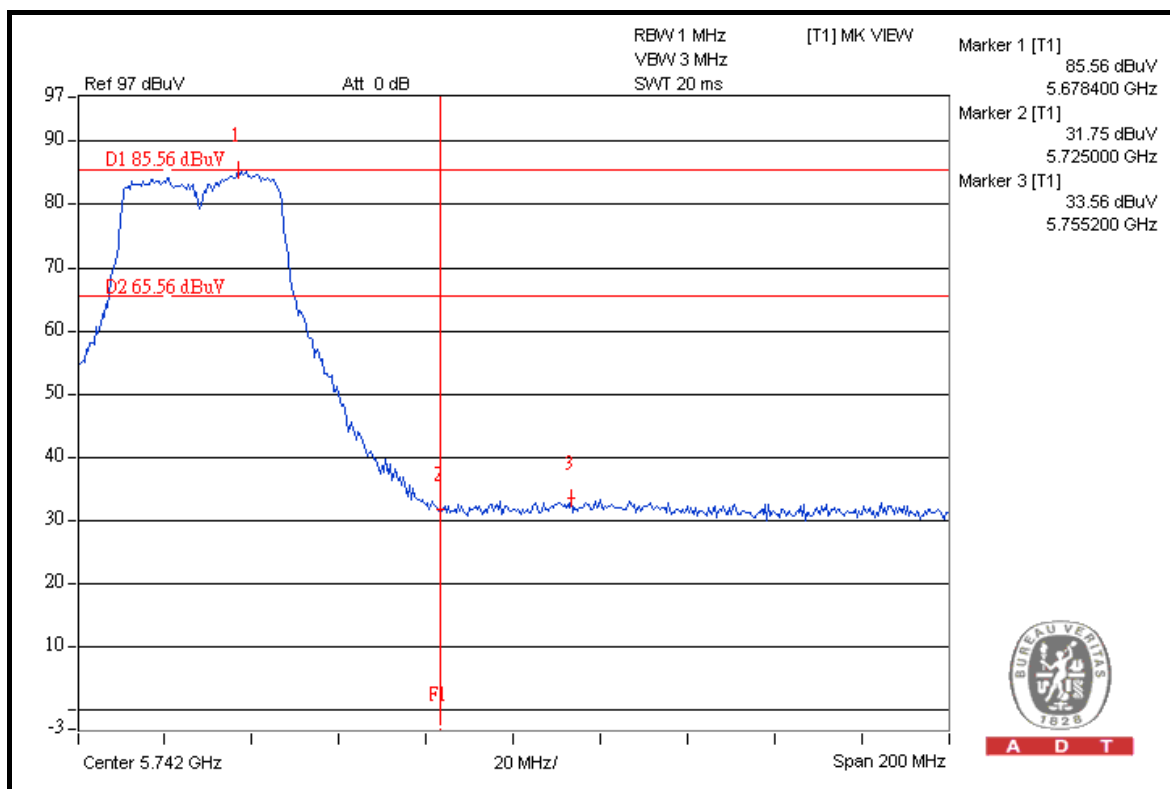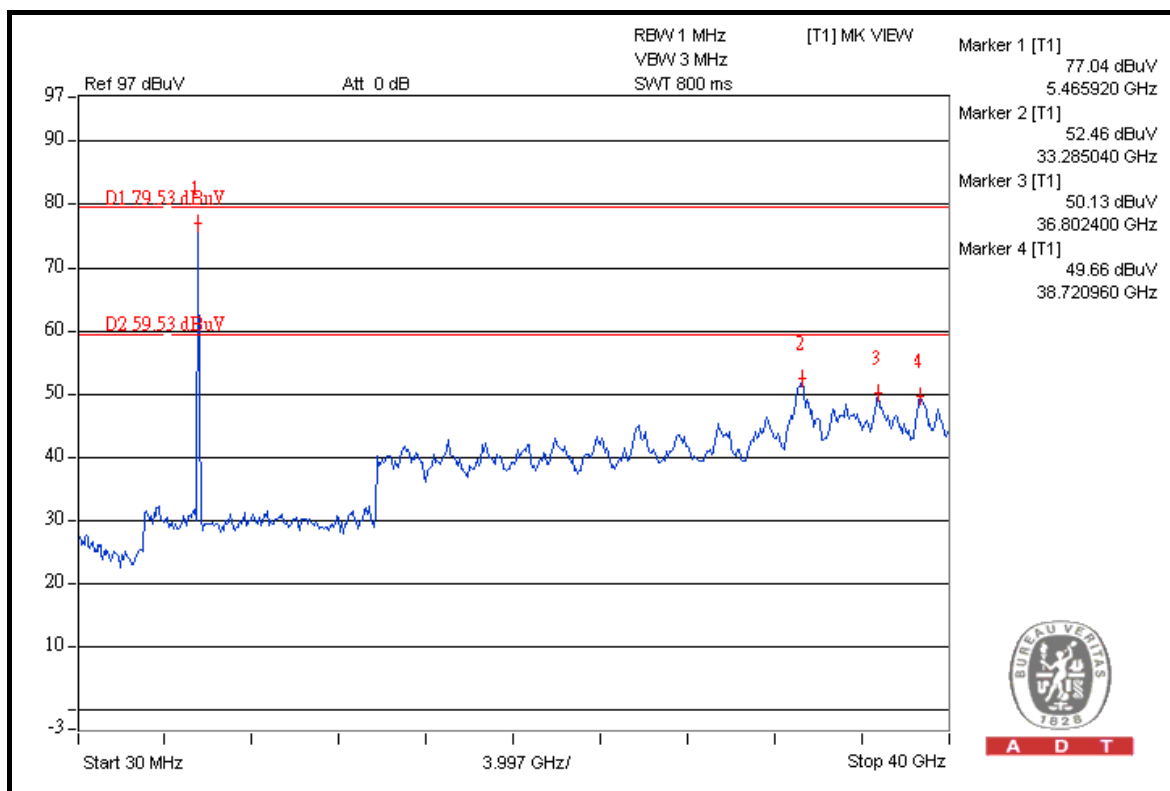



A D T

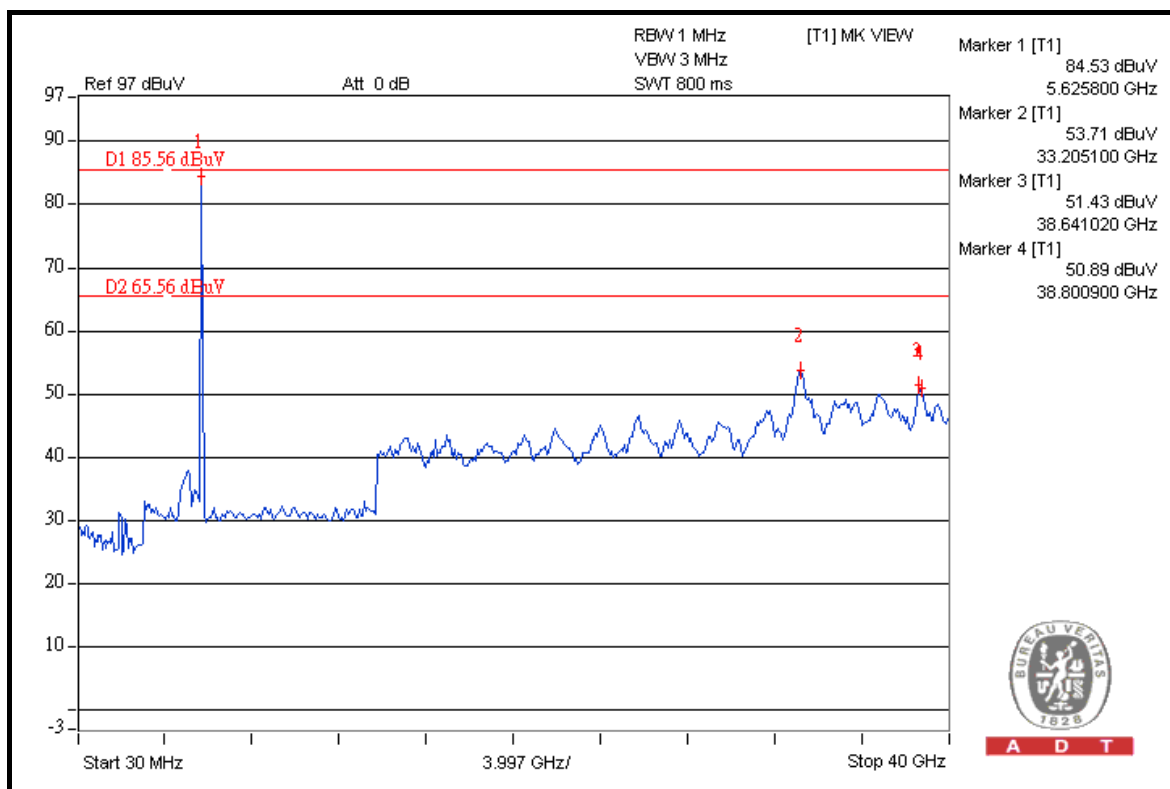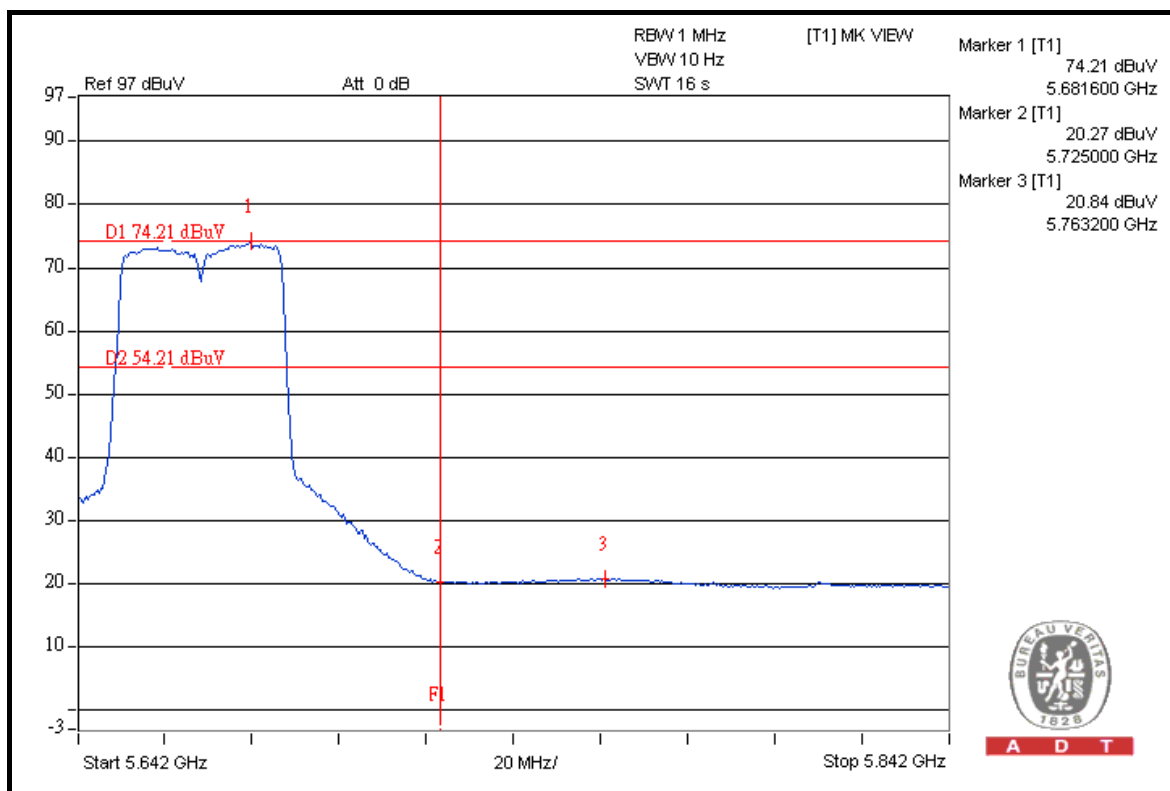

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---