

FCC TEST REPORT (15.407)

REPORT NO.: RF110831C15-1

MODEL NO.: APL25-091

FCC ID: QWU-091

RECEIVED: Aug. 31, 2011

TESTED: Oct. 07 to 12, 2011

ISSUED: Oct. 19, 2011

APPLICANT: SonicWALL, Inc.

ADDRESS: 2001 Logic Drive San Jose, CA 95124, USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 79 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4 DESCRIPTION OF SUPPORT UNITS	16
3.5 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2 TEST INSTRUMENTS	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS (Mode 1)	21
4.1.8 TEST RESULTS (Mode 2)	23
4.2 RADIATED EMISSION MEASUREMENT	25
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	26
4.2.3 TEST INSTRUMENTS	27
4.2.4 TEST PROCEDURES	28
4.2.5 DEVIATION FROM TEST STANDARD	28
4.2.6 TEST SETUP	29
4.2.7 EUT OPERATING CONDITION	29
4.2.8 TEST RESULTS	30
4.3 OUTPUT TRANSMIT POWER MEASUREMENT	51
4.3.1 LIMITS OF OUTPUT TRANSMIT POWER MEASUREMENT	51
4.3.2 TEST INSTRUMENTS	51
4.3.3 TEST PROCEDURE	52
4.3.4 DEVIATION FROM TEST STANDARD	52
4.3.5 TEST SETUP	52
4.3.6 EUT OPERATING CONDITIONS	52
4.3.7 TEST RESULTS	53
4.4 PEAK POWER EXCURSION MEASUREMENT	59
4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT	59
4.4.2 TEST INSTRUMENTS	59
4.4.3 TEST PROCEDURE	59
4.4.4 DEVIATION FROM TEST STANDARD	59
4.4.5 TEST SETUP	60
4.4.6 EUT OPERATING CONDITIONS	60
4.4.7 TEST RESULTS	61



4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	64
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	64
4.5.2	TEST INSTRUMENTS	64
4.5.3	TEST PROCEDURES	64
4.5.4	DEVIATION FROM TEST STANDARD	64
4.5.5	TEST SETUP	64
4.5.6	EUT OPERATING CONDITIONS	64
4.5.7	TEST RESULTS	65
4.6	FREQUENCY STABILITY	68
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	68
4.6.2	TEST INSTRUMENTS	68
4.6.3	TEST PROCEDURE	68
4.6.4	DEVIATION FROM TEST STANDARD	69
4.6.5	TEST SETUP	69
4.6.6	EUT OPERATING CONDITION	69
4.6.7	TEST RESULTS	70
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT	71
4.7.1	TEST INSTRUMENTS	71
4.7.2	TEST PROCEDURE	71
4.7.3	EUT OPERATING CONDITION	71
4.7.4	TEST RESULTS	71
5.	INFORMATION ON THE TESTING LABORATORIES	78
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	79



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110831C15-1	Original release	Oct. 19, 2011

1. CERTIFICATION

PRODUCT: Wireless 802.11 abgn Device
BRAND NAME: SonicWALL
MODEL NO.: APL25-091
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: SonicWALL, Inc.
TESTED: Oct. 07 to 12, 2011
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: APL25-091) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Oct. 19, 2011
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** Oct. 19, 2011
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

[For 802.11a](#)

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.97dB at 4.082 MHz
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.7dB at 5150.00MHz
15.407(a)(1/2/3)	Output Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connectors are RTNC and RSMA not standard connectors.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless 802.11 abgn Device
MODEL NO.	APL25-091
FCC ID	QWU-091
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	■802.11b: 11 / 5.5 / 2 / 1Mbps ■802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps ■802.11a: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps ■802.11n: up to 450Mbps.
OPERATING FREQUENCY	For 15.407 5GHz: 5.18 ~ 5.24GHz
	For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
NUMBER OF CHANNEL	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.407 802.11a: 19.5mW 802.11n (20MHz): 28.6mW 802.11n (40MHz): 29.1 mW
MAXIMUM OUTPUT POWER	For 15.247(2.4GHz) 802.11b: 154.8mW 802.11g: 504.2mW 802.11n (20MHz): 484.4mW 802.11n (40MHz): 741.4mW
	For 15.247(5GHz) 802.11a: 426.6mW 802.11n (20MHz): 493.6mW 802.11n (40MHz): 510.7mW
	For 15.407 802.11a: 19.5mW 802.11n (20MHz): 28.6mW 802.11n (40MHz): 29.1 mW
ANTENNA TYPE	Refer to note for more details

DATA CABLE	1.8m non-shielded RJ45 cable without core
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter

NOTE:

- The frequency bands used in this EUT are listed as below.

Frequency Band (MHz)	2412~2472	5180~5320	5745~5825
802.11b	√	-	-
802.11g	√	-	-
802.11a	-	√	√
802.11n (20MHz)	√	√	√
802.11n (40MHz)	√	√	√

- The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 2 receivers.

MODULATION MODE	TX FUNCTION
802.11b	3TX
802.11g	3TX
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX

- The antennas used in this EUT are listed as below table:

Transmitter Circuit	ANTENNA TYPE	ANTENNA CONNECTOR	GAIN (dBi)	
			2.4GHz BAND	5.0GHz BAND
Chain (0)	Dipole	RTNC	2.5	2.5
Chain (1)	Dipole	RSMA	3.0	3.0
Chain (2)	Dipole	RTNC	2.5	2.5

4. The EUT is powered by the following adapters. After pre-testing, the adapter 2 is the worst case for final test.

ADAPTER 1	
BRAND:	Sunny COMPUTER TECHNOLOGY CO,LTD.
MODEL:	SYS1359-3612-T3
INPUT:	100-240Vac, 1.5A MAX ,50-60Hz
OUTPUT:	12Vdc, 3.0A
POWER LINE:	AC 1.8m non-shielded cable without core DC 1.8m non-shielded cable with 1 core

ADAPTER 2	
BRAND:	SINO-AMERICAN
MODEL:	SA142B-12V
INPUT:	100-240Vac, 50-60Hz, 1.2A
OUTPUT:	12Vdc, 3.0A
POWER LINE:	AC 1.8m non-shielded cable without core DC 1.6m non-shielded cable with 1 core

5. 2.4GHz and 5GHz technology cannot transmit at same time.
6. The above EUT information is declared by the manufacturer and for more detailed feature description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11n (20MHz):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	OB	
MODE 1	√	-	-	-	-	Adapter 1
MODE 2	√	√	√	√	√	Adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ³ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	36 to 48	48	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11n (20MHz)	36 to 48	48	OFDM	BPSK	6.5	X

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	X
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5	X
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

※ Bandwidth as show worst chain in report base on preliminary measurement.

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25deg. C, 67%RH	120Vac, 60Hz	Frank Liu
	26deg. C, 68%RH	120Vac, 60Hz	Frank Liu
RE ³ 1G	24deg. C, 64%RH	120Vac, 60Hz	Frank Liu
RE<1G	24deg. C, 71%RH	120Vac, 60Hz	Evan Huang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70 166-5CA-0448	PIW632500516610
3	HUB	ZyXEL	ES-116P	S060H0200021 5	FCC DoC
4	iPod shuffle	Apple	MC749TA/A	CC4DMFJUDFD M	NA
5	iPod shuffle	Apple	MC749TA/A	CC4DN25WDF DM	NA
6	SD card	Transcend	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	UTP cable (10m)
3	UTP cable (10m)
4	USB cable (0.1m)
5	USB cable (0.1m)
6	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

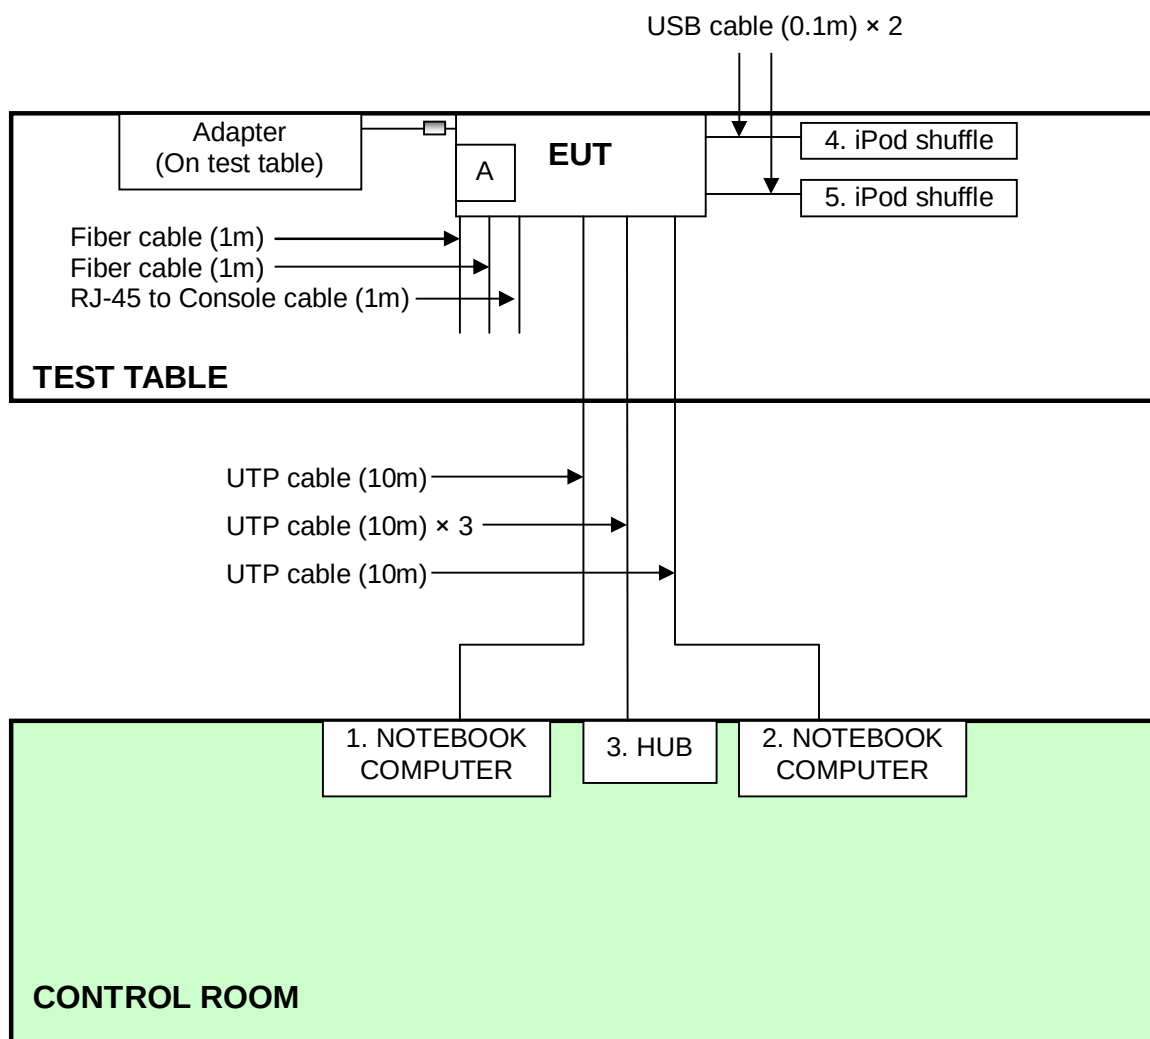

NOTE: 1. The item A is support unit 6.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Test date: Oct. 08 to 12, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	ENV216	100072	June 10, 2011	June 09, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 03, 2010	Nov. 02, 2011
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

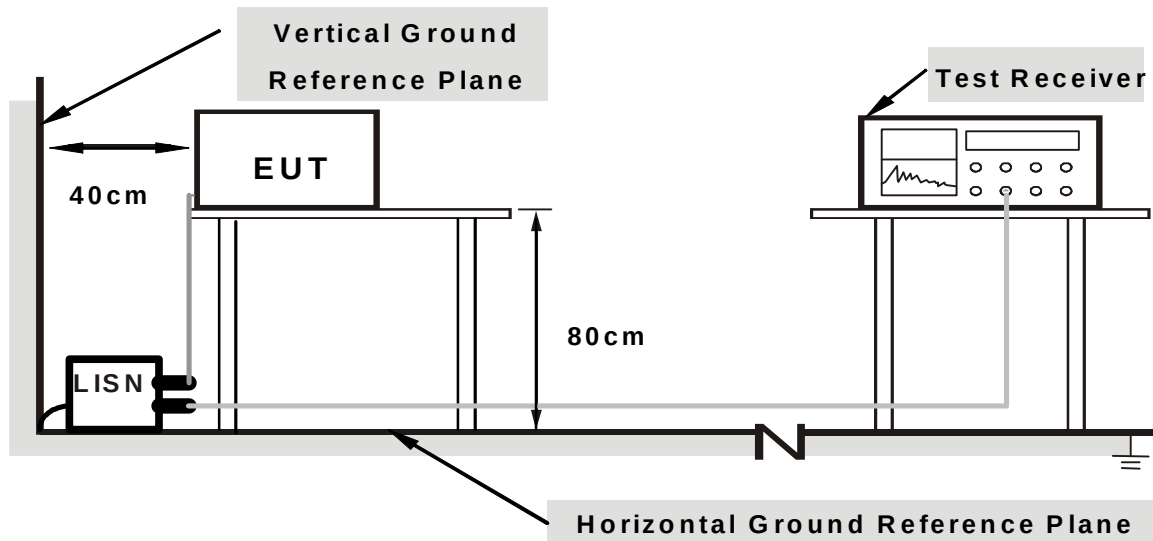

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared computer system (support unit 1~2) to act as communication partner and placed it outside of testing area.
3. The communication partners ran test program “art.exe” to enable EUT under transmission/receiving condition continuously via UTP cables transmission.

4.1.7 TEST RESULTS (Mode 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.09	56.05	43.59	56.14	43.68	64.98	54.98	-8.84	-11.30
2	0.224	0.10	47.26	33.01	47.36	33.11	62.66	52.66	-15.30	-19.55
3	0.373	0.11	42.33	28.21	42.44	28.32	58.44	48.44	-16.00	-20.12
4	0.474	0.11	39.66	28.80	39.77	28.91	56.44	46.44	-16.66	-17.52
5	0.560	0.12	36.95	24.83	37.07	24.95	56.00	46.00	-18.93	-21.05
6	4.359	0.33	29.70	22.09	30.03	22.42	56.00	46.00	-25.97	-23.58


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

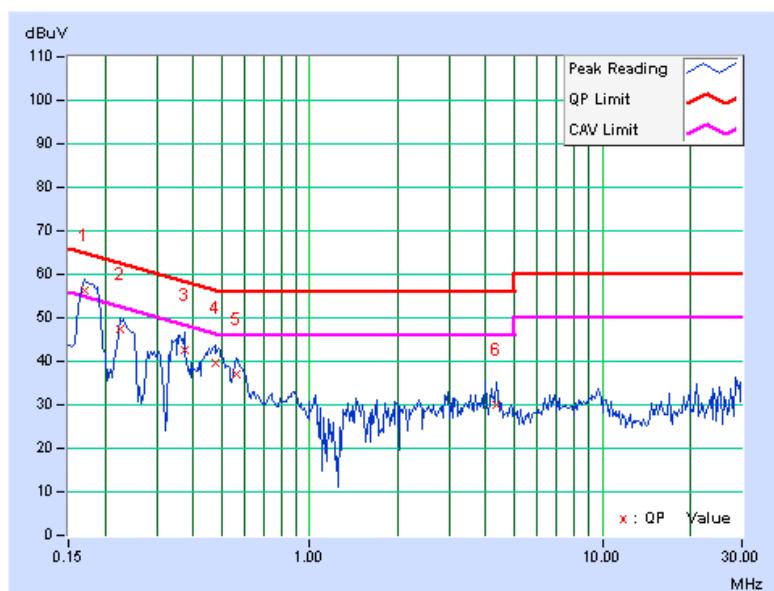

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.08	54.37	38.54	54.45	38.62	65.18	55.18	-10.73	-16.56
2	0.185	0.09	54.61	41.51	54.70	41.60	64.25	54.25	-9.56	-12.66
3	0.228	0.09	47.36	35.86	47.45	35.95	62.52	52.52	-15.07	-16.57
4	0.361	0.11	42.71	31.65	42.82	31.76	58.71	48.71	-15.89	-16.95
5	0.474	0.11	40.12	29.37	40.23	29.48	56.44	46.44	-16.21	-16.96
6	4.641	0.26	28.07	20.79	28.33	21.05	56.00	46.00	-27.67	-24.95

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

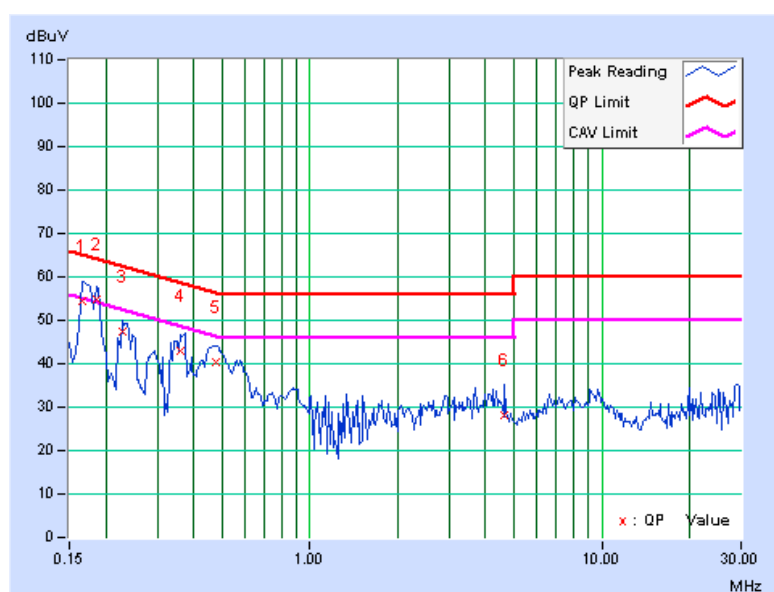


4.1.8 TEST RESULTS (Mode 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.09	42.95	28.23	43.04	28.32	66.00	56.00	-22.96	-27.68
2	0.181	0.09	47.16	34.68	47.25	34.77	64.43	54.43	-17.17	-19.65
3	0.232	0.10	42.48	34.97	42.58	35.07	62.38	52.38	-19.80	-17.31
4	3.676	0.30	38.57	33.07	38.87	33.37	56.00	46.00	-17.13	-12.63
5	4.180	0.33	39.28	33.99	39.61	34.32	56.00	46.00	-16.39	-11.68
6	12.238	0.60	25.95	22.02	26.55	22.62	60.00	50.00	-33.45	-27.38


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

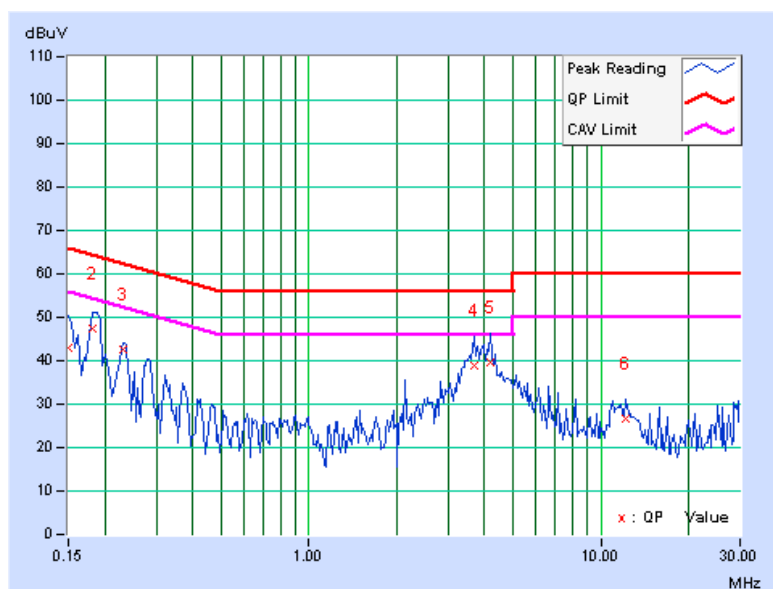

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.07	42.02	26.41	42.09	26.48	66.00	56.00	-23.91	-29.52
2	0.185	0.09	50.01	42.01	50.10	42.10	64.25	54.25	-14.16	-12.16
3	0.228	0.09	41.94	30.23	42.03	30.32	62.52	52.52	-20.49	-22.20
4	4.082	0.24	42.23	38.79	42.47	39.03	56.00	46.00	-13.53	-6.97
5	10.707	0.43	29.85	28.23	30.28	28.66	60.00	50.00	-29.72	-21.34
6	29.582	0.89	28.37	25.00	29.26	25.89	60.00	50.00	-30.74	-24.11

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

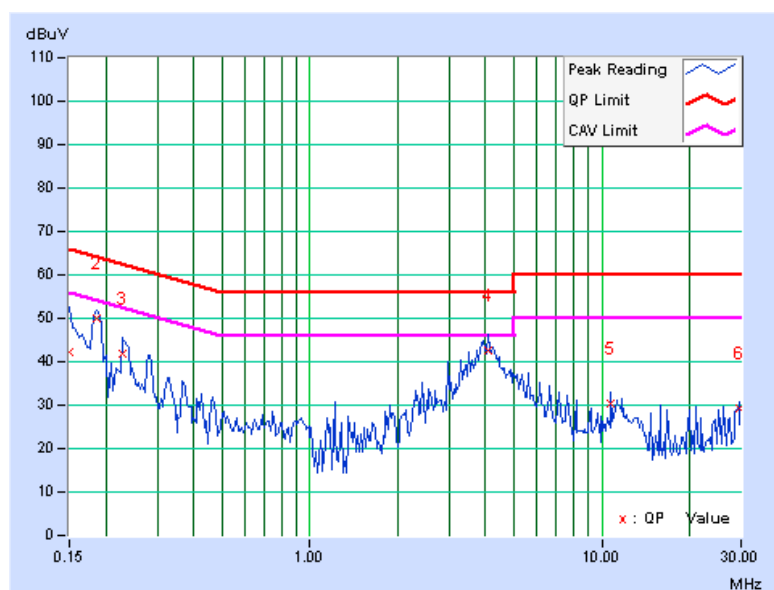

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	Nov. 16, 2010	Nov. 15, 2011
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn Antenna	AIH.8018	0000220091110	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	Oct. 17, 2010	Oct. 16, 2011
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

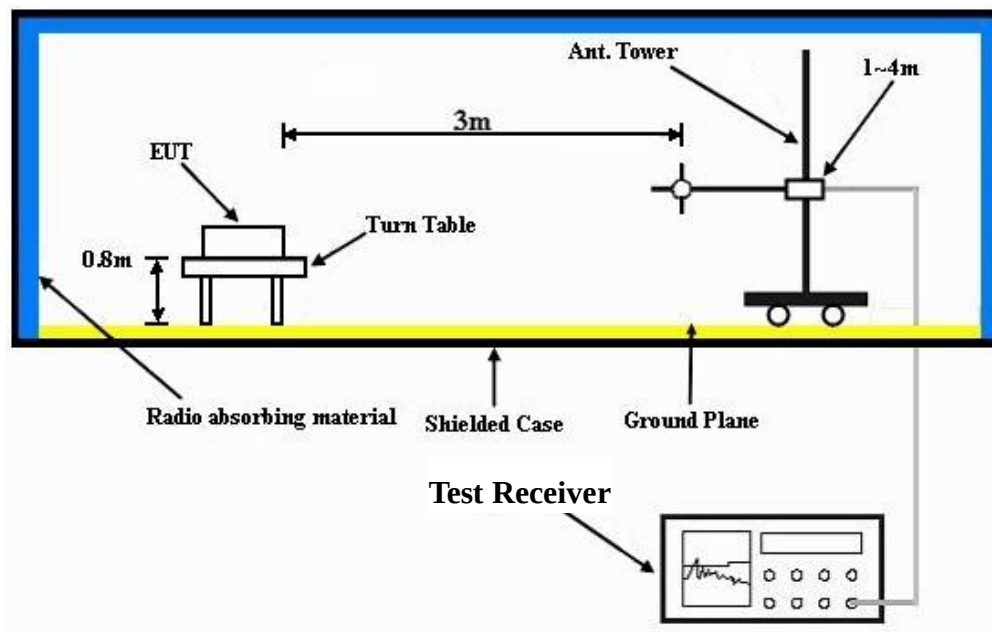

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 71%RH	TESTED BY	Evan Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	107.52	32.5 QP	43.5	-11.0	1.75 H	75	22.04	10.47
2	120.61	29.7 QP	43.5	-13.8	1.75 H	260	17.27	12.44
3	210.55	33.2 QP	43.5	-10.3	1.25 H	85	21.61	11.60
4	382.61	38.9 QP	46.0	-7.1	1.00 H	43	21.93	16.95
5	752.35	36.7 QP	46.0	-9.3	1.25 H	110	13.36	23.33
6	996.62	40.3 QP	54.0	-13.7	1.25 H	2	13.33	26.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.32	38.7 QP	40.0	-1.3	1.00 V	321	24.57	14.10
2	121.51	34.6 QP	43.5	-8.9	1.00 V	7	22.12	12.52
3	190.53	31.8 QP	43.5	-11.7	1.24 V	10	19.88	11.93
4	625.12	41.4 QP	46.0	-4.6	1.01 V	75	19.68	21.73
5	748.62	34.7 QP	46.0	-11.3	1.25 V	192	11.43	23.24
6	874.87	32.7 QP	46.0	-13.3	1.00 V	9	7.27	25.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.24 H	273	16.98	41.72
2	5150.00	47.4 AV	54.0	-6.6	1.24 H	273	5.68	41.72
3	*5180.00	106.9 PK			1.24 H	283	65.14	41.76
4	*5180.00	97.3 AV			1.24 H	283	55.54	41.76
5	#10360.00	52.7 PK	68.3	-15.6	1.22 H	45	4.18	48.52
6	15540.00	62.5 PK	74.0	-11.5	1.39 H	55	8.43	54.07
7	15540.00	50.8 AV	54.0	-3.2	1.39 H	55	-3.27	54.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.42 V	255	19.88	41.72
2	5150.00	49.2 AV	54.0	-4.8	1.42 V	255	7.48	41.72
3	*5180.00	113.8 PK			1.42 V	255	72.04	41.76
4	*5180.00	104.1 AV			1.42 V	255	62.34	41.76
5	#10360.00	50.8 PK	68.3	-17.5	1.27 V	31	2.28	48.52
6	15540.00	63.6 PK	74.0	-10.4	1.15 V	60	9.53	54.07
7	15540.00	51.9 AV	54.0	-2.1	1.15 V	60	-2.17	54.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.4 PK			1.29 H	283	65.62	41.78
2	*5200.00	97.6 AV			1.29 H	283	55.82	41.78
3	#10400.00	53.0 PK	68.3	-15.3	1.21 H	36	4.32	48.68
4	15600.00	62.7 PK	74.0	-11.3	1.37 H	69	9.12	53.58
5	15600.00	51.0 AV	54.0	-3.0	1.37 H	69	-2.58	53.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	114.2 PK			1.41 V	254	72.42	41.78
2	*5200.00	104.3 AV			1.41 V	254	62.52	41.78
3	#10400.00	51.0 PK	68.3	-17.3	1.25 V	25	2.32	48.68
4	15600.00	63.5 PK	74.0	-10.5	1.14 V	73	9.92	53.58
5	15600.00	51.9 AV	54.0	-2.1	1.14 V	73	-1.68	53.58



REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.8 PK			1.20 H	272	64.93	41.87
2	*5240.00	97.1 AV			1.20 H	272	55.23	41.87
3	5350.00	57.7 PK	74.0	-16.3	1.24 H	231	15.65	42.09
4	5350.00	46.1 AV	54.0	-7.9	1.24 H	231	4.01	42.09
5	#10480.00	52.5 PK	68.3	-15.8	1.19 H	50	3.88	48.62
6	15720.00	63.3 PK	74.0	-10.7	1.44 H	43	9.44	53.86
7	15720.00	51.3 AV	54.0	-2.7	1.44 H	43	-2.56	53.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.5 PK			1.43 V	259	72.63	41.87
2	*5240.00	104.4 AV			1.43 V	259	62.53	41.87
3	5350.00	57.6 PK	74.0	-16.4	1.02 V	235	15.54	42.09
4	5350.00	46.0 AV	54.0	-8.0	1.02 V	235	3.91	42.09
5	#10480.00	51.1 PK	68.3	-17.2	1.24 V	42	2.48	48.62
6	15720.00	64.1 PK	74.0	-9.9	1.15 V	56	10.24	53.86
7	15720.00	52.4 AV	54.0	-1.6	1.15 V	56	-1.46	53.86

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11a MODE, CH36, HORIZONTAL)

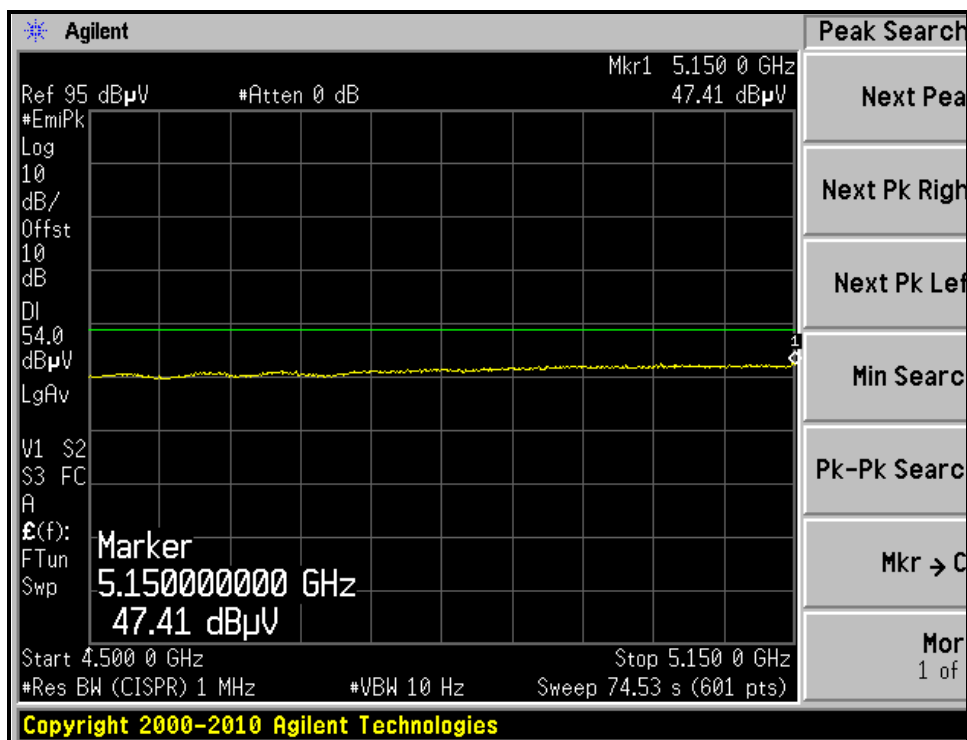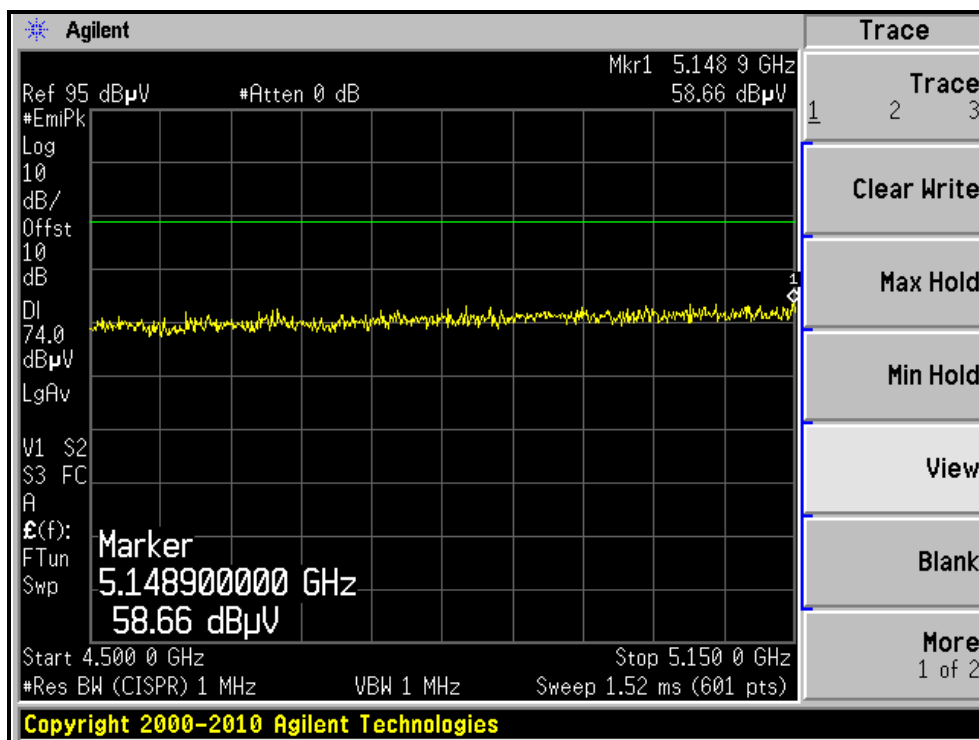



RESTRICTED BANDEDGE (802.11a MODE, CH36, VERTICAL)

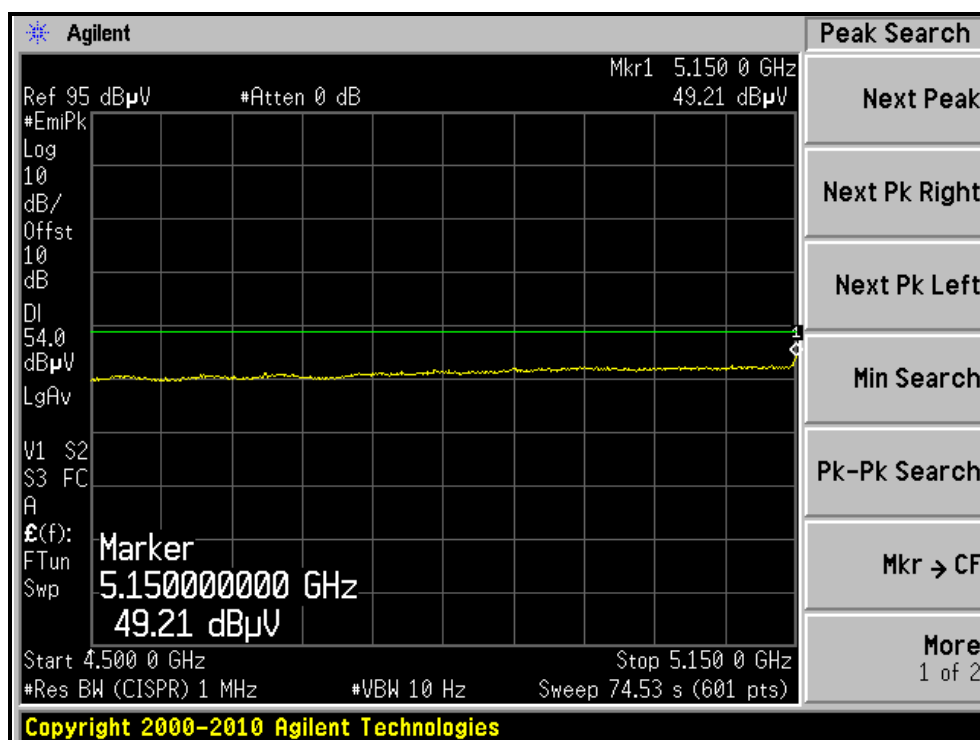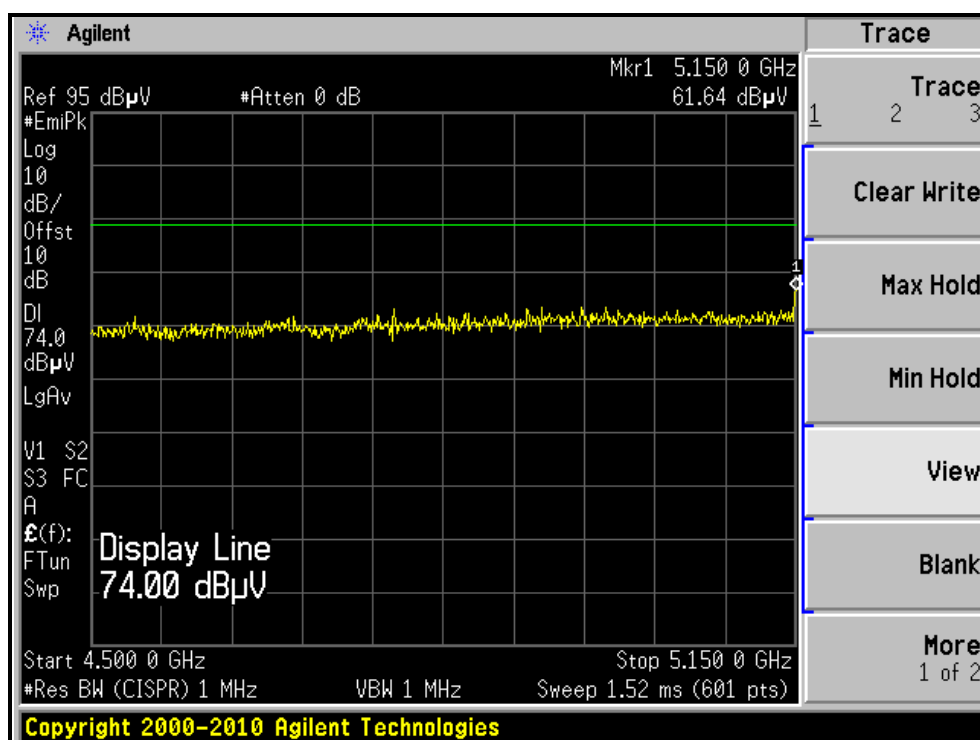

RESTRICTED BANDEDGE (802.11a MODE, CH48, HORIZONTAL)

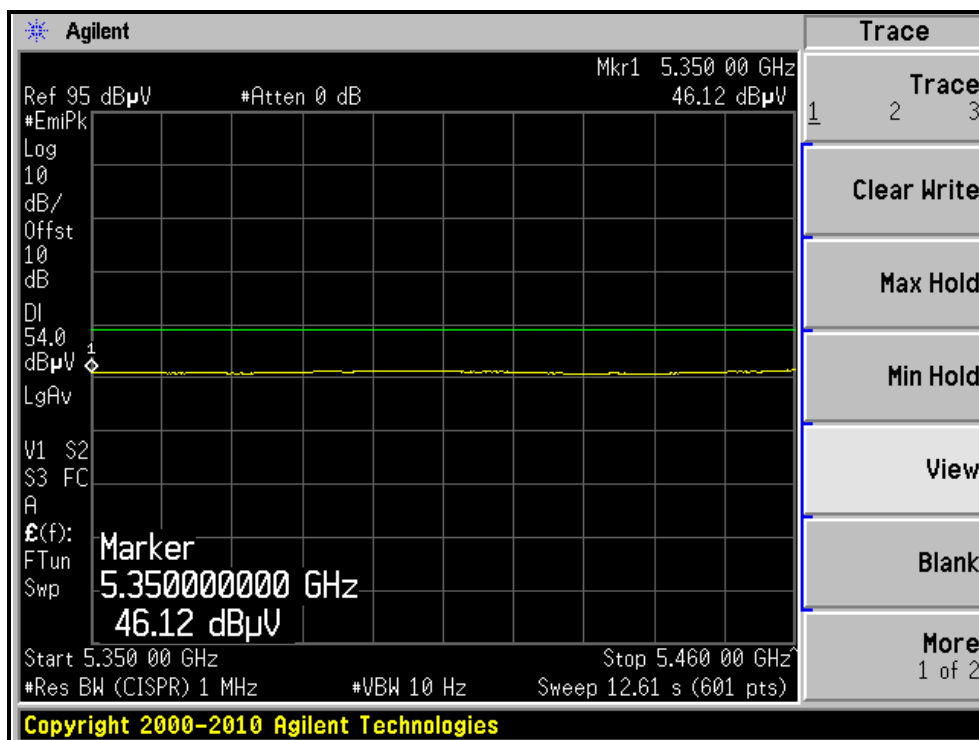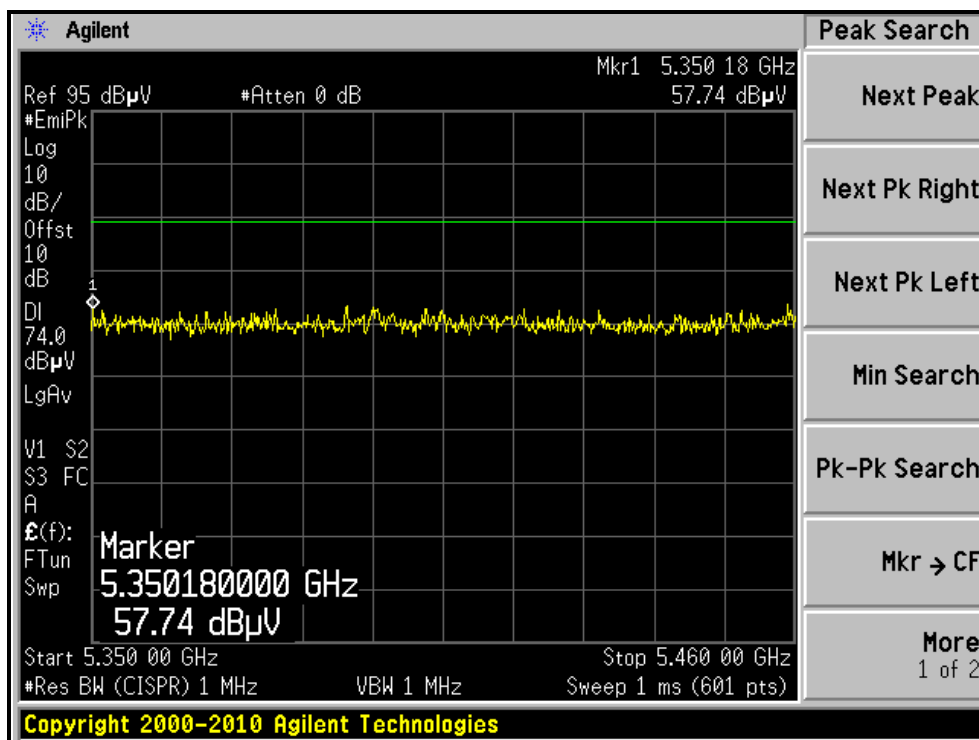

RESTRICTED BANDEDGE (802.11a MODE, CH48, VERTICAL)

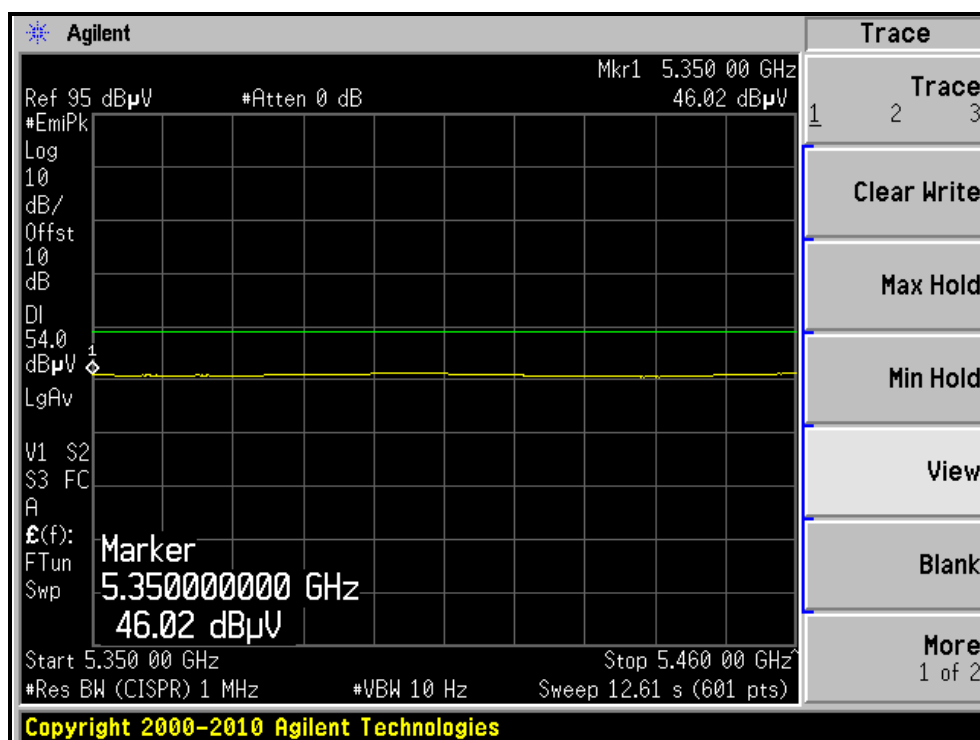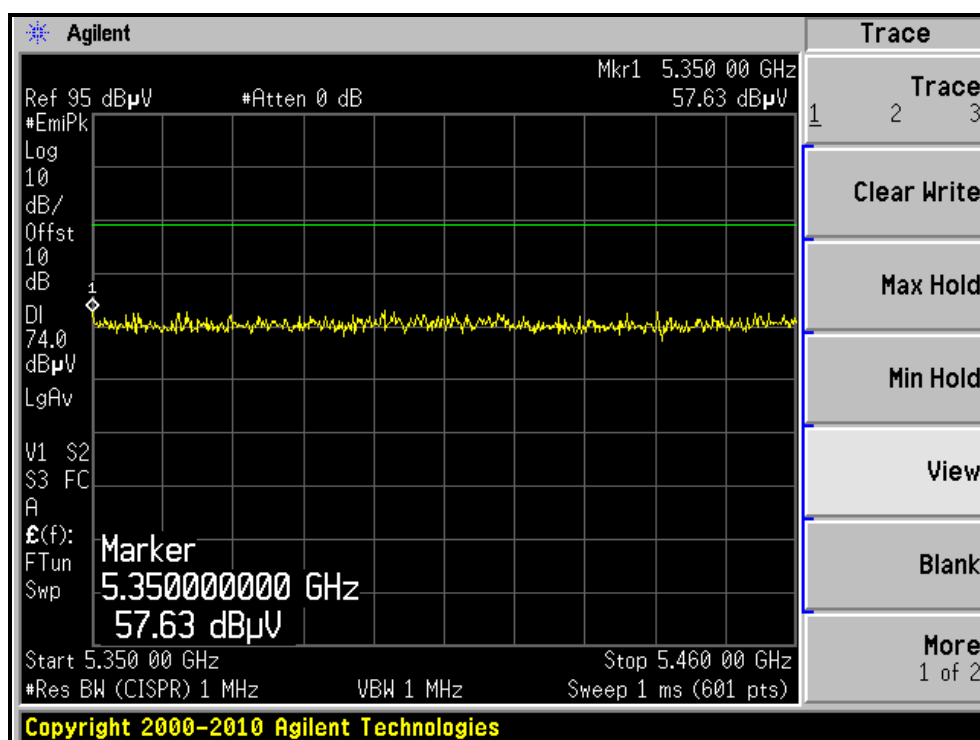

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.53 H	297	16.78	41.72
2	5150.00	46.9 AV	54.0	-7.1	1.53 H	297	5.18	41.72
3	*5180.00	107.1 PK			1.52 H	300	65.34	41.76
4	*5180.00	97.8 AV			1.52 H	300	56.04	41.76
5	#10360.00	52.3 PK	68.3	-16.0	1.35 H	308	3.78	48.52
6	15540.00	62.0 PK	74.0	-12.0	1.25 H	88	7.93	54.07
7	15540.00	50.8 AV	54.0	-3.2	1.25 H	88	-3.27	54.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.35 V	234	17.68	41.72
2	5150.00	47.1 AV	54.0	-6.9	1.35 V	234	5.38	41.72
3	*5180.00	114.5 PK			1.34 V	233	72.74	41.76
4	*5180.00	104.2 AV			1.34 V	233	62.44	41.76
5	#10360.00	50.7 PK	68.3	-17.6	1.47 V	285	2.18	48.52
6	15540.00	64.5 PK	74.0	-9.5	1.35 V	33	10.43	54.07
7	15540.00	52.4 AV	54.0	-1.6	1.35 V	33	-1.67	54.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.4 PK			1.53 H	306	63.62	41.78
2	*5200.00	96.4 AV			1.53 H	306	54.62	41.78
3	#10400.00	52.3 PK	68.3	-16.0	1.31 H	323	3.62	48.68
4	15600.00	61.1 PK	74.0	-12.9	1.25 H	95	7.52	53.58
5	15600.00	50.3 AV	54.0	-3.7	1.25 H	95	-3.28	53.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	113.8 PK			1.36 V	234	72.02	41.78
2	*5200.00	103.9 AV			1.36 V	234	62.12	41.78
3	#10400.00	50.9 PK	68.3	-17.4	1.46 V	286	2.22	48.68
4	15600.00	64.8 PK	74.0	-9.2	1.40 V	22	11.22	53.58
5	15600.00	52.3 AV	54.0	-1.7	1.40 V	22	-1.28	53.58



- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.9 PK			1.52 H	303	65.03	41.87
2	*5240.00	97.4 AV			1.52 H	303	55.53	41.87
3	5350.00	57.9 PK	74.0	-16.1	1.12 H	142	15.81	42.09
4	5350.00	46.0 AV	54.0	-8.0	1.12 H	142	3.94	42.09
5	#10480.00	52.8 PK	68.3	-15.5	1.26 H	311	4.18	48.62
6	15720.00	61.4 PK	74.0	-12.6	1.21 H	77	7.54	53.86
7	15720.00	50.3 AV	54.0	-3.7	1.21 H	77	-3.56	53.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	113.3 PK			1.35 V	234	71.43	41.87
2	*5240.00	104.2 AV			1.35 V	234	62.33	41.87
3	5350.00	56.3 PK	74.0	-17.7	1.24 V	220	14.18	42.09
4	5350.00	46.1 AV	54.0	-7.9	1.24 V	220	4.04	42.09
5	#10480.00	50.1 PK	68.3	-18.2	1.44 V	284	1.48	48.62
6	15720.00	64.9 PK	74.0	-9.1	1.36 V	37	11.04	53.86
7	15720.00	52.4 AV	54.0	-1.6	1.36 V	37	-1.46	53.86

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, HORIZONTAL)

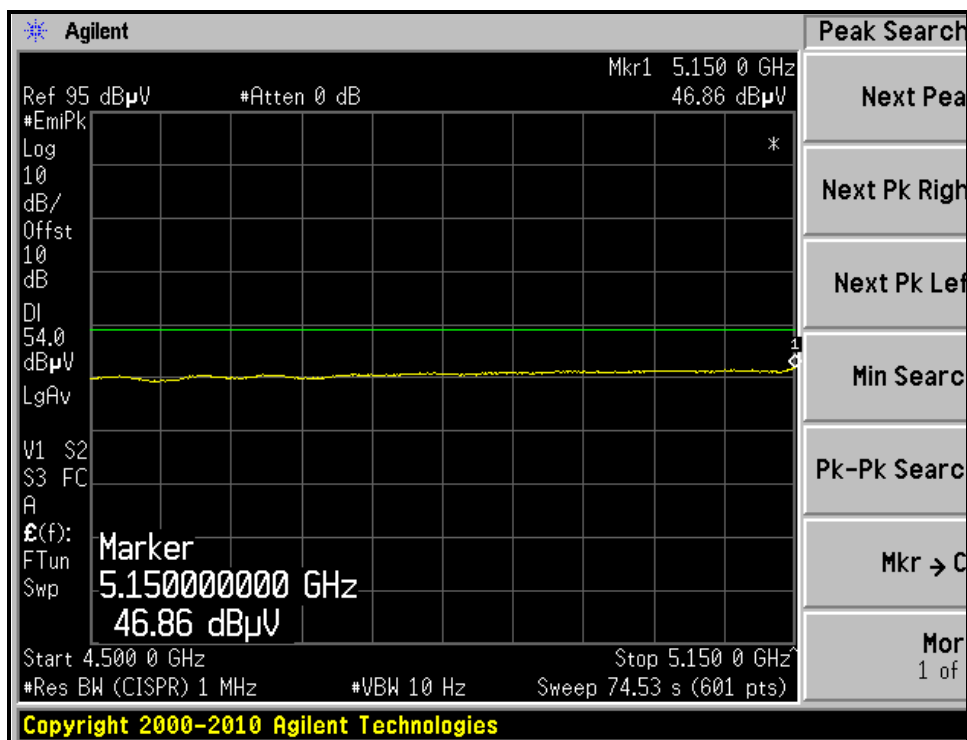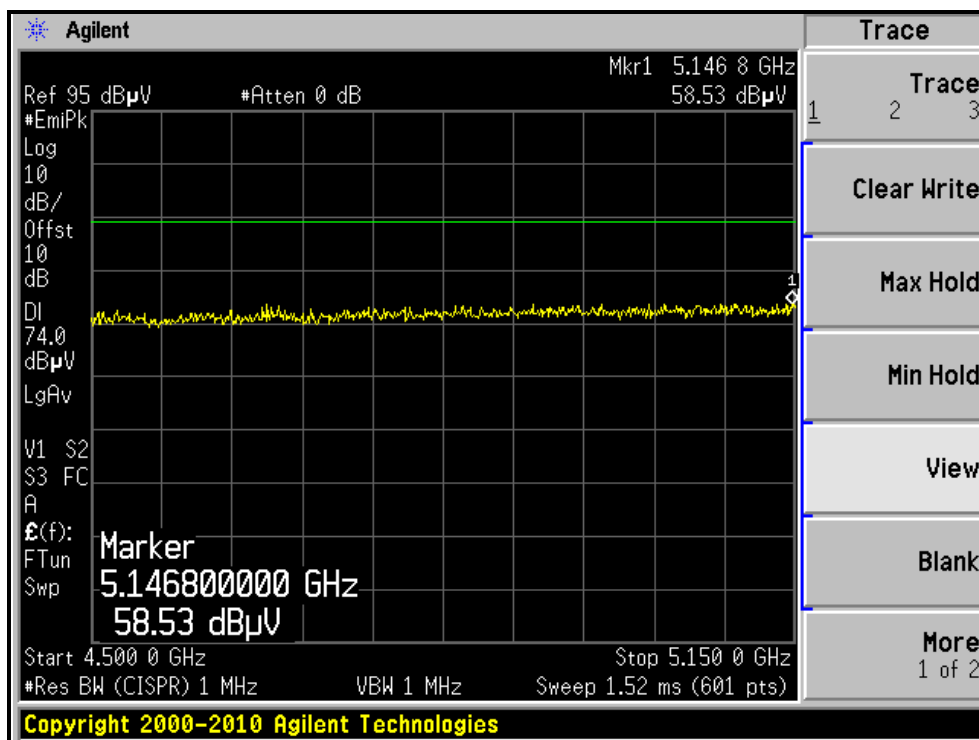



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, VERTICAL)

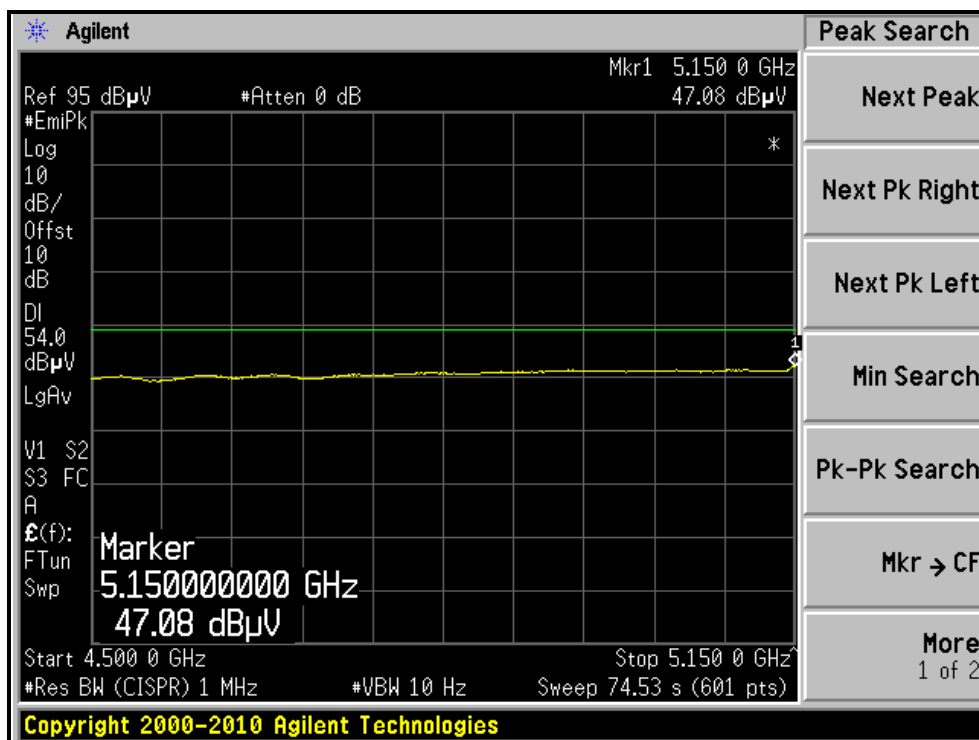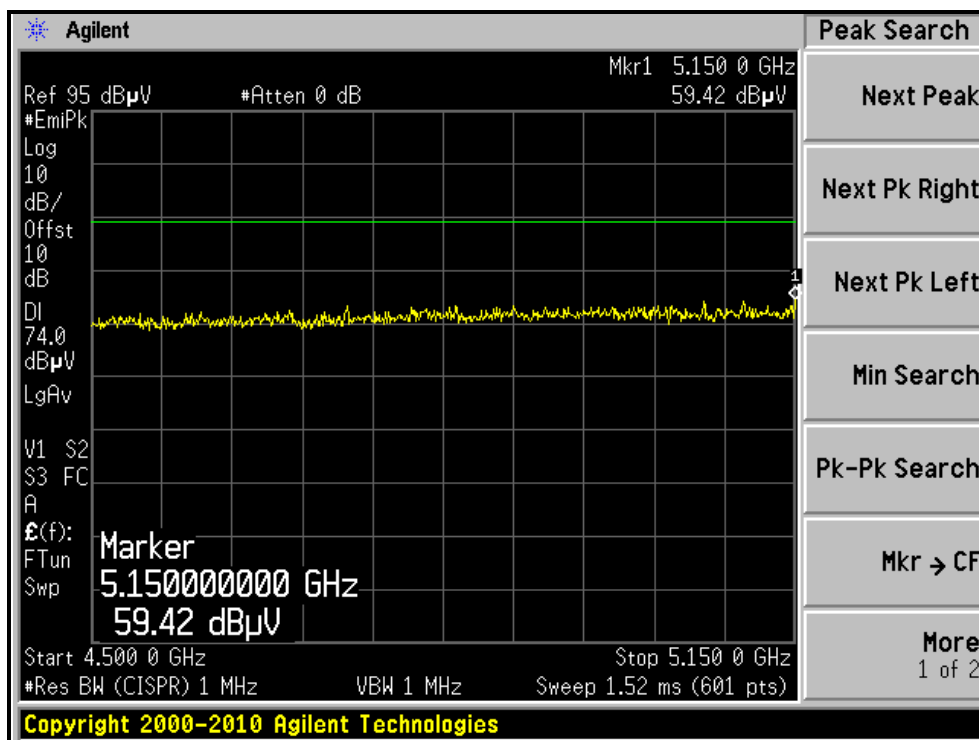

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, HORIZONTAL)

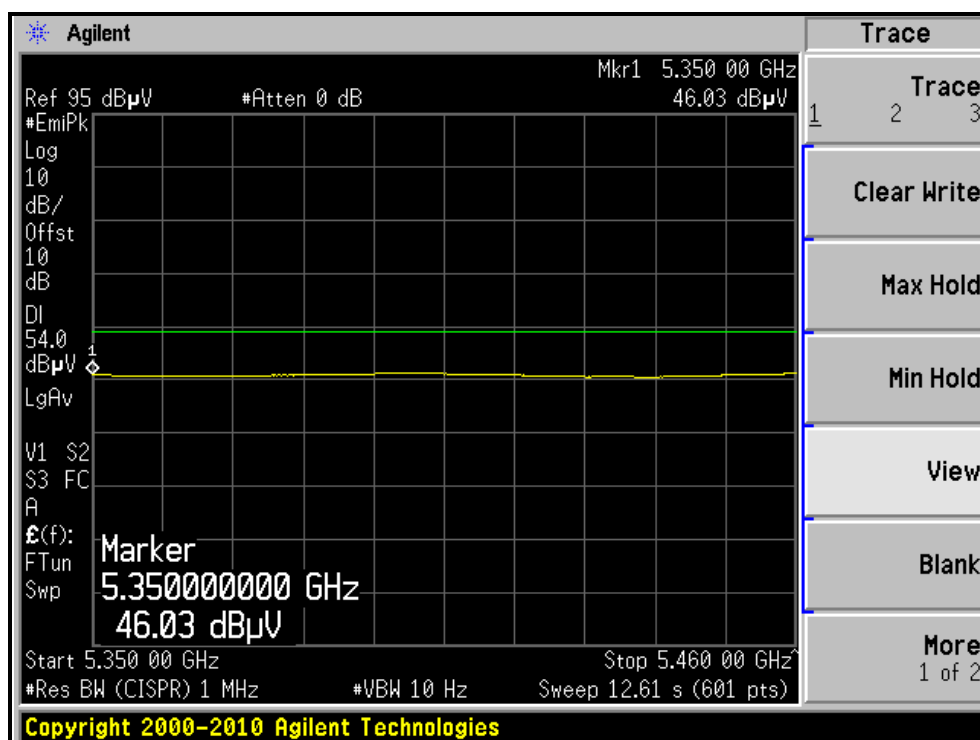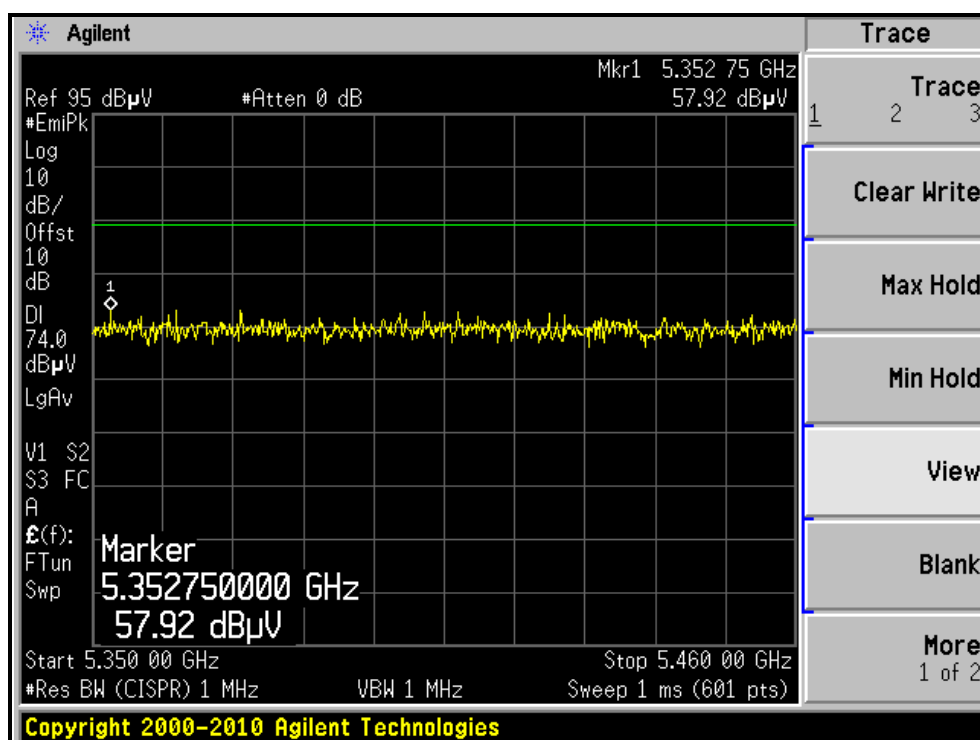

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, VERTICAL)

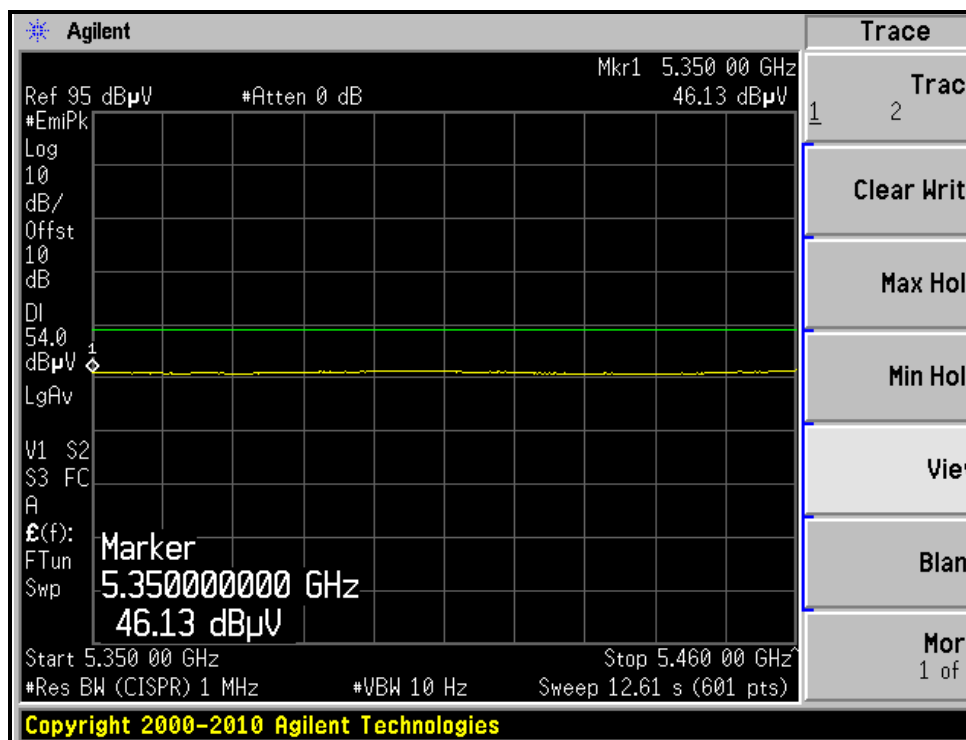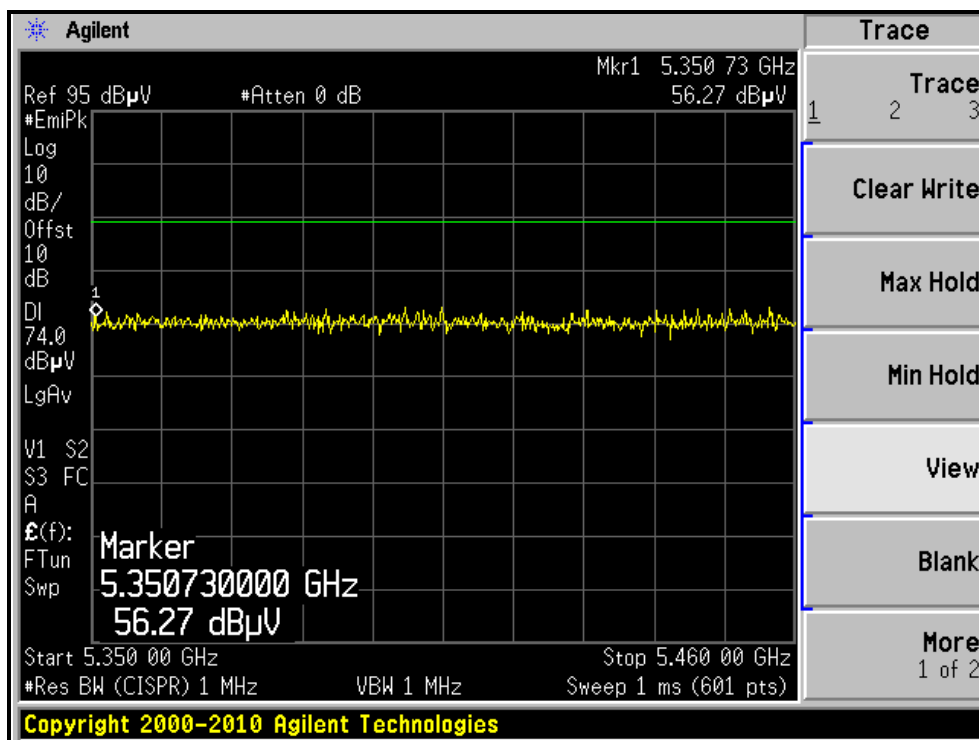

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	1.56 H	300	17.98	41.72
2	5150.00	48.6 AV	54.0	-5.4	1.56 H	300	6.88	41.72
3	*5190.00	100.8 PK			1.55 H	299	59.03	41.77
4	*5190.00	91.1 AV			1.55 H	299	49.33	41.77
5	#10380.00	52.5 PK	68.3	-15.8	1.24 H	318	3.90	48.60
6	15570.00	63.3 PK	74.0	-10.7	1.14 H	67	9.48	53.82
7	15570.00	51.9 AV	54.0	-2.1	1.14 H	67	-1.92	53.82
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	1.38 V	320	22.08	41.72
2	5150.00	53.3 AV	54.0	-0.7	1.38 V	320	11.58	41.72
3	*5190.00	108.0 PK			1.39 V	319	66.23	41.77
4	*5190.00	98.9 AV			1.39 V	319	57.13	41.77
5	#10380.00	50.2 PK	68.3	-18.1	1.51 V	269	1.60	48.60
6	15570.00	65.6 PK	74.0	-8.4	1.39 V	42	11.78	53.82
7	15570.00	53.1 AV	54.0	-0.9	1.39 V	42	-0.72	53.82



REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	104.7 PK			1.53 H	304	62.85	41.85
2	*5230.00	95.2 AV			1.53 H	304	53.35	41.85
3	5350.00	58.0 PK	74.0	-16.0	1.14 H	124	15.94	42.09
4	5350.00	46.0 AV	54.0	-8.0	1.14 H	124	3.93	42.09
5	#10460.00	53.1 PK	68.3	-15.2	1.24 H	312	4.47	48.63
6	15690.00	63.3 PK	74.0	-10.7	1.24 H	41	9.49	53.81
7	15690.00	51.5 AV	54.0	-2.5	1.24 H	41	-2.31	53.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	111.0 PK			1.33 V	320	69.15	41.85
2	*5230.00	101.9 AV			1.33 V	320	60.05	41.85
3	5350.00	57.8 PK	74.0	-16.2	1.14 V	321	15.71	42.09
4	5350.00	46.0 AV	54.0	-8.0	1.14 V	321	3.91	42.09
5	#10460.00	49.9 PK	68.3	-18.4	1.47 V	278	1.27	48.63
6	15690.00	64.4 PK	74.0	-9.6	1.09 V	125	10.59	53.81
7	15690.00	52.5 AV	54.0	-1.5	1.09 V	125	-1.31	53.81

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH38, HORIZONTAL)

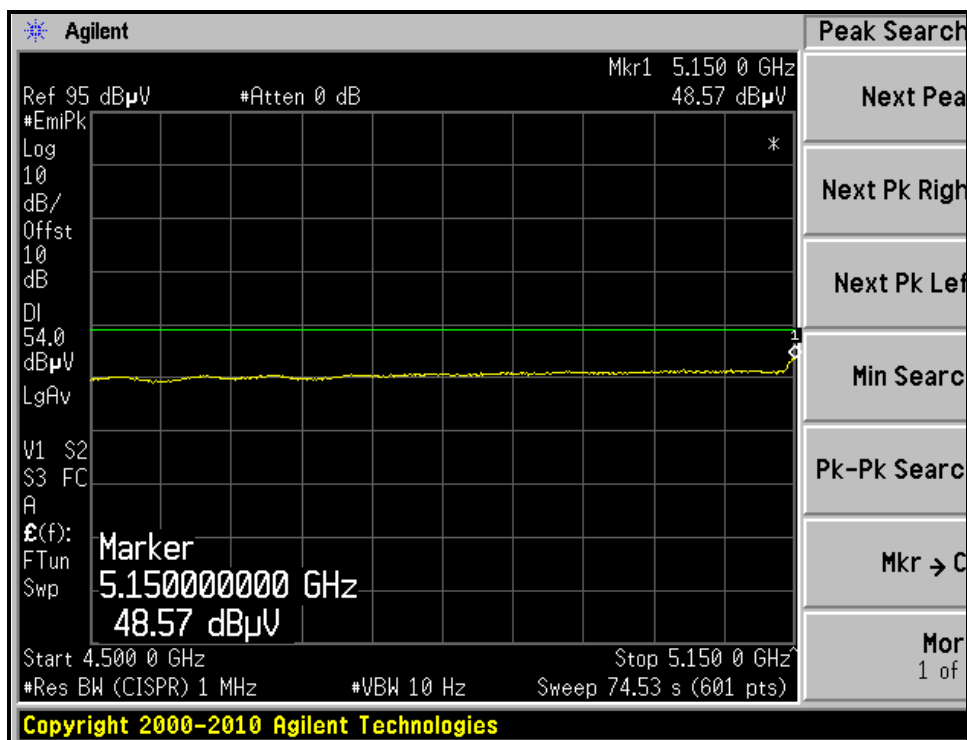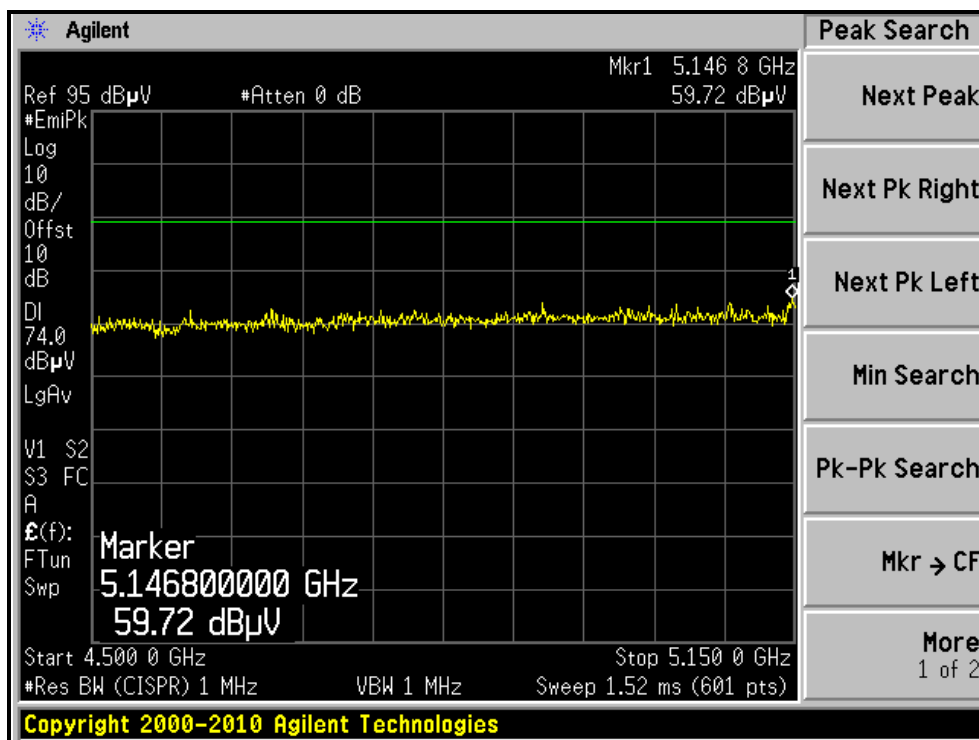



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH38, VERTICAL)

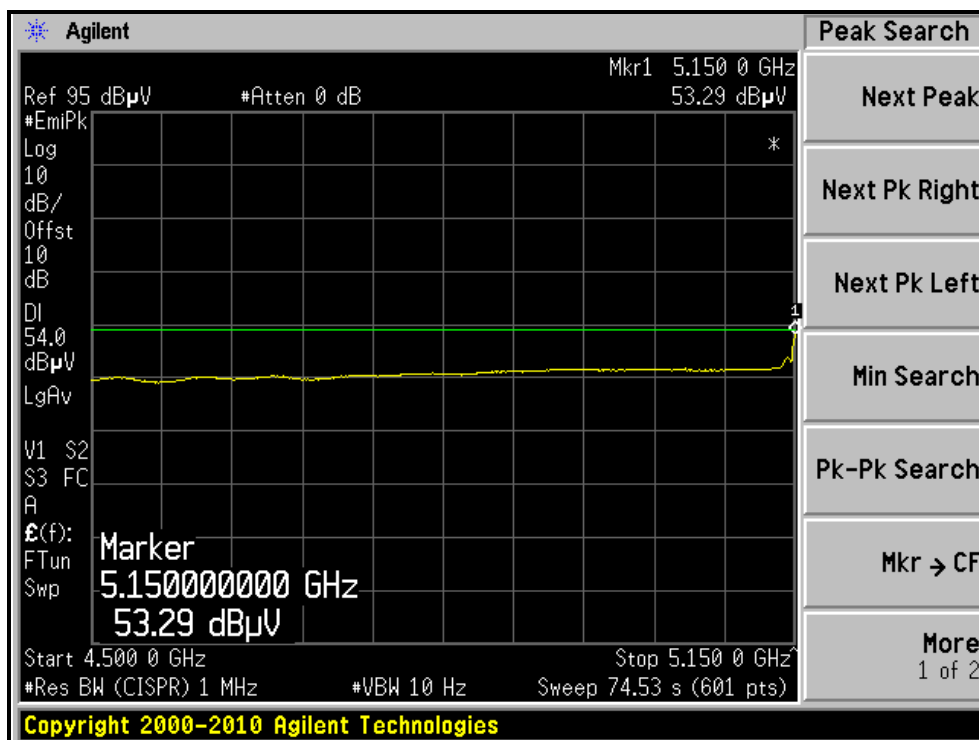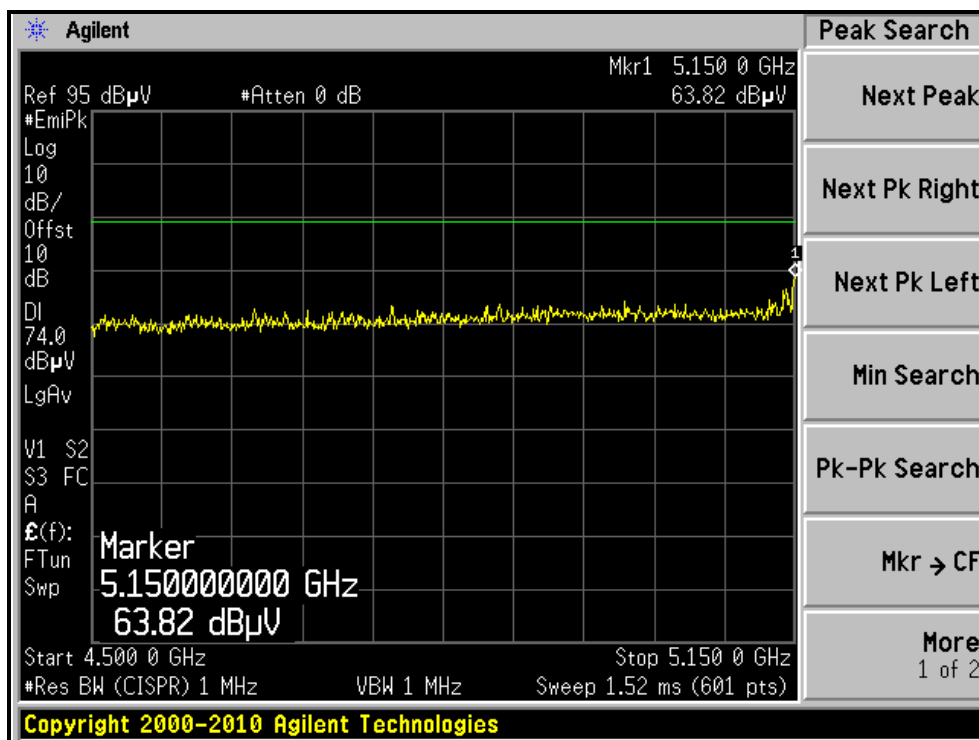

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, HORIZONTAL)

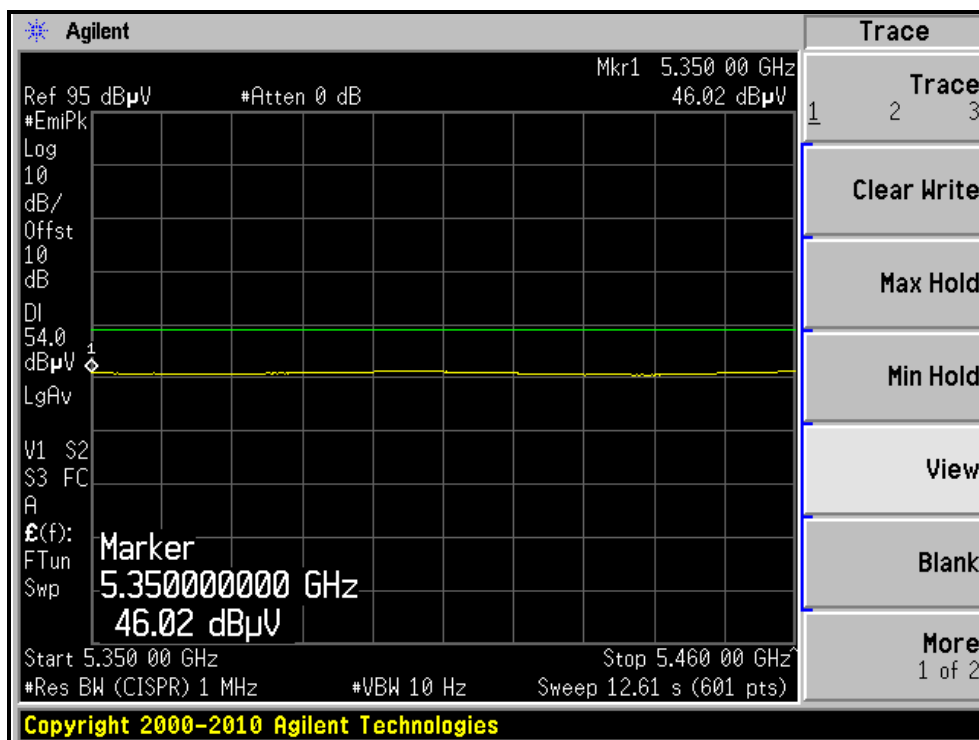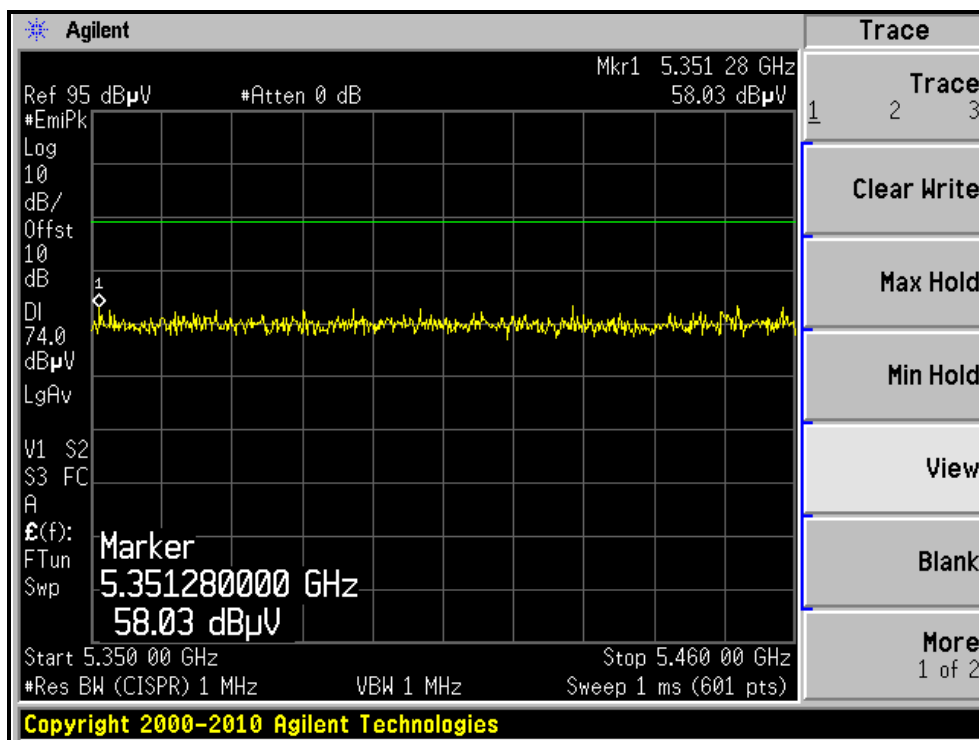

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, VERTICAL)

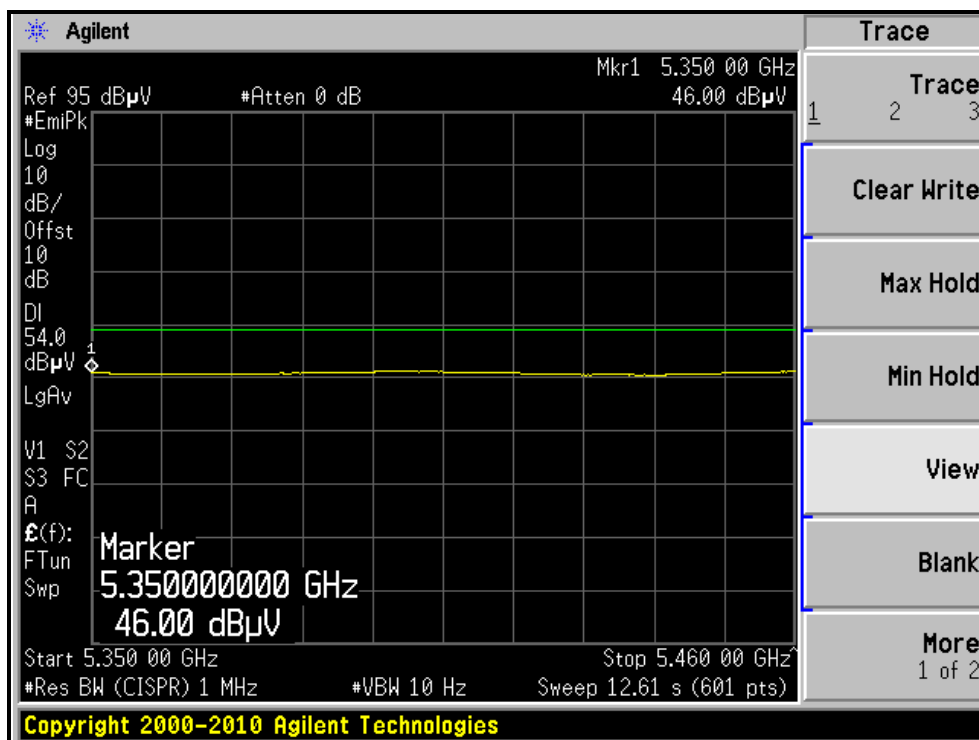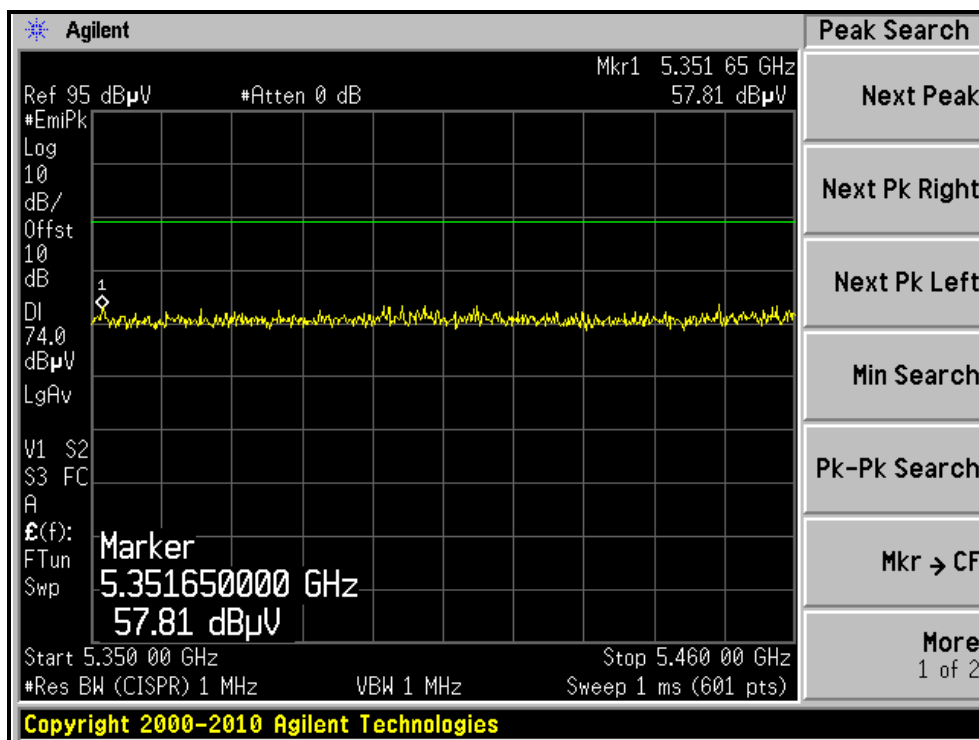

4.3 OUTPUT TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF OUTPUT TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 3MHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

802.11a OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (dBm)			TOTAL OUTPUT POWER (mW)	TOTAL OUTPUT POWER (dBm)	OUTPUT POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)				
36	5180	8.9	7.2	7.7	18.9	12.8	15.6	PASS
40	5200	9.0	6.8	8.3	19.5	12.9	15.6	PASS
48	5240	8.8	6.7	8.4	19.2	12.8	15.6	PASS

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$


Effective Legacy Gain (dBi) = 7.4

The effective legacy gain is 7.4dBi, therefore the limit needs to reduce.


CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		
		CHAIN(0)	CHAIN(1)	CHAIN(2)
36	5180	22.02	21.70	21.09
40	5200	22.41	21.55	22.84
48	5240	22.47	21.61	22.14

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Power Output: For CHAIN(0) CH40

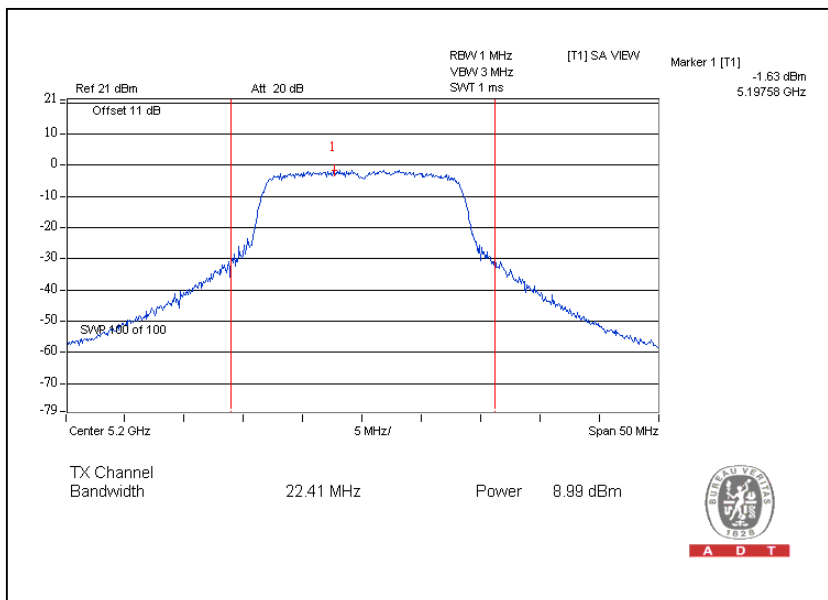

26dB Occupied Bandwidth: CH40

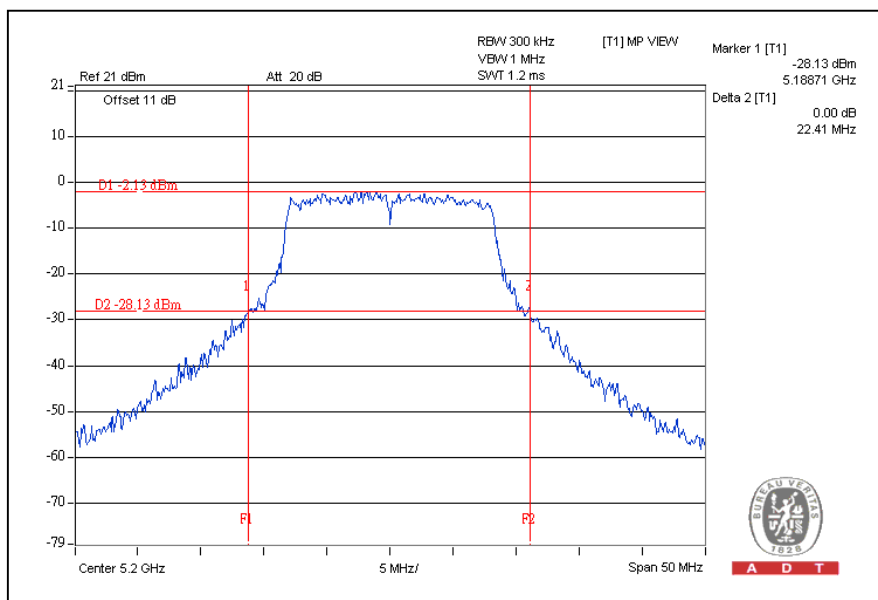


802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (dBm)			TOTAL OUTPUT POWER (mW)	TOTAL OUTPUT POWER (dBm)	OUTPUT POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)				
36	5180	10.5	8.3	9.3	26.5	14.2	17	PASS
40	5200	10.1	8.4	9.7	26.5	14.2	17	PASS
48	5240	10.6	8.8	9.8	28.6	14.6	17	PASS


CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		
		CHAIN(0)	CHAIN(1)	CHAIN(2)
36	5180	23.39	23.92	22.91
40	5200	22.48	23.38	24.67
48	5240	23.20	23.74	23.07

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Power Output: For CHAIN(0) CH48

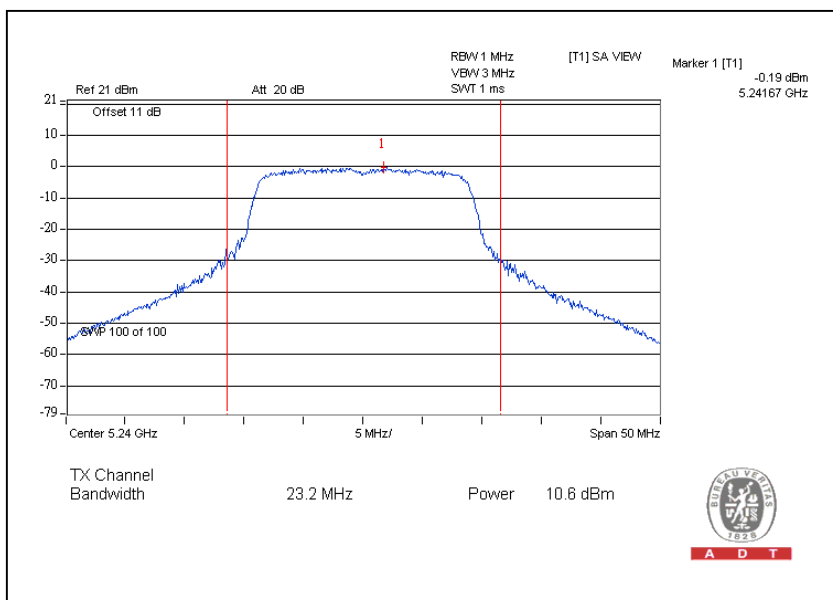

26dB Occupied Bandwidth: CH48

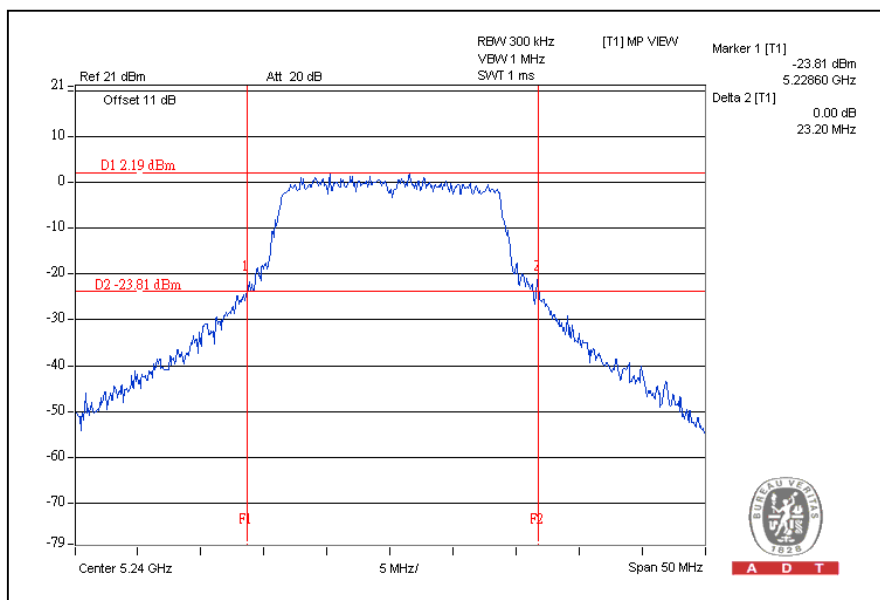


802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (dBm)			TOTAL OUTPUT POWER (mW)	TOTAL OUTPUT POWER (dBm)	OUTPUT POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)				
38	5190	10.6	8.8	9.7	28.4	14.5	17	PASS
46	5230	10.6	8.7	10.1	29.1	14.6	17	PASS


CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		
		CHAIN(0)	CHAIN(1)	CHAIN(2)
38	5190	44.63	42.09	42.54
46	5230	44.13	44.18	44.15

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Power Output: For CHAIN(0) CH46

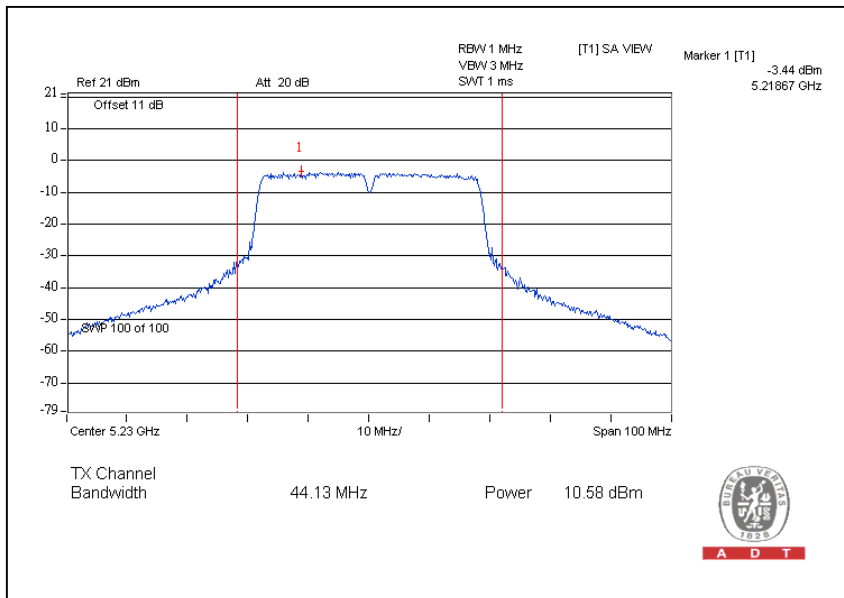

26dB Occupied Bandwidth: CH46

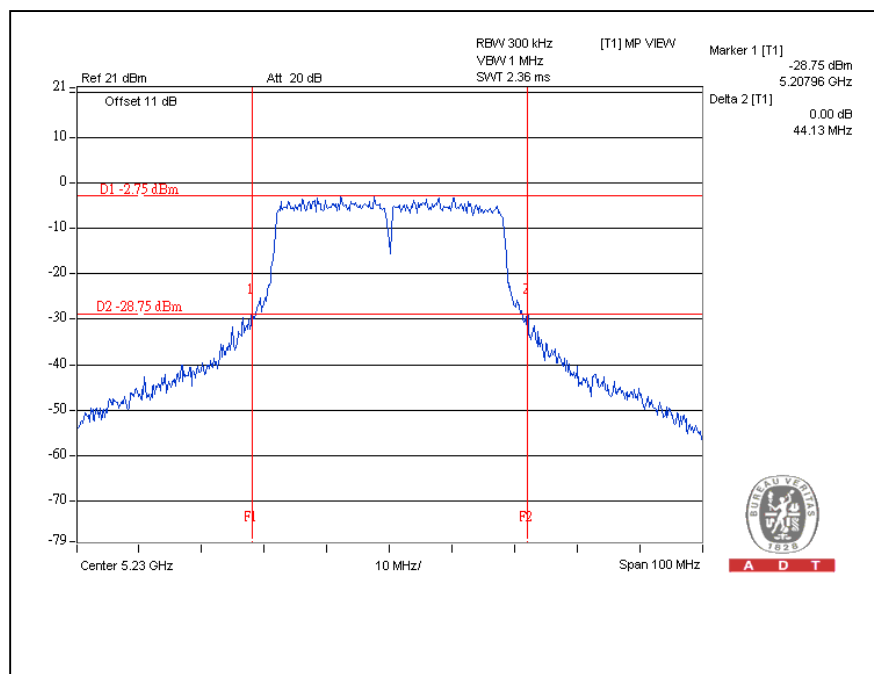

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. Connect the cable from the spectrum analyzer to the EUT antenna port using an appropriate RF attenuator.
2. Verify the antenna port selected is the active one if the system has more than one antenna.
3. Verify the unlicensed wireless device is set to operate at 100 % duty cycle at the maximum allowed power for operation.
4. Testing shall be done on the center frequency of each U-NII band.
5. Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be 13 dB for all frequencies across the emission bandwidth.
 - a. First trace: set RBW = 1 MHz, VBW = 3 MHz with peak detector and max hold settings.
 - b. Second trace: set RBW = 1 MHz, VBW = 3 MHz with sample detector and trace average across 100 traces in power averaging mode.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS

802.11a OFDM MODULATION

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)		
36	5180	8.8	10.8	10.4	13	PASS
40	5200	8.5	10.0	10.1	13	PASS
48	5240	8.1	9.7	9.8	13	PASS


For CHAIN(1)
CH36

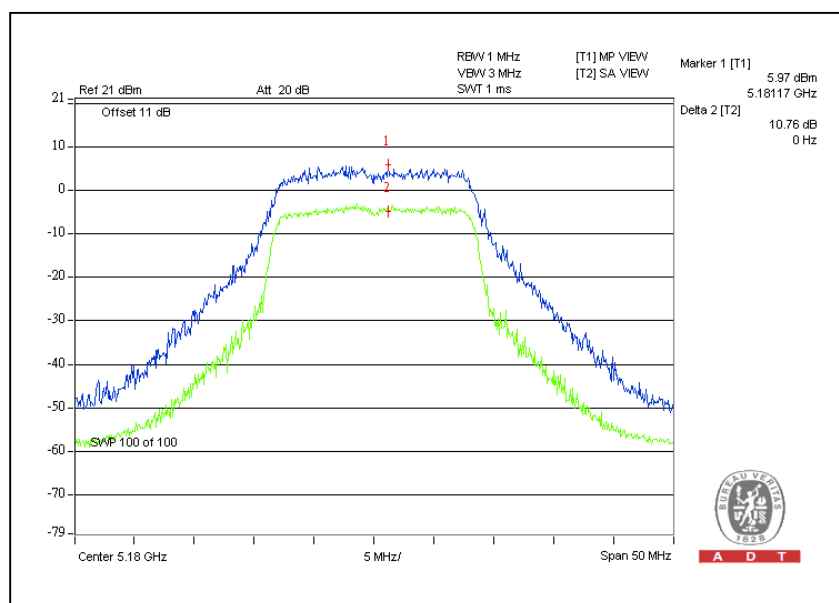

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)		
36	5180	9.8	10.1	8.7	13	PASS
40	5200	8.1	9.5	9.6	13	PASS
48	5240	8.5	9.2	10.3	13	PASS

For CHAIN(2)
CH48

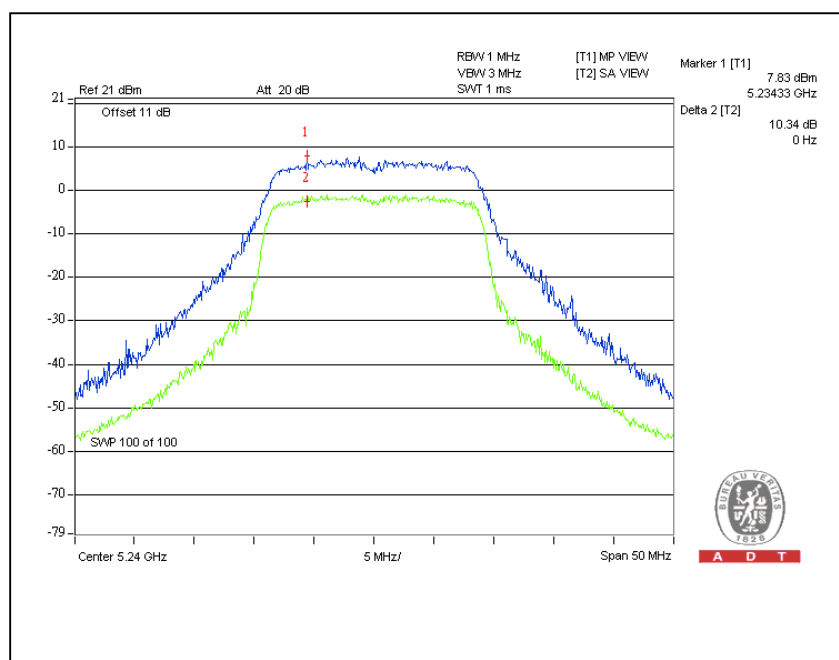

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)		
38	5190	8.7	9.1	9.7	13	PASS
46	5230	8.4	8.9	9.6	13	PASS

Ref 21 dBm
Alt 20 dB
Offset 11 dB
RBW 1 MHz
VBW 3 MHz
SVT 1 ms
[T1] MP VIEW
[T2] SA VIEW
Marker 1 [T1] 4.27 dBm
5.17900 GHz
Delta 2 [T2] 9.67 dB
0 Hz
SWP 100 of 100
Center 5.19 GHz
10 MHz/
Span 100 MHz
A D T

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

4.5.7 TEST RESULTS

802.11a OFDM MODULATION

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)			
36	5180	-1.8	-3.3	-3.2	2.1	2.6	PASS
40	5200	-1.6	-3.7	-2.2	2.4	2.6	PASS
48	5240	-1.8	-4.1	-2.3	2.1	2.6	PASS


Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$

Effective Legacy Gain (dBi) = 7.4

The effective legacy gain is 7.4dBi, therefore the limit needs to reduce.

For CHAIN(0)


CH40

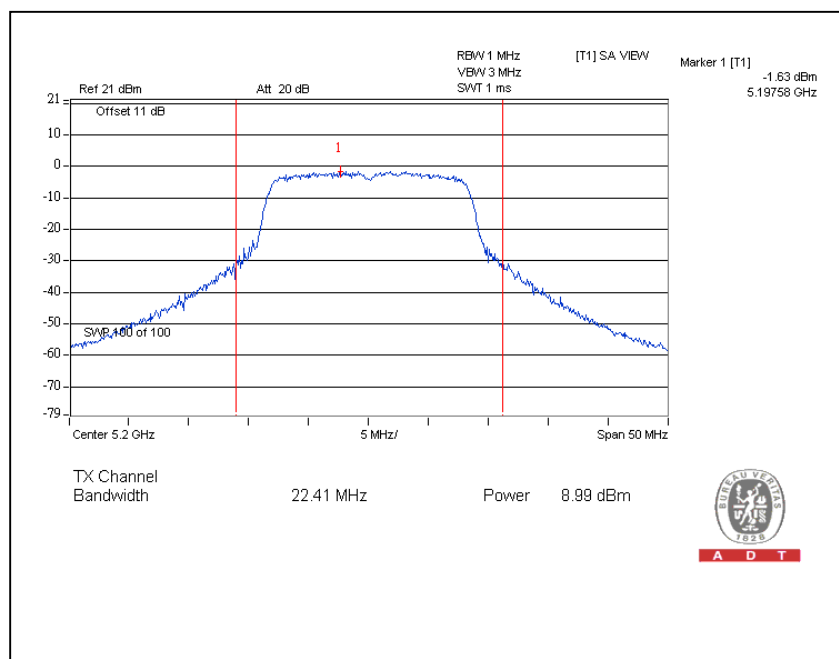

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)			
36	5180	-0.4	-2.8	-1.7	3.2	4	PASS
40	5200	-0.6	-2.3	-1.1	3.5	4	PASS
48	5240	-0.2	-2.4	-1.3	3.6	4	PASS


For CHAIN(0)
CH48

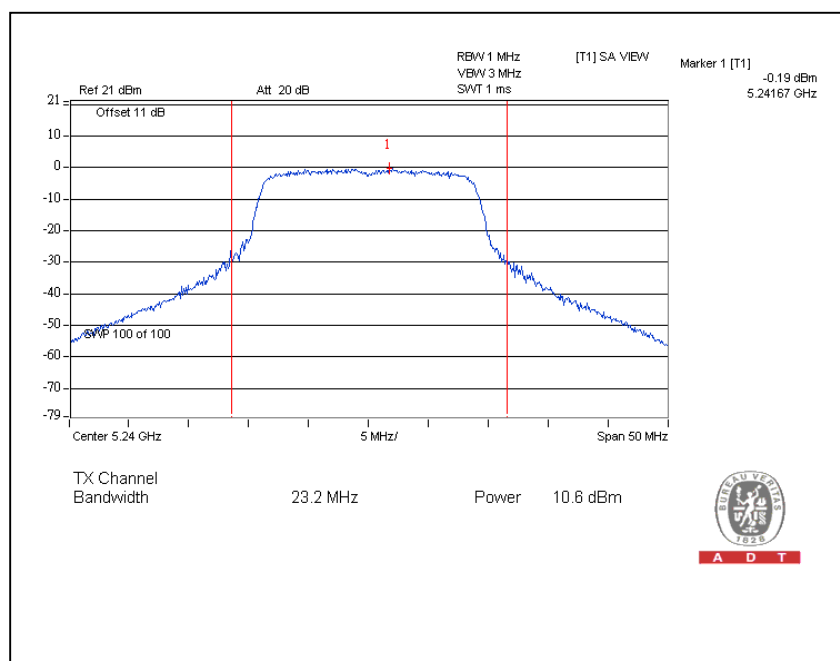

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)			TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(2)			
38	5190	-3.3	-4.5	-4.5	0.7	4	PASS
46	5230	-3.4	-5.1	-4.0	0.7	4	PASS

For CHAIN(0)
CH38

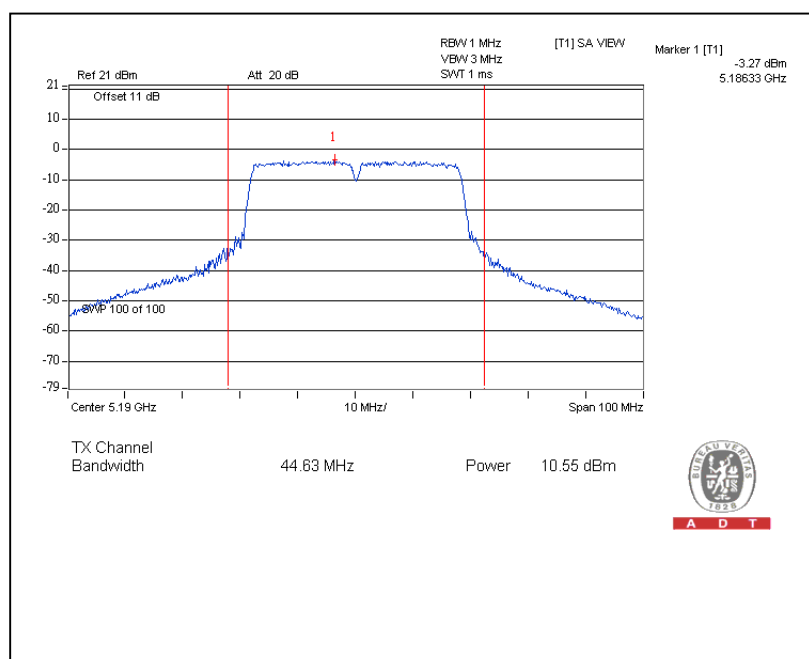

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within the band of the operating frequency over a temperature variation of –30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

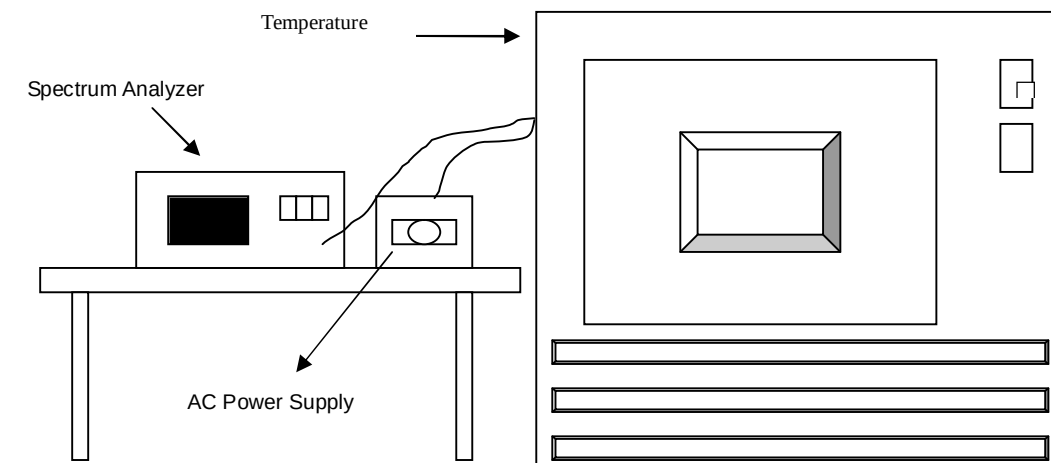

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.6.7 TEST RESULTS

Operating frequency: 5180MHz									
Temp. (°C)	Power supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(ppm)	(MHz)	(ppm)	(MHz)	(ppm)	(MHz)	(ppm)
50	138	5180.0199	3.8417	5180.0232	4.4788	5180.0214	4.1313	5180.0187	3.6100
	120	5180.0184	3.5521	5180.024	4.6332	5180.0214	4.1313	5180.0184	3.5521
	102	5180.0195	3.7645	5180.0228	4.4015	5180.0231	4.4595	5180.0191	3.6873
40	138	5179.9836	-3.1660	5179.9869	-2.5290	5179.9907	-1.7954	5179.9882	-2.2780
	120	5179.9823	-3.4170	5179.9856	-2.7799	5179.9898	-1.9691	5179.9886	-2.2008
	102	5179.9825	-3.3784	5179.9854	-2.8185	5179.9911	-1.7181	5179.9878	-2.3552
30	138	5180.0054	1.0425	5180.0036	0.6950	5180.0035	0.6757	5180.0036	0.6950
	120	5180.0051	0.9846	5180.0045	0.8687	5180.0041	0.7915	5180.0031	0.5985
	102	5180.0054	1.0425	5180.004	0.7722	5180.0049	0.9459	5180.0029	0.5598
20	138	5180.0139	2.6834	5180.0157	3.0309	5180.0172	3.3205	5180.0173	3.3398
	120	5180.0148	2.8571	5180.0168	3.2432	5180.0174	3.3591	5180.0171	3.3012
	102	5180.0151	2.9151	5180.0164	3.1660	5180.0177	3.4170	5180.0162	3.1274
10	138	5179.9946	-1.0425	5179.9941	-1.1390	5179.9939	-1.1776	5179.9928	-1.3900
	120	5179.9953	-0.9073	5179.9948	-1.0039	5179.9954	-0.8880	5179.9925	-1.4479
	102	5179.9948	-1.0039	5179.9943	-1.1004	5179.9941	-1.1390	5179.9936	-1.2355
0	138	5180.0159	3.0695	5180.0194	3.7452	5180.0191	3.6873	5180.016	3.0888
	120	5180.0172	3.3205	5180.0184	3.5521	5180.0192	3.7066	5180.0175	3.3784
	102	5180.0155	2.9923	5180.0197	3.8031	5180.0185	3.5714	5180.016	3.0888
-10	138	5179.9824	-3.3977	5179.9881	-2.2973	5179.9905	-1.8340	5179.993	-1.3514
	120	5179.9827	-3.3398	5179.987	-2.5097	5179.9914	-1.6602	5179.9926	-1.4286
	102	5179.9833	-3.2239	5179.9876	-2.3938	5179.9916	-1.6216	5179.9929	-1.3707
-20	138	5180.008	1.5444	5180.0084	1.6216	5180.0057	1.1004	5180.0048	0.9266
	120	5180.0081	1.5637	5180.0084	1.6216	5180.0054	1.0425	5180.0048	0.9266
	102	5180.0086	1.6602	5180.0089	1.7181	5180.0059	1.1390	5180.0046	0.8880
-30	138	5179.9971	-0.5598	5180.0003	0.0579	5179.9975	-0.4826	5180.0024	0.4633
	120	5179.9961	-0.7529	5179.9996	-0.0772	5179.9978	-0.4247	5180.0026	0.5019
	102	5179.9968	-0.6178	5180.0004	0.0772	5179.9984	-0.3089	5180.0024	0.4633



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 TEST INSTRUMENTS

Test date: Oct. 07, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 1MHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges were measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS



For 5.15 to 5.25GHz band:

The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.



Performing measurements: Measure and add 10 log(N) dB

802.11a OFDM modulation

CH36

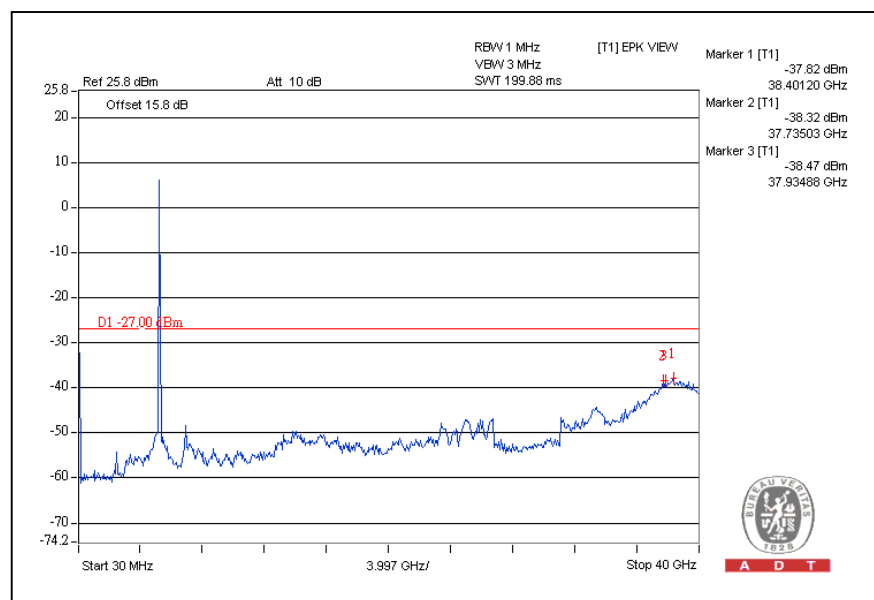
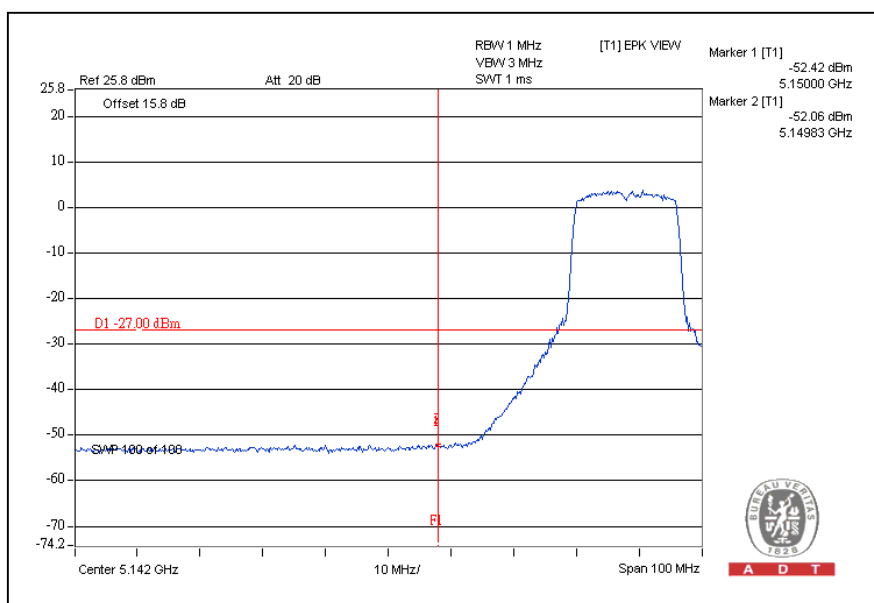


CH48

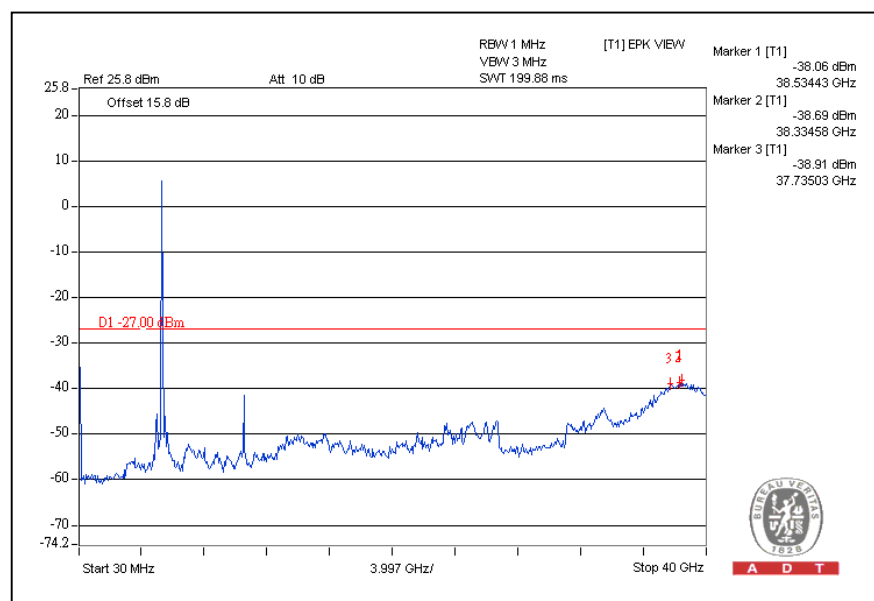
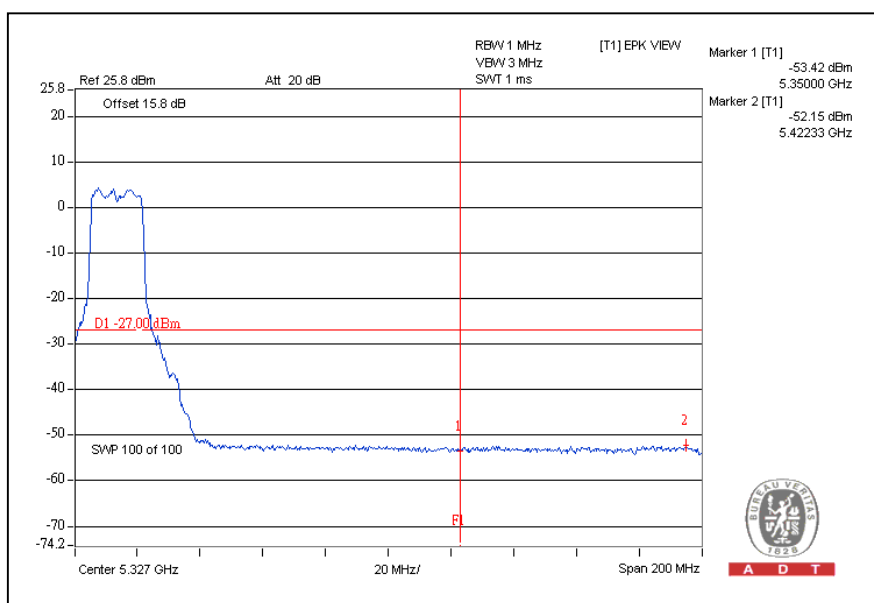


802.11n (20MHz) OFDM MODULATION:

CH36

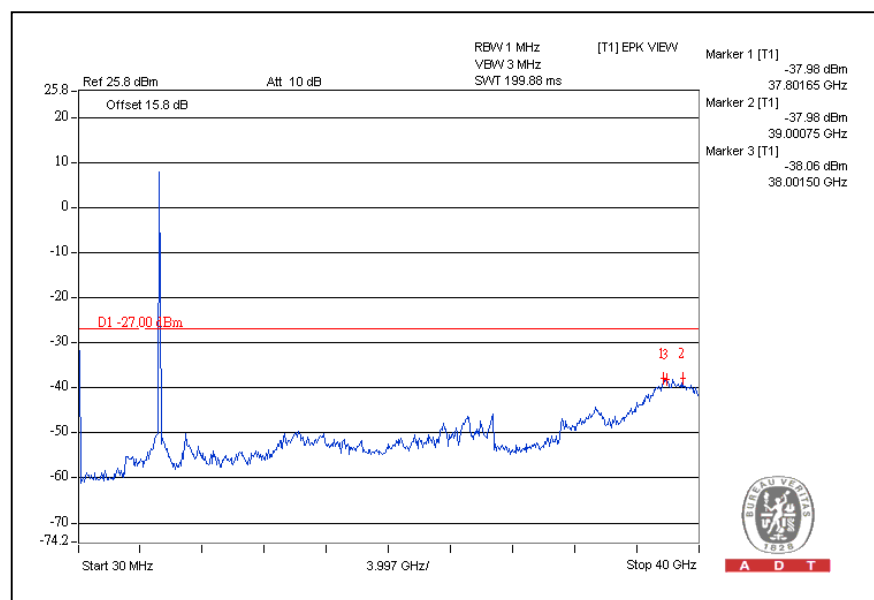
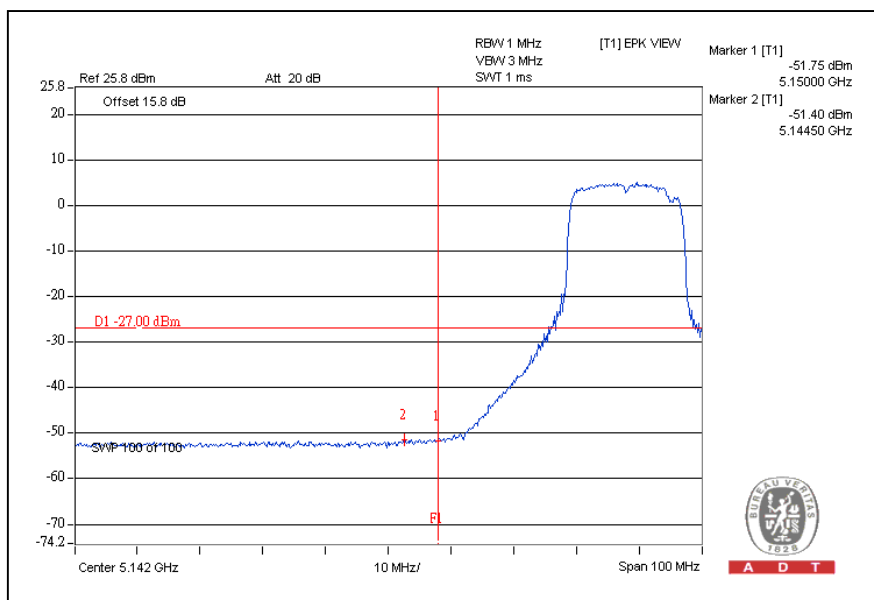


CH48

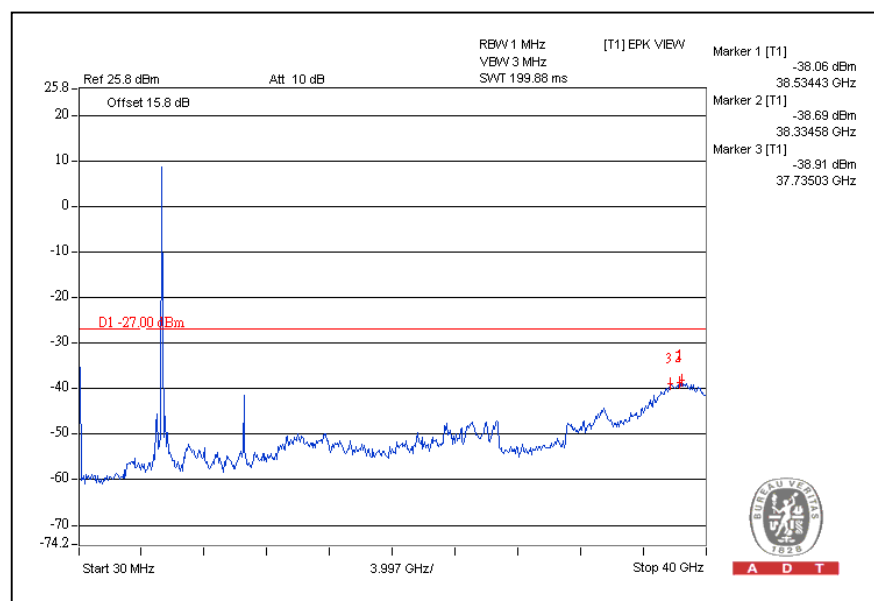
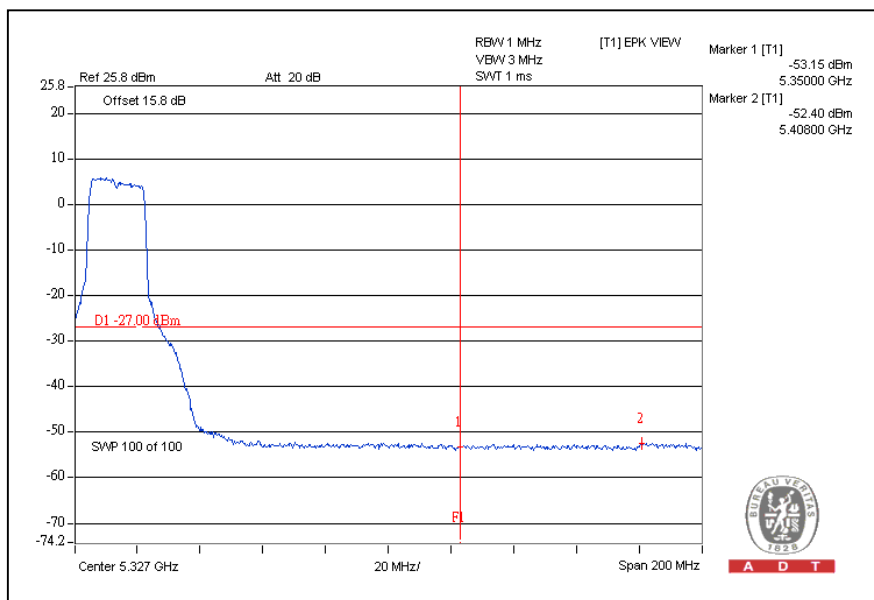


802.11n (40MHz) OFDM MODULATION:

CH38

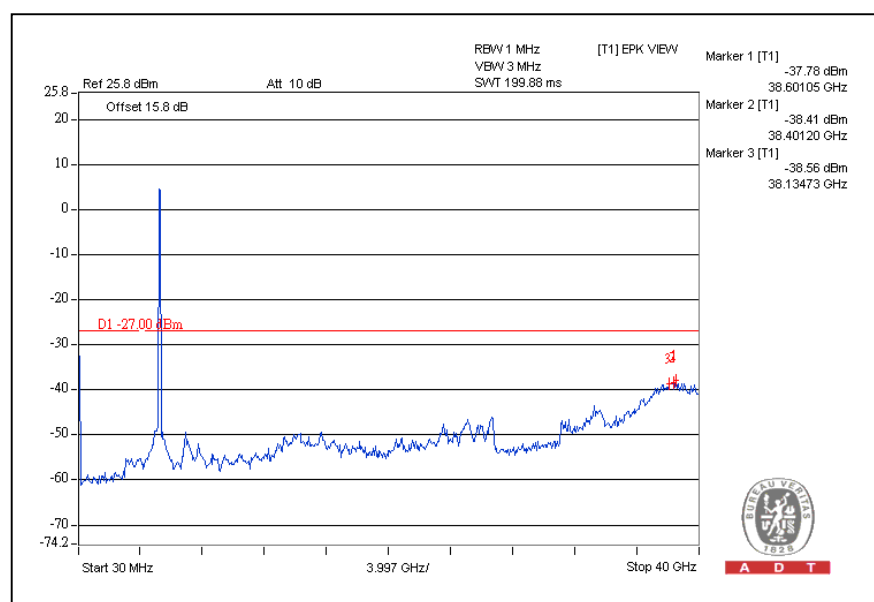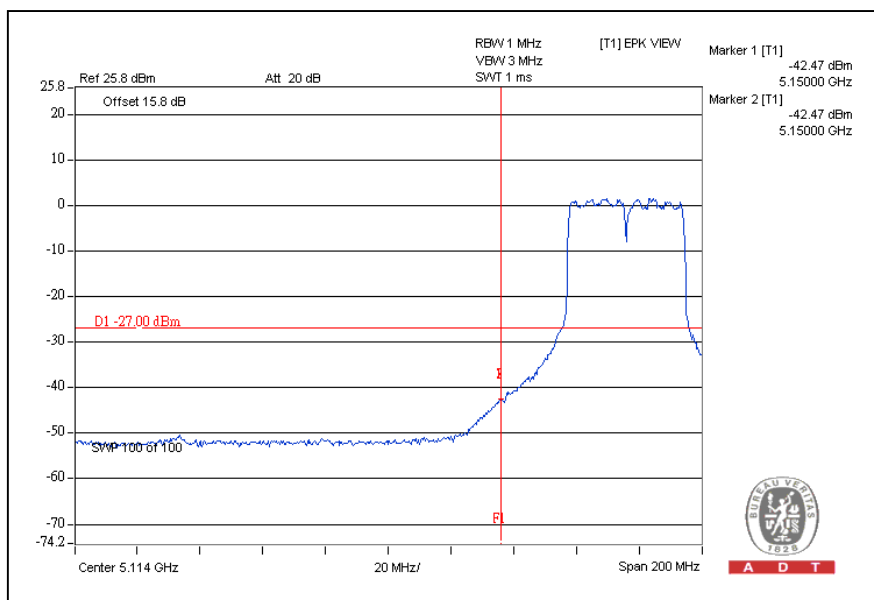

CH46

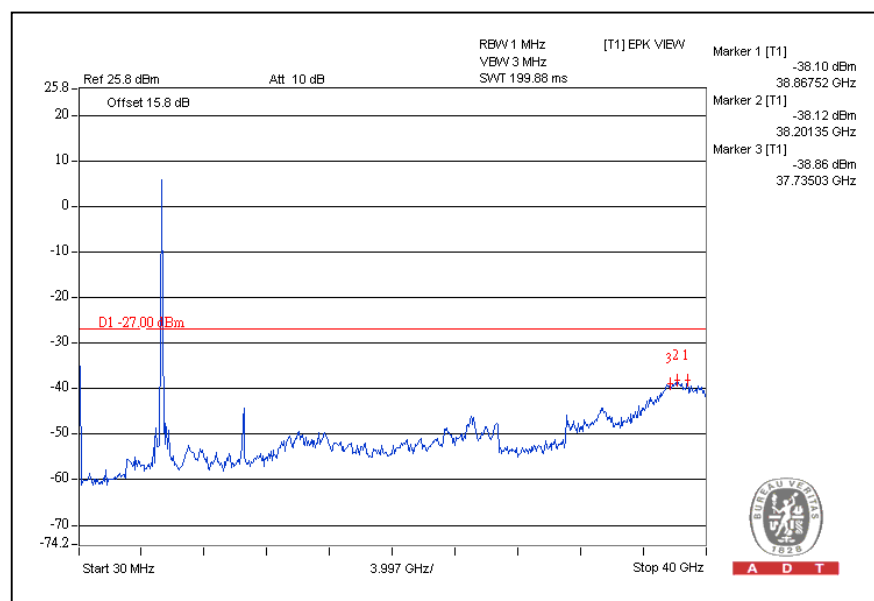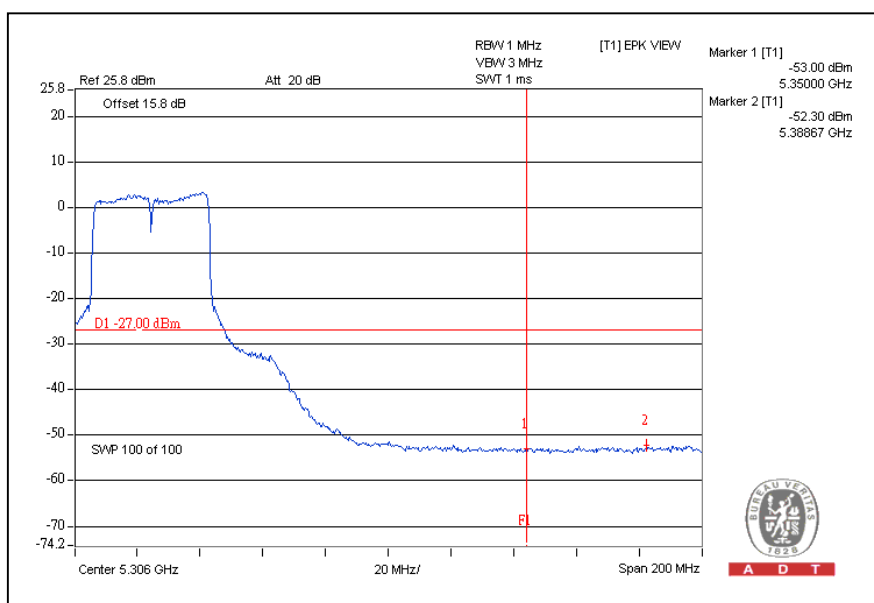

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---