



EMISSION TEST REPORT

Test report file No. : **03-IST-260/FA** Date of issue : Sep. 25, 2003

Model / Type No. : WTN-17WE2 ☐ Basic ☒ Alternate

Kind of product : 17" LCD Monitor

Brand name : WOOYOUNG

Applicant : WOO YOUNG CO., LTD.

Manufacturer : WOO YOUNG CO., LTD.

License holder : WOO YOUNG CO., LTD.

Address : Yoohwa Bldg. 7FL, 995-16 Daechi-Dong, Gangnam-Gu, Seoul, Korea

Test result according to the regulation(s)

☒ Positive ☐ Negative

at page 3.

This test report with appendix consists of 23 pages. The test result only responds to the tested sample.

It is not allowed to copy this report even partly without the allowance of the Test Laboratory.

This equipment is complied with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

DIRECTORY

A) Documentation.

	Page
Directory	<u>2</u>
Test regulations	<u>3</u>
Information of Test Regulation	<u>3</u>
Equipment under Test	<u>3 ~ 4</u>
Description of Difference	<u>5</u>
Test Conditions	<u>6 ~ 7</u>
Test Result	<u>8</u>
Measurement Uncertainty	<u>9</u>
Test-setup	<u>10 ~ 12</u>
Summary	<u>23</u>

B) Test Data.

Conducted emissions (Mains)	: 150 kHz - 30 MHz	<u>13 ~ 15</u> <u>18 ~ 20</u>
Radiated emissions	: 30 MHz – 1 GHz	<u>16 ~ 17</u> <u>21 ~ 22</u>

C) Appendix

TEST REGULATIONS

The tests were performed according to the following regulations ;

- - FCC Part 15, Subpart B (Unintentional Radiators, Class B)

Information of Test Laboratory

IST EMC Lab.

San 21-8 Goan-Ri, Baekam-Myun, Yongin-Si, Kyunggi-Do, Korea

International - Tel : 82-31 - 333 - 4093. Fax : 82-31 - 333 - 4094.

Domestic - Tel : 031 - 333 - 4093. Fax : 031 - 333 - 4094.

EQUIPMENT UNDER TEST

Equipment Description :

Panel :	17" wide TFT LCD Active Area – 372.5 X 223.5 mm LC171W03 (LG.Philips Co., Ltd.)
Resolution :	1024 x 768, 75 Hz (max.)
Dimension :	532(W) X 352(H) X 185(D) mm (with stand)
Power Consumption :	46 W
Power Supply Adapter :	Maker – Hua Jung Comp.Co., Ltd. Model – HASU12FB Input – 100 ~ 240 Vac, 1.8 A, 50/60 Hz Output – 12 Vdc, 5.0 A

EQUIPMENT UNDER TEST

EUT Type :

- ☒ Table-Top.
☐ Floor-Standing.
☐ Table-Top and Floor-Standing(Combination).

Operation – mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- ☐ Standby.
☒ Operational Condition : Scrolling “H” characters under MS Windows,
 at test mode of 1024 X 768, 75 Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420MT	HP	SG23101784
Keyboard	SK-2502C	HP	M020321066
PS/2 Mouse	M-S48a	HP	LZC20602926
Serial Mouse	M-S428	Logitech	LCA53305547
Printer	A0302384	Northern Telecom	26633S60168

Connecting Interface Cables :

- Unshielded AC power cable : 1.8 m
- Unshielded DC power cable (with one ferrite core) : 1.5 m
- Shielded monitor's signal cable (with two ferrite core) : 1.4 m
- Shielded printer's signal cable (with two ferrite core) : 1.8 m
- Unshielded speaker's cable : 1.5 m
- Unshielded RCA cable : 1.9 m
- Unshielded S-Video cable : 1.5 m

Description of the difference between the original and the changed equipment

1. The original WTN-17WE2

No.	Item	Manufacturer	Type	Remark
1	LCD Panel	LG.Philips LCD Co., Ltd.	LM171W01	
2	Inverter	DS-Plus Inc.	DS-1007WA	
3	Power Supply Adapter	Edac Power Electronics Co., Ltd. Seronics Co., Ltd.	EA1050A-120 SAD5012SE	Selectable

2. The changed WTN-17WE2

No.	Item	Manufacturer	Type	Remark
1	LCD Panel	LG.Philips LCD Co., Ltd.	LC171W03	
2	Inverter	DS-Plus Inc. Philips Power Solutions.	DS-1009WC PS-T7L1	Selectable
3	Power Supply Adapter	Hau Jung Comp.Co., Ltd.	HASU12FB	

3. The Photographs of the original and the changed WTN-17WE2



The original WTN-17WE2



The changed WTN-17WE2

TEST CONDITIONS

The measurement of the conducted emissions (Interference voltage) was performed in a shielded room.

Test location :

☒ Shielded room. No.1

☐ Compact chamber 2

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	892108/018
3725/2	LISN	EMCO	Jul. 23, 2003	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 23, 2003	8-883-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 23, 2003	357.8810.52

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement Procedures :

Conducted emissions measurements were made in accordance with ANSI C-63.4-1992, "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to an EMI/Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an IF bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



S. M. Kim / Research Engineer
IST EMC Lab.

The **measurement of the radiated emissions (Electric field)** in the frequency range from 30 MHz to 1GHz was performed in horizontal and vertical antenna polarization at a open-site which meet the site attenuation requirement of ANSI C63.4-1992 and a test distance of :

Location : ☒ Open Site No. 1 ☐ Open Site No. 2 ☐ Open Site No. 3
 Distance : ☒ 3 meters ☐ 10 meters

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 09, 2003	3048

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement procedures

Radiated measurements were in accordance with ANSI C63.4-1992 "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a EMI/Field Intensity Meter. The measurements were made with the detector set for "quasi-peak" within a bandwidth of 120kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



S. M. Kim / Research Engineer
IST EMC Lab.

TEST RESULT

Conducted emissions : 150 kHz - 30 MHz

The requirements are.

☒ KEPT

☐ NOT KEPT

Min. limit margin

DS-Plus Inverter : 11.5 dB at 3.467 MHz

Philips Inverter : 7.2 dB at 3.369 MHz

Remarks : See test-data at pages 13 ~ 15, 18 ~ 20.

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are.

☒ KEPT

☐ NOT KEPT

Min. limit margin

DS-Plus Inverter : 3.2 dB at 472.7 MHz

Philips Inverter : 3.5 dB at 551.4 MHz

Remarks : See test-data at page 16 ~ 17, 21 ~ 22.

Measurement Uncertainty Calculation

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty ($\pm$ dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Receiver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,min\ us} = -1.85, \ U_{c,plus} = 1.71$$



$$U = -3.70 / +3.42 \ (k=2, \ 95.45\% \text{ confidence level})$$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties($\pm$ dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$ \Gamma_{\text{antenna}} = 0.33$	U-Shaped	-1.0 / +0.9
$ \Gamma_{\text{receiver}} = 0.33$		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$$U_{c,min\ us} = -2.6048, \ U_{c,plus} = 2.2775$$

$$U = -5.21 / +4.55 \ (k=2, \ 95.45\% \text{ confidence level})$$

TEST SETUP (Drawings)

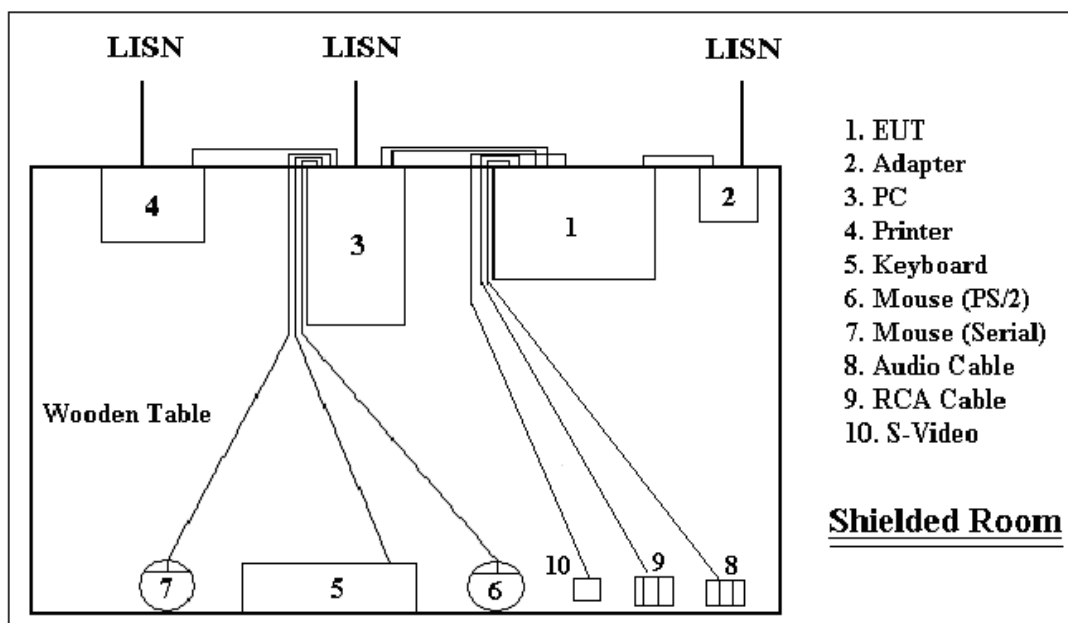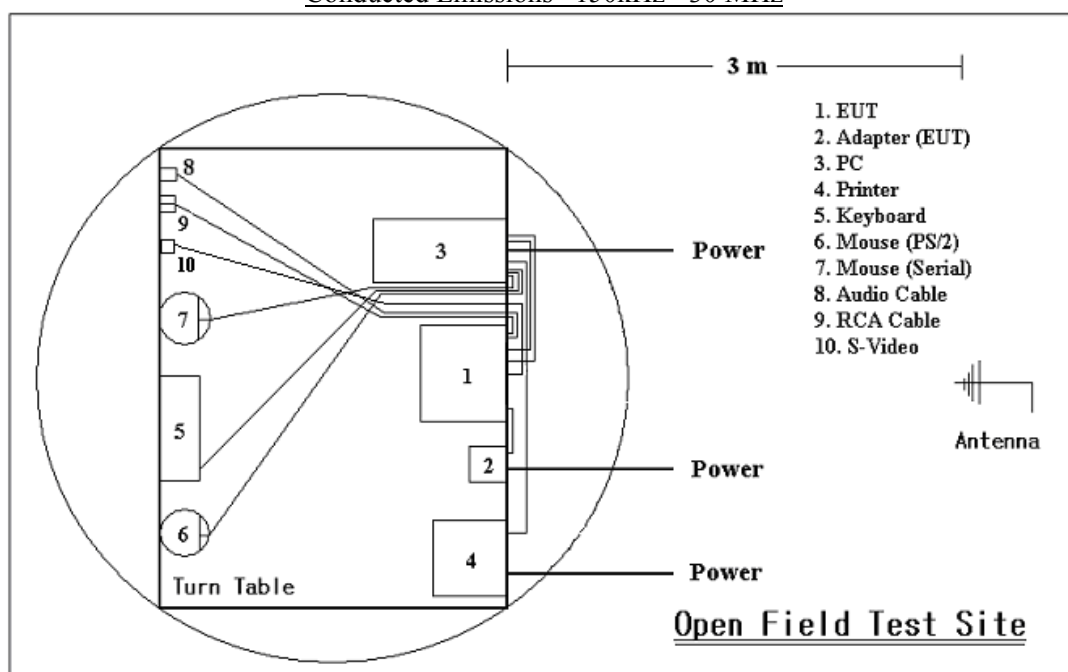Type : WTN-17WE2Conducted Emissions 150kHz - 30 MHzRadiated Emissions 30 MHz - 1000 MHz

TEST SETUP (Photos)

Type : WTN-17WE2



Conducted Emissions 150kHz - 30 MHz



TEST SETUP (Photos)

Type : WTN-17WE2



Radiated Emissions 30MHz - 1000 MHz



Conducted Emission Test Data

Type	WTN-17WE2		
Manufacturer	WOO YOUNG CO., LTD.		
Operation mode	Scrolling "H" pattern display at 1024 x 768, 75 Hz		
Environmental Condition	Temperature	:	23.1 °C
	Humidity	:	46 %
	Atmospheric pressure	:	1014 mbar
Date	Sep. 23, 2003		

Highest Emissions relative to the limit

[DS-Plus Inverter]

Frequency [MHz]	Reading [dBμV]		Phase	Insertion Loss (LISN)	Limit [dBμV]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.150	46.3	29.0	L1	0.8	66.0	56.0	18.9	26.2
0.198	44.1	37.1		0.8	63.7	53.7	18.8	15.8
0.645	39.7	33.5		0.8	56.0	46.0	15.5	11.7
3.368	38.6	32.3		0.8	56.0	46.0	16.6	12.9
11.908	20.3	11.5		0.8	60.0	50.0	38.9	37.7
25.319	36.6	26.3		0.8	60.0	50.0	22.6	22.9
0.150	46.2	30.5		N	0.8	66.0	56.0	19.0
0.198	44.5	36.0	0.8		63.7	53.7	18.4	16.9
0.695	38.5	31.7	0.8		56.0	46.0	16.7	13.5
3.467	40.3	33.7	0.8		56.0	46.0	14.9	11.5
11.786	23.7	14.7	0.8		60.0	50.0	35.5	34.5
25.394	36.9	26.8	0.8		60.0	50.0	22.3	22.4
Cable loss are less than 0.1 dB								


*L1 : Live Line


**N : Neutral Line

*** Please refer to data graphs at page 14 ~ 15.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,

Uncertainty U = -3.70 / +3.42 [dB]

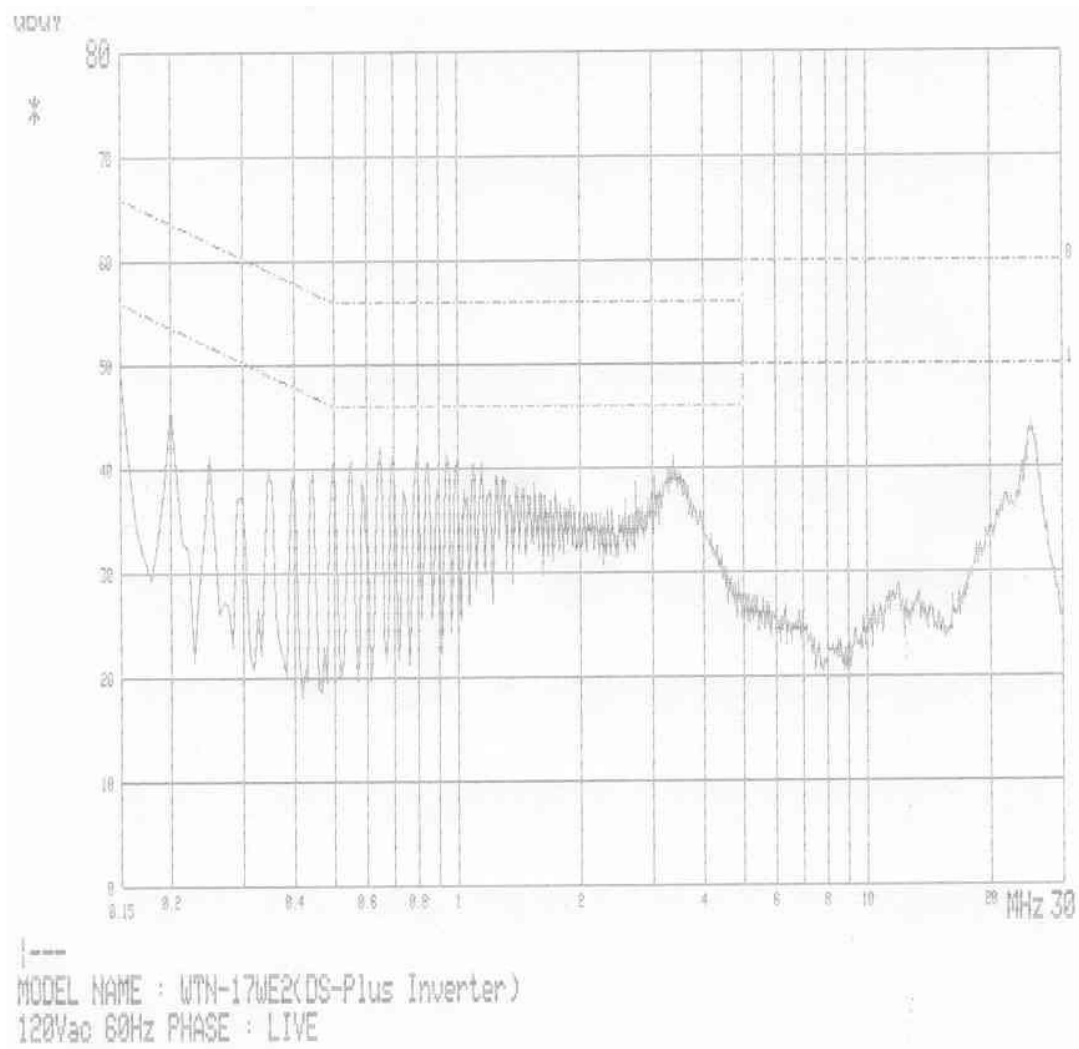

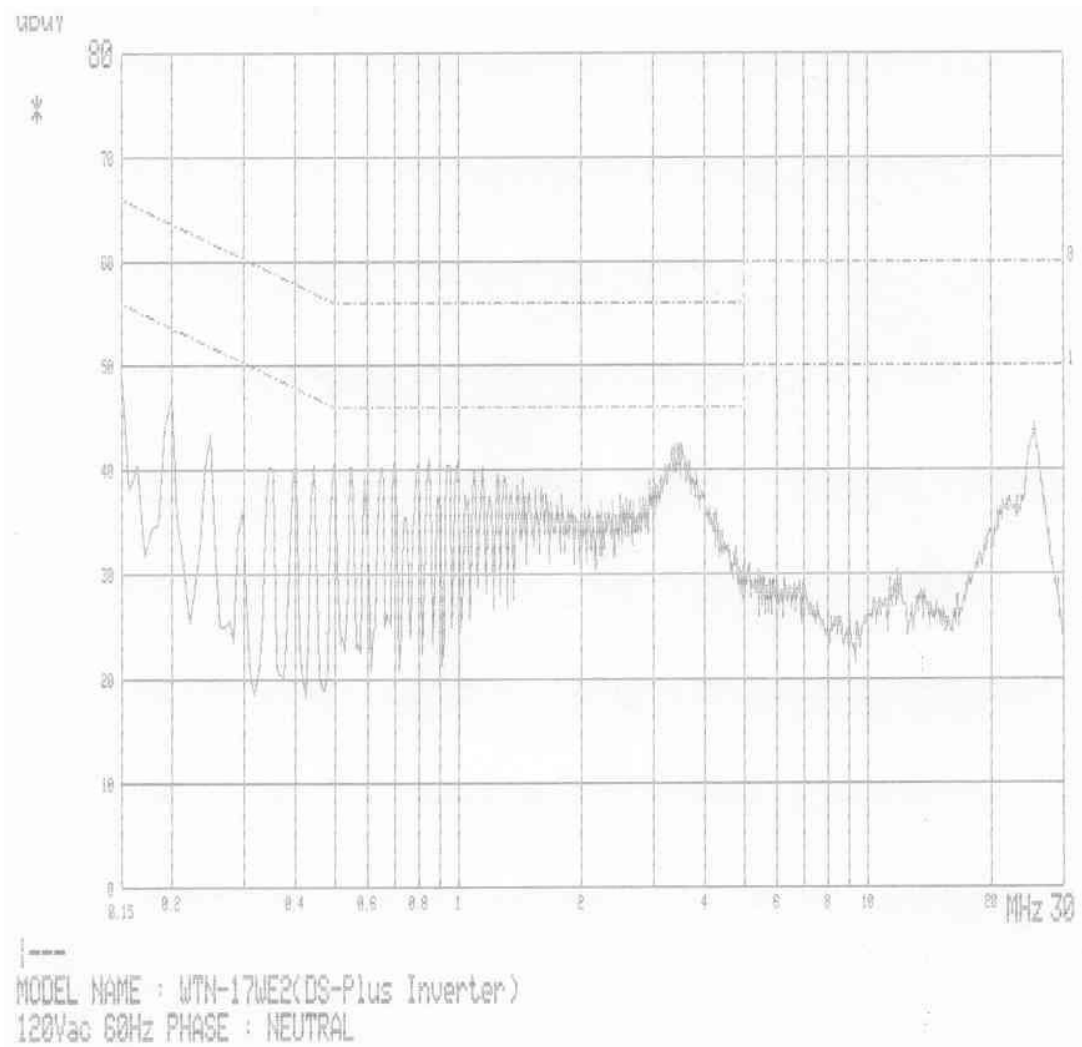

Radiation Test Data

Type	WTN-17WE2
Manufacturer	WOO YOUNG CO., LTD.
Operation mode	Scrolling "H" pattern display at 1024 x 768, 75 Hz
Environmental Condition	Temperature : 20.4 °C Humidity : 43 % Atmospheric pressure : 1014 mbar
Test distance	3 m
Antenna	VULB9160
Date	Sep. 19, 2003


Highest Emissions relative to the limit

[DS-Plus Inverter]

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
40.5	11.3	13.6	1.2	81	100	V	26.1	40.0	13.9
63.0	11.3	10.9	1.4	145	100	V	23.6	40.0	16.4
80.9	24.2	7.7	1.6	192	100	V	33.5	40.0	6.5
121.6	25.8	10.0	2.0	165	100	V	37.8	43.5	5.7
141.8	23.2	11.6	2.2	151	100	V	37.0	43.5	6.5
161.8	25.1	12.3	2.3	227	100	V	39.7	43.5	3.8
202.2	23.5	8.5	2.5	176	171	H	34.5	43.5	9.0
212.7	17.3	8.3	2.5	9	127	H	28.1	43.5	15.4
242.8	15.7	10.4	2.8	296	100	H	28.9	46.0	17.1
324.1	21.2	11.7	3.3	205	132	V	36.2	46.0	9.8
393.9	21.3	13.1	4.1	334	189	H	38.5	46.0	7.5
472.7	24.0	14.2	4.6	332	138	H	42.8	46.0	3.2
551.4	21.7	16.0	4.6	259	117	H	42.3	46.0	3.7
708.9	16.4	19.0	5.0	24	100	V	40.4	46.0	5.6

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -5.21 / +4.55 [dB]

MEASUREMENT OF DISTURBANCE RADIATION

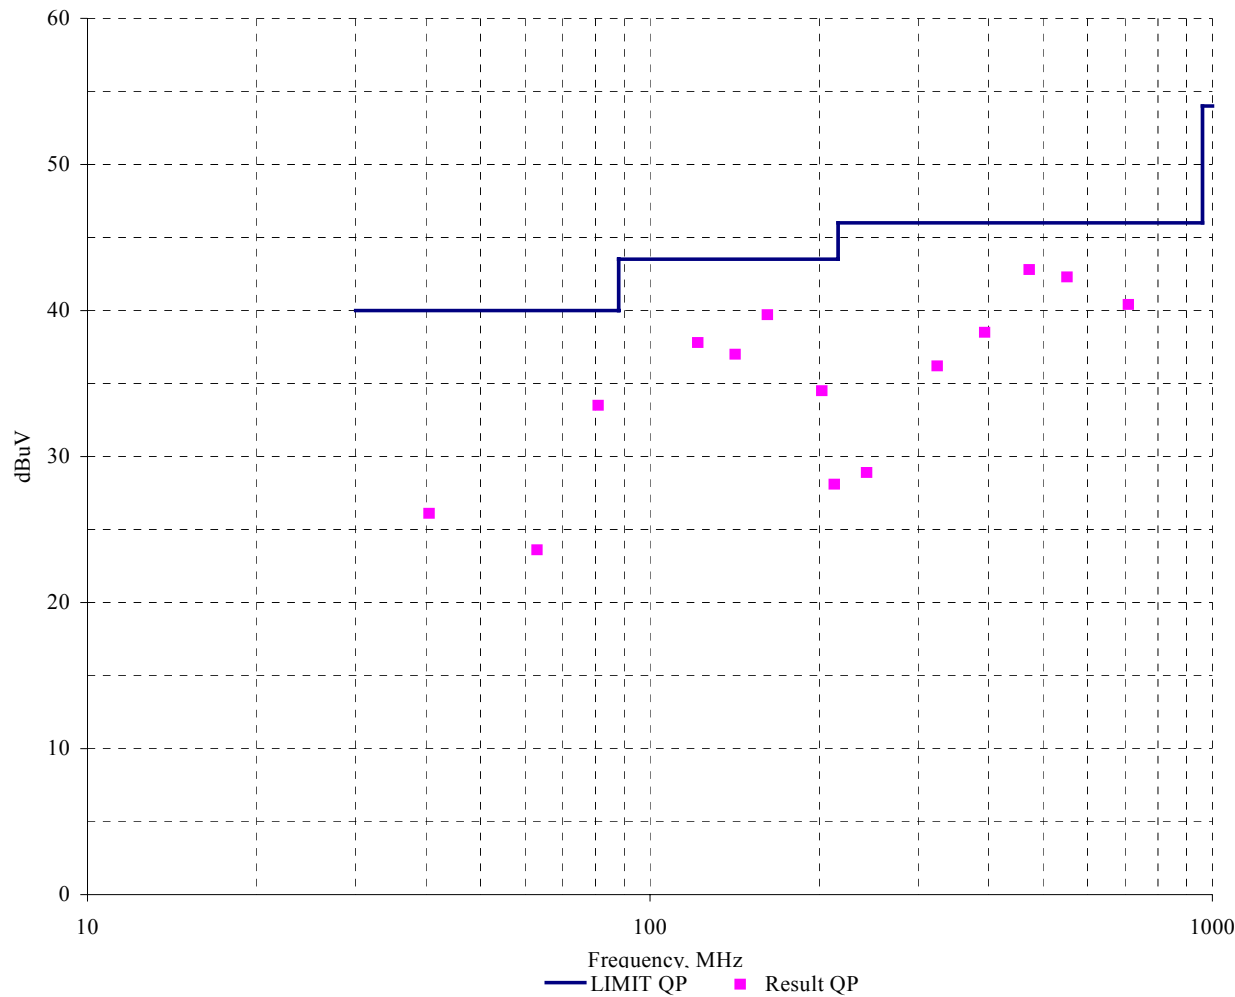

Conducted Emission Test Data

Type	WTN-17WE2		
Manufacturer	WOO YOUNG CO., LTD.		
Operation mode	Scrolling "H" pattern display at 1024 x 768, 75 Hz		
Environmental Condition	Temperature	:	23.1 °C
	Humidity	:	46 %
	Atmospheric pressure	:	1014 mbar
Date	Sep. 23, 2003		

Highest Emissions relative to the limit

[Philips Inverter]

Philips Inverter								
Frequency [MHz]	Reading [dBμV]		Phase	Insertion Loss (LISN)	Limit [dBμV]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.150	47.6	29.2	L1	0.8	66.0	56.0	17.6	26.0
0.248	39.4	34.2		0.8	61.8	51.8	21.6	16.8
0.546	36.6	33.8		0.8	56.0	46.0	18.6	11.4
3.027	34.2	28.6		0.8	56.0	46.0	21.0	16.6
11.993	22.0	13.3		0.8	60.0	50.0	37.2	35.9
21.714	33.0	23.5		0.8	60.0	50.0	26.2	25.7
0.150	46.5	31.0		N	0.8	66.0	56.0	18.7
0.199	44.8	37.1	0.8		63.7	53.7	18.1	15.8
0.545	38.6	35.8	0.8		56.0	46.0	16.6	9.4
3.369	40.8	38.0	0.8		56.0	46.0	14.4	7.2
12.282	22.6	15.0	0.8		60.0	50.0	36.6	34.2
23.963	31.0	21.1	0.8		60.0	50.0	28.2	28.1
Cable loss are less than 0.1 dB								


*L1 : Live Line


**N : Neutral Line

*** Please refer to data graphs at page 19 ~ 20.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,

Uncertainty U = -3.70 / +3.42 [dB]

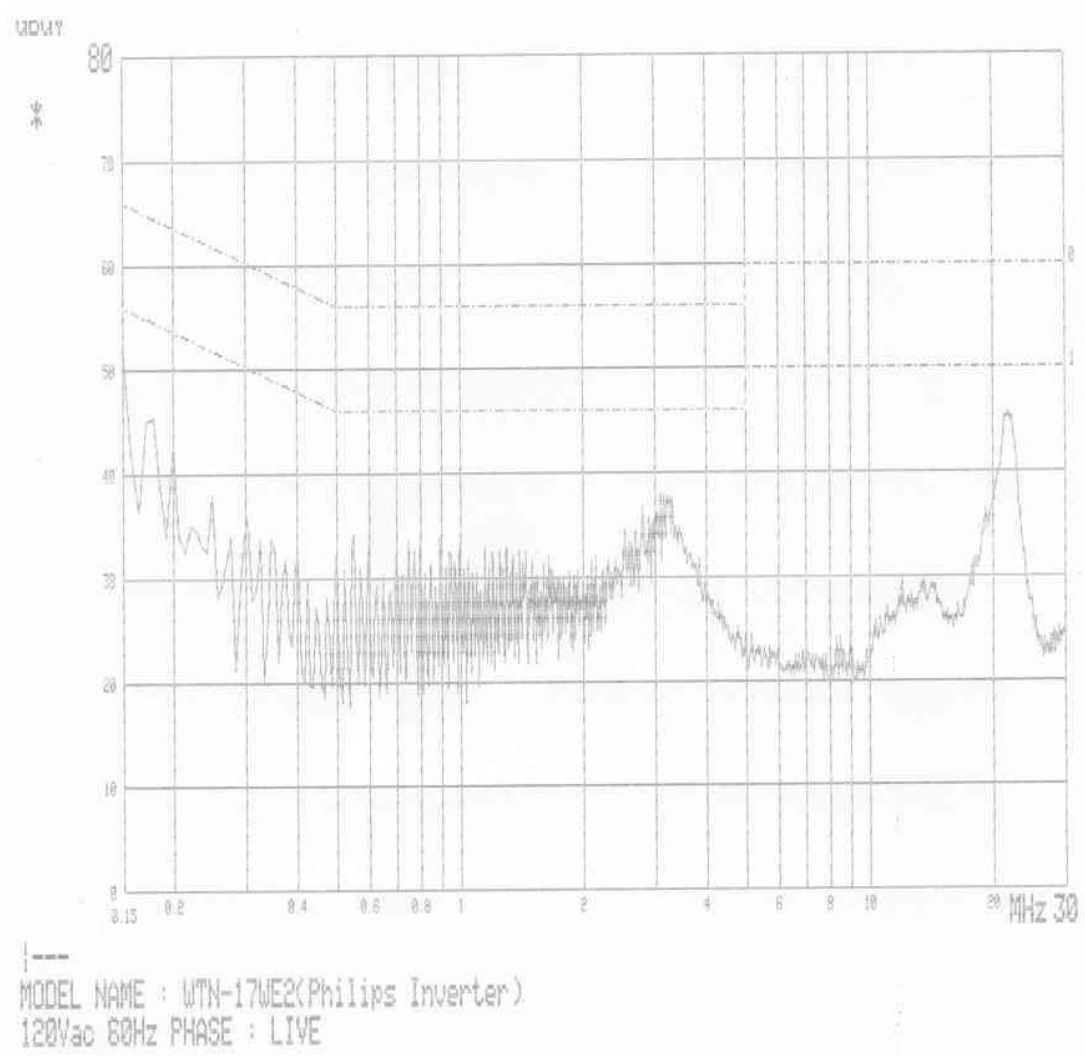

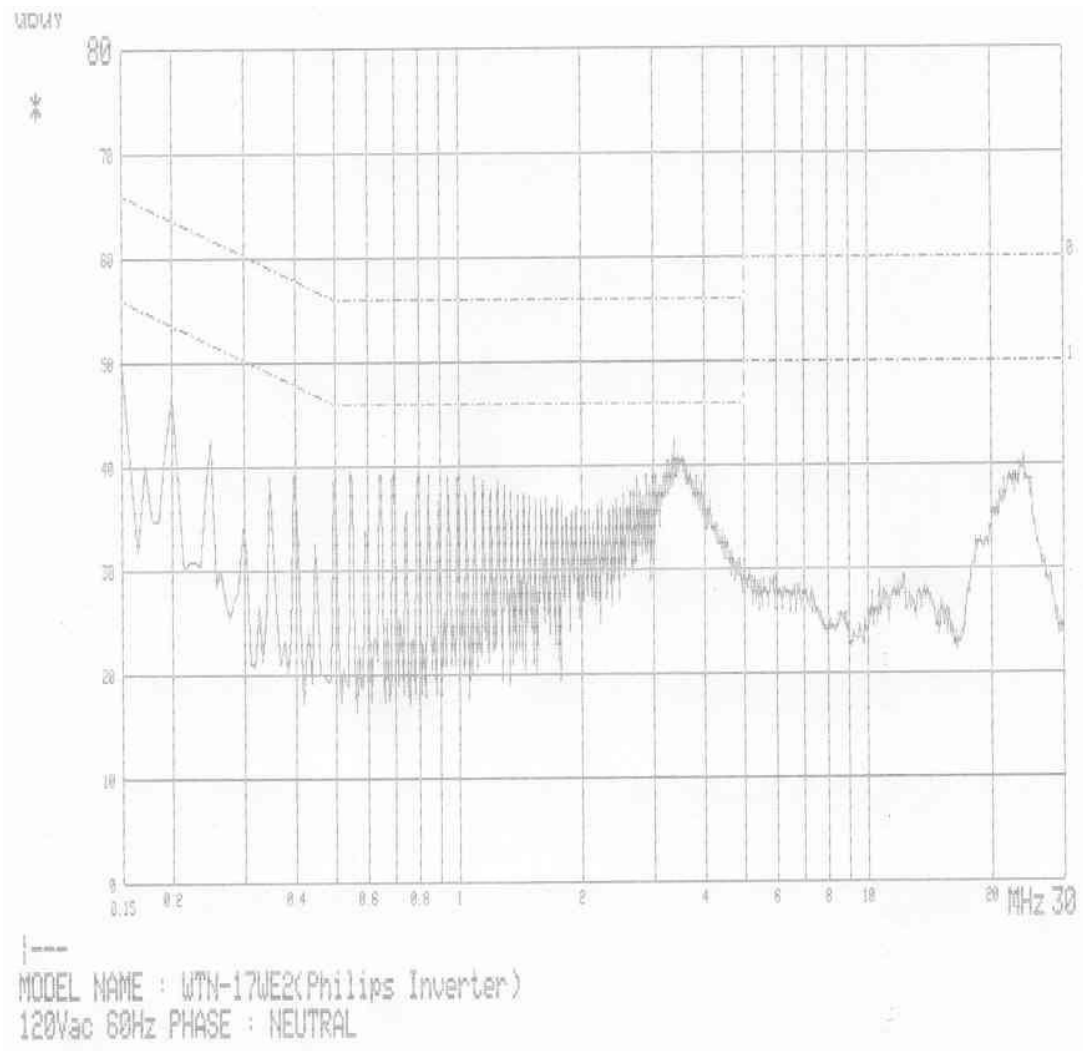

Radiation Test Data

Type	WTN-17WE2
Manufacturer	WOO YOUNG CO., LTD.
Operation mode	Scrolling "H" pattern display at 1024 x 768, 75 Hz
Environmental Condition	Temperature : 20.4 °C Humidity : 43 % Atmospheric pressure : 1014 mbar
Test distance	3 m
Antenna	VULB9160
Date	Sep. 19, 2003


Highest Emissions relative to the limit

[Philips Inverter]

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
81.2	23.4	7.7	1.6	191	100	V	32.7	40.0	7.3
101.2	14.8	8.3	1.8	160	100	V	24.9	43.5	18.6
121.6	26.0	10.0	2.0	165	100	V	38.0	43.5	5.5
141.8	23.2	11.6	2.2	150	100	V	37.0	43.5	6.5
161.9	25.4	12.3	2.3	223	100	V	40.0	43.5	3.5
202.6	23.8	8.4	2.5	175	100	H	34.7	43.5	8.8
210.7	16.9	8.3	2.5	8	168	H	27.7	43.5	15.8
243.5	15.8	10.4	2.8	295	190	H	29.0	46.0	17.0
316.8	22.6	11.7	3.3	209	137	V	37.6	46.0	8.4
393.9	22.4	13.1	4.1	330	140	H	39.6	46.0	6.4
551.4	21.9	16.0	4.6	264	109	H	42.5	46.0	3.5
708.9	16.2	19.0	5.0	28	100	V	40.2	46.0	5.8

Coverage factor of $k=2$ will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty $U = -5.21 / +4.55$ [dB]

MEASUREMENT OF DISTURBANCE RADIATION

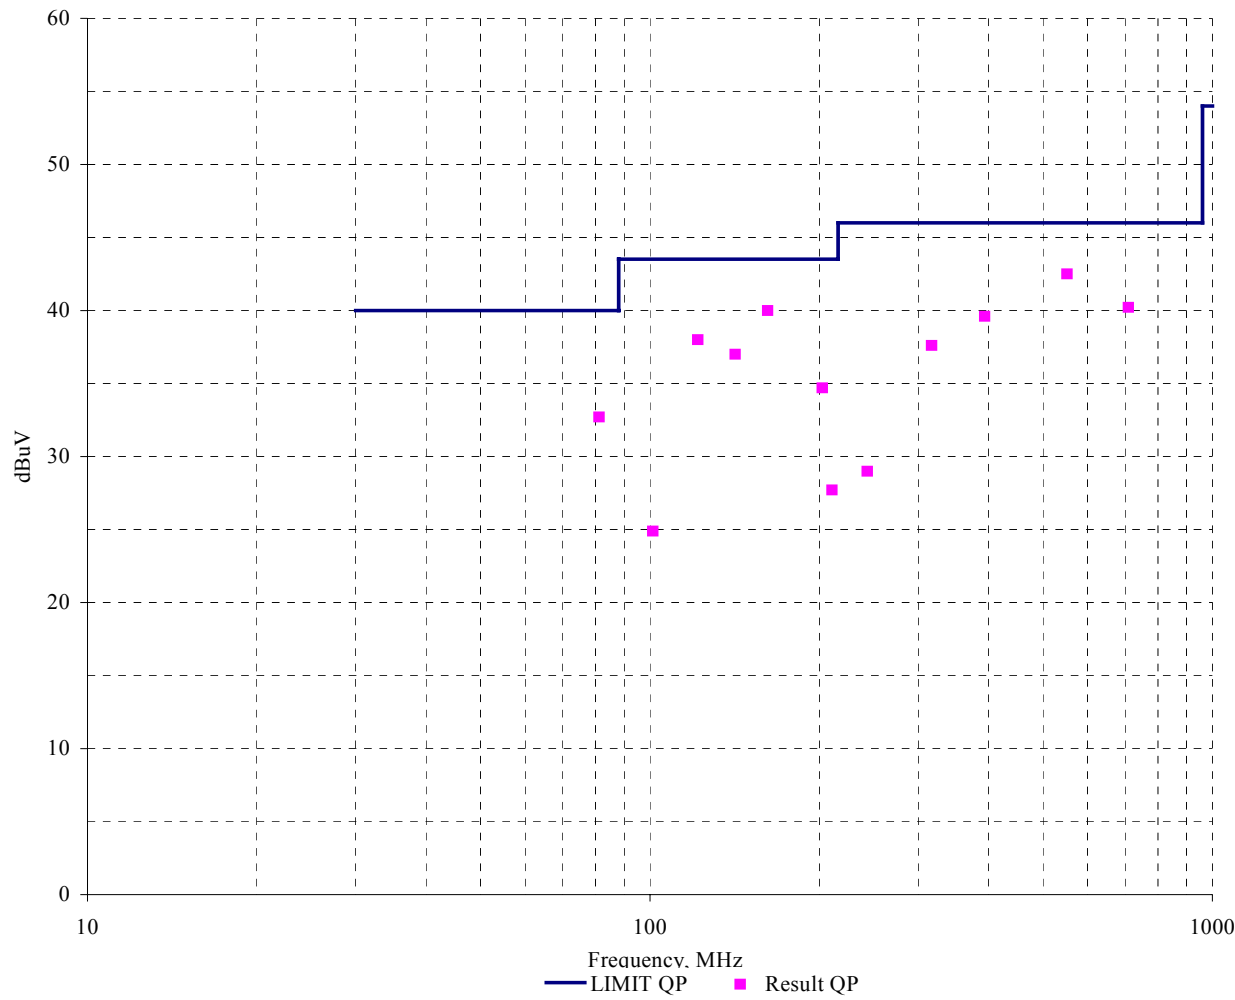

SUMMARY

GENERAL REMARKS :

The equipment is not modified anything, mechanical or circuit to improve EMI status during a measurement and complied the regulation "Part 15 subpart B Class B of CFR 47"

FINAL JUDGMENT :

The requirements according to the technical regulations are

☒ Kept ☐ Not kept

The equipment under test does

☒ Fulfill the general approval requirements mentioned on page 3.
☐ Not fulfill the general approval requirements mentioned on page 3.

Begin of testing : Sep. 19, 2003


End of testing : Sep. 23, 2003

Reviewed by :



Joon H. Lee. EMC Manager
IST EMC Lab.

Approved by :



G. Chung Chief of EMC Lab.