



# SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

Project No: CB10412040

## Maximum Permissible Exposure Report

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Applicant's company    | Extreme Networks, Inc.                                 |
| Applicant Address      | 9 Northeastern Blvd. Salem, NH 03079 USA               |
| FCC ID                 | QXO-4411AC                                             |
| Manufacturer's company | Senao Networks, Inc.                                   |
| Manufacturer Address   | 3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan |

|                  |                                             |
|------------------|---------------------------------------------|
| Product Name     | Wireless 802.11a/AC + b/g/n Access Point    |
| Brand Name       | Extreme Networks                            |
| Model Name       | 31012, 31014                                |
| Ref. Standard(s) | 47 CFR FCC Part 2 Subpart J, section 2.1091 |
| Received Date    | Oct. 15, 2015                               |
| Final Test Date  | Nov. 29, 2015                               |
| Submission Type  | Class II Change                             |

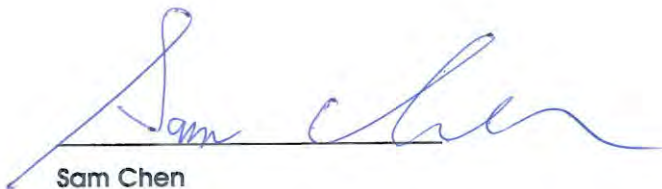

Sam Chen

SPORTON INTERNATIONAL INC.



## Table of Contents

|                                                        |          |
|--------------------------------------------------------|----------|
| <b>1. GENERAL DESCRIPTION.....</b>                     | <b>1</b> |
| 1.1. EUT General Information .....                     | 1        |
| 1.2. Table for Multiple List and Class II Change ..... | 1        |
| 1.3. Testing Location.....                             | 1        |
| <b>2. MAXIMUM PERMISSIBLE EXPOSURE.....</b>            | <b>2</b> |
| 2.1. Limit of Maximum Permissible Exposure .....       | 2        |
| 2.2. MPE Calculation Method .....                      | 2        |
| 2.3. Calculated Result and Limit.....                  | 3        |

## History of This Test Report

| REPORT NO.    | VERSION | DESCRIPTION             | ISSUED DATE   |
|---------------|---------|-------------------------|---------------|
| FA541527-02AA | Rev. 01 | Initial issue of report | Dec. 14, 2015 |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |

## 1. GENERAL DESCRIPTION

### 1.1. EUT General Information

| RF General Information |                                                  |                                                  |                                                                                                                                      |
|------------------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Evaluation Mode        | Frequency Range (MHz)                            | Operating Frequency (MHz)                        | Modulation Type                                                                                                                      |
| 2.4GHz WLAN            | 2400-2483.5                                      | 2412-2462                                        | 802.11b: DSSS (DBPSK, DQPSK, CCK)<br>802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |
| 5GHz WLAN              | 5150-5250<br>5250-5350<br>5470-5725<br>5725-5850 | 5180-5240<br>5260-5320<br>5500-5720<br>5745-5825 | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)                                      |

### 1.2. Table for Multiple List and Class II Change

The model names are identical to each other in all aspects except for the following table:

| Equipment                                  | EUT | Product Name   | Model Name | Internal Antenna | External Antenna | Equipped Antenna |
|--------------------------------------------|-----|----------------|------------|------------------|------------------|------------------|
| Wireless 802.11a/AC+<br>b/g/n Access Point | 1   | WS-AP3935e-FCC | 31014      | X                | V                | Set 1 ~9         |
|                                            | 2   | WS-AP3935i-FCC | 31012      | V                | X                | Set 10           |

This product is an extension of original one reported under Sporton project number: FA541527-01AA

Below is the table for the change of the product with respect to the original one.

| Modifications                                           | Performance Checking |
|---------------------------------------------------------|----------------------|
| Add Band 2 and Band 3<br>(5250~5350 MHz, 5470~5725 MHz) | MPE (5G B2 B3)       |

### 1.3. Testing Location

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973   |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6                                                                 |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                 |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                 |
| 300-1500              |                                   |                                   | F/300                                    | 6                                                                 |
| 1500-100,000          |                                   |                                   | 5                                        | 6                                                                 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30                                                                |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30                                                                |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30                                                                |
| 300-1500              |                                   |                                   | F/1500                                   | 30                                                                |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30                                                                |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2. MPE Calculation Method

The MPE was calculated at 25 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

### 2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For EUT 1

For 5GHz Band 1 and Band 4:

Antenna Type : Sector Antenna

Conducted Power for IEEE 802.11a: 28.07dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 5785             | 7.50               | 5.6234                 | 28.0654                                   | 640.5312 | 0.458850                                | 1                                                | Complies    |

For 5GHz Band 2 and Band 3:

Antenna Type : Sector Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT40): 22.46dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 5550             | 7.50               | 5.6234                 | 22.4641                                   | 176.3654 | 0.126341                                | 1                                                | Complies    |

For 2.4GHz Band:

Antenna Type : Sector Antenna

Conducted Power for IEEE 802.11g: 25.19 dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 2437             | 10.50              | 11.2202                | 25.1882                                   | 330.2313 | 0.472007                                | 1                                                | Complies    |

#### Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + .....etc. < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is  $0.472007 / 1 + 0.458850 / 1 = 0.930857$ , which is less than "1". This confirmed that the device complies.

For EUT 2

For 5GHz Band 1 and Band 4:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 28.82dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 5785             | 5.84               | 3.8371                 | 28.8206                                   | 762.1921 | 0.372559                                | 1                                                | Complies    |

For 5GHz Band 2 and Band 3:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT80): 23.27dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 5610             | 5.84               | 3.8371                 | 23.2738                                   | 212.5090 | 0.103874                                | 1                                                | Complies    |

For 2.4GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11g: 28.34 dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|-------------------------------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                                     | (mW)     |                                         |                                                  |             |
| 25            | 2437             | 3.98               | 2.5003                 | 28.3352                                   | 681.5782 | 0.217093                                | 1                                                | Complies    |

## Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + .....etc. < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is  $0.217093 / 1 + 0.372559 / 1 = 0.589652$ , which is less than "1". This confirmed that the device complies.