



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Extreme Networks, Inc.
Applicant Address	9 Northeastern Blvd. Salem, NH 03079 USA
FCC ID	QXO-4411AC
Manufacturer's company	Senao Networks, Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Wireless 802.11a/AC+ b/g/n Access Point
Brand Name	Extreme Networks
Model No.	31012, 31014, 31013, 31015
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 15, 2015
Final Test Date	Nov. 30, 2015
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	6
3.3. Table for Filed Antenna.....	7
3.4. Table for Carrier Frequencies	9
3.5. Table for Test Modes	10
3.6. Table for Testing Locations.....	12
3.7. Table for Multiple Listing.....	12
3.8. Table for Supporting Units	13
3.9. Table for Parameters of Test Software Setting	14
3.10. EUT Operation during Test	16
3.11. Duty Cycle	16
3.12. Test Configurations	17
4. TEST RESULT	20
4.1. AC Power Line Conducted Emissions Measurement.....	20
4.2. Maximum Conducted Output Power Measurement.....	24
4.3. Power Spectral Density Measurement	32
4.4. 6dB Spectrum Bandwidth Measurement	97
4.5. Radiated Emissions Measurement	134
4.6. Emissions Measurement	225
4.7. Antenna Requirements	339
5. LIST OF MEASURING EQUIPMENTS	340
6. MEASUREMENT UNCERTAINTY.....	342
APPENDIX A. TEST PHOTOS	A1 ~ A11
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541527-04AA	Rev. 01	Initial issue of report	Jan. 13, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Wireless 802.11a/AC+ b/g/n Access Point
Brand Name : Extreme Networks
Model No. : 31012, 31014, 31013, 31015
Applicant : Extreme Networks, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 15, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

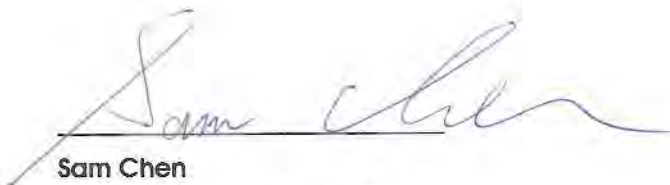

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	3.06 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.31 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.50 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.03 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.01 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi IEEE 802.11b: 14.50 MHz IEEE 802.11g: 19.80 MHz IEEE 802.11n MCS0 (HT20): 22.84 MHz IEEE 802.11n MCS0 (HT40): 36.18 MHz Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi IEEE 802.11b: 13.89 MHz IEEE 802.11g: 16.50 MHz IEEE 802.11n MCS0 (HT20): 19.19 MHz IEEE 802.11n MCS0 (HT40): 36.18 MHz Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi IEEE 802.11b: 14.15 MHz IEEE 802.11g: 19.80 MHz IEEE 802.11n MCS0 (HT20): 22.84 MHz IEEE 802.11n MCS0 (HT40): 36.18 MHz Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi IEEE 802.11b: 14.33 MHz IEEE 802.11g: 16.15 MHz IEEE 802.11n MCS0 (HT20): 17.80 MHz IEEE 802.11n MCS0 (HT40): 35.89 MHz

	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi IEEE 802.11b: 14.15 MHz IEEE 802.11g: 19.80 MHz IEEE 802.11n MCS0 (HT20): 22.84 MHz IEEE 802.11n MCS0 (HT40): 36.32 MHz Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi IEEE 802.11b: 14.50 MHz IEEE 802.11g: 19.80 MHz IEEE 802.11n MCS0 (HT20): 21.88 MHz IEEE 802.11n MCS0 (HT40): 36.76 MHz Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi IEEE 802.11b: 14.50 MHz IEEE 802.11g: 20.14 MHz IEEE 802.11n MCS0 (HT20): 19.80 MHz IEEE 802.11n MCS0 (HT40): 36.61 MHz
Maximum Conducted Output Power	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi IEEE 802.11b: 27.50 dBm IEEE 802.11g: 27.95 dBm IEEE 802.11n MCS0 (HT20): 28.11 dBm IEEE 802.11n MCS0 (HT40): 21.14 dBm Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi IEEE 802.11b: 26.69 dBm IEEE 802.11g: 27.03 dBm IEEE 802.11n MCS0 (HT20): 27.02 dBm IEEE 802.11n MCS0 (HT40): 19.63 dBm Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi IEEE 802.11b: 27.31 dBm IEEE 802.11g: 27.95 dBm IEEE 802.11n MCS0 (HT20): 28.11 dBm IEEE 802.11n MCS0 (HT40): 20.67 dBm Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi IEEE 802.11b: 24.16 dBm IEEE 802.11g: 25.19 dBm IEEE 802.11n MCS0 (HT20): 24.85 dBm IEEE 802.11n MCS0 (HT40): 18.96 dBm

	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi IEEE 802.11b: 27.31 dBm IEEE 802.11g: 27.95 dBm IEEE 802.11n MCS0 (HT20): 28.11 dBm IEEE 802.11n MCS0 (HT40): 20.67 dBm Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi IEEE 802.11b: 27.31 dBm IEEE 802.11g: 28.08 dBm IEEE 802.11n MCS0 (HT20): 27.02 dBm IEEE 802.11n MCS0 (HT40): 20.21 dBm Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi IEEE 802.11b: 26.03 dBm IEEE 802.11g: 28.34 dBm IEEE 802.11n MCS0 (HT20): 28.11 dBm IEEE 802.11n MCS0 (HT40): 21.82 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna and Band width

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Set.	Brand Holder	Model Number (Part No.)	Extreme Part No. (Short Description)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
							2.4GHz	5GHz
1	PCTEL Inc.	WS-AI-DQ04360	WS-AI-DQ04360 (WS-AI-DQ04360)	Ceiling Mount Omni	RP SMA Male	V	4	7
2	PCTEL Inc.	908403-10	30705 (WS-AI-DE07025)	Sector Antenna	RP SMA Male	V	7.5	6.5
3	PCTEL Inc.	908400-10	30702 (WS-AI-DQ05120)	Sector Antenna	RP SMA Male	V	5.5	5.5
4	PCTEL Inc.	908405-10	30707 (WS-AI-DE10055)	Sector Antenna	RP SMA Male	V	10.5	7.5
5	PCTEL Inc.	908404-10	30706 (WS-AI-5Q05025)	Sector Antenna	RP SMA Male	V	-	4.5
6	PCTEL Inc.	908401-10	30703 (WS-AI-5Q04060)	Sector Antenna	RP SMA Male	V	-	4
7	PCTEL Inc.	908402-10	30704 (WS-AI-2Q05060)	Sector Antenna	RP SMA Male	V	5	-
8	Master Wave Technology Co., Ltd.	98152MRSX015	30709 (WS-ANT-2DIP-4)	Dipole Antenna	RP SMA Male	X	4.66	-
9	Master Wave Technology Co., Ltd.	98152URSX009	30710 (WS-ANT-5DIP-4)	Dipole Antenna	RP SMA Male	X	-	4.67
10	Senao Networks, Inc.	AP3935i	-	PIFA Antenna	IPEX	X	Note 1	

Note1:

Set.	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
10	3.81	3.75	3.98	3.47	5.84	5.50	5.84	5.65

Note2:

The EUT has ten sets of antennas.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):


Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>


For IEEE 802.11a/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For EUT 1:

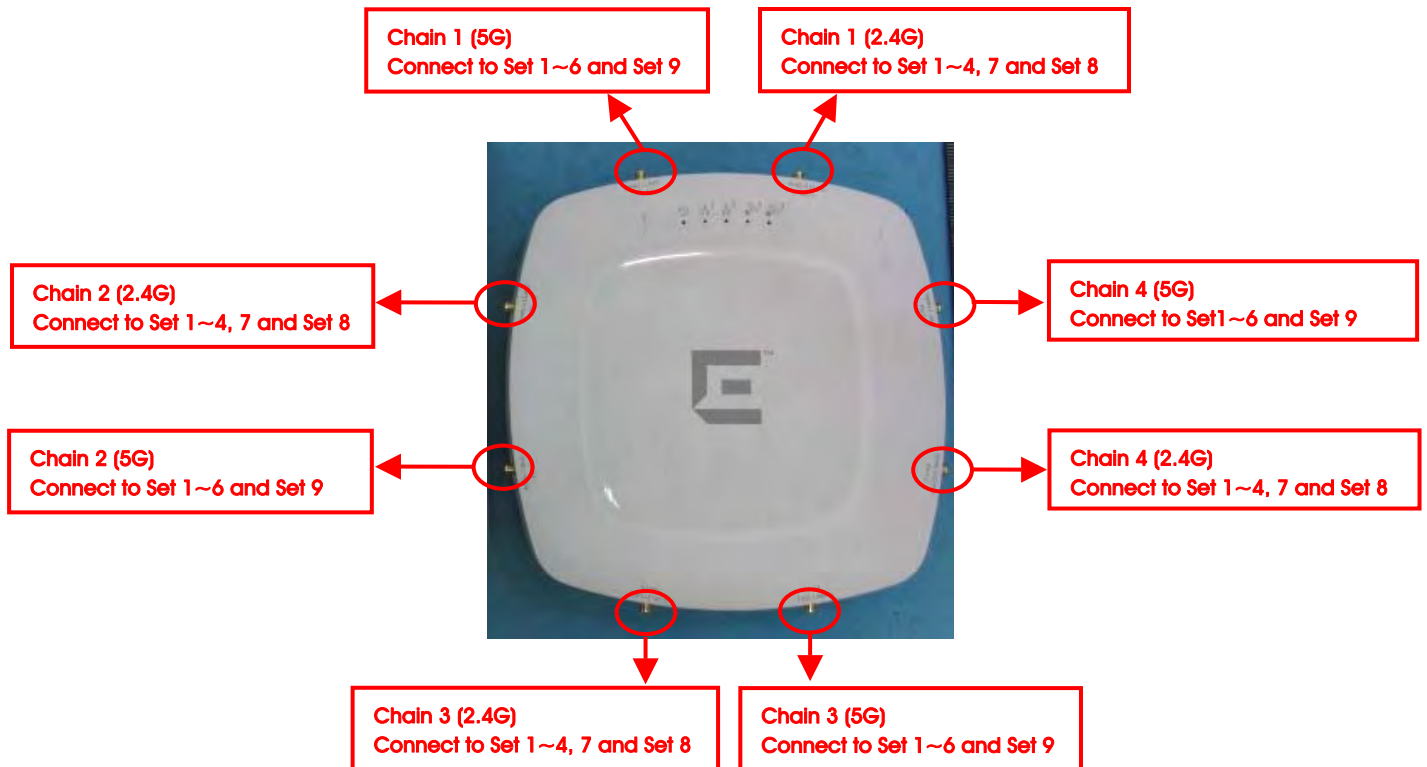

For EUT 2:

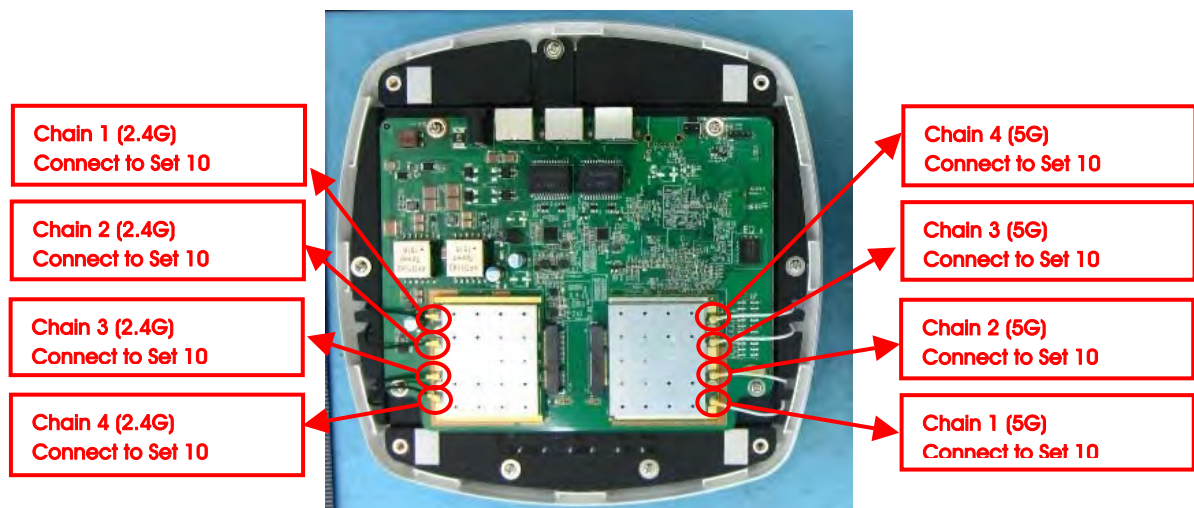

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4

Note1: HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.

Note2:

The adapter and PoE are for measurement only, would not be marketed.

The adapter and PoE information as below:

Power	Brand	Model
Adapter	Powertron Electronics Corp.	PA1024-120IB200
PoE	Microsemi	PD-9001GR

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT 1 + Adapter

Mode 2. Normal Link - EUT 2 + Adapter

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission Below 1GHz test:

Mode 1. Place EUT 1 in Y axis + Set 4 + Adapter

Mode 2. Place EUT 1 in Z axis + Set 4 + Adapter

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.

Mode 3. Place EUT 1 in Z axis + Set 4 + PoE

Mode 4. Place EUT 2 in Z axis + Set 10 + Adapter

Mode 5. Place EUT 2 in Z axis + Set 10 + PoE

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission Above 1GHz test:

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 1

Mode 2. Place EUT 1 in Z axis + Set 2

Mode 3. Place EUT 1 in Z axis + Set 3

Mode 4. Place EUT 1 in Z axis + Set 4

Mode 5. Place EUT 1 in Z axis + Set 7

Mode 6. Place EUT 1 in Z axis + Set 8

Mode 7. Place EUT 2 in Y axis + Set 10

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541527-04AA) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Product Name	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Wireless 802.11a/AC+ b/g/n Access Point	1	WS-AP3935e-FCC	31014	X	V	Set 1~9
		WS-AP3935e-ROW	31015			
	2	WS-AP3935i-FCC	31012	V	X	Set 10
		WS-AP3935i-ROW	31013			

Note: Different model names for EUT 1 (31014 and 31015) and EUT 2 (31012 and 31013) served as marketing strategy.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	DoC
Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120IB200	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	21	21	20	-	-	-
802.11g	15	23	15	-	-	-
802.11n MCS0 HT20	15	22.5	16	-	-	-
802.11n MCS0 HT40	-	-	-	10.5	15.5	12

Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19.5	20.5	19.5	-	-	-
802.11g	14.5	22	14	-	-	-
802.11n MCS0 HT20	13.5	22	13.5	-	-	-
802.11n MCS0 HT40	-	-	-	10.5	14	11

Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19.5	21	20	-	-	-
802.11g	15	23	14.5	-	-	-
802.11n MCS0 HT20	14	22.5	14.5	-	-	-
802.11n MCS0 HT40	-	-	-	10.5	15	12

Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	16.5	17.5	16	-	-	-
802.11g	13	19	13	-	-	-
802.11n MCS0 HT20	13	19	12	-	-	-
802.11n MCS0 HT40	-	-	-	7.5	12.5	9.5

Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19.5	21	19.5	-	-	-
802.11g	15	23	15	-	-	-
802.11n MCS0 HT20	14.5	22.5	14.5	-	-	-
802.11n MCS0 HT40	-	-	-	11.5	15	12

Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	21	21	20.5	-	-	-
802.11g	13.5	23	14.5	-	-	-
802.11n MCS0 HT20	14	22	14	-	-	-
802.11n MCS0 HT40	-	-	-	9.5	14.5	11

Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19	20	20	-	-	-
802.11g	16.5	23	16.5	-	-	-
802.11n MCS0 HT20	15.5	23	16.5	-	-	-
802.11n MCS0 HT40	-	-	-	13	16	12

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100	0.00	0.01
802.11g	2.060	2.150	95.81	0.19	0.49
802.11n MCS0 HT20	5.000	5.096	98.12	0.08	0.01
802.11n MCS0 HT40	2.380	2.480	95.97	0.18	0.42




3.12.1. AC Power Line Conduction Emissions Test Configuration

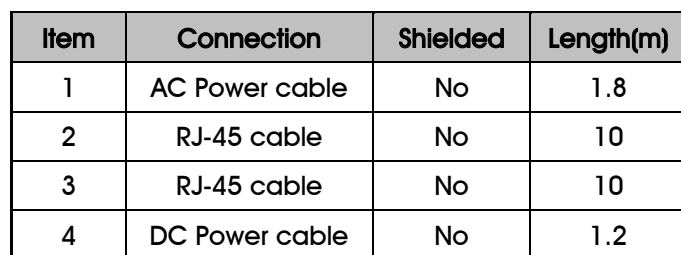


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

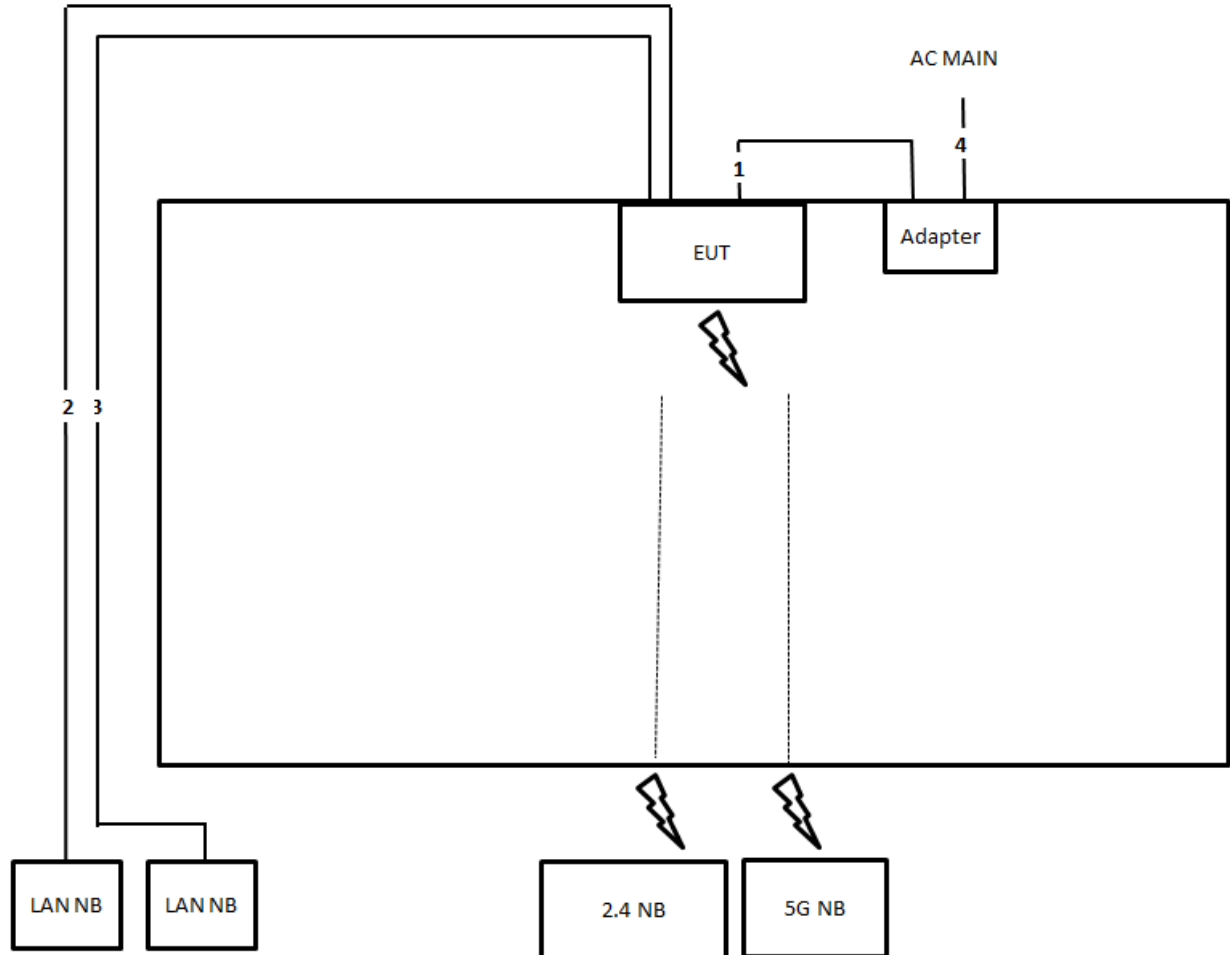

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	RJ-45 cable	No	10
4	AC Power cable	No	1.8

Test Configuration: above 1GHz

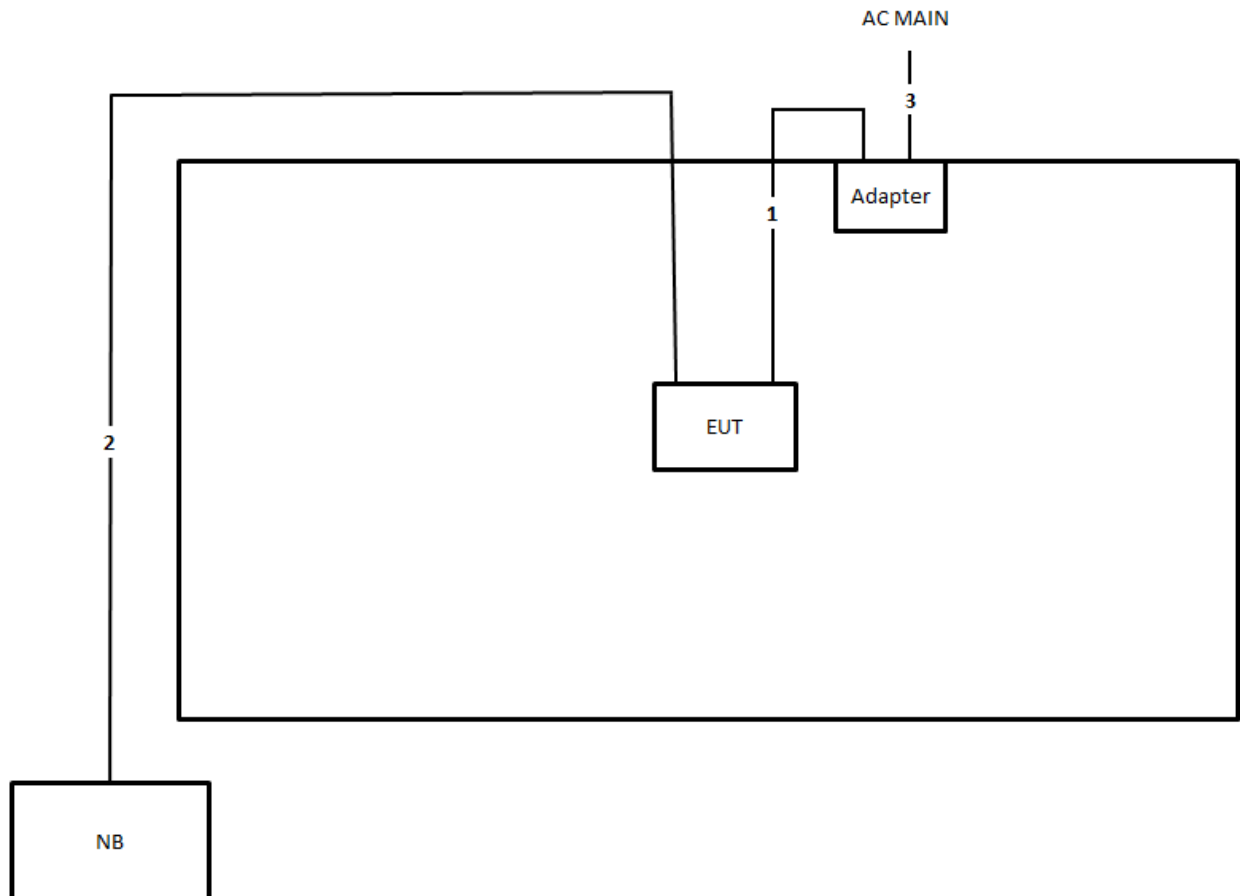

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	AC Power cable	No	1.8

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

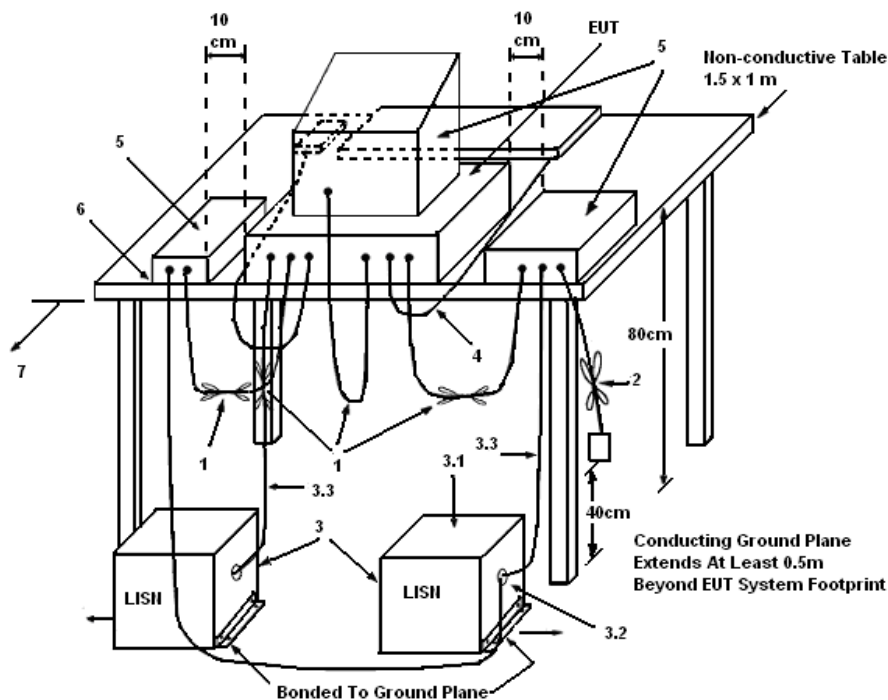

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	58%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

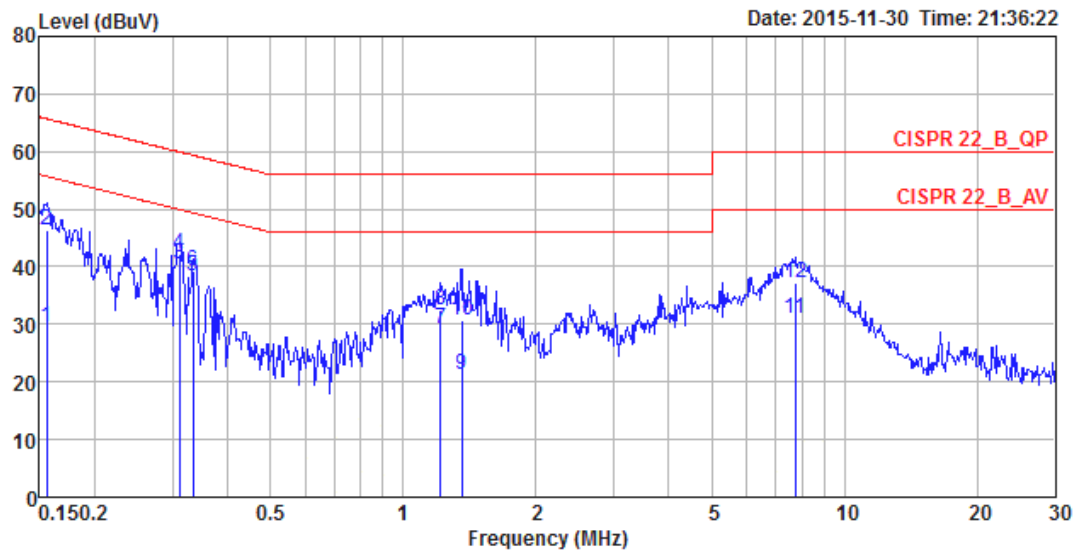

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	29.44	-26.25	55.69	19.49	9.93	0.02	LINE	Average
2	0.1557	46.44	-19.25	65.69	36.49	9.93	0.02	LINE	QP
3	0.3116	40.33	-9.60	49.93	30.36	9.93	0.04	LINE	Average
4	0.3116	42.23	-17.70	59.93	32.26	9.93	0.04	LINE	QP
5	0.3338	38.35	-11.00	49.35	28.38	9.93	0.04	LINE	Average
6	0.3338	39.29	-20.06	59.35	29.32	9.93	0.04	LINE	QP
7	1.2162	29.29	-16.71	46.00	19.27	9.97	0.05	LINE	Average
8	1.2162	32.49	-23.51	56.00	22.47	9.97	0.05	LINE	QP
9	1.3593	21.40	-24.60	46.00	11.38	9.97	0.05	LINE	Average
10	1.3593	30.60	-25.40	56.00	20.58	9.97	0.05	LINE	QP
11	7.7278	31.10	-18.90	50.00	20.82	10.13	0.15	LINE	Average
12	7.7278	37.22	-22.78	60.00	26.94	10.13	0.15	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

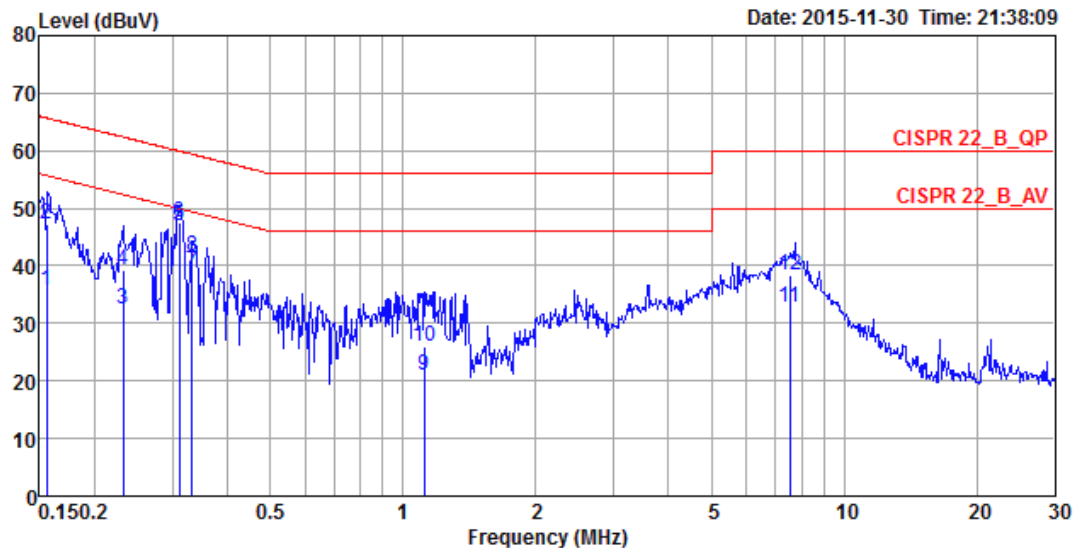

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	35.77	-19.92	55.69	25.97	9.78	0.02	NEUTRAL	Average
2	0.1557	47.34	-18.35	65.69	37.54	9.78	0.02	NEUTRAL	QP
3	0.2316	32.40	-19.99	52.39	22.58	9.79	0.03	NEUTRAL	Average
4	0.2316	39.12	-23.27	62.39	29.30	9.79	0.03	NEUTRAL	QP
5	0.3116	46.87	-3.06	49.93	37.04	9.79	0.04	NEUTRAL	Average
6	0.3116	47.56	-12.37	59.93	37.73	9.79	0.04	NEUTRAL	QP
7	0.3321	38.91	-10.49	49.40	29.08	9.79	0.04	NEUTRAL	Average
8	0.3321	41.56	-17.84	59.40	31.73	9.79	0.04	NEUTRAL	QP
9	1.1173	20.91	-25.09	46.00	11.05	9.81	0.05	NEUTRAL	Average
10	1.1173	25.86	-30.14	56.00	16.00	9.81	0.05	NEUTRAL	QP
11	7.5258	32.84	-17.16	50.00	22.72	9.97	0.15	NEUTRAL	Average
12	7.5258	38.45	-21.55	60.00	28.33	9.97	0.15	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

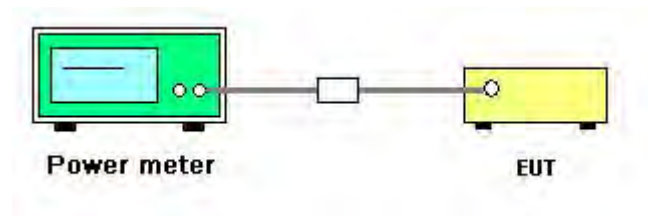

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 10, 2015
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	21.43	21.52	21.83	21.10	27.50	30.00	Complies
	2437 MHz	21.73	21.57	21.11	20.66	27.31	30.00	Complies
	2462 MHz	20.79	20.85	20.38	19.84	26.50	30.00	Complies
802.11g	2412 MHz	14.01	13.92	14.66	14.11	20.21	30.00	Complies
	2437 MHz	22.03	21.82	22.06	21.81	27.95	30.00	Complies
	2462 MHz	14.58	14.27	13.99	13.49	20.12	30.00	Complies
802.11n MCS0 HT20	2412 MHz	14.12	14.22	14.59	14.42	20.36	30.00	Complies
	2437 MHz	21.86	22.61	21.57	22.23	28.11	30.00	Complies
	2462 MHz	14.93	15.02	14.96	14.69	20.92	30.00	Complies
802.11n MCS0 HT40	2422 MHz	9.57	10.42	9.97	10.58	16.17	30.00	Complies
	2437 MHz	15.32	15.21	15.15	14.78	21.14	30.00	Complies
	2452 MHz	11.71	11.52	11.42	11.01	17.44	30.00	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 23, 2015 ~ Nov. 05, 2015
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.99	20.03	20.31	19.55	26.00	28.50	Complies
	2437 MHz	20.12	21.07	20.17	21.19	26.69	28.50	Complies
	2462 MHz	19.12	19.05	19.62	19.13	25.26	28.50	Complies
802.11g	2412 MHz	13.02	14.15	13.56	13.73	19.65	28.50	Complies
	2437 MHz	20.72	21.19	20.84	21.25	27.03	28.50	Complies
	2462 MHz	13.01	12.95	12.65	13.07	18.94	28.50	Complies
802.11n MCS0 HT20	2412 MHz	12.14	13.06	13.48	12.78	18.91	28.50	Complies
	2437 MHz	20.45	21.31	20.85	21.33	27.02	28.50	Complies
	2462 MHz	12.18	13.38	12.34	12.67	18.69	28.50	Complies
802.11n MCS0 HT40	2422 MHz	9.57	10.42	9.97	10.58	16.17	28.50	Complies
	2437 MHz	13.34	13.72	13.39	13.97	19.63	28.50	Complies
	2452 MHz	10.05	10.58	10.27	10.78	16.45	28.50	Complies

Note: Antenna gain=7.50dBi > 6dBi, So Limit =30-(7.50-6)=28.50dBm.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 11, 2015
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.99	20.03	20.31	19.55	26.00	30.00	Complies
	2437 MHz	21.73	21.57	21.11	20.66	27.31	30.00	Complies
	2462 MHz	20.79	20.85	20.38	19.84	26.50	30.00	Complies
802.11g	2412 MHz	14.01	13.92	14.66	14.11	20.21	30.00	Complies
	2437 MHz	22.03	21.82	22.06	21.81	27.95	30.00	Complies
	2462 MHz	14.35	14.02	13.71	13.43	19.91	30.00	Complies
802.11n MCS0 HT20	2412 MHz	13.77	13.50	13.65	13.21	19.56	30.00	Complies
	2437 MHz	21.86	22.61	21.57	22.23	28.11	30.00	Complies
	2462 MHz	13.38	13.54	13.27	13.17	19.36	30.00	Complies
802.11n MCS0 HT40	2422 MHz	9.57	10.42	9.97	10.58	16.17	30.00	Complies
	2437 MHz	14.88	14.76	14.67	14.28	20.67	30.00	Complies
	2452 MHz	11.71	11.52	11.42	11.01	17.44	30.00	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 23, 2015 ~ Nov. 10, 2015
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	17.31	16.66	17.98	17.42	23.39	25.50	Complies
	2437 MHz	18.45	17.46	18.48	18.08	24.16	25.50	Complies
	2462 MHz	16.70	16.06	17.31	16.47	22.68	25.50	Complies
802.11g	2412 MHz	13.10	12.33	13.57	13.09	19.07	25.50	Complies
	2437 MHz	19.20	19.33	19.21	18.92	25.19	25.50	Complies
	2462 MHz	13.31	13.22	13.16	12.87	19.16	25.50	Complies
802.11n MCS0 HT20	2412 MHz	12.87	12.58	13.43	12.86	18.97	25.50	Complies
	2437 MHz	18.87	18.79	18.90	18.77	24.85	25.50	Complies
	2462 MHz	11.83	11.76	11.97	11.69	17.83	25.50	Complies
802.11n MCS0 HT40	2422 MHz	8.17	7.42	8.20	8.29	14.05	25.50	Complies
	2437 MHz	13.04	12.99	12.87	12.87	18.96	25.50	Complies
	2452 MHz	10.20	9.79	9.92	9.85	15.96	25.50	Complies

Note: Antenna gain=10.50dBi > 6dBi, So Limit =30-(10.50-6)=25.50dBm.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 06, 2015
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.99	20.03	20.31	19.55	26.00	30.00	Complies
	2437 MHz	21.73	21.57	21.11	20.66	27.31	30.00	Complies
	2462 MHz	19.12	19.05	19.62	19.13	25.26	30.00	Complies
802.11g	2412 MHz	14.01	13.92	14.66	14.11	20.21	30.00	Complies
	2437 MHz	22.03	21.82	22.06	21.81	27.95	30.00	Complies
	2462 MHz	14.58	14.27	13.99	13.49	20.12	30.00	Complies
802.11n MCS0 HT20	2412 MHz	13.61	13.58	14.09	13.92	19.83	30.00	Complies
	2437 MHz	21.86	22.61	21.57	22.23	28.11	30.00	Complies
	2462 MHz	13.38	13.54	13.27	13.17	19.36	30.00	Complies
802.11n MCS0 HT40	2422 MHz	11.26	11.43	11.41	10.88	17.27	30.00	Complies
	2437 MHz	14.88	14.76	14.67	14.28	20.67	30.00	Complies
	2452 MHz	11.71	11.52	11.42	11.01	17.44	30.00	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 06, 2015
Test Mode	Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.63	21.86	21.02	20.89	27.15	30.00	Complies
	2437 MHz	21.73	21.57	21.11	20.66	27.31	30.00	Complies
	2462 MHz	20.75	20.98	20.14	20.03	26.51	30.00	Complies
802.11g	2412 MHz	13.28	13.23	12.54	12.76	18.98	30.00	Complies
	2437 MHz	21.65	22.46	21.84	22.25	28.08	30.00	Complies
	2462 MHz	13.64	13.56	13.25	13.64	19.55	30.00	Complies
802.11n MCS0 HT20	2412 MHz	12.64	13.57	12.98	13.24	19.14	30.00	Complies
	2437 MHz	20.45	21.31	20.85	21.33	27.02	30.00	Complies
	2462 MHz	12.73	12.95	12.83	13.27	18.97	30.00	Complies
802.11n MCS0 HT40	2422 MHz	8.74	9.42	9.17	9.53	15.25	30.00	Complies
	2437 MHz	13.82	14.33	13.98	14.58	20.21	30.00	Complies
	2452 MHz	10.05	10.58	10.27	10.78	16.45	30.00	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 20, 2015
Test Mode	Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.24	19.62	18.78	18.61	25.10	30.00	Complies
	2437 MHz	20.03	20.62	19.73	19.58	26.03	30.00	Complies
	2462 MHz	19.84	20.21	19.66	19.63	25.86	30.00	Complies
802.11g	2412 MHz	16.26	15.97	15.85	15.48	21.92	30.00	Complies
	2437 MHz	22.64	22.58	21.85	22.14	28.34	30.00	Complies
	2462 MHz	15.89	16.17	15.43	15.34	21.74	30.00	Complies
802.11n MCS0 HT20	2412 MHz	15.12	14.78	14.38	14.09	20.63	30.00	Complies
	2437 MHz	22.28	22.37	21.72	21.95	28.11	30.00	Complies
	2462 MHz	15.68	15.92	15.47	15.39	21.64	30.00	Complies
802.11n MCS0 HT40	2422 MHz	13.32	13.19	12.38	12.87	18.98	30.00	Complies
	2437 MHz	16.05	15.89	15.54	15.71	21.82	30.00	Complies
	2452 MHz	11.89	12.03	11.66	11.21	17.73	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

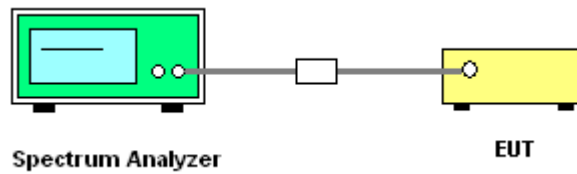

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-3.49	-3.72	-4.99	-4.82	1.82	6.99	Complies
	2437 MHz	-4.78	-6.71	-4.30	-4.96	0.92	6.99	Complies
	2462 MHz	-7.86	-4.45	-7.61	-5.91	-0.21	6.99	Complies
802.11g	2412 MHz	-11.43	-13.59	-11.53	-13.25	-6.32	6.99	Complies
	2437 MHz	-5.16	-5.68	-4.14	-5.02	1.06	6.99	Complies
	2462 MHz	-13.15	-13.21	-12.37	-12.93	-6.88	6.99	Complies
802.11n MCS0 HT20	2412 MHz	-12.74	-13.67	-13.34	-14.22	-7.44	6.99	Complies
	2437 MHz	-6.16	-6.05	-4.80	-4.92	0.58	6.99	Complies
	2462 MHz	-9.74	-12.30	-13.37	-14.26	-6.05	6.99	Complies
802.11n MCS0 HT40	2422 MHz	-20.95	-18.56	-18.92	-18.52	-13.11	6.99	Complies
	2437 MHz	-14.92	-16.55	-14.20	-15.69	-9.23	6.99	Complies
	2452 MHz	-19.21	-18.42	-18.33	-17.83	-12.40	6.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(7.01-6)=6.99dBm/3kHz.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-6.21	-7.90	-5.25	-6.43	-0.33	3.49	Complies
	2437 MHz	-5.96	-5.73	-3.45	-5.93	0.89	3.49	Complies
	2462 MHz	-7.26	-6.13	-4.57	-5.87	0.17	3.49	Complies
802.11g	2412 MHz	-14.88	-12.48	-11.02	-13.07	-6.63	3.49	Complies
	2437 MHz	-5.07	-5.76	-6.18	-5.86	0.32	3.49	Complies
	2462 MHz	-15.04	-14.12	-14.09	-14.10	-8.30	3.49	Complies
802.11n MCS0 HT20	2412 MHz	-15.17	-15.27	-14.20	-15.81	-9.05	3.49	Complies
	2437 MHz	-5.02	-6.86	-5.72	-7.16	-0.08	3.49	Complies
	2462 MHz	-15.52	-16.18	-14.38	-14.37	-9.02	3.49	Complies
802.11n MCS0 HT40	2422 MHz	-20.95	-18.56	-18.92	-18.52	-13.11	3.49	Complies
	2437 MHz	-15.82	-15.89	-16.20	-14.81	-9.63	3.49	Complies
	2452 MHz	-20.05	-19.62	-18.98	-18.98	-13.36	3.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(10.51-6)=3.49dBm/3kHz.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-6.21	-7.90	-5.25	-6.43	-0.33	5.49	Complies
	2437 MHz	-4.78	-6.71	-4.30	-4.96	0.92	5.49	Complies
	2462 MHz	-7.86	-4.45	-7.61	-5.91	-0.21	5.49	Complies
802.11g	2412 MHz	-11.43	-13.59	-11.53	-13.25	-6.32	5.49	Complies
	2437 MHz	-5.16	-5.68	-4.14	-5.02	1.06	5.49	Complies
	2462 MHz	-17.36	-18.00	-17.01	-17.44	-11.42	5.49	Complies
802.11n MCS0 HT20	2412 MHz	-18.05	-18.47	-17.32	-18.07	-11.94	5.49	Complies
	2437 MHz	-6.16	-6.05	-4.80	-4.92	0.58	5.49	Complies
	2462 MHz	-14.27	-14.47	-13.37	-12.87	-7.67	5.49	Complies
802.11n MCS0 HT40	2422 MHz	-20.95	-18.56	-18.92	-18.52	-13.11	5.49	Complies
	2437 MHz	-16.62	-14.78	-14.16	-15.06	-9.04	5.49	Complies
	2452 MHz	-19.21	-18.42	-18.33	-17.83	-12.40	5.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(8.51-6)=5.49dBm/3kHz.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-16.47	-15.64	-15.22	-16.11	-9.81	0.49	Complies
	2437 MHz	-15.30	-13.02	-15.16	-14.44	-8.36	0.49	Complies
	2462 MHz	-17.30	-16.71	-15.82	-16.74	-10.59	0.49	Complies
802.11g	2412 MHz	-21.96	-22.15	-21.24	-22.12	-15.83	0.49	Complies
	2437 MHz	-15.92	-16.28	-14.72	-16.43	-9.76	0.49	Complies
	2462 MHz	-21.87	-21.92	-22.13	-21.99	-15.96	0.49	Complies
802.11n MCS0 HT20	2412 MHz	-22.04	-21.79	-21.16	-21.85	-15.68	0.49	Complies
	2437 MHz	-21.95	-22.58	-21.01	-22.24	-15.88	0.49	Complies
	2462 MHz	-22.98	-23.23	-22.83	-22.82	-16.94	0.49	Complies
802.11n MCS0 HT40	2422 MHz	-24.34	-24.01	-22.30	-23.99	-17.56	0.49	Complies
	2437 MHz	-18.20	-18.58	-18.09	-18.84	-12.40	0.49	Complies
	2452 MHz	-21.66	-22.12	-21.48	-21.34	-15.62	0.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(13.51-6)=0.49dBm/3kHz.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-6.21	-7.90	-5.25	-6.43	-0.33	5.99	Complies
	2437 MHz	-4.78	-6.71	-4.30	-4.96	0.92	5.99	Complies
	2462 MHz	-7.26	-6.13	-4.57	-5.87	0.17	5.99	Complies
802.11g	2412 MHz	-11.43	-13.59	-11.53	-13.25	-6.32	5.99	Complies
	2437 MHz	-5.16	-5.68	-4.14	-5.02	1.06	5.99	Complies
	2462 MHz	-13.15	-13.21	-12.37	-12.93	-6.88	5.99	Complies
802.11n MCS0 HT20	2412 MHz	-13.54	-13.94	-12.63	-13.08	-7.25	5.99	Complies
	2437 MHz	-6.16	-6.05	-4.80	-4.92	0.58	5.99	Complies
	2462 MHz	-14.27	-14.47	-13.37	-12.87	-7.67	5.99	Complies
802.11n MCS0 HT40	2422 MHz	-18.27	-16.26	-17.66	-17.97	-11.45	5.99	Complies
	2437 MHz	-16.62	-14.78	-14.16	-15.06	-9.04	5.99	Complies
	2452 MHz	-19.21	-18.42	-18.33	-17.83	-12.40	5.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(8.01-6)=5.99dBm/3kHz.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-3.49	-3.72	-4.99	-4.82	1.82	3.32	Complies
	2437 MHz	-4.78	-6.71	-4.30	-4.96	0.92	3.32	Complies
	2462 MHz	-3.36	-5.50	-4.52	-5.15	1.47	3.32	Complies
802.11g	2412 MHz	-14.28	-14.84	-13.40	-14.14	-8.11	3.32	Complies
	2437 MHz	-5.16	-5.68	-4.14	-5.02	1.06	3.32	Complies
	2462 MHz	-12.52	-13.55	-13.22	-13.27	-7.10	3.32	Complies
802.11n MCS0 HT20	2412 MHz	-13.89	-13.45	-13.32	-12.42	-7.22	3.32	Complies
	2437 MHz	-6.73	-6.28	-6.88	-5.95	-0.42	3.32	Complies
	2462 MHz	-12.24	-15.28	-14.15	-14.66	-7.90	3.32	Complies
802.11n MCS0 HT40	2422 MHz	-20.08	-20.25	-20.06	-19.50	-13.94	3.32	Complies
	2437 MHz	-16.28	-15.35	-14.30	-15.20	-9.21	3.32	Complies
	2452 MHz	-20.05	-19.62	-18.98	-18.98	-13.36	3.32	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.68\text{dBi} > 6\text{dBi}$, So Limit = $8 - (10.68 - 6) = 3.32\text{dBm/3kHz}$.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-11.93	-12.20	-12.55	-12.08	-6.16	4.22	Complies
	2437 MHz	-11.76	-10.39	-11.36	-11.70	-5.25	4.22	Complies
	2462 MHz	-9.59	-10.76	-10.87	-11.56	-4.62	4.22	Complies
802.11g	2412 MHz	-17.15	-16.41	-17.62	-17.09	-11.03	4.22	Complies
	2437 MHz	-10.66	-11.08	-10.48	-11.75	-4.95	4.22	Complies
	2462 MHz	-17.36	-18.00	-17.01	-17.44	-11.42	4.22	Complies
802.11n MCS0 HT20	2412 MHz	-18.05	-18.47	-17.32	-18.07	-11.94	4.22	Complies
	2437 MHz	-10.83	-10.97	-10.44	-11.31	-4.86	4.22	Complies
	2462 MHz	-17.86	-16.92	-17.19	-18.18	-11.49	4.22	Complies
802.11n MCS0 HT40	2422 MHz	-23.20	-23.66	-22.87	-23.76	-17.34	4.22	Complies
	2437 MHz	-20.41	-20.94	-19.34	-20.78	-14.30	4.22	Complies
	2452 MHz	-24.75	-24.93	-24.27	-24.60	-18.61	4.22	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.78\text{dBi} > 6\text{dBi}$, So Limit = 8-(9.78-6)=4.22dBm/3kHz.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1



Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2



Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3




Date: 6 NOV 2015 03:05:40

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4




Date: 6 NOV 2015 03:05:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

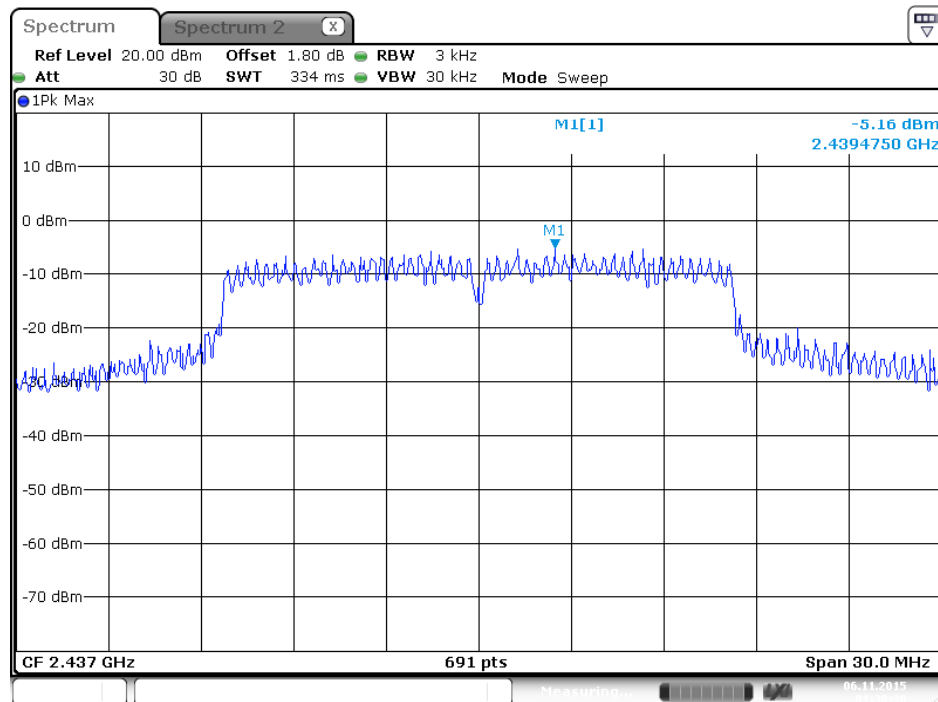


Date: 6 NOV 2015 01:38:30

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

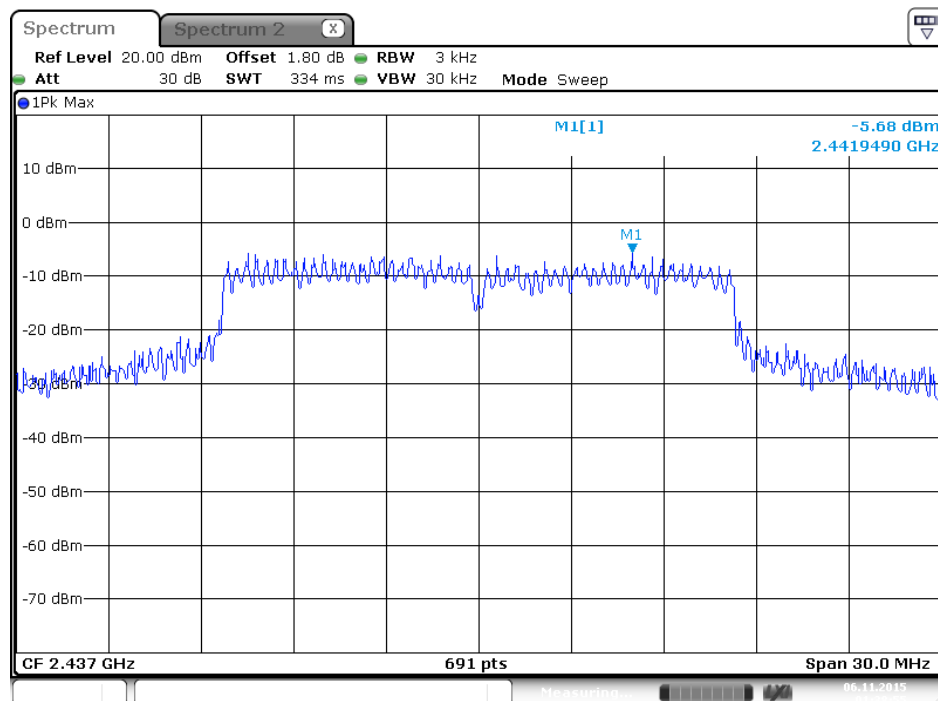


Date: 6 NOV 2015 01:38:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

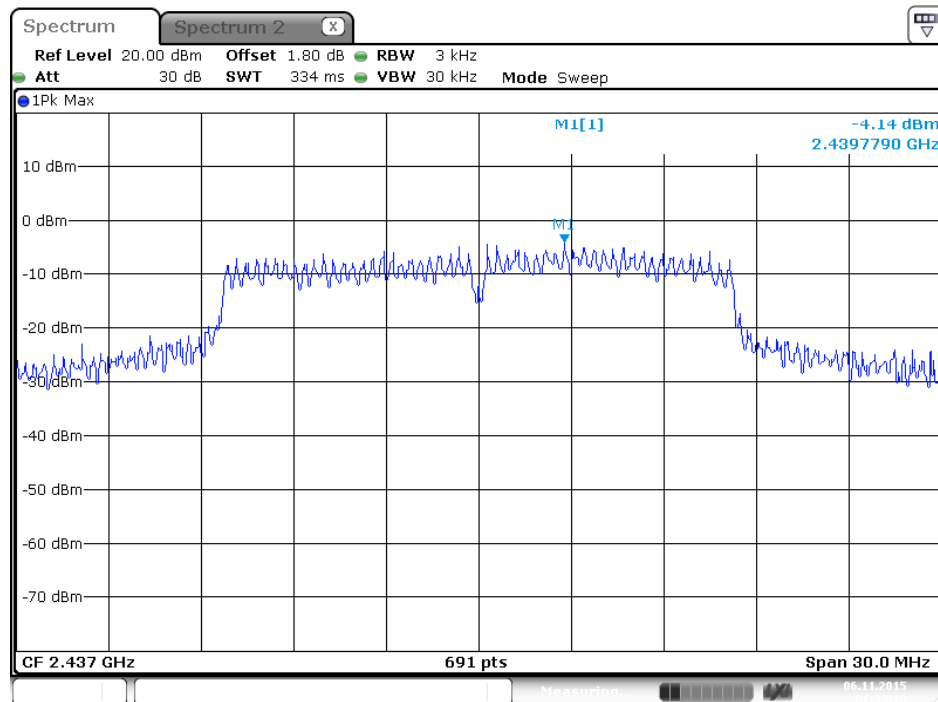


Date: 6 NOV 2015 01:39:13

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

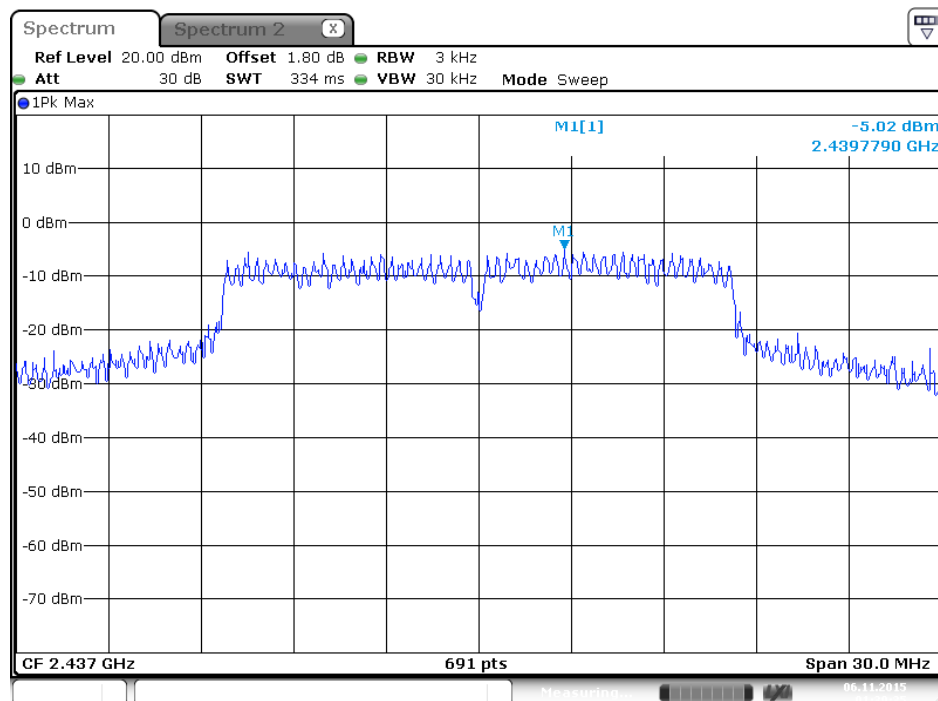


Date: 6 NOV 2015 01:39:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

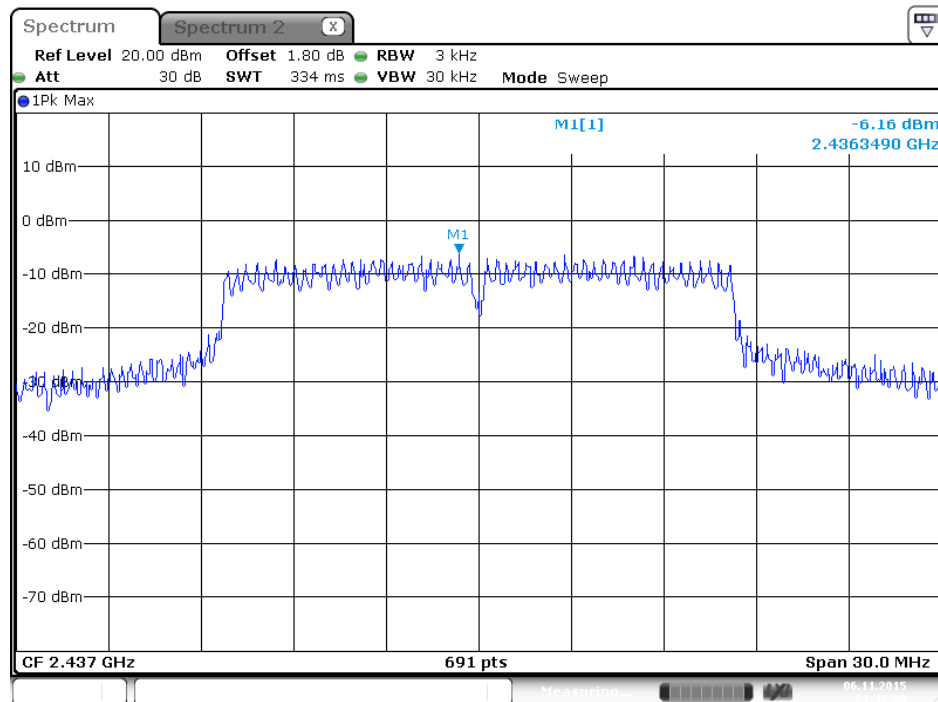


Date: 6 NOV 2015 01:46:06

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

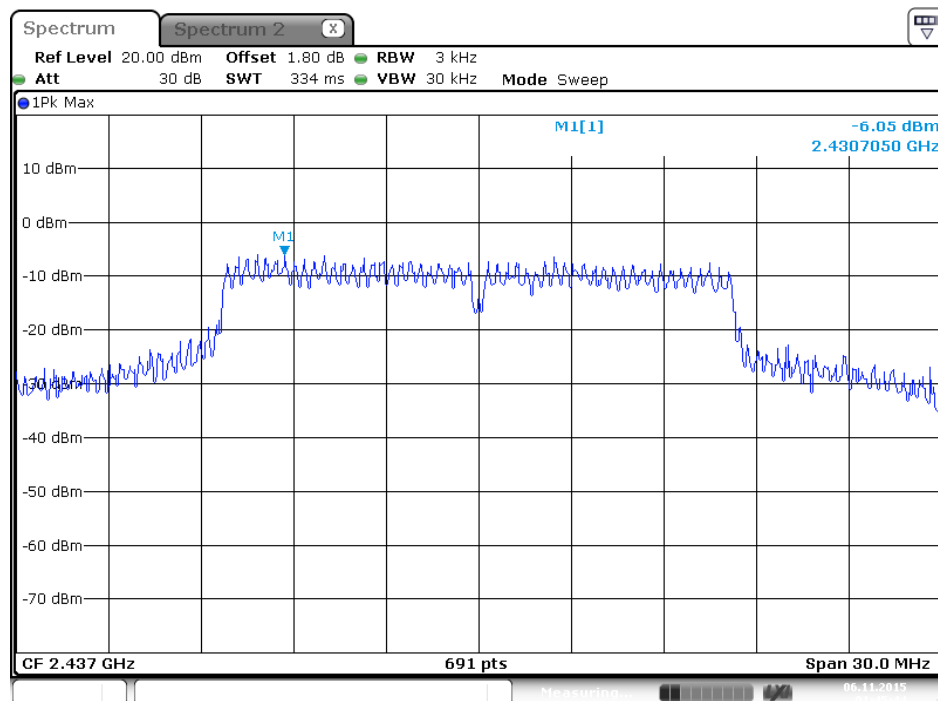


Date: 6 NOV 2015 01:45:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

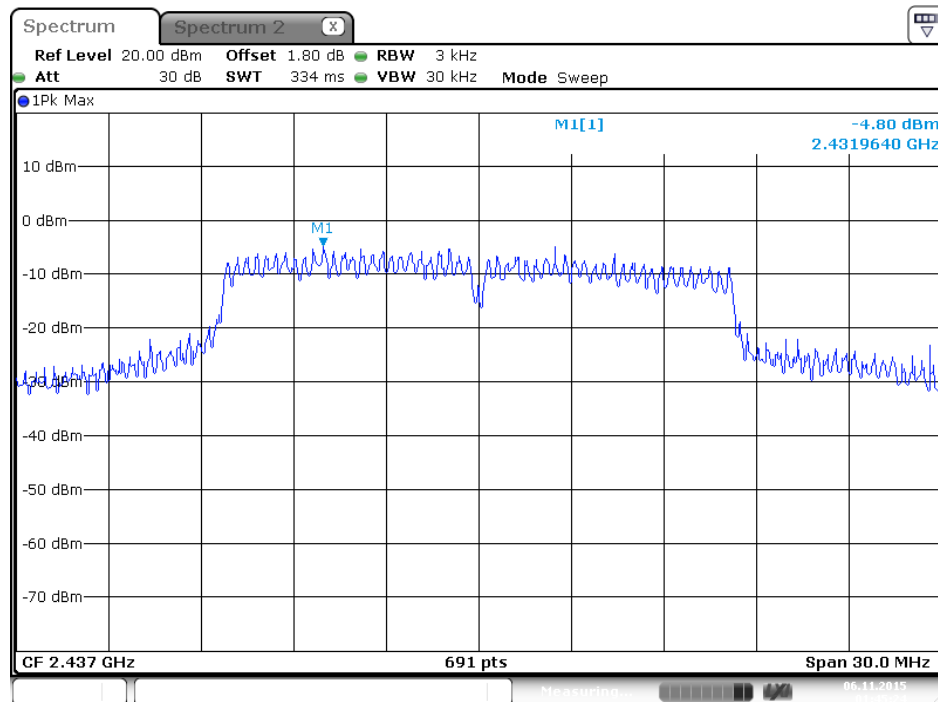


Date: 6 NOV 2015 01:45:24

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

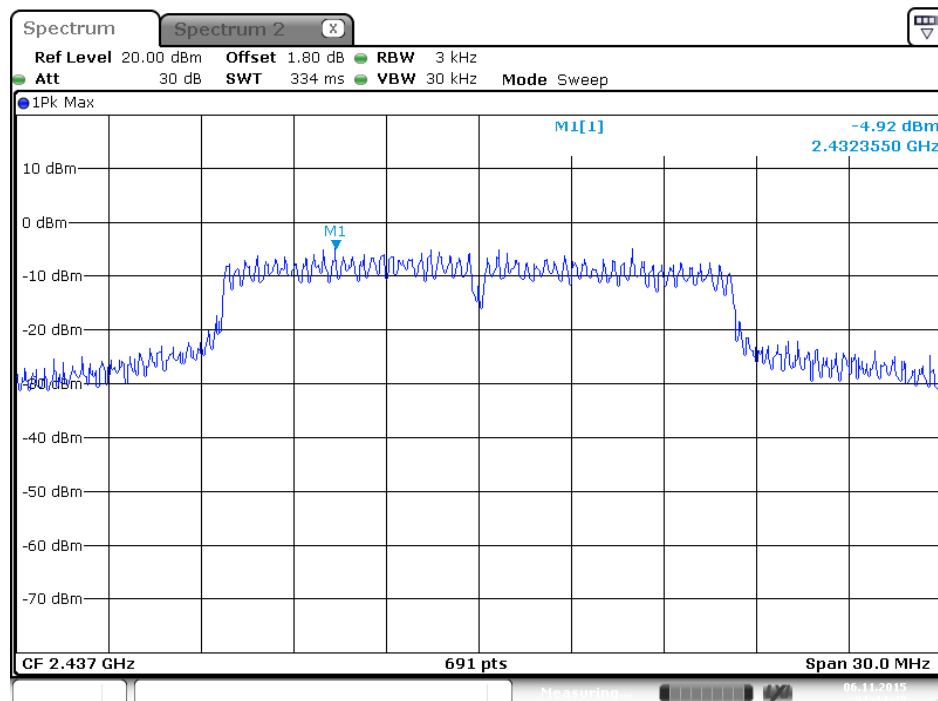


Date: 6 NOV 2015 01:44:48


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

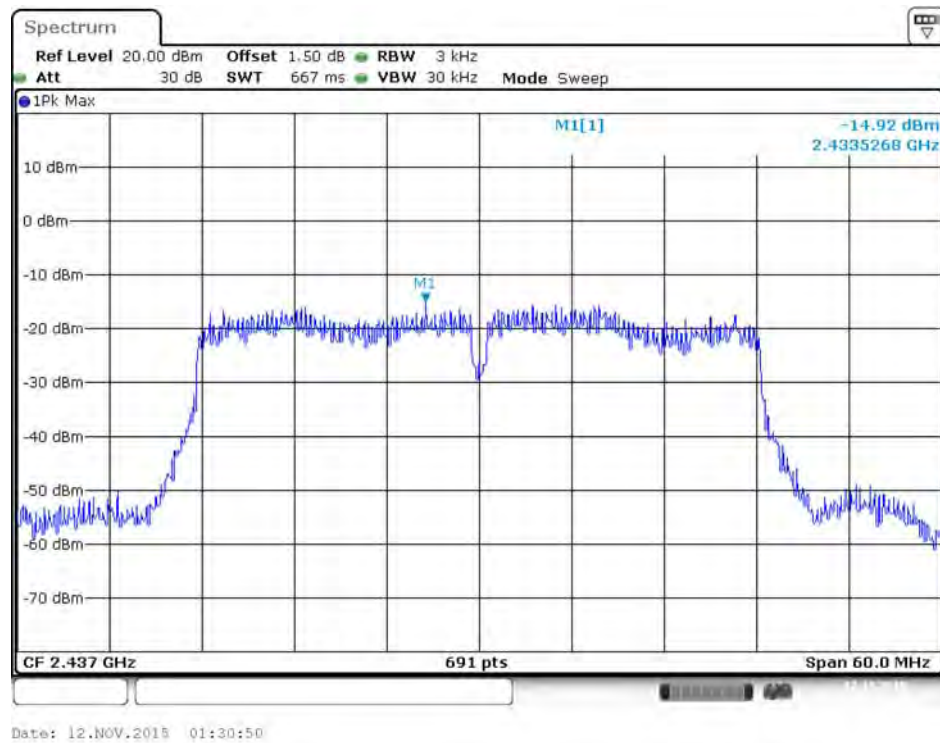


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

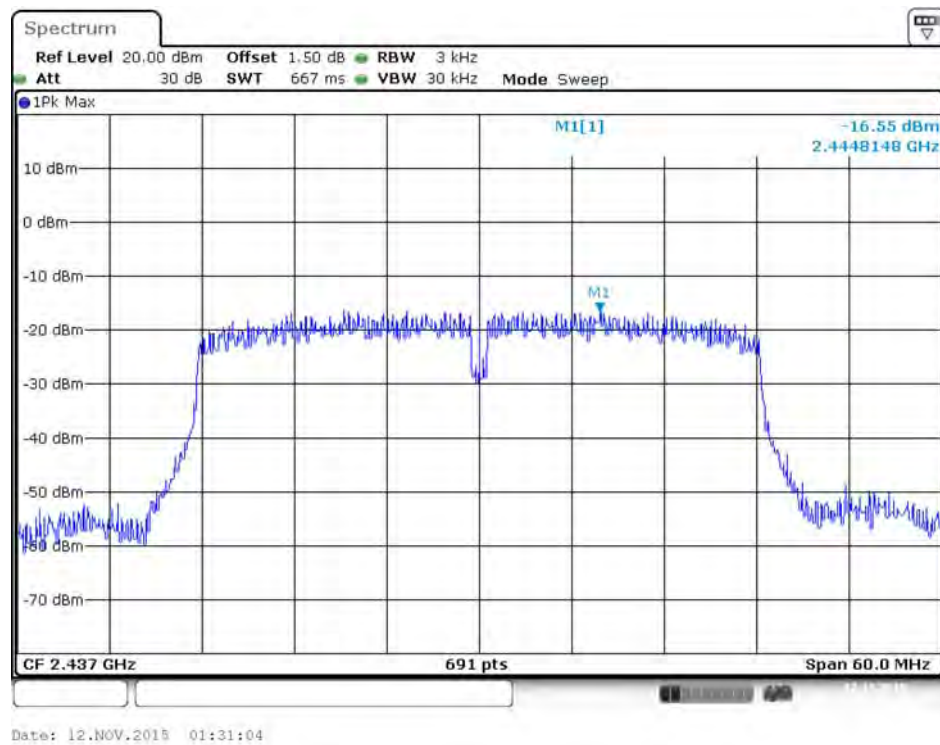

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

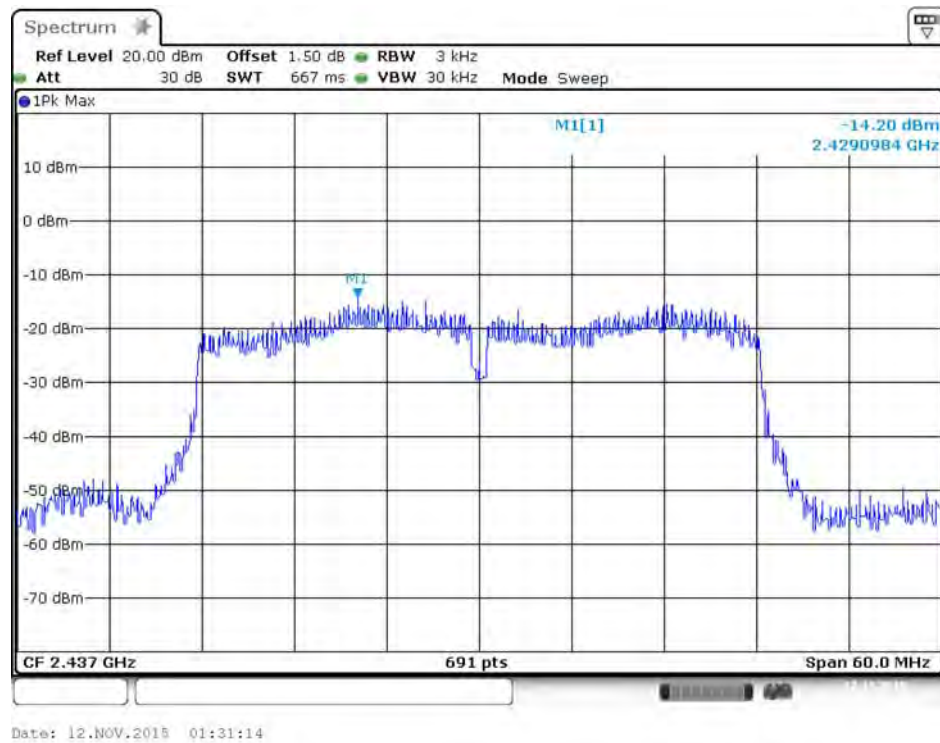


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

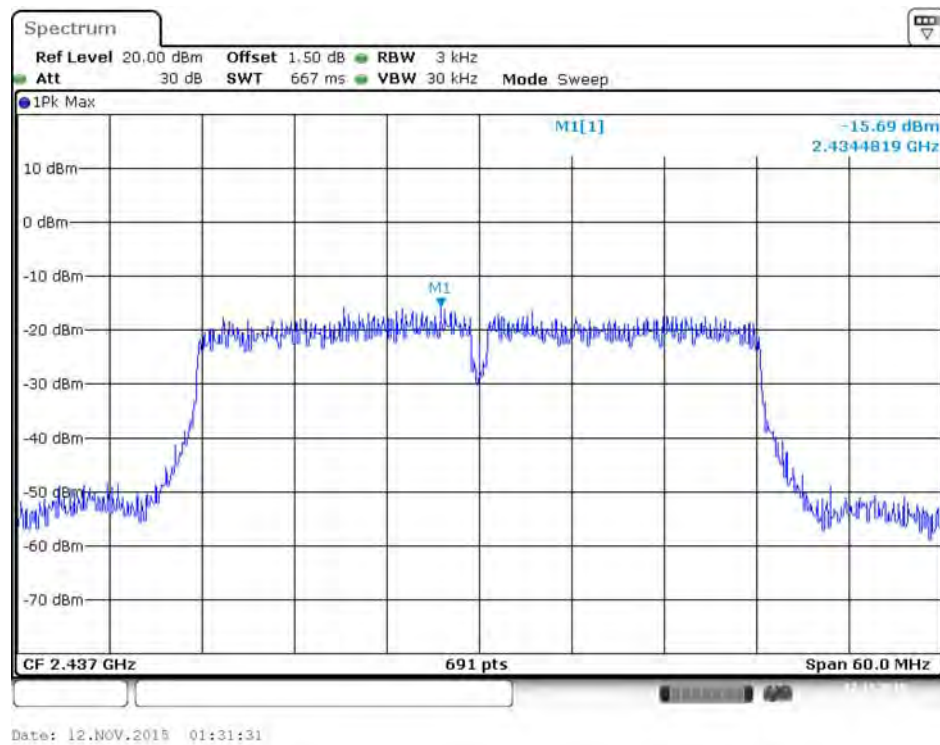

Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

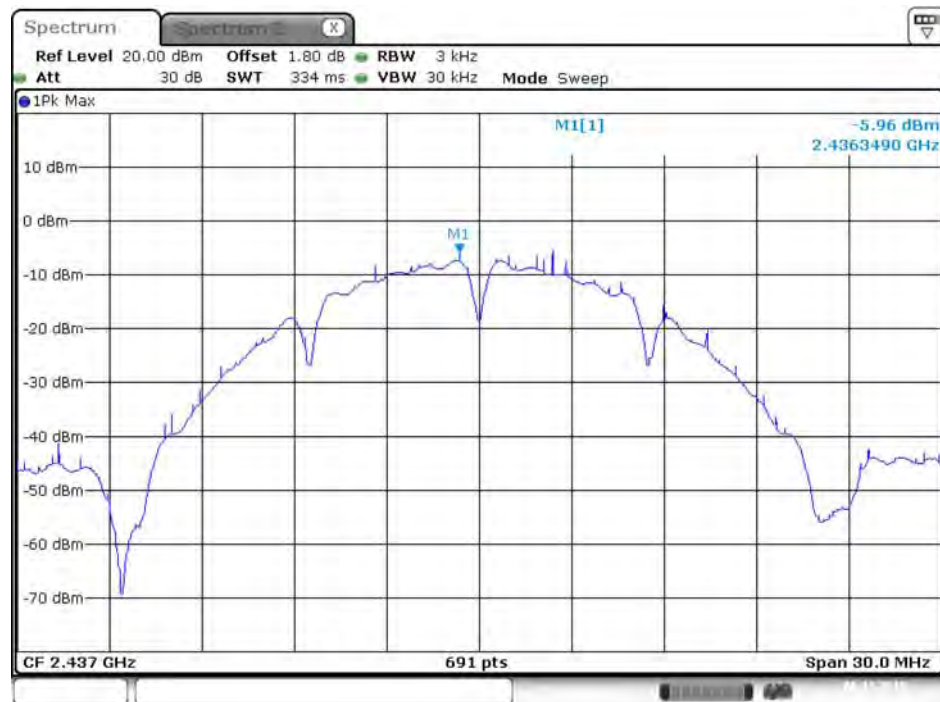

Date: 6 NOV 2015 00:08:18

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2




Date: 6 NOV 2015 00:09:01

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3




Date: 6.NOV.2015 00:10:26

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

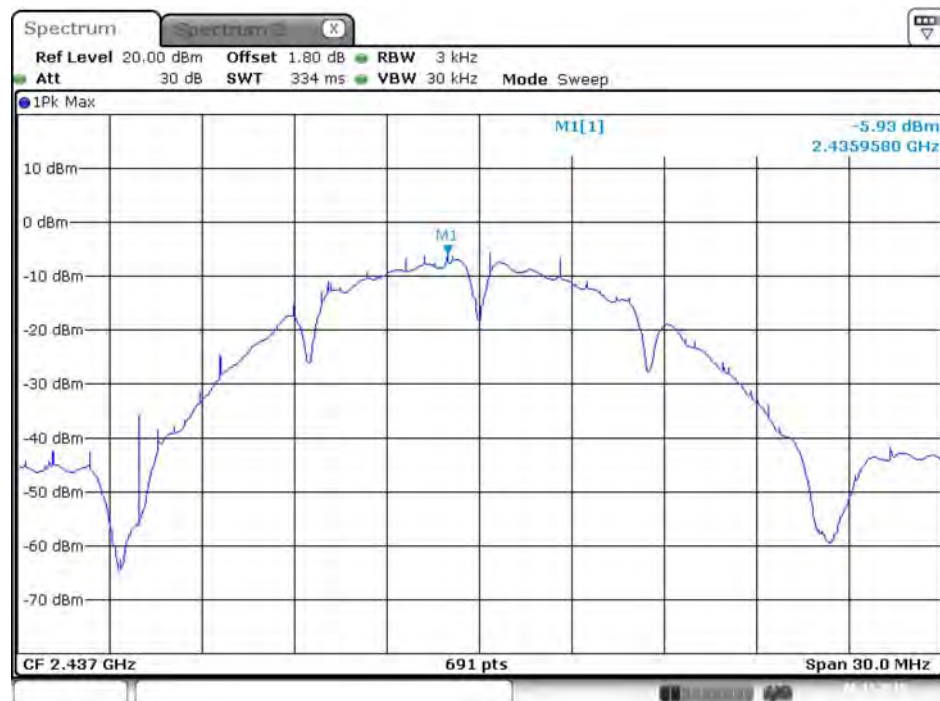


Date: 6.NOV.2015 00:10:48

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

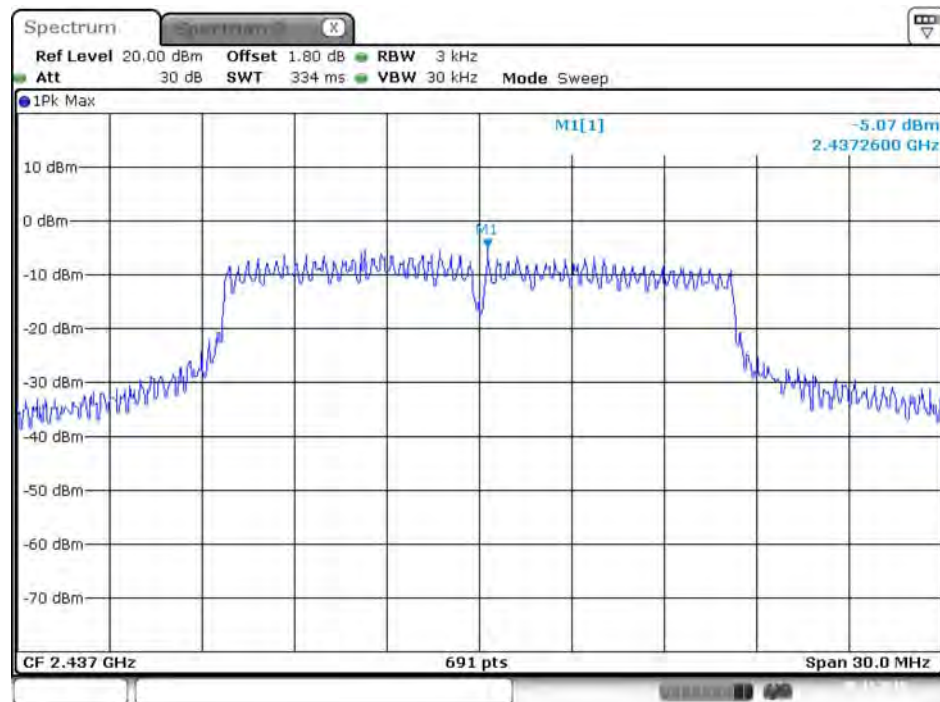


Date: 5 NOV 2015 23:59:40

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

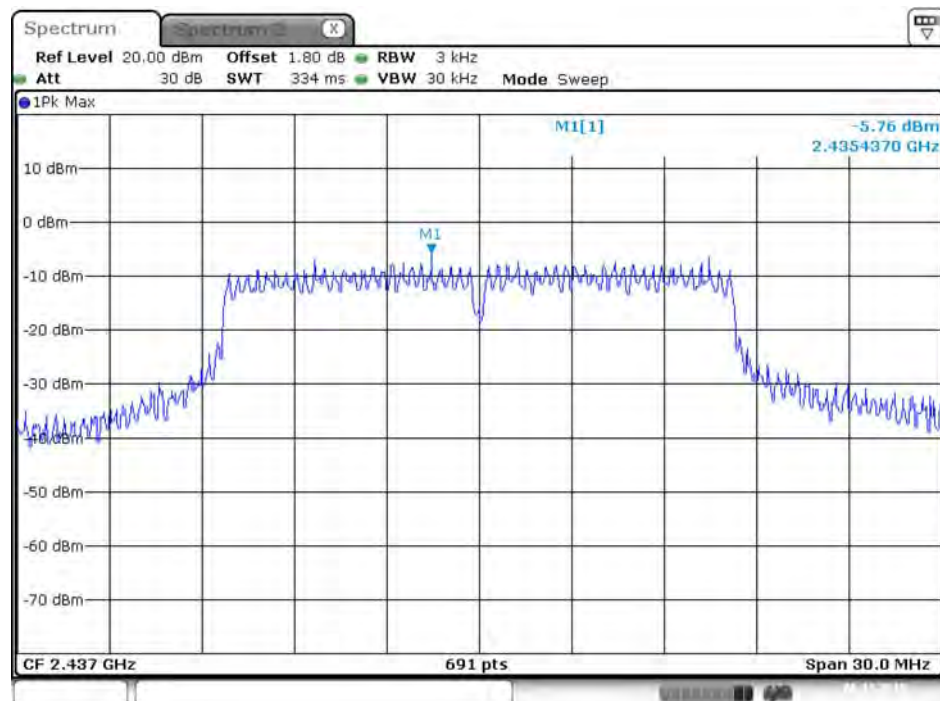


Date: 6 NOV 2015 00:00:01

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

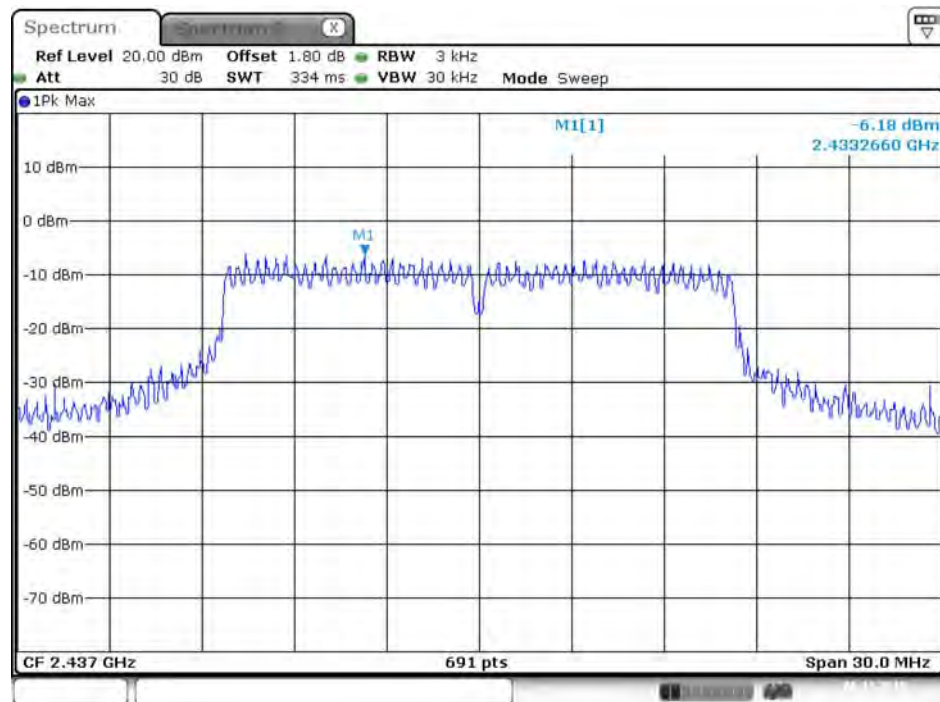


Date: 6 NOV. 2015 00:00:23

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

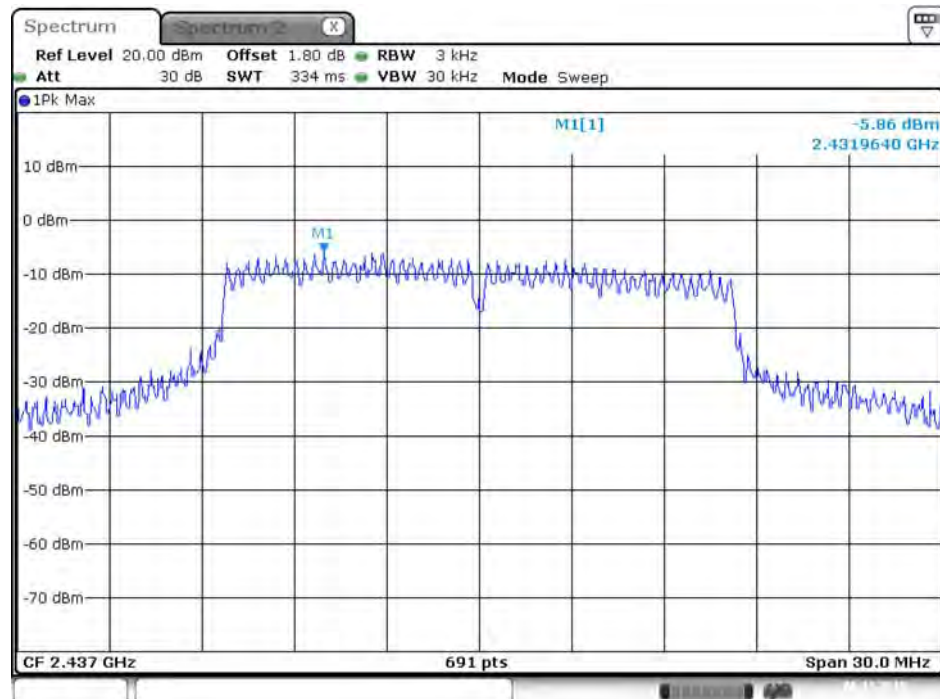


Date: 6 NOV. 2015 00:00:41


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

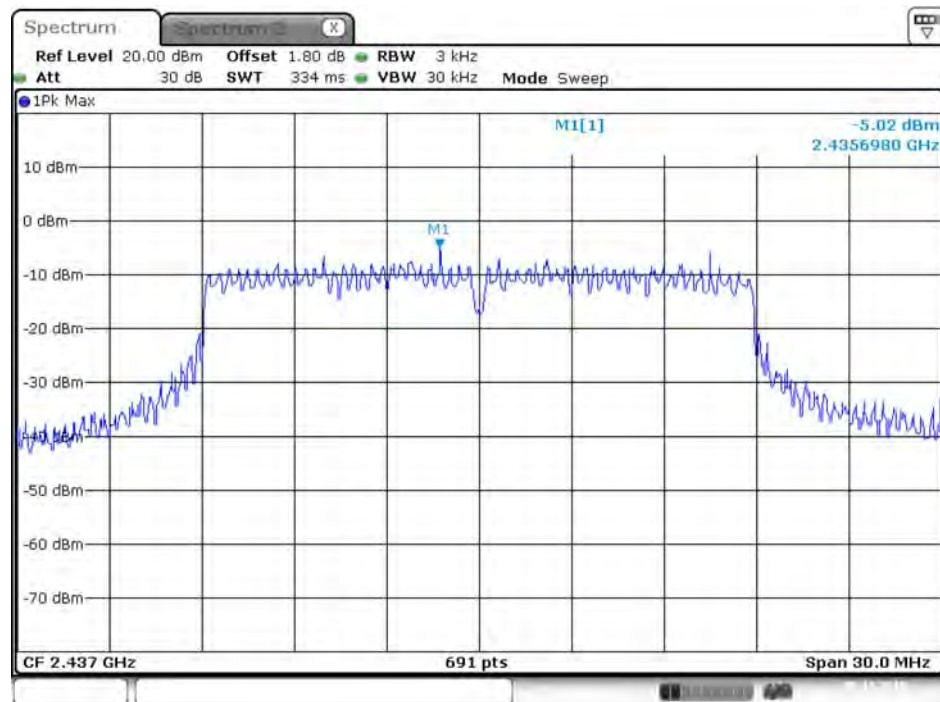

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

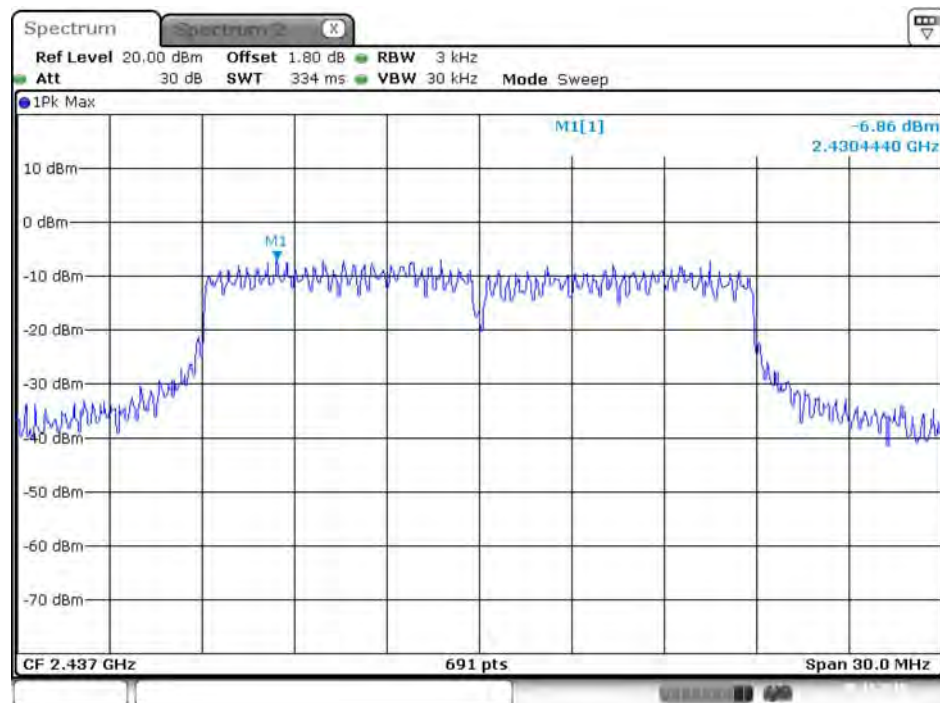


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

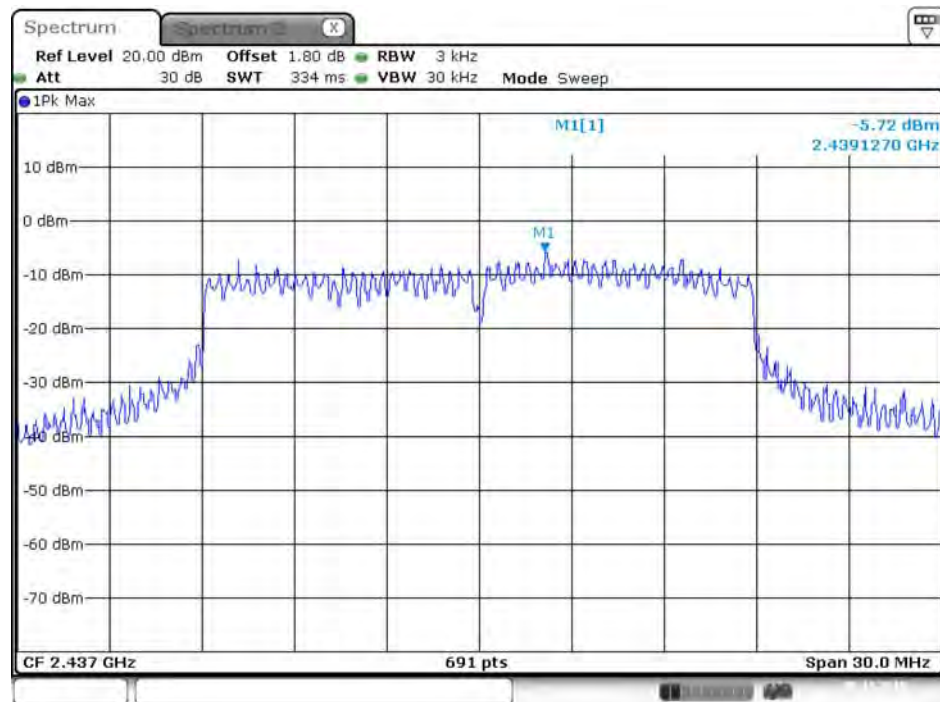


Date: 5 NOV 2015 23:52:51

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

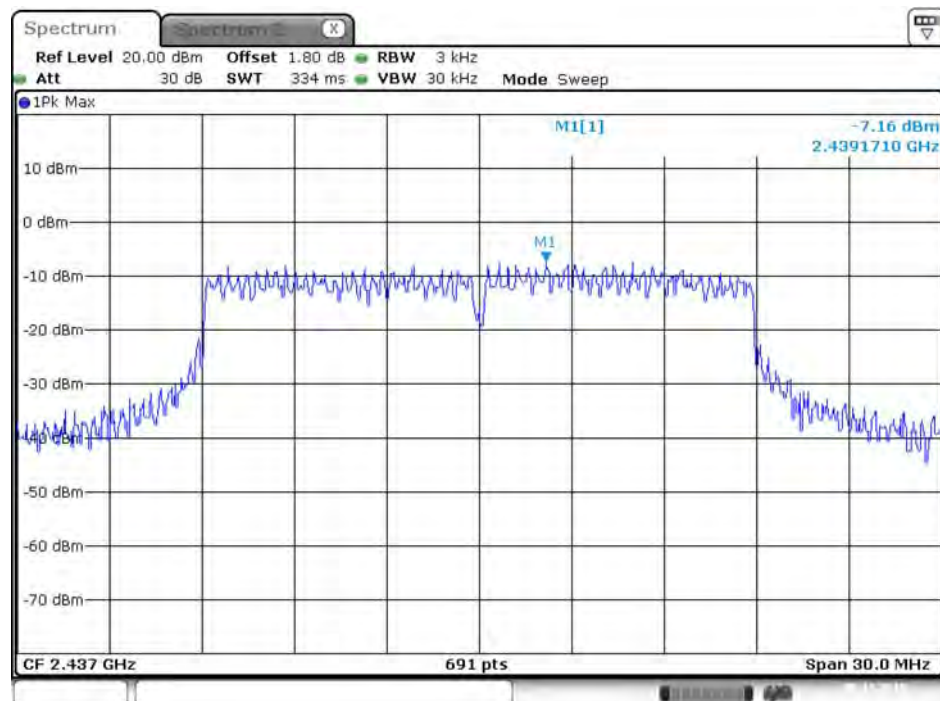


Date: 5 NOV 2015 23:52:23

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

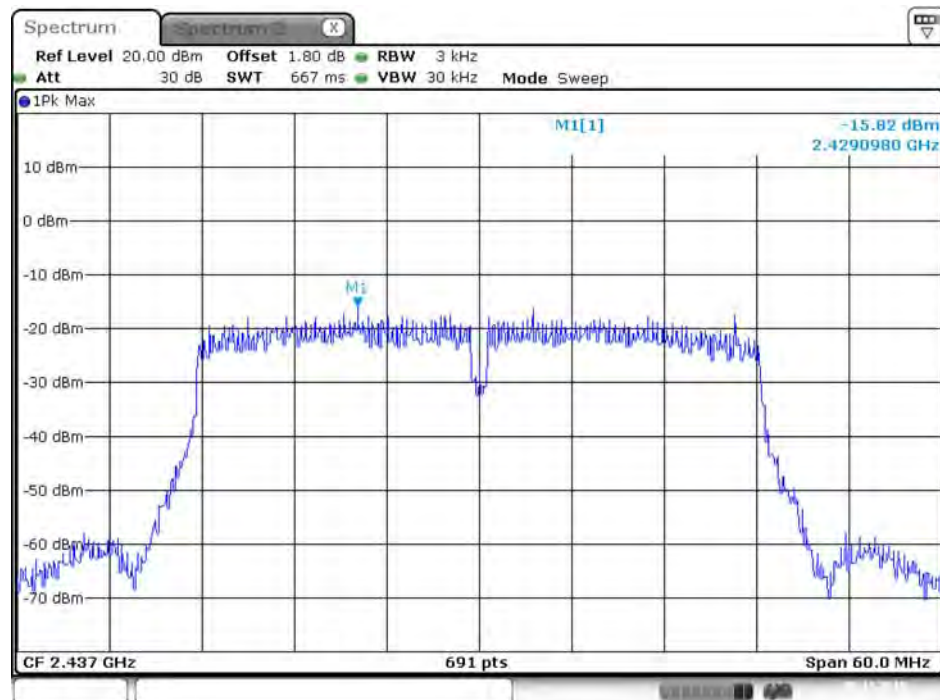


Date: 5 NOV. 2015 23:43:52

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

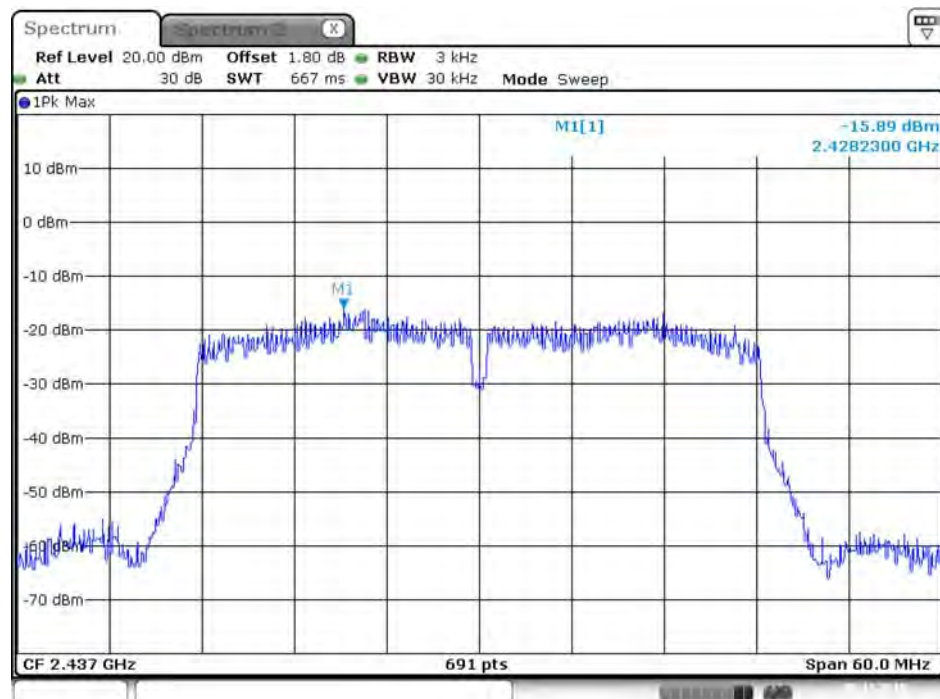


Date: 5 NOV. 2015 23:44:17

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

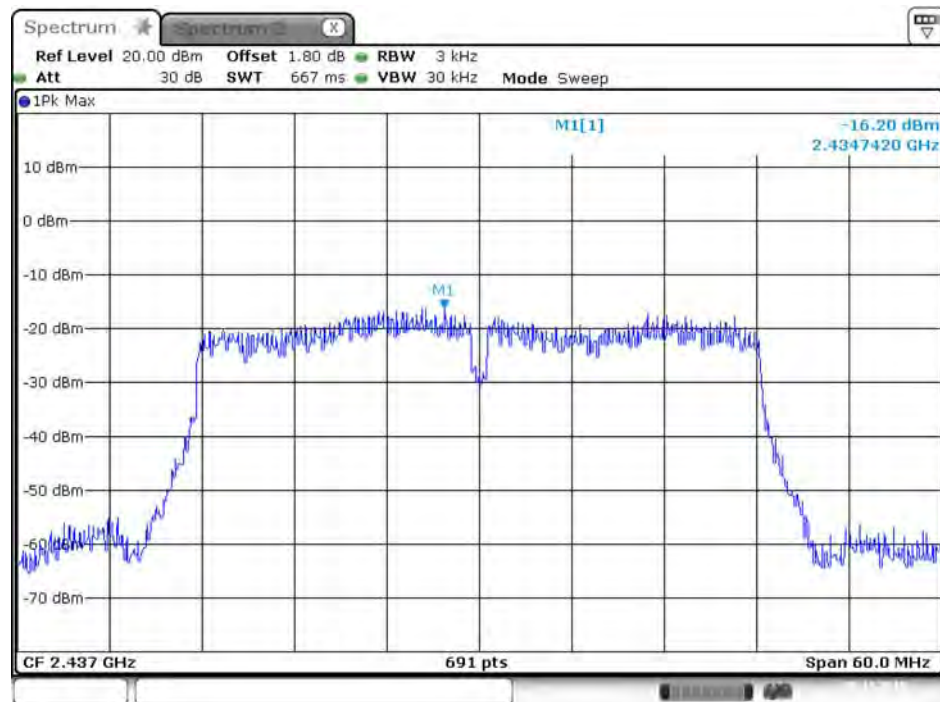

Date: 5 NOV. 2015 23:44:43


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

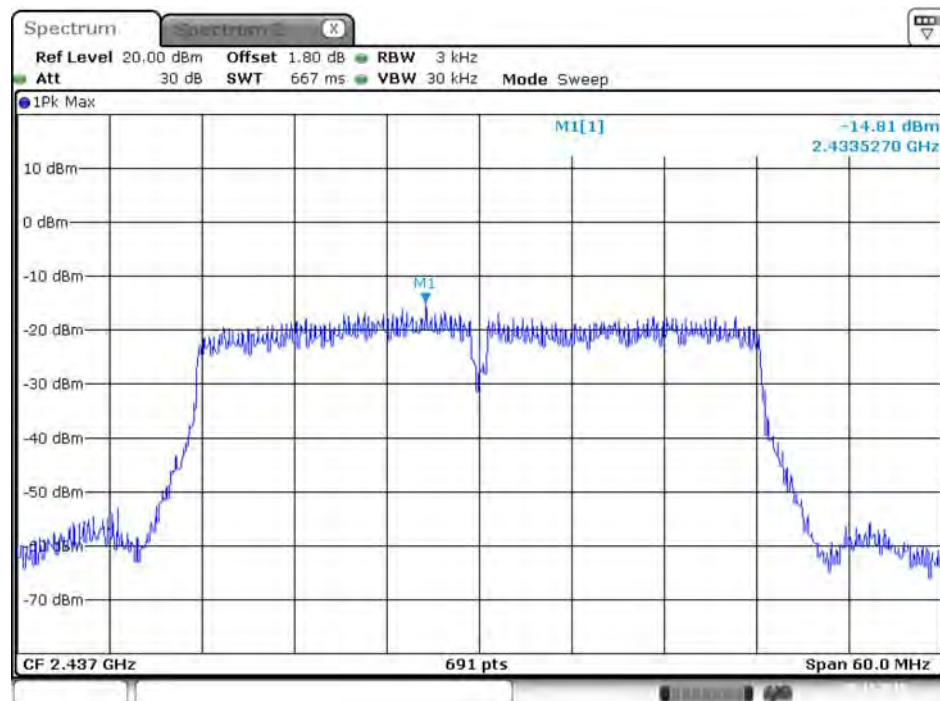

Date: 5 NOV. 2015 23:45:13


Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

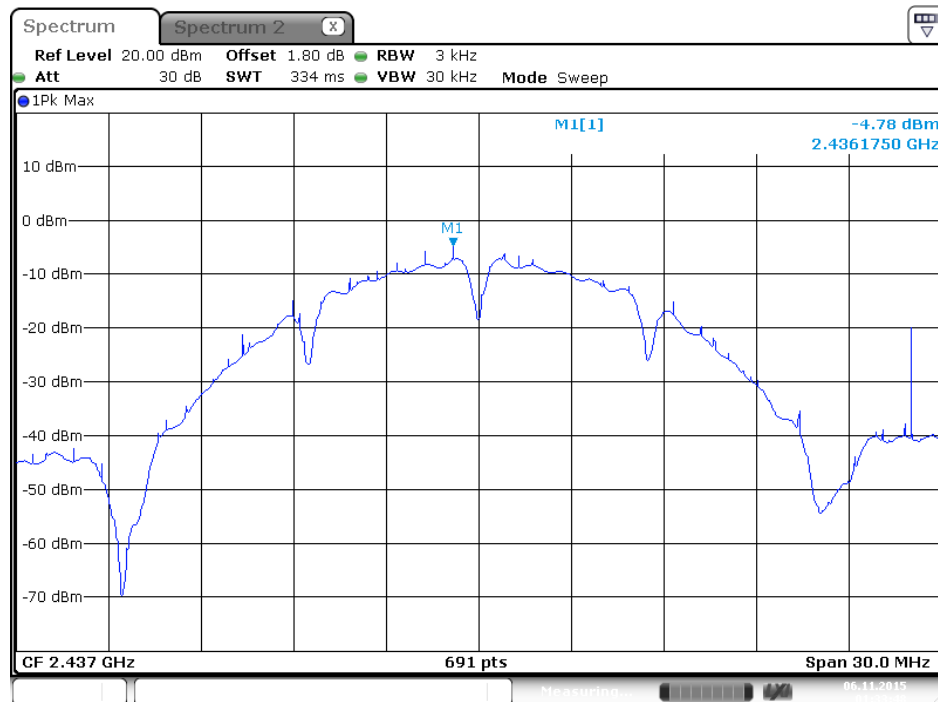


Date: 6 NOV 2015 01:33:48

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

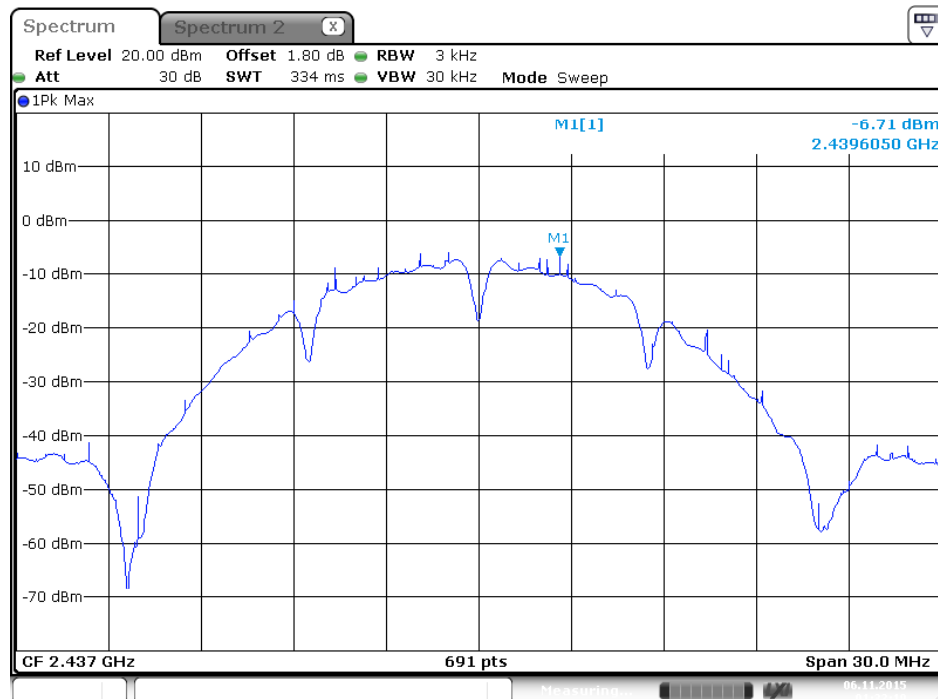


Date: 6 NOV 2015 01:32:19

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

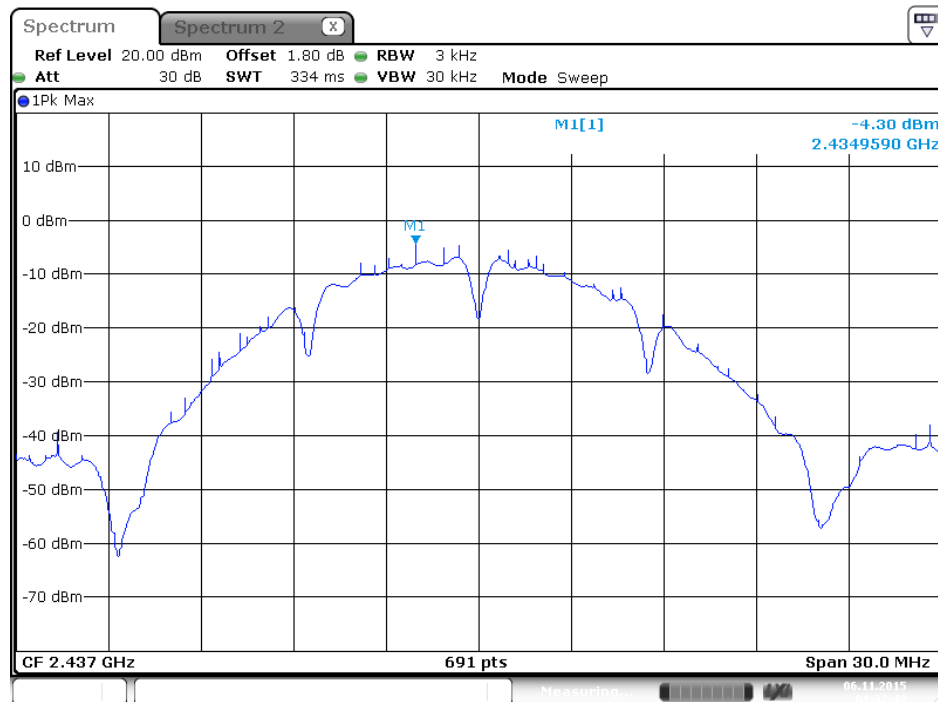


Date: 6 NOV 2015 01:32:43

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

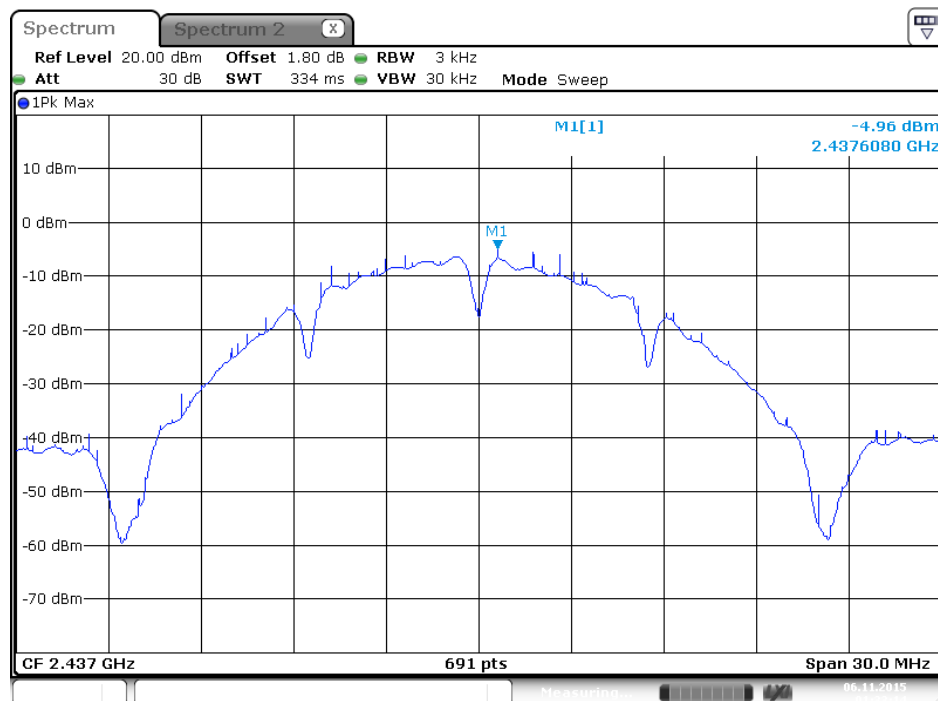


Date: 6 NOV 2015 01:33:14

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

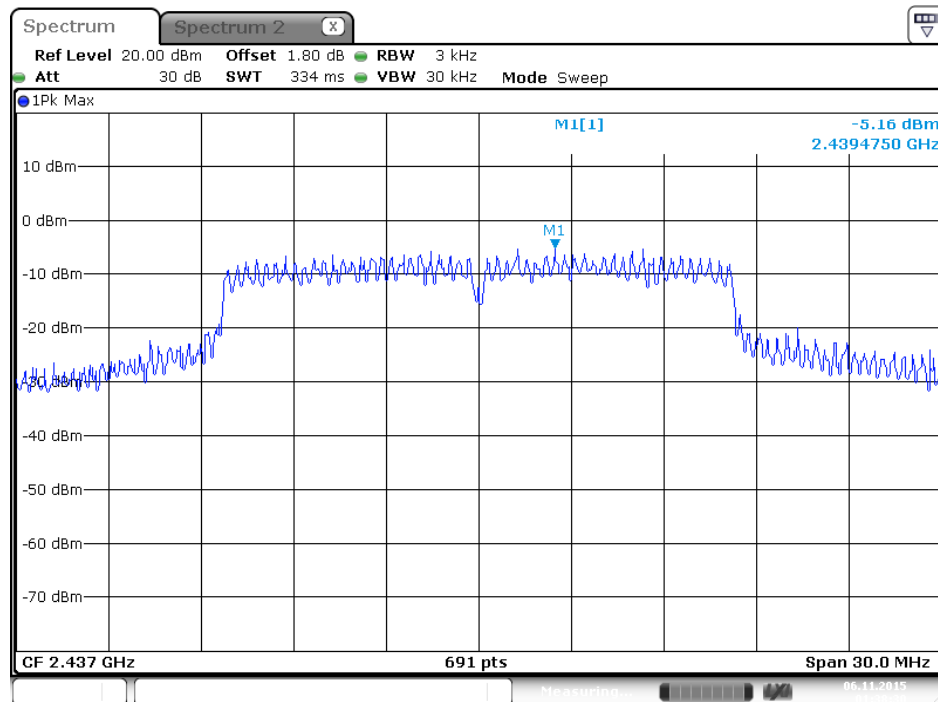


Date: 6 NOV 2015 01:38:30

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

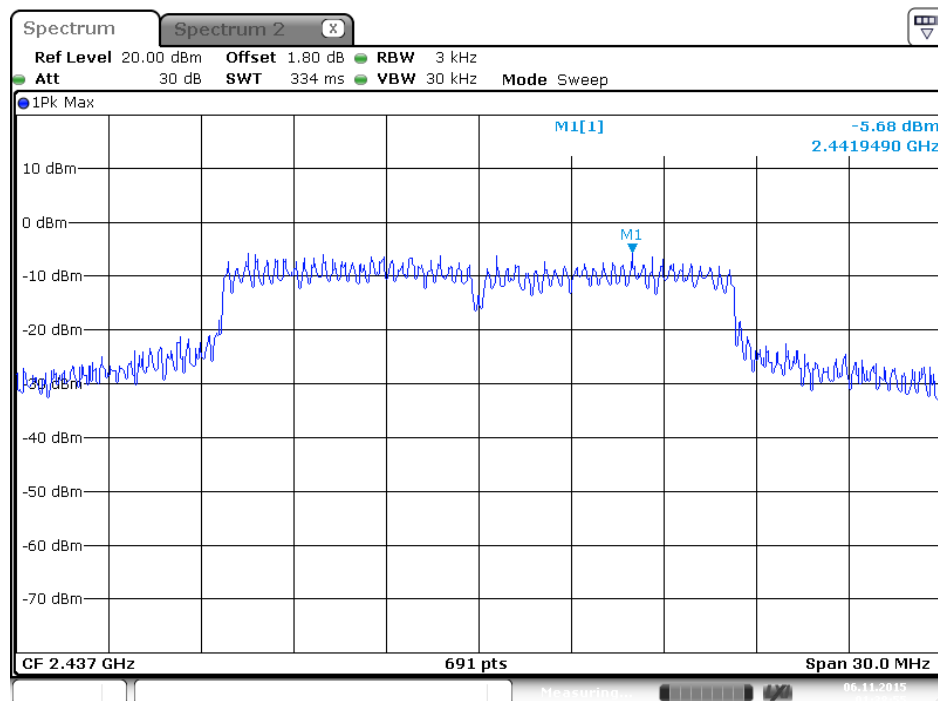


Date: 6 NOV 2015 01:38:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

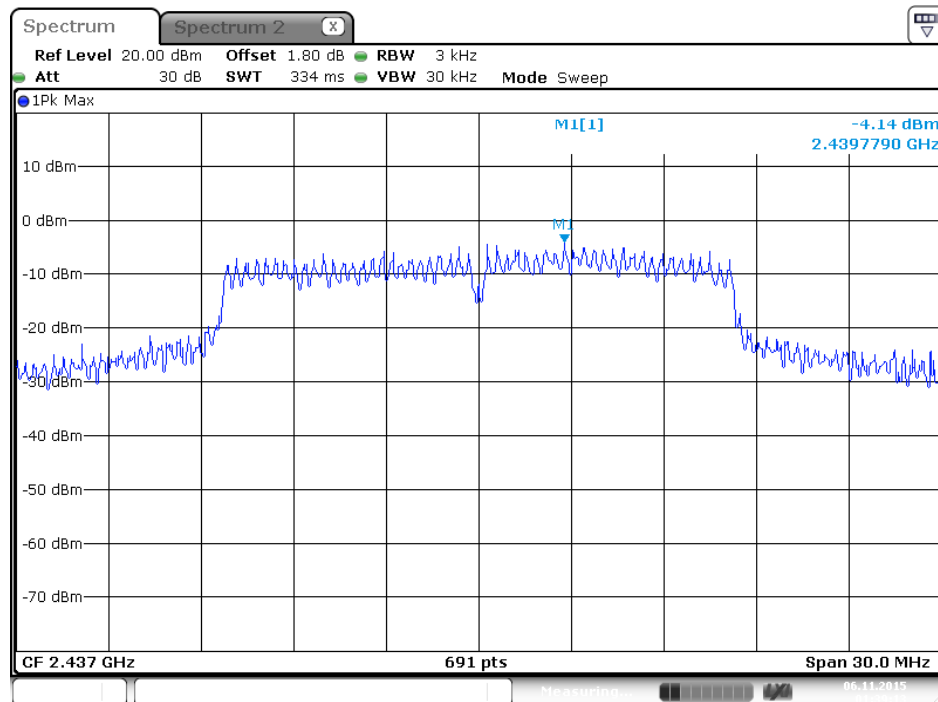


Date: 6 NOV 2015 01:39:13

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

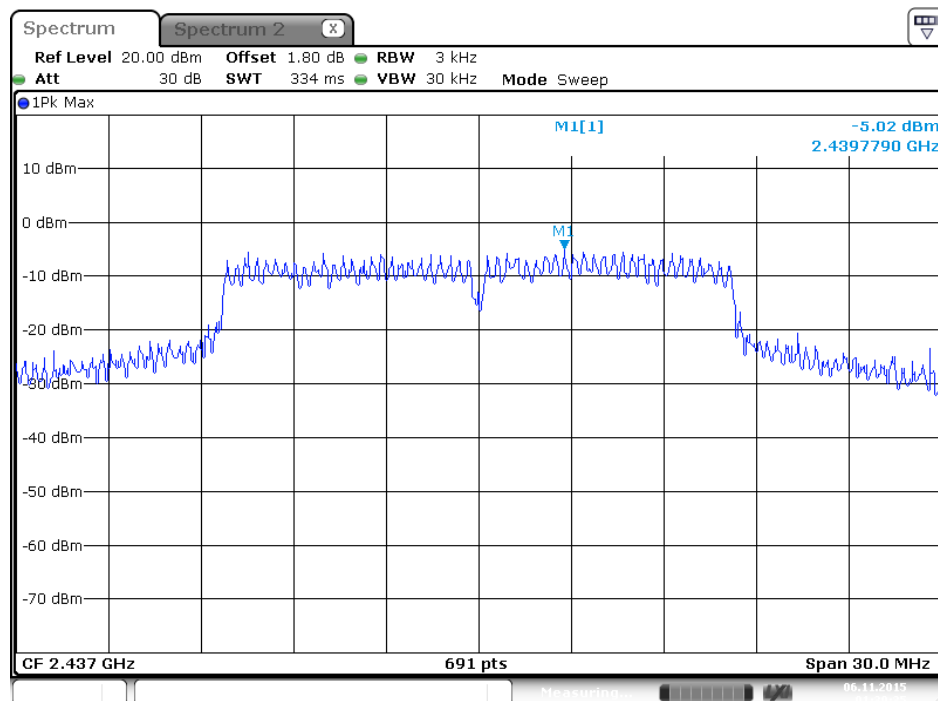


Date: 6 NOV 2015 01:39:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

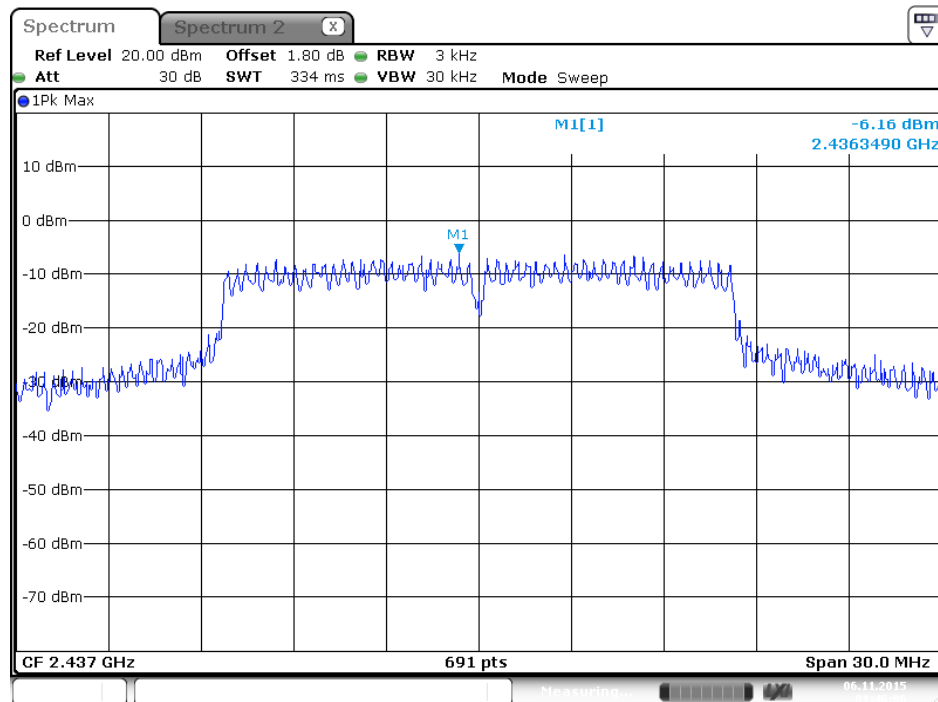


Date: 6 NOV 2015 01:46:06

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

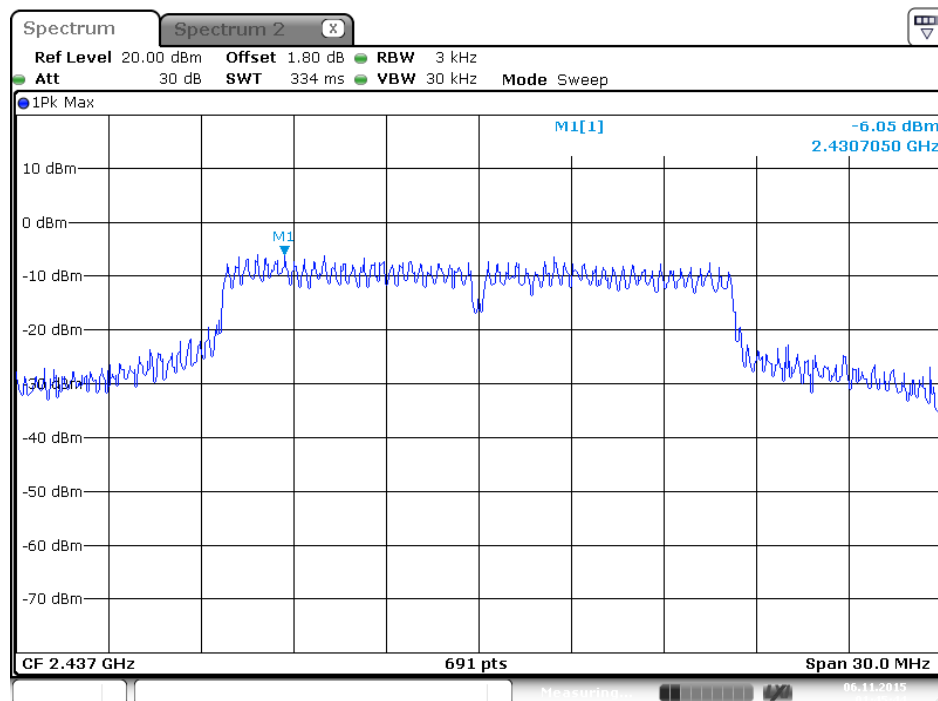


Date: 6 NOV 2015 01:45:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

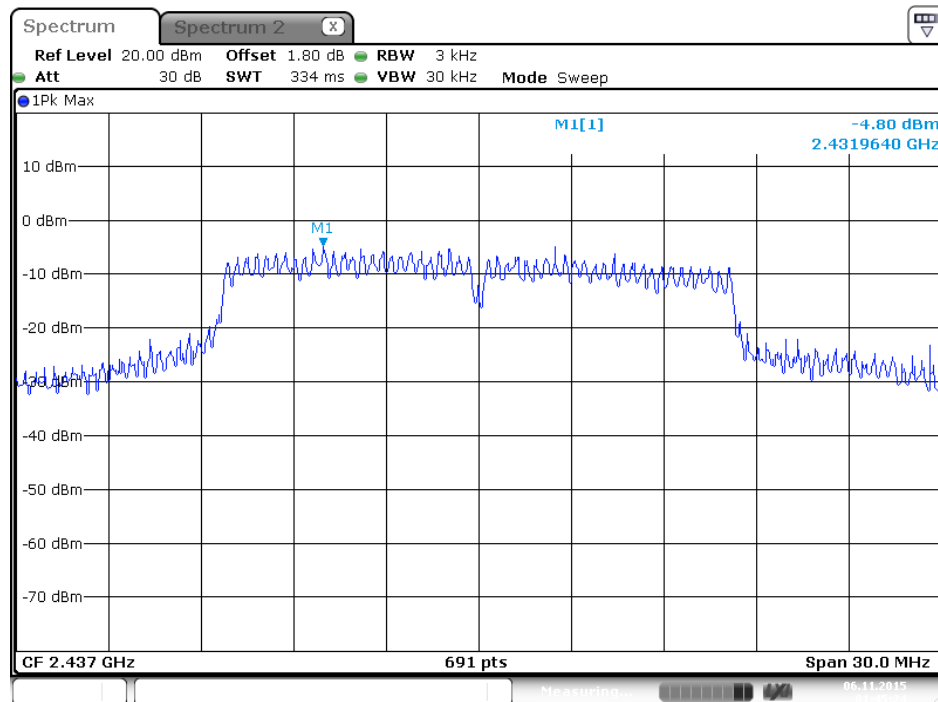


Date: 6 NOV 2015 01:45:24

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

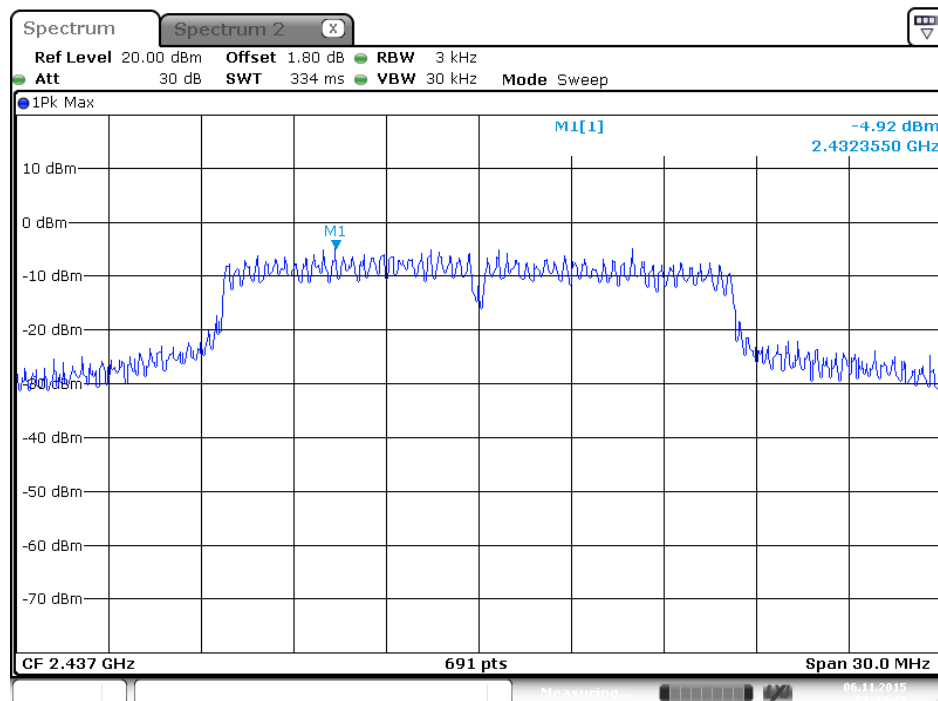


Date: 6 NOV 2015 01:44:48

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

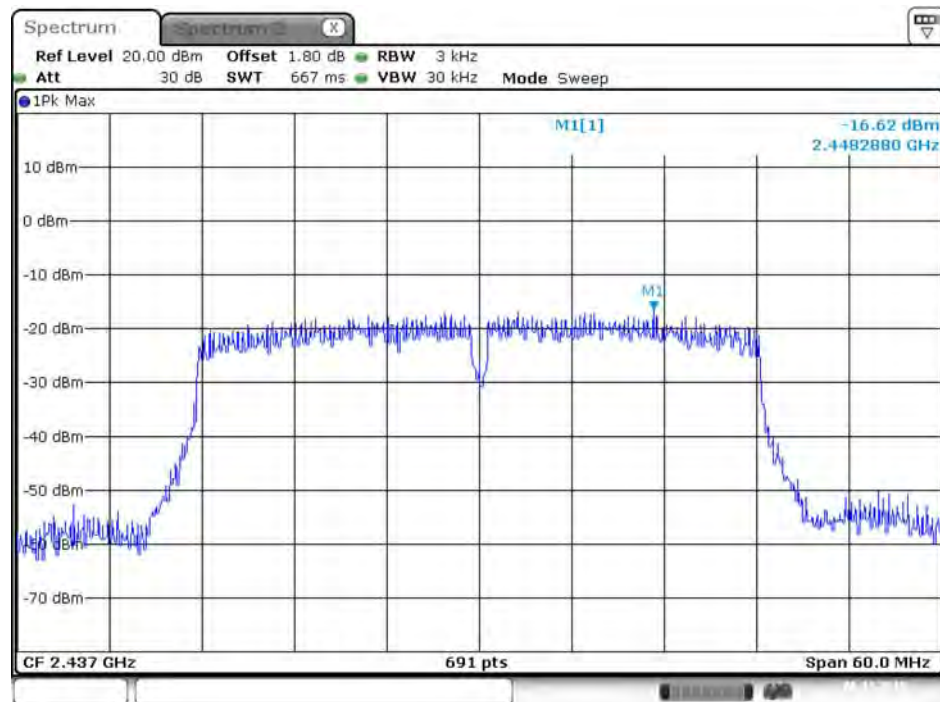


Date: 6 NOV 2015 01:50:13

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

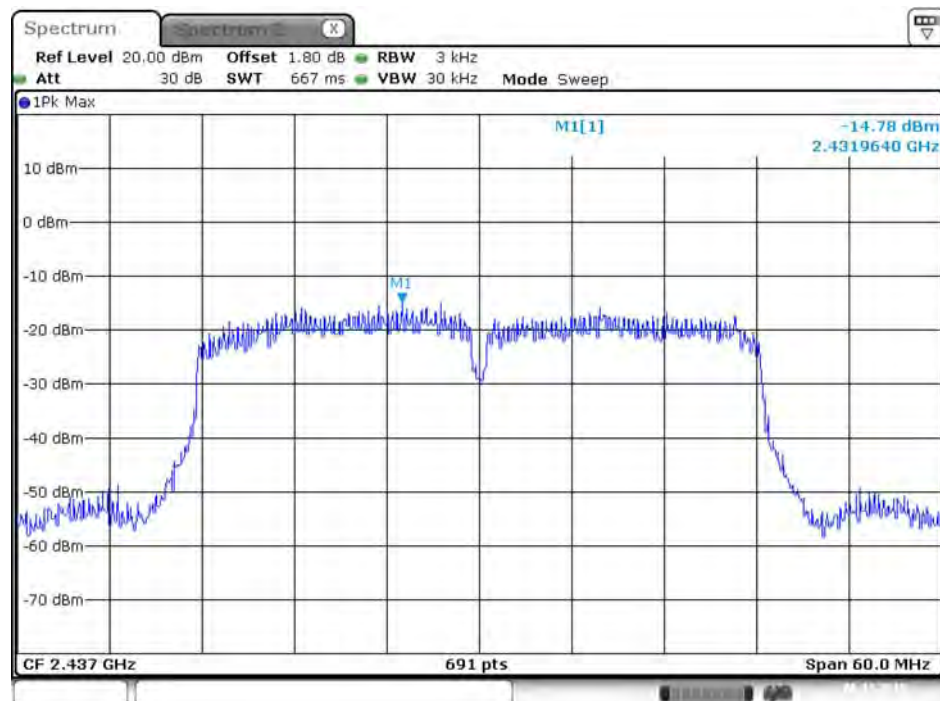


Date: 6 NOV 2015 01:50:49

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

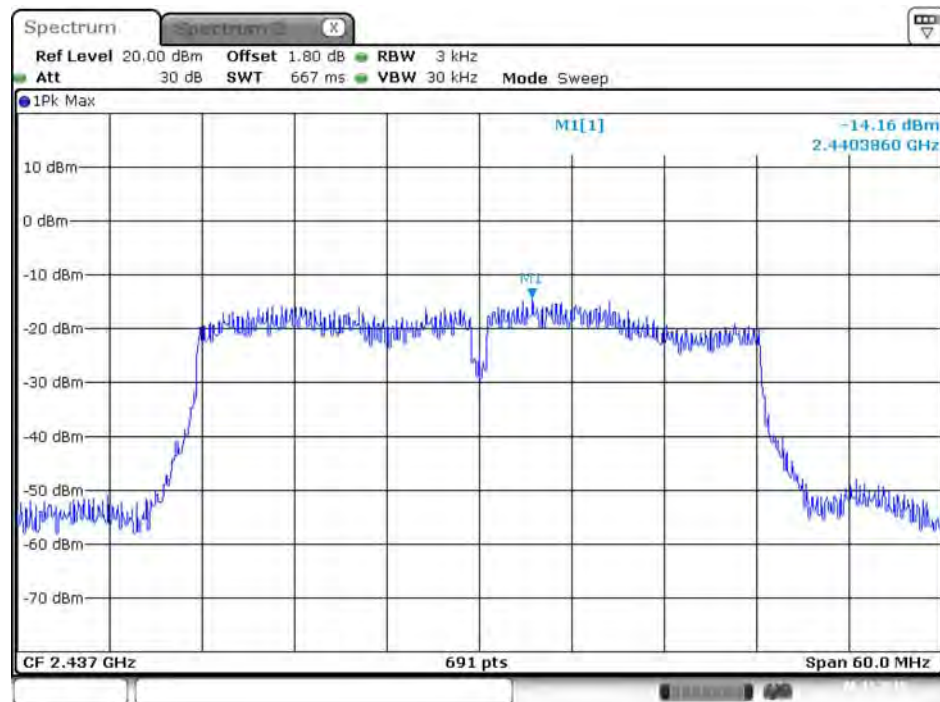

Date: 6 NOV. 2015 01:51:04


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

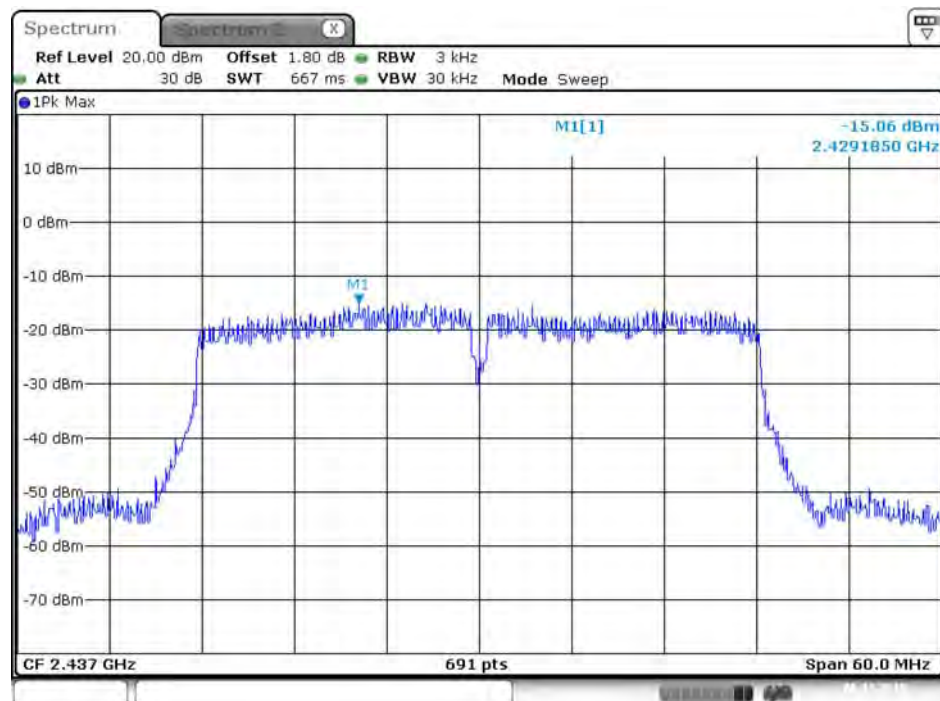


Date: 6 NOV. 2015 01:51:17

Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

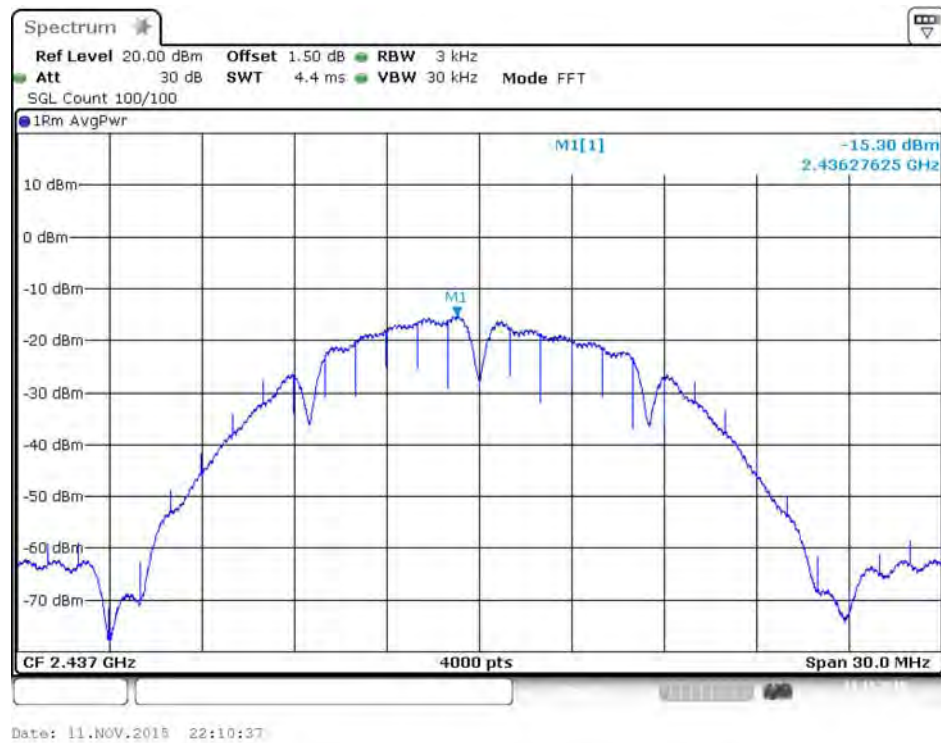

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

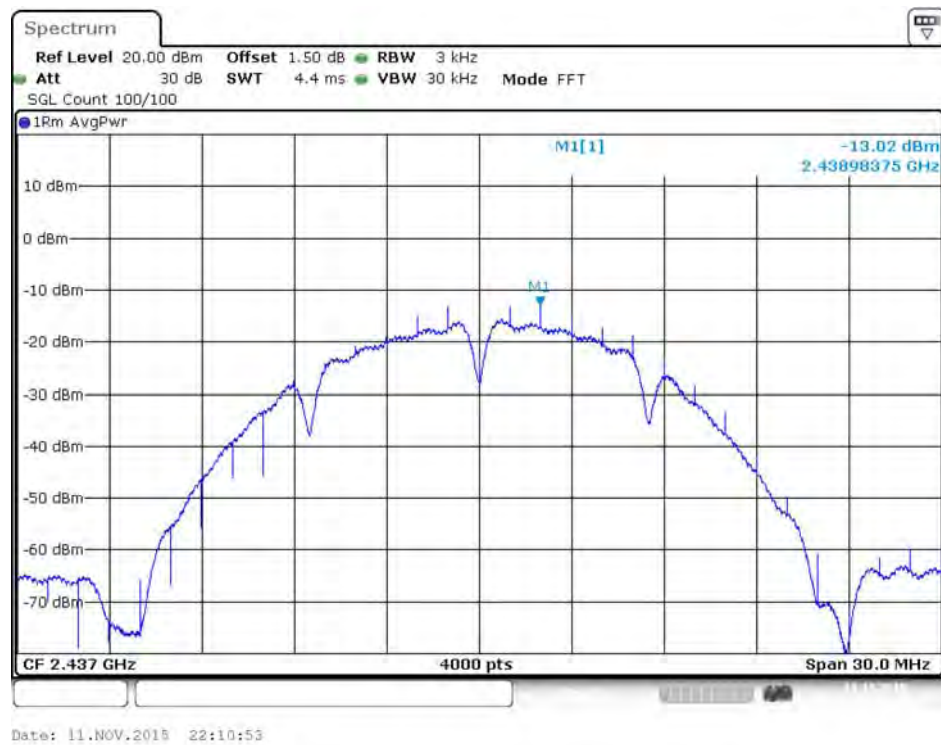


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

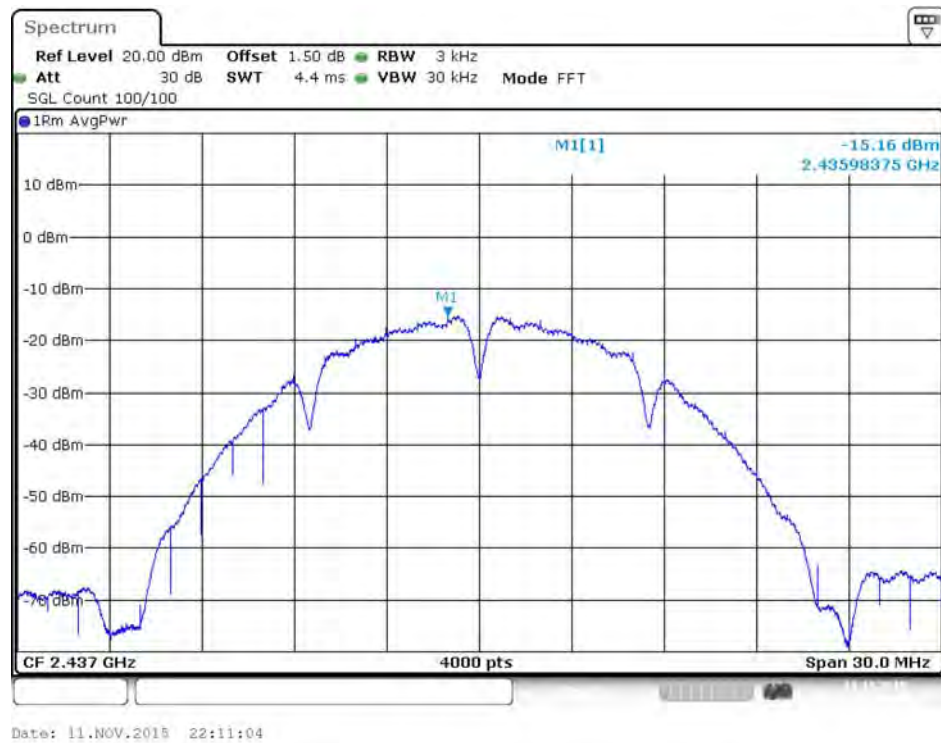


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4




Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

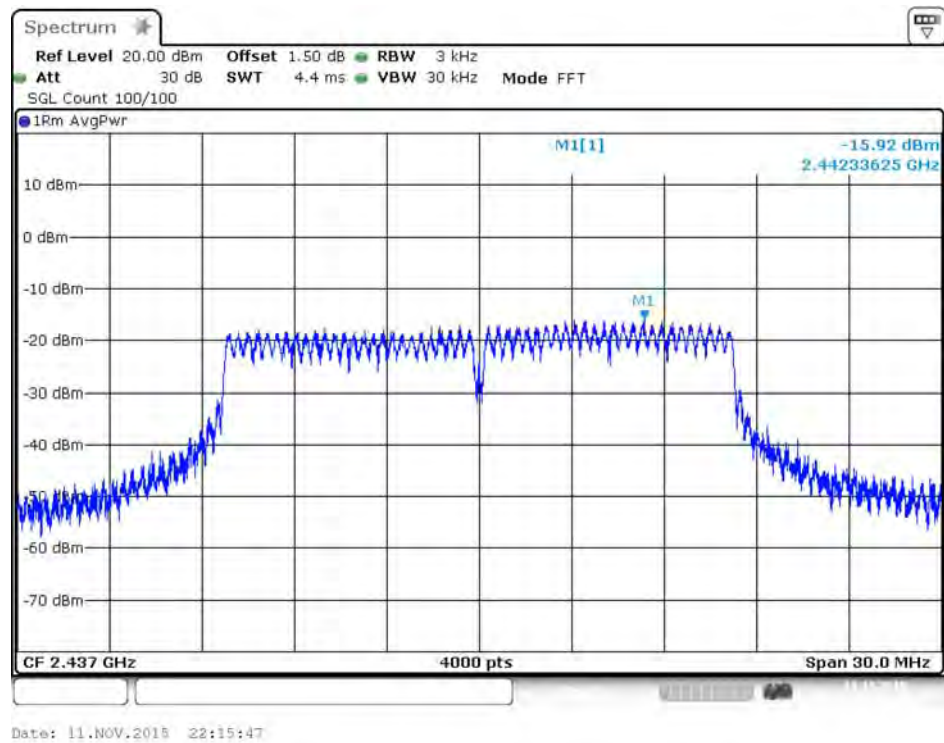


P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

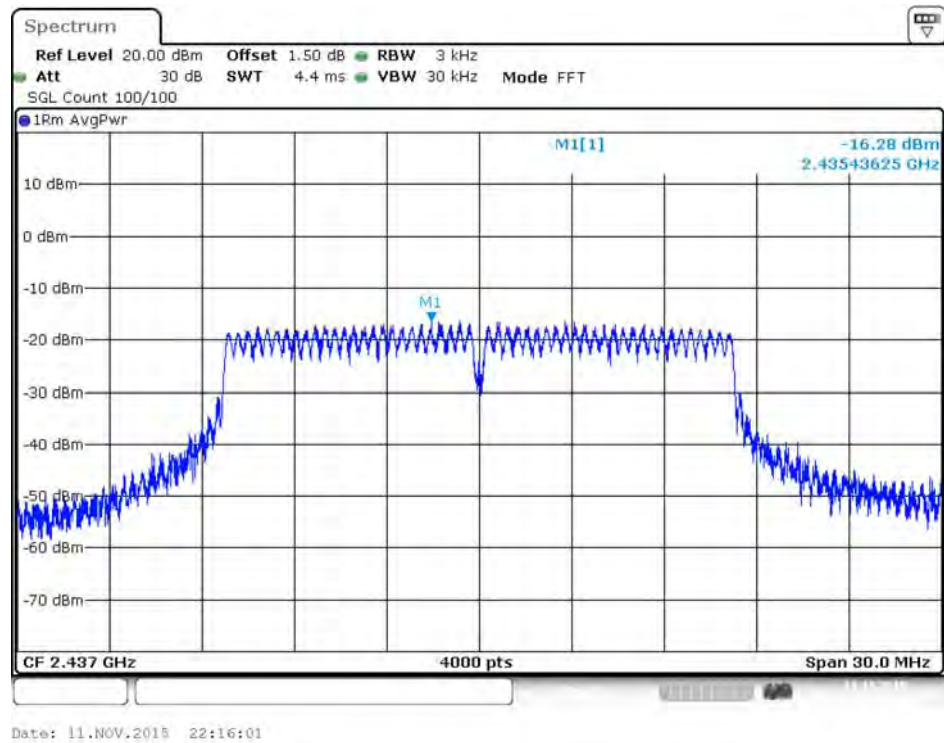


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

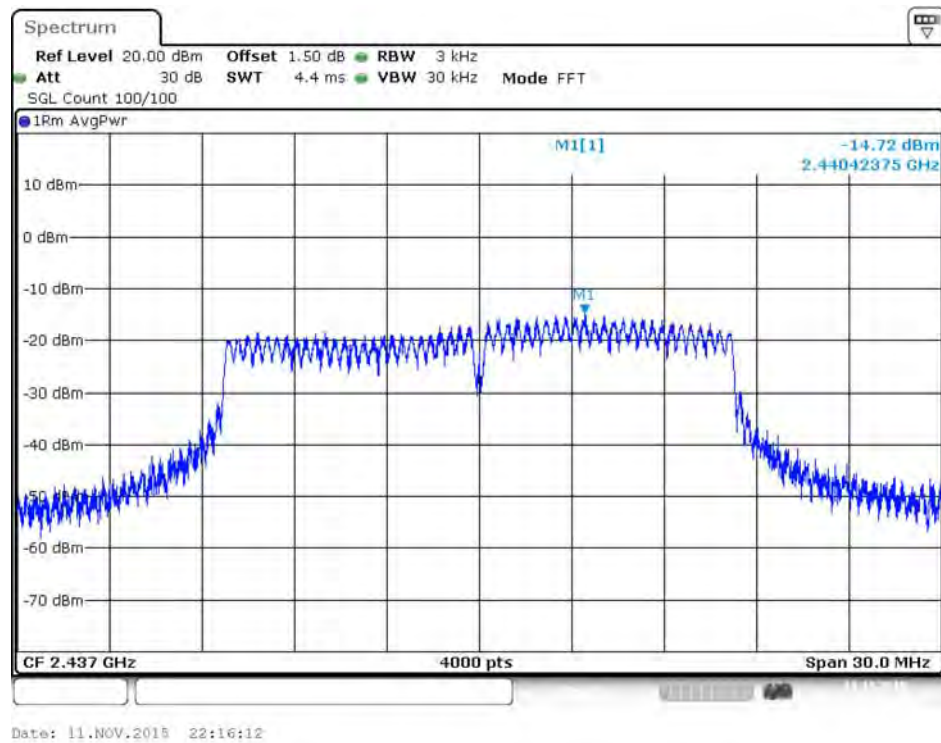


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

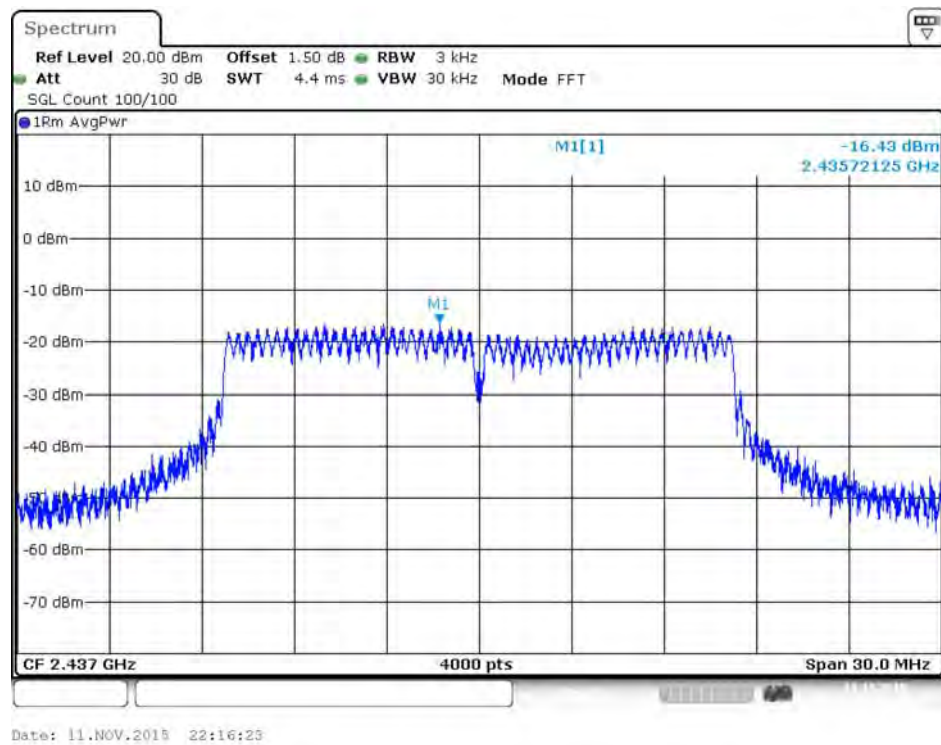


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1

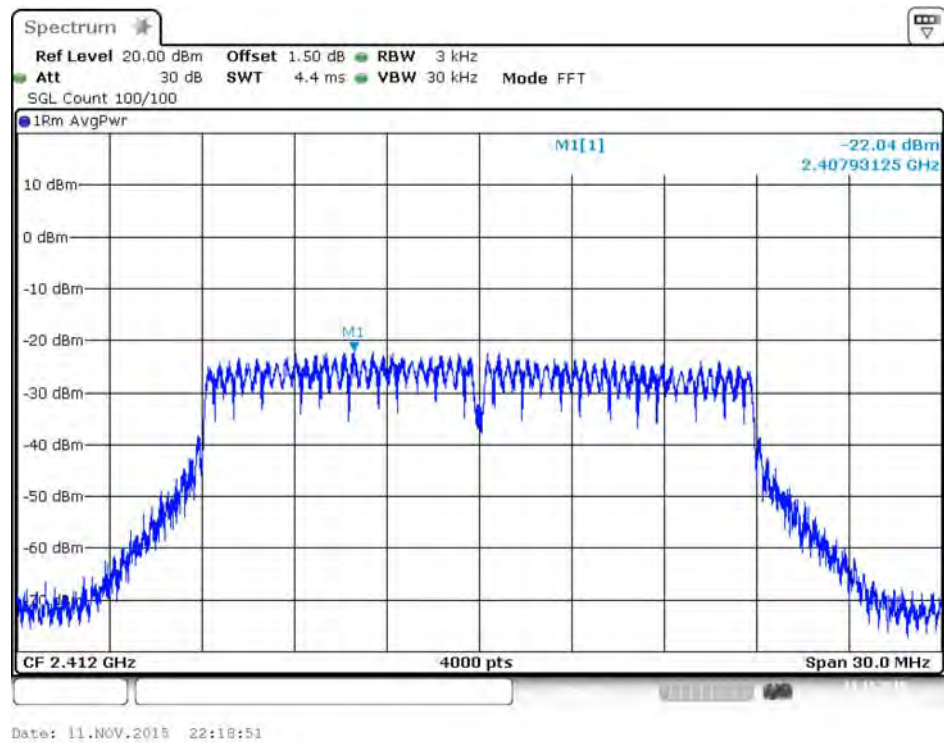


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 2

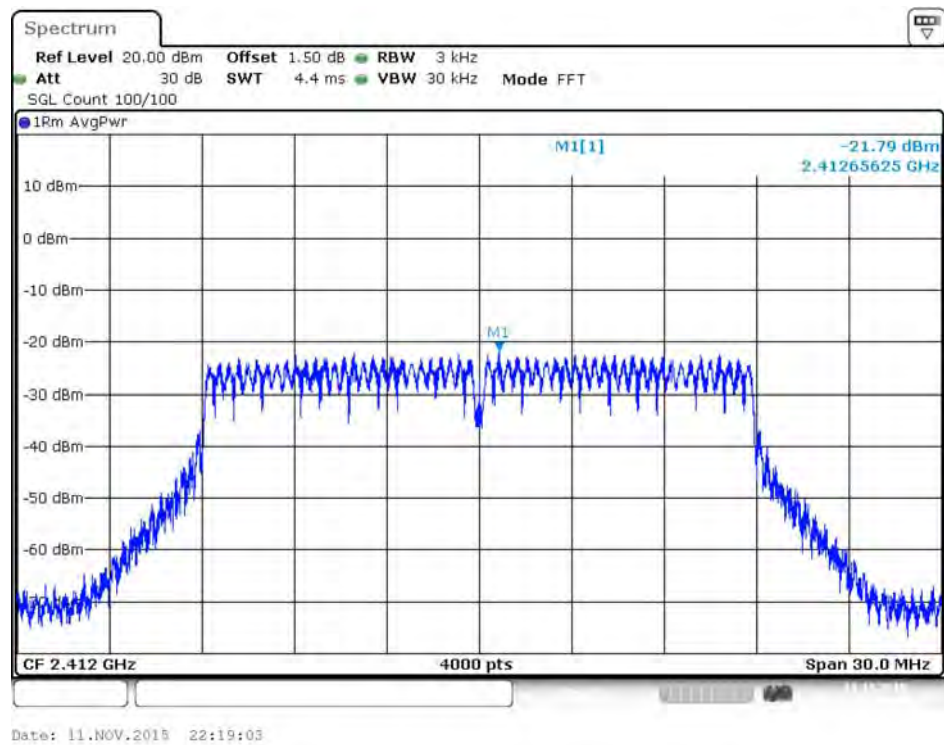


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 3

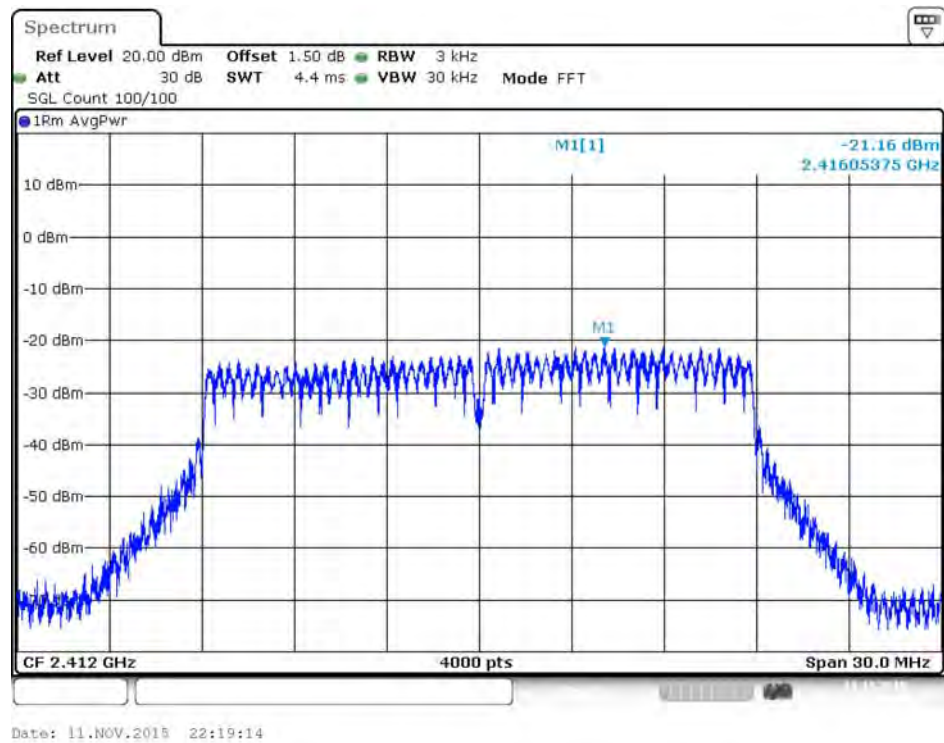


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 4

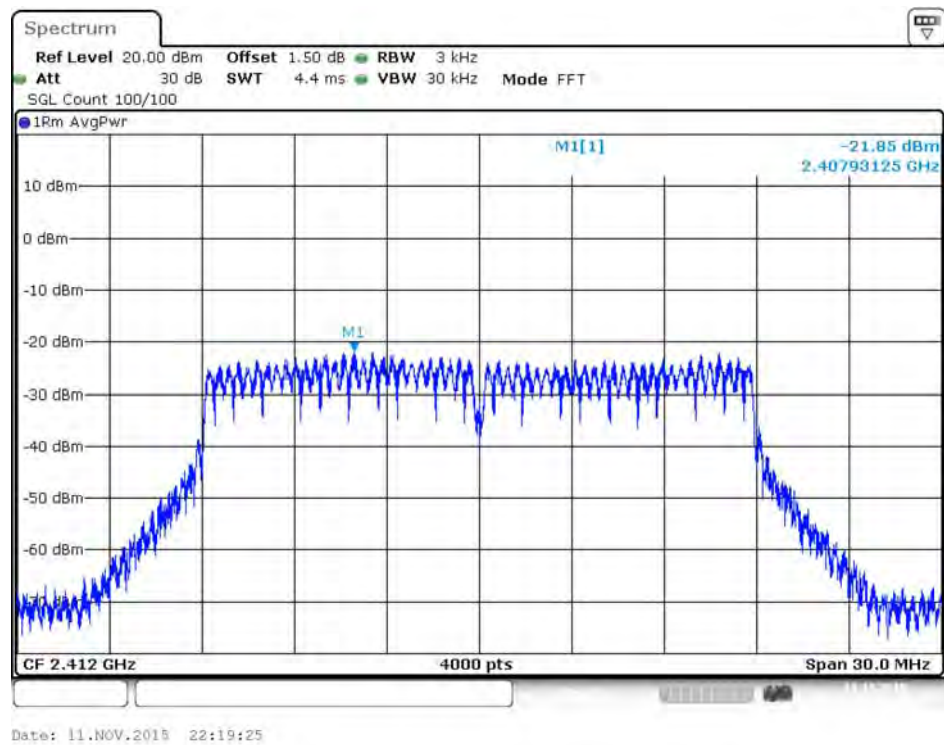


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

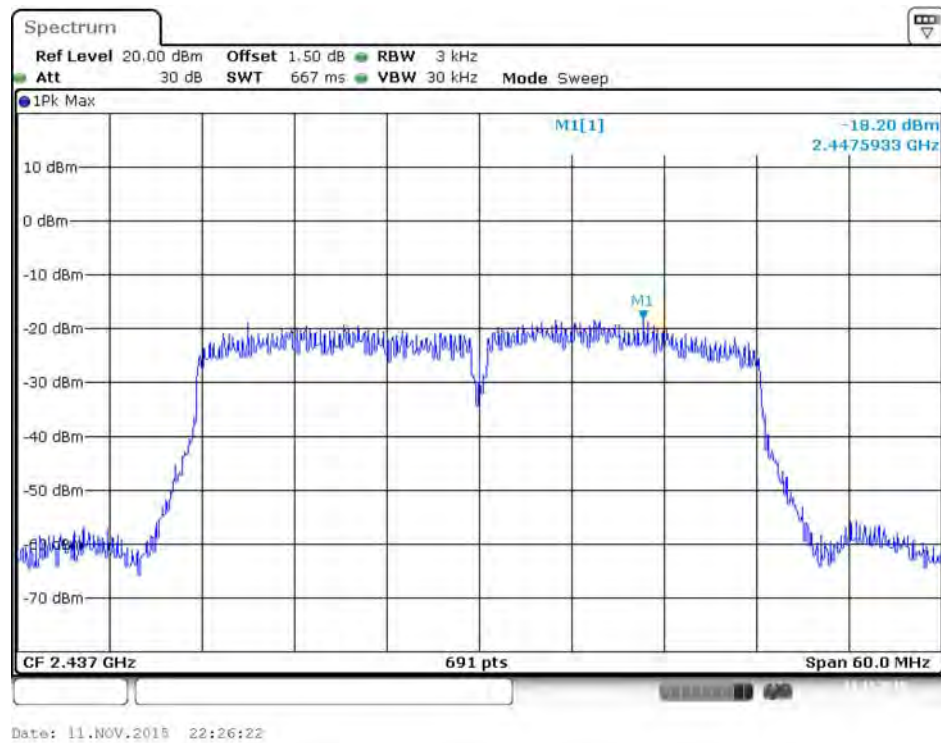


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

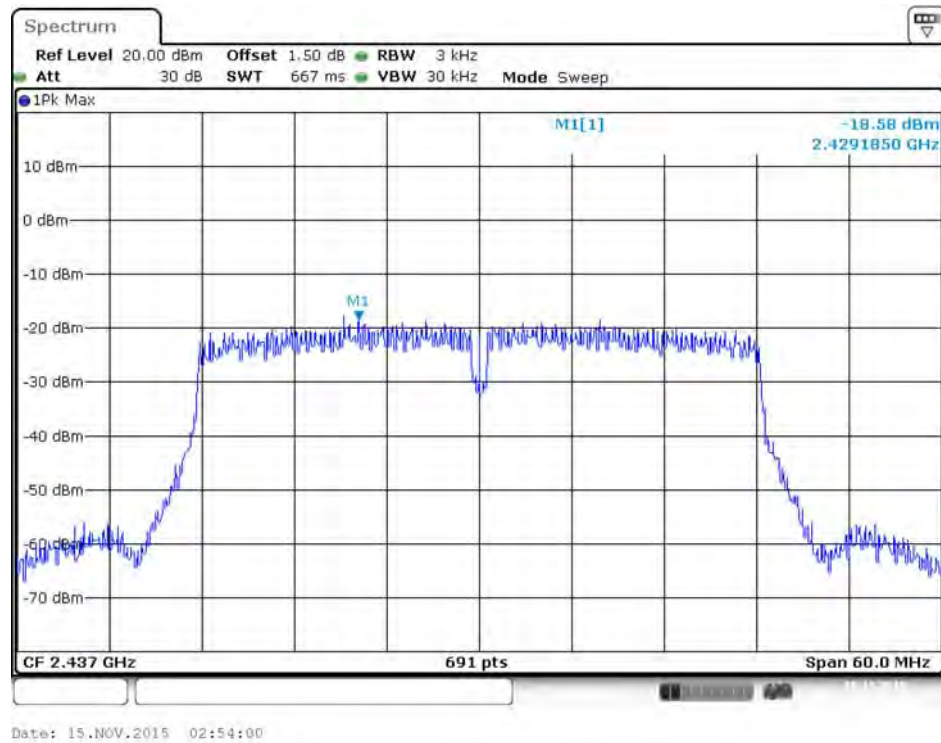

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

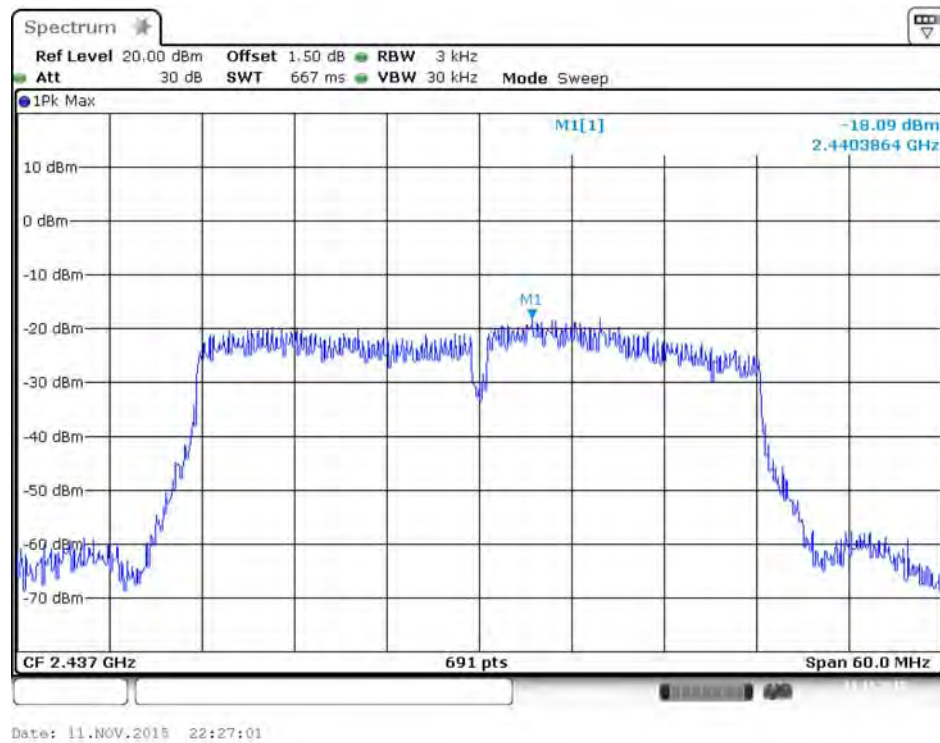


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

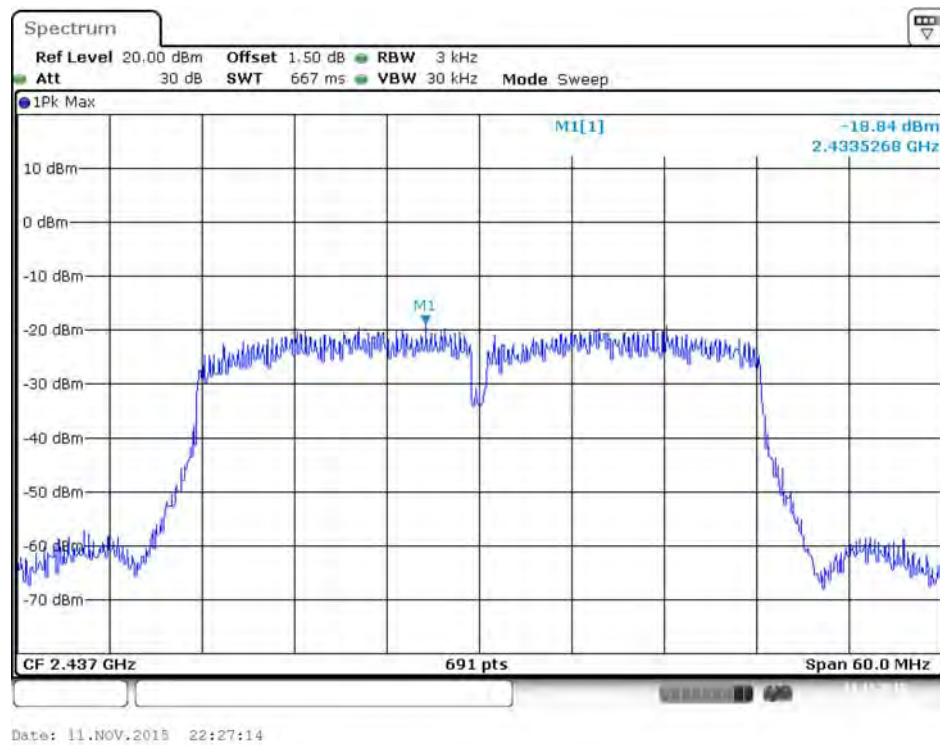


Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

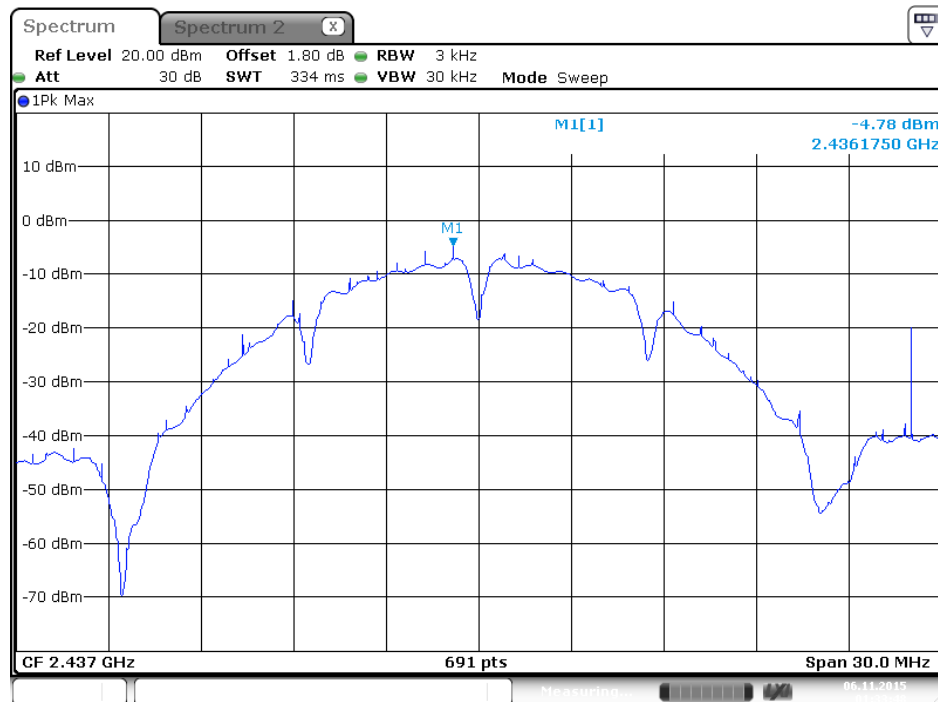


Date: 6 NOV 2015 01:33:48

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

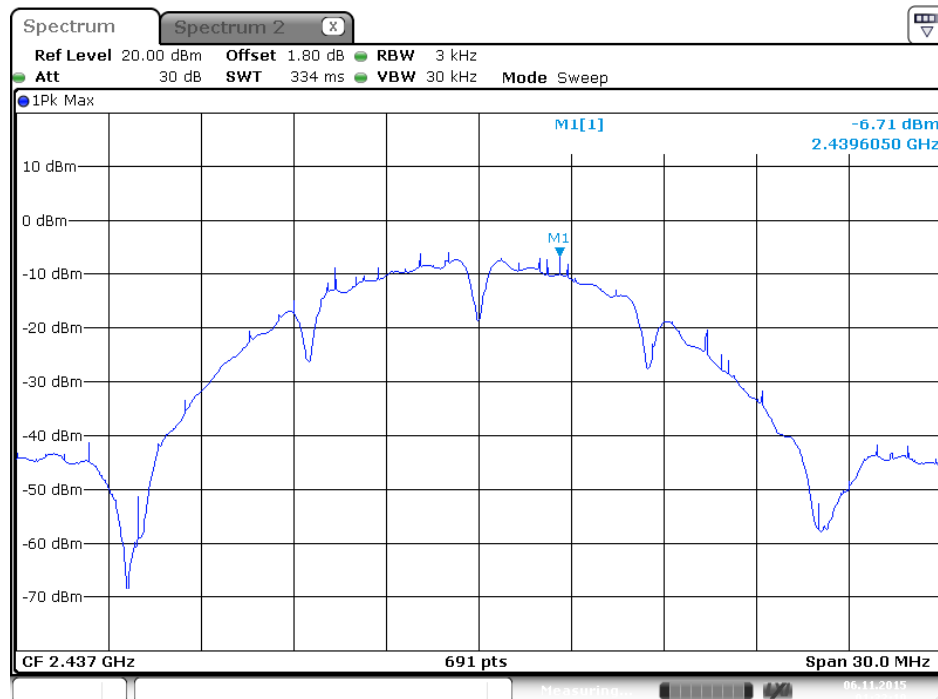


Date: 6 NOV 2015 01:32:19

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

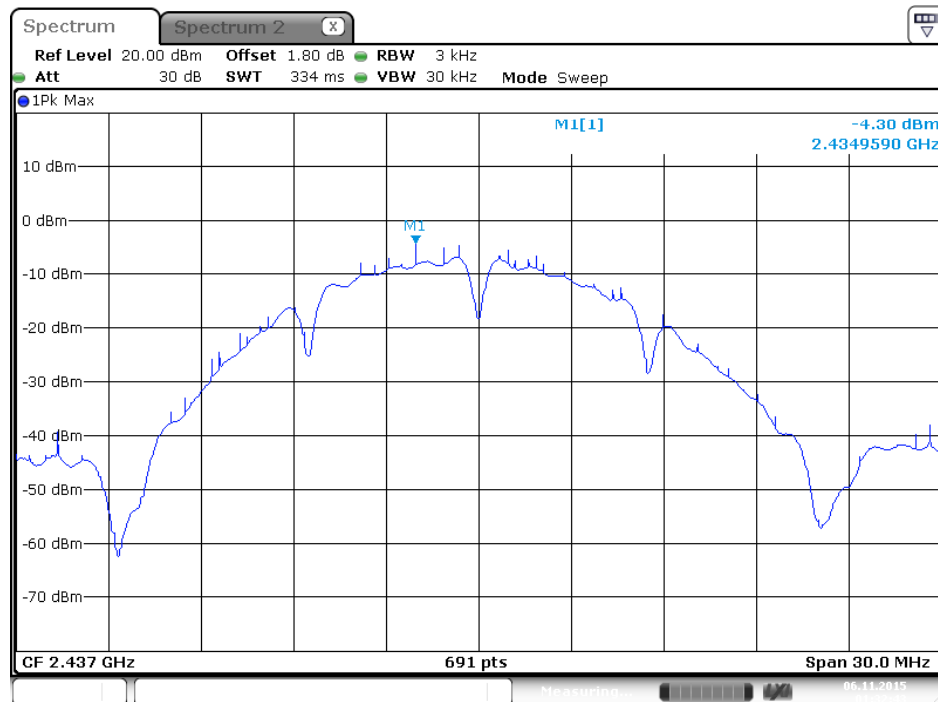


Date: 6 NOV 2015 01:32:43

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

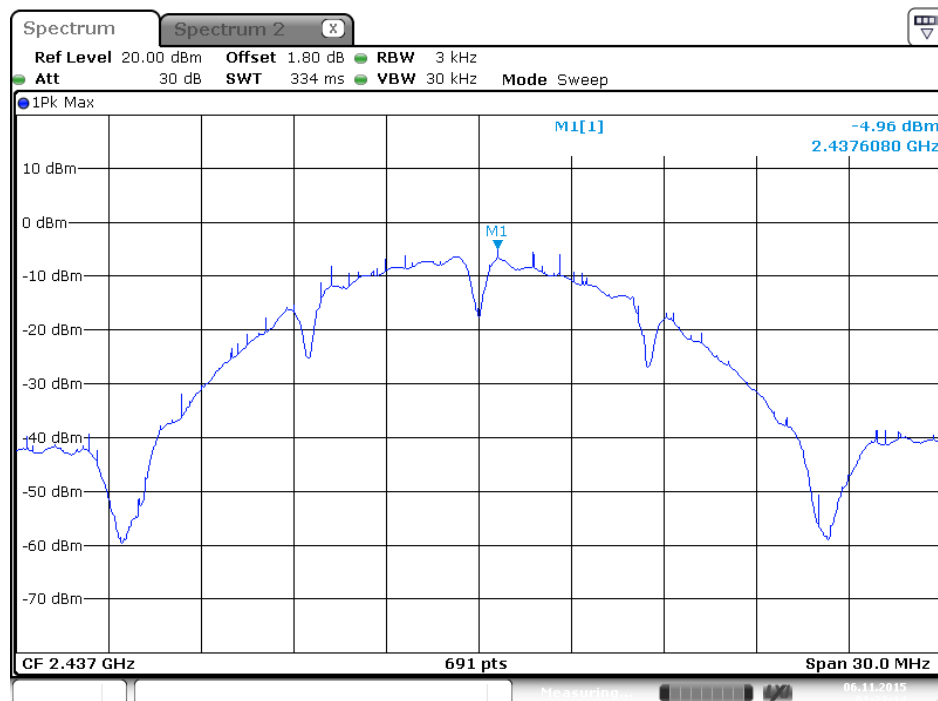


Date: 6 NOV 2015 01:33:14

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

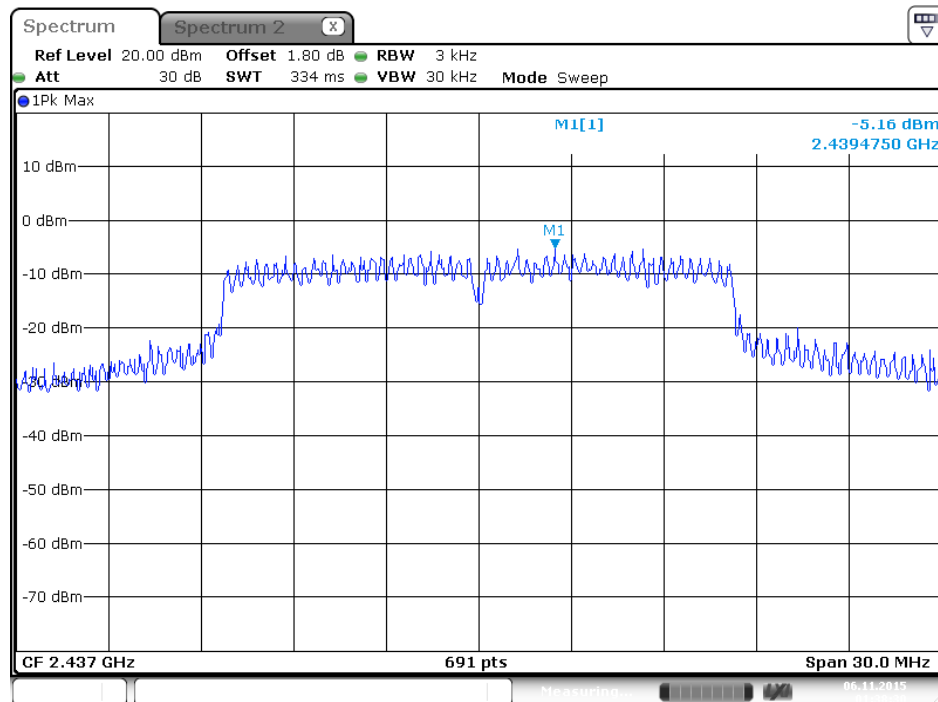


Date: 6 NOV 2015 01:38:30

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

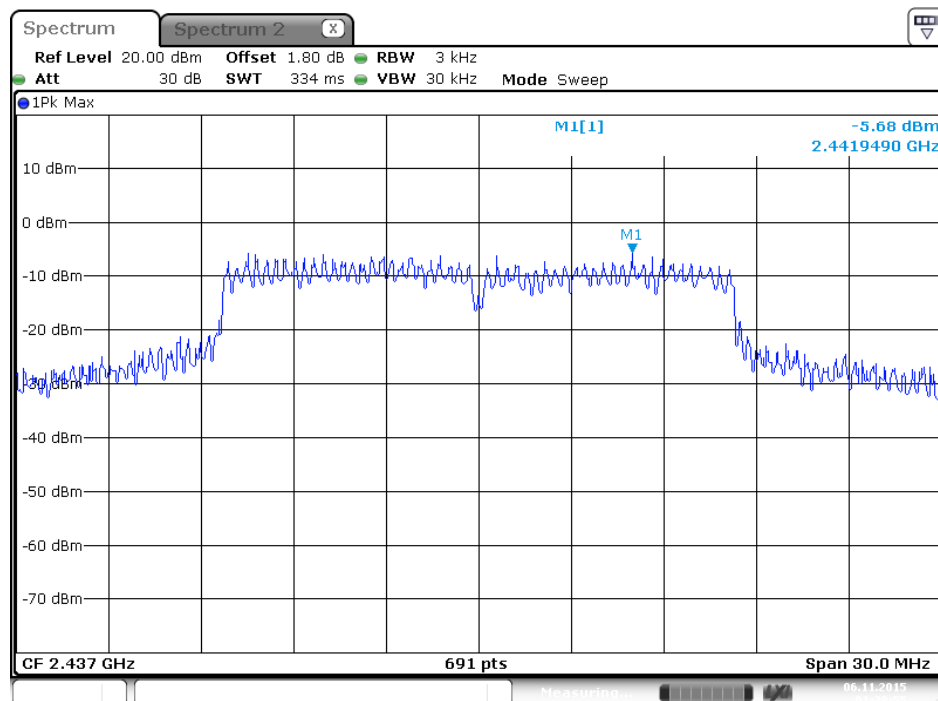


Date: 6 NOV 2015 01:38:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

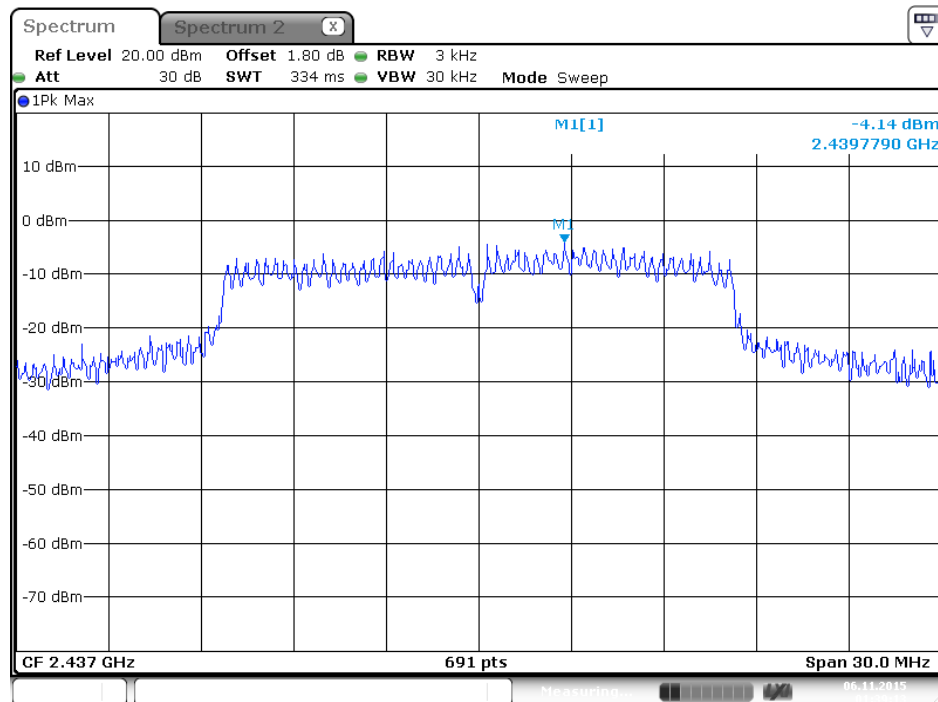


Date: 6 NOV 2015 01:39:13

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

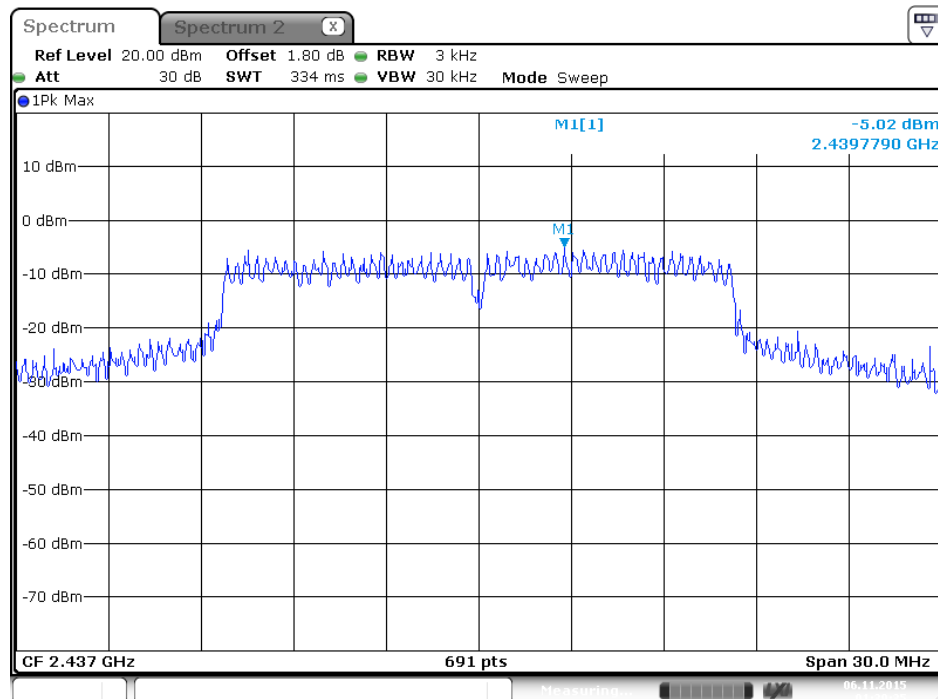


Date: 6 NOV 2015 01:39:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

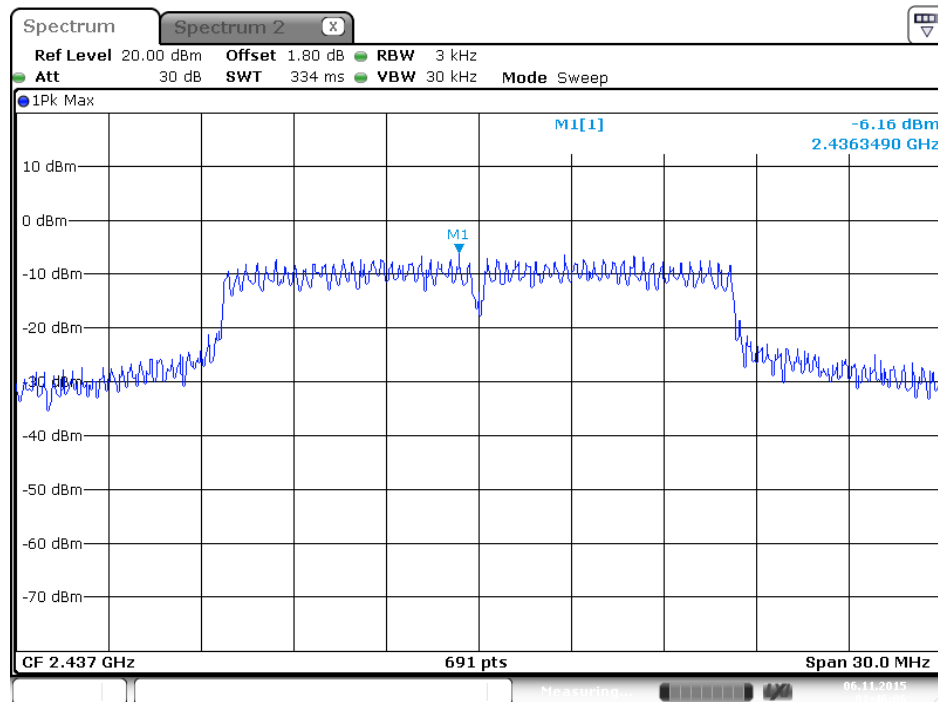


Date: 6 NOV 2015 01:46:06

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

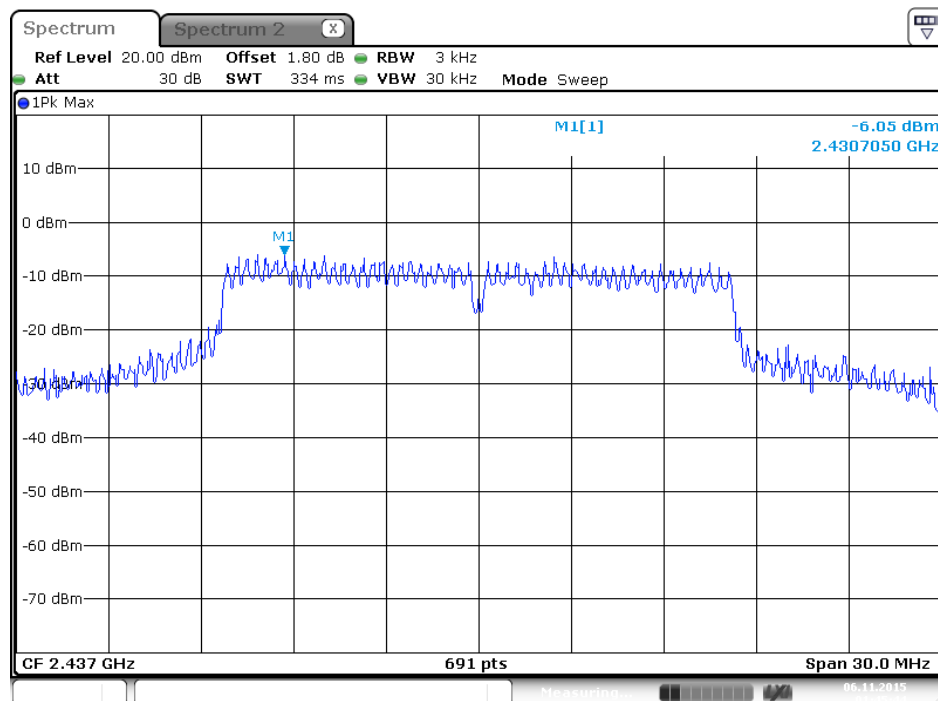


Date: 6 NOV 2015 01:45:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

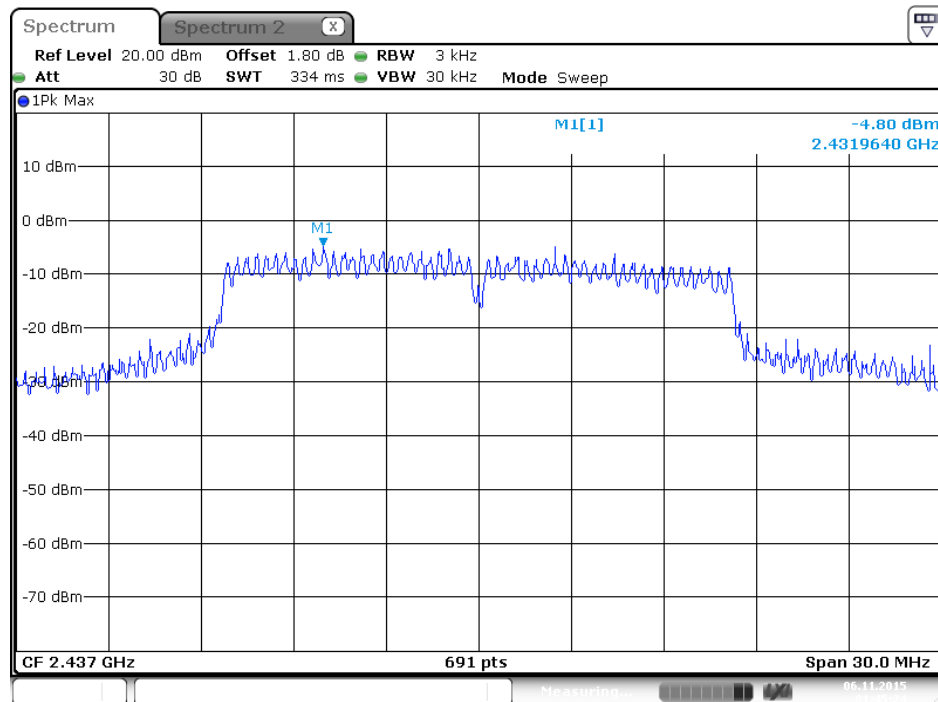


Date: 6 NOV 2015 01:45:24

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

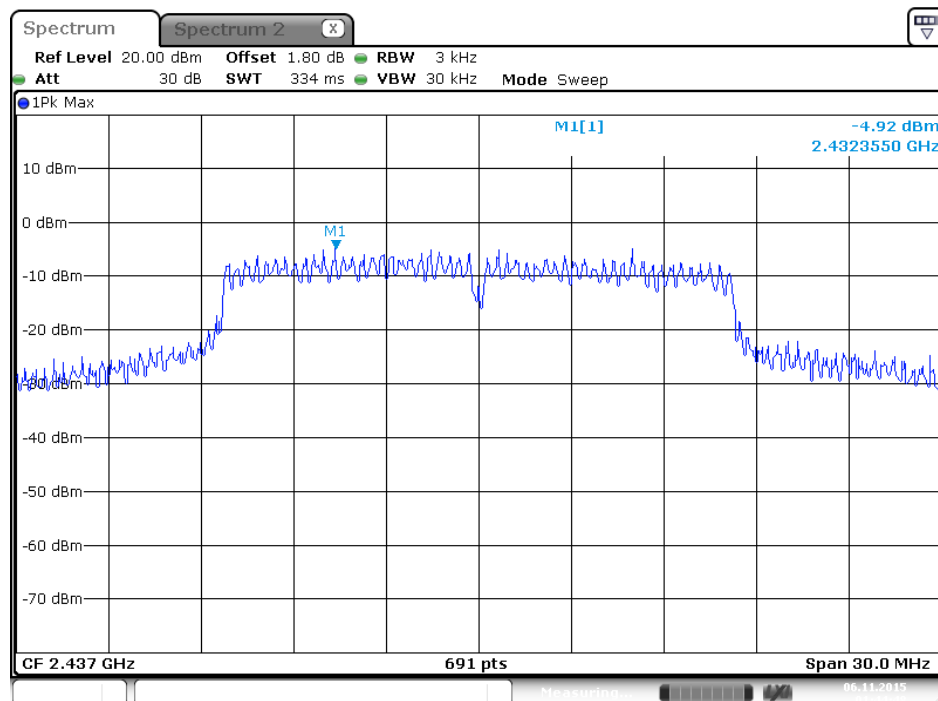


Date: 6 NOV 2015 01:44:48

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

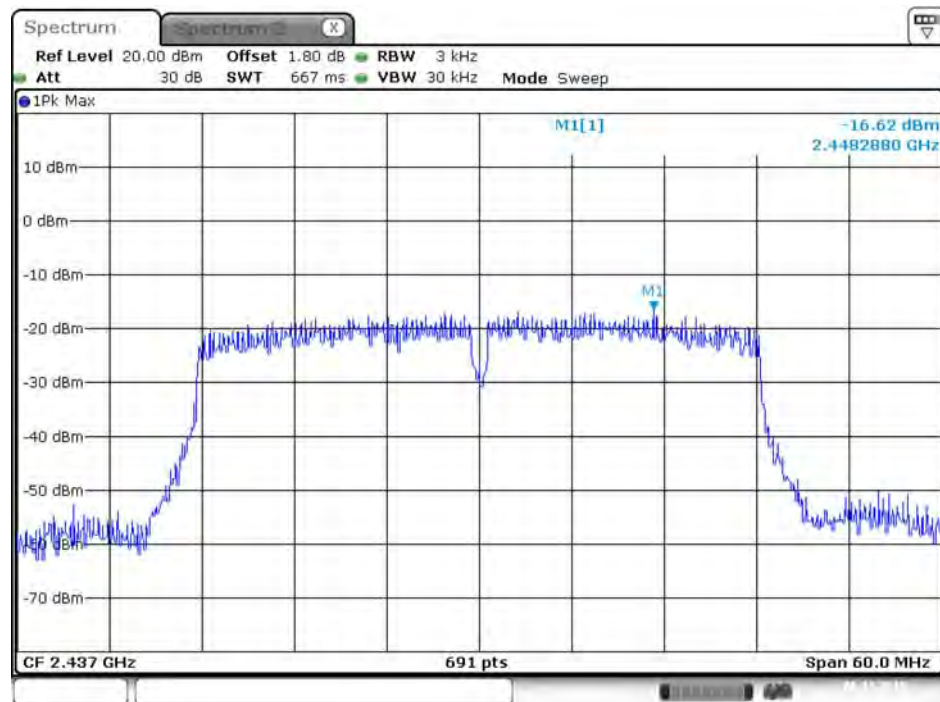


Date: 6 NOV. 2015 01:50:13

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

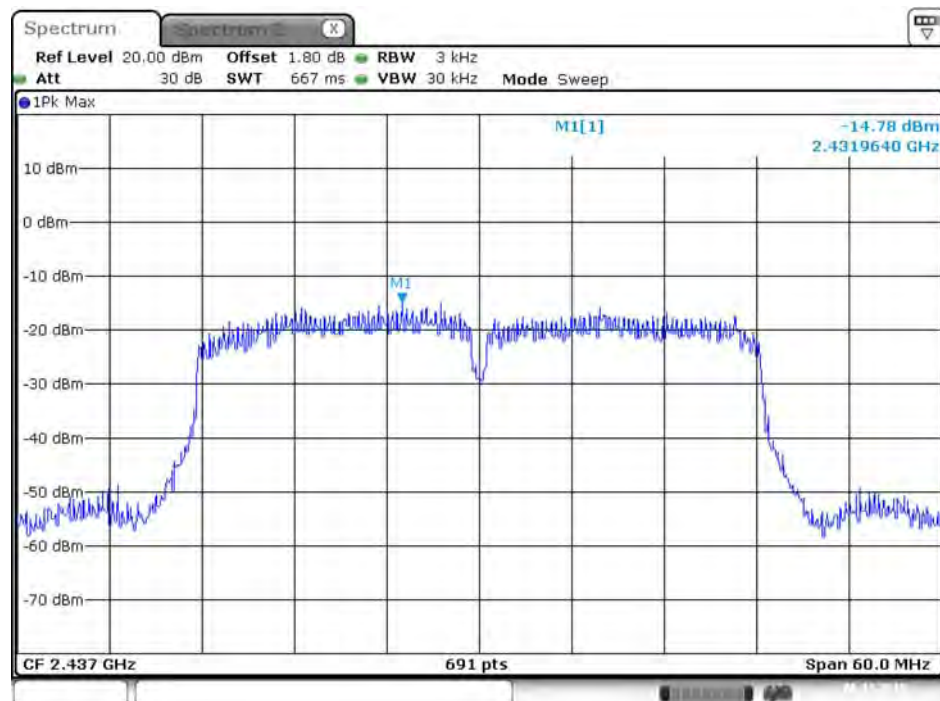


Date: 6 NOV. 2015 01:50:49

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

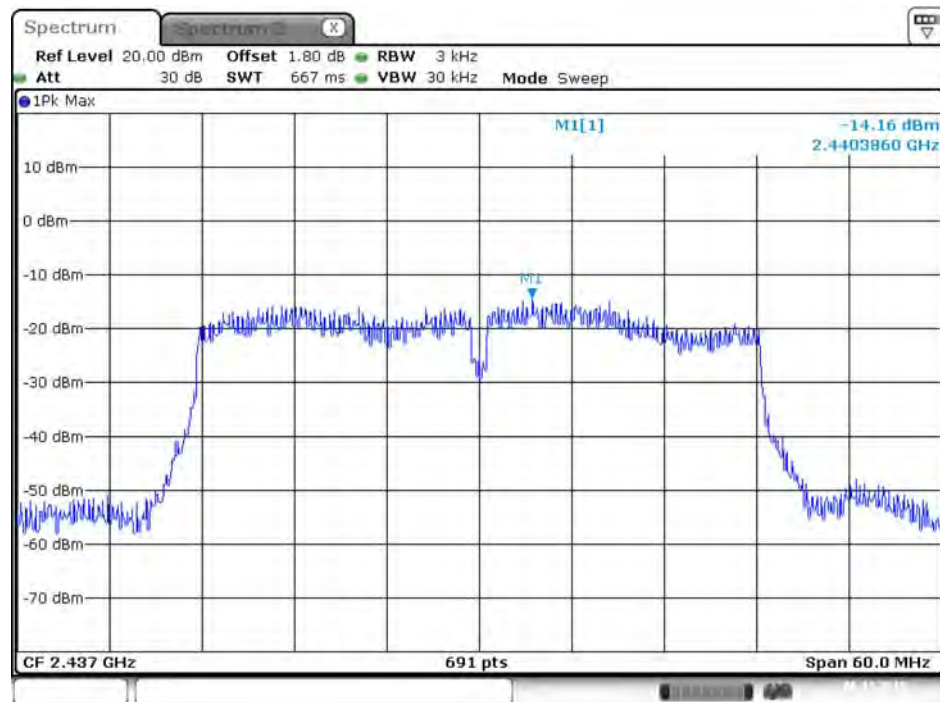

Date: 6 NOV. 2015 01:51:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

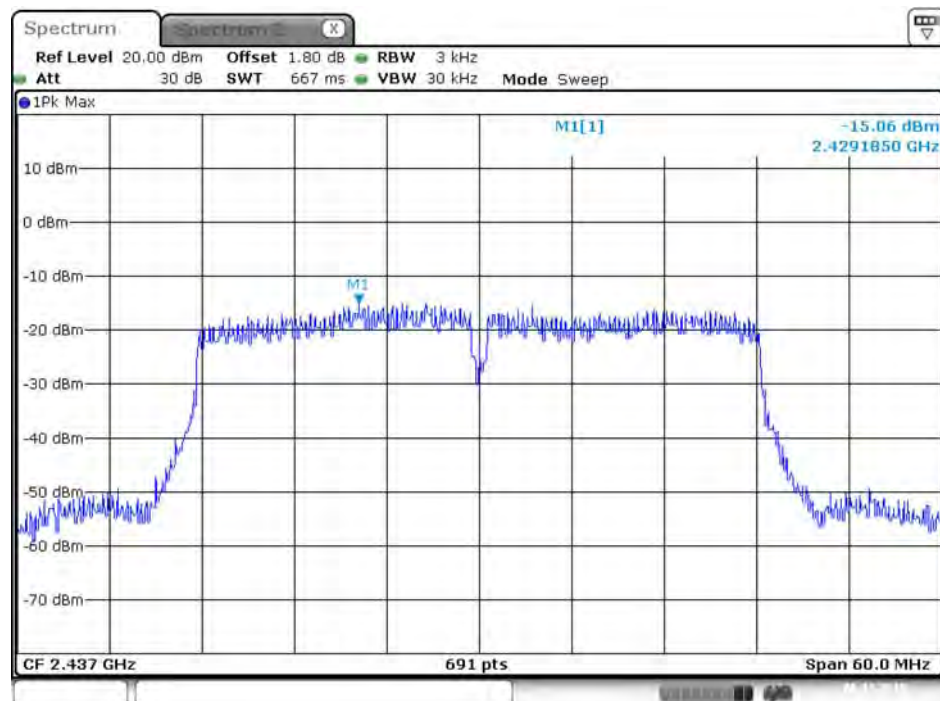

Date: 6 NOV. 2015 01:51:17

Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1



Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2




Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3




Date: 6 NOV 2015 03:05:40

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4

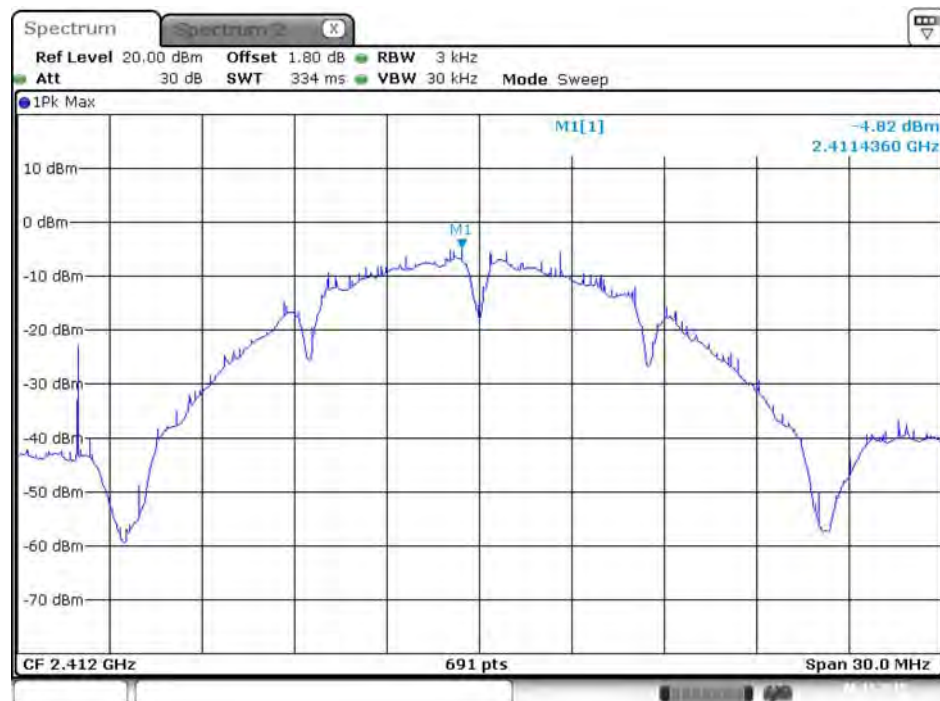


Date: 6 NOV 2015 03:05:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

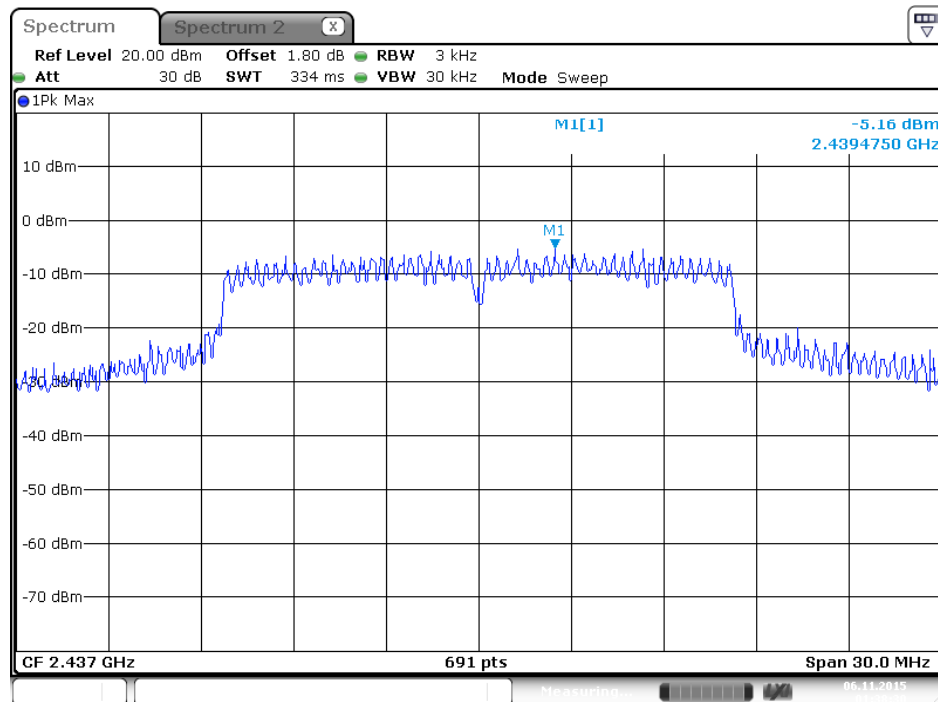


Date: 6 NOV 2015 01:38:30

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

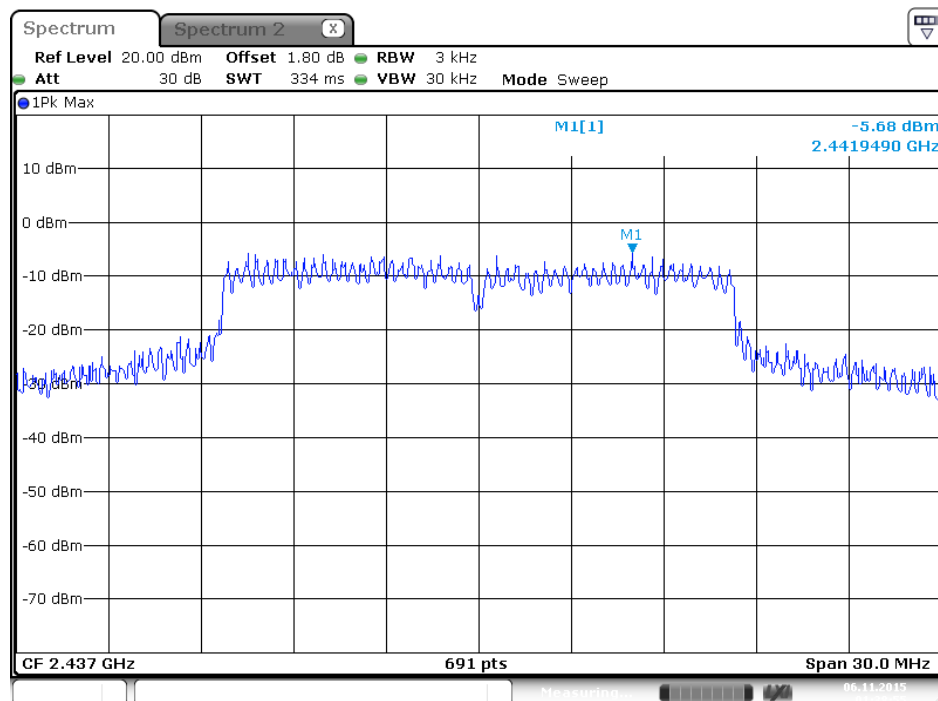


Date: 6 NOV 2015 01:38:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

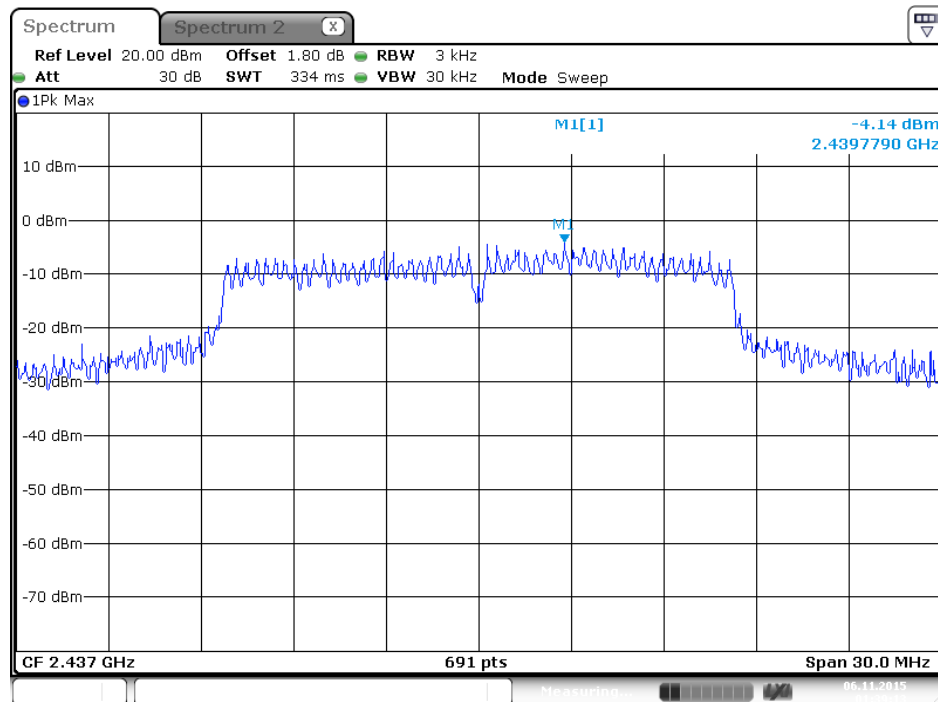


Date: 6 NOV 2015 01:39:13

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

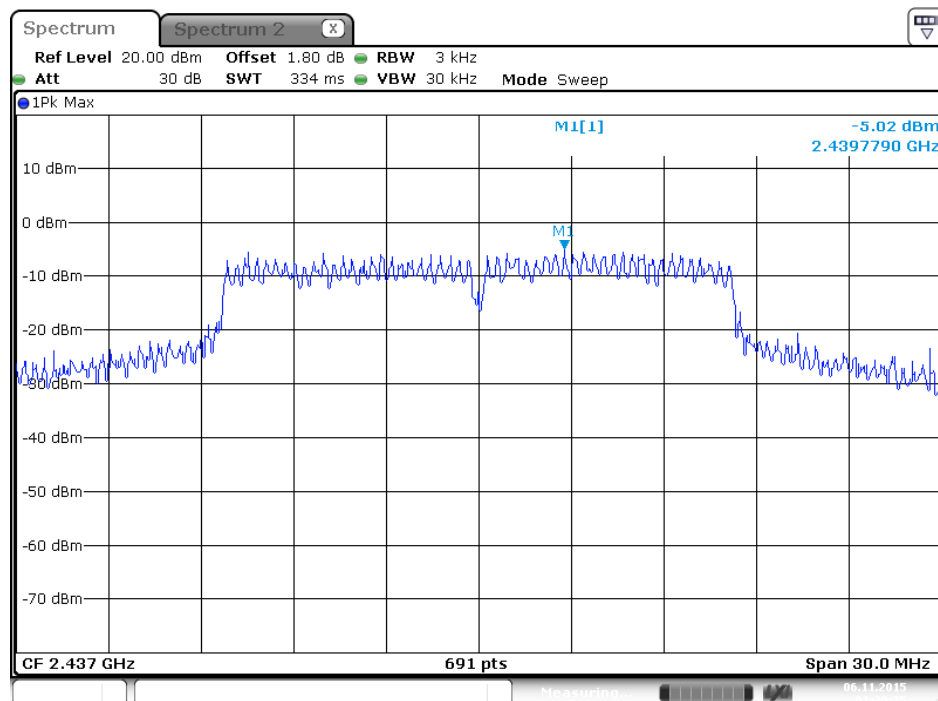


Date: 6 NOV 2015 01:39:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

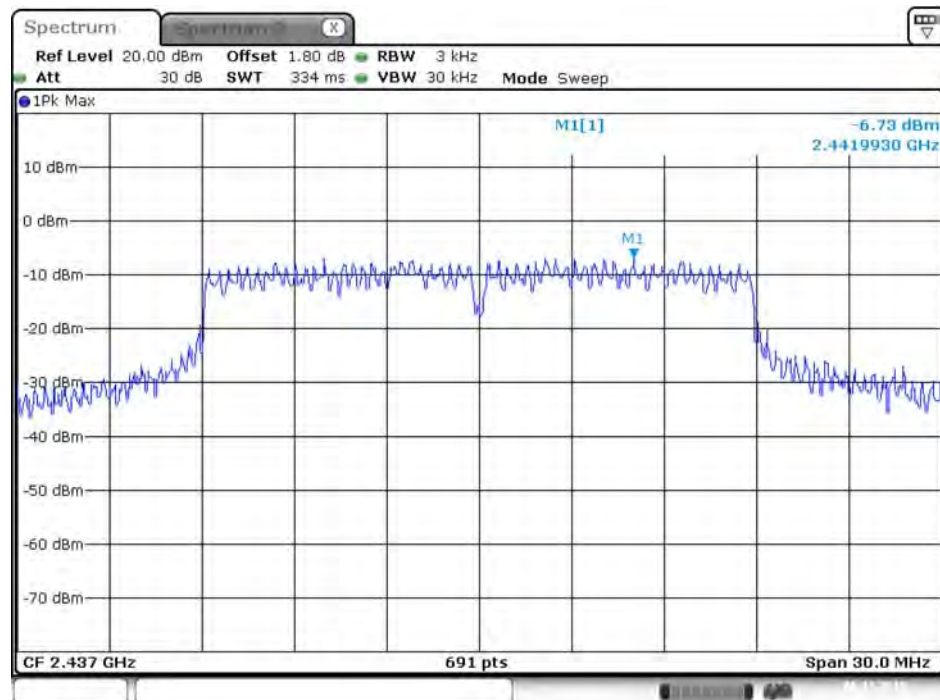


Date: 6 NOV 2015 02:56:48

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

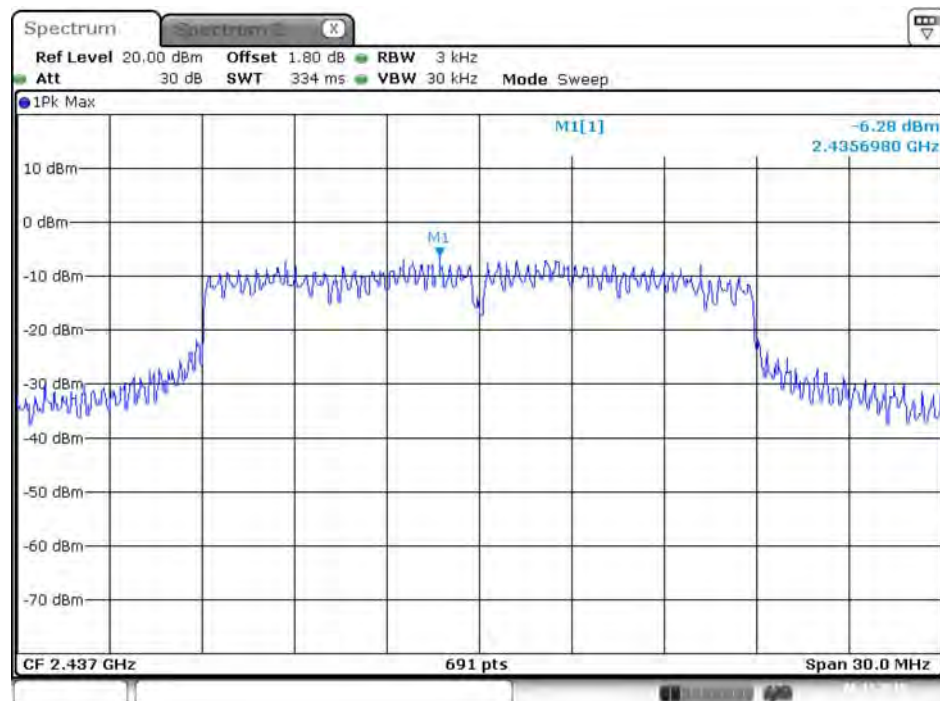


Date: 6 NOV 2015 02:57:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

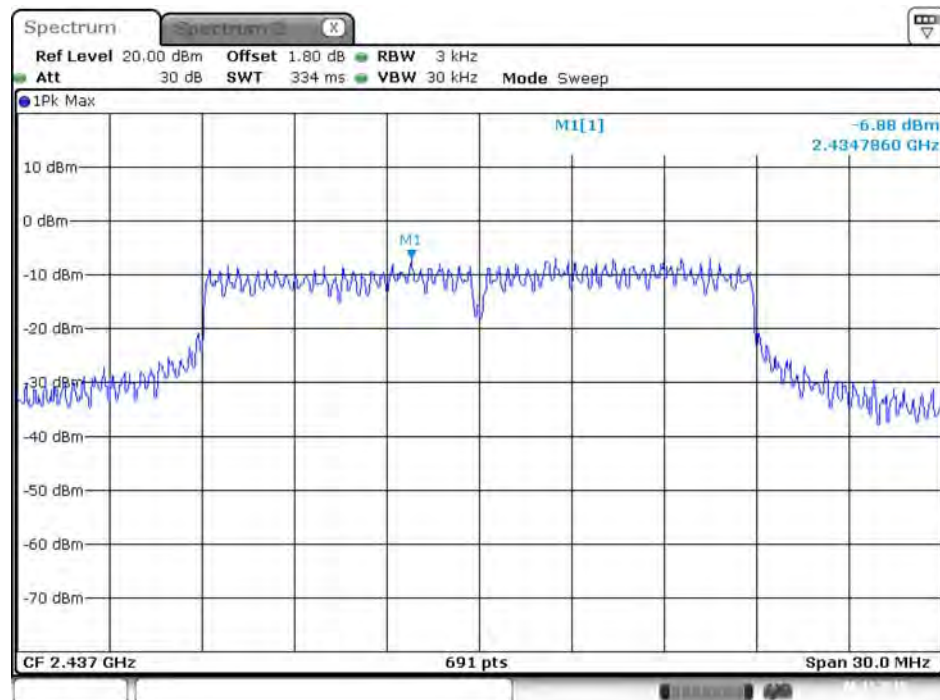


Date: 6.NOV.2015 02:57:19

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

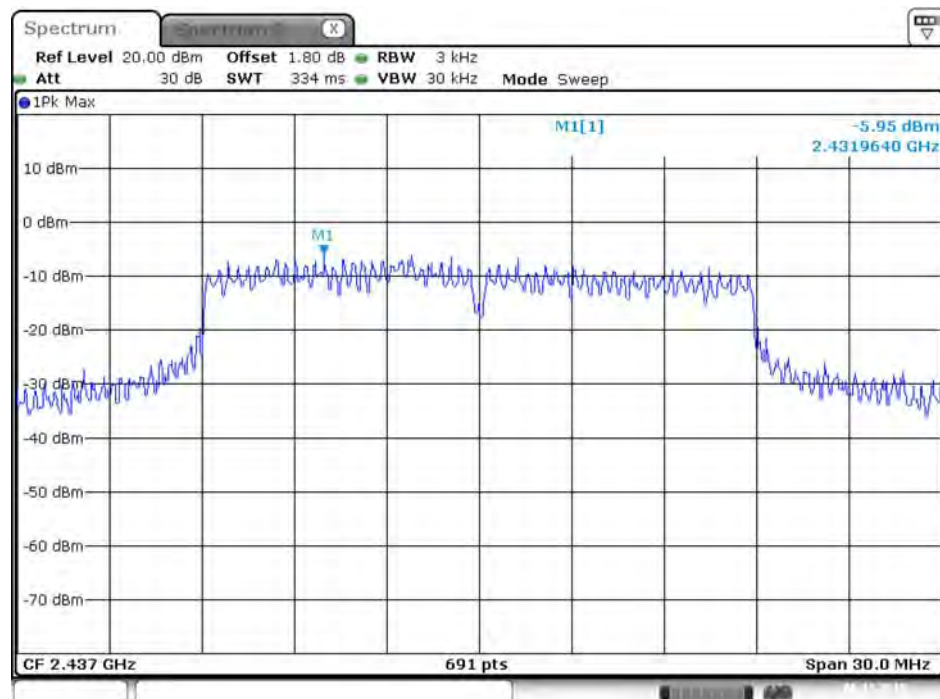


Date: 6.NOV.2015 02:57:35

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

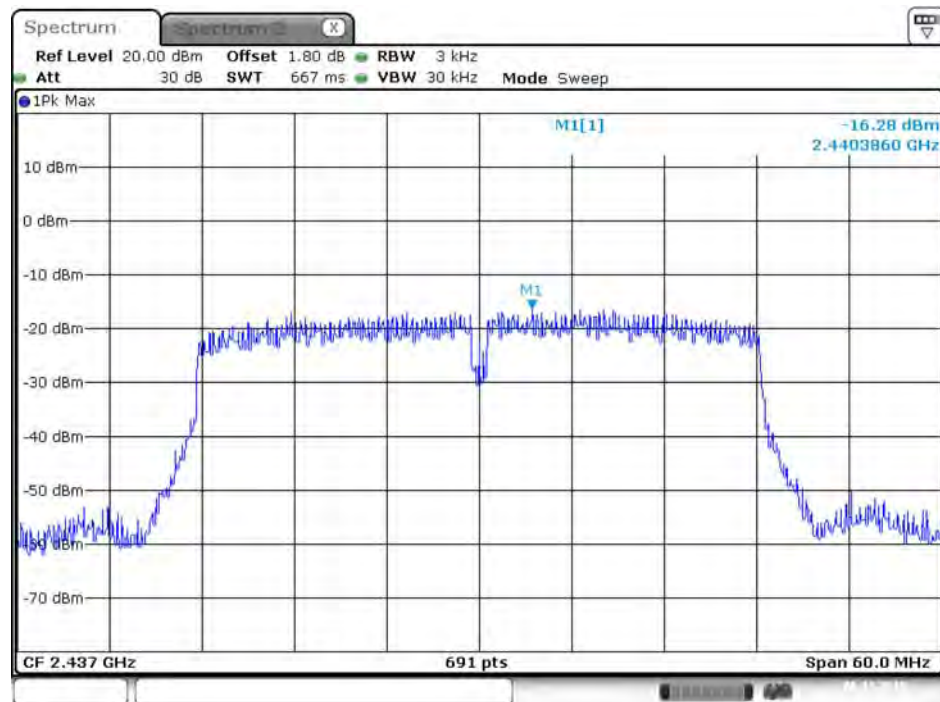


Date: 6.NOV.2015 02:52:21

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

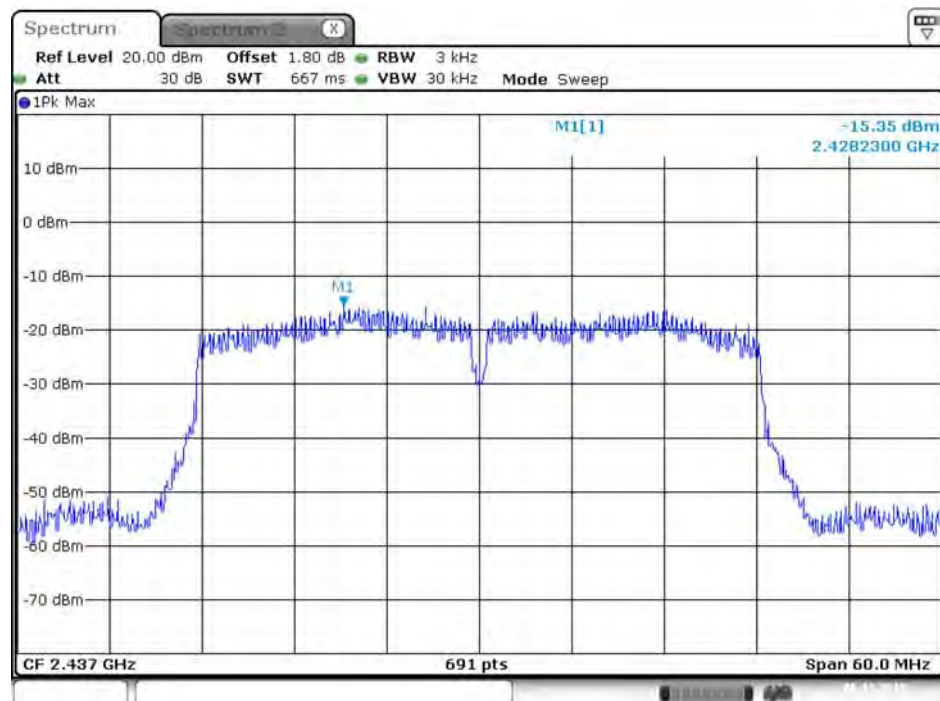


Date: 6.NOV.2015 02:52:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

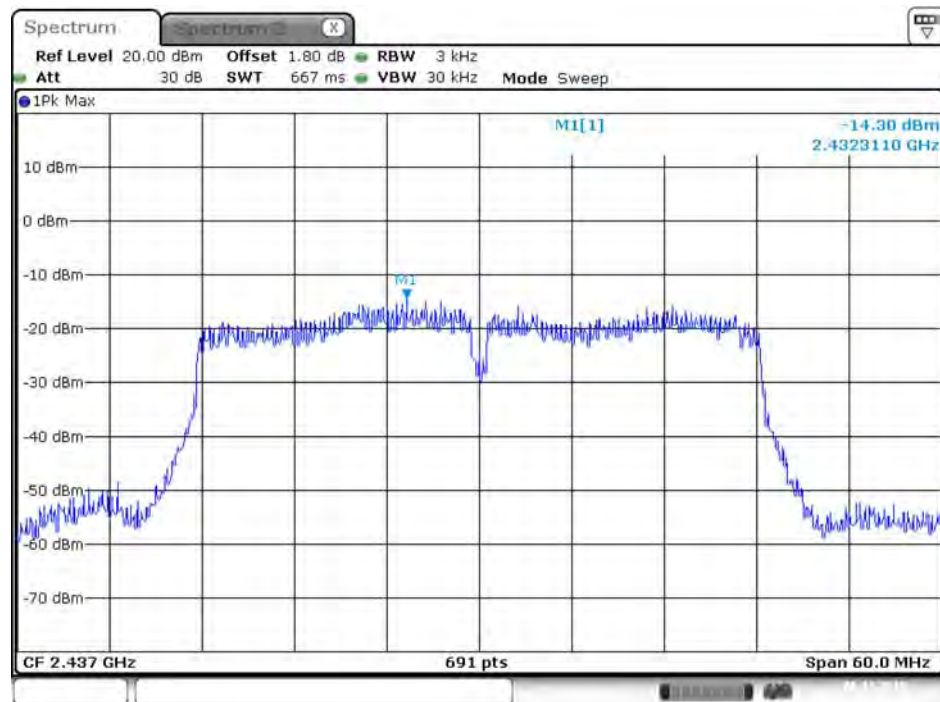

Date: 6 NOV 2015 02:53:02

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

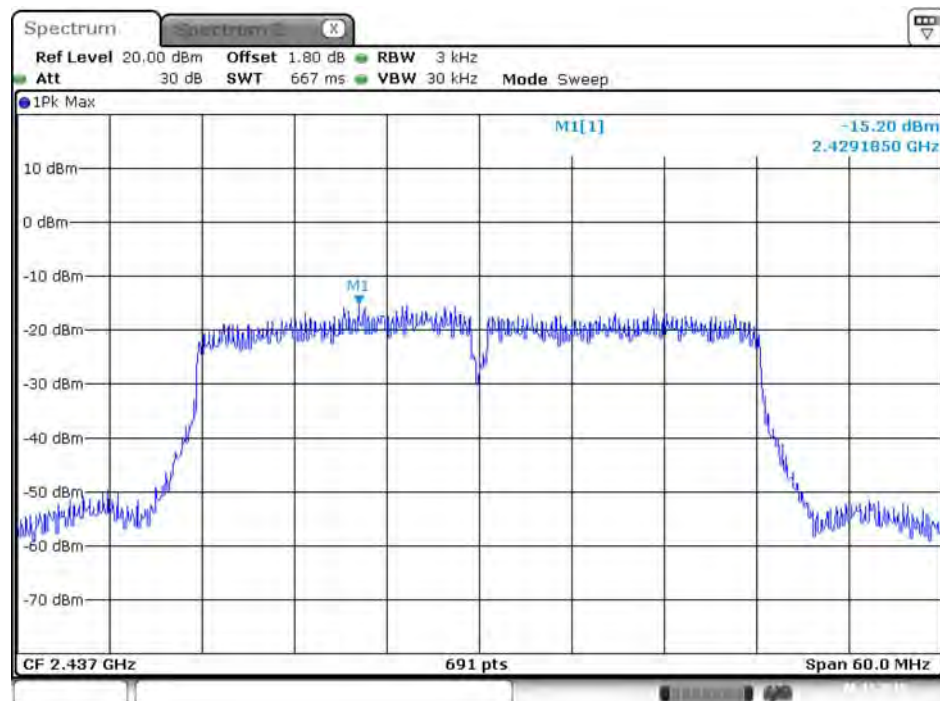

Date: 6 NOV 2015 02:53:18

Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1



Date: 21.OCT.2015 01:24:58

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 2



Date: 21.OCT.2015 01:24:41

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 3




Date: 21.OCT.2015 01:24:23

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 4




Date: 21.OCT.2015 01:24:04

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

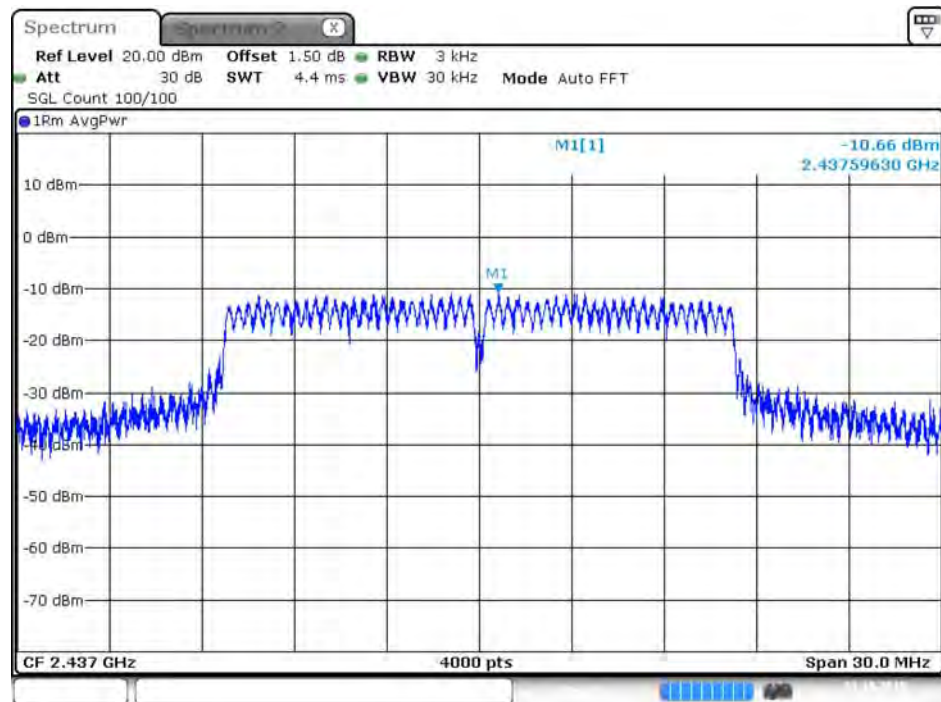


Date: 21.OCT.2015 01:29:34

P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

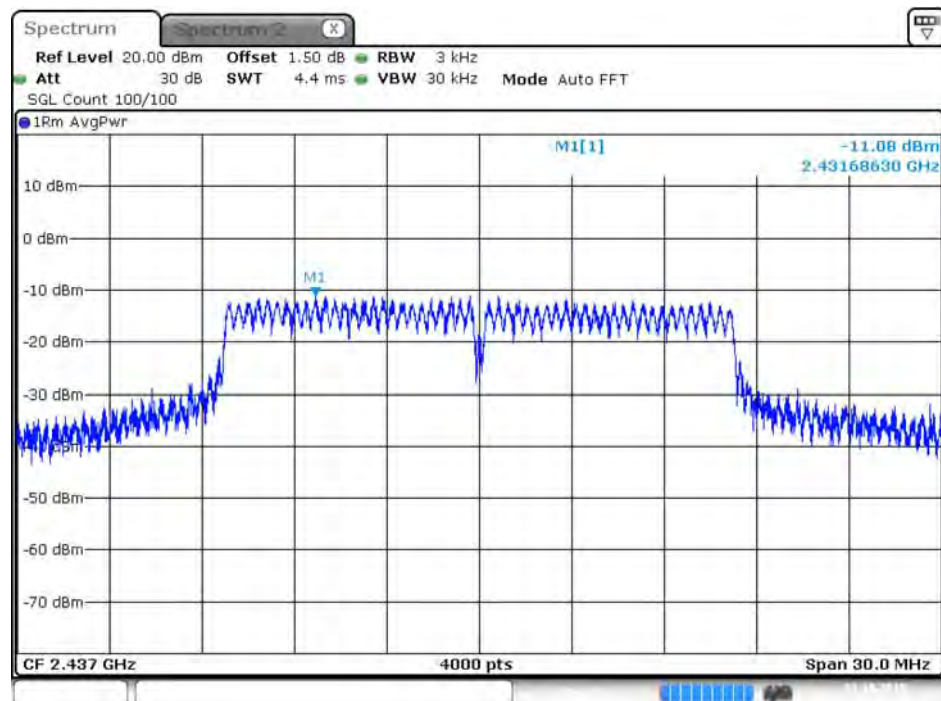


Date: 21.OCT.2015 01:29:17

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

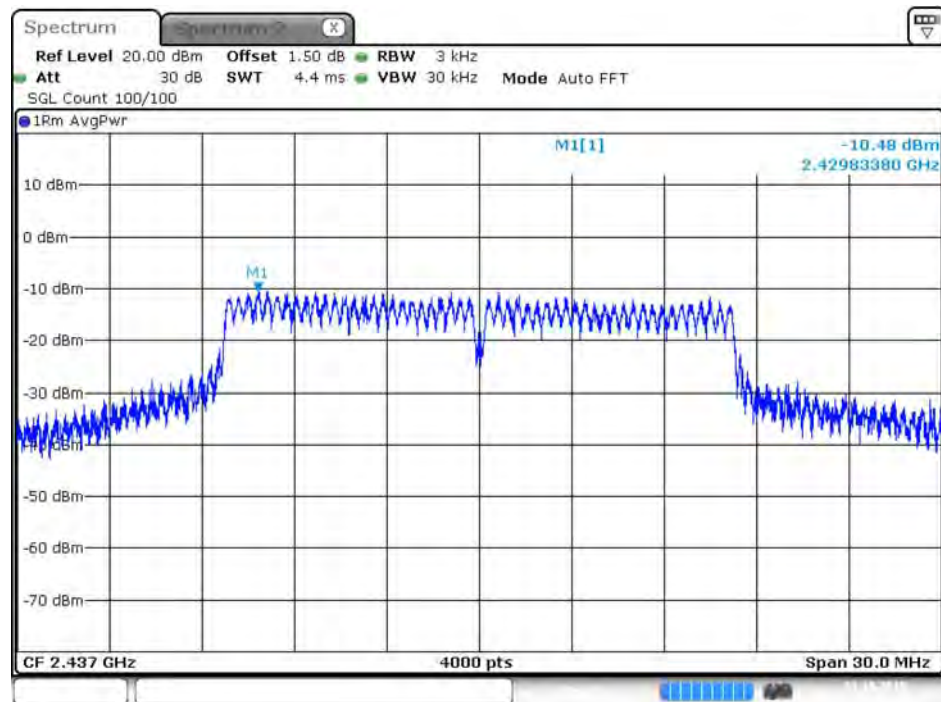


Date: 21.OCT.2015 01:28:48

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

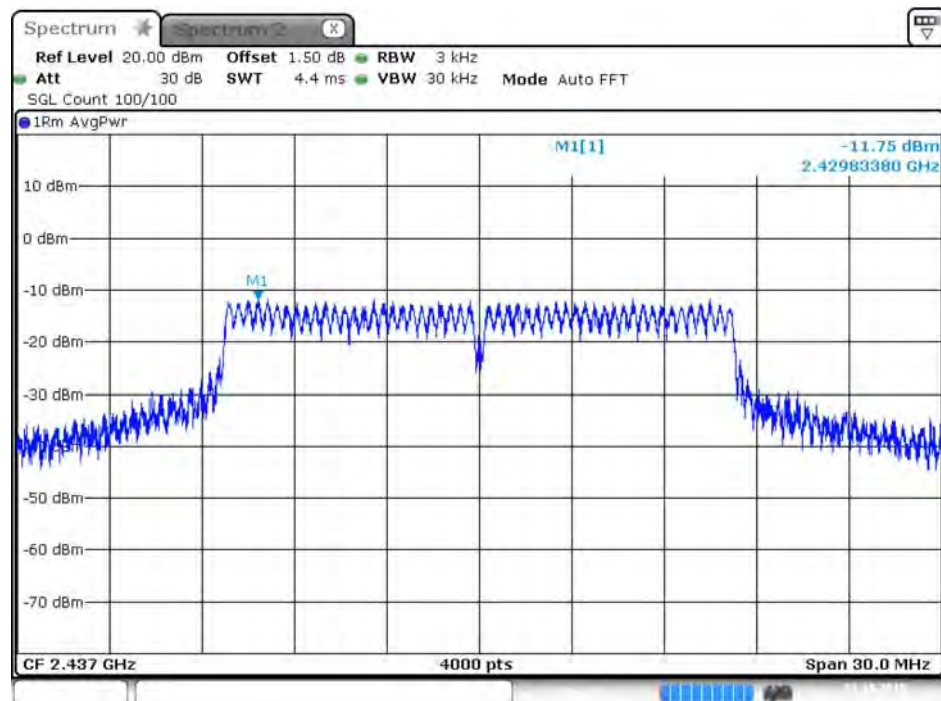


Date: 21.OCT.2015 01:28:29

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

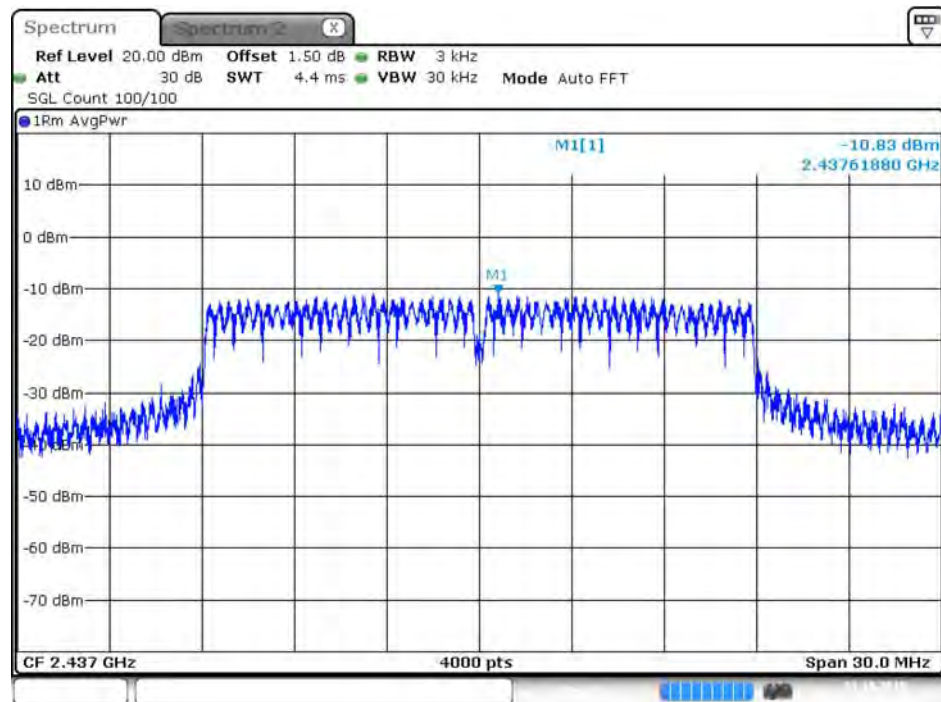


Date: 21.OCT.2015 01:35:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

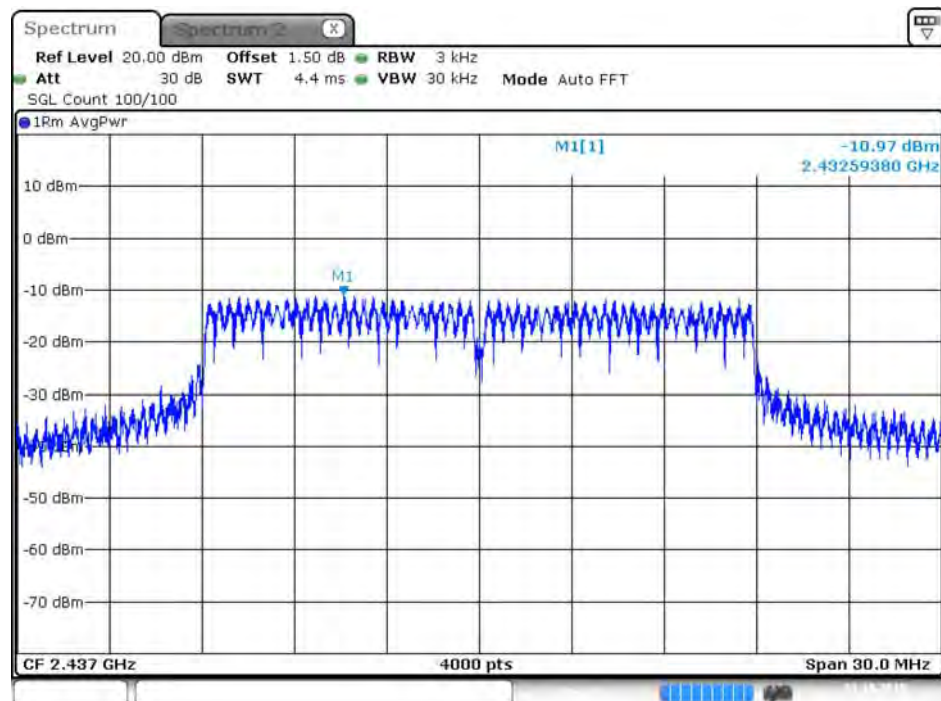


Date: 21.OCT.2015 01:35:20

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

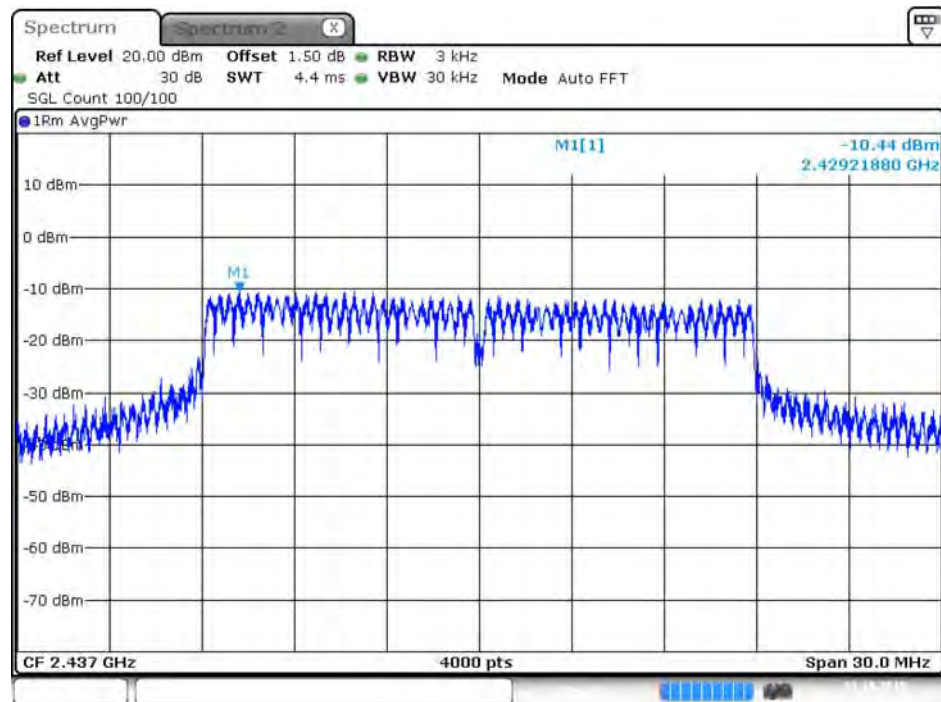


Date: 21.OCT.2015 01:35:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

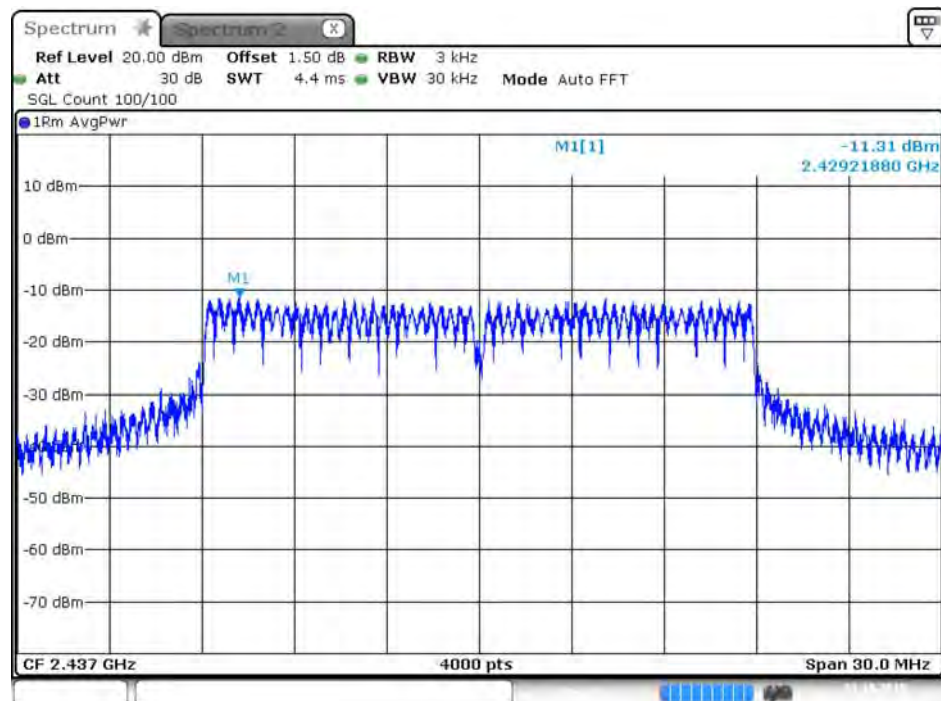


Date: 21.OCT.2015 01:34:45

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

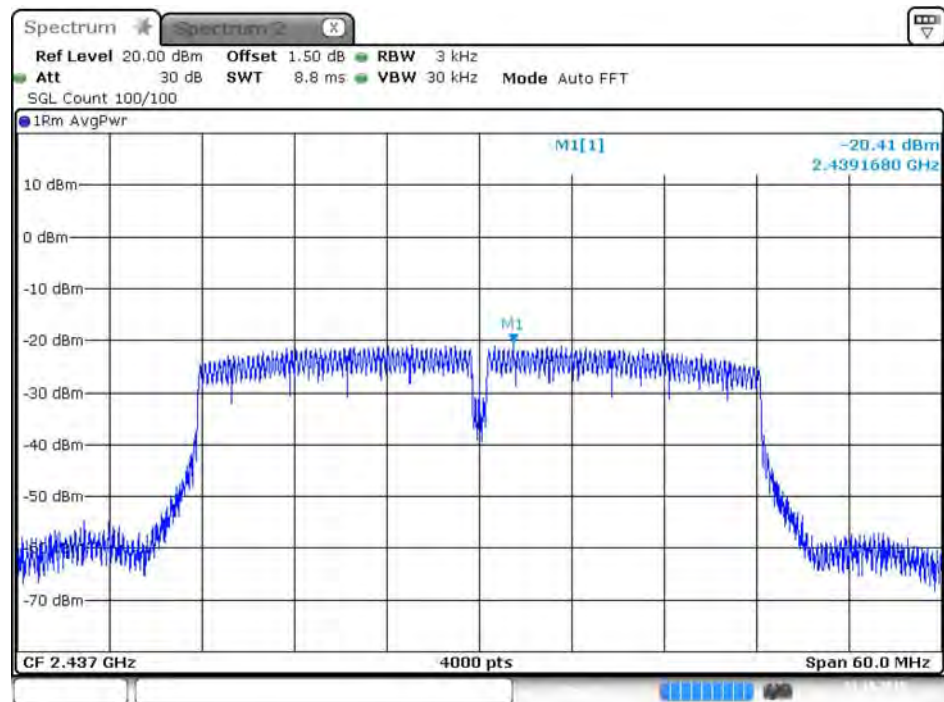


Date: 21.OCT.2015 01:41:39

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

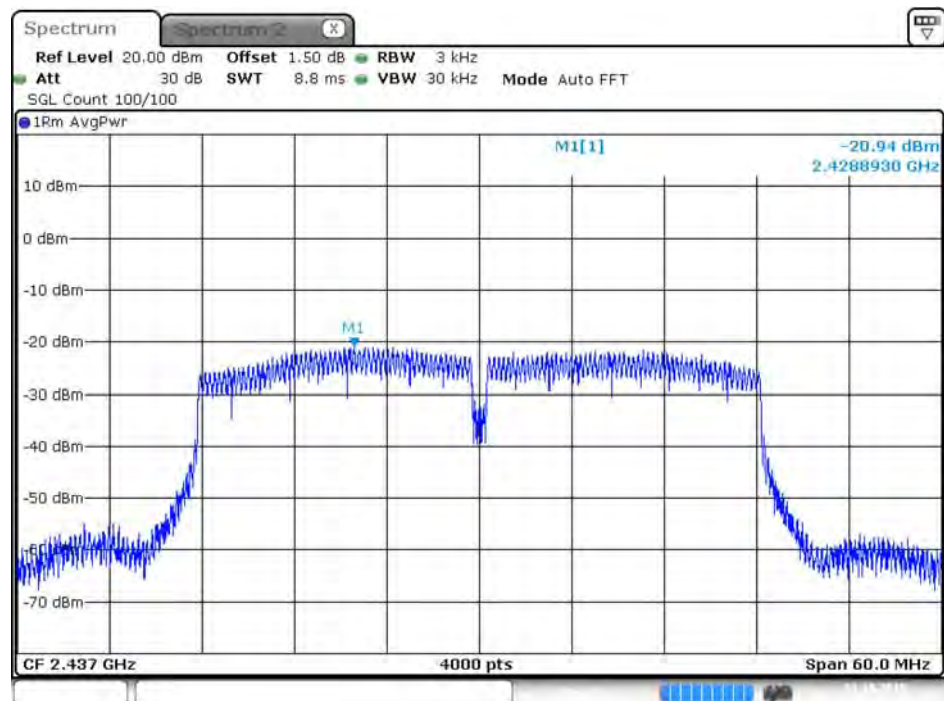


Date: 21.OCT.2015 01:41:58

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

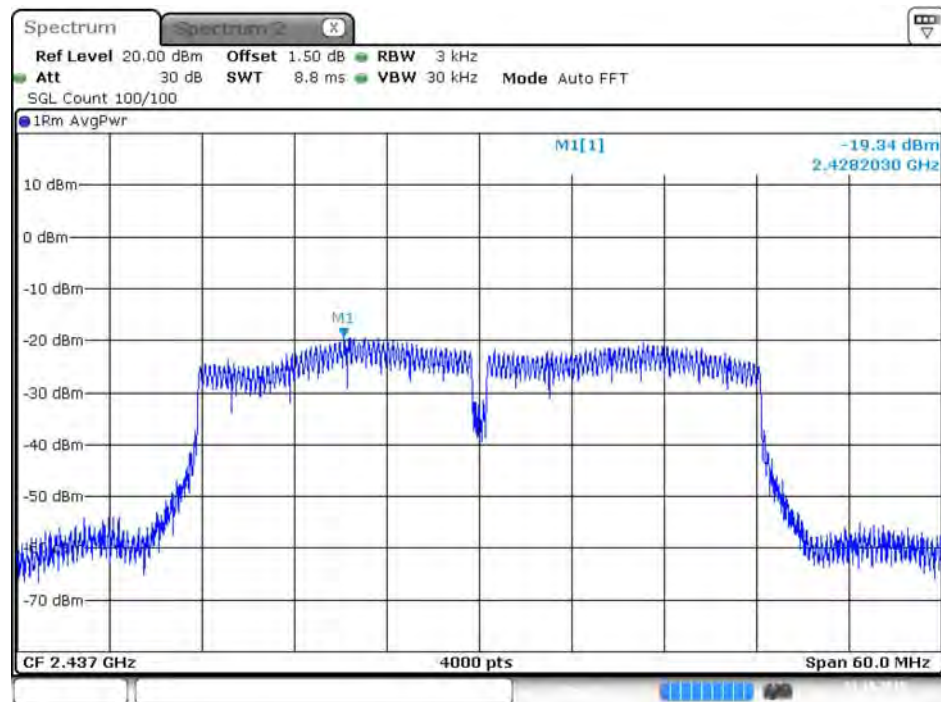

Date: 21.OCT.2015 01:42:19

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

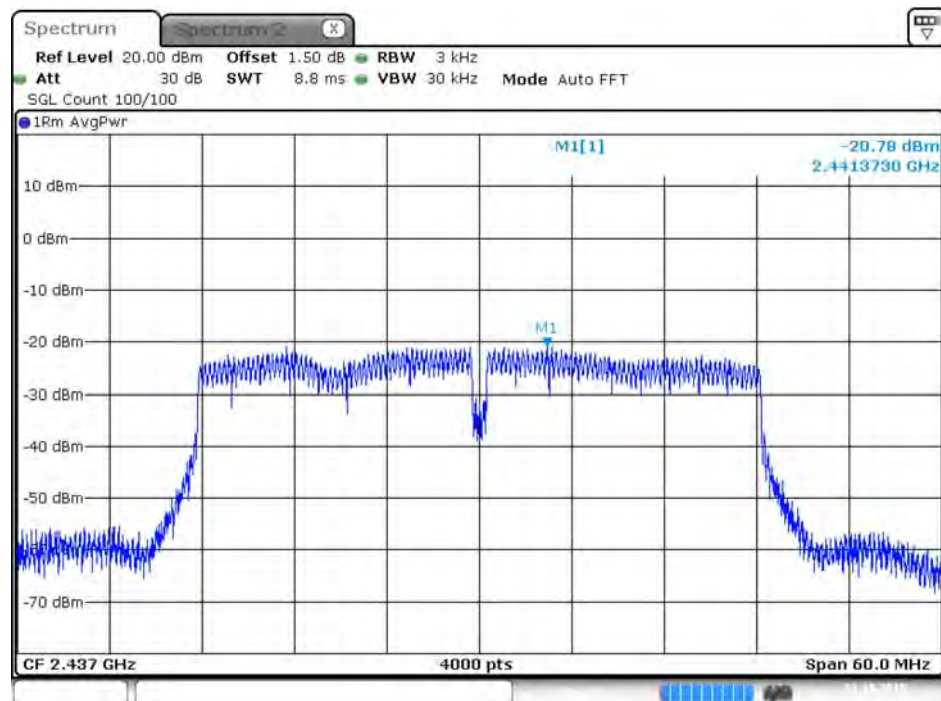

Date: 21.OCT.2015 01:42:39

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.71	14.50	500	Complies
	2437 MHz	4.06	14.15	500	Complies
	2462 MHz	4.52	12.16	500	Complies
802.11g	2412 MHz	11.30	15.63	500	Complies
	2437 MHz	5.57	19.80	500	Complies
	2462 MHz	11.36	15.98	500	Complies
802.11n MCS0 HT20	2412 MHz	13.74	16.58	500	Complies
	2437 MHz	9.45	22.84	500	Complies
	2462 MHz	4.46	15.54	500	Complies
802.11n MCS0 HT40	2422 MHz	24.35	36.18	500	Complies
	2437 MHz	25.62	36.18	500	Complies
	2452 MHz	32.58	36.18	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.59	13.89	500	Complies
	2437 MHz	6.67	12.07	500	Complies
	2462 MHz	3.71	10.33	500	Complies
802.11g	2412 MHz	13.57	16.50	500	Complies
	2437 MHz	12.12	15.80	500	Complies
	2462 MHz	9.22	15.98	500	Complies
802.11n MCS0 HT20	2412 MHz	17.33	17.54	500	Complies
	2437 MHz	15.07	19.19	500	Complies
	2462 MHz	11.71	17.45	500	Complies
802.11n MCS0 HT40	2422 MHz	24.35	36.18	500	Complies
	2437 MHz	28.87	34.73	500	Complies
	2452 MHz	36.29	34.47	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.59	13.89	500	Complies
	2437 MHz	4.06	14.15	500	Complies
	2462 MHz	4.52	12.16	500	Complies
802.11g	2412 MHz	11.30	15.63	500	Complies
	2437 MHz	5.57	19.80	500	Complies
	2462 MHz	12.64	17.28	500	Complies
802.11n MCS0 HT20	2412 MHz	3.36	17.45	500	Complies
	2437 MHz	9.45	22.84	500	Complies
	2462 MHz	11.65	17.45	500	Complies
802.11n MCS0 HT40	2422 MHz	24.35	36.18	500	Complies
	2437 MHz	24.46	35.46	500	Complies
	2452 MHz	32.58	36.18	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	4.99	14.33	500	Complies
	2437 MHz	4.58	13.11	500	Complies
	2462 MHz	4.52	12.24	500	Complies
802.11g	2412 MHz	16.41	15.72	500	Complies
	2437 MHz	13.91	15.63	500	Complies
	2462 MHz	4.06	16.15	500	Complies
802.11n MCS0 HT20	2412 MHz	11.94	17.02	500	Complies
	2437 MHz	12.46	17.80	500	Complies
	2462 MHz	4.00	17.19	500	Complies
802.11n MCS0 HT40	2422 MHz	34.44	33.43	500	Complies
	2437 MHz	24.12	35.31	500	Complies
	2452 MHz	24.70	35.89	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.59	13.89	500	Complies
	2437 MHz	4.06	14.15	500	Complies
	2462 MHz	3.71	10.33	500	Complies
802.11g	2412 MHz	11.30	15.63	500	Complies
	2437 MHz	5.57	19.80	500	Complies
	2462 MHz	11.36	15.98	500	Complies
802.11n MCS0 HT20	2412 MHz	10.60	17.19	500	Complies
	2437 MHz	9.45	22.84	500	Complies
	2462 MHz	11.65	17.45	500	Complies
802.11n MCS0 HT40	2422 MHz	25.04	36.32	500	Complies
	2437 MHz	24.46	35.46	500	Complies
	2452 MHz	32.58	36.18	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.71	14.50	500	Complies
	2437 MHz	4.06	14.15	500	Complies
	2462 MHz	4.06	13.89	500	Complies
802.11g	2412 MHz	9.80	15.63	500	Complies
	2437 MHz	5.57	19.80	500	Complies
	2462 MHz	8.87	14.93	500	Complies
802.11n MCS0 HT20	2412 MHz	10.43	17.19	500	Complies
	2437 MHz	14.49	21.88	500	Complies
	2462 MHz	9.80	17.45	500	Complies
802.11n MCS0 HT40	2422 MHz	33.74	34.88	500	Complies
	2437 MHz	24.46	36.76	500	Complies
	2452 MHz	36.29	34.47	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.59	14.41	500	Complies
	2437 MHz	11.13	11.03	500	Complies
	2462 MHz	3.59	14.50	500	Complies
802.11g	2412 MHz	6.67	16.41	500	Complies
	2437 MHz	5.04	20.14	500	Complies
	2462 MHz	12.64	17.28	500	Complies
802.11n MCS0 HT20	2412 MHz	3.36	17.45	500	Complies
	2437 MHz	13.74	19.80	500	Complies
	2462 MHz	13.16	17.71	500	Complies
802.11n MCS0 HT40	2422 MHz	32.46	36.61	500	Complies
	2437 MHz	24.70	33.86	500	Complies
	2452 MHz	26.90	33.14	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

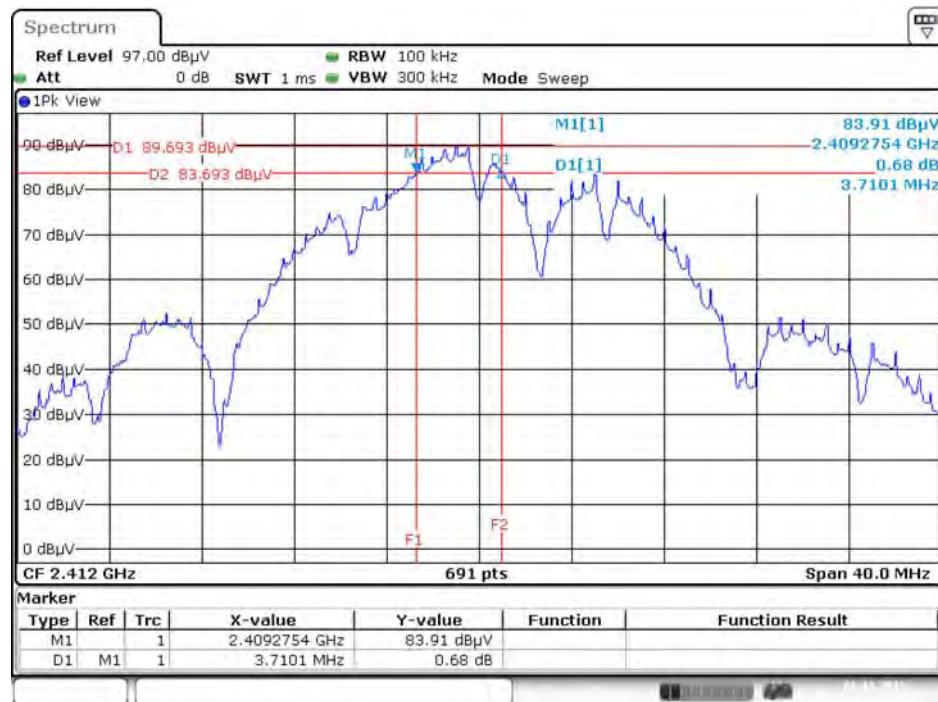


Date: 6 NOV 2015 02:42:53

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV 2015 02:43:47

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

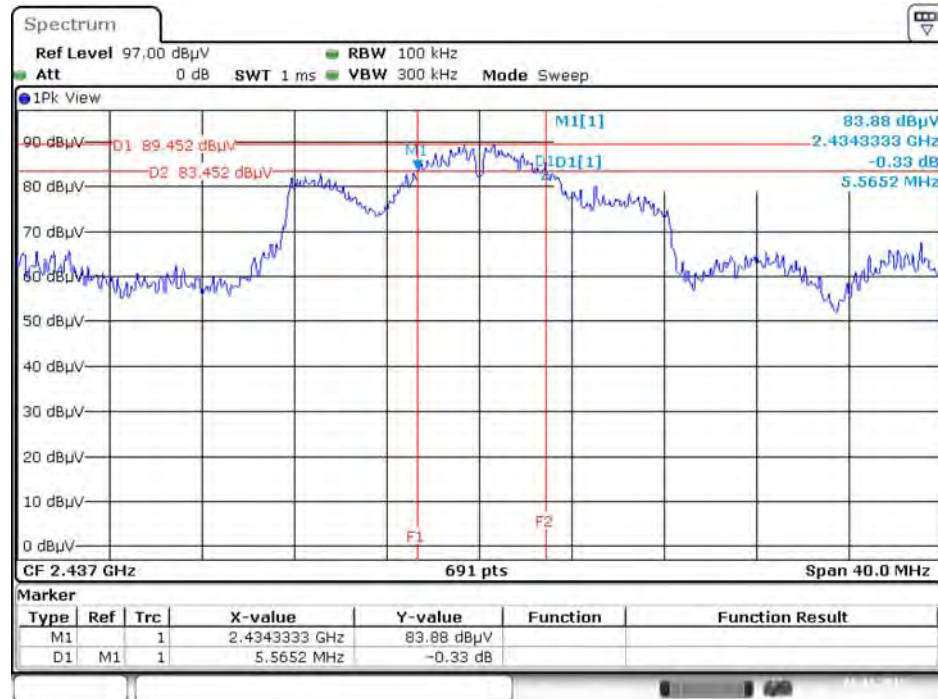


Date: 6.NOV.2015 02:15:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6.NOV.2015 01:59:54


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

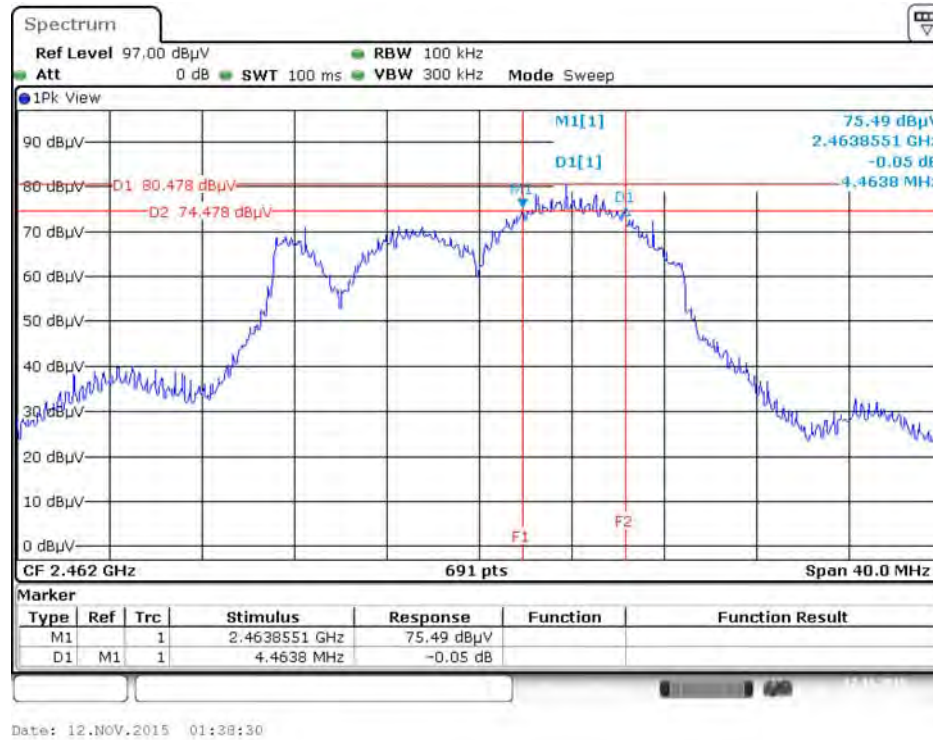


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

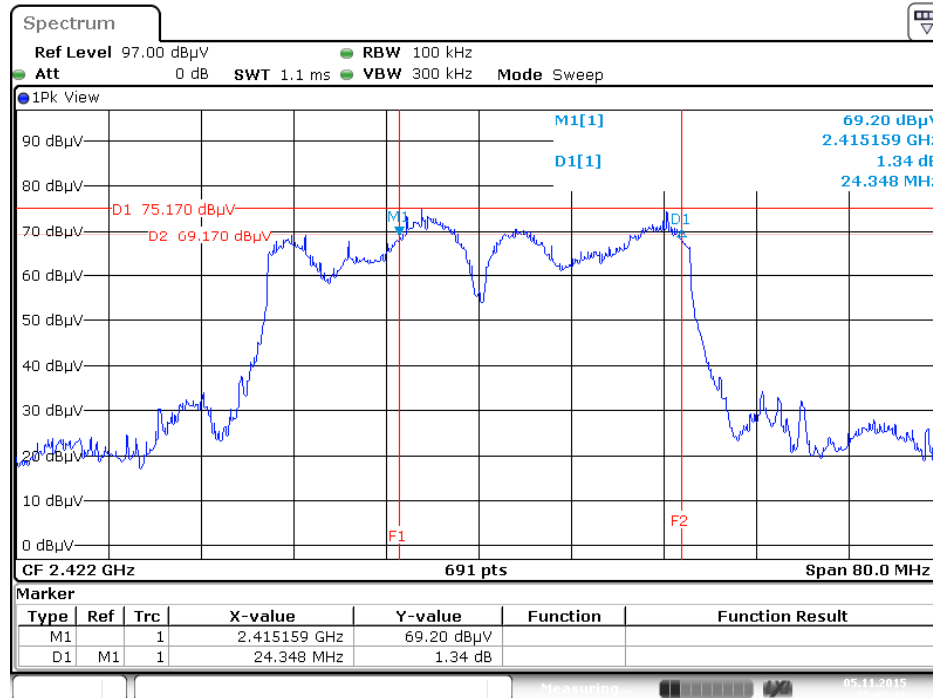


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

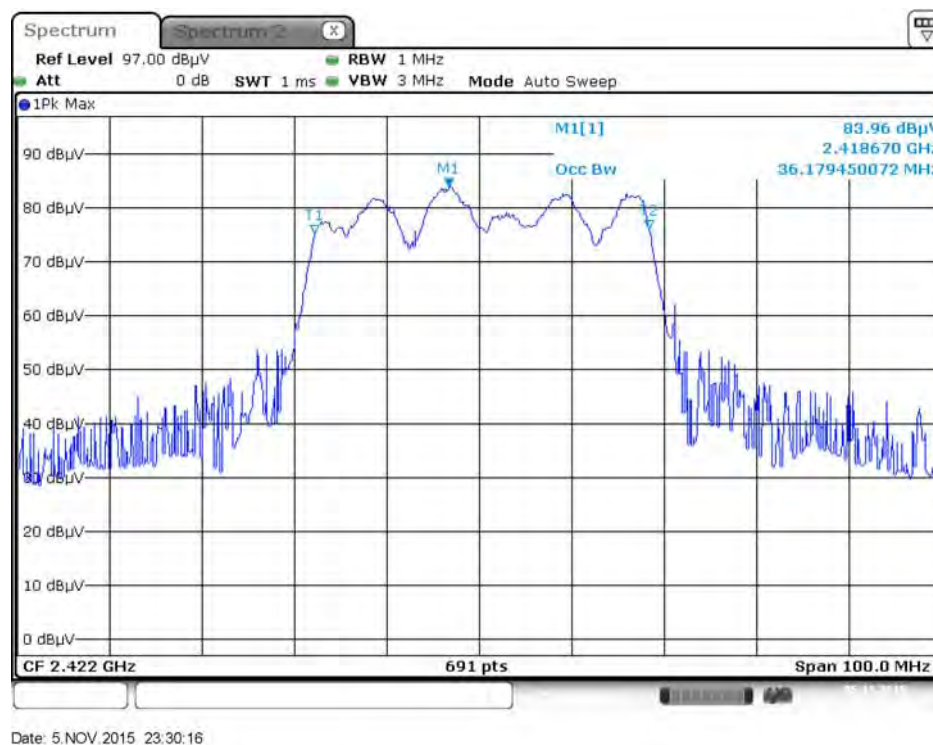

Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

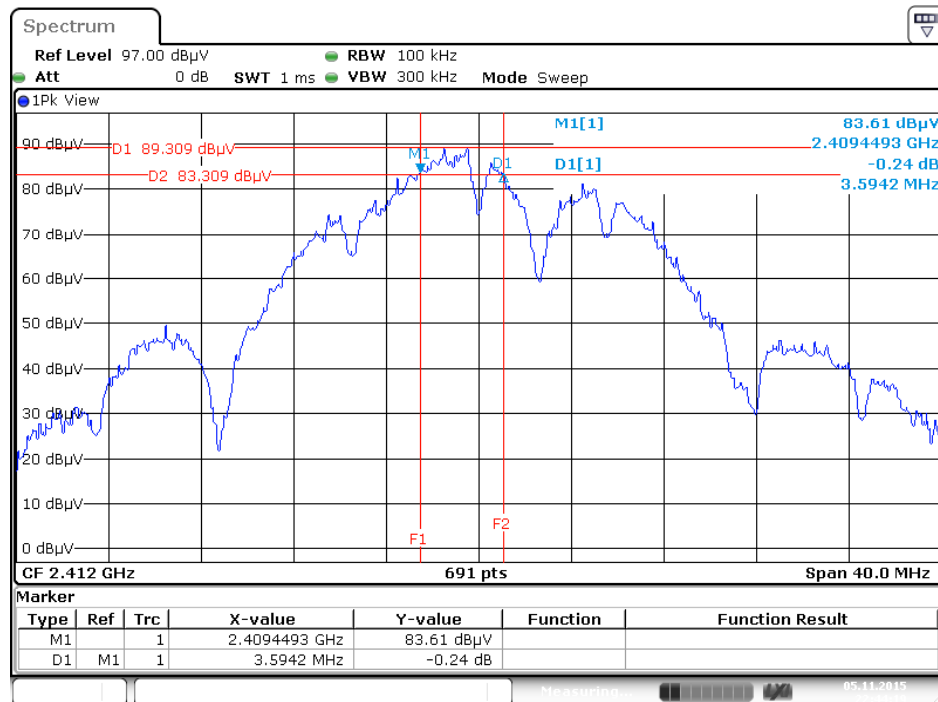


Date: 5 NOV 2015 22:44:20

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 5 NOV 2015 23:19:46

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

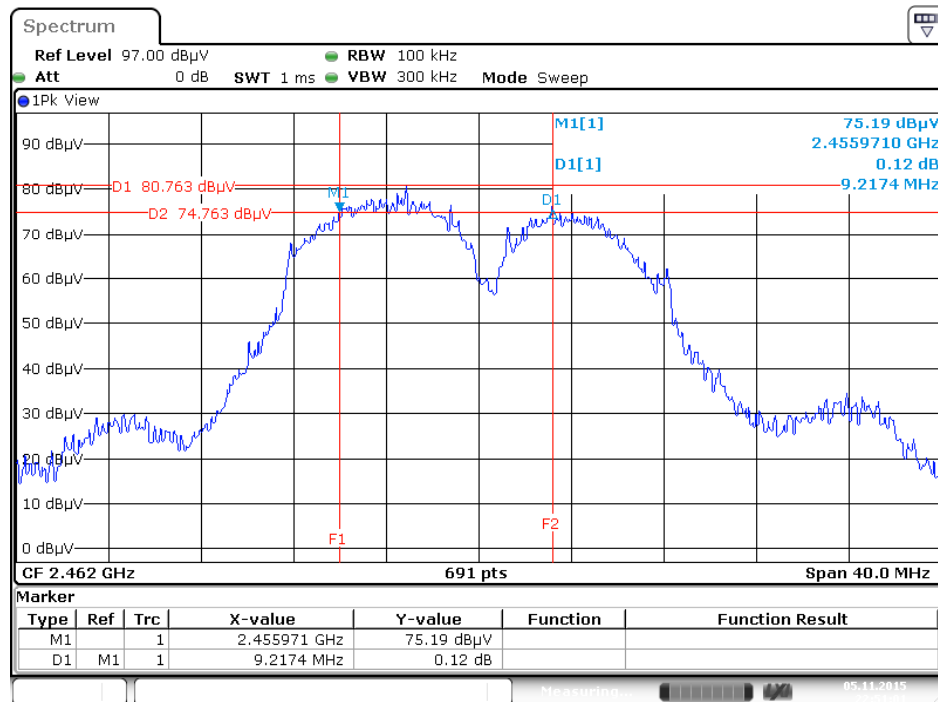


Date: 5 NOV 2015 22:51:01

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 5 NOV 2015 23:23:59

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

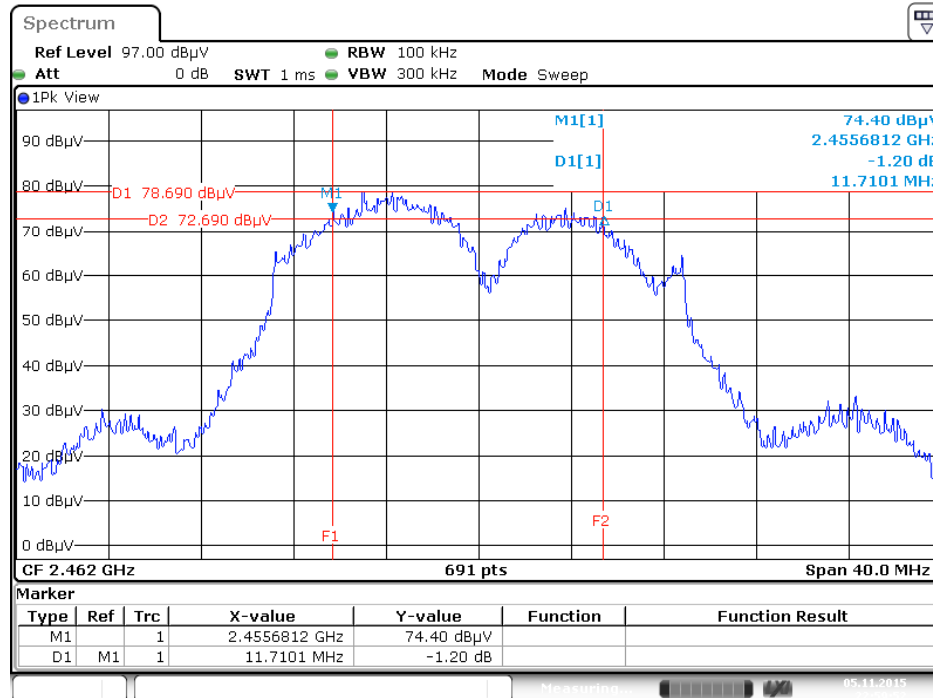


Date: 5 NOV 2015 22:59:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 5 NOV 2015 23:28:19

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

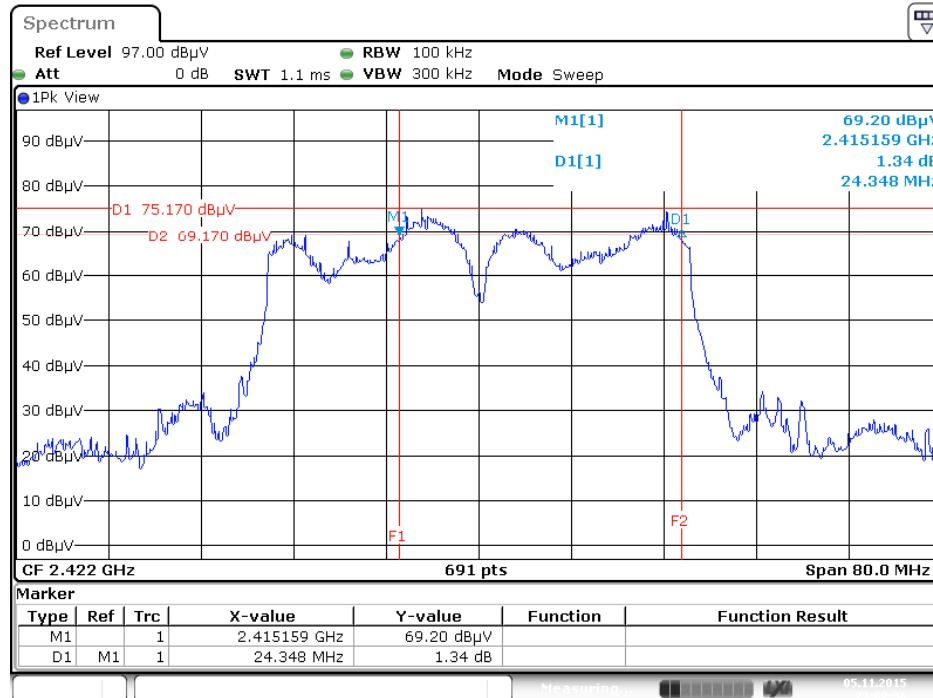


Date: 5 NOV 2015 23:02:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

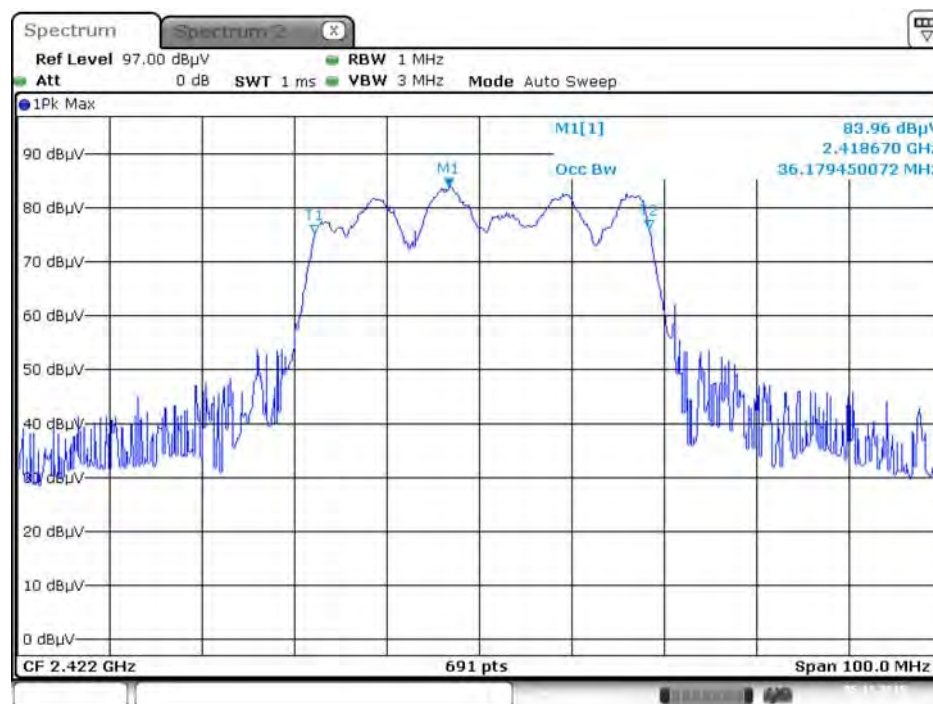


Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

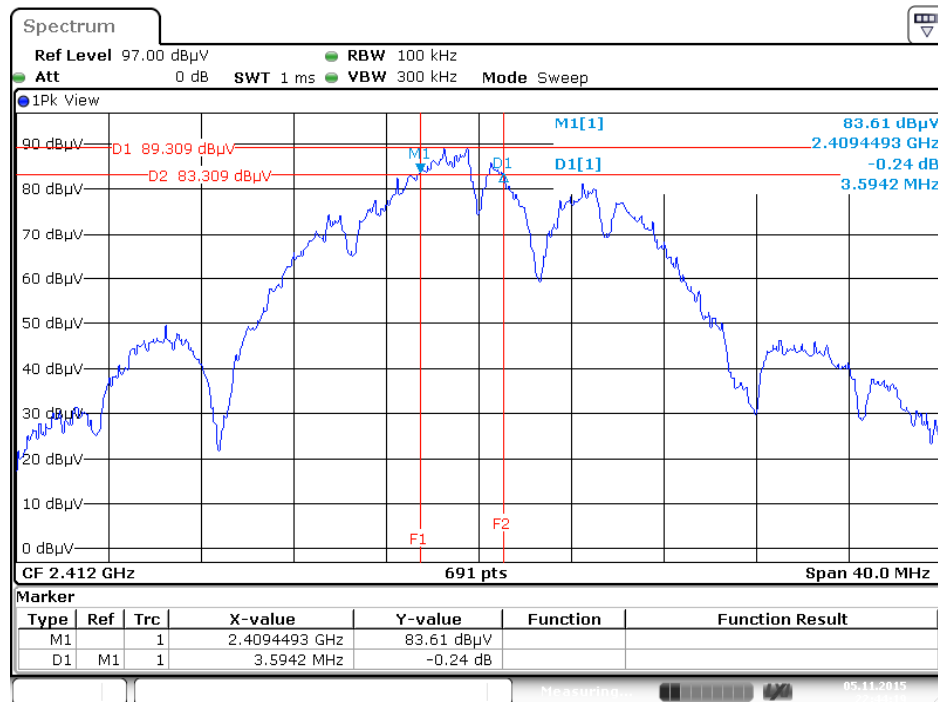


Date: 5 NOV 2015 22:44:20

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

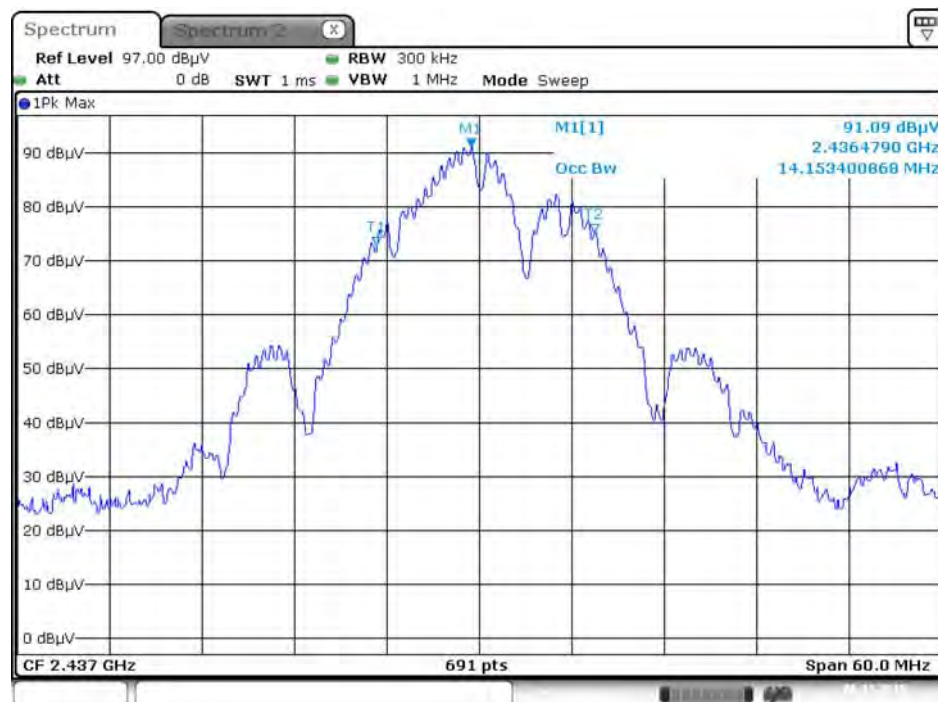

Date: 6 NOV 2015 02:01:38

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

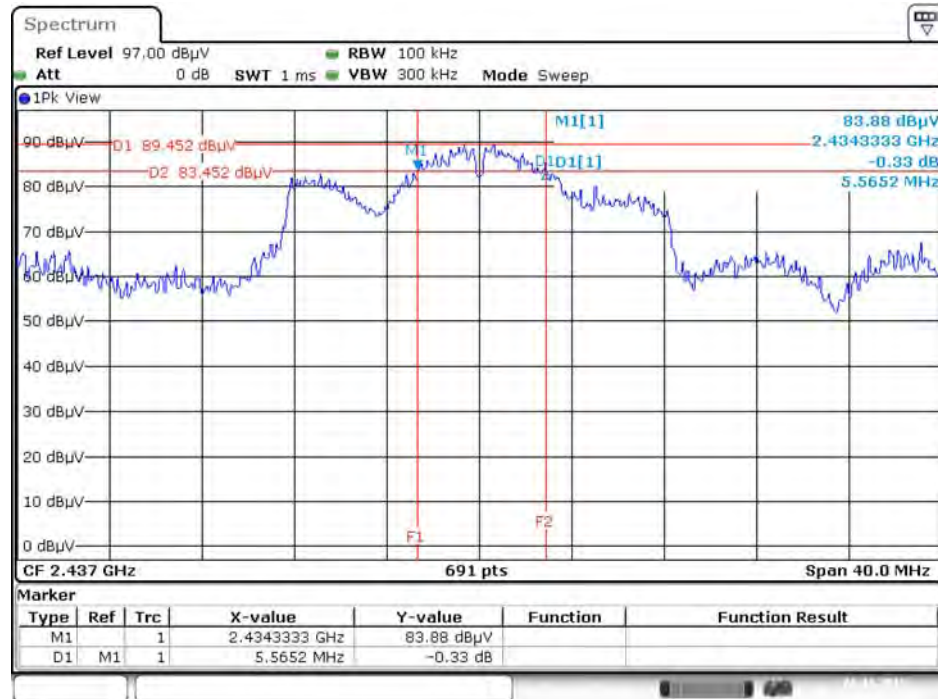


Date: 6 NOV. 2015 02:15:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 01:59:54

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

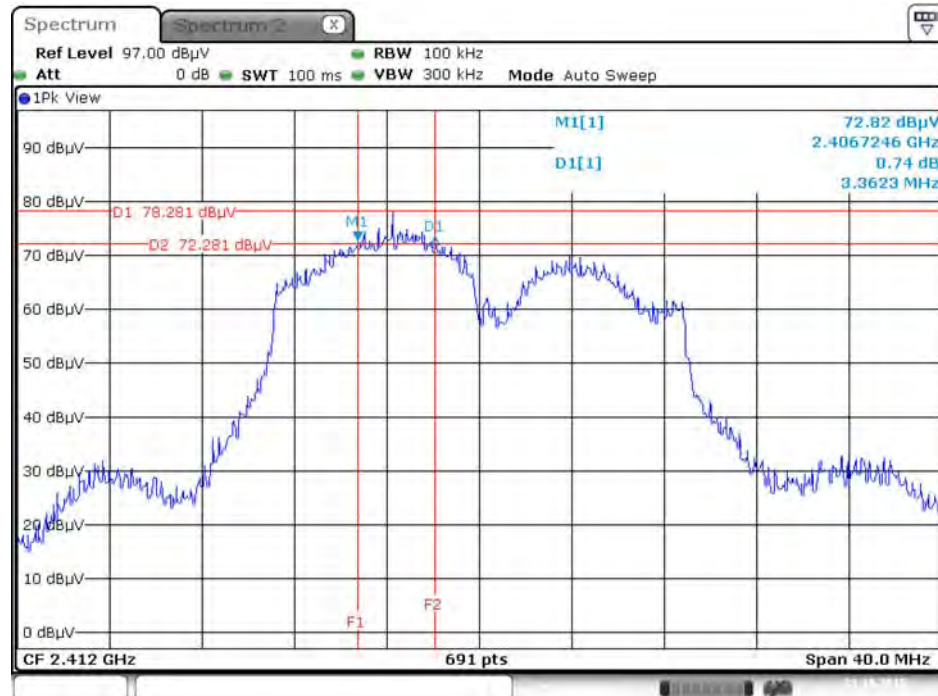


Date: 21.OCT.2015 00:49:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 6.NOV.2015 01:57:53

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

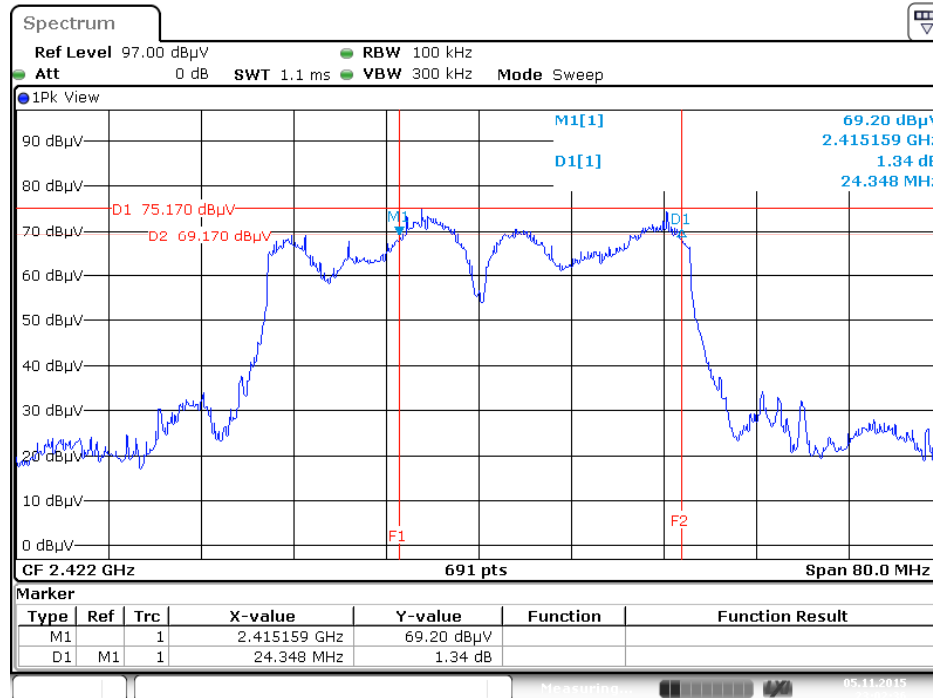


Date: 5 NOV 2015 23:02:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

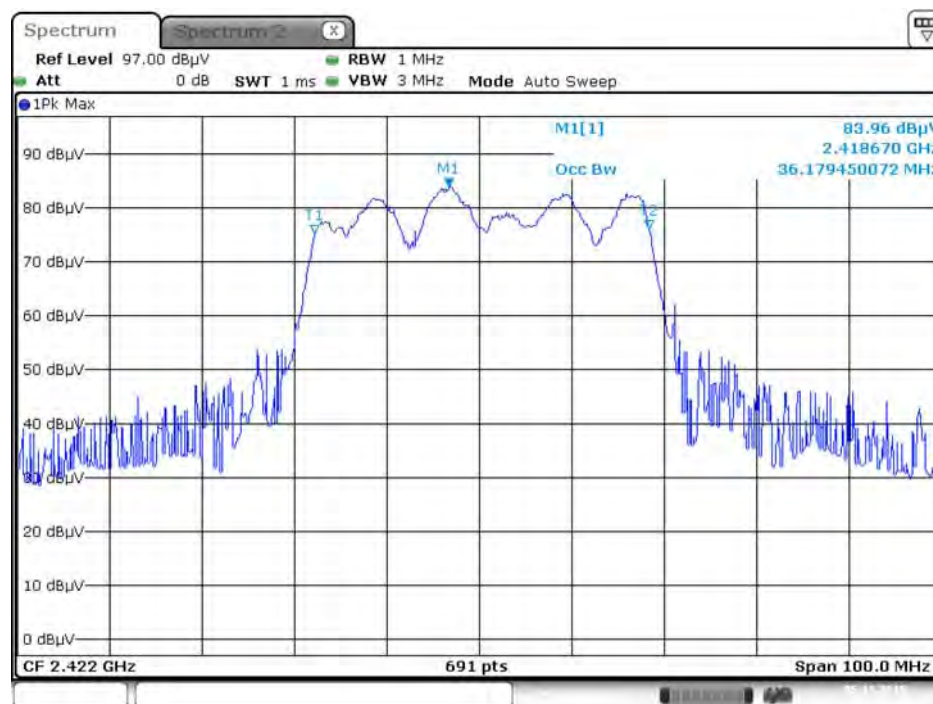


Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

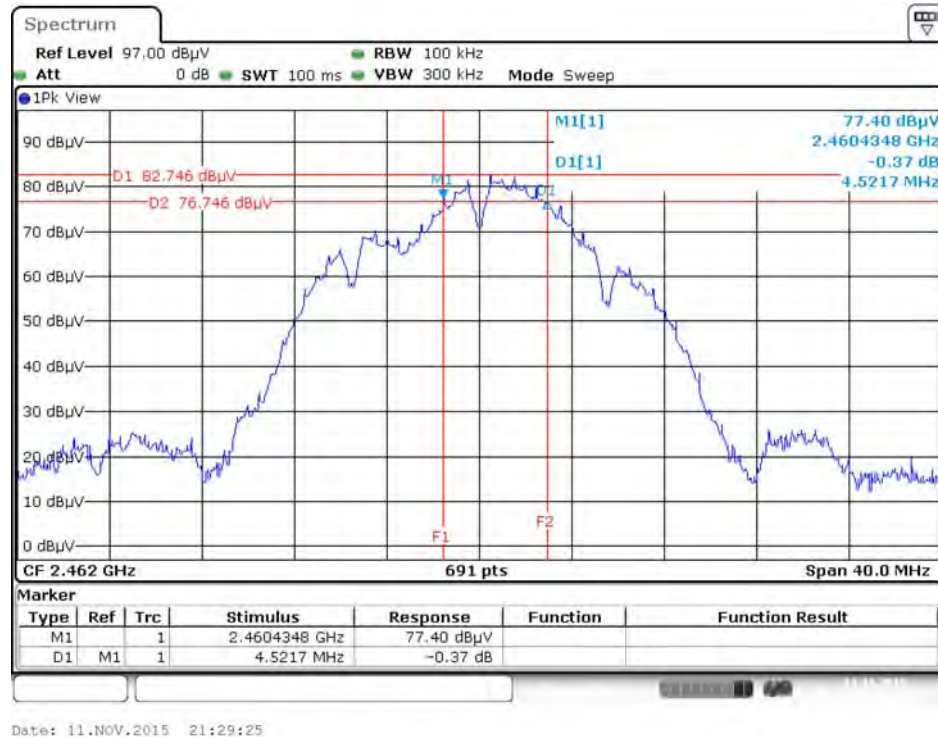

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

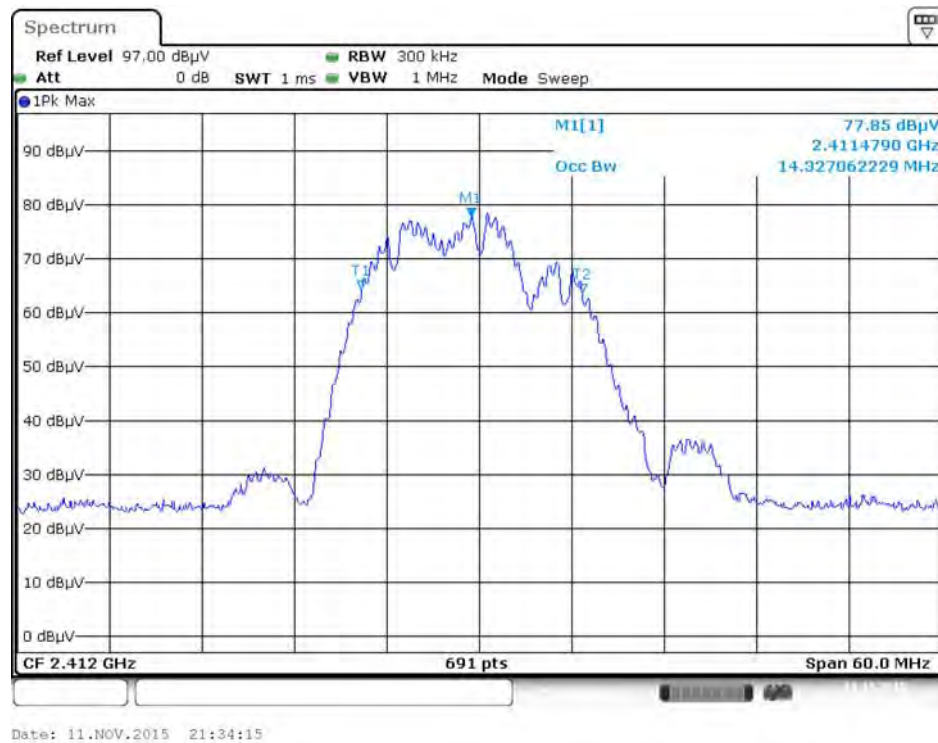

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

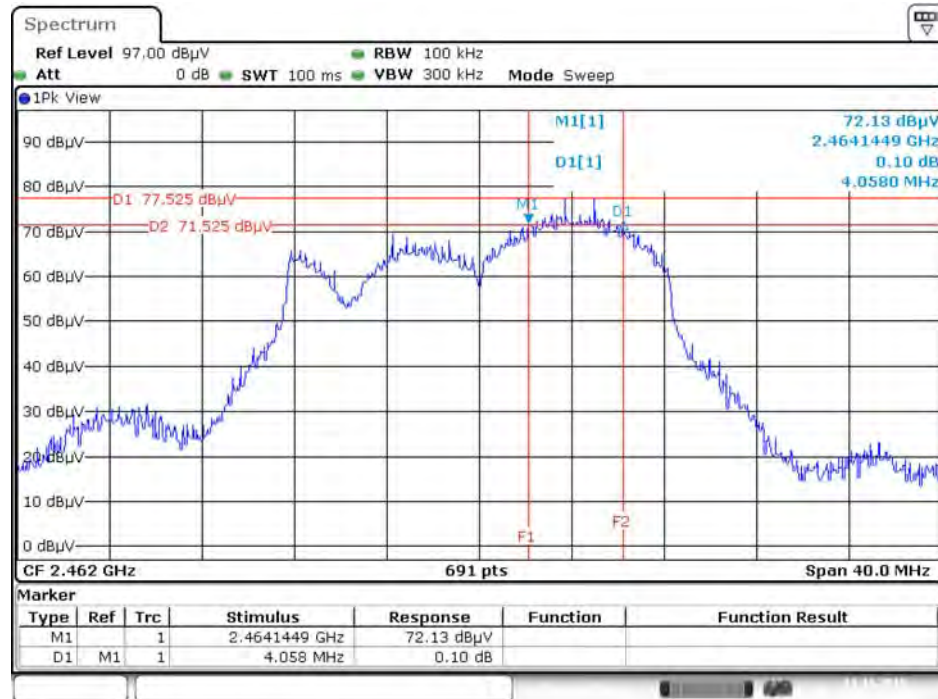


Date: 11.NOV.2015 21:30:03

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 11.NOV.2015 21:39:02


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

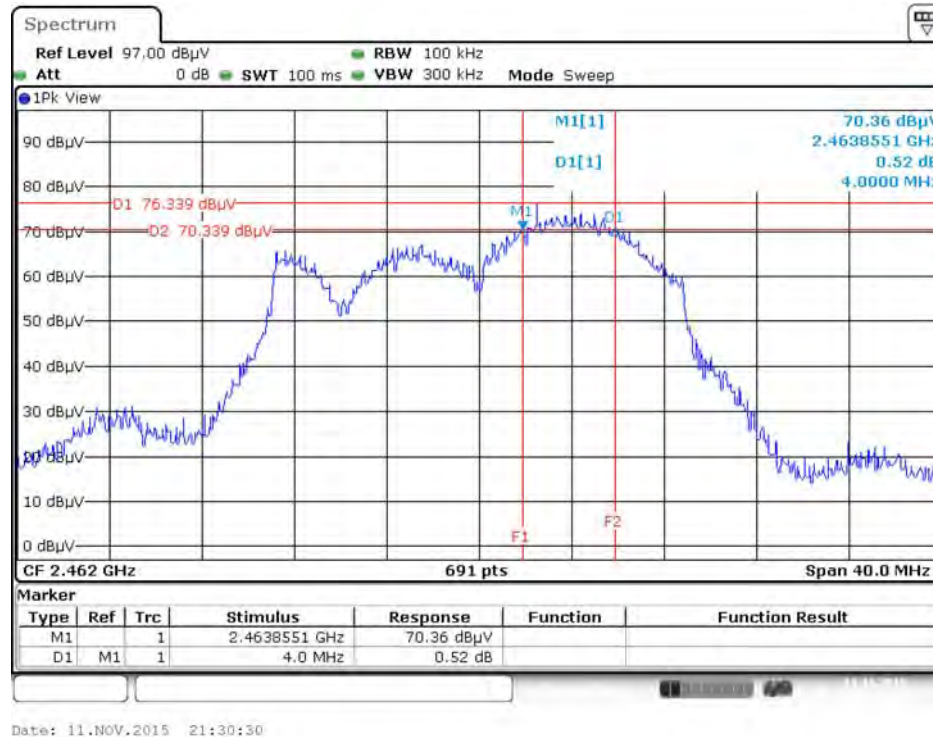


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

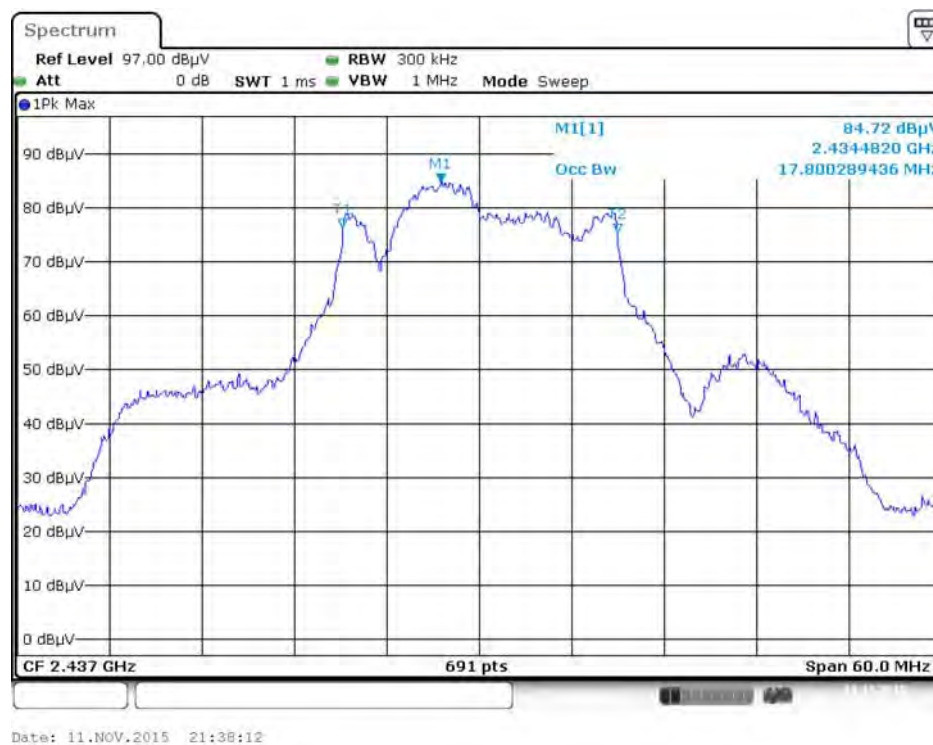

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

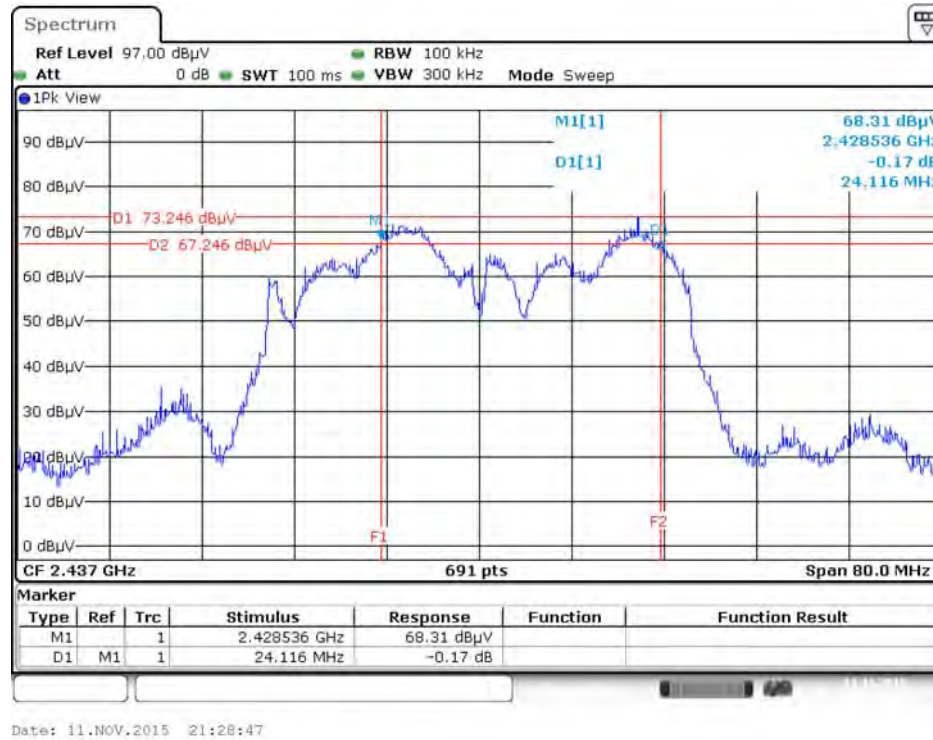


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

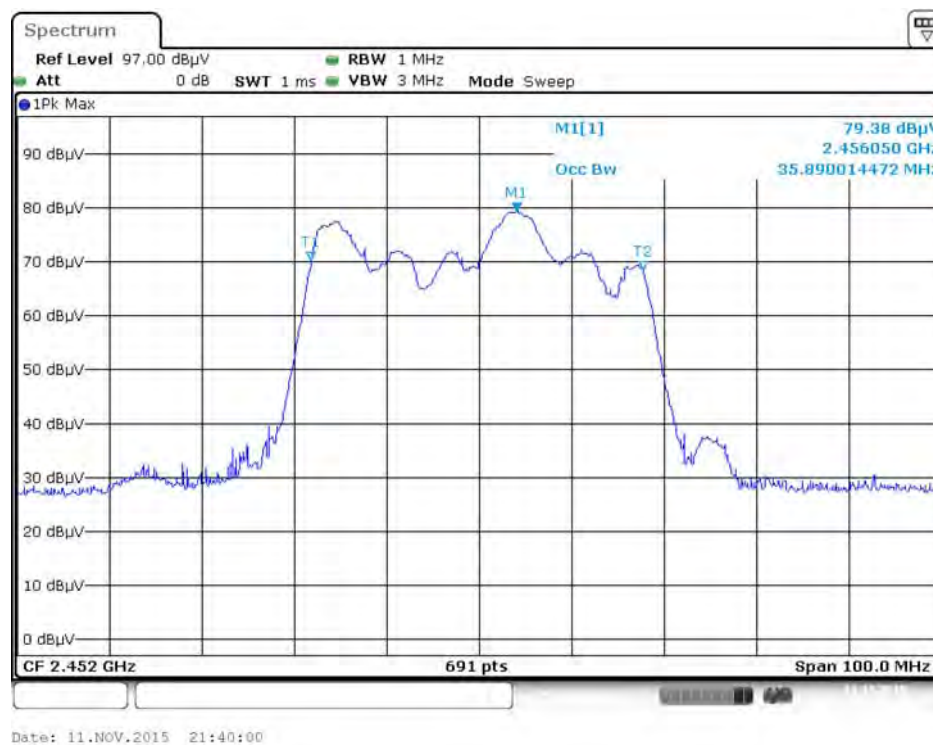


Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

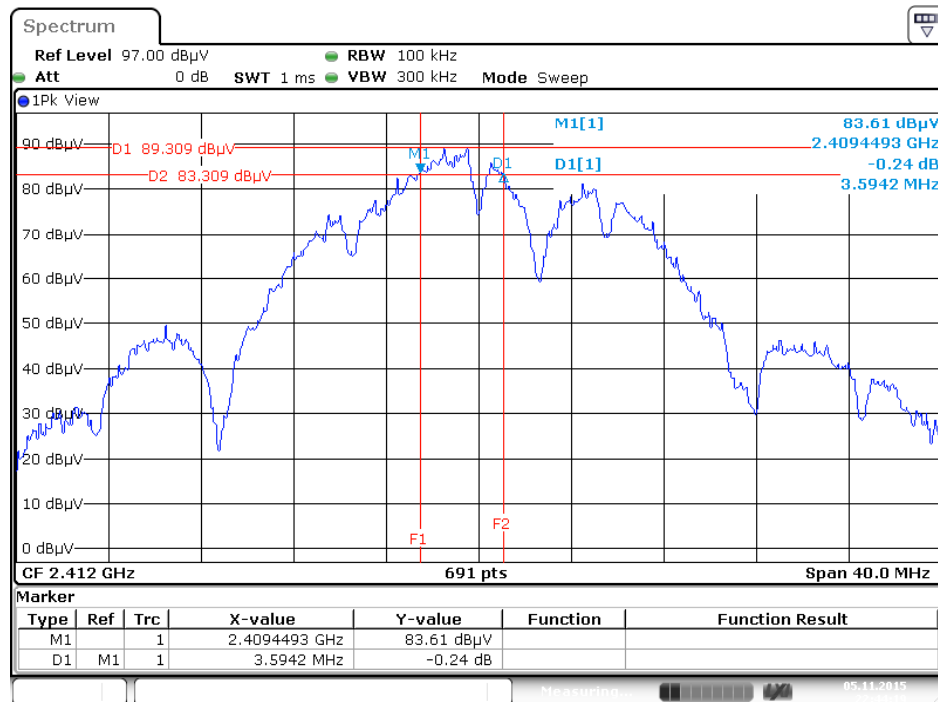


Date: 5 NOV 2015 22:44:20

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

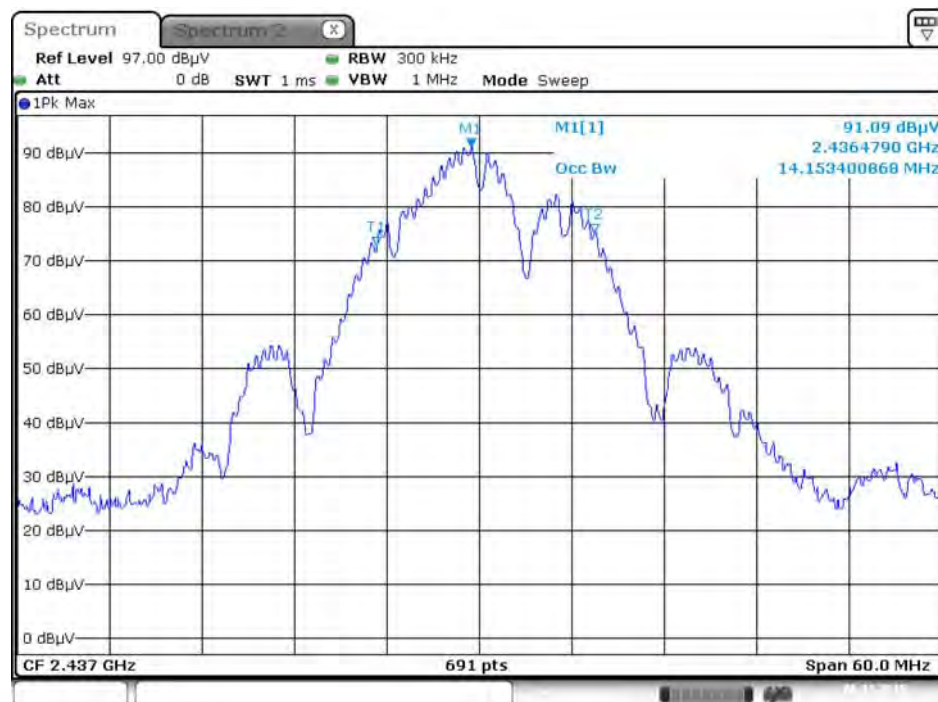

Date: 6 NOV 2015 02:01:38

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

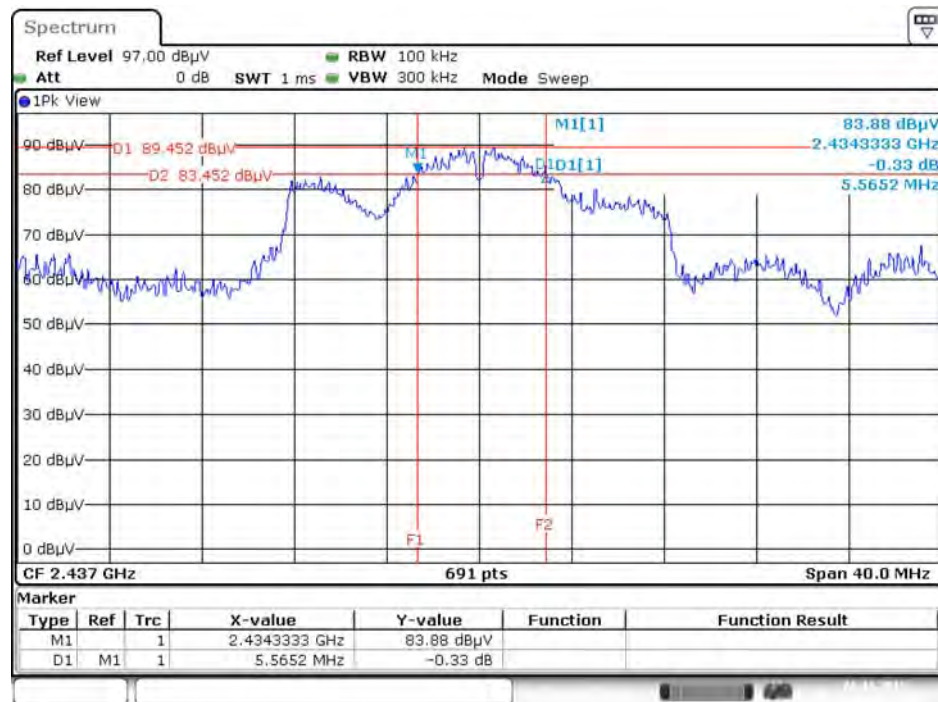


Date: 6 NOV. 2015 02:15:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 01:59:54

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

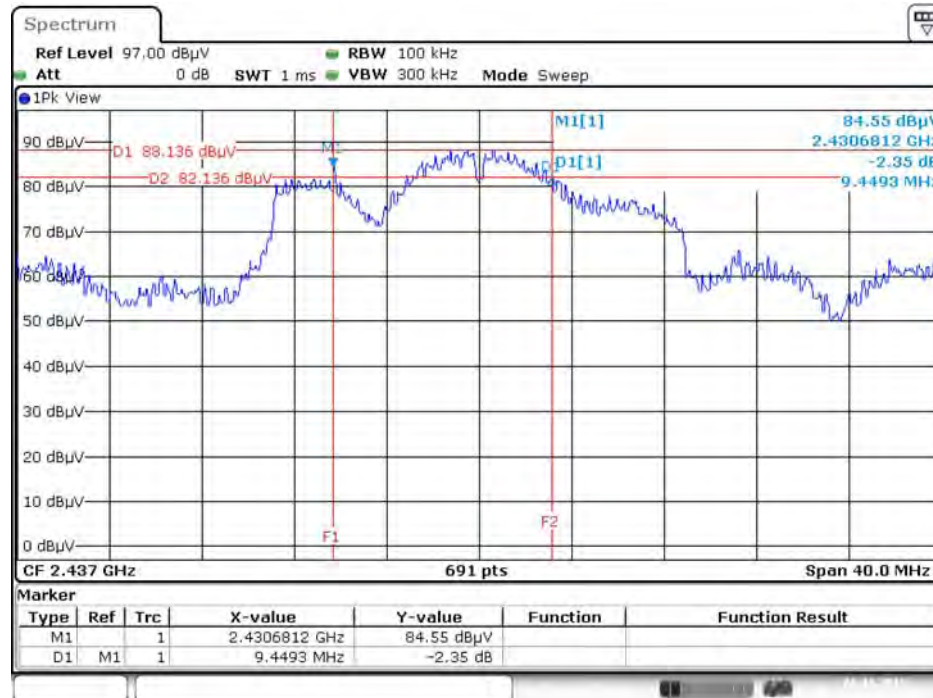


Date: 6 NOV. 2015 02:17:39

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 6 NOV. 2015 01:57:53

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

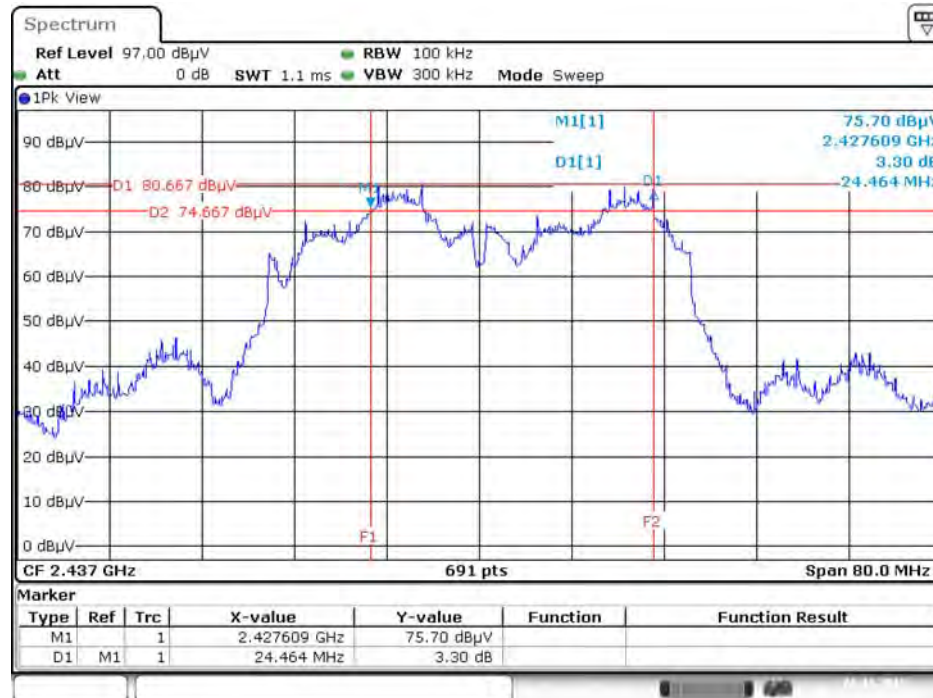


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

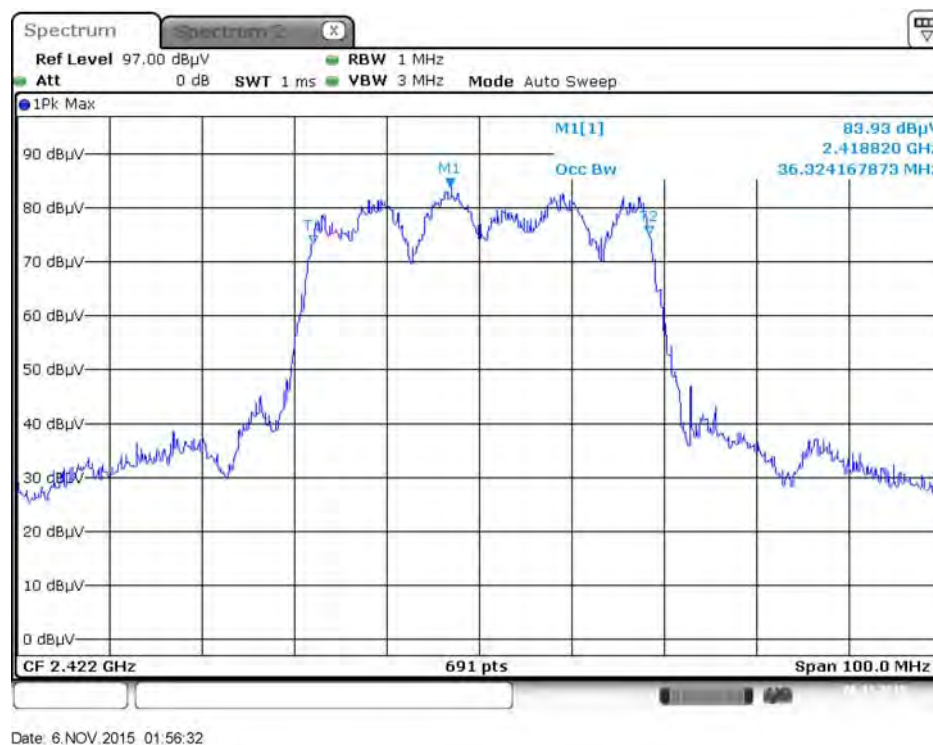

Mode 6: EUT 1 + Set 8 Dipole Antenna / 4.66 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

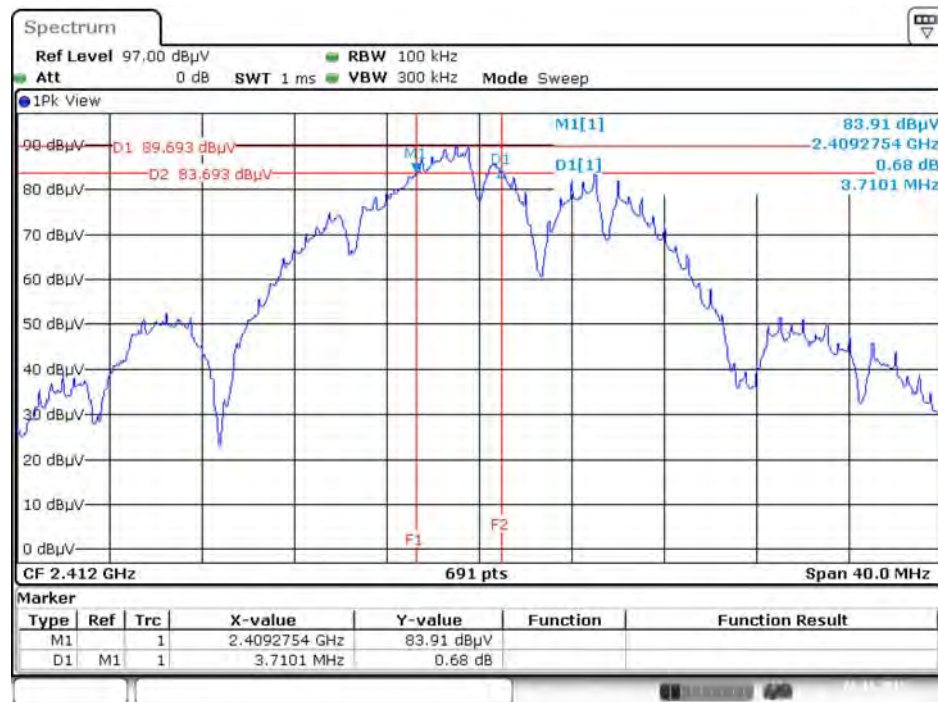


Date: 6.NOV.2015 02:42:53

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6.NOV.2015 02:43:47

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

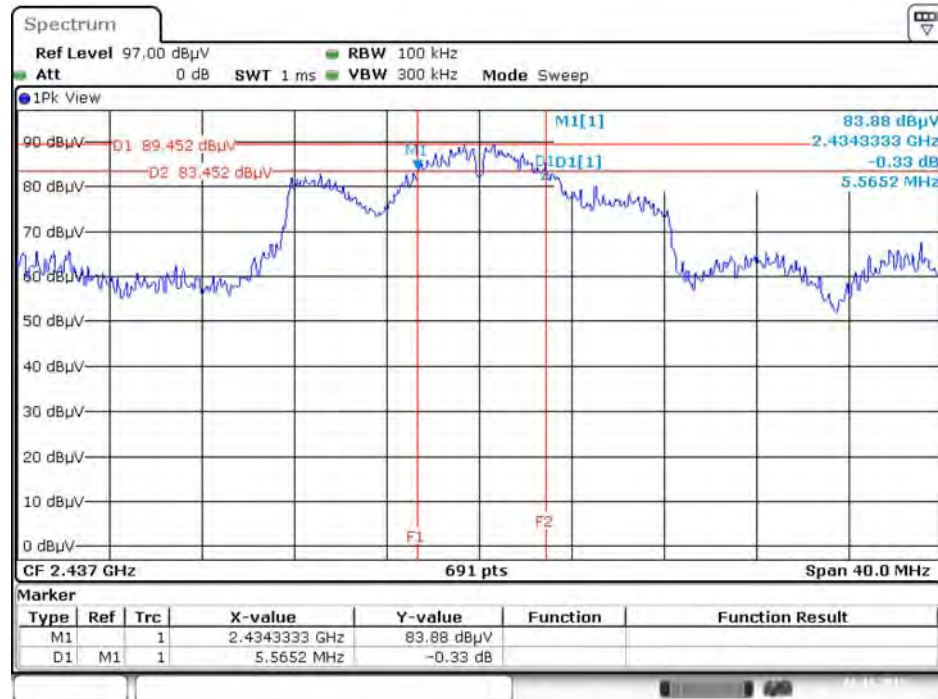


Date: 6 NOV. 2015 02:15:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 01:59:54

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

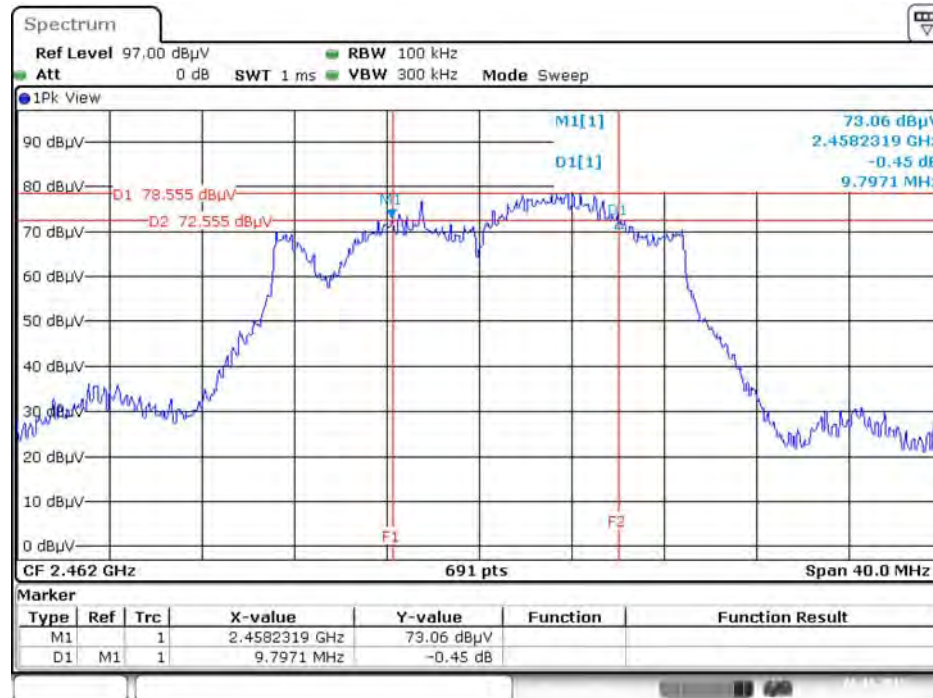

Date: 6 NOV. 2015 02:40:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 02:47:05

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 02:38:07


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 6 NOV. 2015 02:48:57

Mode 7: EUT 2 + Set 10 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

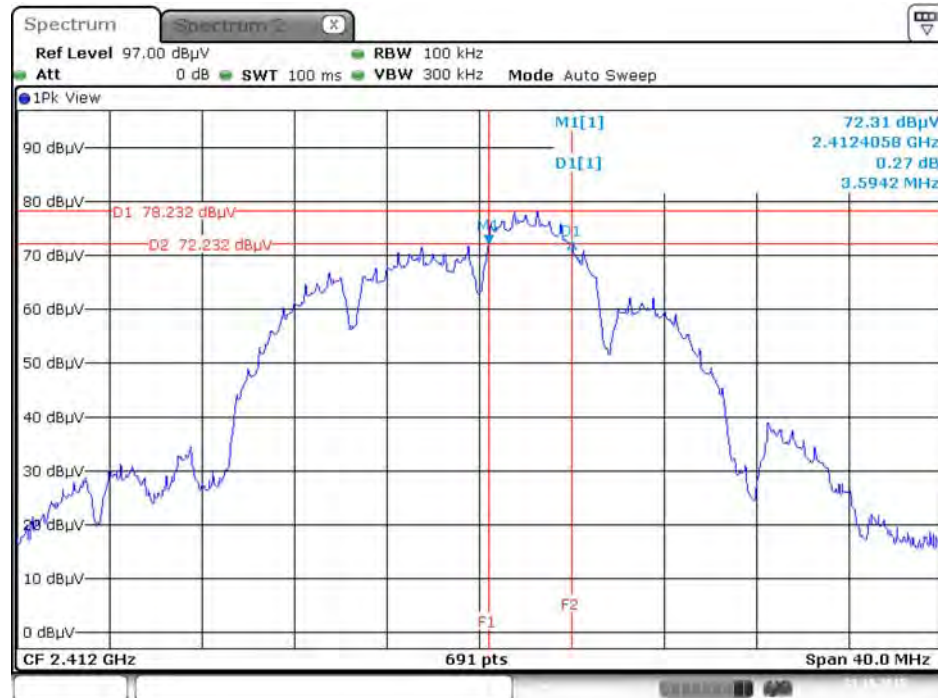


Date: 21.OCT.2015 00:47:03

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 21.OCT.2015 00:55:33

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

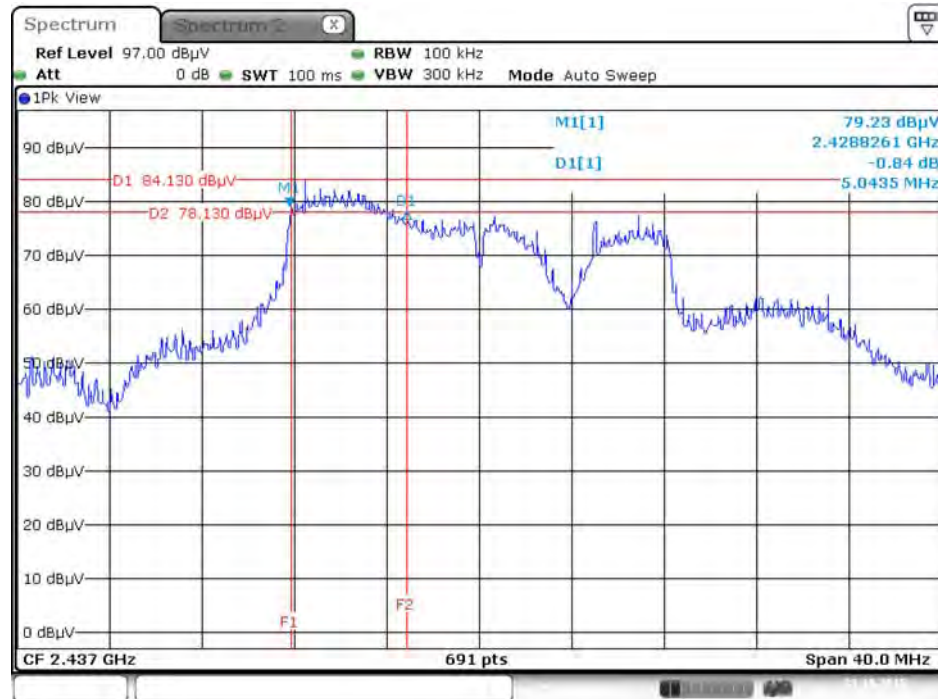


Date: 21.OCT.2015 00:47:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 21.OCT.2015 00:57:23

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

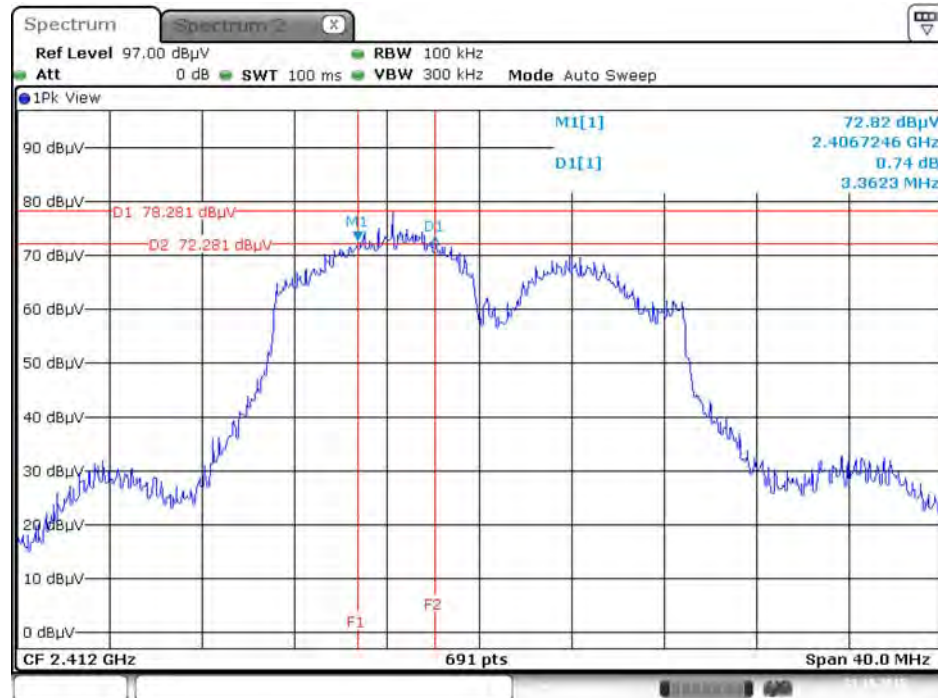


Date: 21.OCT.2015 00:49:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

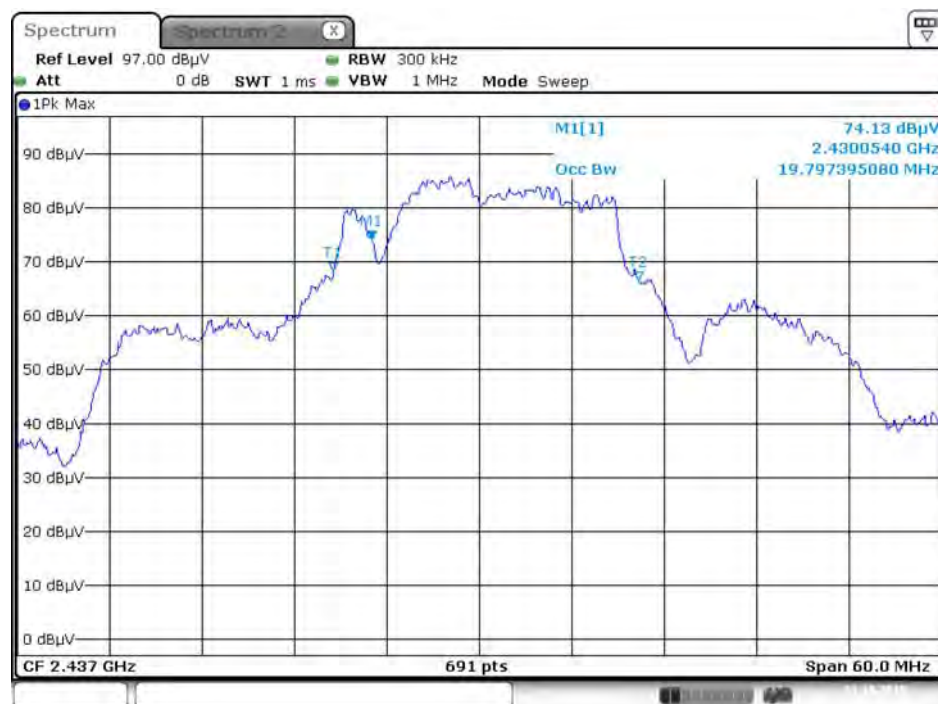


Date: 21.OCT.2015 00:59:00

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

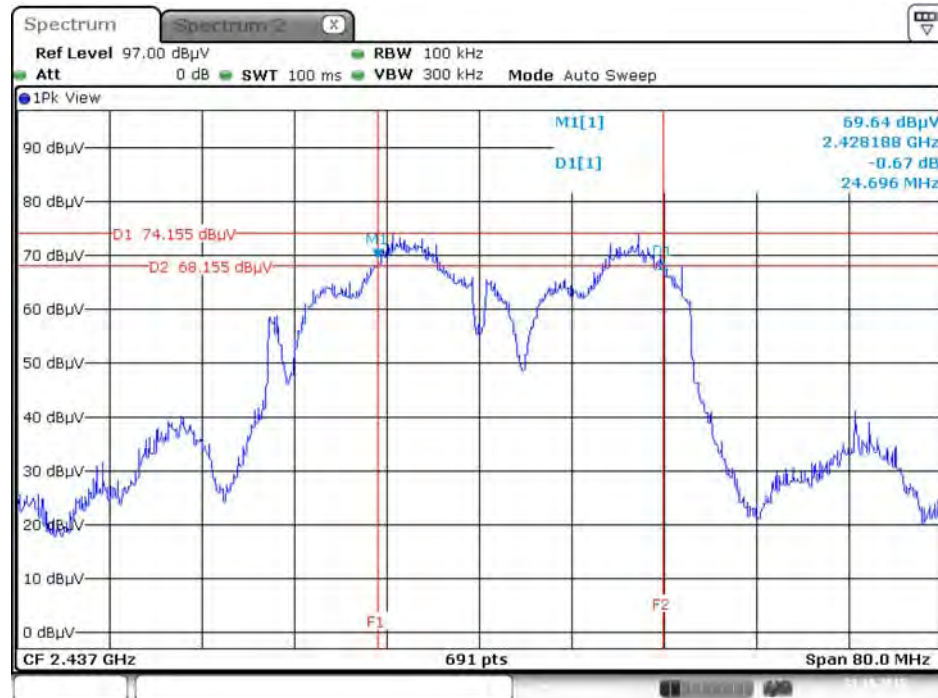

Date: 21.OCT.2015 00:52:37

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

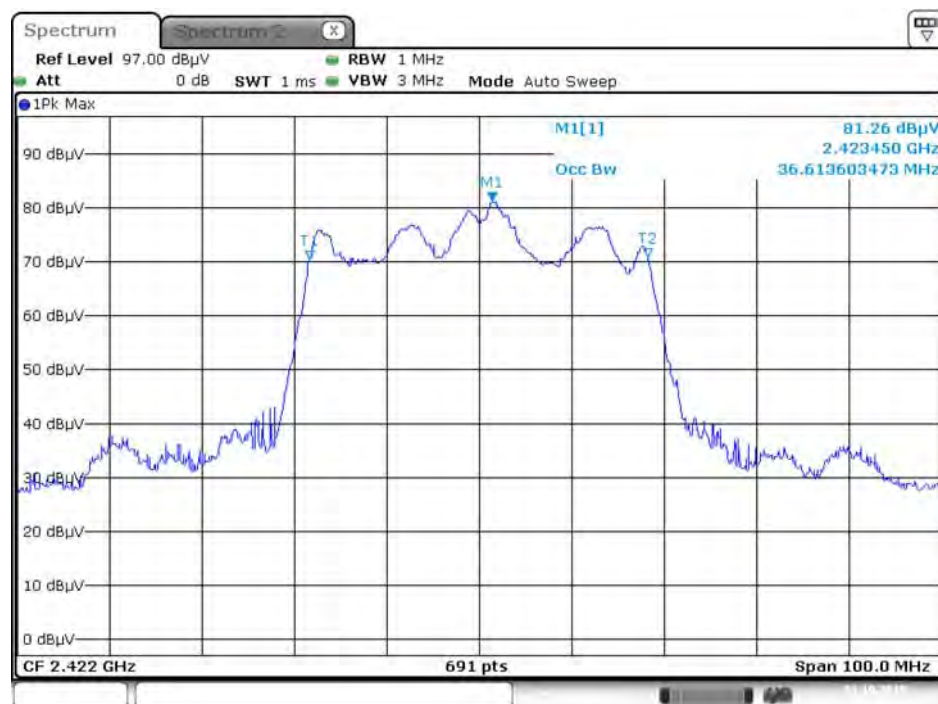

Date: 21.OCT.2015 01:01:01

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

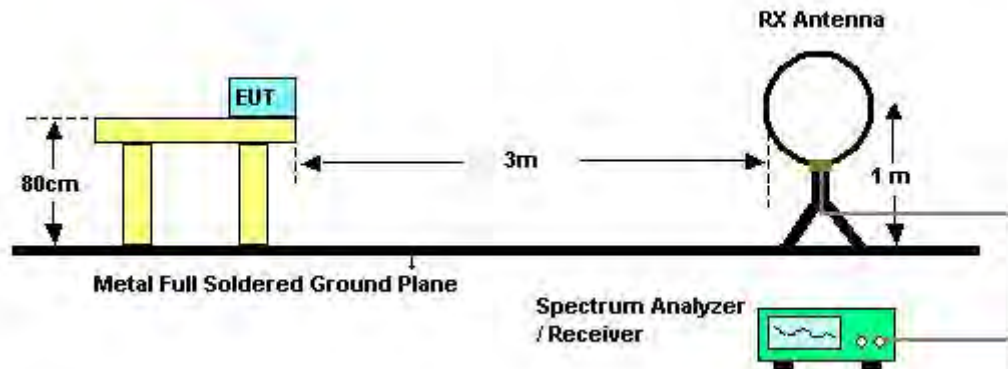

For Radiated Emissions: 30MHz~1GHz

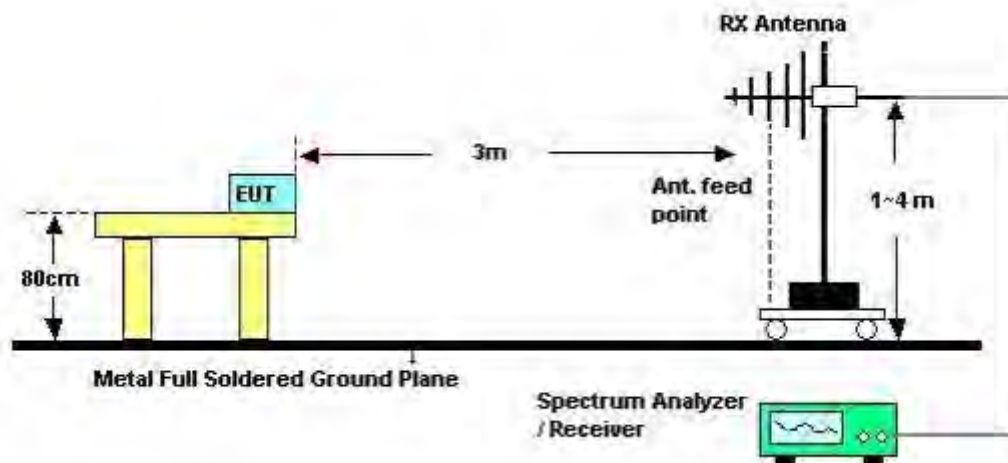

For Radiated Emissions: Above 1GHz

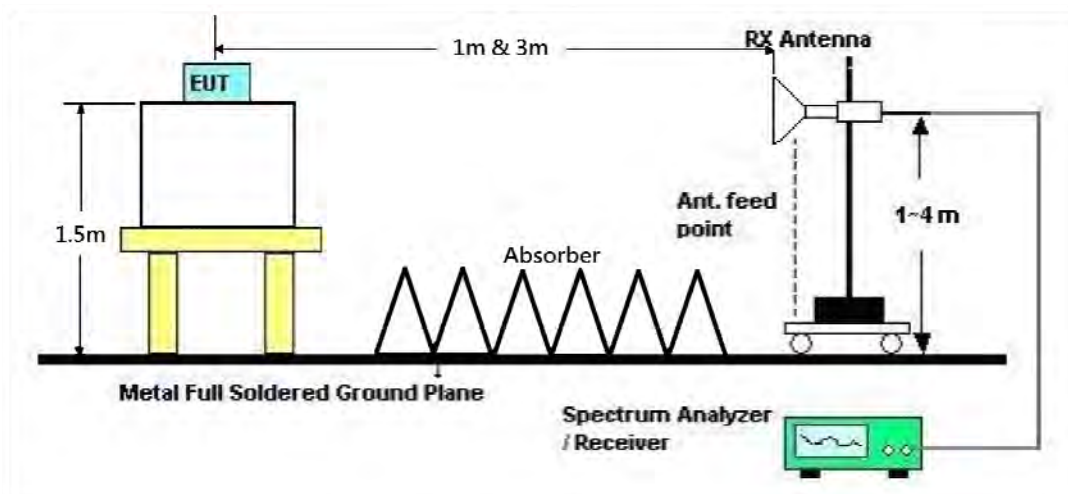

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	Normal Link
Test Date	Nov. 23, 2015	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

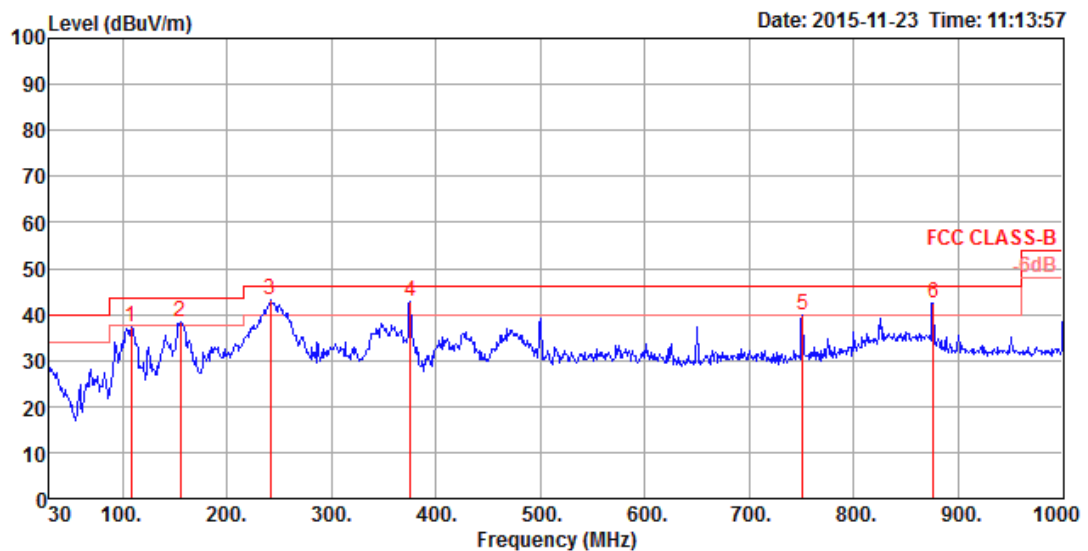

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	cm	deg	
1	108.57	37.27	43.50	-6.23	56.41	0.90	12.34	32.38	200	186 Peak	HORIZONTAL
2	155.13	38.39	43.50	-5.11	58.65	1.07	11.02	32.35	175	113 Peak	HORIZONTAL
3	241.46	43.00	46.00	-3.00	61.57	1.32	12.42	32.31	125	154 Peak	HORIZONTAL
4	375.32	42.90	46.00	-3.10	57.51	1.67	16.04	32.32	100	84 Peak	HORIZONTAL
5	750.71	39.89	46.00	-6.11	49.42	2.37	20.40	32.30	125	217 Peak	HORIZONTAL
6	875.84	42.40	46.00	-3.60	50.26	2.55	21.45	31.86	100	140 Peak	HORIZONTAL

Vertical

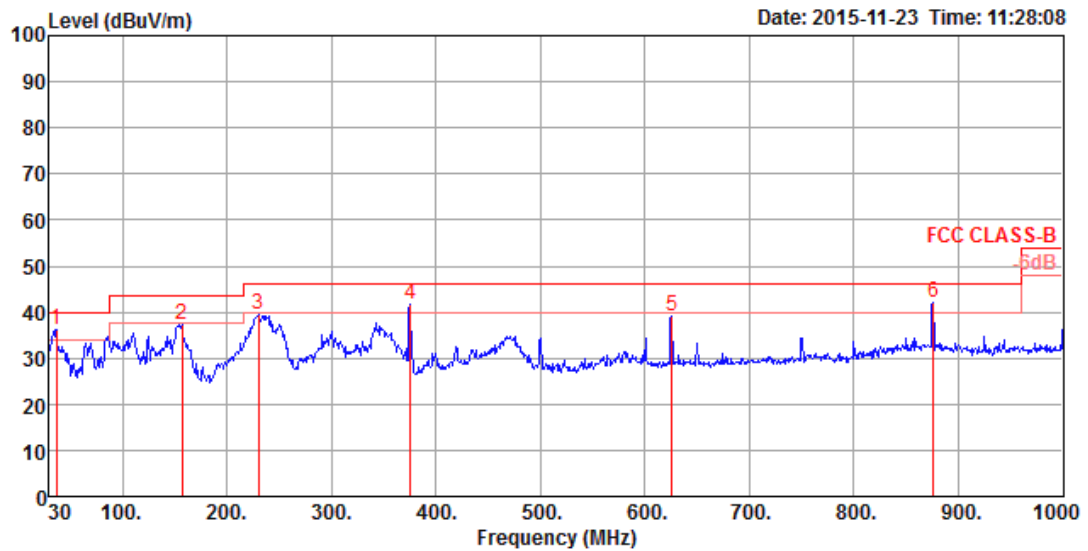

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36.79	36.19	40.00	-3.81	52.07	0.53	15.99	32.40	100	240 Peak	VERTICAL
2	157.07	37.42	43.50	-6.08	57.76	1.07	10.94	32.35	200	199 Peak	VERTICAL
3	229.82	39.63	46.00	-6.37	59.34	1.30	11.30	32.31	100	54 Peak	VERTICAL
4	375.32	41.65	46.00	-4.35	56.26	1.67	16.04	32.32	100	38 Peak	VERTICAL
5	625.58	38.96	46.00	-7.04	49.79	2.16	19.41	32.40	100	158 Peak	VERTICAL
6	875.84	41.95	46.00	-4.05	49.81	2.55	21.45	31.86	150	211 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.96	52.70	54.00	-1.30	48.42	5.87	33.42	35.01	Average	231	324 HORIZONTAL
2	4824.06	54.56	74.00	-19.44	50.28	5.87	33.42	35.01	Peak	231	324 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.92	55.48	74.00	-18.52	51.20	5.87	33.42	35.01	Peak	221	15 VERTICAL
2	4823.95	51.49	54.00	-2.51	47.21	5.87	33.42	35.01	Average	221	15 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.91	51.90	54.00	-2.10	47.46	5.92	33.53	35.01	Average	232	326 HORIZONTAL
2	4873.94	53.54	74.00	-20.46	49.10	5.92	33.53	35.01	Peak	232	326 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.90	56.00	74.00	-18.00	51.56	5.92	33.53	35.01	Peak	275	318 VERTICAL
2	4873.92	52.86	54.00	-1.14	48.42	5.92	33.53	35.01	Average	275	318 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4923.87	50.25	74.00	-23.75	45.64	5.97	33.65	35.01	Peak	195	324 HORIZONTAL
2	4923.96	44.94	54.00	-9.06	40.33	5.97	33.65	35.01	Average	195	324 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4923.96	54.25	74.00	-19.75	49.64	5.97	33.65	35.01	Peak	153	282 VERTICAL
2	4923.97	50.99	54.00	-3.01	46.38	5.97	33.65	35.01	Average	153	282 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4824.50	32.31	54.00	-21.69	28.03	5.87	33.42	35.01	Average	148	357 HORIZONTAL
2	4825.04	45.44	74.00	-28.56	41.16	5.87	33.42	35.01	Peak	148	357 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4824.51	47.58	74.00	-26.42	43.30	5.87	33.42	35.01	Peak	140	267 VERTICAL
2	4825.42	35.66	54.00	-18.34	31.38	5.87	33.42	35.01	Average	140	267 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4875.84	41.23	54.00	-12.77	36.79	5.92	33.53	35.01	Average	163	323	HORIZONTAL
2	4875.96	53.33	74.00	-20.67	48.89	5.92	33.53	35.01	Peak	163	323	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4876.00	57.74	74.00	-16.26	53.30	5.92	33.53	35.01	Peak	164	266	VERTICAL
2	4876.12	44.85	54.00	-9.15	40.41	5.92	33.53	35.01	Average	164	266	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4925.10	32.60	54.00	-21.40	27.99	5.97	33.65	35.01	Average	136	3	HORIZONTAL
2	4925.60	45.96	74.00	-28.04	41.35	5.97	33.65	35.01	Peak	136	3	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4926.18	46.36	74.00	-27.64	41.75	5.97	33.65	35.01	Peak	134	262	VERTICAL
2	4926.54	36.03	54.00	-17.97	31.42	5.97	33.65	35.01	Average	134	262	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4824.14	44.94	74.00	-29.06	40.66	5.87	33.42	35.01	Peak	150	78 HORIZONTAL
2	4825.86	32.69	54.00	-21.31	28.41	5.87	33.42	35.01	Average	150	78 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4825.34	47.48	74.00	-26.52	43.20	5.87	33.42	35.01	Peak	143	12 VERTICAL
2	4825.82	35.27	54.00	-18.73	30.99	5.87	33.42	35.01	Average	143	12 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4875.86	38.12	54.00	-15.88	33.68	5.92	33.53	35.01	Average	165	328 HORIZONTAL
2	4876.80	50.76	74.00	-23.24	46.32	5.92	33.53	35.01	Peak	165	328 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4876.28	43.60	54.00	-10.40	39.16	5.92	33.53	35.01	Average	173	264 VERTICAL
2	4876.92	57.04	74.00	-16.96	52.60	5.92	33.53	35.01	Peak	173	264 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4925.10	32.56	54.00	-21.44	27.95	5.97	33.65	35.01	Average	146	169
2	4927.22	45.06	74.00	-28.94	40.45	5.97	33.65	35.01	Peak	146	169

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4926.38	46.87	74.00	-27.13	42.26	5.97	33.65	35.01	Peak	141	285
2	4926.88	34.96	54.00	-19.04	30.35	5.97	33.65	35.01	Average	141	285

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4846.54	44.75	74.00	-29.25	40.42	5.88	33.46	35.01	Peak	141	43 HORIZONTAL
2	4847.72	32.00	54.00	-22.00	27.67	5.88	33.46	35.01	Average	141	43 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4839.14	32.01	54.00	-21.99	27.68	5.88	33.46	35.01	Average	144	193 VERTICAL
2	4841.90	45.14	74.00	-28.86	40.81	5.88	33.46	35.01	Peak	144	193 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4875.18	32.49	54.00	-21.51	28.05	5.92	33.53	35.01	Average	147	212 HORIZONTAL
2	4877.20	45.02	74.00	-28.98	40.58	5.92	33.53	35.01	Peak	147	212 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4875.90	46.02	74.00	-27.98	41.58	5.92	33.53	35.01	Peak	138	111 VERTICAL
2	4876.08	33.42	54.00	-20.58	28.98	5.92	33.53	35.01	Average	138	111 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 4 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4902.42	45.63	74.00	-28.37	41.08	5.95	33.61	35.01	Peak	144	357	HORIZONTAL
2	4907.56	32.72	54.00	-21.28	28.17	5.95	33.61	35.01	Average	144	357	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4906.16	45.38	74.00	-28.62	40.83	5.95	33.61	35.01	Peak	128	171	VERTICAL
2	4906.44	33.20	54.00	-20.80	28.65	5.95	33.61	35.01	Average	128	171	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.94	46.51	54.00	-7.49	42.23	5.87	33.42	35.01	Average	112	131
2	4824.00	52.38	74.00	-21.62	48.10	5.87	33.42	35.01	Peak	112	131

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.96	50.42	54.00	-3.58	46.14	5.87	33.42	35.01	Average	100	167
2	4823.96	54.72	74.00	-19.28	50.44	5.87	33.42	35.01	Peak	100	167

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.97	49.24	54.00	-4.76	44.80	5.92	33.53	35.01	168	176	HORIZONTAL
2	4874.10	52.78	74.00	-21.22	48.34	5.92	33.53	35.01	168	176	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.91	55.95	74.00	-18.05	51.51	5.92	33.53	35.01	267	66	VERTICAL
2	4873.94	52.41	54.00	-1.59	47.97	5.92	33.53	35.01	267	66	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.91	53.08	74.00	-20.92	48.47	5.97	33.65	35.01	Peak	177	193 HORIZONTAL
2	4923.99	48.09	54.00	-5.91	43.48	5.97	33.65	35.01	Average	177	193 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.93	48.28	54.00	-5.72	43.67	5.97	33.65	35.01	Average	172	174 VERTICAL
2	4924.03	53.34	74.00	-20.66	48.73	5.97	33.65	35.01	Peak	172	174 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4826.98	48.44	74.00	-25.56	44.16	5.87	33.42	35.01	Peak	123	144	HORIZONTAL
2	4827.62	35.83	54.00	-18.17	31.55	5.87	33.42	35.01	Average	123	144	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	Line		Line	Limit	Level	Loss	Factor	Factor	Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4826.11	37.68	54.00	-16.32	33.40	5.87	33.42	35.01	Average	140	126
2	4828.89	48.23	74.00	-25.77	43.95	5.87	33.42	35.01	Peak	140	126

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4878.83	45.24	54.00	-8.76	40.80	5.92	33.53	35.01	Average	124	57	HORIZONTAL
2	4879.24	59.07	74.00	-14.93	54.63	5.92	33.53	35.01	Peak	124	57	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4876.98	45.37	54.00	-8.63	40.93	5.92	33.53	35.01	Average	193	190	VERTICAL
2	4880.51	58.84	74.00	-15.16	54.40	5.92	33.53	35.01	Peak	193	190	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4932.10	51.16	74.00	-22.84	46.55	5.97	33.65	35.01	Peak	122	94	HORIZONTAL
2	4933.58	36.58	54.00	-17.42	31.97	5.97	33.65	35.01	Average	122	94	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4917.43	52.39	74.00	-21.61	47.84	5.95	33.61	35.01	Peak	164	133	VERTICAL
2	4933.09	37.66	54.00	-16.34	33.05	5.97	33.65	35.01	Average	164	133	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4827.21	35.91	54.00	-18.09	31.63	5.87	33.42	35.01	Average	150	266 HORIZONTAL
2	4828.20	49.06	74.00	-24.94	44.78	5.87	33.42	35.01	Peak	150	266 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4817.75	50.36	74.00	-23.64	46.08	5.87	33.42	35.01	Peak	152	111 VERTICAL
2	4828.92	34.31	54.00	-19.69	30.03	5.87	33.42	35.01	Average	152	111 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4876.68	61.21	74.00	-12.79	56.77	5.92	33.53	35.01	Peak	111	33 HORIZONTAL
2	4876.75	46.84	54.00	-7.16	42.40	5.92	33.53	35.01	Average	111	33 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4876.82	61.26	74.00	-12.74	56.82	5.92	33.53	35.01	Peak	162	99 VERTICAL
2	4876.89	47.03	54.00	-6.97	42.59	5.92	33.53	35.01	Average	162	99 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4926.61	38.53	54.00	-15.47	33.92	5.97	33.65	35.01	Average	155	144
2	4926.97	52.79	74.00	-21.21	48.18	5.97	33.65	35.01	Peak	155	144

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4925.95	51.15	74.00	-22.85	46.54	5.97	33.65	35.01	Peak	163	152
2	4926.68	38.82	54.00	-15.18	34.21	5.97	33.65	35.01	Average	163	152

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4827.72	47.76	74.00	-26.24	43.48	5.87	33.42	35.01	Peak	162	181	HORIZONTAL
2	4828.95	33.58	54.00	-20.42	29.30	5.87	33.42	35.01	Average	162	181	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4839.15	33.49	54.00	-20.51	29.16	5.88	33.46	35.01	Average	157	204	VERTICAL
2	4847.33	46.48	74.00	-27.52	42.15	5.88	33.46	35.01	Peak	157	204	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4875.51	34.26	54.00	-19.74	29.82	5.92	33.53	35.01	Average	162	196 HORIZONTAL
2	4876.22	49.68	74.00	-24.32	45.24	5.92	33.53	35.01	Peak	162	196 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4874.70	38.21	54.00	-15.79	33.77	5.92	33.53	35.01	Average	155	174 VERTICAL
2	4875.69	52.17	74.00	-21.83	47.73	5.92	33.53	35.01	Peak	155	174 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4902.41	35.53	54.00	-18.47	30.98	5.95	33.61	35.01	Average	153	191	HORIZONTAL
2	4902.62	46.30	74.00	-27.70	41.75	5.95	33.61	35.01	Peak	153	191	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4901.73	34.47	54.00	-19.53	29.92	5.95	33.61	35.01	Average	154	177	VERTICAL
2	4904.27	46.29	74.00	-27.71	41.74	5.95	33.61	35.01	Peak	154	177	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.94	53.03	74.00	-20.97	48.75	5.87	33.42	35.01	Peak	228	50 HORIZONTAL
2	4823.94	49.49	54.00	-4.51	45.21	5.87	33.42	35.01	Average	228	50 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.95	54.30	74.00	-19.70	50.02	5.87	33.42	35.01	Peak	286	51 VERTICAL
2	4823.97	51.23	54.00	-2.77	46.95	5.87	33.42	35.01	Average	286	51 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.95	52.44	74.00	-21.56	48.00	5.92	33.53	35.01	Peak	237	60 HORIZONTAL
2	4873.98	48.68	54.00	-5.32	44.24	5.92	33.53	35.01	Average	237	60 HORIZONTAL
3	7313.00	48.52	74.00	-25.48	40.29	7.13	36.38	35.28	Peak	198	165 HORIZONTAL
4	7314.91	35.80	54.00	-18.20	27.57	7.13	36.38	35.28	Average	198	165 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.90	55.89	74.00	-18.11	51.45	5.92	33.53	35.01	Peak	187	359 VERTICAL
2	4873.94	52.97	54.00	-1.03	48.53	5.92	33.53	35.01	Average	187	359 VERTICAL
3	7307.67	36.21	54.00	-17.79	27.98	7.13	36.38	35.28	Average	165	64 VERTICAL
4	7309.32	48.95	74.00	-25.05	40.72	7.13	36.38	35.28	Peak	165	64 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4923.91	50.56	74.00	-23.44	45.95	5.97	33.65	35.01	Peak	232	62 HORIZONTAL
2	4923.94	46.10	54.00	-7.90	41.49	5.97	33.65	35.01	Average	232	62 HORIZONTAL
3	7384.69	35.91	54.00	-18.09	27.46	7.17	36.57	35.29	Average	136	186 HORIZONTAL
4	7386.01	49.52	74.00	-24.48	41.07	7.17	36.57	35.29	Peak	136	186 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4923.90	55.15	74.00	-18.85	50.54	5.97	33.65	35.01	Peak	210	360 VERTICAL
2	4923.93	52.59	54.00	-1.41	47.98	5.97	33.65	35.01	Average	210	360 VERTICAL
3	7386.81	48.98	74.00	-25.02	40.53	7.17	36.57	35.29	Peak	164	238 VERTICAL
4	7387.73	35.91	54.00	-18.09	27.46	7.17	36.57	35.29	Average	164	238 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.86	32.08	54.00	-21.92	27.80	5.87	33.42	35.01	Average	174	241 HORIZONTAL
2	4826.60	45.94	74.00	-28.06	41.66	5.87	33.42	35.01	Peak	174	241 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4821.37	44.82	74.00	-29.18	40.54	5.87	33.42	35.01	Peak	159	135 VERTICAL
2	4825.76	32.52	54.00	-21.48	28.24	5.87	33.42	35.01	Average	159	135 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4877.13	52.36	74.00	-21.64	47.92	5.92	33.53	35.01	Peak	244	314 HORIZONTAL
2	4877.53	39.84	54.00	-14.16	35.40	5.92	33.53	35.01	Average	244	314 HORIZONTAL
3	7311.02	35.68	54.00	-18.32	27.45	7.13	36.38	35.28	Average	154	160 HORIZONTAL
4	7312.21	49.39	74.00	-24.61	41.16	7.13	36.38	35.28	Peak	154	160 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4877.37	57.87	74.00	-16.13	53.43	5.92	33.53	35.01	Peak	183	354 VERTICAL
2	4877.53	45.49	54.00	-8.51	41.05	5.92	33.53	35.01	Average	183	354 VERTICAL
3	7308.93	36.02	54.00	-17.98	27.79	7.13	36.38	35.28	Average	164	252 VERTICAL
4	7311.81	48.57	74.00	-25.43	40.34	7.13	36.38	35.28	Peak	164	252 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4926.60	32.75	54.00	-21.25	28.14	5.97	33.65	35.01	Average	228	46 HORIZONTAL
2	4927.05	45.86	74.00	-28.14	41.25	5.97	33.65	35.01	Peak	228	46 HORIZONTAL
3	7386.38	48.46	74.00	-25.54	40.01	7.17	36.57	35.29	Peak	152	154 HORIZONTAL
4	7388.03	36.33	54.00	-17.67	27.88	7.17	36.57	35.29	Average	152	154 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4919.11	44.60	74.00	-29.40	39.99	5.97	33.65	35.01	Peak	171	161 VERTICAL
2	4928.82	32.41	54.00	-21.59	27.80	5.97	33.65	35.01	Average	171	161 VERTICAL
3	7385.99	36.29	54.00	-17.71	27.84	7.17	36.57	35.29	Average	144	230 VERTICAL
4	7387.05	48.90	74.00	-25.10	40.45	7.17	36.57	35.29	Peak	144	230 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4823.10	45.08	74.00	-28.92	40.80	5.87	33.42	35.01	Peak	181	314	HORIZONTAL
2	4825.91	32.50	54.00	-21.50	28.22	5.87	33.42	35.01	Average	181	314	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4820.22	32.02	54.00	-21.98	27.74	5.87	33.42	35.01	Average	156	206	VERTICAL
2	4822.30	45.41	74.00	-28.59	41.13	5.87	33.42	35.01	Peak	156	206	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	4876.72	37.78	54.00	-16.22	33.34	5.92	33.53	35.01	Average	238	336 HORIZONTAL
2	4876.72	51.15	74.00	-22.85	46.71	5.92	33.53	35.01	Peak	238	336 HORIZONTAL
3	7310.70	35.47	54.00	-18.53	27.24	7.13	36.38	35.28	Average	161	142 HORIZONTAL
4	7313.00	49.36	74.00	-24.64	41.13	7.13	36.38	35.28	Peak	161	142 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	4876.72	44.00	54.00	-10.00	39.56	5.92	33.53	35.01	Average	196	357 VERTICAL
2	4876.81	57.12	74.00	-16.88	52.68	5.92	33.53	35.01	Peak	196	357 VERTICAL
3	7309.19	35.78	54.00	-18.22	27.55	7.13	36.38	35.28	Average	144	292 VERTICAL
4	7312.27	47.87	74.00	-26.13	39.64	7.13	36.38	35.28	Peak	144	292 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	4924.75	45.84	74.00	-28.16	41.23	5.97	33.65	35.01	Peak	214	47 HORIZONTAL
2	4928.89	32.58	54.00	-21.42	27.97	5.97	33.65	35.01	Average	214	47 HORIZONTAL
3	7385.20	36.08	54.00	-17.92	27.63	7.17	36.57	35.29	Average	164	117 HORIZONTAL
4	7389.13	48.98	74.00	-25.02	40.53	7.17	36.57	35.29	Peak	164	117 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	4927.75	32.49	54.00	-21.51	27.88	5.97	33.65	35.01	Average	129	232 VERTICAL
2	4928.94	45.07	74.00	-28.93	40.46	5.97	33.65	35.01	Peak	129	232 VERTICAL
3	7389.67	35.88	54.00	-18.12	27.43	7.17	36.57	35.29	Average	173	171 VERTICAL
4	7390.62	49.85	74.00	-24.15	41.40	7.17	36.57	35.29	Peak	173	171 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4839.47	44.33	74.00	-29.67	40.00	5.88	33.46	35.01	Peak	108	196 HORIZONTAL
2	4840.65	31.76	54.00	-22.24	27.43	5.88	33.46	35.01	Average	108	196 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4839.42	31.99	54.00	-22.01	27.66	5.88	33.46	35.01	Average	145	148 VERTICAL
2	4840.27	44.46	74.00	-29.54	40.13	5.88	33.46	35.01	Peak	145	148 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4840.84	44.23	74.00	-29.77	39.90	5.88	33.46	35.01	Peak	167	27 HORIZONTAL
2	4847.38	33.27	54.00	-20.73	28.94	5.88	33.46	35.01	Average	167	27 HORIZONTAL
3	7264.16	35.34	54.00	-18.66	27.25	7.10	36.27	35.28	Average	145	188 HORIZONTAL
4	7268.52	48.90	74.00	-25.10	40.76	7.11	36.31	35.28	Peak	145	188 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4840.44	31.72	54.00	-22.28	27.39	5.88	33.46	35.01	Average	124	213 VERTICAL
2	4842.49	44.34	74.00	-29.66	40.01	5.88	33.46	35.01	Peak	124	213 VERTICAL
3	7262.86	48.64	74.00	-25.36	40.55	7.10	36.27	35.28	Peak	174	280 VERTICAL
4	7266.56	35.66	54.00	-18.34	27.52	7.11	36.31	35.28	Average	174	280 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4906.02	45.43	74.00	-28.57	40.88	5.95	33.61	35.01	Peak	191	127	HORIZONTAL
2	4908.90	31.73	54.00	-22.27	27.18	5.95	33.61	35.01	Average	191	127	HORIZONTAL
3	7351.06	35.95	54.00	-18.05	27.57	7.16	36.50	35.28	Average	144	317	HORIZONTAL
4	7353.50	48.46	74.00	-25.54	40.08	7.16	36.50	35.28	Peak	144	317	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4903.62	44.69	74.00	-29.31	40.14	5.95	33.61	35.01	Peak	158	137	VERTICAL
2	4908.81	32.08	54.00	-21.92	27.53	5.95	33.61	35.01	Average	158	137	VERTICAL
3	7351.59	48.55	74.00	-25.45	40.17	7.16	36.50	35.28	Peak	178	214	VERTICAL
4	7353.55	35.86	54.00	-18.14	27.48	7.16	36.50	35.28	Average	178	214	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.94	48.92	74.00	-25.08	45.15	5.60	32.69	34.52	140	197	Peak	HORIZONTAL
2	4824.00	44.34	54.00	-9.66	40.57	5.60	32.69	34.52	140	197	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.97	46.02	54.00	-7.98	42.25	5.60	32.69	34.52	206	196	Average	VERTICAL
2	4824.03	50.47	74.00	-23.53	46.70	5.60	32.69	34.52	206	196	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.97	43.79	54.00	-10.21	39.82	5.70	32.78	34.51	211	224	Average	HORIZONTAL
2	4874.00	50.04	74.00	-23.96	46.07	5.70	32.78	34.51	211	224	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.97	46.15	54.00	-7.85	42.18	5.70	32.78	34.51	167	180	Average	VERTICAL
2	4874.06	50.21	74.00	-23.79	46.24	5.70	32.78	34.51	167	180	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4926.89	42.82	54.00	-11.18	38.64	5.79	32.88	34.49	313	150	Average	HORIZONTAL
2	4927.05	49.85	74.00	-24.15	45.67	5.79	32.88	34.49	313	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.03	45.30	54.00	-8.70	41.12	5.79	32.88	34.49	191	170	Average	VERTICAL
2	4924.13	50.17	74.00	-23.83	45.99	5.79	32.88	34.49	191	170	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4827.59	45.85	74.00	-28.15	42.08	5.60	32.69	34.52	140	194	Peak	HORIZONTAL
2	4827.75	33.03	54.00	-20.97	29.26	5.60	32.69	34.52	140	194	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4827.37	48.45	74.00	-25.55	44.68	5.60	32.69	34.52	211	221	Peak	VERTICAL
2	4827.56	35.96	54.00	-18.04	32.19	5.60	32.69	34.52	211	221	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.12	47.92	74.00	-26.08	43.95	5.70	32.78	34.51	212	159	Peak	HORIZONTAL
2	4876.31	34.85	54.00	-19.15	30.88	5.70	32.78	34.51	212	159	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.92	52.73	74.00	-21.27	48.76	5.70	32.78	34.51	188	196	Peak	VERTICAL
2	4877.46	39.57	54.00	-14.43	35.60	5.70	32.78	34.51	188	196	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4914.51	45.29	74.00	-28.71	41.18	5.76	32.84	34.49	99	148	Peak	HORIZONTAL
2	4928.78	32.25	54.00	-21.75	28.07	5.79	32.88	34.49	99	148	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4927.97	33.20	54.00	-20.80	29.02	5.79	32.88	34.49	190	181	Average	VERTICAL
2	4929.64	46.02	74.00	-27.98	41.84	5.79	32.88	34.49	190	181	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4827.49	32.48	54.00	-21.52	28.71	5.60	32.69	34.52	138	141 Average	HORIZONTAL
2	4829.10	46.53	74.00	-27.47	42.76	5.60	32.69	34.52	138	141 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4824.00	33.63	54.00	-20.37	29.86	5.60	32.69	34.52	181	195 Average	VERTICAL
2	4824.03	44.58	74.00	-29.42	40.81	5.60	32.69	34.52	181	195 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.63	47.38	74.00	-26.62	43.41	5.70	32.78	34.51	167	147	Peak	HORIZONTAL
2	4876.63	34.19	54.00	-19.81	30.22	5.70	32.78	34.51	167	147	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.69	51.96	74.00	-22.04	47.99	5.70	32.78	34.51	187	130	Peak	VERTICAL
2	4877.33	37.90	54.00	-16.10	33.93	5.70	32.78	34.51	187	130	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4925.29	44.63	74.00	-29.37	40.45	5.79	32.88	34.49	164	146	Peak	HORIZONTAL
2	4931.76	31.90	54.00	-22.10	27.72	5.79	32.88	34.49	164	146	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4929.87	32.04	54.00	-21.96	27.86	5.79	32.88	34.49	178	166	Average	VERTICAL
2	4931.76	44.44	74.00	-29.56	40.26	5.79	32.88	34.49	178	166	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4842.39	31.81	54.00	-22.19	27.97	5.63	32.72	34.51	165	150	Average	HORIZONTAL
2	4842.64	44.91	74.00	-29.09	41.07	5.63	32.72	34.51	165	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4844.71	31.97	54.00	-22.03	28.13	5.63	32.72	34.51	182	150	Average	VERTICAL
2	4845.68	45.53	74.00	-28.47	41.69	5.63	32.72	34.51	182	150	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4871.93	45.23	74.00	-28.77	41.26	5.70	32.78	34.51	170	150	Peak	HORIZONTAL
2	4874.83	31.63	54.00	-22.37	27.66	5.70	32.78	34.51	170	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4872.65	31.71	54.00	-22.29	27.74	5.70	32.78	34.51	181	150	Average	VERTICAL
2	4873.88	44.78	74.00	-29.22	40.81	5.70	32.78	34.51	181	150	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4901.70	45.08	74.00	-28.92	40.98	5.76	32.84	34.50	142	150	Peak	HORIZONTAL
2	4905.15	31.70	54.00	-22.30	27.60	5.76	32.84	34.50	142	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.33	31.54	54.00	-22.46	27.44	5.76	32.84	34.50	178	150	Average	VERTICAL
2	4905.93	45.33	74.00	-28.67	41.23	5.76	32.84	34.50	178	150	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4823.99	48.29	54.00	-5.71	44.52	5.60	32.69	34.52	161	152 Average	HORIZONTAL
2	4824.01	52.23	74.00	-21.77	48.46	5.60	32.69	34.52	161	152 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4823.96	51.72	54.00	-2.28	47.95	5.60	32.69	34.52	176	167 Average	VERTICAL
2	4824.01	54.90	74.00	-19.10	51.13	5.60	32.69	34.52	176	167 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.98	49.32	54.00	-4.68	45.35	5.70	32.78	34.51	156	174	Average	HORIZONTAL
2	4874.04	52.76	74.00	-21.24	48.79	5.70	32.78	34.51	156	174	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.98	52.90	54.00	-1.10	48.93	5.70	32.78	34.51	176	159	Average	VERTICAL
2	4874.08	55.56	74.00	-18.44	51.59	5.70	32.78	34.51	176	159	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.96	52.85	74.00	-21.15	48.67	5.79	32.88	34.49	156	178	Peak	HORIZONTAL
2	4923.96	49.07	54.00	-4.93	44.89	5.79	32.88	34.49	156	178	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.98	55.82	74.00	-18.18	51.64	5.79	32.88	34.49	174	169	Peak	VERTICAL
2	4924.00	52.13	54.00	-1.87	47.95	5.79	32.88	34.49	174	169	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.24	33.28	54.00	-20.72	29.51	5.60	32.69	34.52	308	173	Average	HORIZONTAL
2	4826.52	45.54	74.00	-28.46	41.77	5.60	32.69	34.52	308	173	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.20	37.49	54.00	-16.51	33.72	5.60	32.69	34.52	174	173	Average	VERTICAL
2	4826.84	50.83	74.00	-23.17	47.06	5.60	32.69	34.52	174	173	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.28	44.34	54.00	-9.66	40.37	5.70	32.78	34.51	153	138	Average	HORIZONTAL
2	4876.68	57.69	74.00	-16.31	53.72	5.70	32.78	34.51	153	138	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.32	61.01	74.00	-12.99	57.04	5.70	32.78	34.51	171	160	Peak	VERTICAL
2	4876.28	47.30	54.00	-6.70	43.33	5.70	32.78	34.51	171	160	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4920.40	45.71	74.00	-28.29	41.53	5.79	32.88	34.49	204	177	Peak	HORIZONTAL
2	4926.76	33.55	54.00	-20.45	29.37	5.79	32.88	34.49	204	177	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4926.72	50.53	74.00	-23.47	46.35	5.79	32.88	34.49	177	179	Peak	VERTICAL
2	4927.00	36.90	54.00	-17.10	32.72	5.79	32.88	34.49	177	179	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.48	47.32	74.00	-26.68	43.55	5.60	32.69	34.52	134	144	Peak	HORIZONTAL
2	4826.88	34.45	54.00	-19.55	30.68	5.60	32.69	34.52	134	144	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.60	46.07	74.00	-27.93	42.30	5.60	32.69	34.52	290	230	Peak	VERTICAL
2	4827.24	33.93	54.00	-20.07	30.16	5.60	32.69	34.52	290	230	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.60	57.61	74.00	-16.39	53.64	5.70	32.78	34.51	154	150	Peak	HORIZONTAL
2	4877.00	42.96	54.00	-11.04	38.99	5.70	32.78	34.51	154	150	Average	HORIZONTAL
3	7310.20	51.80	74.00	-22.20	42.52	6.81	37.23	34.76	254	166	Peak	HORIZONTAL
4	7312.92	37.82	54.00	-16.18	28.54	6.81	37.23	34.76	254	166	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.56	62.62	74.00	-11.38	58.65	5.70	32.78	34.51	203	228	Peak	VERTICAL
2	4877.04	48.01	54.00	-5.99	44.04	5.70	32.78	34.51	203	228	Average	VERTICAL
3	7310.44	38.19	54.00	-15.81	28.91	6.81	37.23	34.76	161	182	Average	VERTICAL
4	7312.30	51.80	74.00	-22.20	42.52	6.81	37.23	34.76	161	182	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 5: EUT 1 + Set 7 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4926.90	36.13	54.00	-17.87	31.95	5.79	32.88	34.49	137	228	Average	HORIZONTAL
2	4927.90	47.88	74.00	-26.12	43.70	5.79	32.88	34.49	137	228	Peak	HORIZONTAL
3	7384.56	51.71	74.00	-22.29	42.32	6.80	37.36	34.77	225	197	Peak	HORIZONTAL
4	7390.26	38.36	54.00	-15.64	28.97	6.80	37.36	34.77	225	197	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4927.50	49.03	74.00	-24.97	44.85	5.79	32.88	34.49	180	195	Peak	VERTICAL
2	4927.80	37.69	54.00	-16.31	33.51	5.79	32.88	34.49	180	195	Average	VERTICAL
3	7382.66	51.12	74.00	-22.88	41.76	6.80	37.33	34.77	162	173	Peak	VERTICAL
4	7390.74	38.59	54.00	-15.41	29.20	6.80	37.36	34.77	162	173	Average	VERTICAL