



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Extreme Networks, Inc.
Applicant Address	9 Northeastern Blvd. Salem, NH 03079 USA
FCC ID	QXO-4411OAC
Manufacturer's company	Senao Networks, Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Wireless 802.11a/AC+ b/g/n Access Point
Brand Name	Extreme Networks
Model No.	31016, 31018, 31017, 31019
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 17, 2015
Final Test Date	Dec. 22, 2015
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple Listing.....	10
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	12
3.10. EUT Operation during Test	14
3.11. Duty Cycle	14
3.12. Test Configurations	15
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. Maximum Conducted Output Power Measurement.....	22
4.3. Power Spectral Density Measurement	31
4.4. 6dB Spectrum Bandwidth Measurement	73
4.5. Radiated Emissions Measurement	99
4.6. Emissions Measurement	154
4.7. Antenna Requirements	220
5. LIST OF MEASURING EQUIPMENTS	221
6. MEASUREMENT UNCERTAINTY.....	223
APPENDIX A. TEST PHOTOS	A1 ~ A12
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541521-01AC	Rev. 01	Initial issue of report	Jan. 06, 2016
FR541521-01AC	Rev. 02	Adding two model names: 31017, 31019	Jan. 12, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Wireless 802.11a/AC+ b/g/n Access Point
Brand Name : Extreme Networks
Model No. : 31016, 31018, 31017, 31019
Applicant : Extreme Networks, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 17, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

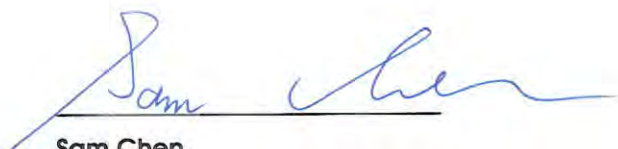

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.16 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.05 dB
4.3	15.247(e)	Power Spectral Density	Complies	4.14 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.25 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.01 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz

	IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 21.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz
Maximum Conducted Output Power	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 25.26 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 18.63 dBm Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 27.25 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 20.73 dBm Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 22.13 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 18.63 dBm Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 22.76 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 19.55 dBm Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 27.74 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 20.16 dBm Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 19.71 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 18.63 dBm Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 24.34 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 20.73 dBm Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi IEEE 802.11ac MCS0/Nss1 (VHT20): 23.91 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 19.91 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☒ With beamforming	☐ Without beamforming

Note1: The product has beamforming function for 802.11n/ac in 2.4G/5G.

Note2: Test results of non-beamforming are recorded in test report: FR541521-01AA. Test results of beamforming are recorded in this test report.

Antenna and Band width

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

3.2. Accessories

Antenna cable, Non-Shielded, 1.5m

3.3. Table for Filed Antenna

Set.	Brand Holder	Model Number (Part No.)	Extreme Part No. (Short Description)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
							2.4GHz	5GHz
1	PCTEL Inc.	908412-10	30714 (WS-AO-DE07025N)	Sector Antenna	N Male	V	7.5	6.5
2	PCTEL Inc.	908414-10	30716 (WS-AO-5Q05025N)	Sector Antenna	N Male	V	-	4.5
3	PCTEL Inc.	908409-10	30711 (WS-AO-DQ05120N)	Sector Antenna	N Male	V	5.5	5.5
4	PCTEL Inc.	908416-10	30718 (WS-AO-DE10055N)	Sector Antenna	N Male	V	10.5	7.5
5	PCTEL Inc.	908418-10	30720 (WS-AO-DE07100N)	Panel Antenna	N Male	X	7	6
6	PCTEL Inc.	908411-10	30713 (WS-AO-2Q05060N)	Sector Antenna	N Male Plug	V	5	-
7	PCTEL Inc.	908415-10	30717 (WS-AO-5Q11025N)	Sector Antenna	N Male	V	-	11.5
8	PCTEL Inc.	908413-10	30715 (WS-AO-DE13025N)	Sector Antenna	N Male	V	13	12
9	PCTEL Inc.	908410-10	30712 (WS-AO-5Q04060N)	Sector Antenna	N Male Plug	V	-	4
10	PCTEL Inc.	-	WS-AO-5D23009N	Panel Antenna	N Type	V	-	23
11	PCTEL Inc.	908550-10	30724 (WS-AO-DQ04360N)	Omni Antenna	N Male	X	5.5	6
12	Senao Networks, Inc.	AP3965i	-	PIFA Antenna	MMCX	X	Note 1	

Note1:

Set.	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
12	6.25	5.77	6.45	5.60	5.96	5.97	6.25	6.08

Note2:

The EUT has twelve sets of antennas.

Note3:

Antenna cable only for Set 5 and Set 10 use.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>


For IEEE 802.11a/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For EUT 1:



For EUT 2:

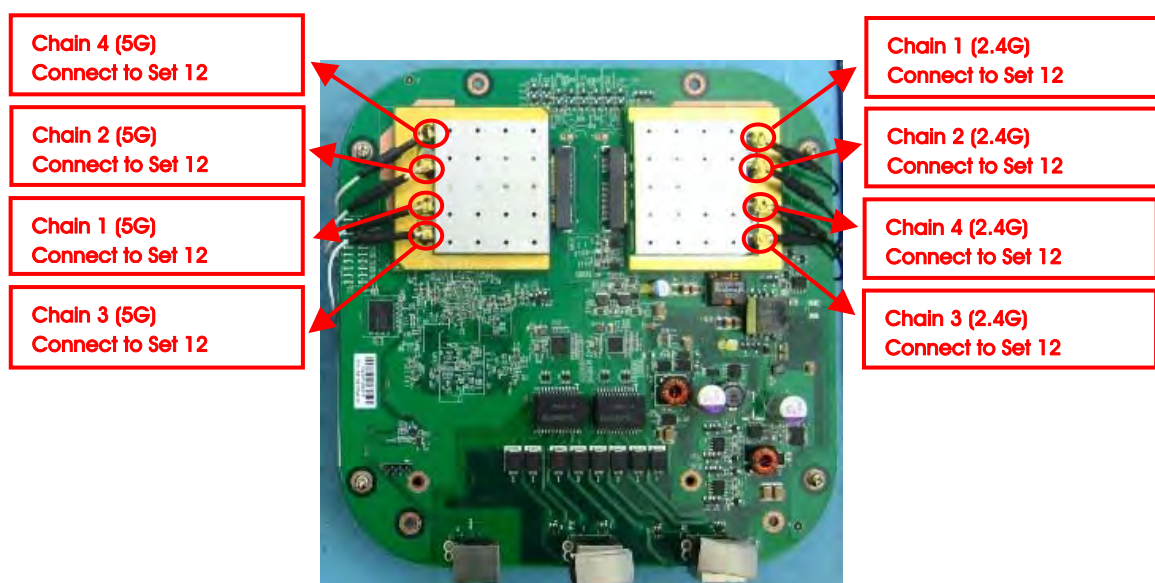

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Power Spectral Density	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Band Edge Emissions	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

Note2:

The PoE is for measurement only, would not be marketed.

The PoE information as below:

Power	Brand	Model
PoE	Microsemi	PD-9001GR

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT 1 + Set 8 + Set 10

Mode 2. Normal Link - EUT 2 + Set 12

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission Below 1GHz test:

Mode 1. Place EUT 1 in Y axis + Set 8 + Set 10

Mode 2. Place EUT 1 in Z axis + Set 8 + Set 10

Mode 3. Place EUT 2 in Y axis + Set 12

Mode 4. Place EUT 2 in Z axis + Set 12

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission Above 1GHz test:

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 1

Mode 2. Place EUT 1 in Z axis + Set 3

Mode 3. Place EUT 1 in Z axis + Set 4

Mode 4. Place EUT 1 in Z axis + Set 5

Mode 5. Place EUT 1 in Z axis + Set 6

Mode 6. Place EUT 1 in Z axis + Set 8

Mode 7. Place EUT 1 in Z axis + Set 11

Mode 8. Place EUT 2 in Y axis + Set 12

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541521-01) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Product Name	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Wireless 802.11a/AC + b/g/n Access Point	1	WS-AP3965e-FCC	31018	X	V	Set 1~11
		WS-AP3965e-ROW	31019			
	2	WS-AP3965i-FCC	31016	V	X	Set 12
		WS-AP3965i-ROW	31017			

Note: Different model names for EUT 1 (31018 and 31019) and EUT 2 (31016 and 31017) served as marketing strategy.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E4300	DoC
PoE Load	Senao	LT4321UF	N/A
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
Device	Extreme Networks	31018	QXO-4411AC
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
PoE Load	Senao	LT4321UF	N/A
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	Microsemi	PD-9001GR	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	14	20	14	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12	12.5	11

Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	15	22	13.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	11.5	14.5	11

Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	13.5	17	12	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	9	12.5	9

Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	14.5	17.5	13.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	11	13.5	10

Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	16.5	22.5	15.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12.5	14	11

Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	13	14.5	12	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	8.5	12.5	8.5

Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	14	18.5	13.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	11.5	14.5	11.5

Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	13.5	18	14	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	10.5	13.5	11

3.10. EUT Operation during Test

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by Device and transmit duty cycle no less 98%

3.11. Duty Cycle

Mode 1 ~ Mode 7


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.746	1.930	90.47	0.44	0.57
802.11ac MCS0/Nss1 VHT40	1.642	1.850	88.76	0.52	0.61

Mode 8

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.750	1.910	91.62	0.38	0.57
802.11ac MCS0/Nss1 VHT40	1.650	1.850	89.19	0.50	0.61

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

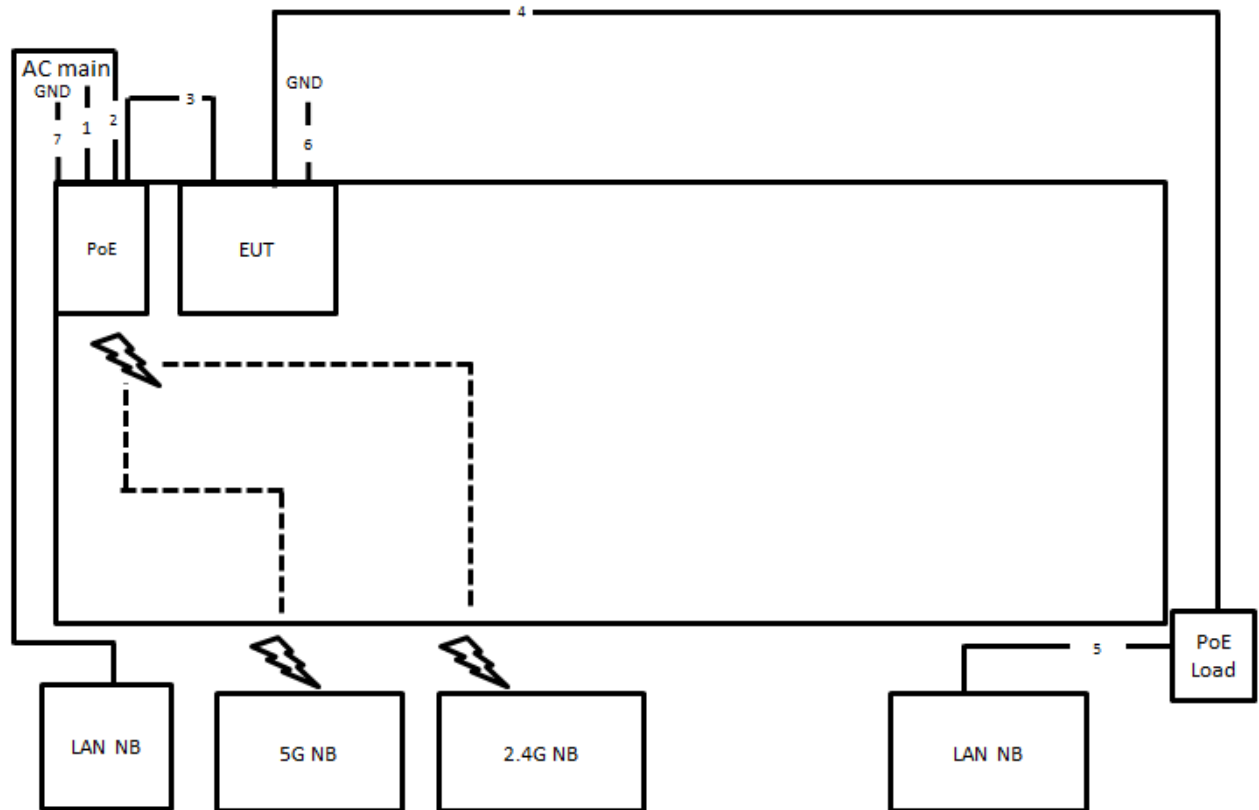

Item	Connection	Shielded	Length(m)
1	Power cable	No	4.6m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	Ground cable	No	1.5m
7	Ground cable	No	1.5m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

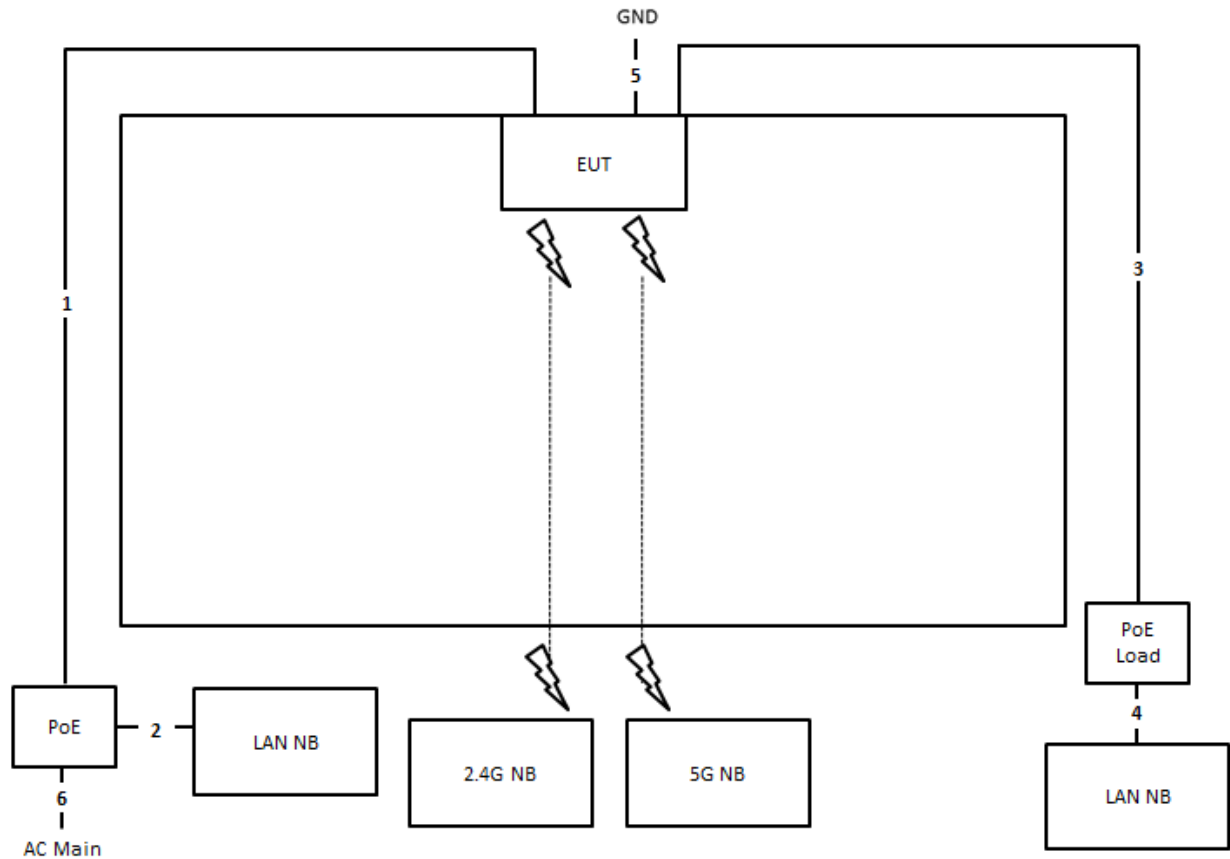

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.5m
5	Ground cable	No	1.5m
6	Power cable	No	4.6m

Test Configuration: above 1GHz

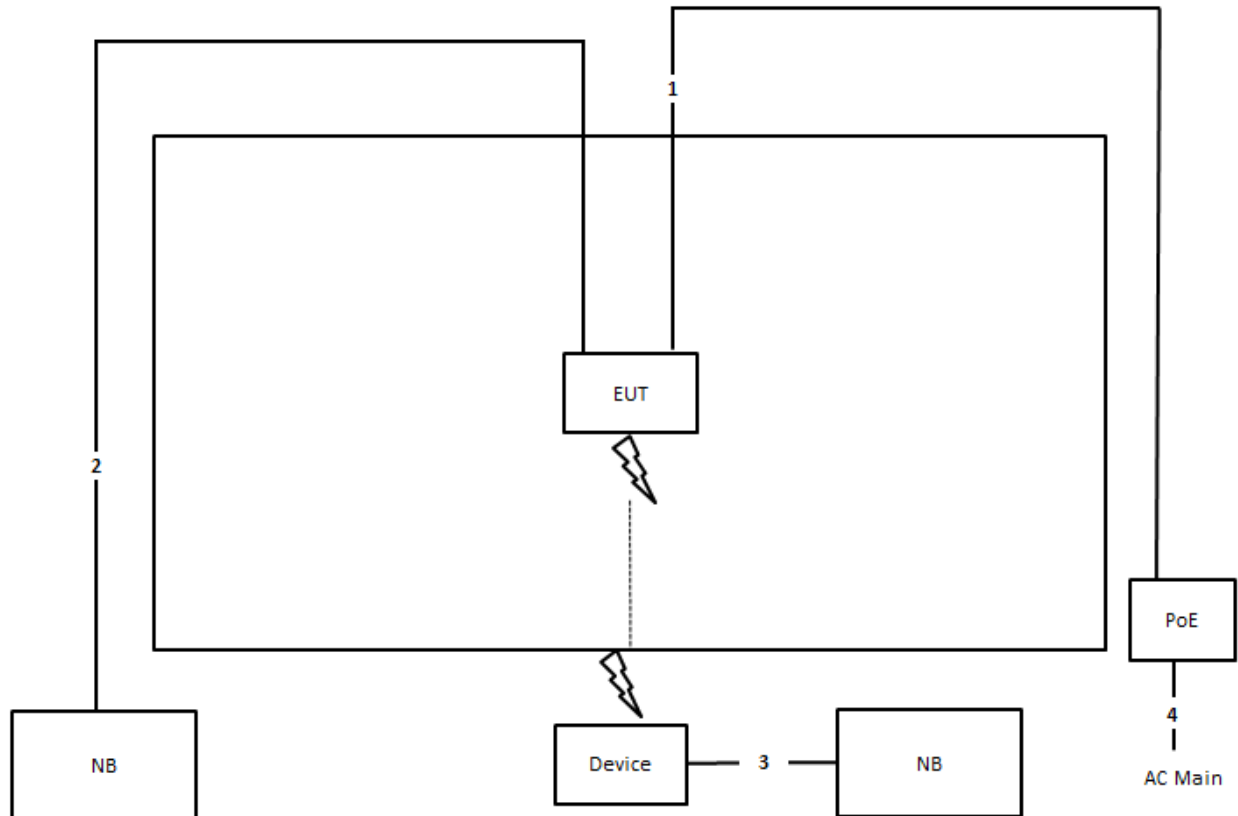

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m
4	Power cable	No	4.6m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

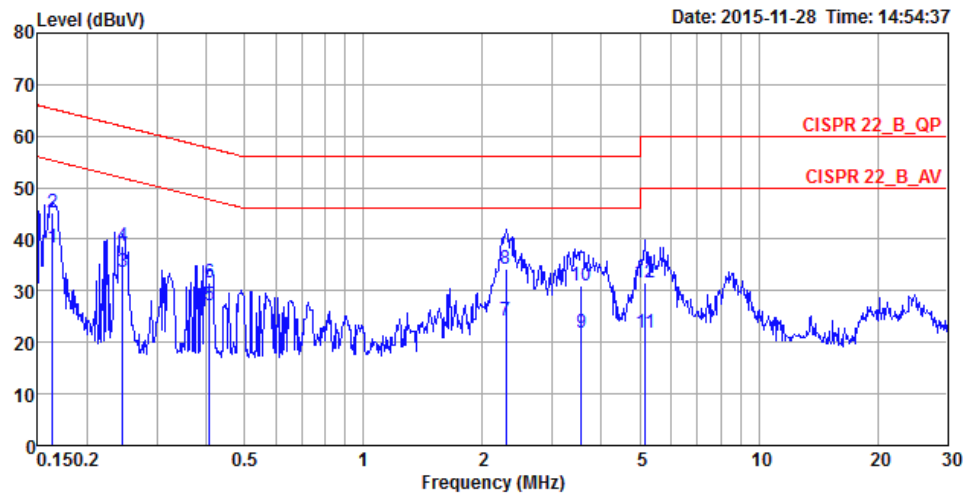

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1633	38.32	-16.98	55.30	28.37	9.93	0.02	LINE	Average
2	0.1633	45.02	-20.28	65.30	35.07	9.93	0.02	LINE	QP
3	0.2455	33.58	-18.33	51.91	23.62	9.93	0.03	LINE	Average
4	0.2455	38.68	-23.23	61.91	28.72	9.93	0.03	LINE	QP
5	0.4083	27.03	-20.65	47.68	17.06	9.93	0.04	LINE	Average
6	0.4083	31.63	-26.05	57.68	21.66	9.93	0.04	LINE	QP
7	2.2968	24.19	-21.81	46.00	14.13	10.00	0.06	LINE	Average
8	2.2968	34.32	-21.68	56.00	24.26	10.00	0.06	LINE	QP
9	3.5654	21.82	-24.18	46.00	11.75	10.01	0.06	LINE	Average
10	3.5654	30.85	-25.15	56.00	20.78	10.01	0.06	LINE	QP
11	5.1663	21.83	-28.17	50.00	11.67	10.06	0.10	LINE	Average
12	5.1663	31.49	-28.51	60.00	21.33	10.06	0.10	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

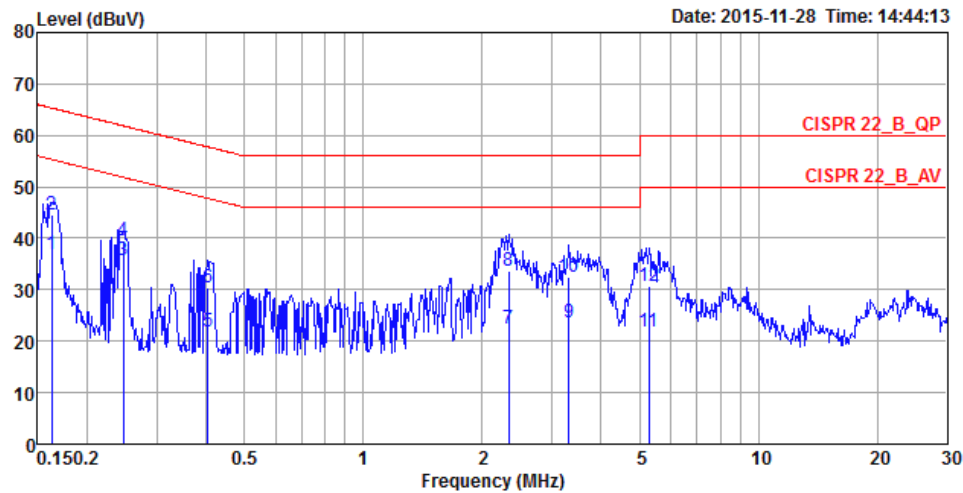

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.1624	36.93	-18.41	55.34	27.13	9.78	0.02	NEUTRAL	Average
2	0.1624	44.62	-20.72	65.34	34.82	9.78	0.02	NEUTRAL	QP
3	0.2468	35.70	-16.16	51.86	25.88	9.79	0.03	NEUTRAL	Average
4	0.2468	39.56	-22.30	61.86	29.74	9.79	0.03	NEUTRAL	QP
5	0.4040	21.74	-26.03	47.77	11.91	9.79	0.04	NEUTRAL	Average
6	0.4040	30.52	-27.25	57.77	20.69	9.79	0.04	NEUTRAL	QP
7	2.3336	22.34	-23.66	46.00	12.43	9.85	0.06	NEUTRAL	Average
8	2.3336	33.76	-22.24	56.00	23.85	9.85	0.06	NEUTRAL	QP
9	3.3105	23.57	-22.43	46.00	13.65	9.86	0.06	NEUTRAL	Average
10	3.3105	32.50	-23.50	56.00	22.58	9.86	0.06	NEUTRAL	QP
11	5.2770	21.74	-28.26	50.00	11.73	9.91	0.10	NEUTRAL	Average
12	5.2770	30.79	-29.21	60.00	20.78	9.91	0.10	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

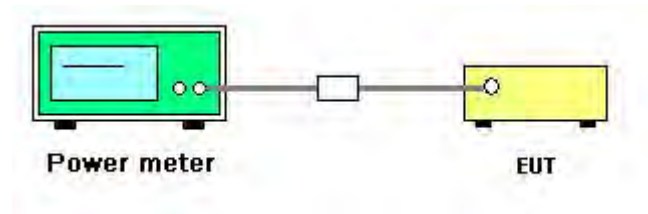

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	2412 MHz	13.44	13.57	12.68	13.03	19.21	25.49	Complies
	2437 MHz	19.35	19.79	18.44	19.27	25.26	25.49	Complies
	2462 MHz	13.25	13.71	12.92	13.19	19.30	25.49	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	12.35	12.63	11.82	11.91	18.21	25.49	Complies
	2437 MHz	12.65	13.22	12.21	12.29	18.63	25.49	Complies
	2452 MHz	11.39	11.63	10.84	11.07	17.26	25.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 30-(10.51-6)=25.49dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	15.54	14.66	13.65	14.24	20.60	27.49	Complies
MCS0/Nss1	2437 MHz	21.41	21.51	20.72	21.23	27.25	27.49	Complies
VHT20	2462 MHz	12.87	13.23	12.31	12.63	18.79	27.49	Complies
802.11ac	2422 MHz	11.65	12.25	11.32	11.41	17.69	27.49	Complies
MCS0/Nss1	2437 MHz	14.77	15.28	14.41	14.29	20.73	27.49	Complies
VHT40	2452 MHz	11.39	11.63	10.84	11.07	17.26	27.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 30-(8.51-6)=27.49dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	12.98	13.03	12.17	12.55	18.72	22.49	Complies
MCS0/Nss1	2437 MHz	16.27	16.63	15.45	16.01	22.13	22.49	Complies
VHT20	2462 MHz	11.43	10.71	11.82	11.14	17.31	22.49	Complies
802.11ac	2422 MHz	9.03	9.67	8.94	9.12	15.22	22.49	Complies
MCS0/Nss1	2437 MHz	12.65	13.22	12.21	12.29	18.63	22.49	Complies
VHT40	2452 MHz	9.31	9.78	8.49	9.13	15.22	22.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 30-(13.51-6)=22.49dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	13.74	13.86	12.94	13.17	19.46	22.98	Complies
MCS0/Nss1	2437 MHz	17.02	16.16	17.22	16.49	22.76	22.98	Complies
VHT20	2462 MHz	12.87	13.23	12.31	12.63	18.79	22.98	Complies
802.11ac	2422 MHz	11.15	11.79	10.78	10.97	17.21	22.98	Complies
MCS0/Nss1	2437 MHz	13.59	13.17	14.02	13.28	19.55	22.98	Complies
VHT40	2452 MHz	10.16	10.51	9.64	9.88	16.08	22.98	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.02\text{dBi} > 6\text{dBi}$, So Limit = 30-(13.02-6)=22.98dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	15.97	15.14	16.08	15.59	21.73	27.99	Complies
MCS0/Nss1	2437 MHz	21.78	21.99	21.25	21.82	27.74	27.99	Complies
VHT20	2462 MHz	14.83	14.25	15.13	14.58	20.73	27.99	Complies
802.11ac	2422 MHz	12.76	13.22	12.27	12.37	18.69	27.99	Complies
MCS0/Nss1	2437 MHz	14.22	14.65	13.76	13.87	20.16	27.99	Complies
VHT40	2452 MHz	11.39	11.63	10.84	11.07	17.26	27.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 30-(8.01-6)=27.99dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	12.54	11.66	12.56	12.07	18.24	19.99	Complies
MCS0/Nss1	2437 MHz	13.84	14.28	13.13	13.43	19.71	19.99	Complies
VHT20	2462 MHz	11.43	10.71	11.82	11.14	17.31	19.99	Complies
802.11ac	2422 MHz	8.57	9.27	8.33	8.62	14.73	19.99	Complies
MCS0/Nss1	2437 MHz	12.65	13.22	12.21	12.29	18.63	19.99	Complies
VHT40	2452 MHz	8.96	8.33	9.07	8.47	14.74	19.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 16.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 30-(16.01-6)=19.99dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Nov. 30, 2015
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	13.47	13.42	12.58	12.97	19.15	24.48	Complies
MCS0/Nss1	2437 MHz	18.89	18.45	17.64	18.22	24.34	24.48	Complies
VHT20	2462 MHz	12.87	13.23	12.31	12.63	18.79	24.48	Complies
802.11ac	2422 MHz	11.65	12.25	11.32	11.41	17.69	24.48	Complies
MCS0/Nss1	2437 MHz	14.77	15.28	14.41	14.29	20.73	24.48	Complies
VHT40	2452 MHz	11.63	12.18	11.32	11.47	17.68	24.48	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.52\text{dBi} > 6\text{dBi}$, So Limit = 30-(11.52-6)=24.48dBm.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Dec. 21, 2015
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	12.72	12.96	12.28	12.94	18.75	23.96	Complies
MCS0/Nss1	2437 MHz	18.05	17.58	17.63	18.27	23.91	23.96	Complies
VHT20	2462 MHz	13.36	13.61	12.45	13.52	19.28	23.96	Complies
802.11ac	2422 MHz	10.49	10.27	10.45	10.96	16.57	23.96	Complies
MCS0/Nss1	2437 MHz	13.84	13.61	14.08	14.02	19.91	23.96	Complies
VHT40	2452 MHz	11.45	11.42	11.33	11.65	17.48	23.96	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.04\text{dBi} > 6\text{dBi}$, So Limit = 30-(12.04-6)=23.96dBm.

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

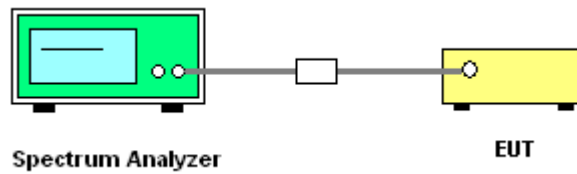

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	2412 MHz	-13.76	-13.17	-14.80	-12.64	-7.50	3.49	Complies
	2437 MHz	-6.60	-8.23	-6.70	-7.34	-1.15	3.49	Complies
	2462 MHz	-13.14	-13.61	-14.16	-12.18	-7.19	3.49	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-17.33	-17.01	-19.15	-17.97	-11.77	3.49	Complies
	2437 MHz	-17.20	-16.83	-16.96	-15.90	-10.67	3.49	Complies
	2452 MHz	-18.30	-17.69	-18.15	-18.04	-12.02	3.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(10.51-6)=3.49dBm/3kHz.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-11.24	-11.67	-11.15	-11.47	-5.36	5.49	Complies
MCS0/Nss1	2437 MHz	-4.61	-5.63	-5.89	-5.51	0.64	5.49	Complies
VHT20	2462 MHz	-15.01	-15.46	-16.61	-15.03	-9.46	5.49	Complies
802.11ac	2422 MHz	-17.67	-15.88	-18.49	-18.01	-11.37	5.49	Complies
MCS0/Nss1	2437 MHz	-15.42	-15.75	-15.10	-14.27	-9.08	5.49	Complies
VHT40	2452 MHz	-18.30	-18.15	-17.69	-18.04	-12.02	5.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(8.51-6)=5.49dBm/3kHz.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-14.62	-15.68	-12.69	-14.04	-8.10	0.49	Complies
MCS0/Nss1	2437 MHz	-9.43	-12.44	-9.61	-11.16	-4.47	0.49	Complies
VHT20	2462 MHz	-15.52	-17.07	-14.81	-16.10	-9.78	0.49	Complies
802.11ac	2422 MHz	-19.40	-19.90	-19.22	-19.60	-13.50	0.49	Complies
MCS0/Nss1	2437 MHz	-17.20	-16.83	-16.96	-15.90	-10.67	0.49	Complies
VHT40	2452 MHz	-21.06	-20.99	-20.09	-19.94	-14.47	0.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.51 \text{ dBi} > 6 \text{ dBi}$, So Limit = $8 - (13.51 - 6) = 0.49 \text{ dBm/3kHz}$.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-11.55	-14.10	-12.97	-12.87	-6.76	0.98	Complies
MCS0/Nss1	2437 MHz	-10.18	-11.09	-9.45	-9.92	-4.10	0.98	Complies
VHT20	2462 MHz	-14.28	-15.49	-14.36	-13.85	-8.43	0.98	Complies
802.11ac	2422 MHz	-17.78	-18.58	-18.89	-19.08	-12.53	0.98	Complies
MCS0/Nss1	2437 MHz	-15.26	-16.41	-16.73	-16.52	-10.17	0.98	Complies
VHT40	2452 MHz	-19.07	-20.35	-18.14	-18.82	-13.00	0.98	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.02\text{dBi} > 6\text{dBi}$, So Limit = $8 - (13.02 - 6) = 0.98\text{dBm/3kHz}$.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	2412 MHz	-11.64	-10.87	-11.31	-10.65	-5.08	5.99	Complies
	2437 MHz	-5.26	-6.99	-4.04	-4.85	0.86	5.99	Complies
	2462 MHz	-12.18	-12.64	-11.97	-12.65	-6.33	5.99	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-16.42	-17.84	-15.31	-16.13	-10.31	5.99	Complies
	2437 MHz	-15.85	-15.91	-14.67	-15.17	-9.35	5.99	Complies
	2452 MHz	-18.30	-18.15	-17.69	-18.04	-12.02	5.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(8.01-6)=5.99dBm/3kHz.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-16.15	-16.80	-15.58	-14.76	-9.74	-2.01	Complies
MCS0/Nss1	2437 MHz	-13.31	-13.78	-12.84	-13.41	-7.30	-2.01	Complies
VHT20	2462 MHz	-15.52	-17.07	-14.81	-16.10	-9.78	-2.01	Complies
802.11ac	2422 MHz	-20.77	-22.10	-19.63	-20.99	-14.76	-2.01	Complies
MCS0/Nss1	2437 MHz	-17.20	-16.83	-16.96	-15.90	-10.67	-2.01	Complies
VHT40	2452 MHz	-21.06	-20.99	-20.09	-19.94	-14.47	-2.01	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 16.01 \text{ dBi} > 6 \text{ dBi}$, So Limit = 8-(16.01-6)=-2.01 dBm/3kHz.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-13.76	-14.80	-13.17	-12.64	-7.50	2.48	Complies
MCS0/Nss1	2437 MHz	-9.56	-9.92	-9.39	-9.10	-3.46	2.48	Complies
VHT20	2462 MHz	-12.18	-12.64	-11.97	-12.65	-6.33	2.48	Complies
802.11ac	2422 MHz	-18.14	-18.73	-17.26	-18.37	-12.07	2.48	Complies
MCS0/Nss1	2437 MHz	-15.42	-15.75	-15.10	-14.27	-9.08	2.48	Complies
VHT40	2452 MHz	-18.25	-18.63	-17.81	-17.38	-11.97	2.48	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.52 \text{dBi} > 6 \text{dBi}$, So Limit = $8 - (11.52 - 6) = 2.48 \text{dBm/3kHz}$.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	-16.16	-15.11	-15.80	-15.65	-9.64	1.96	Complies
MCS0/Nss1	2437 MHz	-8.14	-8.48	-8.20	-7.99	-2.18	1.96	Complies
VHT20	2462 MHz	-12.61	-12.38	-12.71	-12.53	-6.54	1.96	Complies
802.11ac	2422 MHz	-18.55	-18.41	-17.14	-16.83	-11.65	1.96	Complies
MCS0/Nss1	2437 MHz	-16.88	-16.87	-17.64	-17.56	-11.20	1.96	Complies
VHT40	2452 MHz	-18.70	-17.73	-19.42	-20.45	-12.94	1.96	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.04\text{dBi} > 6\text{dBi}$, So Limit = 8-(12.04-6)=1.96dBm/3kHz.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

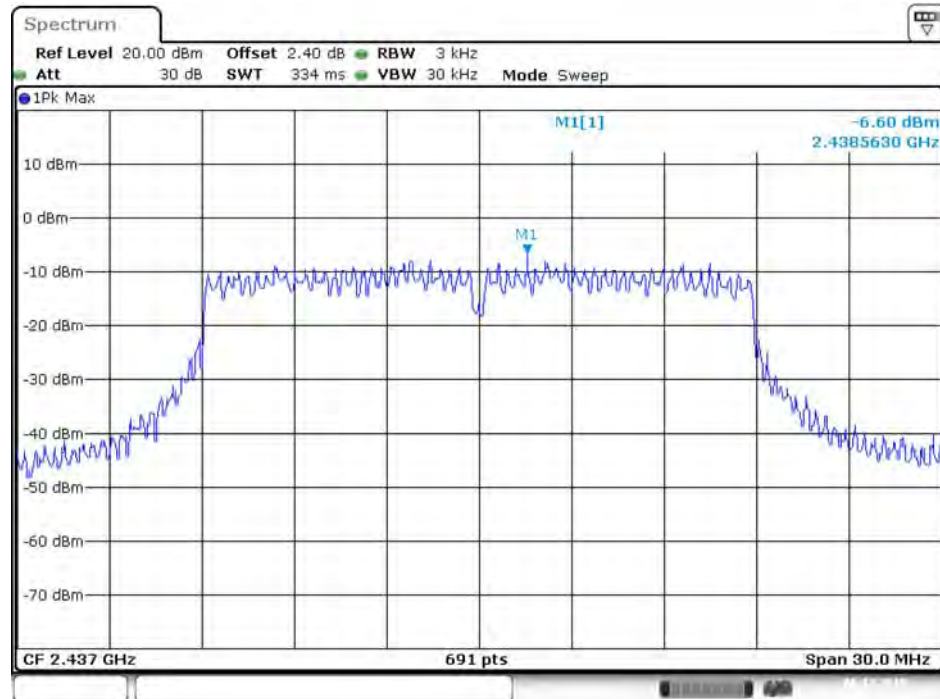


Date: 6 DEC. 2015 01:17:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

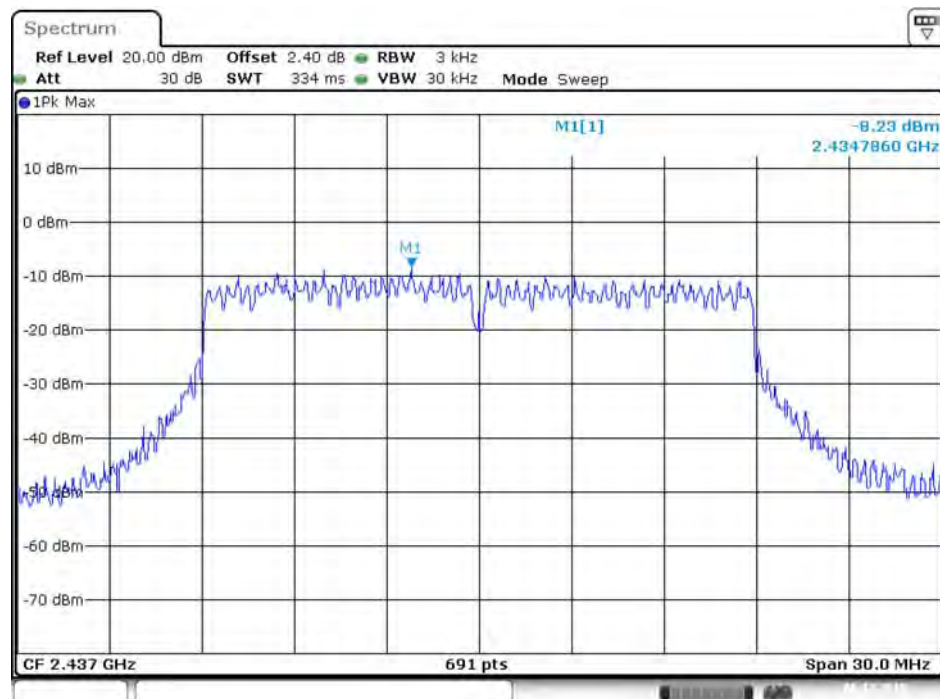


Date: 6 DEC. 2015 01:14:59


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

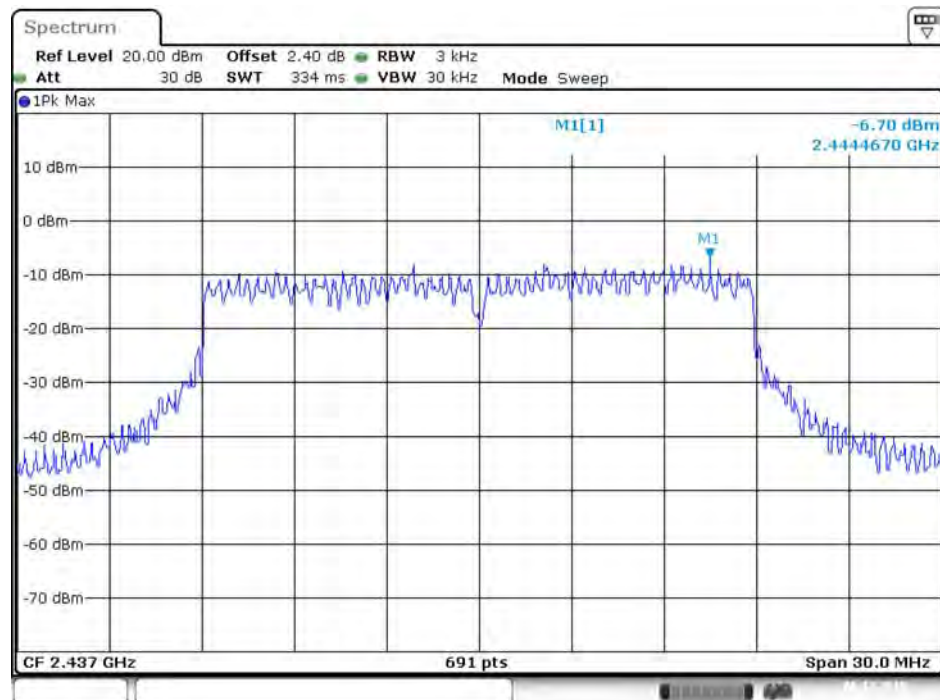

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

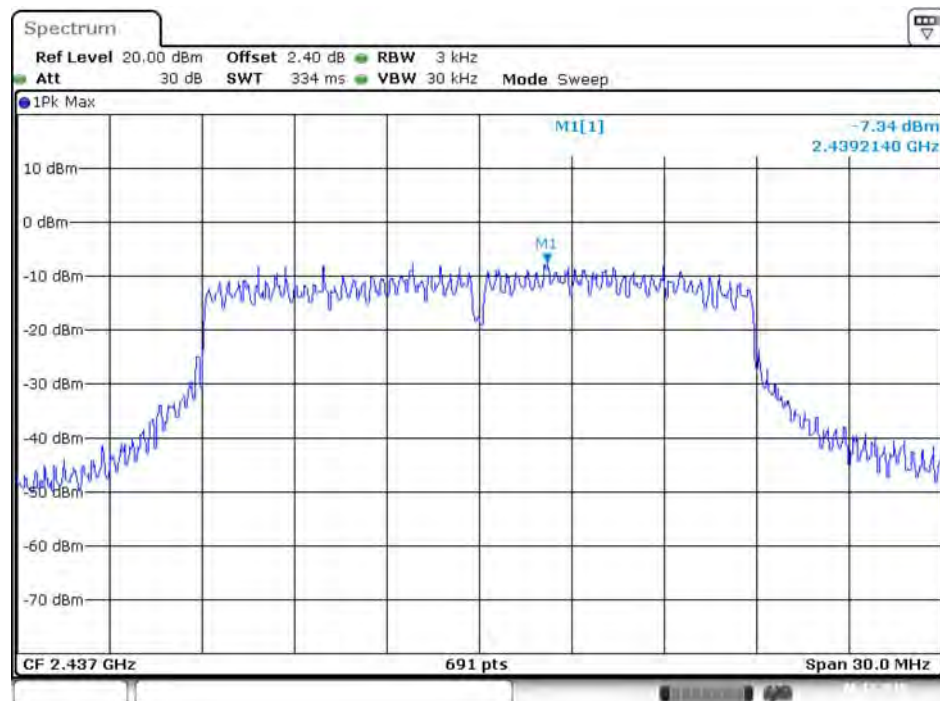


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

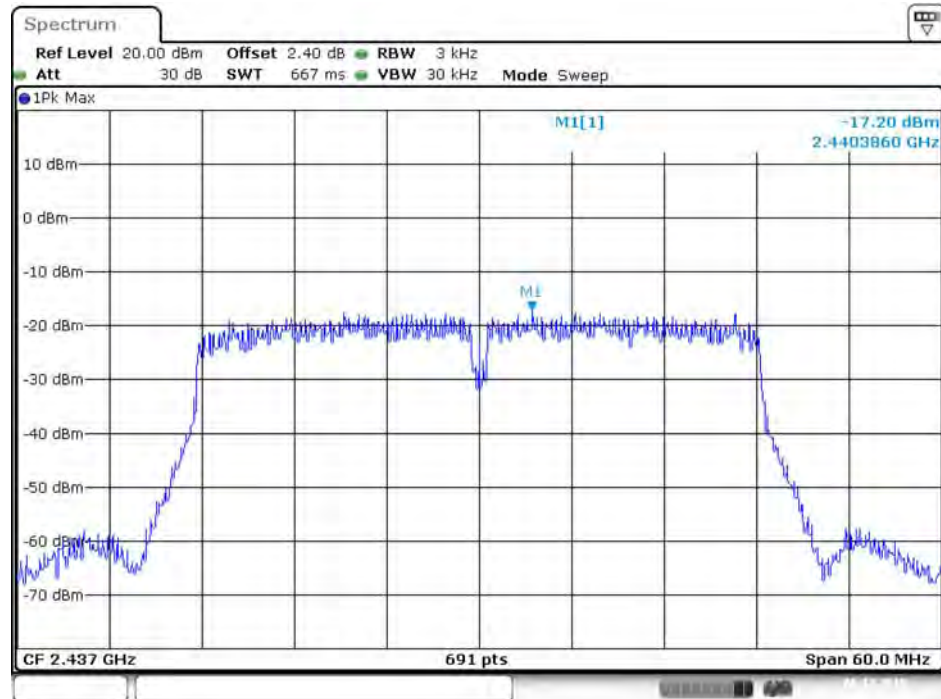


Date: 6, DEC. 2015 01:00:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

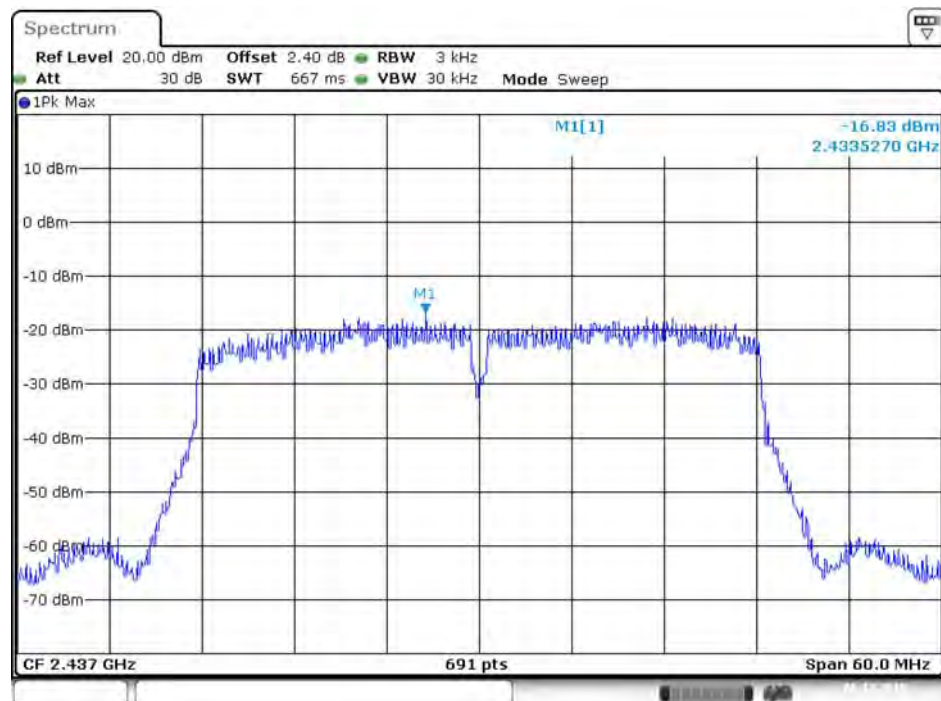


Date: 6, DEC. 2015 00:58:54

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

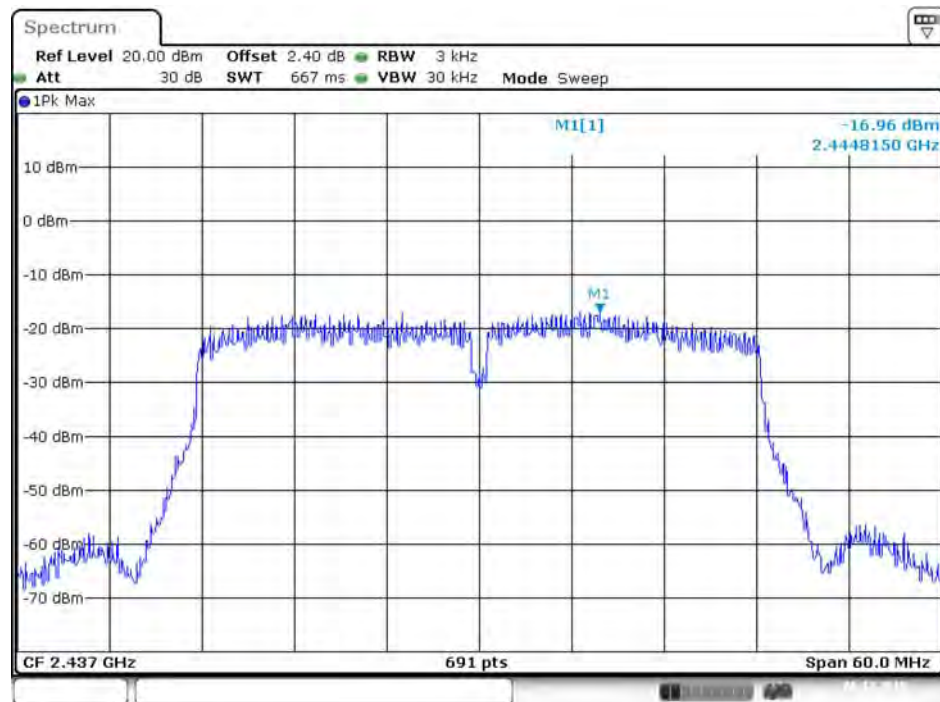

Date: 6 DEC. 2015 01:00:12


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

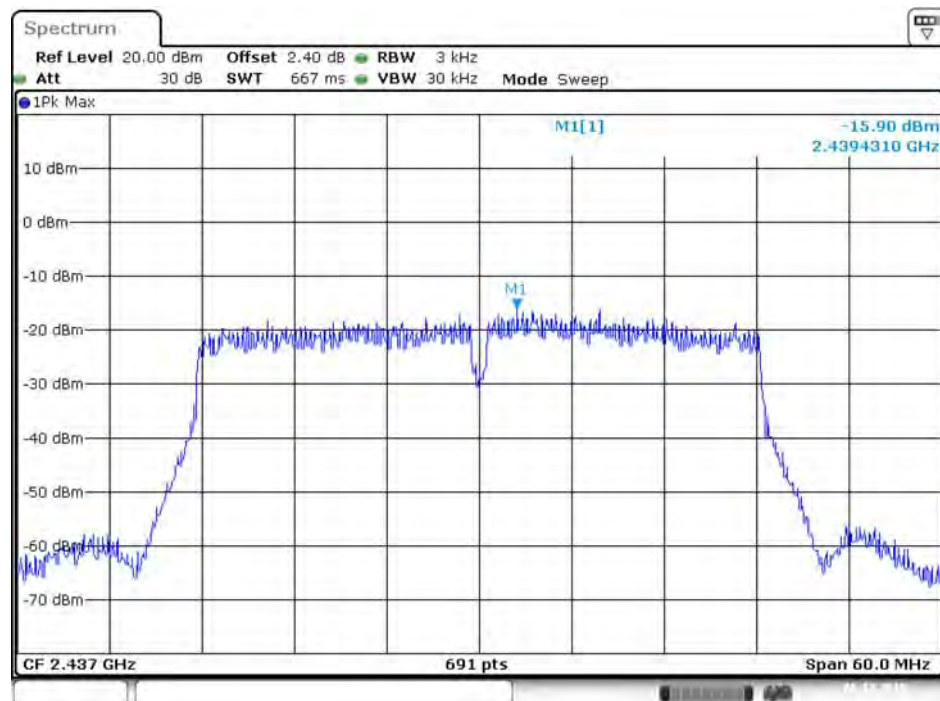

Date: 6 DEC. 2015 00:59:43


Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

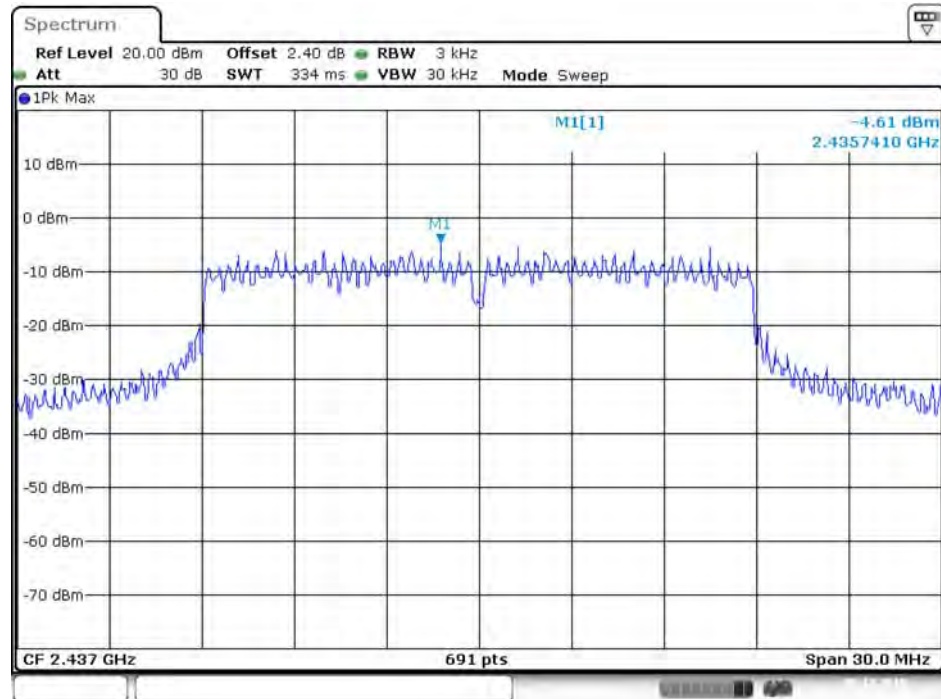


Date: 5 DEC. 2015 22:31:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

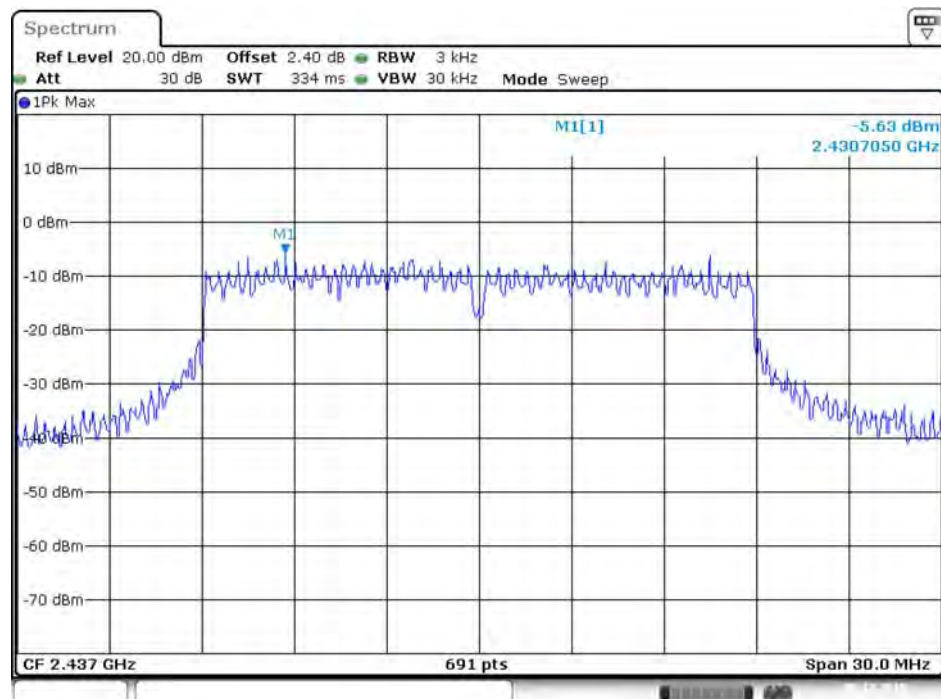


Date: 5 DEC. 2015 22:29:57

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

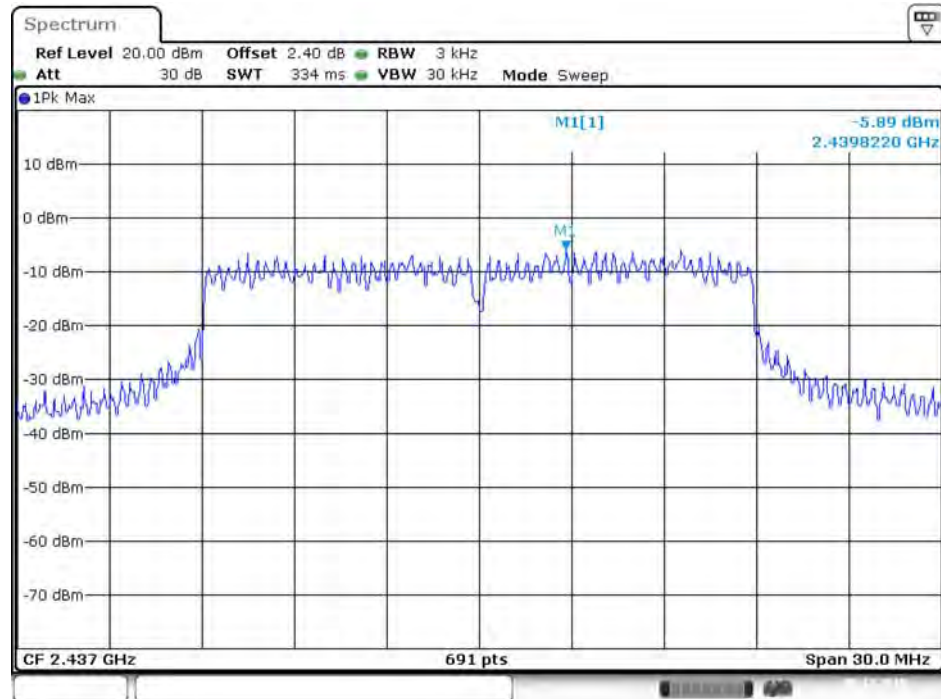


Date: 5 DEC. 2015 22:30:43

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

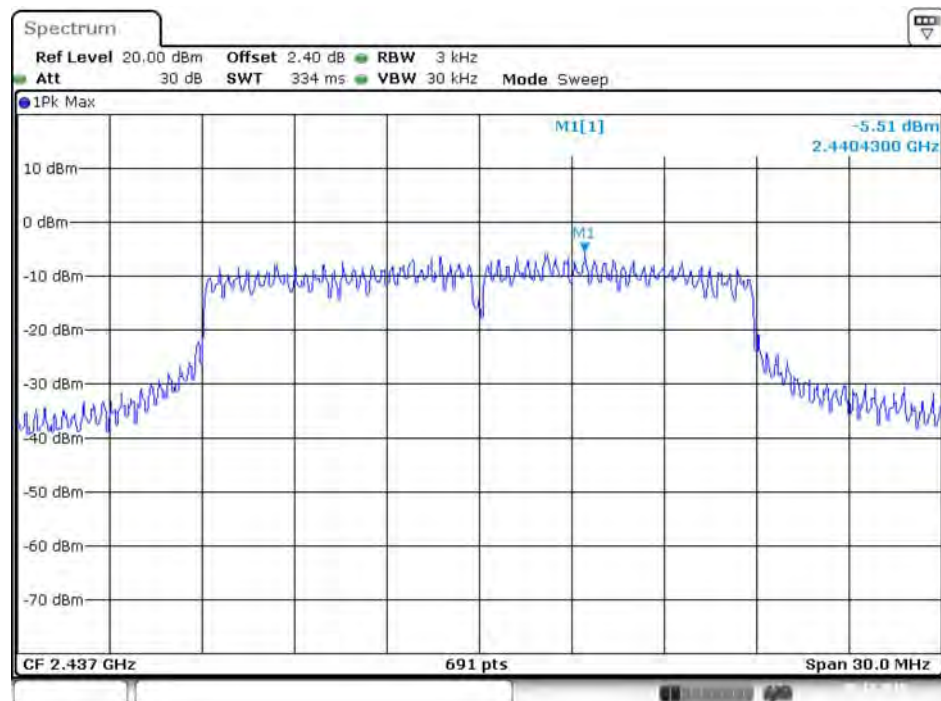


Date: 5 DEC. 2015 22:29:22

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

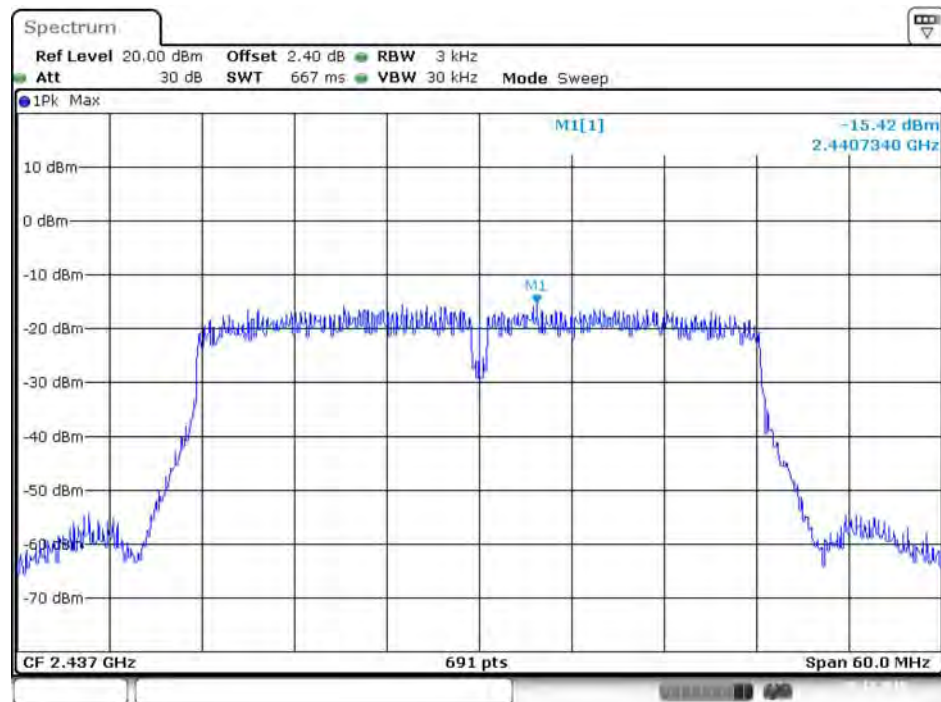


Date: 5 DEC.2015 21:21:49

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

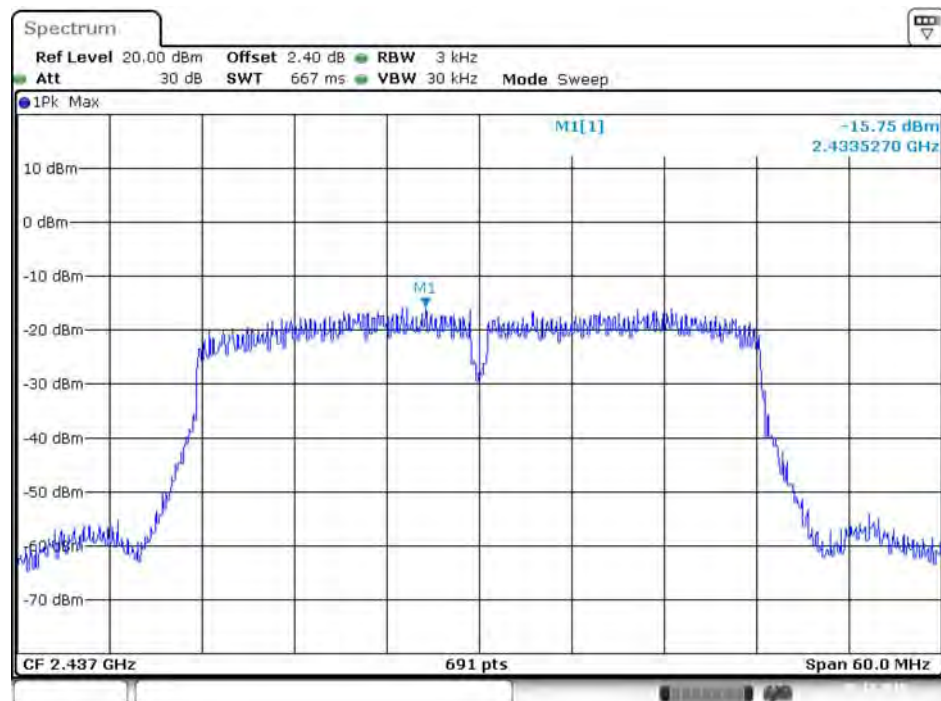


Date: 5 DEC.2015 21:23:11

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

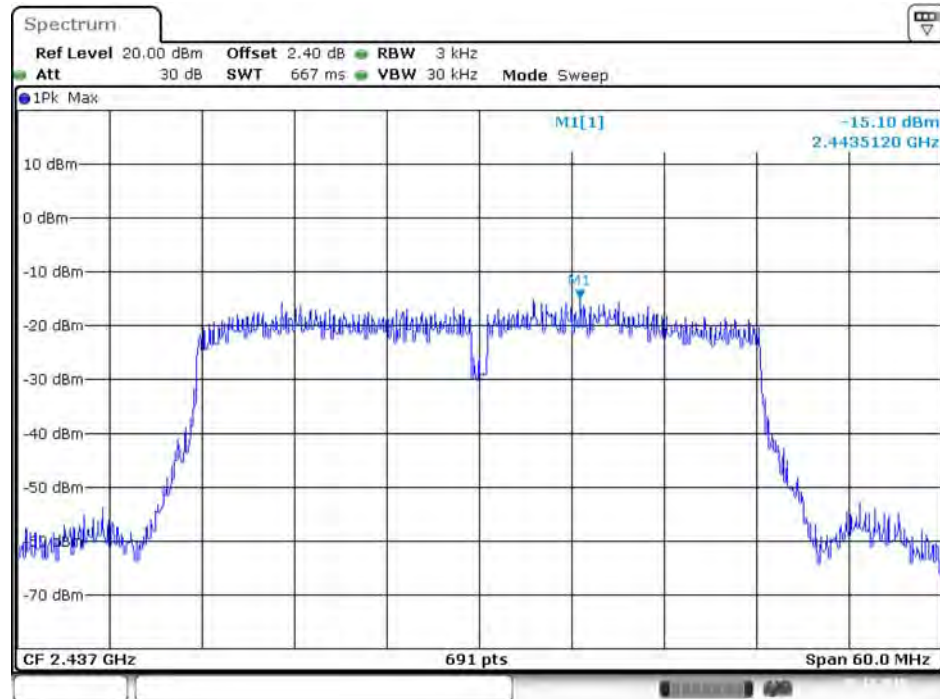

Date: 5 DEC.2015 21:22:26



Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

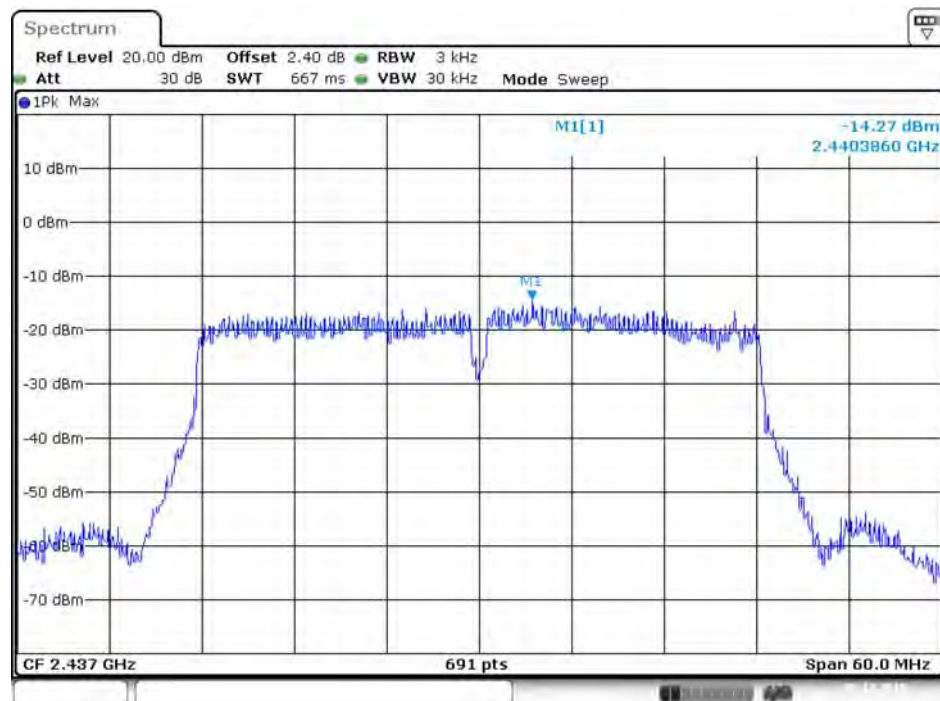


Date: 5 DEC.2015 21:23:57




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

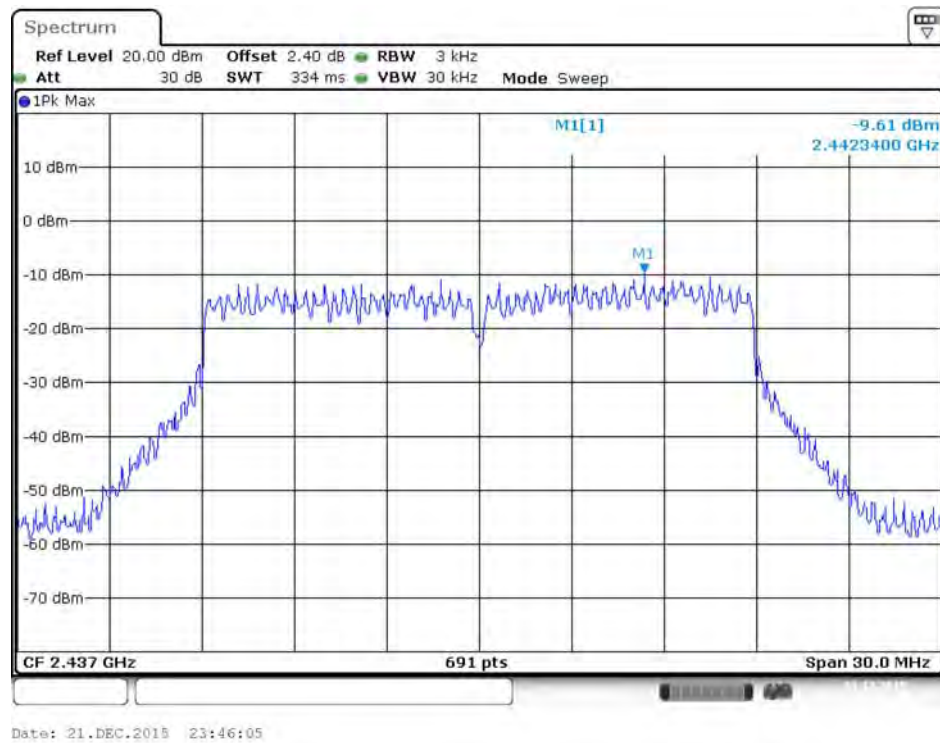

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

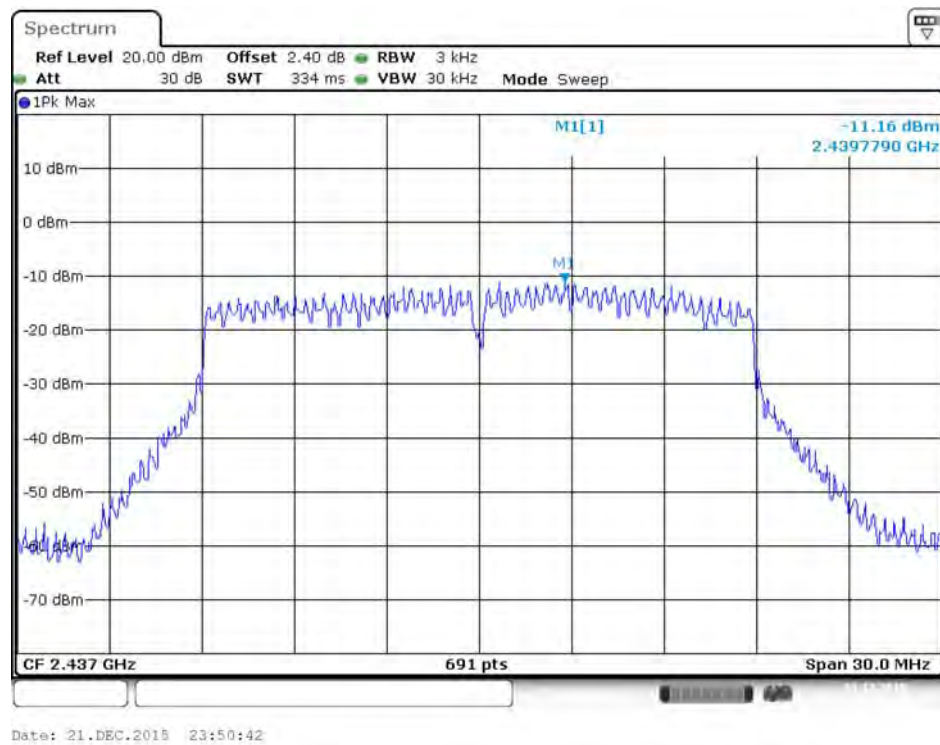


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

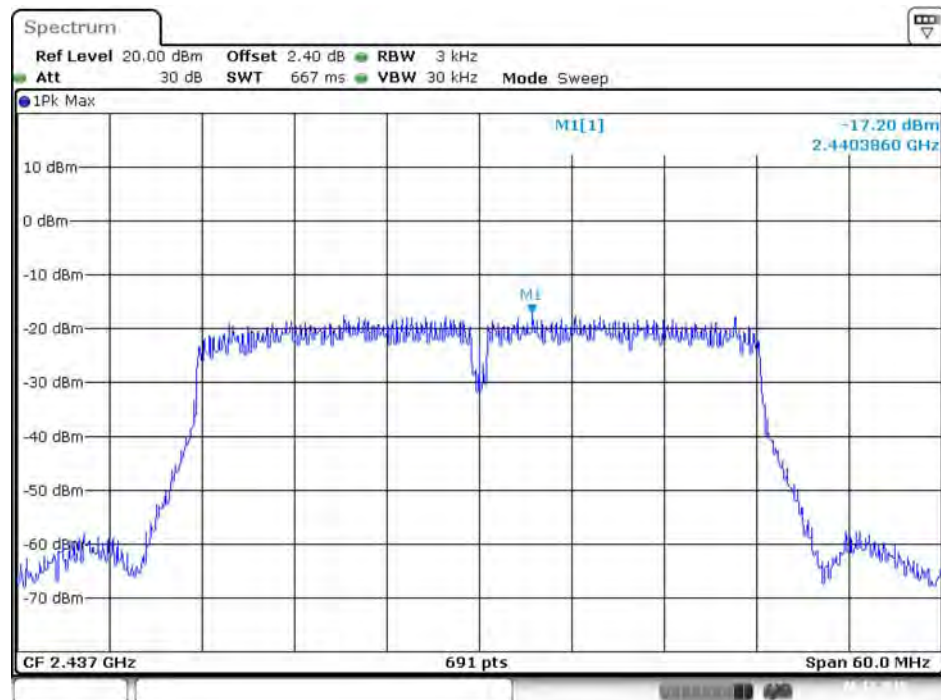


Date: 6 DEC. 2015 01:00:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

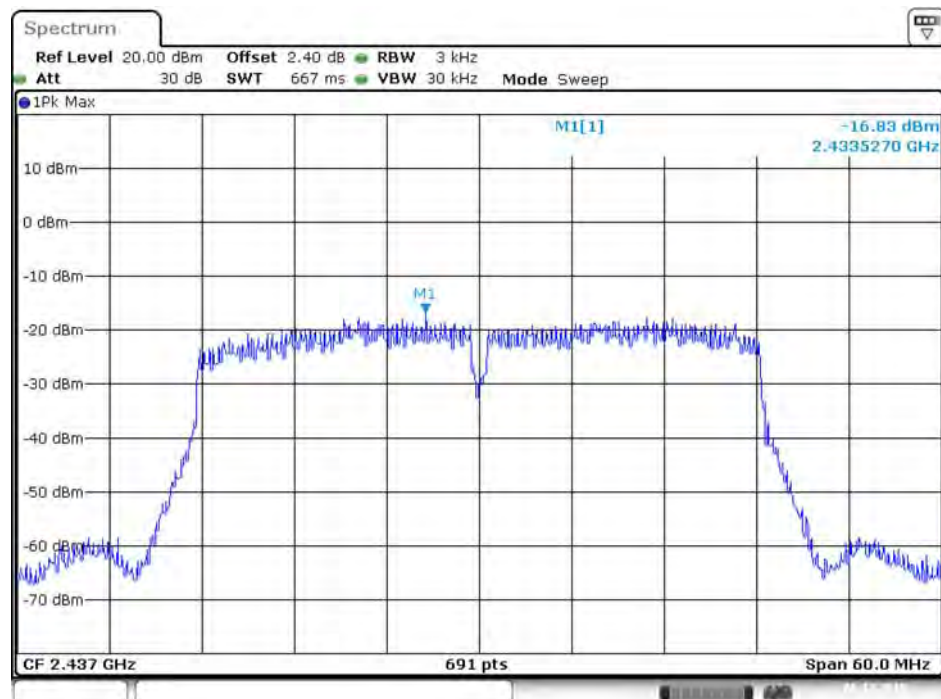


Date: 6 DEC. 2015 00:58:54

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

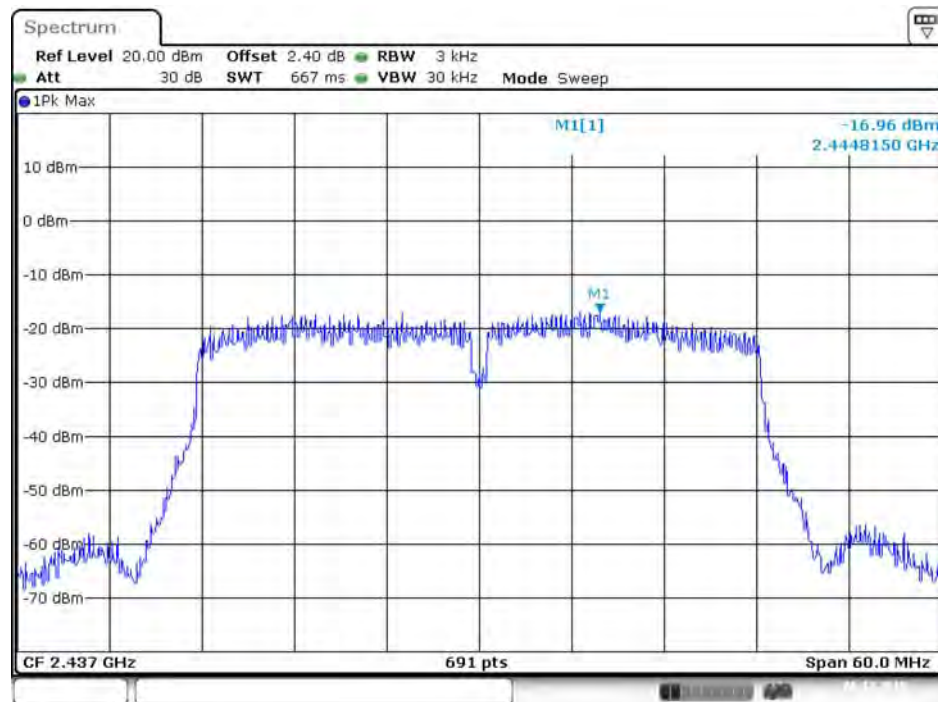

Date: 6 DEC. 2015 01:00:12


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

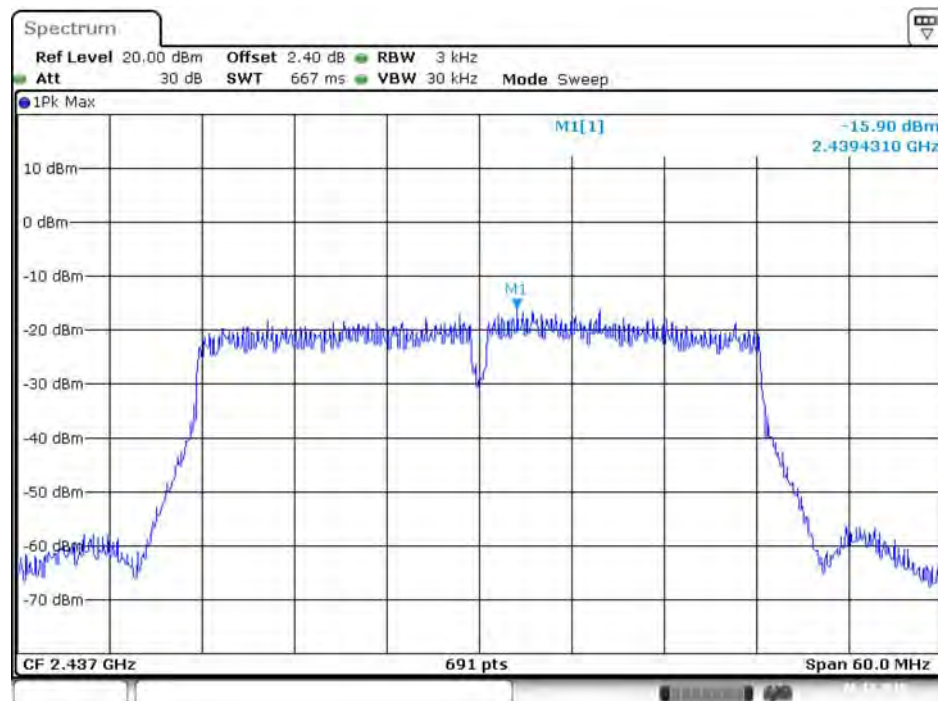

Date: 6 DEC. 2015 00:59:43


Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

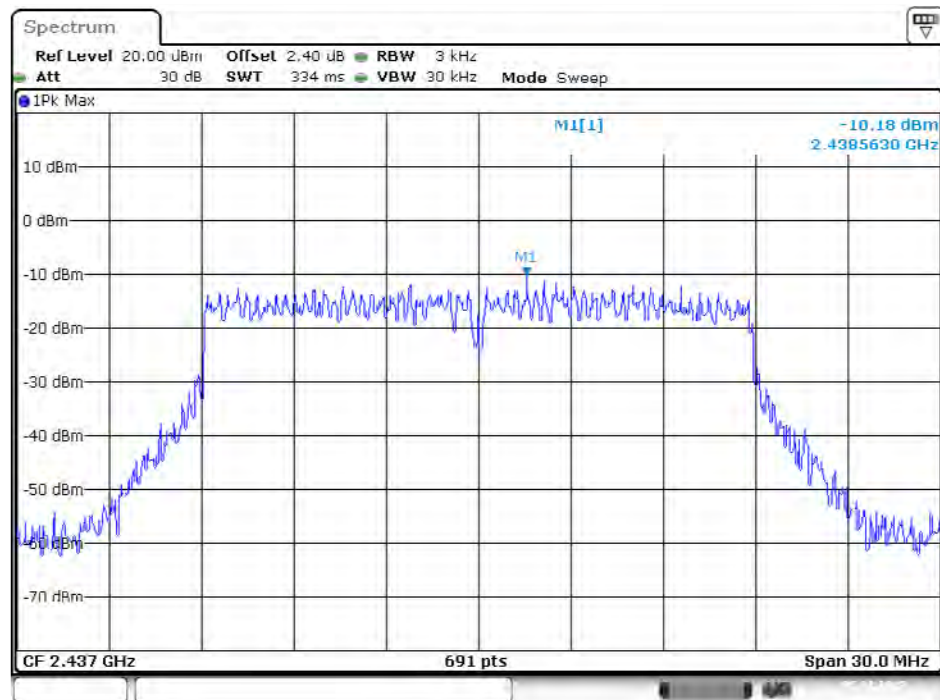


Date: 5.DEC.2015 20:48:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

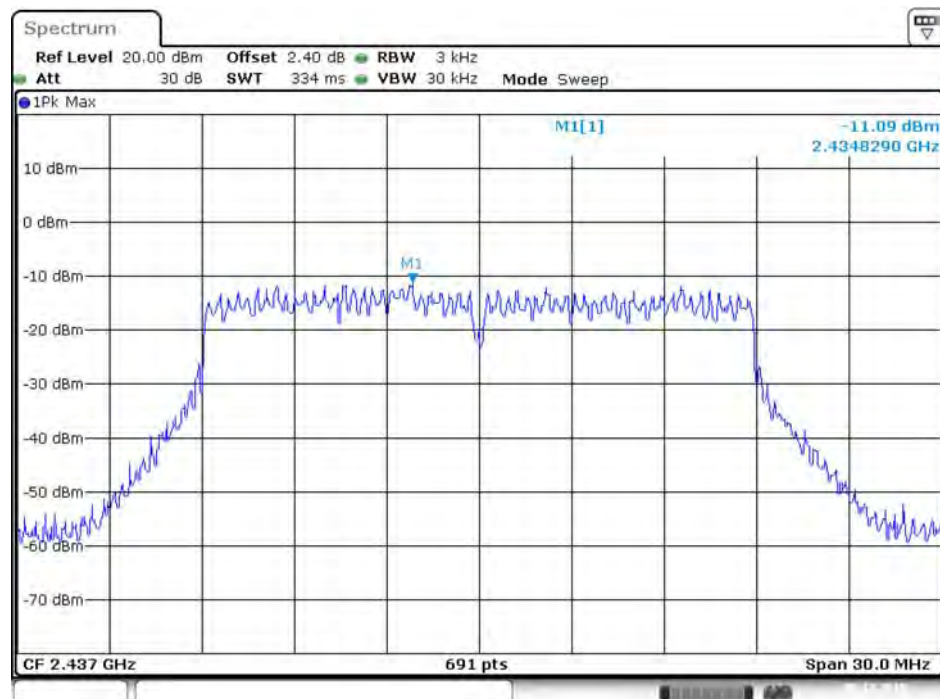


Date: 5.DEC.2015 20:47:29

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

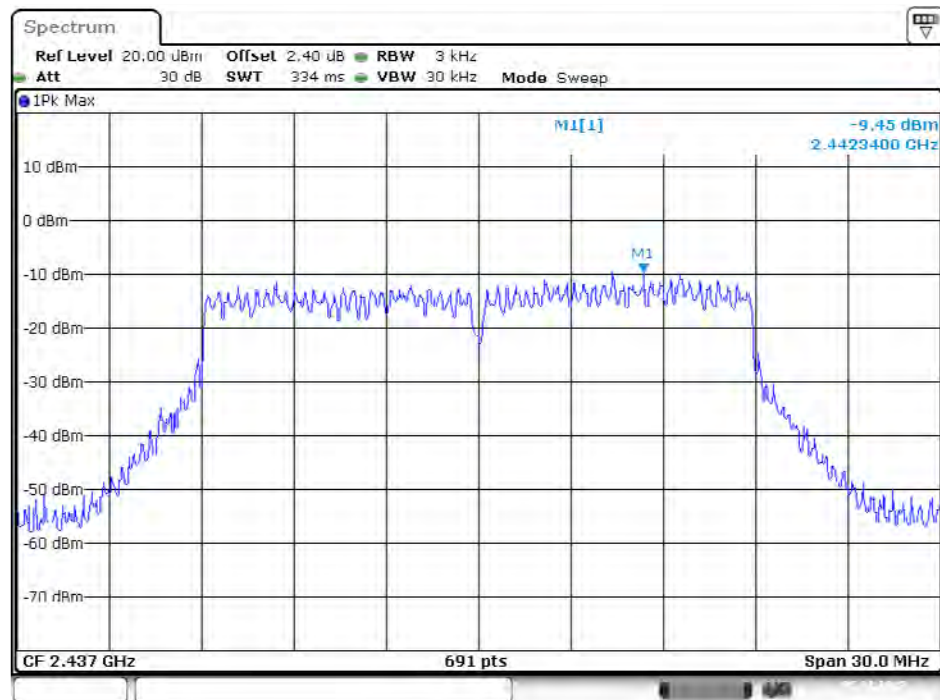


Date: 5 DEC.2015 20:47:56

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

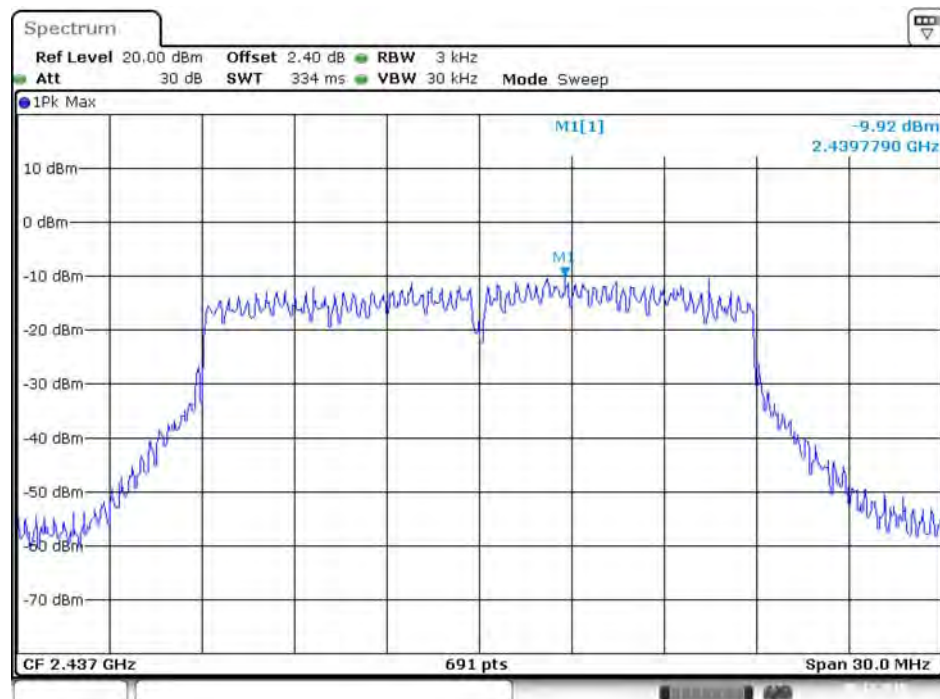


Date: 5 DEC.2015 20:48:52

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

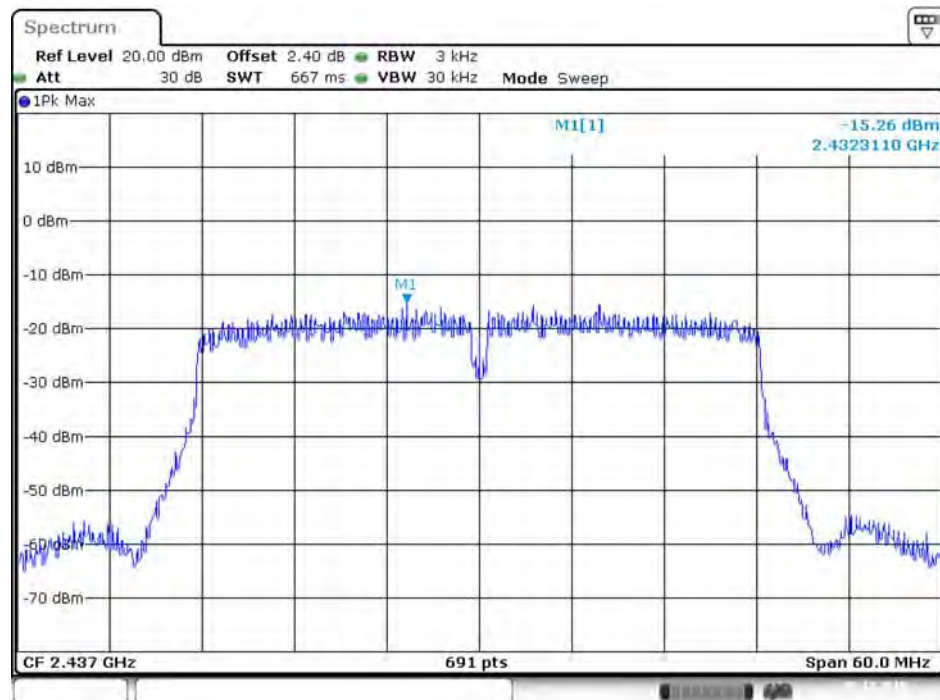


Date: 5.DEC.2015 20:58:17

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

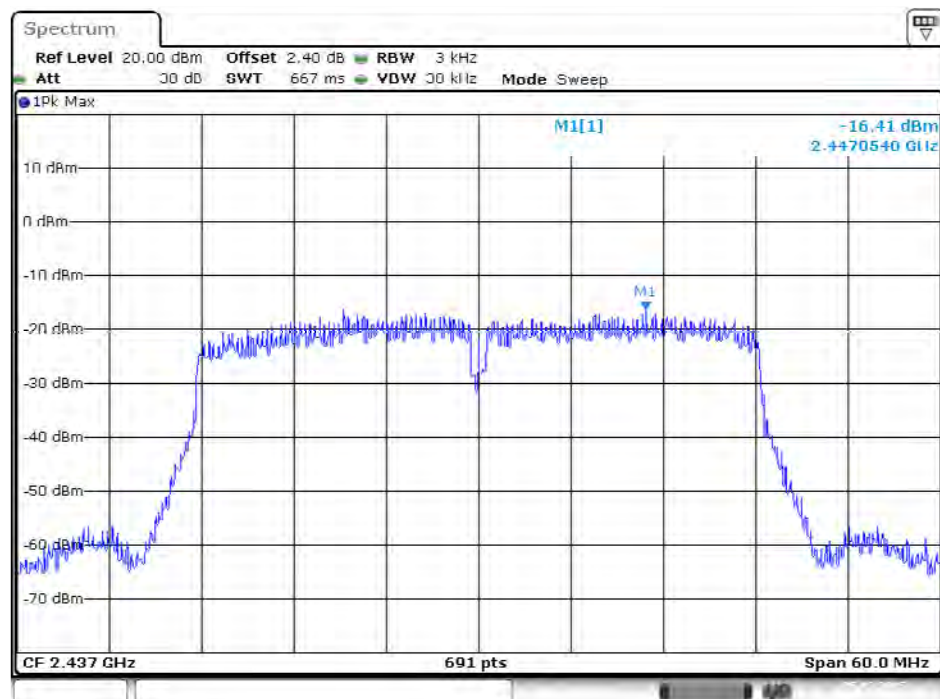


Date: 5.DEC.2015 20:55:51

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

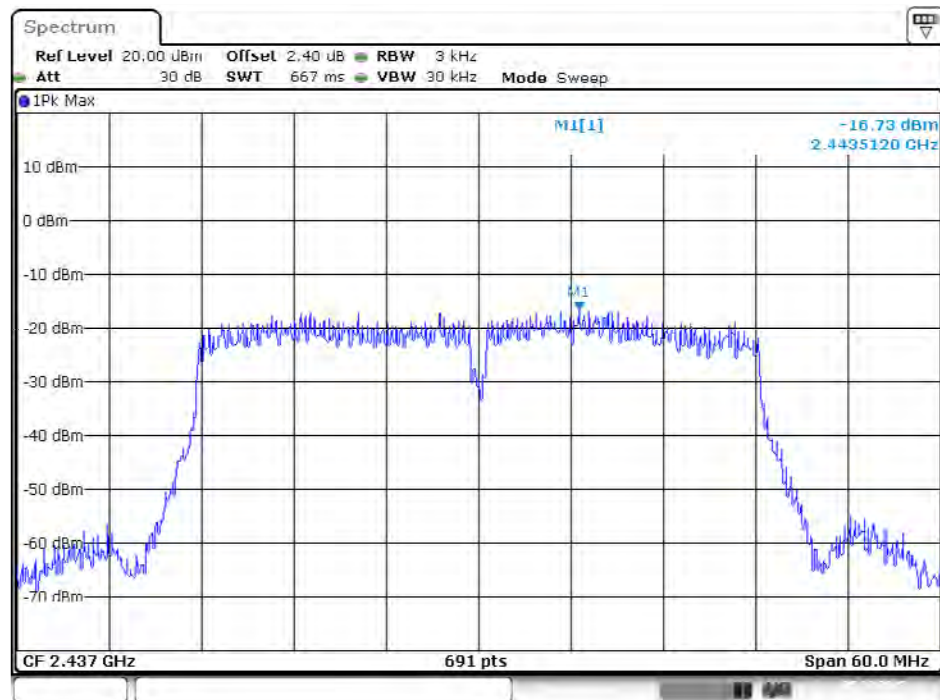

Date: 5.DEC.2015 20:56:19


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

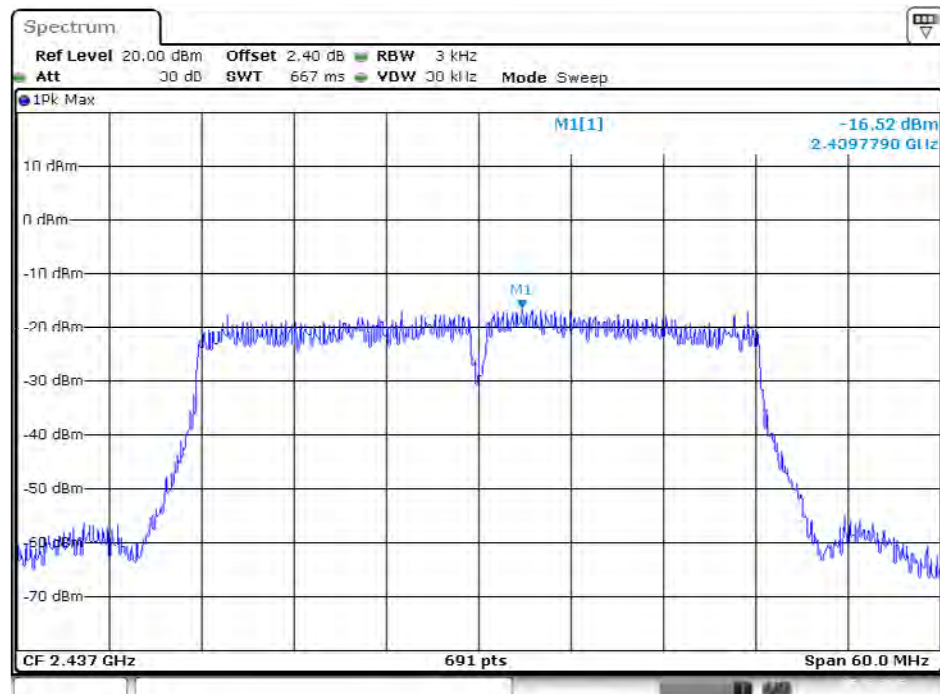

Date: 5.DEC.2015 20:54:47


Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

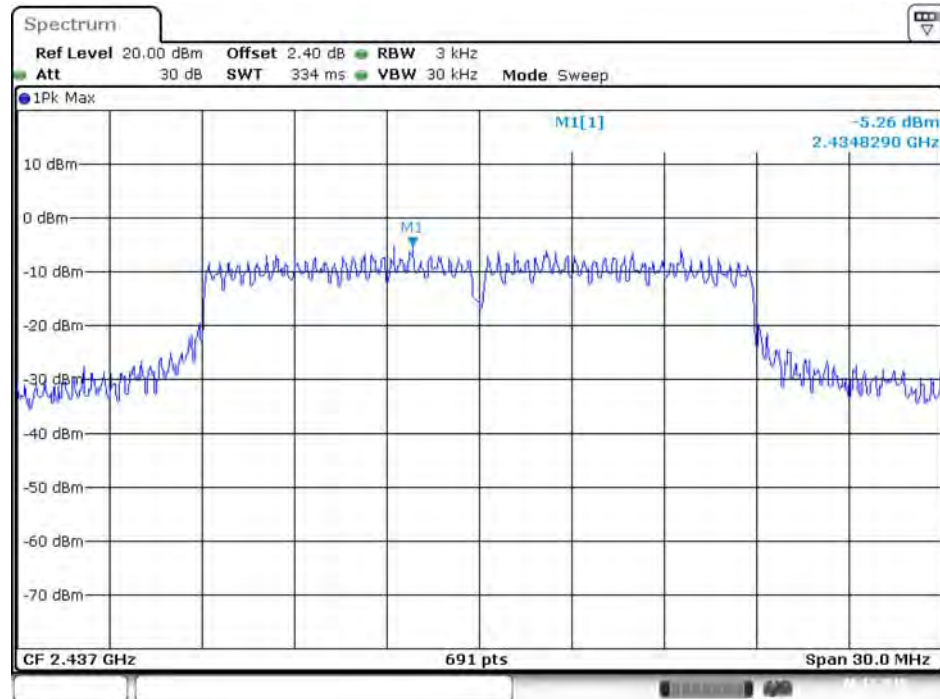


Date: 6 DEC. 2015 03:21:42

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

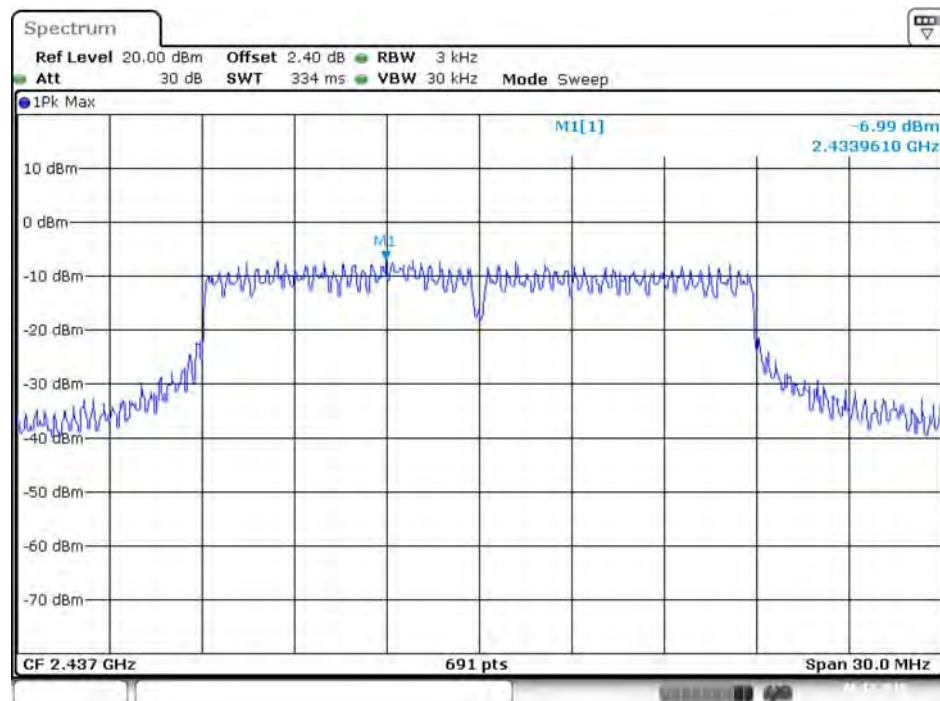


Date: 6 DEC. 2015 03:19:53

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

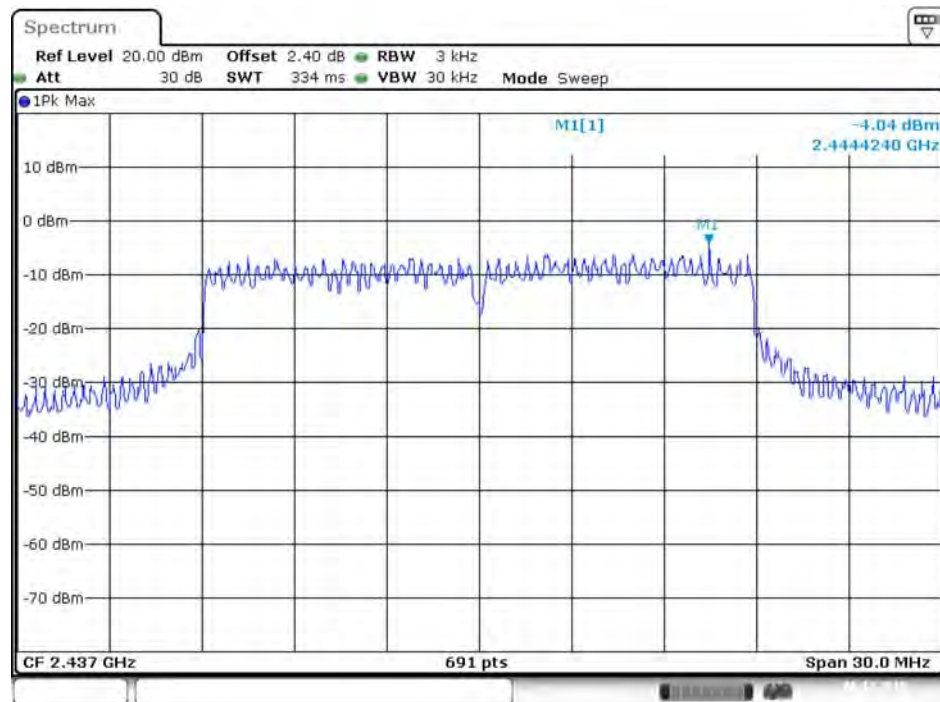


Date: 6, DEC. 2015 03:21:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

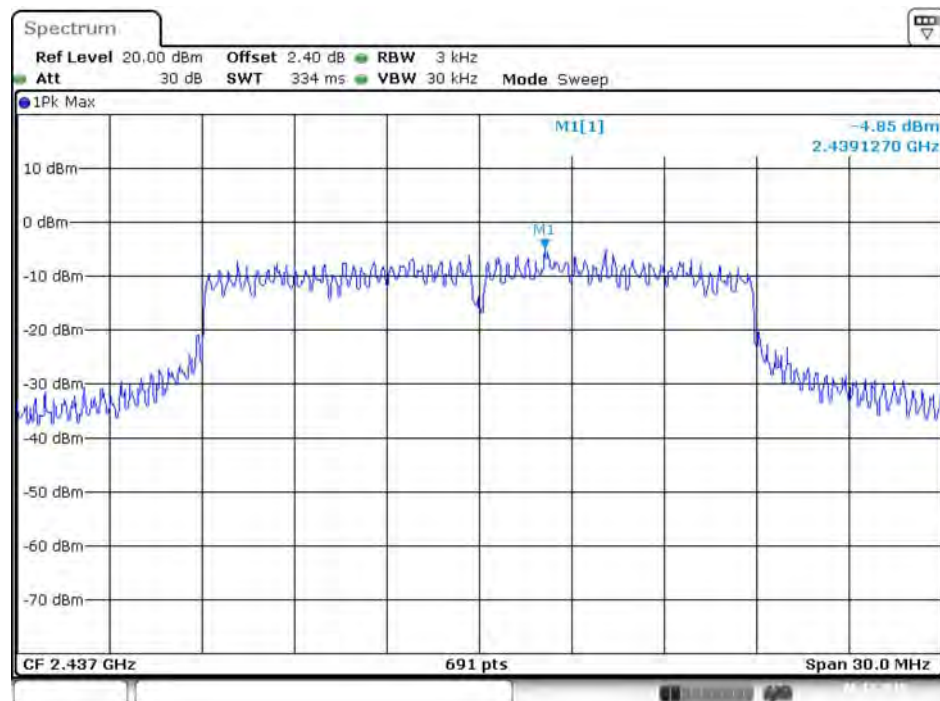


Date: 6, DEC. 2015 03:20:41


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

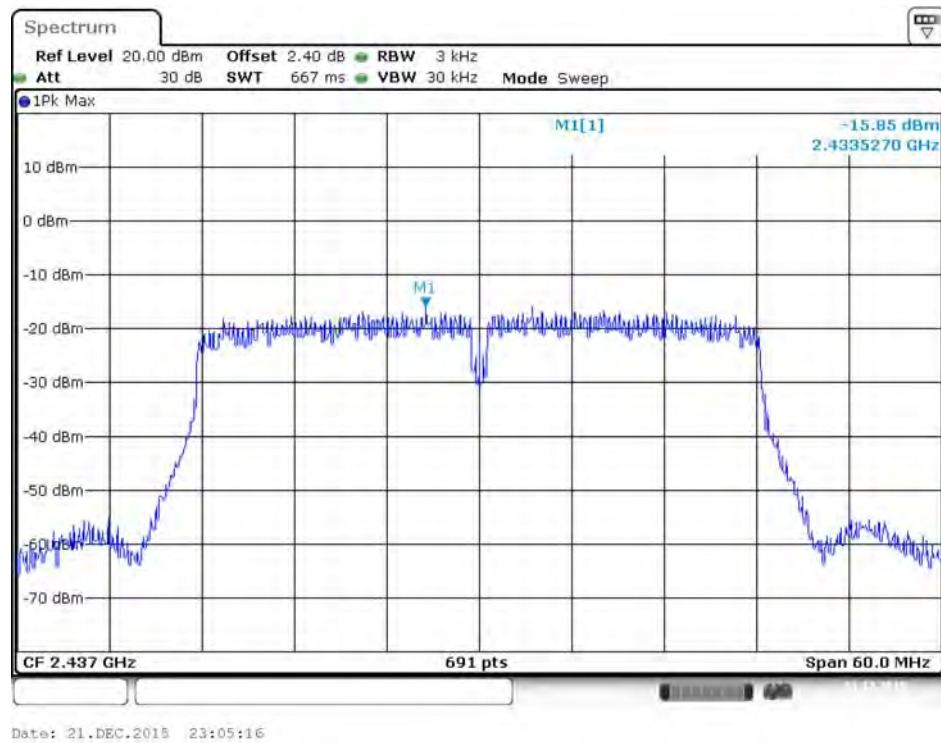


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

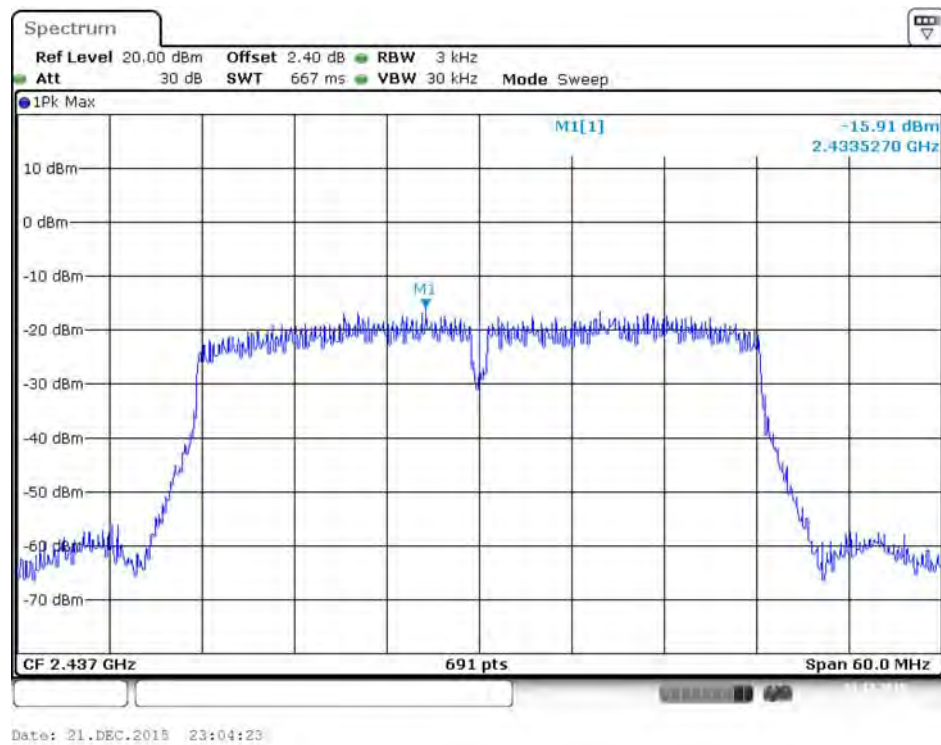

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

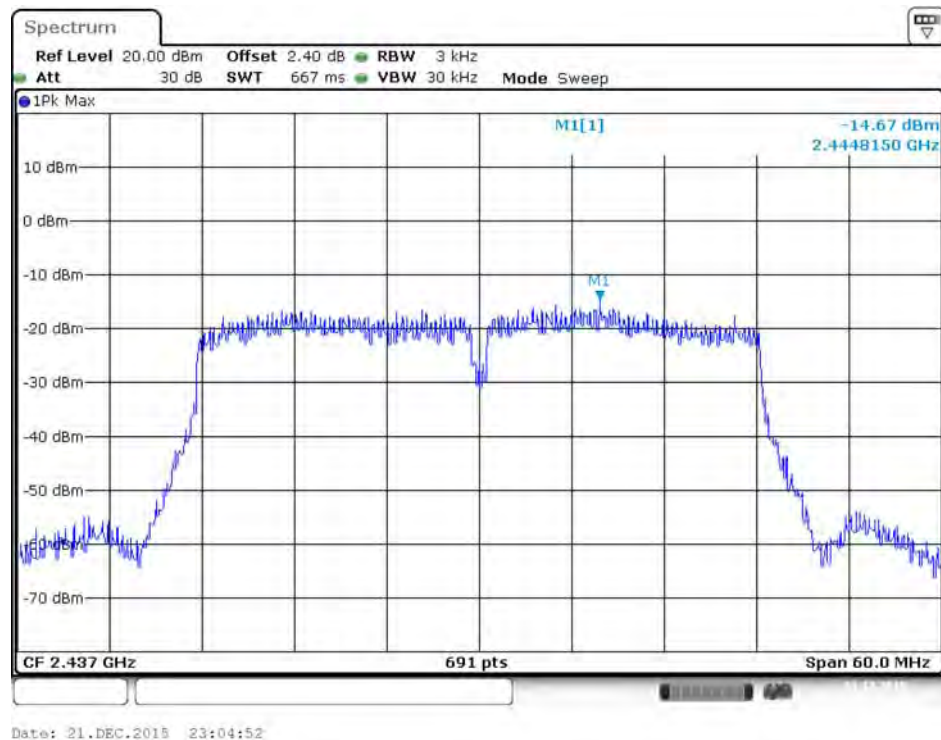


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

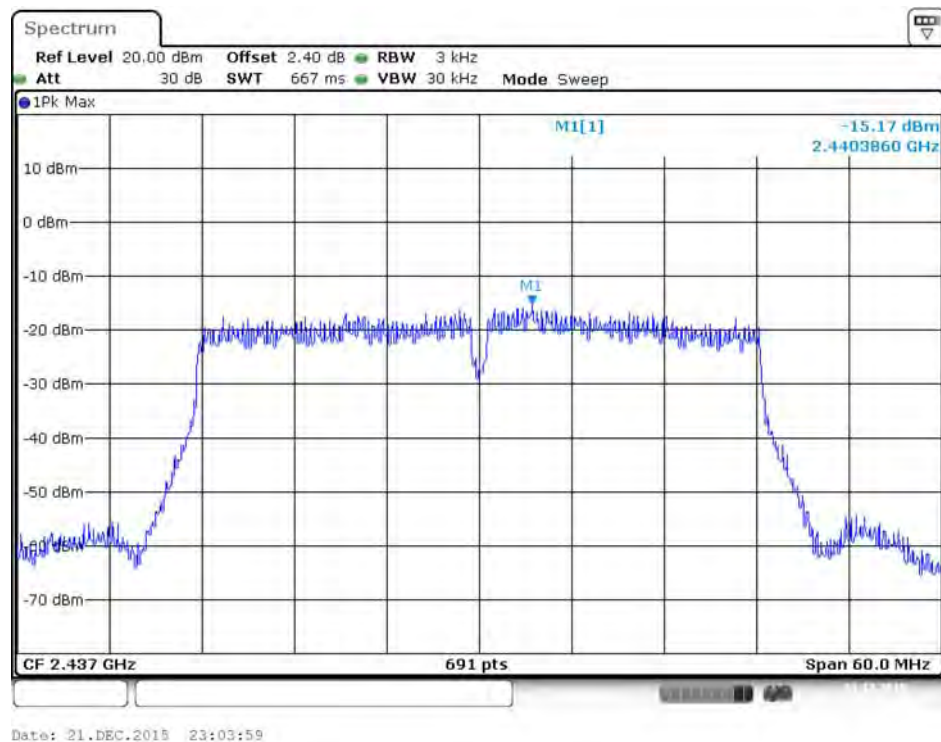


Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

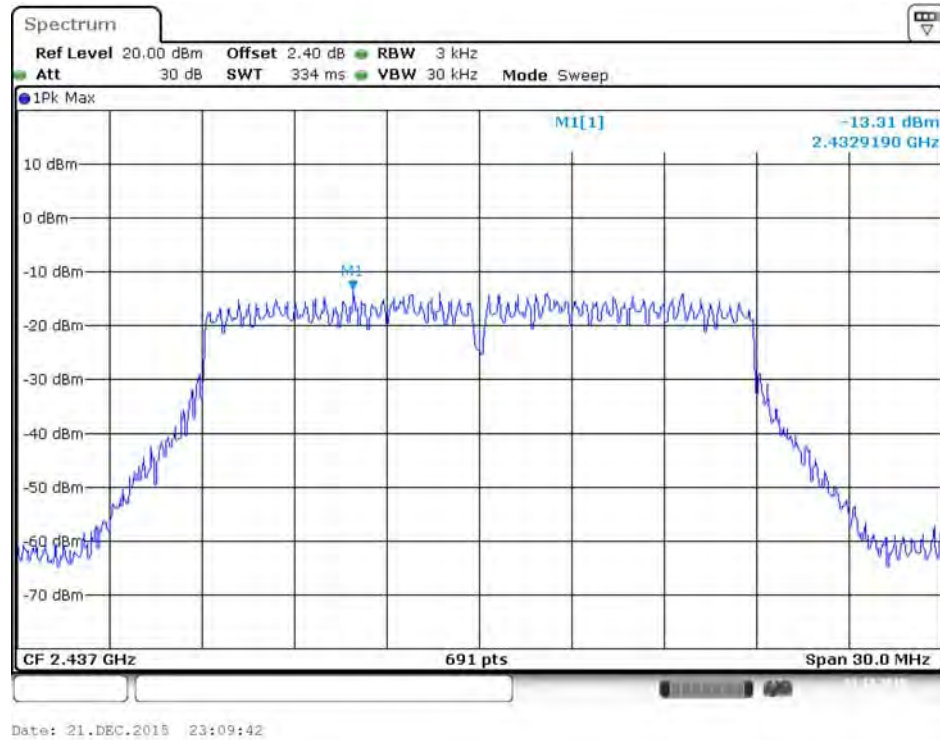


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

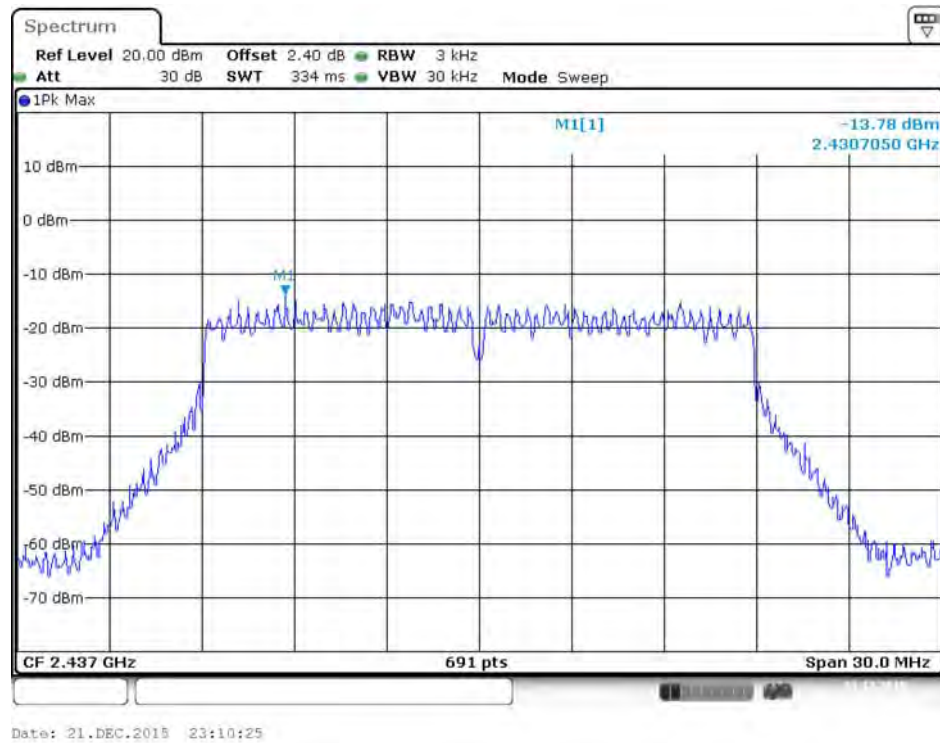


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

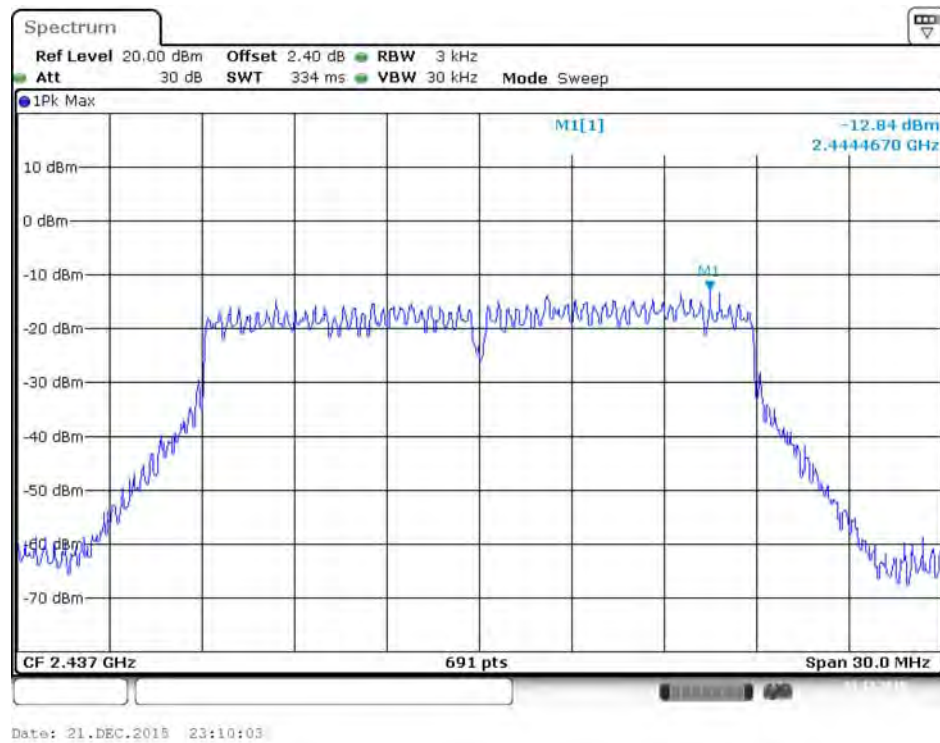

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

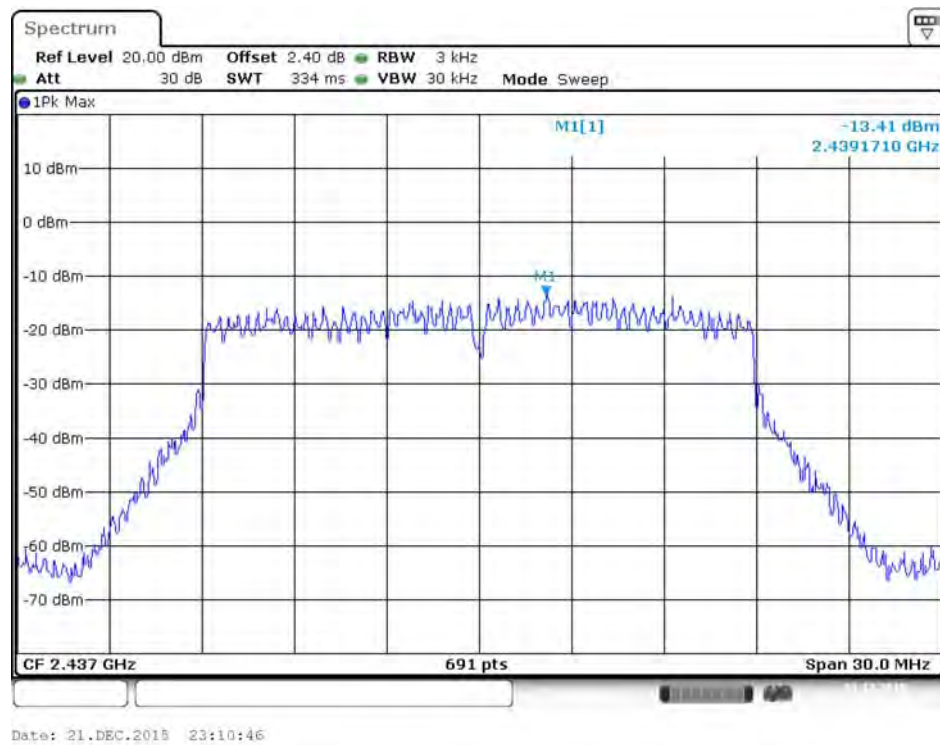


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

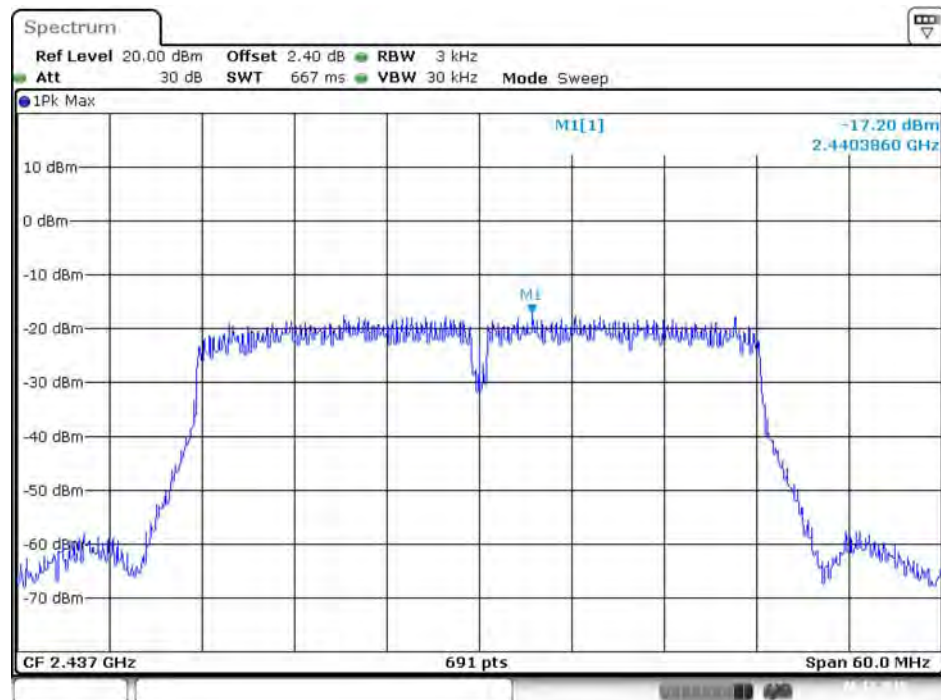


Date: 6, DEC. 2015 01:00:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

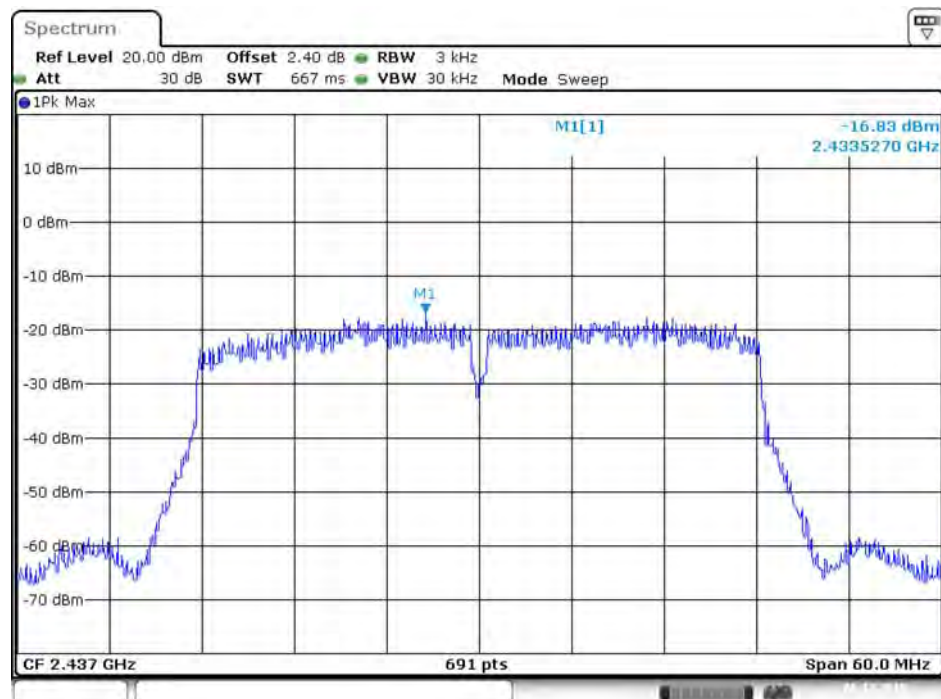


Date: 6, DEC. 2015 00:58:54

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

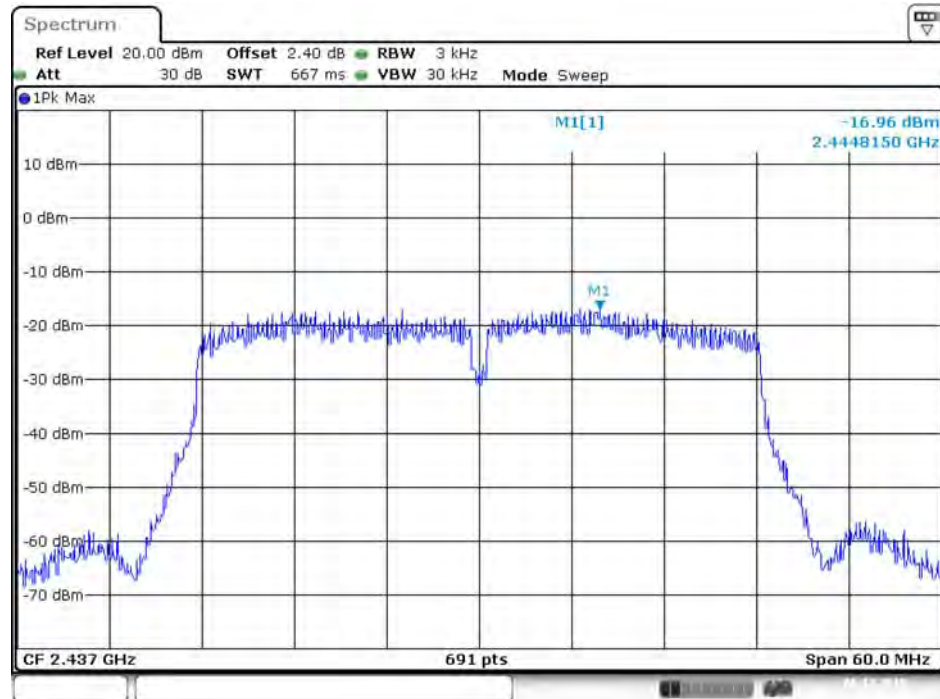

Date: 6 DEC. 2015 01:00:12


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

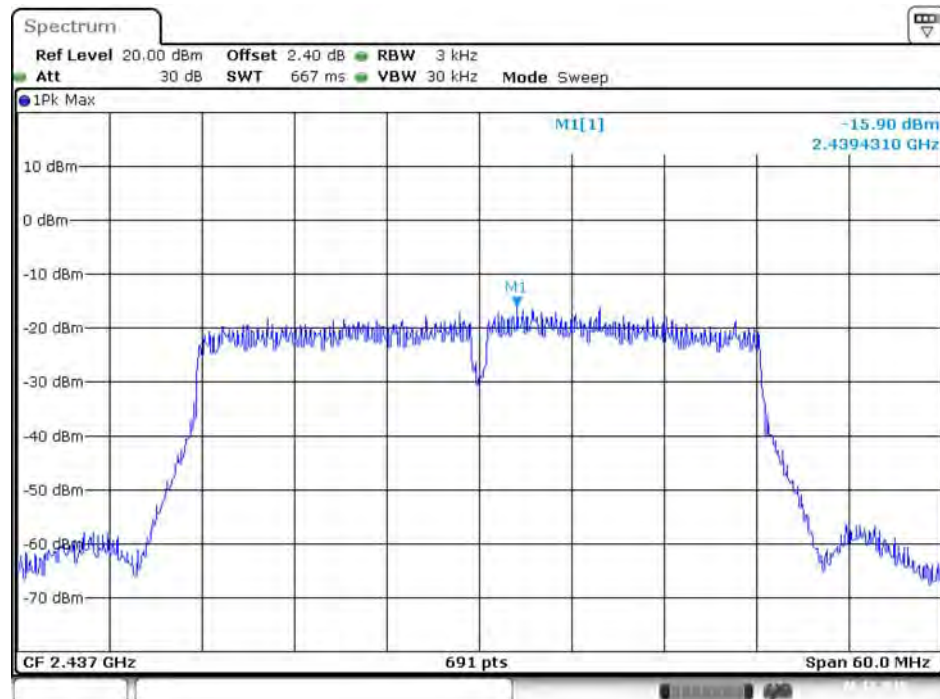


Date: 6 DEC. 2015 00:59:43

Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

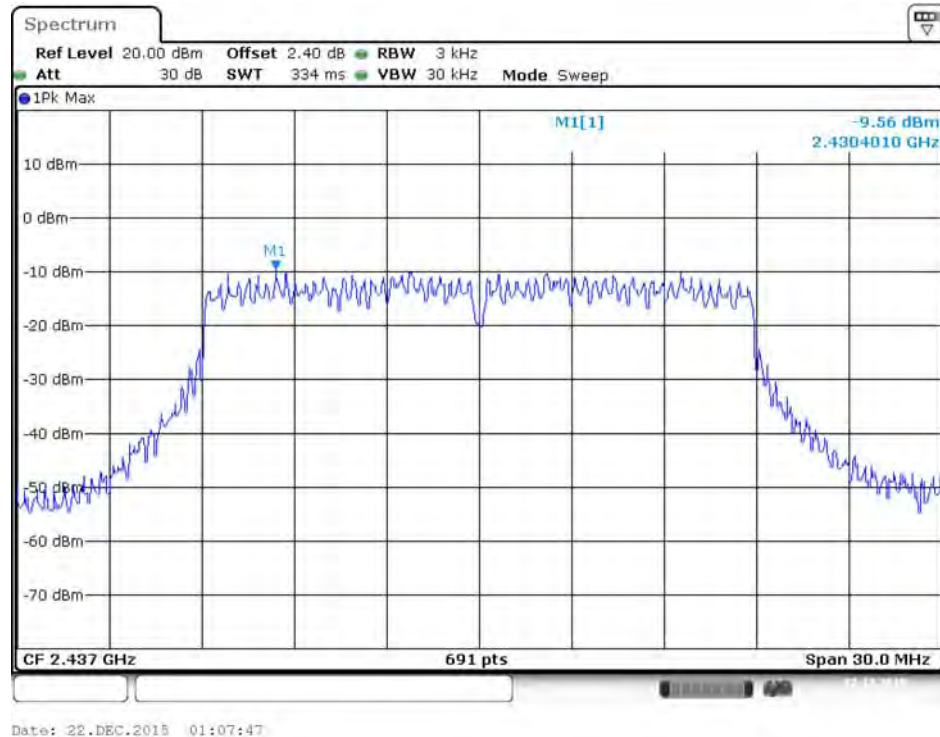


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

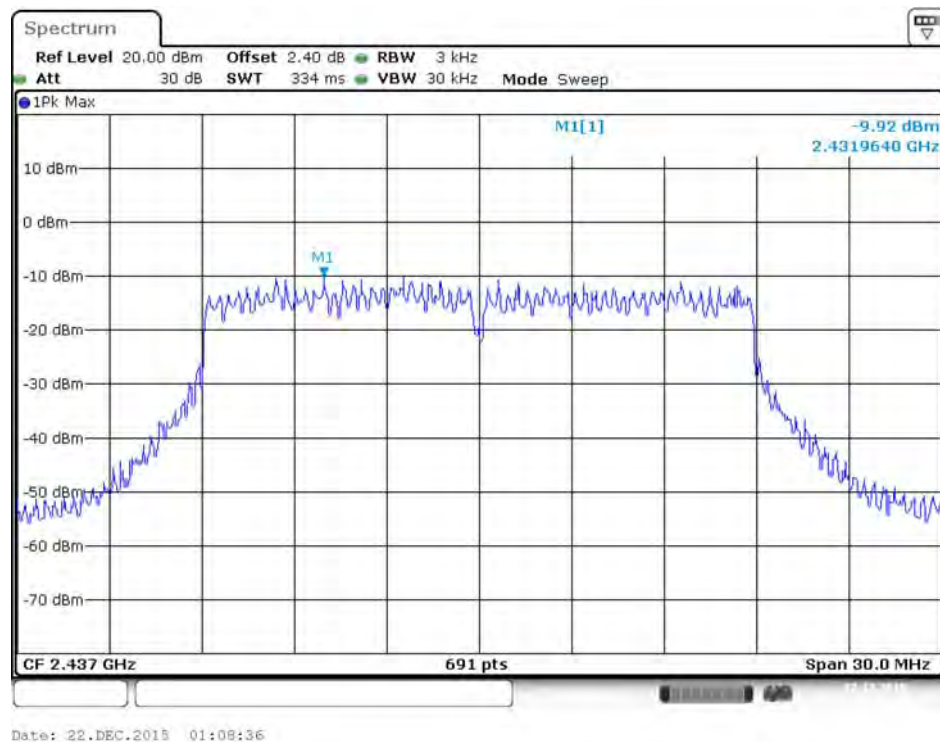


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

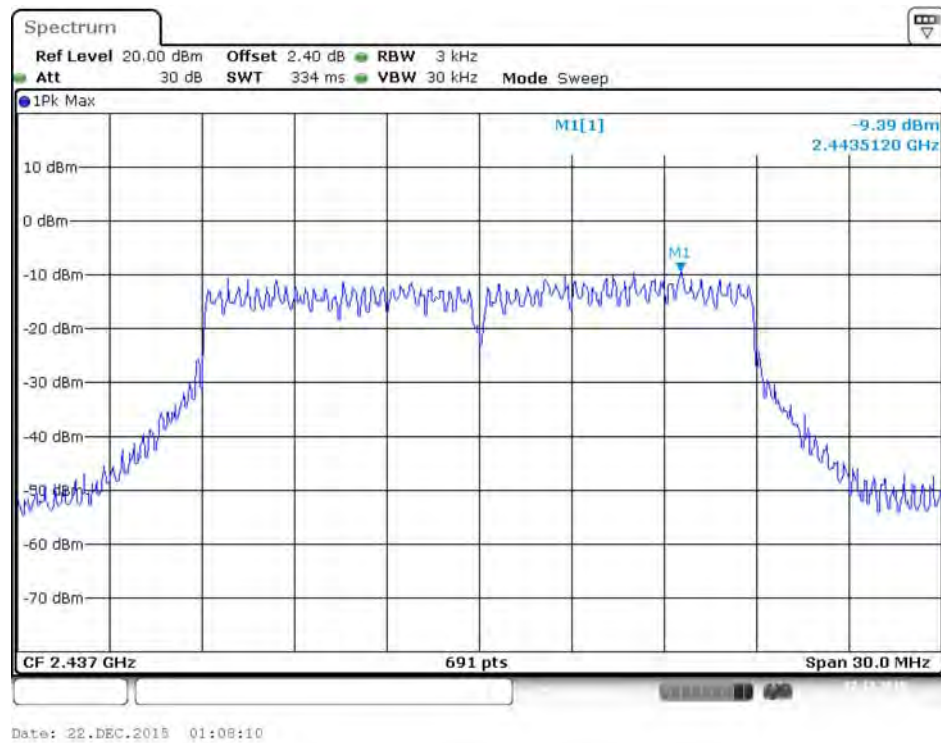

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

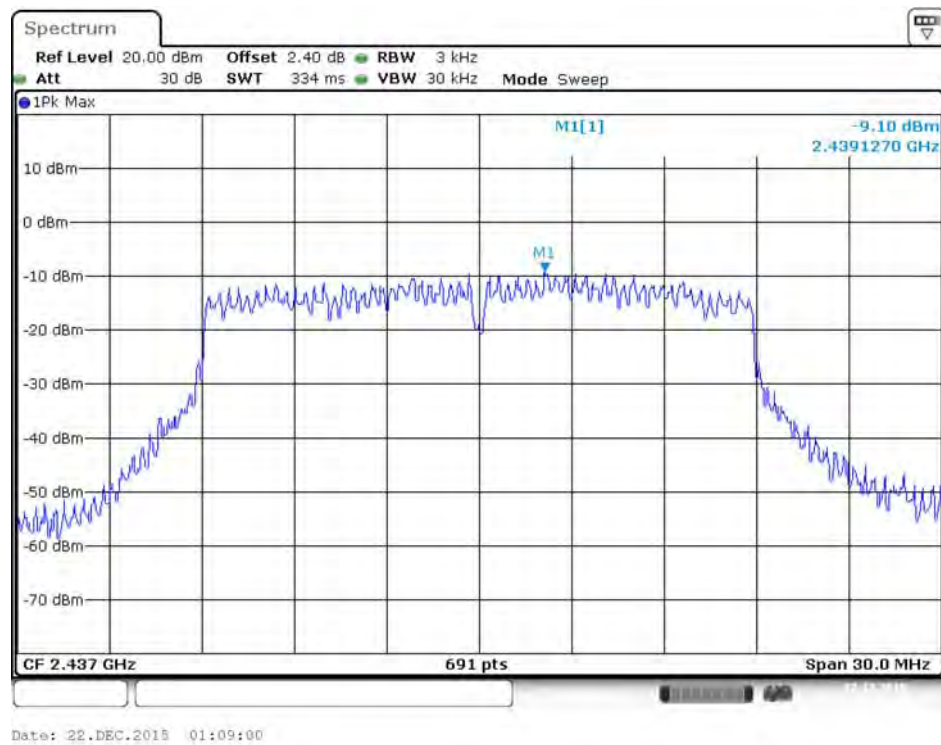


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

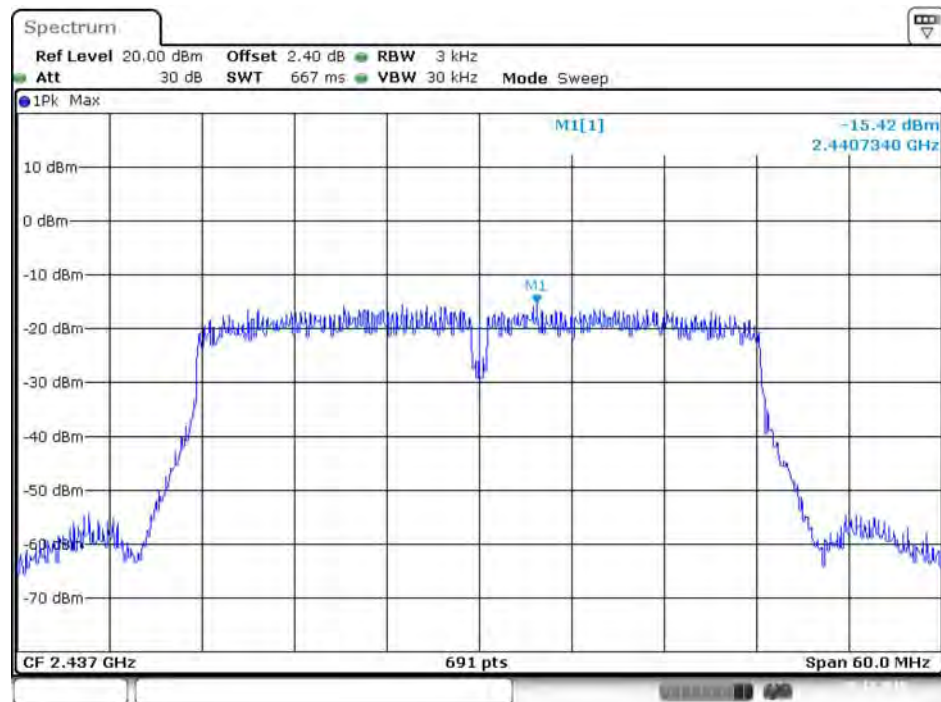


Date: 5 DEC.2015 21:21:49

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

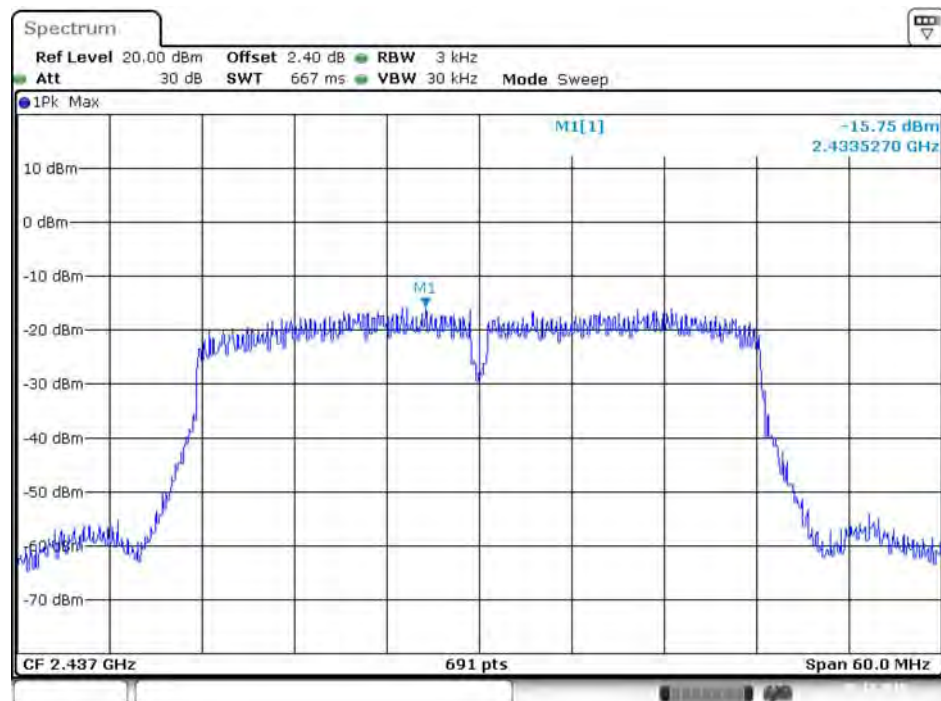


Date: 5 DEC.2015 21:23:11

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

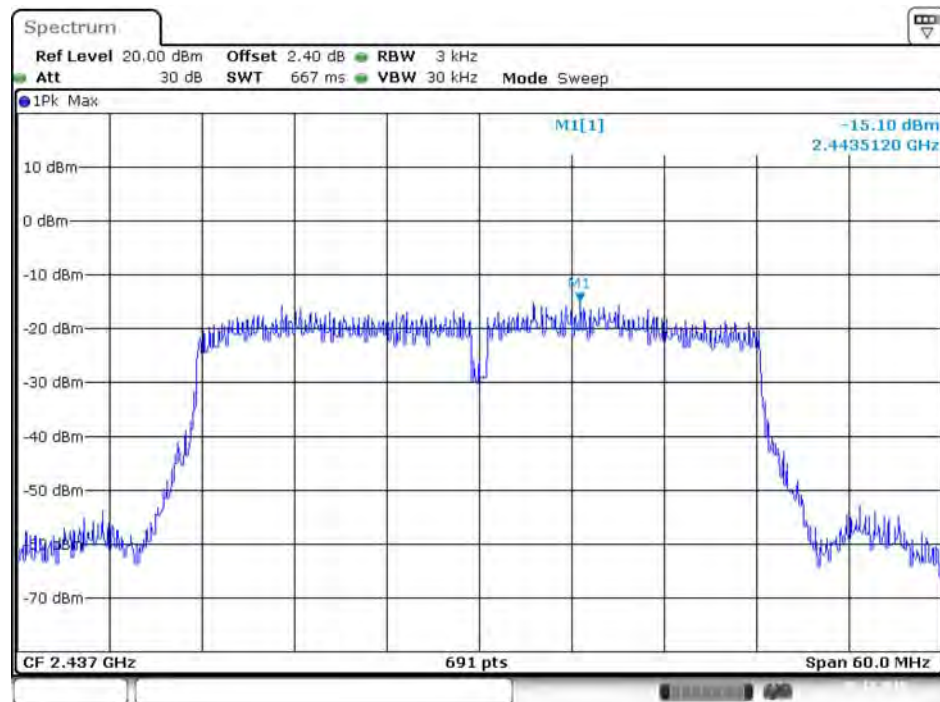

Date: 5 DEC.2015 21:22:26


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

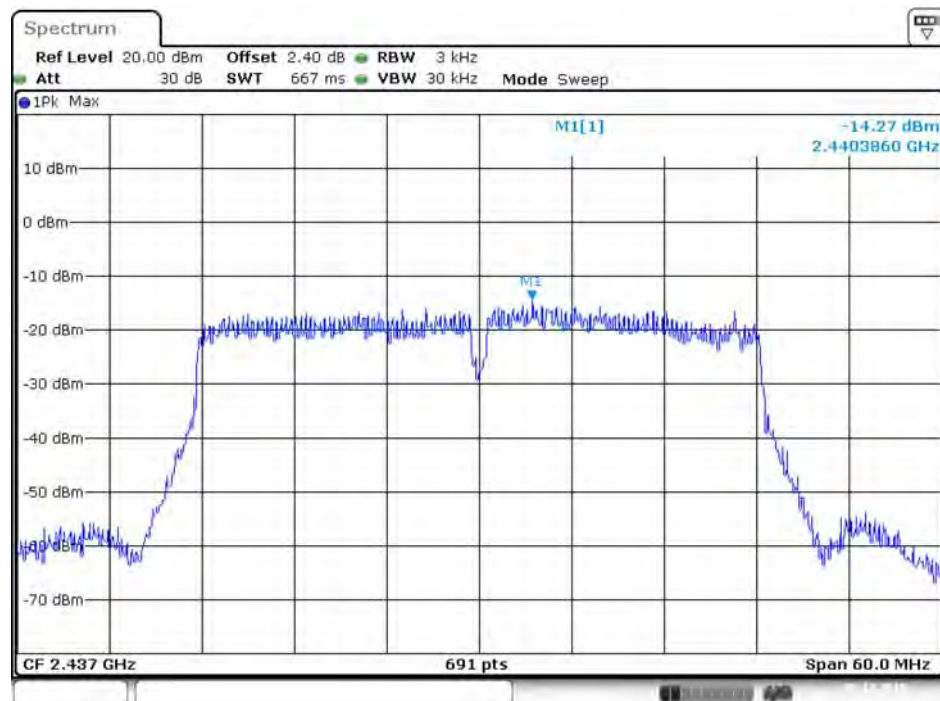


Date: 5 DEC.2015 21:23:57

Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

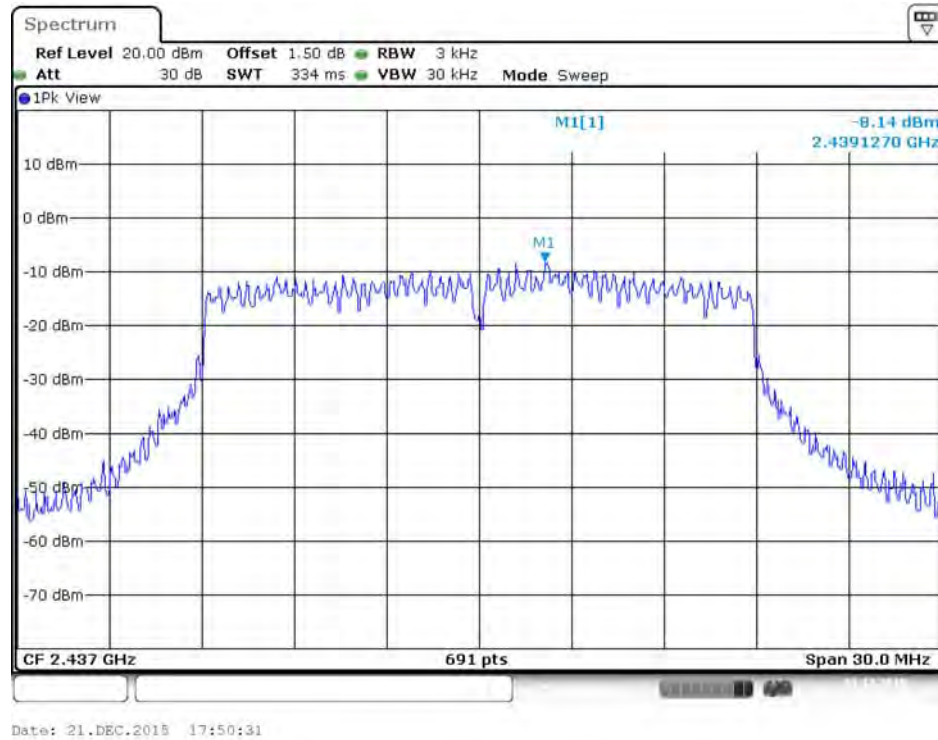


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

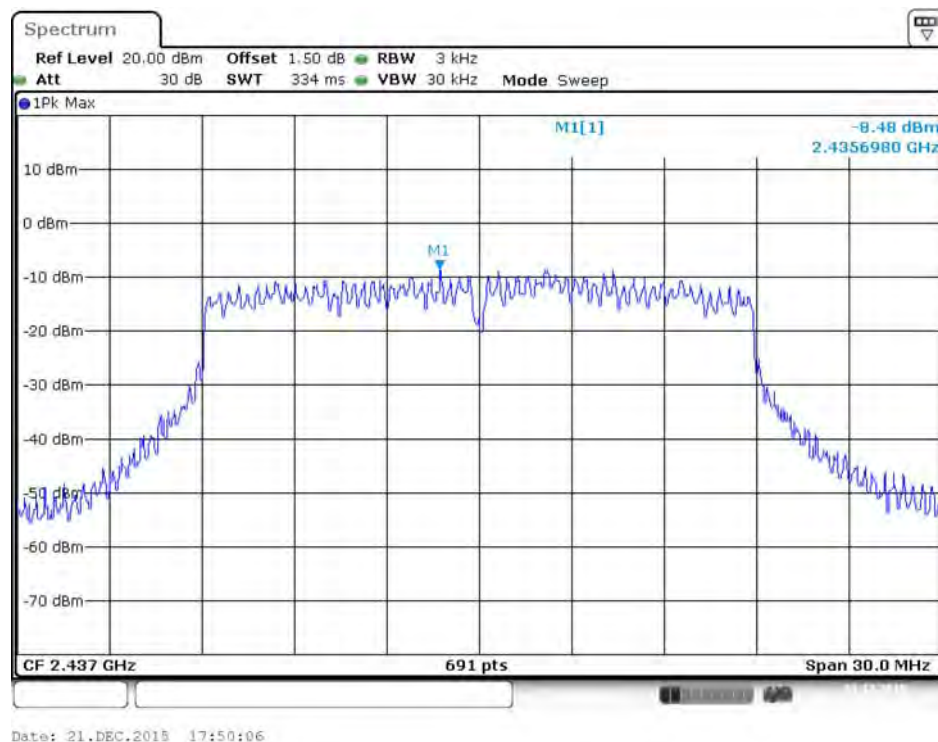


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

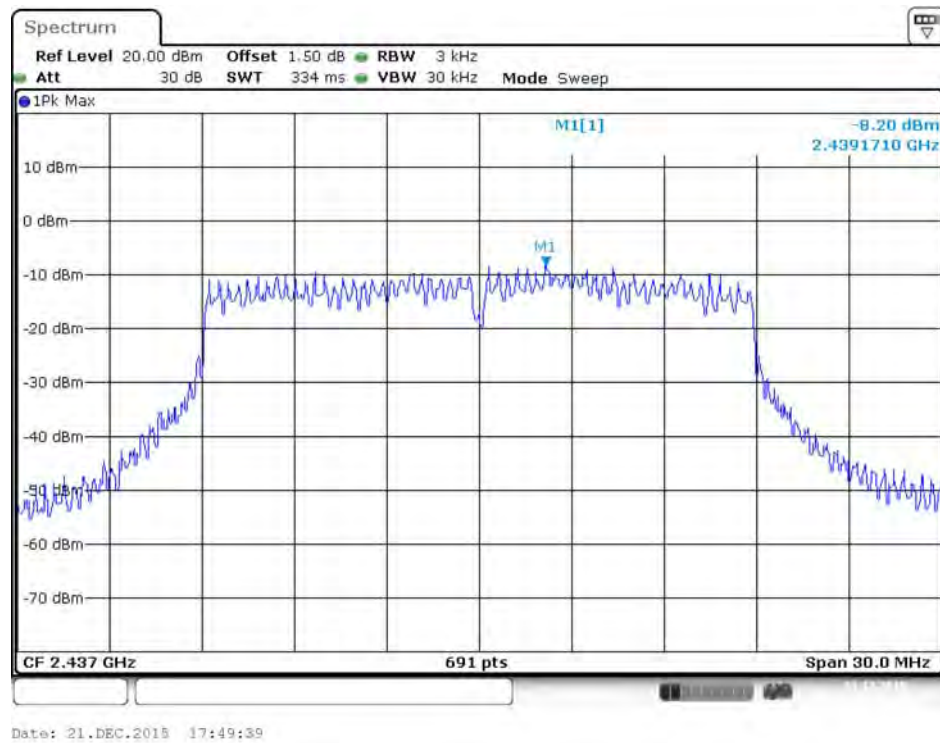


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

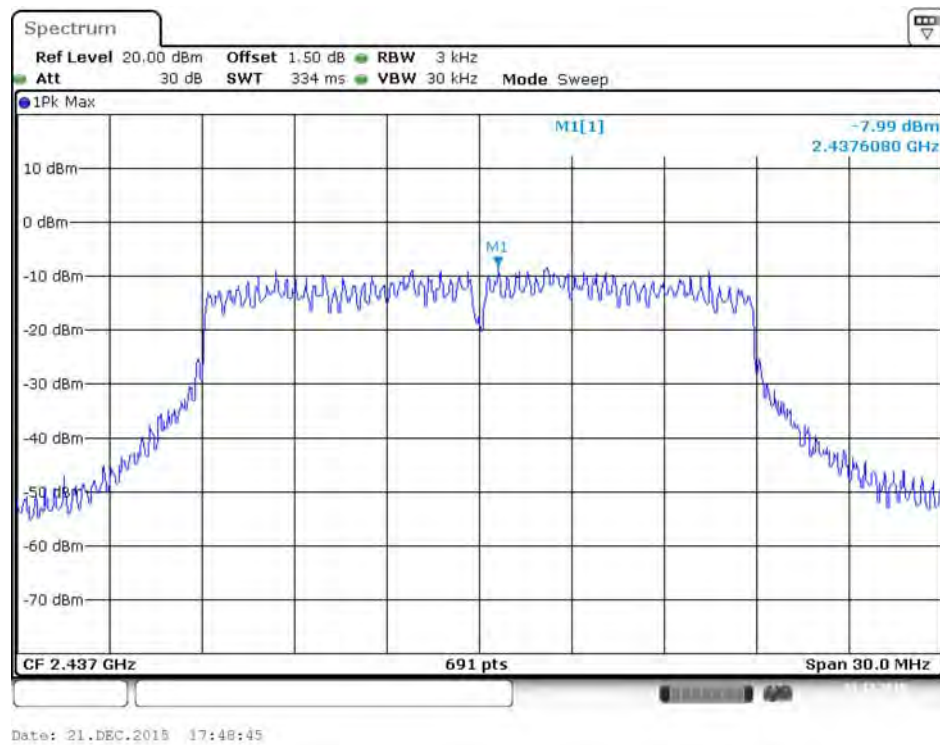


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

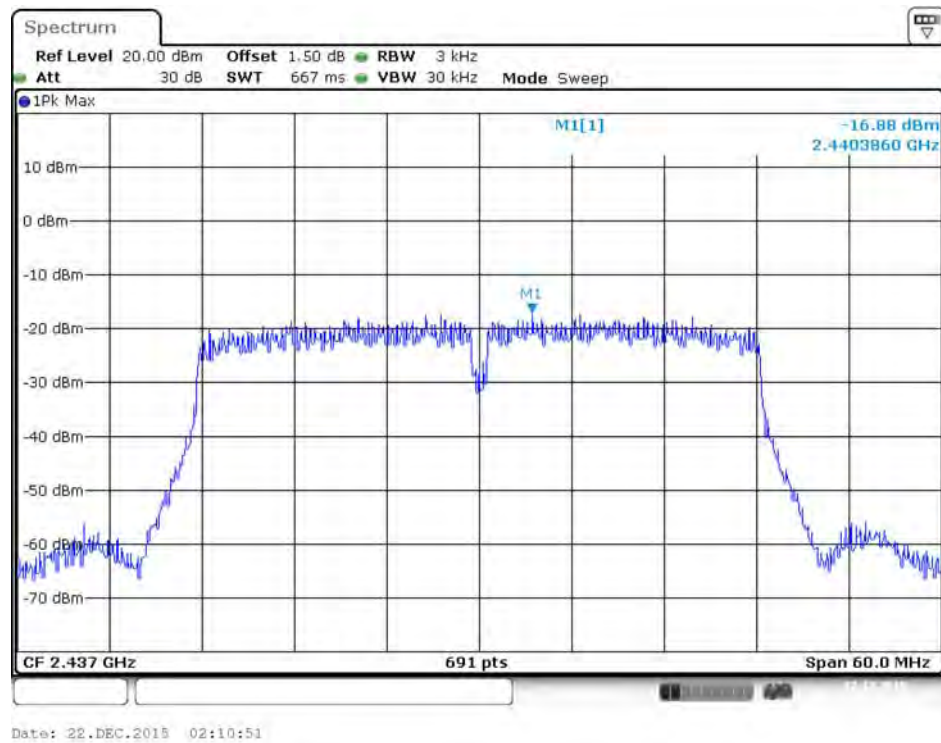


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

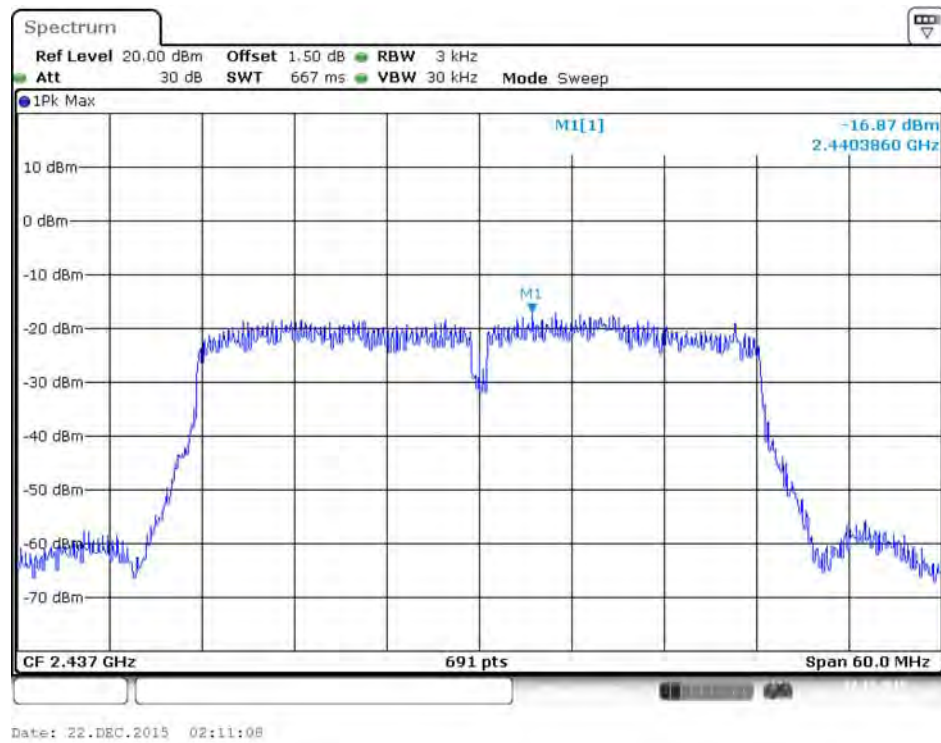

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

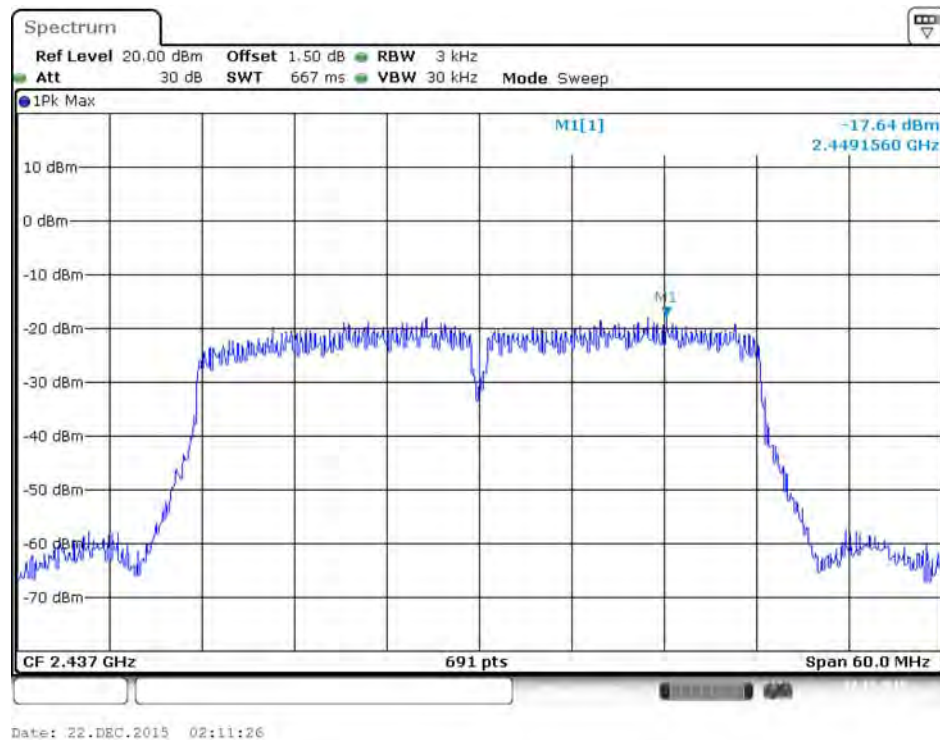

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

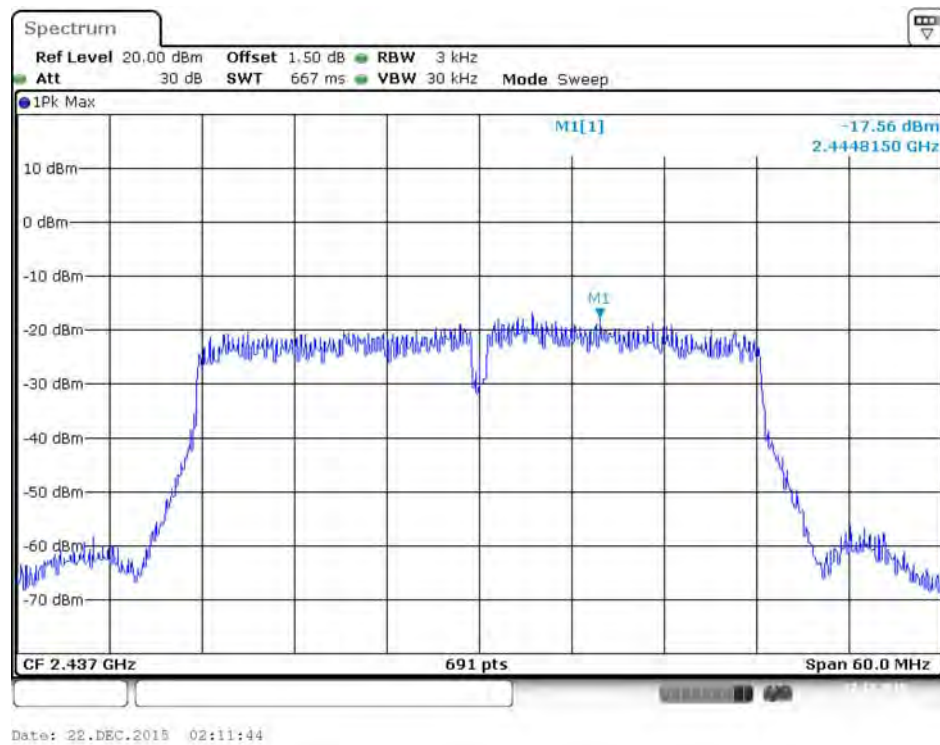

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.62	18.06	500	Complies
	2462 MHz	15.07	17.89	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	27.59	36.90	500	Complies
	2437 MHz	36.41	37.05	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.62	18.06	500	Complies
	2462 MHz	17.57	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	34.20	37.19	500	Complies
	2437 MHz	36.06	37.19	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.68	17.97	500	Complies
	2437 MHz	17.62	17.97	500	Complies
	2462 MHz	17.28	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	34.44	37.05	500	Complies
	2437 MHz	36.41	37.05	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.62	18.06	500	Complies
	2462 MHz	17.57	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	34.67	37.19	500	Complies
	2437 MHz	36.41	37.05	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.62	18.06	500	Complies
	2462 MHz	17.57	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	35.36	37.19	500	Complies
	2437 MHz	36.06	37.19	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.28	17.97	500	Complies
	2437 MHz	17.39	17.97	500	Complies
	2462 MHz	17.33	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	34.20	36.90	500	Complies
	2437 MHz	36.41	37.05	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.62	18.06	500	Complies
	2462 MHz	17.57	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	34.20	37.19	500	Complies
	2437 MHz	36.06	37.19	500	Complies
	2452 MHz	36.41	37.05	500	Complies

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	16.52	17.97	500	Complies
	2437 MHz	16.23	21.10	500	Complies
	2462 MHz	17.28	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	36.41	36.90	500	Complies
	2437 MHz	36.29	36.90	500	Complies
	2452 MHz	36.41	36.90	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

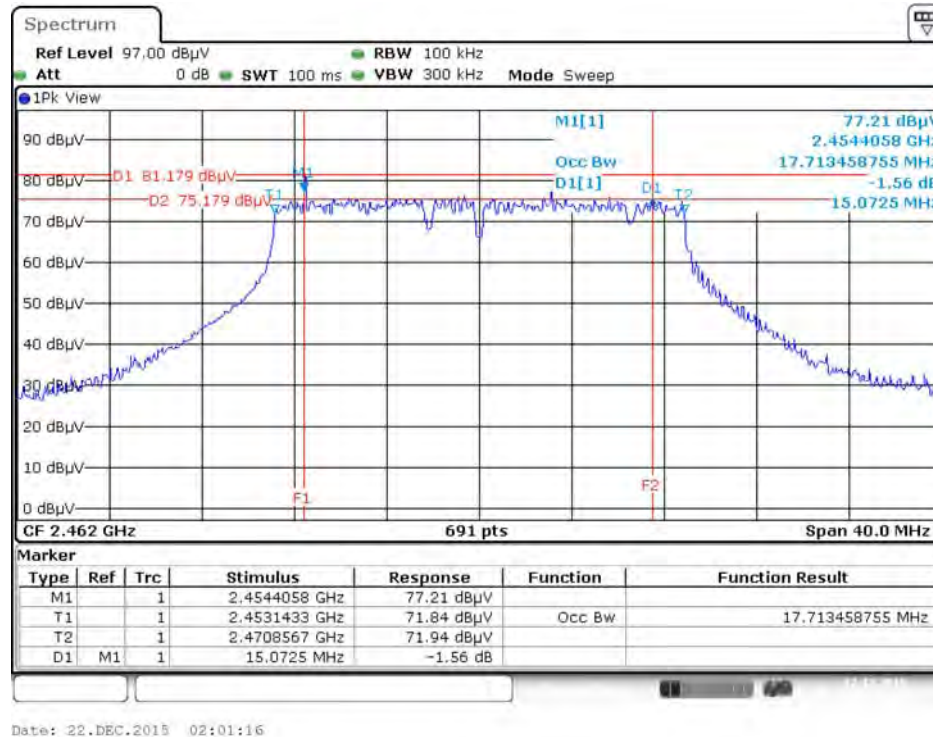


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4

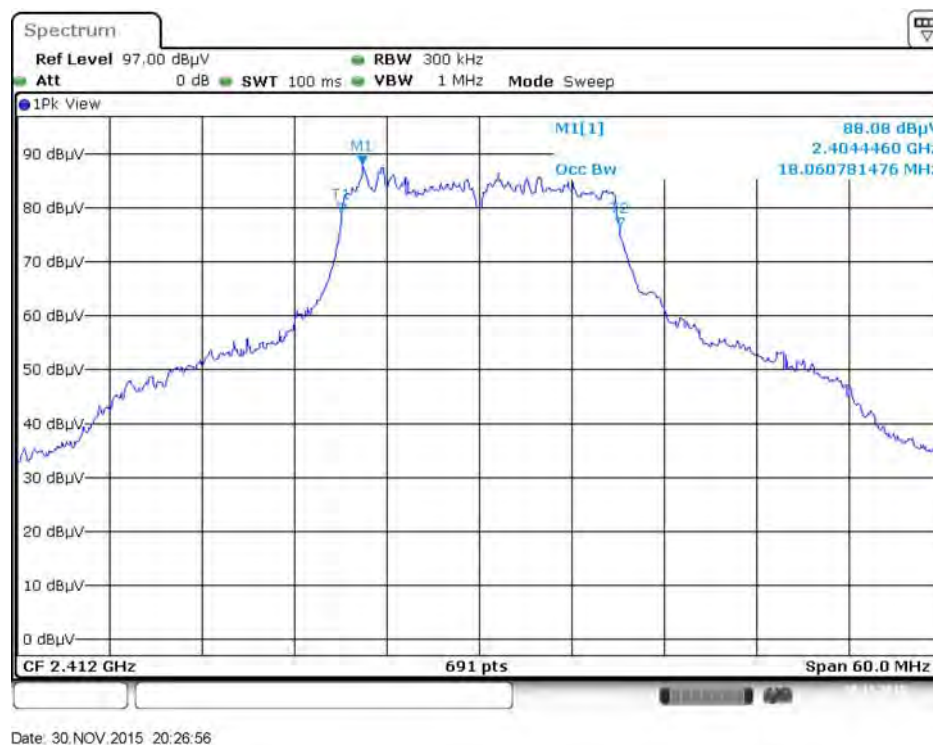

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

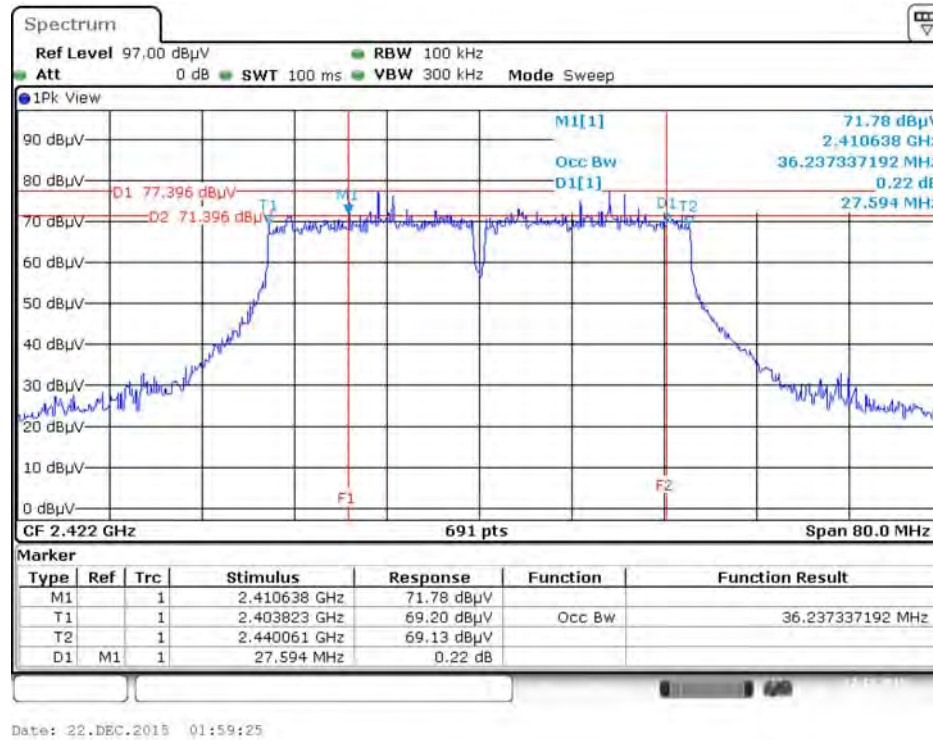


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

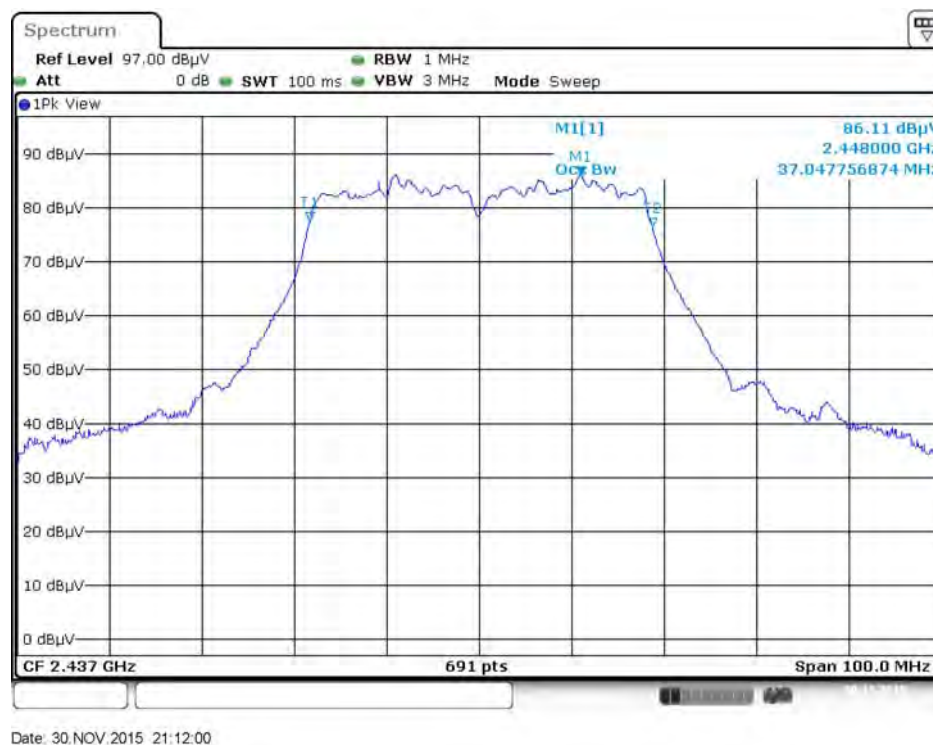

Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

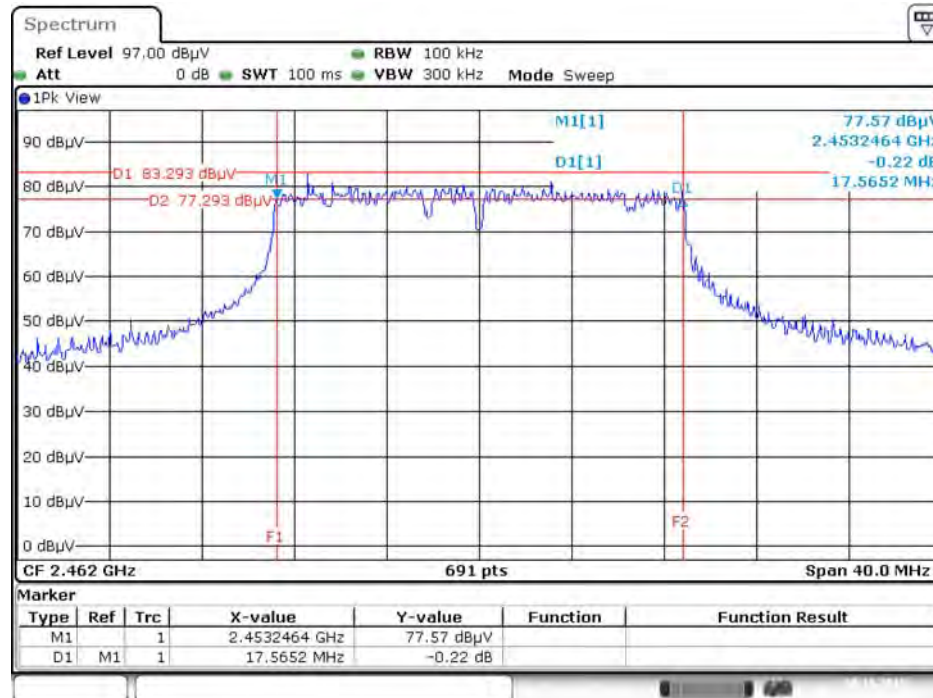


Date: 30.NOV.2015 19:38:24

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 20:26:56

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

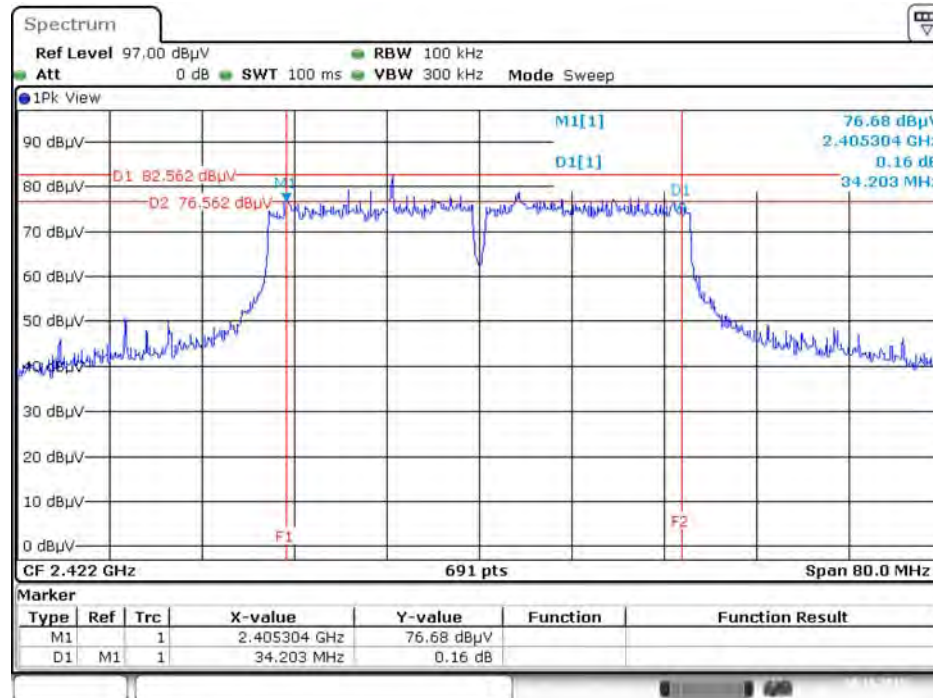


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

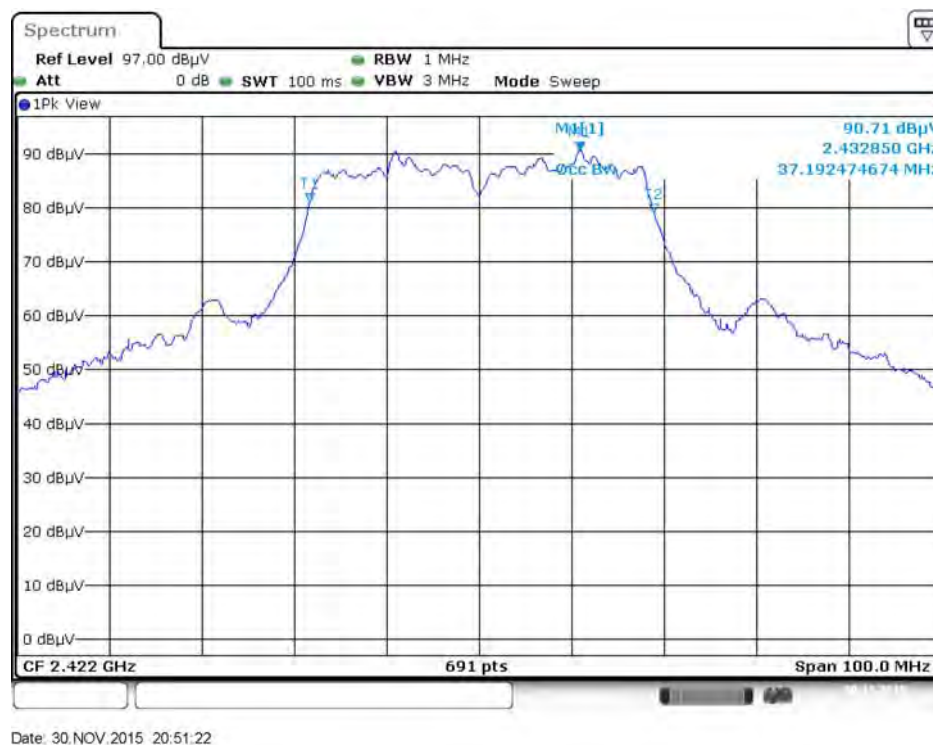

Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

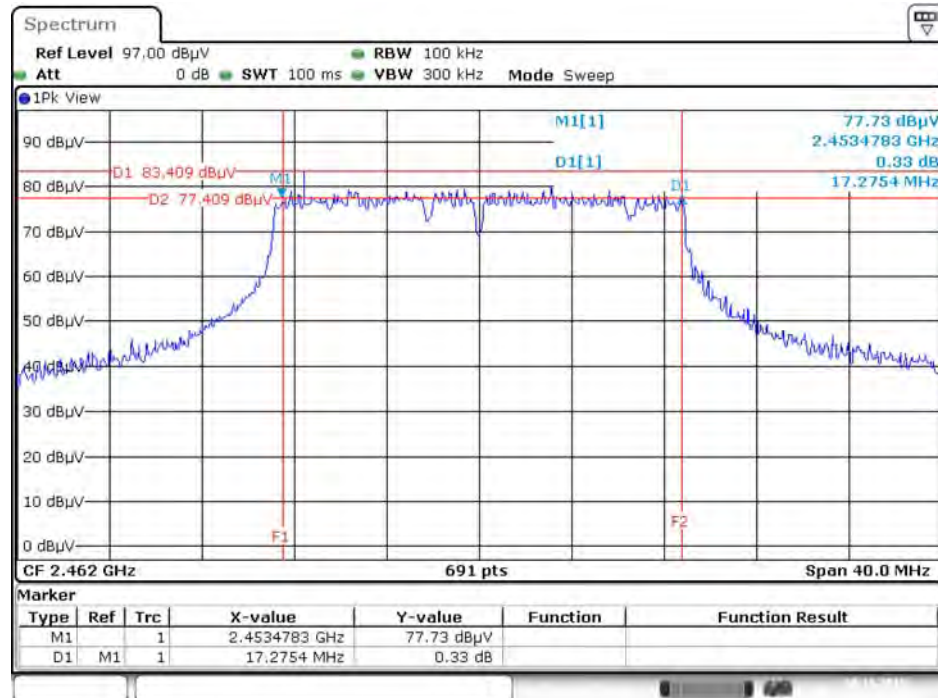


Date: 30.NOV.2015 19:42:25

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 20:30:57

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

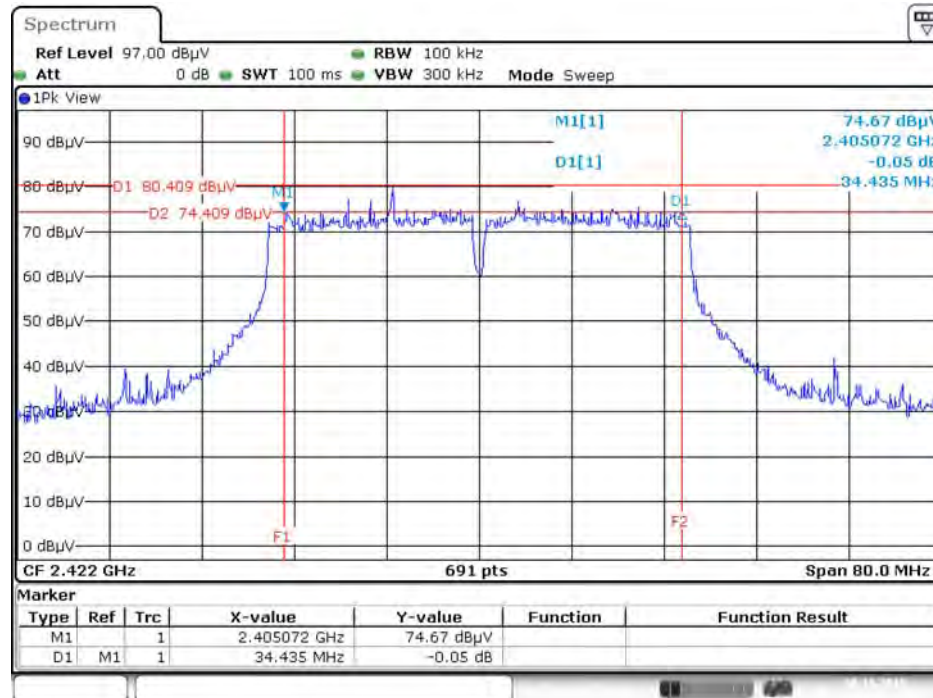

Date: 30.NOV.2015 19:57:20


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

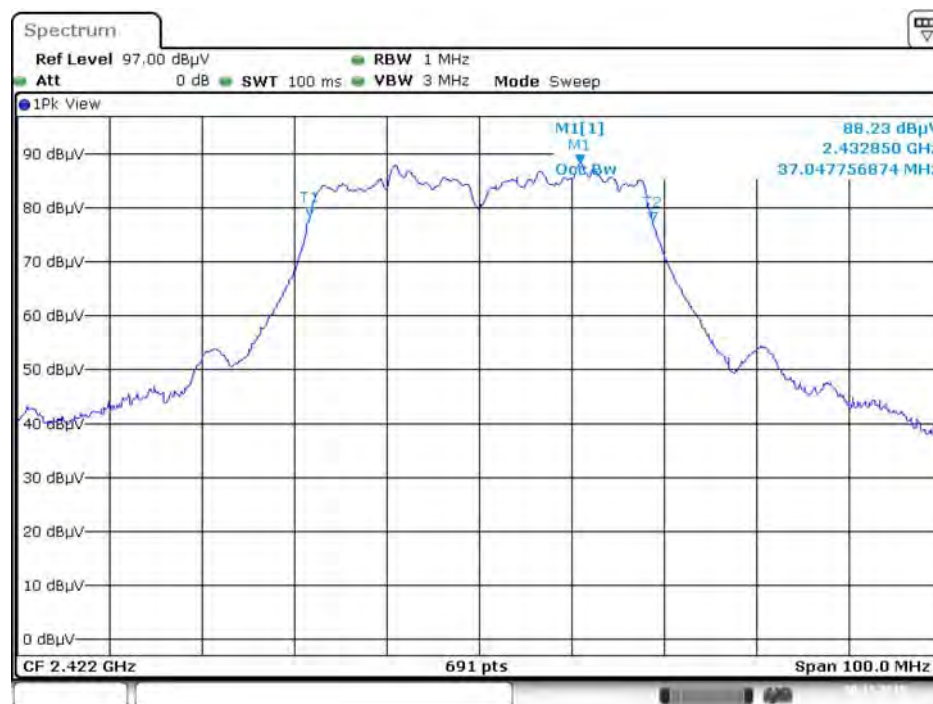

Date: 30.NOV.2015 20:56:27

Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

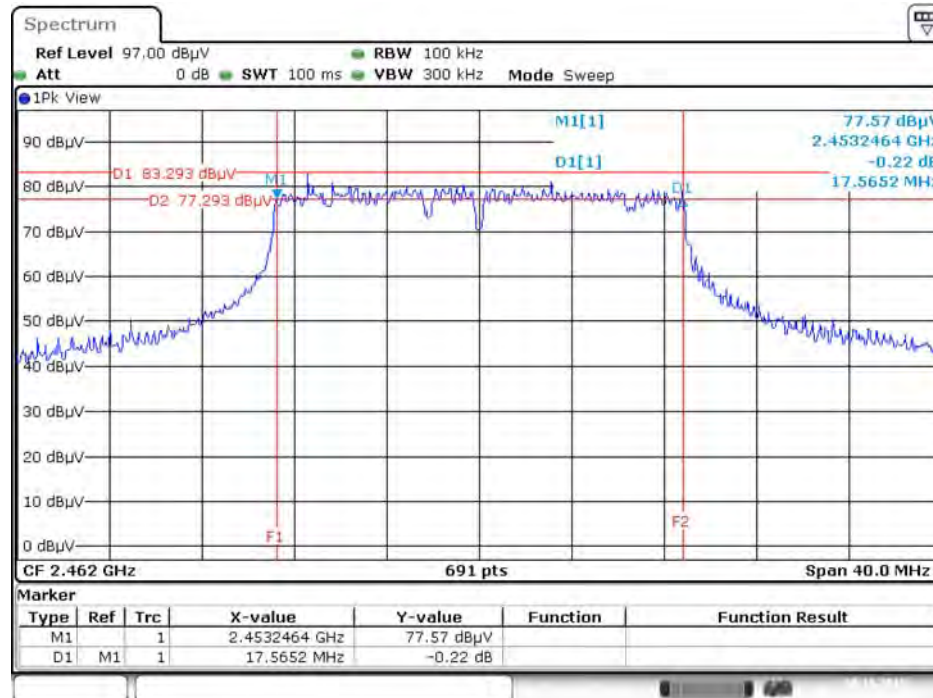


Date: 30.NOV.2015 19:38:24

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 20:26:56

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

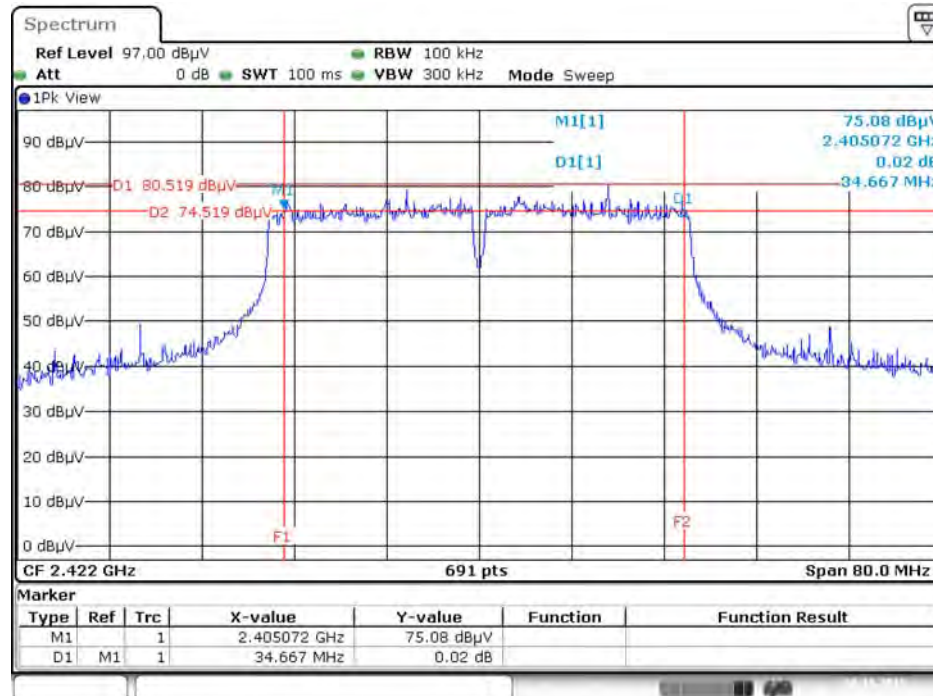

Date: 30.NOV.2015 19:55:54


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 20:54:30

Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

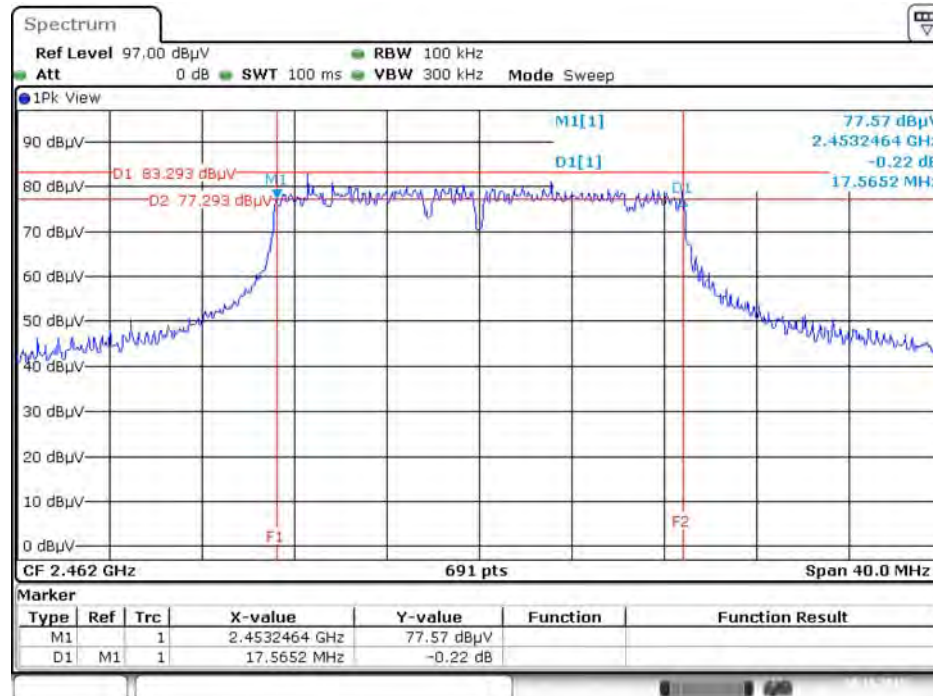


Date: 30.NOV.2015 19:38:24

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 20:34:47

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

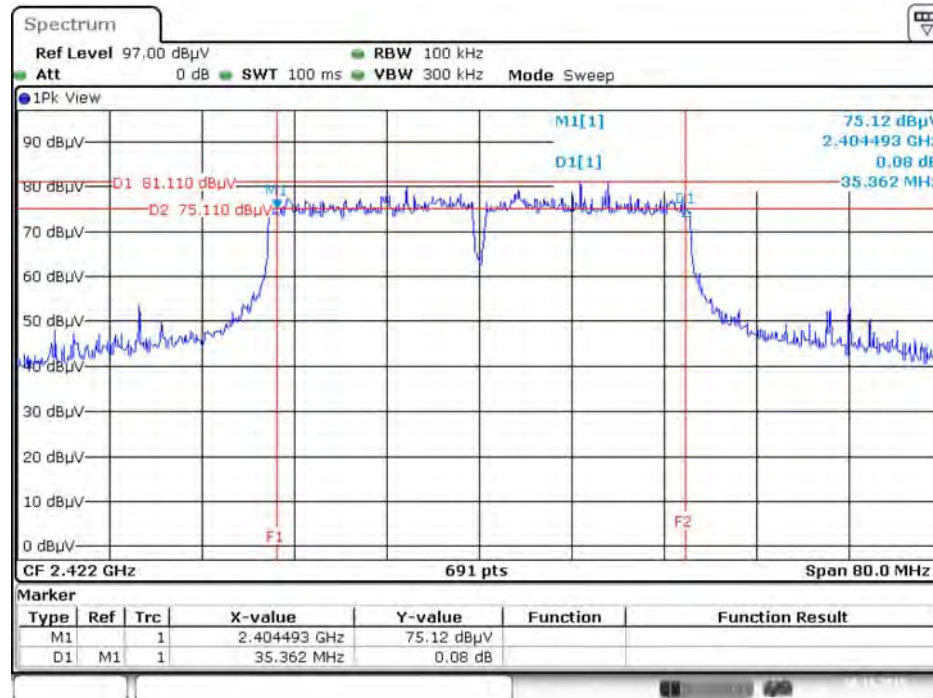


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

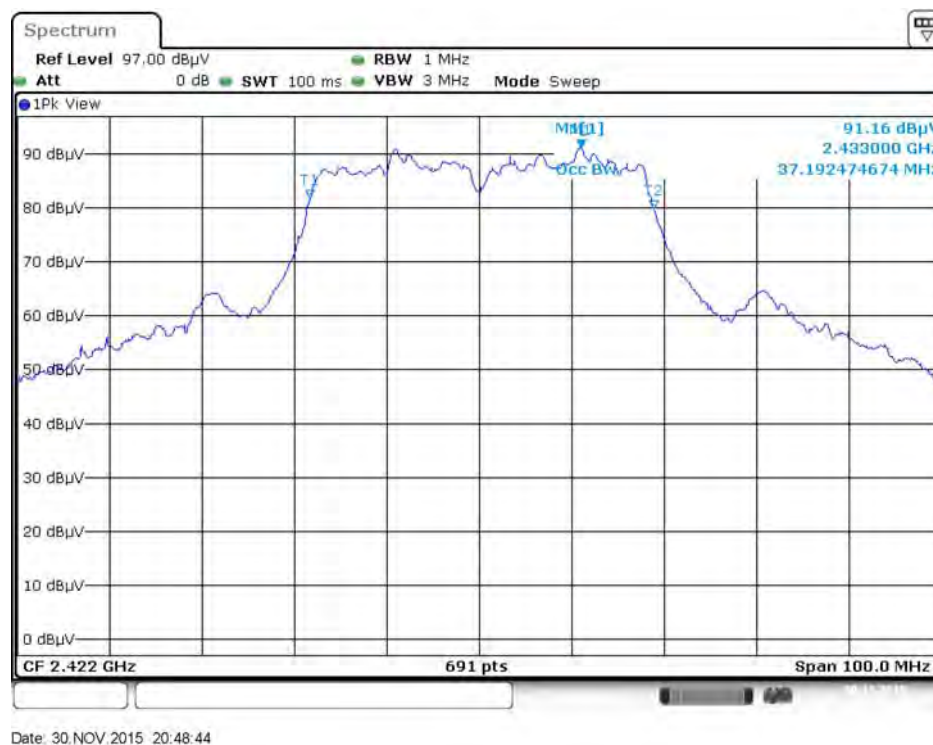


Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

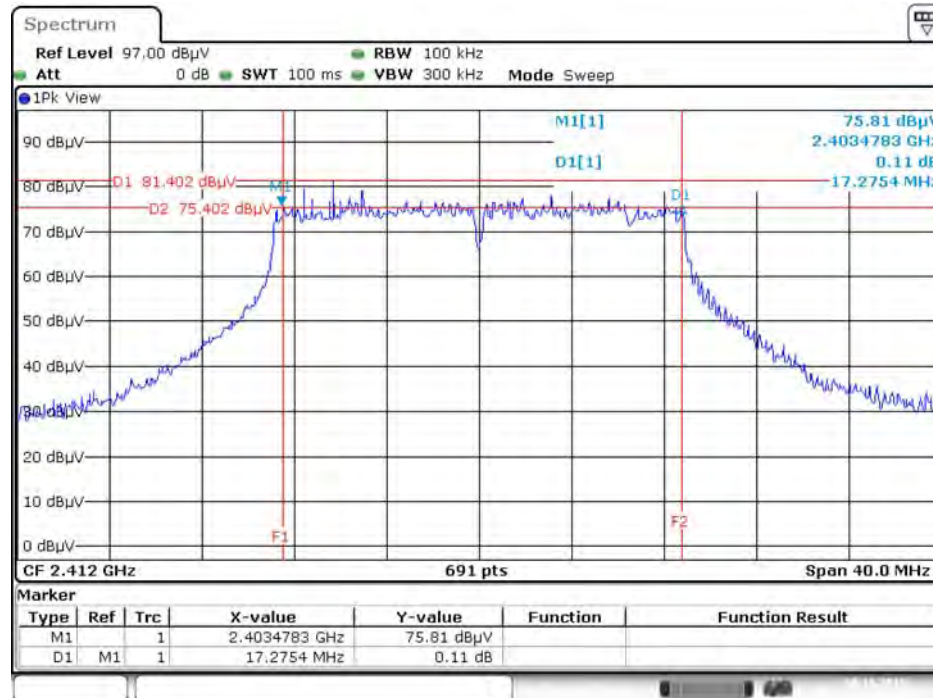


Date: 30.NOV.2015 19:27:01

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4

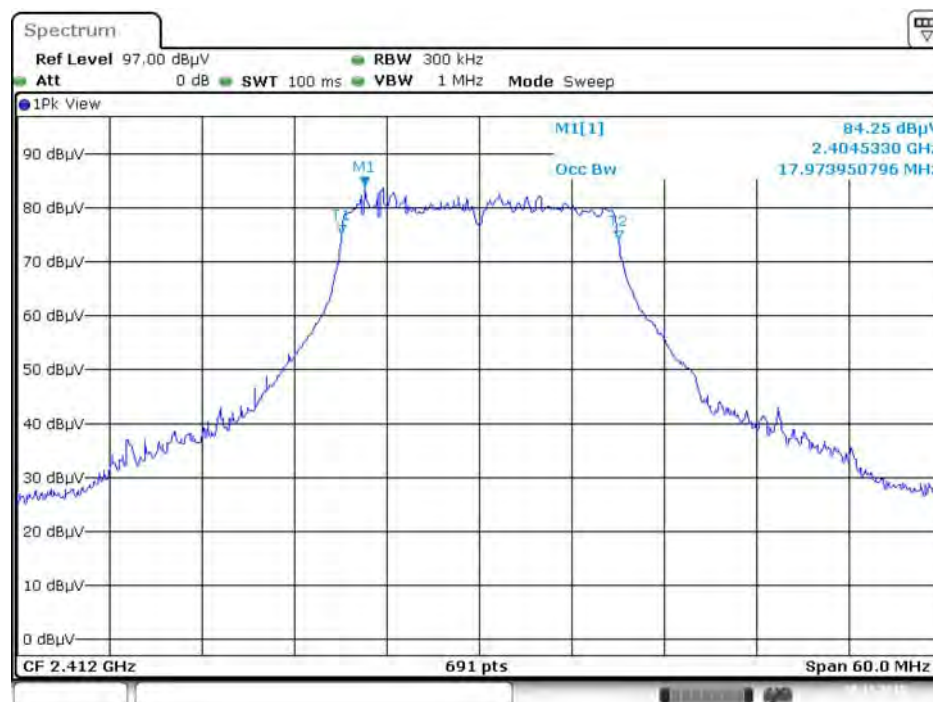


Date: 30.NOV.2015 20:32:31

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

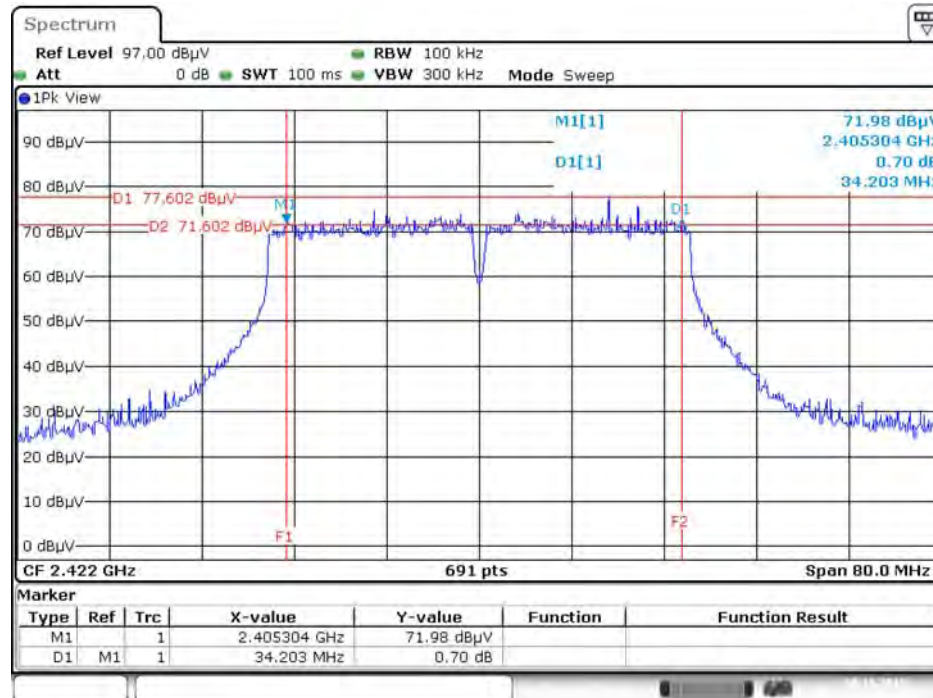

Date: 30.NOV.2015 19:59:11


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

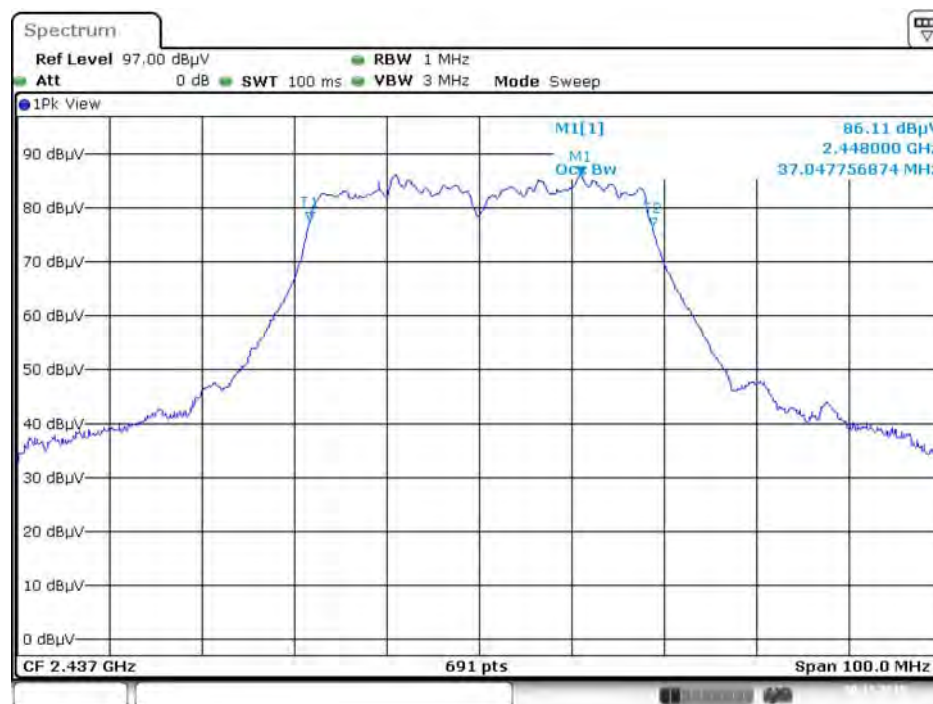

Date: 30.NOV.2015 21:12:00

Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2
+ Chain 3 + Chain 4

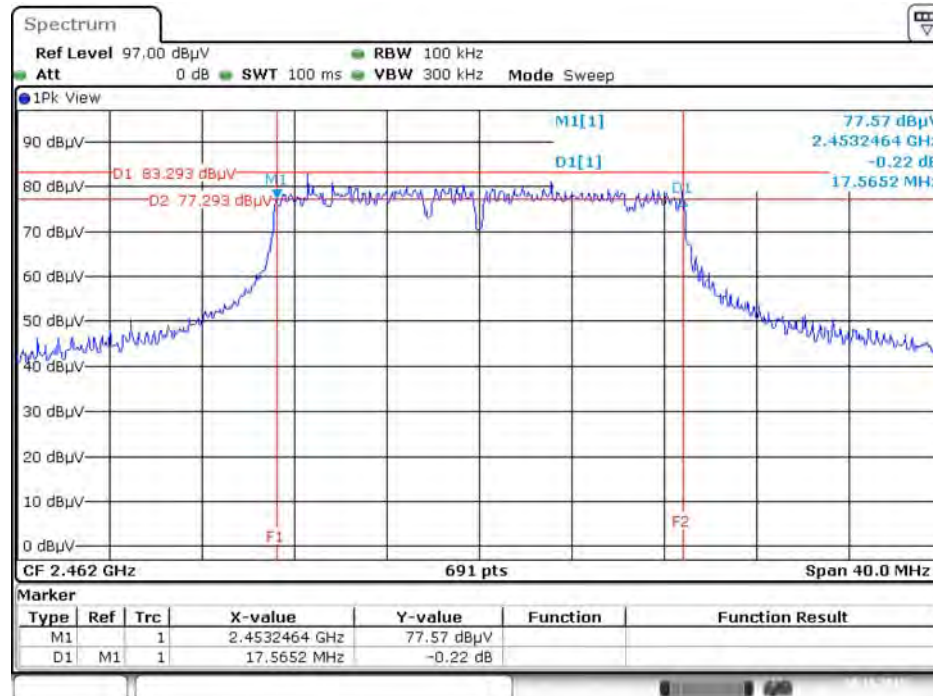


Date: 30.NOV.2015 19:38:24

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1
+ Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 20:26:56

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

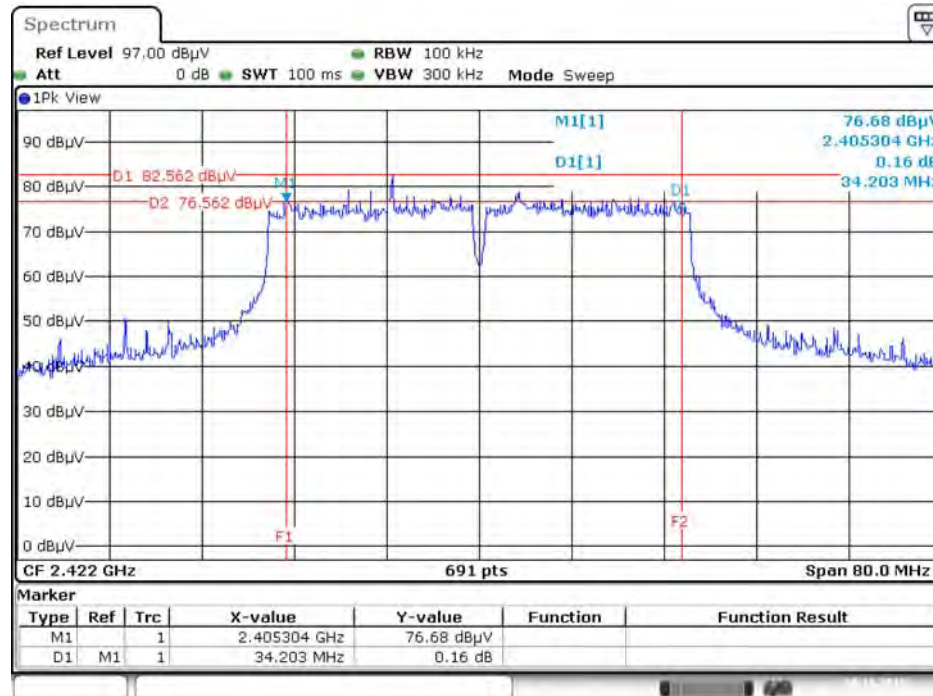


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

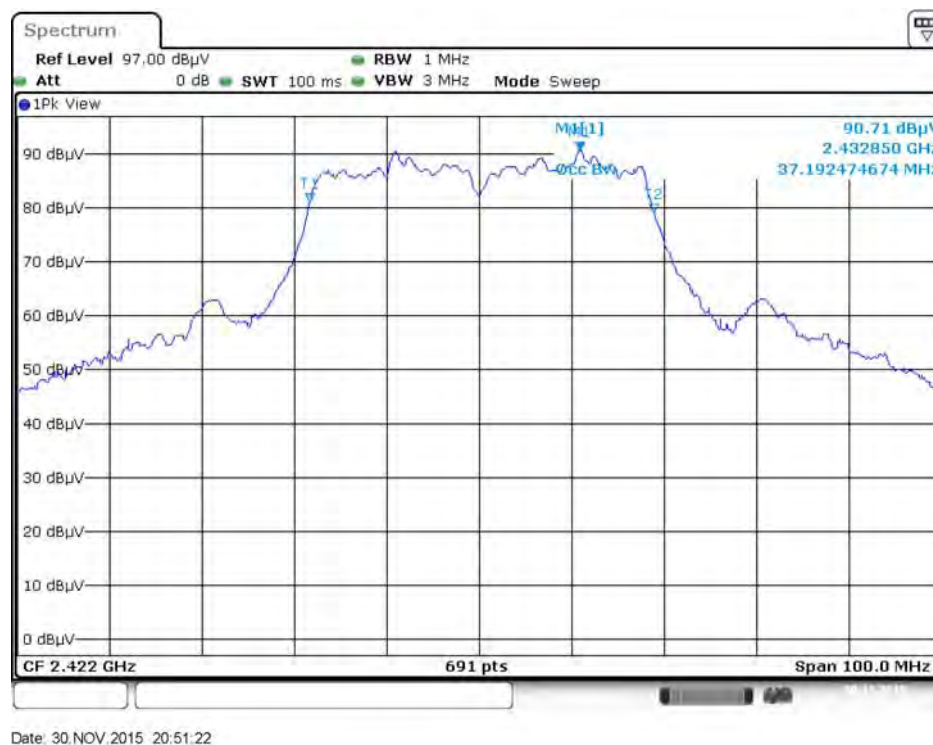


Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

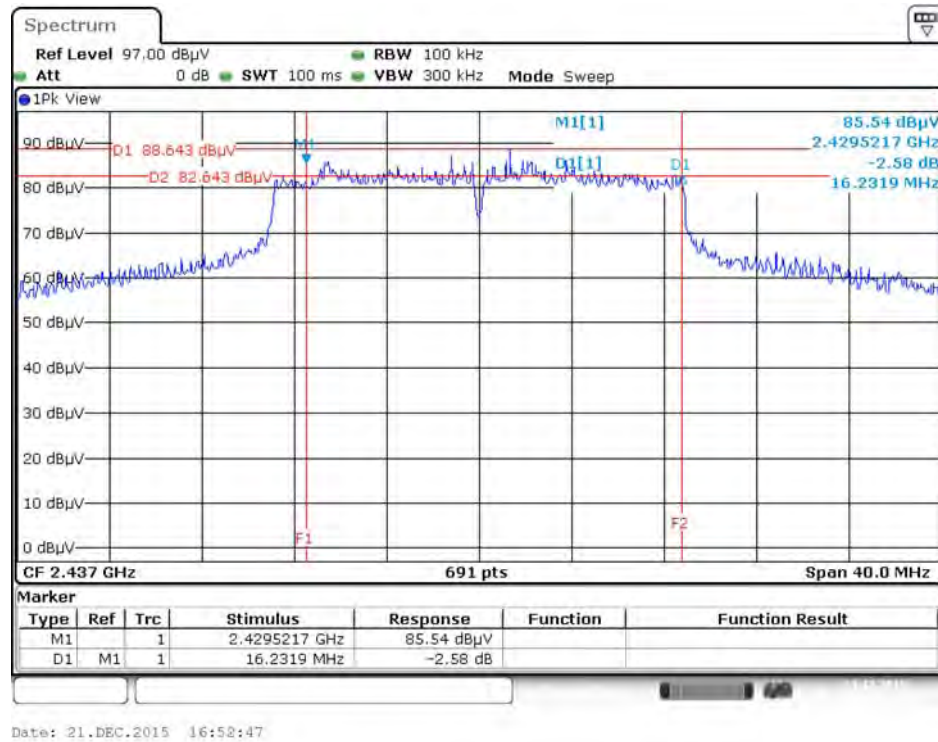


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

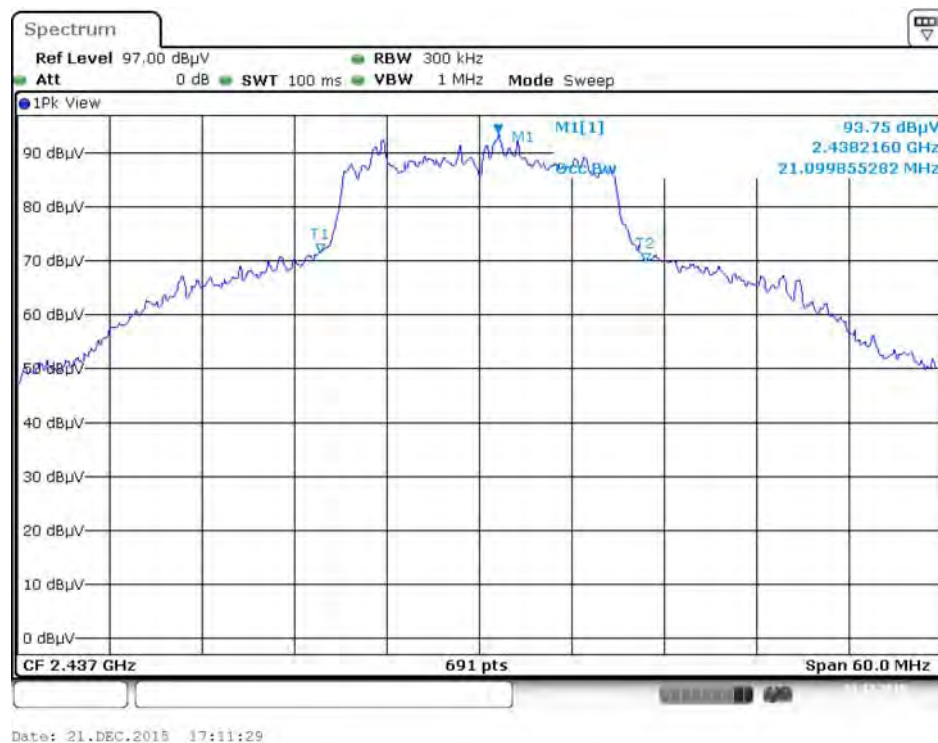

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

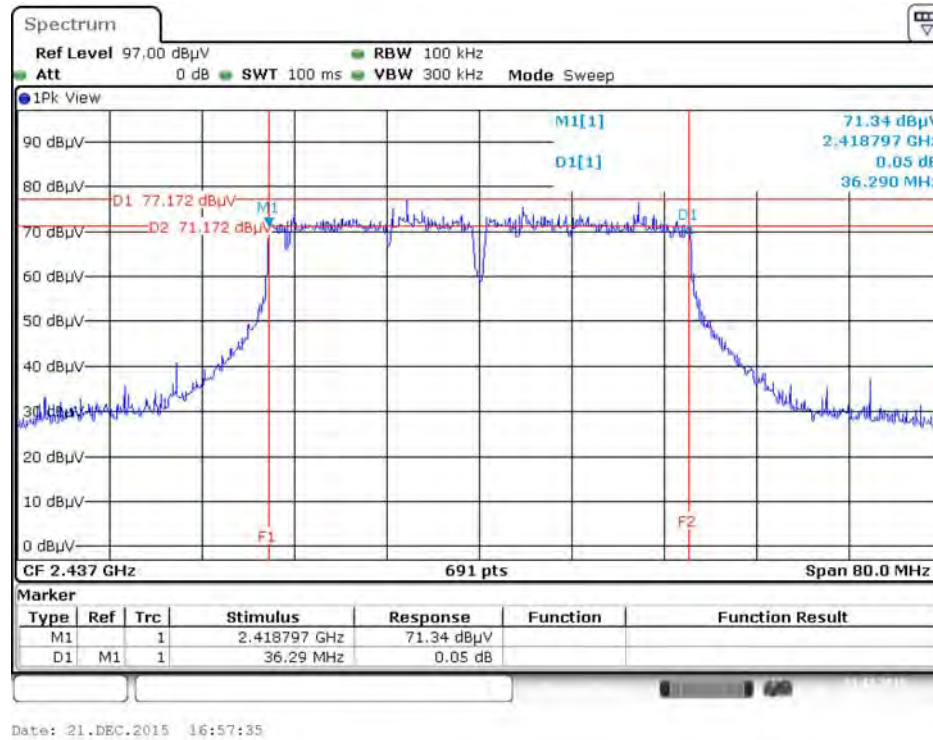

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

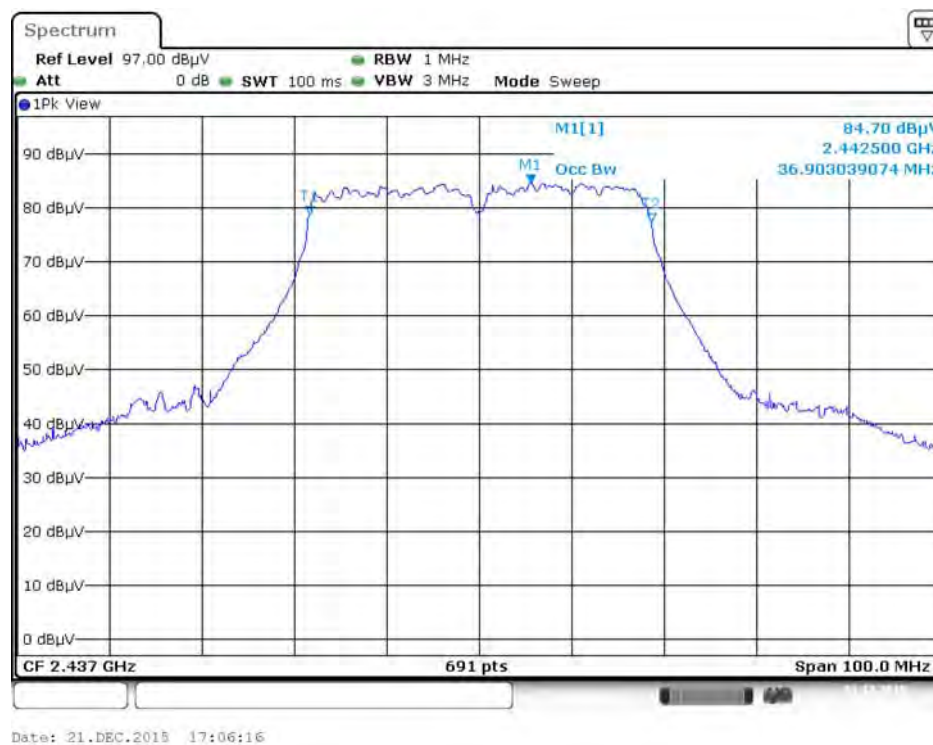

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

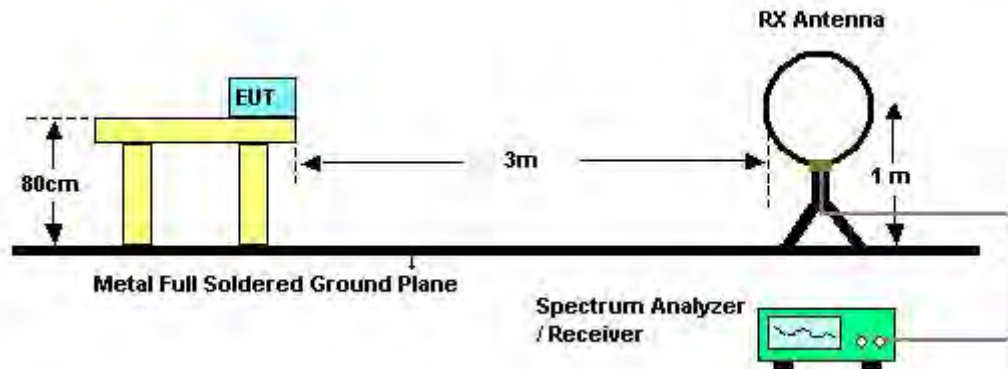

For Radiated Emissions: 30MHz~1GHz

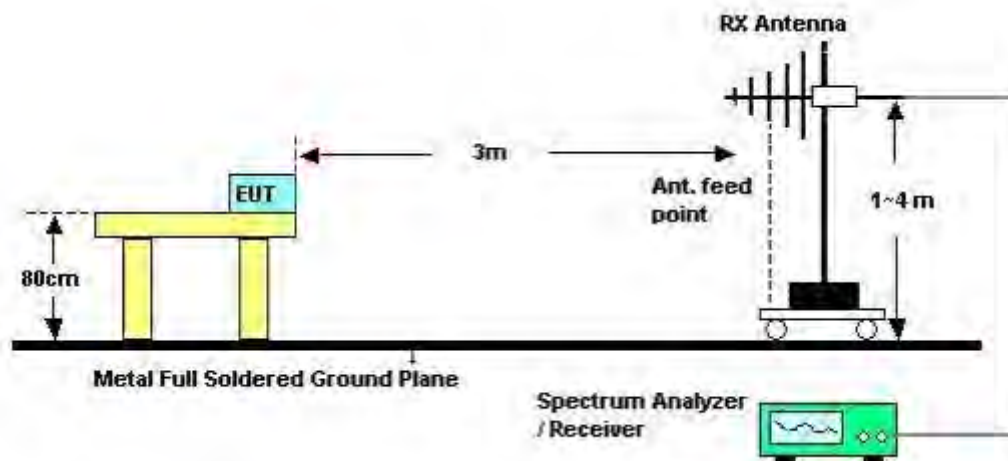

For Radiated Emissions: Above 1GHz

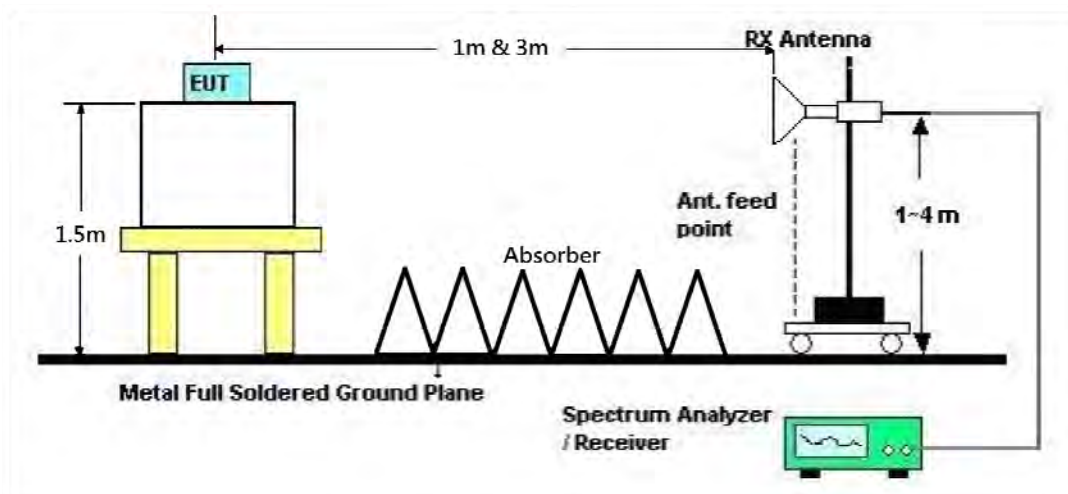

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	Normal Link
Test Date	Nov. 19, 2015	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

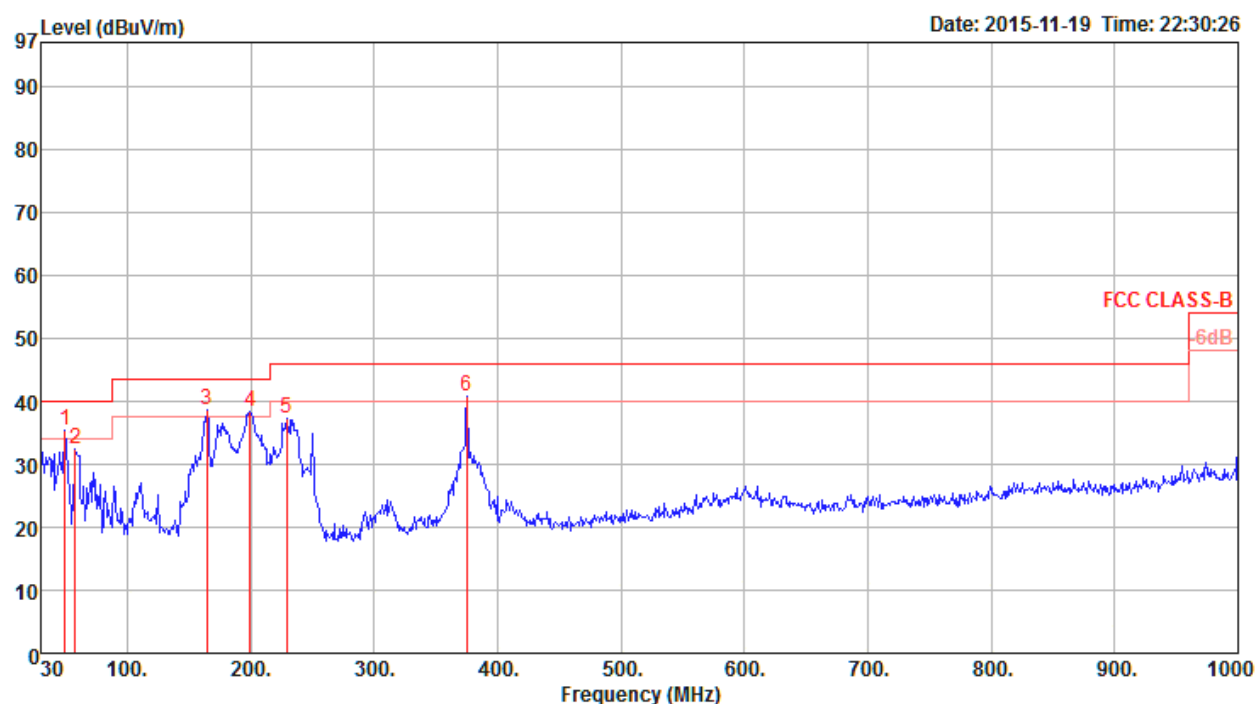

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor			
				dB	dBuV	dB	dB/m	dB	deg	cm	
1	49.40	35.33	40.00	-4.67	55.34	0.37	9.08	29.46	360	100 Peak	HORIZONTAL
2	58.13	32.42	40.00	-7.58	54.09	0.44	7.31	29.42	256	125 Peak	HORIZONTAL
3	164.83	38.68	43.50	-4.82	56.14	0.99	10.50	28.95	360	100 Peak	HORIZONTAL
4	199.75	38.49	43.50	-5.01	55.69	1.13	10.50	28.83	152	150 Peak	HORIZONTAL
5	228.85	37.20	46.00	-8.80	53.41	1.24	11.21	28.66	351	125 Peak	HORIZONTAL
6	375.32	40.91	46.00	-5.09	52.09	1.73	15.98	28.89	259	150 Peak	HORIZONTAL

Vertical

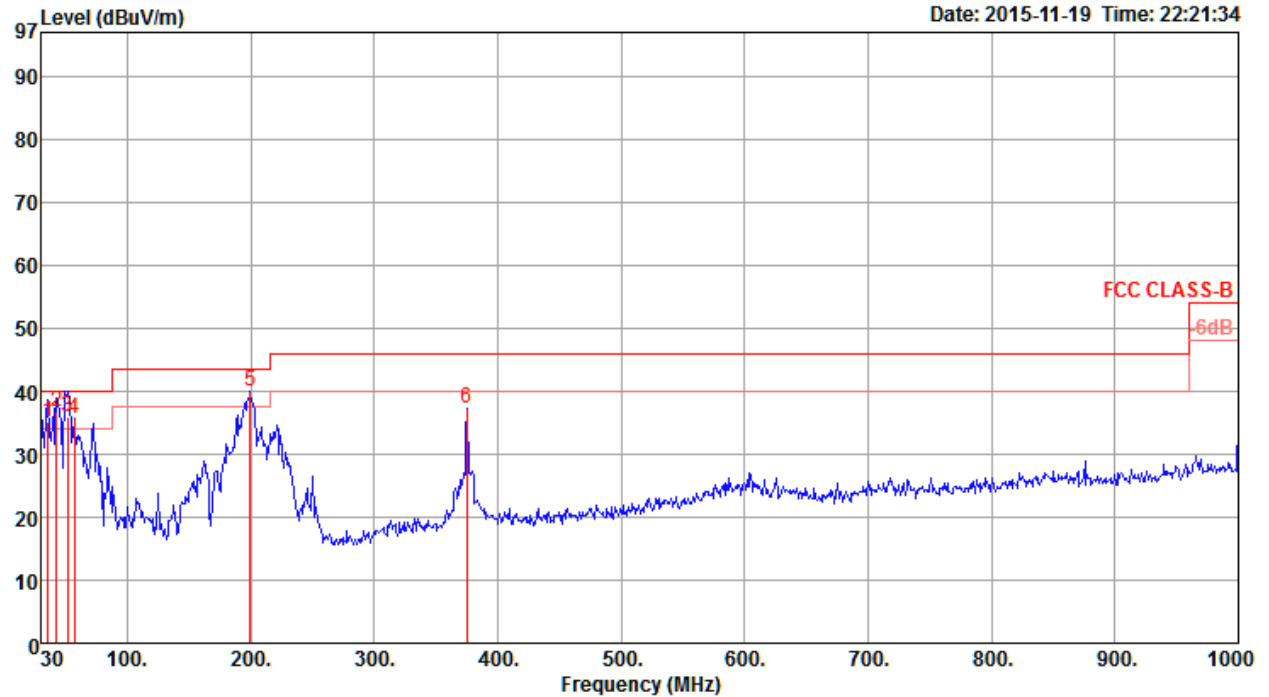

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	35.82	35.08	40.00	-4.92	48.10	0.23	16.23	29.48	326	150	QP	VERTICAL
2	42.61	36.75	40.00	-3.25	53.69	0.31	12.22	29.47	257	125	QP	VERTICAL
3	51.34	35.99	40.00	-4.01	56.49	0.39	8.56	29.45	354	150	QP	VERTICAL
4	57.16	35.65	40.00	-4.35	57.16	0.43	7.48	29.42	351	150	Peak	VERTICAL
5	199.75	39.93	43.50	-3.57	57.13	1.13	10.50	28.83	354	100	Peak	VERTICAL
6	375.32	37.18	46.00	-8.82	48.36	1.73	15.98	28.89	316	158	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.46	35.64	54.00	-18.36	28.15	8.11	33.11	33.73	102	342	Average	HORIZONTAL
2	4823.74	49.71	74.00	-24.29	42.22	8.11	33.11	33.73	102	342	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.88	36.15	54.00	-17.85	28.66	8.11	33.11	33.73	104	337	Average	VERTICAL
2	4824.52	49.04	74.00	-24.96	41.55	8.11	33.11	33.73	104	337	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.84	48.75	74.00	-25.25	41.29	7.94	33.23	33.71	102	351	Peak	HORIZONTAL
2	4874.41	35.20	54.00	-18.80	27.74	7.94	33.23	33.71	102	351	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.12	48.87	74.00	-25.13	41.41	7.94	33.23	33.71	103	347	Peak	VERTICAL
2	4873.26	35.40	54.00	-18.60	27.94	7.94	33.23	33.71	103	347	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.40	35.08	54.00	-18.92	27.62	7.82	33.32	33.68	102	348	Average	HORIZONTAL
2	4923.65	48.54	74.00	-25.46	41.09	7.78	33.35	33.68	102	348	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.32	48.94	74.00	-25.06	41.48	7.82	33.32	33.68	104	352	Peak	VERTICAL
2	4923.91	35.20	54.00	-18.80	27.75	7.78	33.35	33.68	104	352	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4843.58	48.69	74.00	-25.31	41.21	8.03	33.17	33.72	103	328	Peak	HORIZONTAL
2	4844.94	35.34	54.00	-18.66	27.86	8.03	33.17	33.72	103	328	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4843.36	48.44	74.00	-25.56	40.96	8.03	33.17	33.72	105	339	Peak	VERTICAL
2	4843.92	35.28	54.00	-18.72	27.80	8.03	33.17	33.72	105	339	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.43	35.19	54.00	-18.81	27.73	7.94	33.23	33.71	100	328	Average	HORIZONTAL
2	4874.42	48.41	74.00	-25.59	40.95	7.94	33.23	33.71	100	328	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.16	35.29	54.00	-18.71	27.83	7.94	33.23	33.71	101	314	Average
2	4873.68	48.40	74.00	-25.60	40.94	7.94	33.23	33.71	101	314	Peak

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.06	35.23	54.00	-18.77	27.77	7.86	33.29	33.69	110	331	Average	HORIZONTAL
2	4904.30	48.82	74.00	-25.18	41.36	7.86	33.29	33.69	110	331	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.49	48.48	74.00	-25.52	41.02	7.86	33.29	33.69	107	318	Peak	VERTICAL
2	4903.82	35.56	54.00	-18.44	28.10	7.86	33.29	33.69	107	318	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4823.06	45.51	74.00	-28.49	41.03	6.18	32.82	34.52	189	170 Peak	HORIZONTAL
2	4823.83	33.19	54.00	-20.81	28.71	6.18	32.82	34.52	189	170 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4823.08	33.32	54.00	-20.68	28.84	6.18	32.82	34.52	180	169 Average	VERTICAL
2	4823.27	45.89	74.00	-28.11	41.41	6.18	32.82	34.52	180	169 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 08, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.81	49.64	74.00	-24.36	42.18	7.94	33.23	33.71	108	23 Peak	HORIZONTAL
2	4873.86	40.03	54.00	-13.97	32.57	7.94	33.23	33.71	108	23 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.27	48.90	74.00	-25.10	41.44	7.94	33.23	33.71	113	35 Peak	VERTICAL
2	4873.87	37.45	54.00	-16.55	29.99	7.94	33.23	33.71	113	35 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.15	45.17	74.00	-28.83	40.73	5.94	32.99	34.49	218	153	Peak	HORIZONTAL
2	4924.26	32.26	54.00	-21.74	27.82	5.94	32.99	34.49	218	153	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.56	45.19	74.00	-28.81	40.74	5.97	32.97	34.49	224	147	Peak	VERTICAL
2	4924.58	32.49	54.00	-21.51	28.05	5.94	32.99	34.49	224	147	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.58	32.85	54.00	-21.15	28.39	6.12	32.86	34.52	225	153	Average	HORIZONTAL
2	4844.75	46.91	74.00	-27.09	42.45	6.12	32.86	34.52	225	153	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.64	33.14	54.00	-20.86	28.68	6.12	32.86	34.52	236	150	Average
2	4844.14	45.96	74.00	-28.04	41.50	6.12	32.86	34.52	236	150	Peak

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.08	31.97	54.00	-22.03	27.51	6.06	32.91	34.51	270	150 Average	HORIZONTAL
2	4873.37	46.28	74.00	-27.72	41.82	6.06	32.91	34.51	270	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.36	32.42	54.00	-21.58	27.96	6.06	32.91	34.51	249	150 Average	VERTICAL
2	4874.10	45.01	74.00	-28.99	40.55	6.06	32.91	34.51	249	150 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.65	32.22	54.00	-21.78	27.77	6.00	32.95	34.50	232	150	Average	HORIZONTAL
2	4904.78	45.06	74.00	-28.94	40.61	6.00	32.95	34.50	232	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.75	45.12	74.00	-28.88	40.67	6.00	32.95	34.50	198	150	Peak	VERTICAL
2	4903.75	32.28	54.00	-21.72	27.83	6.00	32.95	34.50	198	150	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4823.99	33.15	54.00	-20.85	28.67	6.18	32.82	34.52	255	150 Average	HORIZONTAL
2	4824.01	46.75	74.00	-27.25	42.27	6.18	32.82	34.52	255	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4923.99	44.23	74.00	-29.77	39.79	5.94	32.99	34.49	279	150 Peak	VERTICAL
2	4923.99	32.05	54.00	-21.95	27.61	5.94	32.99	34.49	279	150 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.00	45.59	74.00	-28.41	41.13	6.06	32.91	34.51	202	150	Peak	HORIZONTAL
2	4874.00	32.06	54.00	-21.94	27.60	6.06	32.91	34.51	202	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.01	45.68	74.00	-28.32	41.22	6.06	32.91	34.51	229	150	Peak	VERTICAL
2	4874.01	32.03	54.00	-21.97	27.57	6.06	32.91	34.51	229	150	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4923.99	44.58	74.00	-29.42	40.14	5.94	32.99	34.49	170	150 Peak	HORIZONTAL
2	4924.00	31.83	54.00	-22.17	27.39	5.94	32.99	34.49	170	150 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4923.99	31.92	54.00	-22.08	27.48	5.94	32.99	34.49	202	150 Average	VERTICAL
2	4923.99	45.56	74.00	-28.44	41.12	5.94	32.99	34.49	202	150 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.99	45.65	74.00	-28.35	41.19	6.12	32.86	34.52	115	150	Peak	HORIZONTAL
2	4844.00	32.67	54.00	-21.33	28.21	6.12	32.86	34.52	115	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.99	45.16	74.00	-28.84	40.70	6.12	32.86	34.52	142	150	Peak	VERTICAL
2	4843.99	32.65	54.00	-21.35	28.19	6.12	32.86	34.52	142	150	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.99	45.70	74.00	-28.30	41.24	6.06	32.91	34.51	101	150	Peak	HORIZONTAL
2	4873.99	32.01	54.00	-21.99	27.55	6.06	32.91	34.51	101	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.00	44.48	74.00	-29.52	40.02	6.06	32.91	34.51	311	150	Peak	VERTICAL
2	4874.01	31.84	54.00	-22.16	27.38	6.06	32.91	34.51	311	150	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.99	44.96	74.00	-29.04	40.51	6.00	32.95	34.50	73	150	Peak	HORIZONTAL
2	4903.99	32.17	54.00	-21.83	27.72	6.00	32.95	34.50	73	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4904.00	31.99	54.00	-22.01	27.54	6.00	32.95	34.50	90	150	Average	VERTICAL
2	4904.00	45.24	74.00	-28.76	40.79	6.00	32.95	34.50	90	150	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4824.00	32.01	54.00	-21.99	27.53	6.18	32.82	34.52	117	150 Average	HORIZONTAL
2	4824.01	45.75	74.00	-28.25	41.27	6.18	32.82	34.52	117	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4824.00	46.70	74.00	-27.30	42.22	6.18	32.82	34.52	135	150 Peak	VERTICAL
2	4824.01	33.01	54.00	-20.99	28.53	6.18	32.82	34.52	135	150 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 08, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4871.66	49.45	74.00	-24.55	41.99	7.94	33.23	33.71	177	186	Peak	HORIZONTAL
2	4873.94	38.00	54.00	-16.00	30.54	7.94	33.23	33.71	177	186	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.83	39.73	54.00	-14.27	32.27	7.94	33.23	33.71	130	62	Average	VERTICAL
2	4874.12	48.79	74.00	-25.21	41.33	7.94	33.23	33.71	130	62	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.99	32.05	54.00	-21.95	27.61	5.94	32.99	34.49	157	150	Average	HORIZONTAL
2	4924.00	45.28	74.00	-28.72	40.84	5.94	32.99	34.49	157	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.99	32.12	54.00	-21.88	27.68	5.94	32.99	34.49	144	150	Average	VERTICAL
2	4924.00	44.66	74.00	-29.34	40.22	5.94	32.99	34.49	144	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.00	45.56	74.00	-28.44	41.10	6.12	32.86	34.52	166	150 Peak	HORIZONTAL
2	4844.01	32.74	54.00	-21.26	28.28	6.12	32.86	34.52	166	150 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.00	32.97	54.00	-21.03	28.51	6.12	32.86	34.52	177	150 Average	VERTICAL
2	4844.00	45.28	74.00	-28.72	40.82	6.12	32.86	34.52	177	150 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.00	31.96	54.00	-22.04	27.50	6.06	32.91	34.51	223	150	Average	HORIZONTAL
2	4874.00	45.08	74.00	-28.92	40.62	6.06	32.91	34.51	223	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.99	31.97	54.00	-22.03	27.51	6.06	32.91	34.51	205	150	Average	VERTICAL
2	4874.00	44.90	74.00	-29.10	40.44	6.06	32.91	34.51	205	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.99	31.93	54.00	-22.07	27.48	6.00	32.95	34.50	279	150	Average	HORIZONTAL
2	4904.00	44.98	74.00	-29.02	40.53	6.00	32.95	34.50	279	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4904.00	32.10	54.00	-21.90	27.65	6.00	32.95	34.50	260	150	Average	VERTICAL
2	4904.00	44.71	74.00	-29.29	40.26	6.00	32.95	34.50	260	150	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.49	47.11	74.00	-26.89	42.63	6.18	32.82	34.52	192	136	Peak	HORIZONTAL
2	4824.91	36.38	54.00	-17.62	31.90	6.18	32.82	34.52	192	136	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.40	52.52	74.00	-21.48	54.22	0.00	32.82	34.52	168	128	Peak	VERTICAL
2	4824.71	38.97	54.00	-15.03	34.49	6.18	32.82	34.52	168	128	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 08, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.23	36.11	54.00	-17.89	28.65	7.94	33.23	33.71	114	86	Average	HORIZONTAL
2	4874.64	49.20	74.00	-24.80	41.74	7.94	33.23	33.71	114	86	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.92	36.50	54.00	-17.50	29.04	7.94	33.23	33.71	109	13	Average	VERTICAL
2	4873.97	48.78	74.00	-25.22	41.32	7.94	33.23	33.71	109	13	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4924.53	45.45	74.00	-28.55	41.01	5.94	32.99	34.49	97	161 Peak	HORIZONTAL
2	4924.56	32.71	54.00	-21.29	28.27	5.94	32.99	34.49	97	161 Average	HORIZONTAL

Vertical

j

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4923.65	45.77	74.00	-28.23	41.33	5.94	32.99	34.49	81	140 Peak	VERTICAL
2	4924.48	32.57	54.00	-21.43	28.13	5.94	32.99	34.49	81	140 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.49	33.05	54.00	-20.95	28.59	6.12	32.86	34.52	130	183 Average	HORIZONTAL
2	4844.66	46.52	74.00	-27.48	42.06	6.12	32.86	34.52	130	183 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4844.61	42.58	74.00	-31.42	38.12	6.12	32.86	34.52	150	166 Peak	VERTICAL
2	4844.89	32.12	54.00	-21.88	27.66	6.12	32.86	34.52	150	166 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.45	45.55	74.00	-28.45	41.09	6.06	32.91	34.51	180	165 Peak	HORIZONTAL
2	4874.64	31.28	54.00	-22.72	26.82	6.06	32.91	34.51	180	165 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.33	32.10	54.00	-21.90	27.64	6.06	32.91	34.51	162	164 Average	VERTICAL
2	4874.99	45.38	74.00	-28.62	40.92	6.06	32.91	34.51	162	164 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Aux	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	deg	cm		
1	4903.57	44.98	74.00	-29.02	40.53	6.00	32.95	34.50	0.00	180	169	Peak	HORIZONTAL
2	4904.11	32.53	54.00	-21.47	28.08	6.00	32.95	34.50	0.00	180	169	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Aux	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	deg	cm		
1	4903.94	32.29	54.00	-21.71	27.84	6.00	32.95	34.50	0.00	190	168	Average	VERTICAL
2	4904.23	45.81	74.00	-28.19	41.36	6.00	32.95	34.50	0.00	190	168	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.00	33.11	54.00	-20.89	28.63	6.18	32.82	34.52	113	150	Average	HORIZONTAL
2	4824.01	45.91	74.00	-28.09	41.43	6.18	32.82	34.52	113	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.00	33.13	54.00	-20.87	28.65	6.18	32.82	34.52	73	150	Average	VERTICAL
2	4824.01	46.27	74.00	-27.73	41.79	6.18	32.82	34.52	73	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.32	31.71	54.00	-22.29	27.25	6.06	32.91	34.51	162	150	Average	HORIZONTAL
2	4874.28	44.84	74.00	-29.16	40.38	6.06	32.91	34.51	162	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.43	32.07	54.00	-21.93	27.61	6.06	32.91	34.51	140	150	Average	VERTICAL
2	4874.05	43.98	74.00	-30.02	39.52	6.06	32.91	34.51	140	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.77	44.97	74.00	-29.03	40.53	5.94	32.99	34.49	224	150	Peak	HORIZONTAL
2	4924.31	31.54	54.00	-22.46	27.10	5.94	32.99	34.49	224	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.46	44.94	74.00	-29.06	40.49	5.97	32.97	34.49	206	150	Peak	VERTICAL
2	4924.62	32.21	54.00	-21.79	27.77	5.94	32.99	34.49	206	150	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.02	45.92	74.00	-28.08	41.46	6.12	32.86	34.52	242	150 Peak	HORIZONTAL
2	4843.60	32.86	54.00	-21.14	28.40	6.12	32.86	34.52	242	150 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4843.09	32.82	54.00	-21.18	28.36	6.12	32.86	34.52	215	150 Average	VERTICAL
2	4844.99	45.60	74.00	-28.40	41.14	6.12	32.86	34.52	215	150 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.91	31.97	54.00	-22.03	27.51	6.06	32.91	34.51	305	150	Average	HORIZONTAL
2	4874.02	44.98	74.00	-29.02	40.52	6.06	32.91	34.51	305	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.28	32.08	54.00	-21.92	27.62	6.06	32.91	34.51	281	150	Average	VERTICAL
2	4873.88	44.76	74.00	-29.24	40.30	6.06	32.91	34.51	281	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.48	45.40	74.00	-28.60	40.95	6.00	32.95	34.50	248	150	Peak	HORIZONTAL
2	4903.91	32.24	54.00	-21.76	27.79	6.00	32.95	34.50	248	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4904.08	32.29	54.00	-21.71	27.84	6.00	32.95	34.50	290	150	Average	VERTICAL
2	4904.54	45.53	74.00	-28.47	41.08	6.00	32.95	34.50	290	150	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.71	33.14	54.00	-20.86	28.66	6.18	32.82	34.52	185	150	Average	HORIZONTAL
2	4824.19	46.24	74.00	-27.76	41.76	6.18	32.82	34.52	185	150	Peak	HORIZONTAL

Vertical

j

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.41	46.64	74.00	-27.36	42.16	6.18	32.82	34.52	198	150	Peak	VERTICAL
2	4824.34	32.80	54.00	-21.20	28.32	6.18	32.82	34.52	198	150	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 08, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.96	37.98	54.00	-16.02	31.58	6.88	33.23	33.71	123	333	Average
2	4874.08	49.64	74.00	-24.36	43.24	6.88	33.23	33.71	123	333	Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.97	40.89	54.00	-13.11	34.49	6.88	33.23	33.71	127	340	Average
2	4874.70	50.66	74.00	-23.34	44.26	6.88	33.23	33.71	127	340	Peak

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.39	32.00	54.00	-22.00	27.56	5.94	32.99	34.49	210	150	Average	HORIZONTAL
2	4924.84	45.37	74.00	-28.63	40.93	5.94	32.99	34.49	210	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.50	32.05	54.00	-21.95	27.61	5.94	32.99	34.49	250	150	Average	VERTICAL
2	4924.68	44.47	74.00	-29.53	40.03	5.94	32.99	34.49	250	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.62	45.82	74.00	-28.18	41.34	6.18	32.82	34.52	187	150	Peak	HORIZONTAL
2	4824.62	33.06	54.00	-20.94	28.58	6.18	32.82	34.52	187	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.61	32.96	54.00	-21.04	28.48	6.18	32.82	34.52	165	150	Average	VERTICAL
2	4824.84	45.54	74.00	-28.46	41.06	6.18	32.82	34.52	165	150	Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.01	32.23	54.00	-21.77	27.77	6.06	32.91	34.51	131	150 Average	HORIZONTAL
2	4873.24	45.09	74.00	-28.91	40.63	6.06	32.91	34.51	131	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.51	32.32	54.00	-21.68	27.86	6.06	32.91	34.51	153	150 Average	VERTICAL
2	4874.85	44.70	74.00	-29.30	40.24	6.06	32.91	34.51	153	150 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.08	45.05	74.00	-28.95	40.60	6.00	32.95	34.50	135	150	Peak	HORIZONTAL
2	4904.23	32.20	54.00	-21.80	27.75	6.00	32.95	34.50	135	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.09	45.33	74.00	-28.67	40.88	6.00	32.95	34.50	115	150	Peak	VERTICAL
2	4903.90	32.21	54.00	-21.79	27.76	6.00	32.95	34.50	115	150	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.40	36.19	54.00	-17.81	28.05	8.11	33.11	33.08	175	185	Average	HORIZONTAL
2	4832.12	48.51	74.00	-25.49	40.38	8.07	33.14	33.08	175	185	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.88	37.99	54.00	-16.01	29.85	8.11	33.11	33.08	175	152	Average
2	4827.64	48.95	74.00	-25.05	40.82	8.07	33.14	33.08	175	152	Peak

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg	
1	4877.72	38.79	54.00	-15.21	30.69	7.94	33.23	33.07	175	159 Average	HORIZONTAL
2	4877.80	52.64	74.00	-21.36	44.54	7.94	33.23	33.07	175	159 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg	
1	4875.12	52.04	74.00	-21.96	43.95	7.94	33.23	33.08	175	325 Peak	VERTICAL
2	4876.92	41.60	54.00	-12.40	33.50	7.94	33.23	33.07	175	325 Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4916.72	49.44	74.00	-24.56	41.37	7.82	33.32	33.07	175	180 Peak	HORIZONTAL
2	4919.84	35.66	54.00	-18.34	27.59	7.82	33.32	33.07	175	180 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4915.08	36.92	54.00	-17.08	28.85	7.82	33.32	33.07	175	198 Average	VERTICAL
2	4920.64	48.60	74.00	-25.40	40.53	7.82	33.32	33.07	175	198 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4836.08	49.08	74.00	-24.92	40.95	8.07	33.14	33.08	175	201	Peak	HORIZONTAL
2	4852.80	35.84	54.00	-18.16	27.72	8.03	33.17	33.08	175	201	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4834.68	48.73	74.00	-25.27	40.60	8.07	33.14	33.08	175	174	Peak	VERTICAL
2	4836.56	36.10	54.00	-17.90	27.97	8.07	33.14	33.08	175	174	Average	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.28	48.70	74.00	-25.30	40.61	7.94	33.23	33.08	175	129 Peak	HORIZONTAL
2	4876.56	35.69	54.00	-18.31	27.60	7.94	33.23	33.08	175	129 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.20	36.21	54.00	-17.79	28.12	7.94	33.23	33.08	175	185 Average	VERTICAL
2	4877.28	48.54	74.00	-25.46	40.44	7.94	33.23	33.07	175	185 Peak	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4902.60	48.53	74.00	-25.47	40.45	7.86	33.29	33.07	175	236 Peak	HORIZONTAL
2	4910.36	35.65	54.00	-18.35	27.58	7.82	33.32	33.07	175	236 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4899.64	49.01	74.00	-24.99	40.93	7.86	33.29	33.07	175	208 Peak	VERTICAL
2	4912.00	36.10	54.00	-17.90	28.03	7.82	33.32	33.07	175	208 Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.60	63.55	74.00	-10.45	30.23	5.01	28.31	0.00	164	352	Peak	VERTICAL
2	2390.00	52.90	54.00	-1.10	19.58	5.01	28.31	0.00	164	352	Average	VERTICAL
3	2406.80	106.47			73.08	5.04	28.35	0.00	164	352	Average	VERTICAL
4	2408.20	117.46			84.07	5.04	28.35	0.00	164	352	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.80	51.84	54.00	-2.16	18.52	5.01	28.31	0.00	154	359	Average	HORIZONTAL
2	2390.00	63.96	74.00	-10.04	30.64	5.01	28.31	0.00	154	359	Peak	HORIZONTAL
3	2434.60	126.24			92.78	5.07	28.39	0.00	154	359	Peak	HORIZONTAL
4	2440.60	112.63			79.14	5.08	28.41	0.00	154	359	Average	HORIZONTAL
5	2485.40	69.45	74.00	-4.55	35.85	5.12	28.48	0.00	154	359	Peak	HORIZONTAL
6	2485.40	52.69	54.00	-1.31	19.09	5.12	28.48	0.00	154	359	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2459.60	107.45			73.93	5.09	28.43	0.00	159	357	Average	HORIZONTAL
2	2467.20	116.68			83.14	5.10	28.44	0.00	159	357	Peak	HORIZONTAL
3	2483.50	52.65	54.00	-1.35	19.05	5.12	28.48	0.00	159	357	Average	HORIZONTAL
4	2484.00	65.66	74.00	-8.34	32.06	5.12	28.48	0.00	159	357	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 09, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2387.60	71.56	74.00	-2.44	38.24	5.01	28.31	0.00	102	357 Peak	VERTICAL
2	2390.00	52.43	54.00	-1.57	19.11	5.01	28.31	0.00	102	357 Average	VERTICAL
3	2410.40	105.44			72.05	5.04	28.35	0.00	102	357 Average	VERTICAL
4	2426.00	113.47			80.03	5.06	28.38	0.00	102	357 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.80	58.54	74.00	-15.46	25.22	5.01	28.31	0.00	154	350 Peak	HORIZONTAL
2	2390.00	48.05	54.00	-5.95	14.73	5.01	28.31	0.00	154	350 Average	HORIZONTAL
3	2427.80	115.76			82.32	5.06	28.38	0.00	154	350 Peak	HORIZONTAL
4	2427.80	111.97			78.53	5.06	28.38	0.00	154	350 Average	HORIZONTAL
5	2483.50	64.65	74.00	-9.35	31.05	5.12	28.48	0.00	154	350 Peak	HORIZONTAL
6	2483.50	52.46	54.00	-1.54	18.86	5.12	28.48	0.00	154	350 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2444.40	112.33			78.84	5.08	28.41	0.00	157	357 Peak	HORIZONTAL
2	2463.60	98.84			65.30	5.10	28.44	0.00	157	357 Average	HORIZONTAL
3	2484.40	67.06	74.00	-6.94	33.46	5.12	28.48	0.00	157	357 Peak	HORIZONTAL
4	2484.40	52.96	54.00	-1.04	19.36	5.12	28.48	0.00	157	357 Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015 ~ Dec. 08, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.89	64.43	74.00	-9.57	32.56	3.85	28.02	0.00	3	200 Peak	VERTICAL
2	2389.89	52.58	54.00	-1.42	20.71	3.85	28.02	0.00	3	200 Average	VERTICAL
3	2407.03	121.01			89.15	3.86	28.00	0.00	3	200 Peak	VERTICAL
4	2409.92	107.18			75.32	3.86	28.00	0.00	3	200 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg		
1	2388.26	52.76	54.00	-1.24	19.44	5.01	28.31	0.00	232	2 Average	HORIZONTAL
2	2389.57	64.08	74.00	-9.92	30.76	5.01	28.31	0.00	232	2 Peak	HORIZONTAL
3	2434.83	122.57			89.11	5.07	28.39	0.00	232	2 Peak	HORIZONTAL
4	2435.70	111.97			78.51	5.07	28.39	0.00	232	2 Average	HORIZONTAL
5	2483.93	66.15	74.00	-7.85	32.55	5.12	28.48	0.00	232	2 Peak	HORIZONTAL
6	2485.67	52.99	54.00	-1.01	19.39	5.12	28.48	0.00	232	2 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2459.60	116.15			84.30	3.90	27.95	0.00	16	151 Peak	HORIZONTAL
2	2463.28	104.78			72.94	3.90	27.94	0.00	16	151 Average	HORIZONTAL
3	2483.50	51.84	54.00	-2.16	20.00	3.92	27.92	0.00	16	151 Average	HORIZONTAL
4	2483.64	63.64	74.00	-10.36	31.80	3.92	27.92	0.00	16	151 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015 ~ Nov. 29, 2015		
Test Mode	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.03	65.01	74.00	-8.99	33.14	3.85	28.02	0.00	343	160 Peak	VERTICAL
2	2389.31	52.65	54.00	-1.35	20.78	3.85	28.02	0.00	343	160 Average	VERTICAL
3	2412.71	109.09			77.23	3.87	27.99	0.00	343	160 Average	VERTICAL
4	2413.03	112.95			81.09	3.87	27.99	0.00	343	160 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.92	62.43	74.00	-11.57	30.56	3.85	28.02	0.00	327	196 Peak	VERTICAL
2	2390.00	51.38	54.00	-2.62	19.51	3.85	28.02	0.00	327	196 Average	VERTICAL
3	2427.71	105.91			74.05	3.88	27.98	0.00	327	196 Average	VERTICAL
4	2445.97	114.28			82.43	3.89	27.96	0.00	327	196 Peak	VERTICAL
5	2483.50	52.06	54.00	-1.94	20.22	3.92	27.92	0.00	327	196 Average	VERTICAL
6	2483.80	65.71	74.00	-8.29	33.87	3.92	27.92	0.00	327	196 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2443.67	104.56			72.71	3.89	27.96	0.00	323	189 Average	VERTICAL
2	2453.60	114.66			82.81	3.90	27.95	0.00	323	189 Peak	VERTICAL
3	2484.37	52.65	54.00	-1.35	20.81	3.92	27.92	0.00	323	189 Average	VERTICAL
4	2491.74	69.77	74.00	-4.23	37.94	3.92	27.91	0.00	323	189 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.92	63.74	74.00	-10.26	31.87	3.85	28.02	0.00	351	151	Peak	VERTICAL
2	2390.00	52.86	54.00	-1.14	20.99	3.85	28.02	0.00	351	151	Average	VERTICAL
3	2416.81	120.43			88.57	3.87	27.99	0.00	351	151	Peak	VERTICAL
4	2419.69	109.86			78.00	3.87	27.99	0.00	351	151	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.56	61.71	74.00	-12.29	29.84	3.85	28.02	0.00	355	164	Peak	VERTICAL
2	2390.00	52.36	54.00	-1.64	20.49	3.85	28.02	0.00	355	164	Average	VERTICAL
3	2431.87	125.06			93.20	3.88	27.98	0.00	355	164	Peak	VERTICAL
4	2438.60	119.15			87.30	3.88	27.97	0.00	355	164	Average	VERTICAL
5	2483.50	62.74	74.00	-11.26	30.90	3.92	27.92	0.00	355	164	Peak	VERTICAL
6	2483.82	52.72	54.00	-1.28	20.88	3.92	27.92	0.00	355	164	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.76	107.16			75.32	3.90	27.94	0.00	353	137	Average	VERTICAL
2	2464.40	120.39			88.55	3.90	27.94	0.00	353	137	Peak	VERTICAL
3	2483.50	65.93	74.00	-8.07	34.09	3.92	27.92	0.00	353	137	Peak	VERTICAL
4	2483.50	52.75	54.00	-1.25	20.91	3.92	27.92	0.00	353	137	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.71	72.96	74.00	-1.04	41.09	3.85	28.02	0.00	355	125	Peak	VERTICAL
2	2389.31	52.63	54.00	-1.37	20.76	3.85	28.02	0.00	355	125	Average	VERTICAL
3	2415.59	105.46			73.60	3.87	27.99	0.00	355	125	Average	VERTICAL
4	2419.44	114.88			83.02	3.87	27.99	0.00	355	125	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	63.40	74.00	-10.60	31.53	3.85	28.02	0.00	356	142	Peak	VERTICAL
2	2390.00	52.53	54.00	-1.47	20.66	3.85	28.02	0.00	356	142	Average	VERTICAL
3	2424.82	111.69			79.83	3.87	27.99	0.00	356	142	Average	VERTICAL
4	2443.73	118.59			86.74	3.89	27.96	0.00	356	142	Peak	VERTICAL
5	2483.80	52.94	54.00	-1.06	21.10	3.92	27.92	0.00	356	142	Average	VERTICAL
6	2485.08	64.32	74.00	-9.68	32.48	3.92	27.92	0.00	356	142	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2441.42	109.55			77.70	3.89	27.96	0.00	350	186	Average	VERTICAL
2	2468.67	112.79			80.95	3.91	27.93	0.00	350	186	Peak	VERTICAL
3	2484.69	63.99	74.00	-10.01	32.15	3.92	27.92	0.00	350	186	Peak	VERTICAL
4	2485.65	52.61	54.00	-1.39	20.77	3.92	27.92	0.00	350	186	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015 ~ Dec. 08, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.92	65.07	74.00	-8.93	33.20	3.85	28.02	0.00	345	130 Peak	VERTICAL
2	2390.00	52.57	54.00	-1.43	20.70	3.85	28.02	0.00	345	130 Average	VERTICAL
3	2413.12	122.10			90.24	3.87	27.99	0.00	345	130 Peak	VERTICAL
4	2415.37	110.05			78.19	3.87	27.99	0.00	345	130 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg		
1	2389.13	63.77	74.00	-10.23	30.45	5.01	28.31	0.00	142	0 Peak	VERTICAL
2	2390.00	51.27	54.00	-2.73	17.95	5.01	28.31	0.00	142	0 Average	VERTICAL
3	2434.68	126.58			93.12	5.07	28.39	0.00	142	0 Peak	VERTICAL
4	2434.68	115.97			82.51	5.07	28.39	0.00	142	0 Average	VERTICAL
5	2483.50	63.75	74.00	-10.25	30.15	5.12	28.48	0.00	142	0 Peak	VERTICAL
6	2484.95	52.42	54.00	-1.58	18.82	5.12	28.48	0.00	142	0 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2457.03	119.05			87.20	3.90	27.95	0.00	349	154 Peak	VERTICAL
2	2460.24	106.90			75.05	3.90	27.95	0.00	349	154 Average	VERTICAL
3	2483.50	52.82	54.00	-1.18	20.98	3.92	27.92	0.00	349	154 Average	VERTICAL
4	2483.80	68.08	74.00	-5.92	36.24	3.92	27.92	0.00	349	154 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.67	72.86	74.00	-1.14	40.99	3.85	28.02	0.00	2	154	Peak	VERTICAL
2	2390.00	52.94	54.00	-1.06	21.07	3.85	28.02	0.00	2	154	Average	VERTICAL
3	2411.10	104.84			72.98	3.86	28.00	0.00	2	154	Average	VERTICAL
4	2427.13	115.02			83.16	3.88	27.98	0.00	2	154	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2388.60	64.96	74.00	-9.04	33.09	3.85	28.02	0.00	355	144	Peak	VERTICAL
2	2390.00	51.98	54.00	-2.02	20.11	3.85	28.02	0.00	355	144	Average	VERTICAL
3	2427.06	117.14			85.28	3.88	27.98	0.00	355	144	Peak	VERTICAL
4	2434.44	106.26			74.41	3.88	27.97	0.00	355	144	Average	VERTICAL
5	2483.50	52.21	54.00	-1.79	20.37	3.92	27.92	0.00	355	144	Average	VERTICAL
6	2484.76	64.59	74.00	-9.41	32.75	3.92	27.92	0.00	355	144	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2444.31	104.42			72.57	3.89	27.96	0.00	346	167	Average	VERTICAL
2	2454.56	114.44			82.59	3.90	27.95	0.00	346	167	Peak	VERTICAL
3	2483.50	52.38	54.00	-1.62	20.54	3.92	27.92	0.00	346	167	Average	VERTICAL
4	2487.58	63.88	74.00	-10.12	32.04	3.92	27.92	0.00	346	167	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015 ~ Dec. 08, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.89	62.32	74.00	-11.68	30.45	3.85	28.02	0.00	6	190 Peak	VERTICAL
2	2390.00	52.36	54.00	-1.64	20.49	3.85	28.02	0.00	6	190 Average	VERTICAL
3	2412.80	108.52			76.66	3.87	27.99	0.00	6	190 Average	VERTICAL
4	2413.12	118.79			86.93	3.87	27.99	0.00	6	190 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.57	63.51	74.00	-10.49	30.19	5.01	28.31	0.00	227	355 Peak	HORIZONTAL
2	2389.57	51.07	54.00	-2.93	17.75	5.01	28.31	0.00	227	355 Average	HORIZONTAL
3	2438.30	122.35			88.89	5.07	28.39	0.00	227	355 Peak	HORIZONTAL
4	2438.74	111.60			78.14	5.07	28.39	0.00	227	355 Average	HORIZONTAL
5	2483.93	64.50	74.00	-9.50	30.90	5.12	28.48	0.00	227	355 Peak	HORIZONTAL
6	2483.93	52.34	54.00	-1.66	18.74	5.12	28.48	0.00	227	355 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2457.99	115.44			83.59	3.90	27.95	0.00	341	153 Peak	HORIZONTAL
2	2458.80	105.31			73.46	3.90	27.95	0.00	341	153 Average	HORIZONTAL
3	2483.50	51.62	54.00	-2.38	19.78	3.92	27.92	0.00	341	153 Average	HORIZONTAL
4	2483.80	61.84	74.00	-12.16	30.00	3.92	27.92	0.00	341	153 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 29, 2015		
Test Mode	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.71	72.88	74.00	-1.12	41.01	3.85	28.02	0.00	6	184	Peak	VERTICAL
2	2388.99	52.53	54.00	-1.47	20.66	3.85	28.02	0.00	6	184	Average	VERTICAL
3	2411.42	103.31			71.45	3.87	27.99	0.00	6	184	Average	VERTICAL
4	2425.53	112.81			80.95	3.88	27.98	0.00	6	184	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	64.81	74.00	-9.19	32.94	3.85	28.02	0.00	3	179	Peak	VERTICAL
2	2390.00	51.97	54.00	-2.03	20.10	3.85	28.02	0.00	3	179	Average	VERTICAL
3	2444.69	114.47			82.62	3.89	27.96	0.00	3	179	Peak	VERTICAL
4	2445.01	103.48			71.63	3.89	27.96	0.00	3	179	Average	VERTICAL
5	2483.50	52.99	54.00	-1.01	21.15	3.92	27.92	0.00	3	179	Average	VERTICAL
6	2484.76	66.00	74.00	-8.00	34.16	3.92	27.92	0.00	3	179	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2456.49	100.52			68.67	3.90	27.95	0.00	6	194	Average	VERTICAL
2	2457.13	113.31			81.46	3.90	27.95	0.00	6	194	Peak	VERTICAL
3	2485.01	52.70	54.00	-1.30	20.86	3.92	27.92	0.00	6	194	Average	VERTICAL
4	2487.90	66.28	74.00	-7.72	34.44	3.92	27.92	0.00	6	194	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.24	65.26	74.00	-8.74	33.39	3.85	28.02	0.00	356	168 Peak	VERTICAL
2	2390.00	52.07	54.00	-1.93	20.20	3.85	28.02	0.00	356	168 Average	VERTICAL
3	2414.56	112.13			80.27	3.87	27.99	0.00	356	168 Average	VERTICAL
4	2415.85	123.28			91.42	3.87	27.99	0.00	356	168 Peak	VERTICAL
5	2490.53	63.04	74.00	-10.96	31.21	3.92	27.91	0.00	356	168 Peak	VERTICAL
6	2490.85	52.61	54.00	-1.39	20.78	3.92	27.91	0.00	356	168 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2351.74	52.69	54.00	-1.31	20.82	3.81	28.06	0.00	5	169 Average	VERTICAL
2	2387.00	66.85	74.00	-7.15	34.98	3.85	28.02	0.00	5	169 Peak	VERTICAL
3	2434.76	126.71			94.86	3.88	27.97	0.00	5	169 Peak	VERTICAL
4	2434.76	118.50			86.65	3.88	27.97	0.00	5	169 Average	VERTICAL
5	2483.82	52.97	54.00	-1.03	21.13	3.92	27.92	0.00	5	169 Average	VERTICAL
6	2484.44	69.85	74.00	-4.15	38.01	3.92	27.92	0.00	5	169 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Aux	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2460.24	113.48			81.63	3.90	27.95	0.00	0.00	358	178 Average	VERTICAL
2	2464.89	120.70			88.86	3.90	27.94	0.00	0.00	358	178 Peak	VERTICAL
3	2484.60	52.98	54.00	-1.02	21.14	3.92	27.92	0.00	0.00	358	178 Average	VERTICAL
4	2485.08	70.11	74.00	-3.89	38.27	3.92	27.92	0.00	0.00	358	178 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2389.63	65.18	74.00	-8.82	33.31	3.85	28.02	0.00	358	190 Peak	VERTICAL
2	2390.00	52.70	54.00	-1.30	20.83	3.85	28.02	0.00	358	190 Average	VERTICAL
3	2414.63	116.28			84.42	3.87	27.99	0.00	358	190 Peak	VERTICAL
4	2420.08	104.01			72.15	3.87	27.99	0.00	358	190 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Aux	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.24	52.16	54.00	-1.84	20.29	3.85	28.02	0.00	0.00	4	194 Average	VERTICAL
2	2389.56	63.90	74.00	-10.10	32.03	3.85	28.02	0.00	0.00	4	194 Peak	VERTICAL
3	2423.22	109.56			77.70	3.87	27.99	0.00	0.00	4	194 Average	VERTICAL
4	2432.83	117.35			85.50	3.88	27.97	0.00	0.00	4	194 Peak	VERTICAL
5	2483.80	64.52	74.00	-9.48	32.68	3.92	27.92	0.00	0.00	4	194 Peak	VERTICAL
6	2484.76	52.72	54.00	-1.28	20.88	3.92	27.92	0.00	0.00	4	194 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2458.41	104.73			72.88	3.90	27.95	0.00	357	169 Average	VERTICAL
2	2464.50	115.26			83.42	3.90	27.94	0.00	357	169 Peak	VERTICAL
3	2485.01	52.83	54.00	-1.17	20.99	3.92	27.92	0.00	357	169 Average	VERTICAL
4	2493.03	66.84	74.00	-7.16	35.01	3.92	27.91	0.00	357	169 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015 ~ Dec. 08, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2389.56	64.56	74.00	-9.44	32.69	3.85	28.02	0.00	318	163 Peak	VERTICAL
2	2390.00	52.81	54.00	-1.19	20.94	3.85	28.02	0.00	318	163 Average	VERTICAL
3	2405.75	120.00			88.14	3.86	28.00	0.00	318	163 Peak	VERTICAL
4	2413.12	108.03			76.17	3.87	27.99	0.00	318	163 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm	deg	
1	2389.57	64.02	74.00	-9.98	31.33	4.38	28.31	0.00	200	90 Peak	VERTICAL
2	2389.57	52.86	54.00	-1.14	20.17	4.38	28.31	0.00	200	90 Average	VERTICAL
3	2436.13	116.84			84.01	4.44	28.39	0.00	200	90 Average	VERTICAL
4	2439.60	126.05			93.19	4.45	28.41	0.00	200	90 Peak	VERTICAL
5	2483.50	51.76	54.00	-2.24	18.78	4.50	28.48	0.00	200	90 Average	VERTICAL
6	2486.97	65.12	74.00	-8.88	32.14	4.50	28.48	0.00	200	90 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2465.53	106.52			74.68	3.90	27.94	0.00	314	124 Average	VERTICAL
2	2466.97	117.76			85.92	3.90	27.94	0.00	314	124 Peak	VERTICAL
3	2483.64	62.55	74.00	-11.45	30.71	3.92	27.92	0.00	314	124 Peak	VERTICAL
4	2484.12	51.83	54.00	-2.17	19.99	3.92	27.92	0.00	314	124 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.03	63.91	74.00	-10.09	32.04	3.85	28.02	0.00	330	173 Peak	VERTICAL
2	2388.99	52.60	54.00	-1.40	20.73	3.85	28.02	0.00	330	173 Average	VERTICAL
3	2414.95	106.92			75.06	3.87	27.99	0.00	330	173 Average	VERTICAL
4	2428.09	114.70			82.84	3.88	27.98	0.00	330	173 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.92	64.88	74.00	-9.12	33.01	3.85	28.02	0.00	319	167 Peak	VERTICAL
2	2390.00	52.36	54.00	-1.64	20.49	3.85	28.02	0.00	319	167 Average	VERTICAL
3	2425.14	108.25			76.39	3.87	27.99	0.00	319	167 Average	VERTICAL
4	2425.78	117.49			85.63	3.88	27.98	0.00	319	167 Peak	VERTICAL
5	2483.50	52.07	54.00	-1.93	20.23	3.92	27.92	0.00	319	167 Average	VERTICAL
6	2486.04	66.66	74.00	-7.34	34.82	3.92	27.92	0.00	319	167 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2438.54	103.39			71.54	3.88	27.97	0.00	321	154 Average	VERTICAL
2	2464.50	113.92			82.08	3.90	27.94	0.00	321	154 Peak	VERTICAL
3	2483.50	52.97	54.00	-1.03	21.13	3.92	27.92	0.00	321	154 Average	VERTICAL
4	2484.69	66.77	74.00	-7.23	34.93	3.92	27.92	0.00	321	154 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015 ~ Dec. 13, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.20	65.67	74.00	-8.33	32.35	5.01	28.31	0.00	157	356	Peak	VERTICAL
2	2390.00	52.61	54.00	-1.39	19.29	5.01	28.31	0.00	157	356	Average	VERTICAL
3	2414.80	107.63			74.22	5.05	28.36	0.00	157	356	Average	VERTICAL
4	2416.20	119.21			85.80	5.05	28.36	0.00	157	356	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2382.40	65.30	74.00	-8.70	32.00	5.00	28.30	0.00	164	4	Peak	VERTICAL
2	2389.60	51.70	54.00	-2.30	18.38	5.01	28.31	0.00	164	4	Average	VERTICAL
3	2437.60	107.66			74.20	5.07	28.39	0.00	164	4	Average	VERTICAL
4	2438.20	121.50			88.04	5.07	28.39	0.00	164	4	Peak	VERTICAL
5	2485.60	52.77	54.00	-1.23	19.17	5.12	28.48	0.00	164	4	Average	VERTICAL
6	2486.80	66.54	74.00	-7.46	32.94	5.12	28.48	0.00	164	4	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2456.60	117.07			83.55	5.09	28.43	0.00	169	26	Peak	VERTICAL
2	2463.80	103.86			70.32	5.10	28.44	0.00	169	26	Average	VERTICAL
3	2483.50	52.79	54.00	-1.21	19.19	5.12	28.48	0.00	169	26	Average	VERTICAL
4	2484.80	69.05	74.00	-4.95	35.45	5.12	28.48	0.00	169	26	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 28, 2015		
Test Mode	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.20	72.00	74.00	-2.00	38.68	5.01	28.31	0.00	155	12	Peak	VERTICAL
2	2389.60	52.54	54.00	-1.46	19.22	5.01	28.31	0.00	155	12	Average	VERTICAL
3	2409.60	112.11			78.72	5.04	28.35	0.00	155	12	Peak	VERTICAL
4	2414.80	100.10			66.69	5.05	28.36	0.00	155	12	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	65.54	74.00	-8.46	32.22	5.01	28.31	0.00	144	2	Peak	VERTICAL
2	2390.00	52.96	54.00	-1.04	19.64	5.01	28.31	0.00	144	2	Average	VERTICAL
3	2427.00	113.74			80.30	5.06	28.38	0.00	144	2	Peak	VERTICAL
4	2428.60	109.06			75.62	5.06	28.38	0.00	144	2	Average	VERTICAL
5	2483.80	50.82	54.00	-3.18	17.22	5.12	28.48	0.00	144	2	Average	VERTICAL
6	2484.20	61.90	74.00	-12.10	28.30	5.12	28.48	0.00	144	2	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2458.40	98.66			65.14	5.09	28.43	0.00	146	16	Average	VERTICAL
2	2460.00	111.43			77.91	5.09	28.43	0.00	146	16	Peak	VERTICAL
3	2484.40	52.96	54.00	-1.04	19.36	5.12	28.48	0.00	146	16	Average	VERTICAL
4	2486.00	66.33	74.00	-7.67	32.73	5.12	28.48	0.00	146	16	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

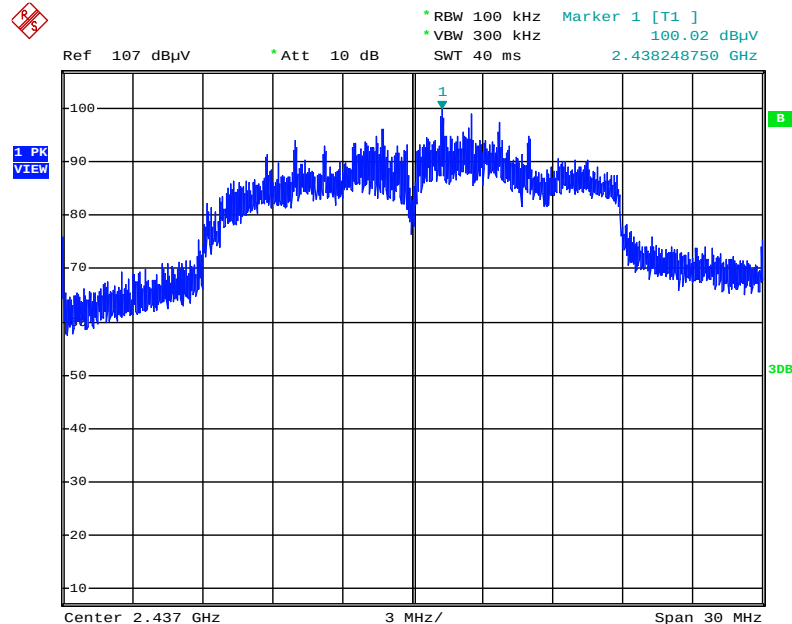


Date: 9.DEC.2015 21:55:30

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

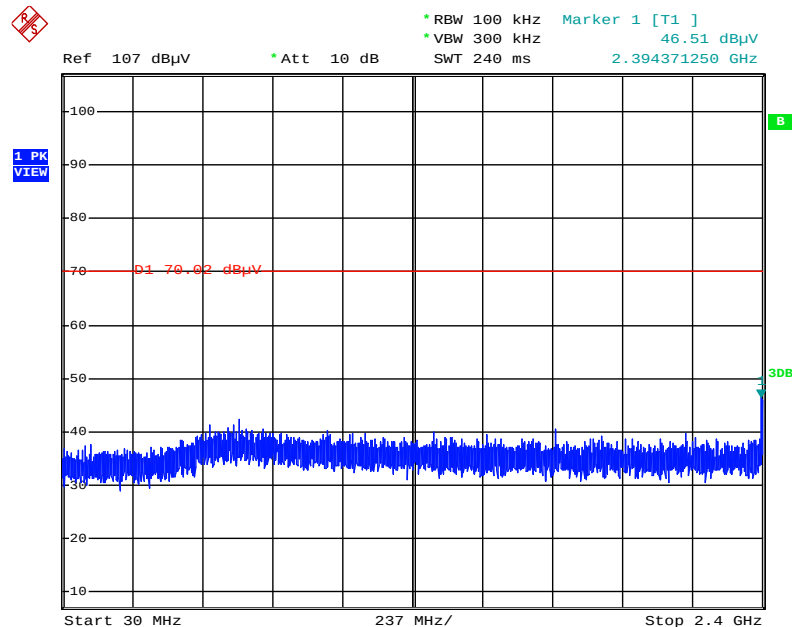


Date: 9.DEC.2015 21:56:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

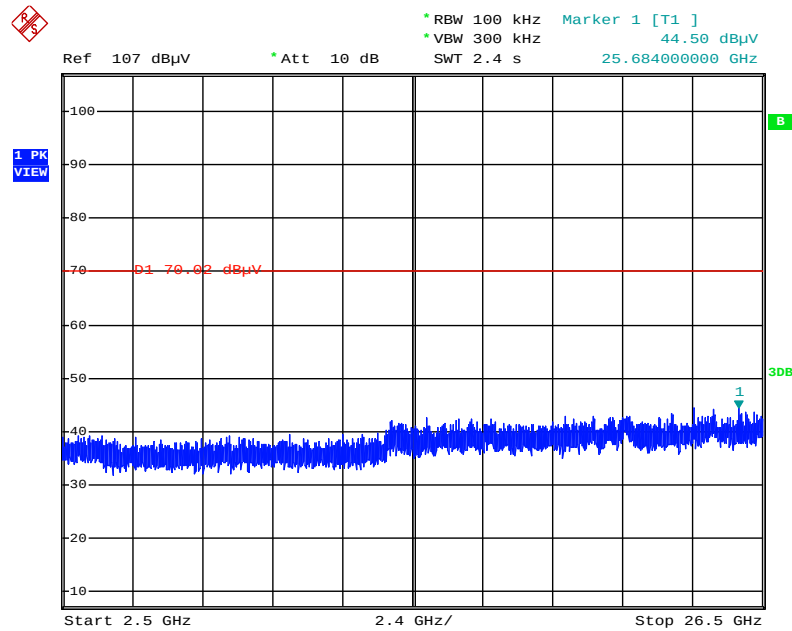


Date: 9.DEC.2015 21:57:18

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

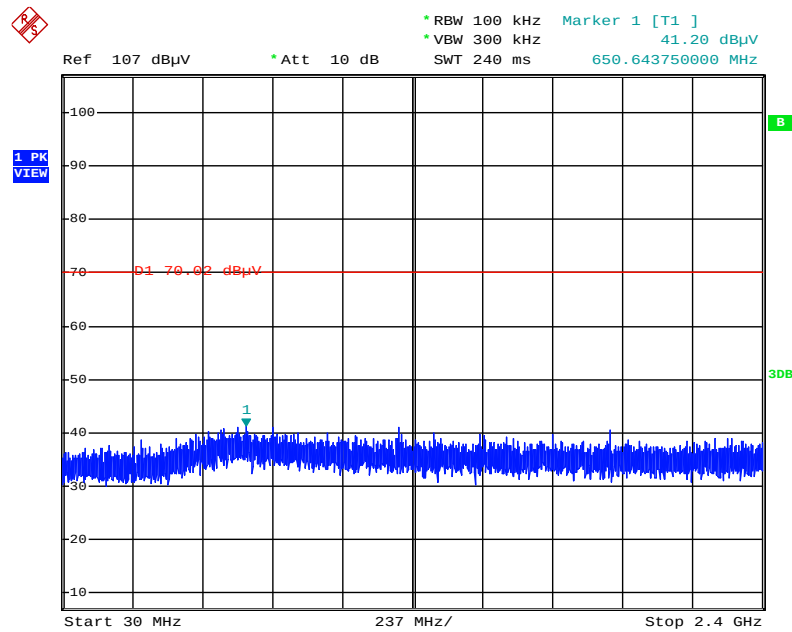


Date: 9.DEC.2015 21:58:33

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

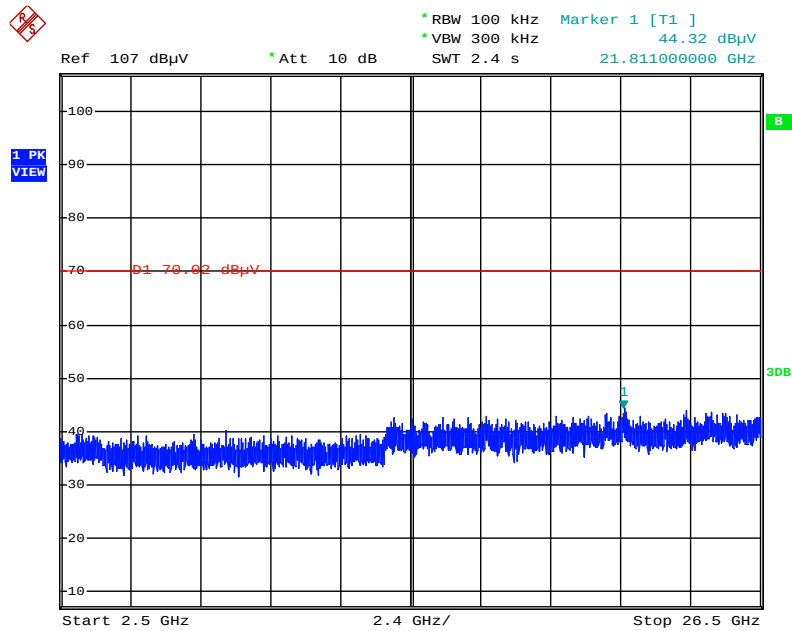


Date: 9.DEC.2015 21:58:14

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

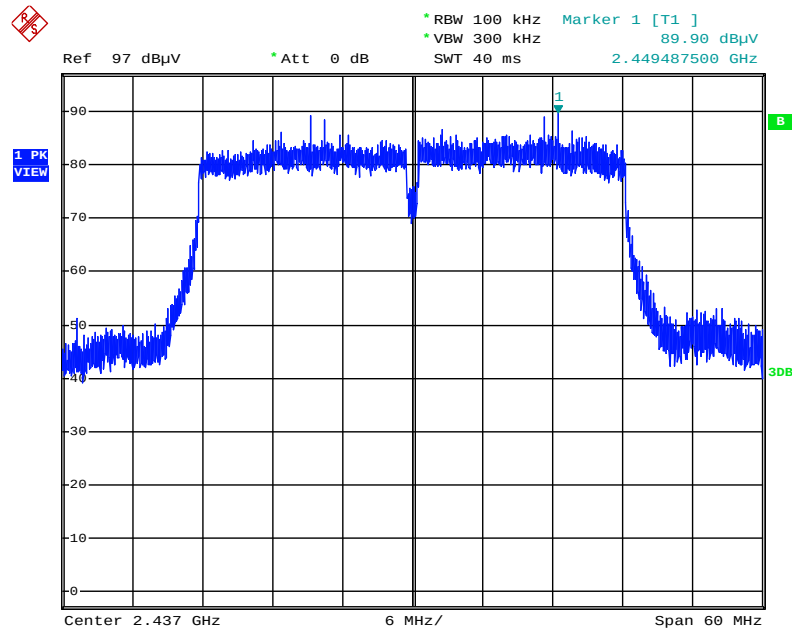


Date: 9.DEC.2015 22:00:03

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

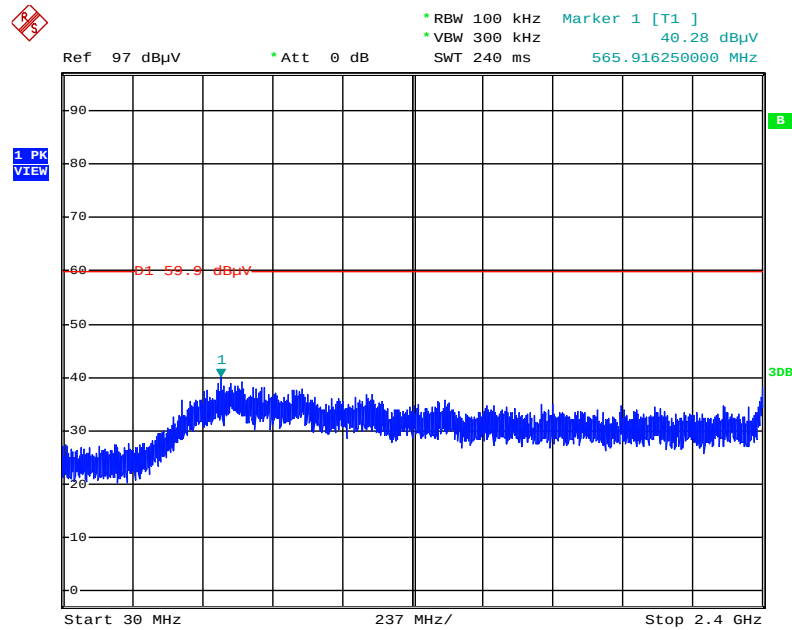


Date: 9.DEC.2015 22:01:51

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

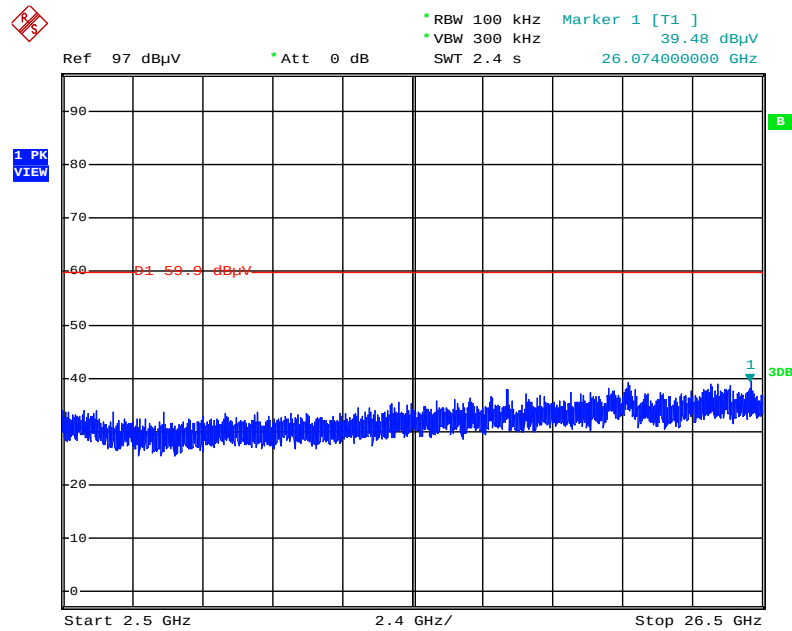


Date: 9.DEC.2015 22:02:11

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

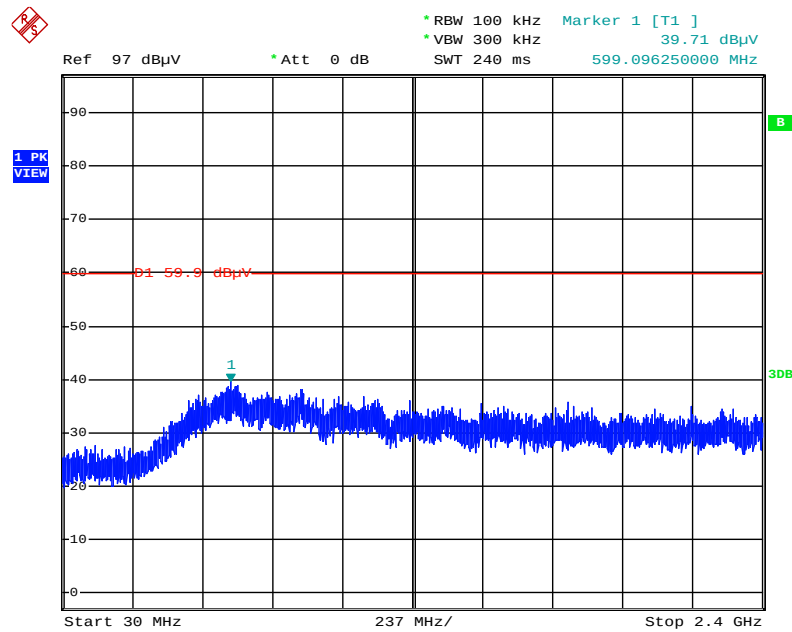

Date: 9.DEC.2015 22:04:33


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

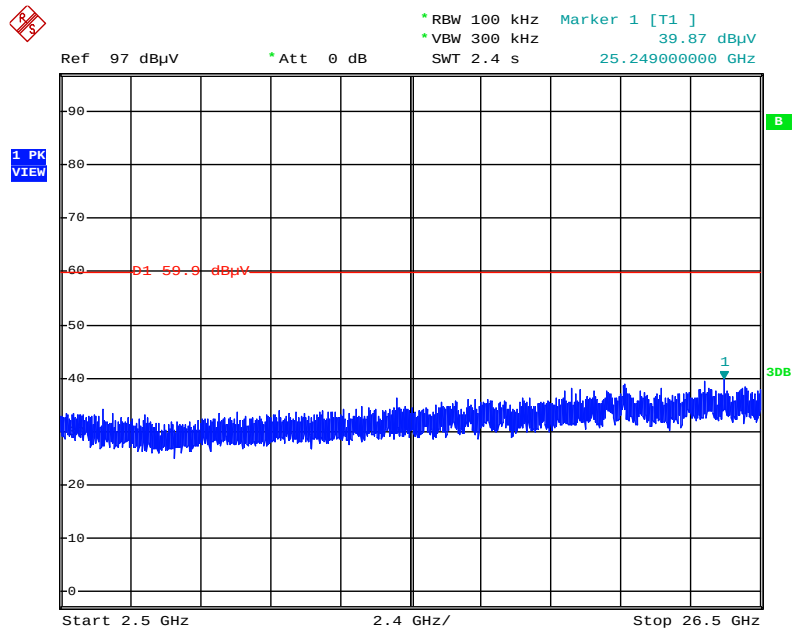

Date: 9.DEC.2015 22:04:09


Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

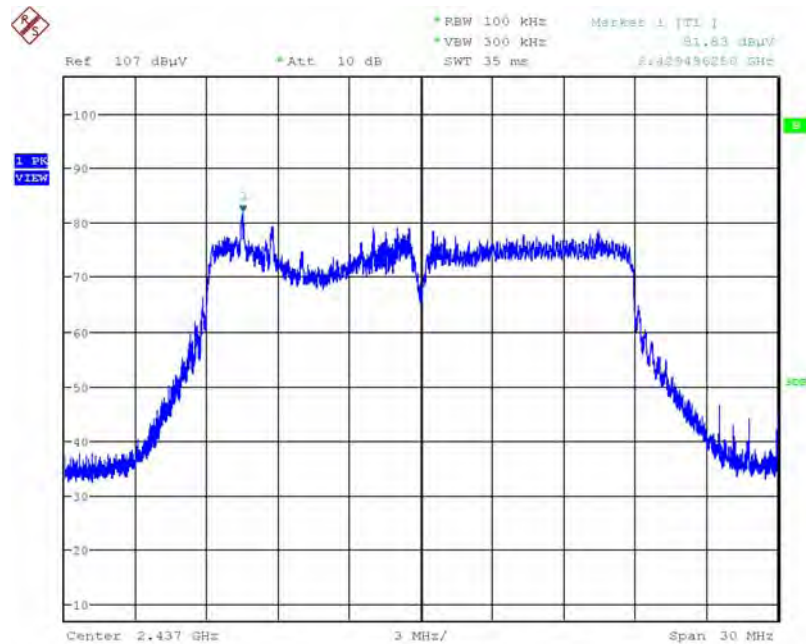


Date: 28.NOV.2015 22:51:56

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

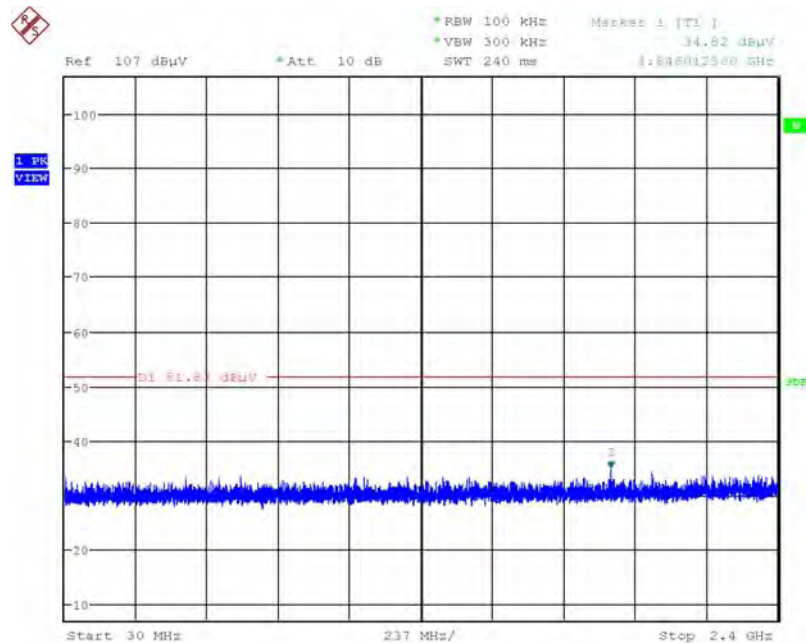


Date: 28.NOV.2015 22:53:28

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

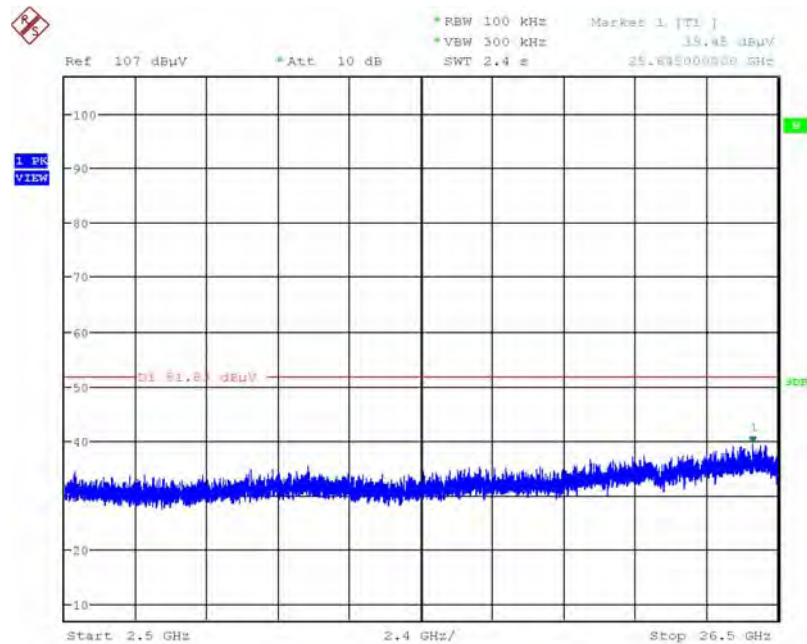


Date: 28.NOV.2015 22:53:57

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

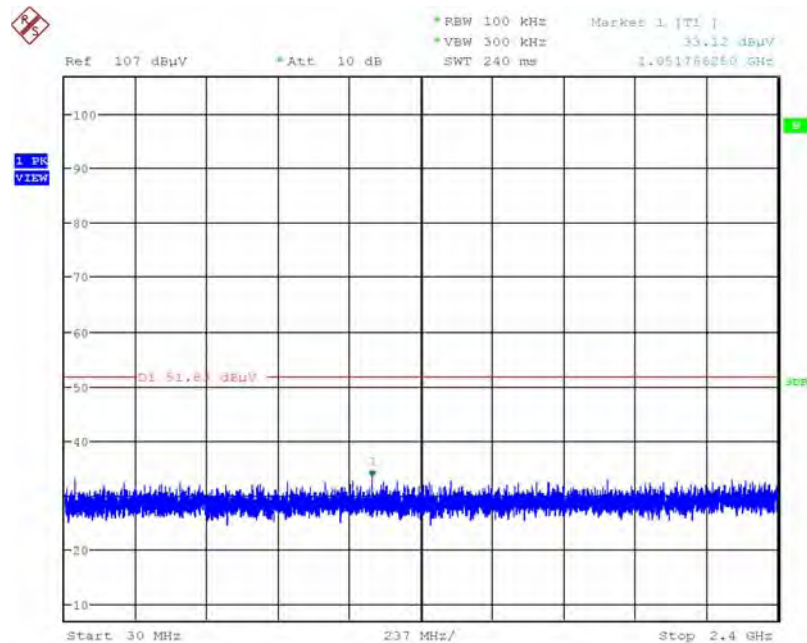


Date: 28.NOV.2015 22:54:52

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

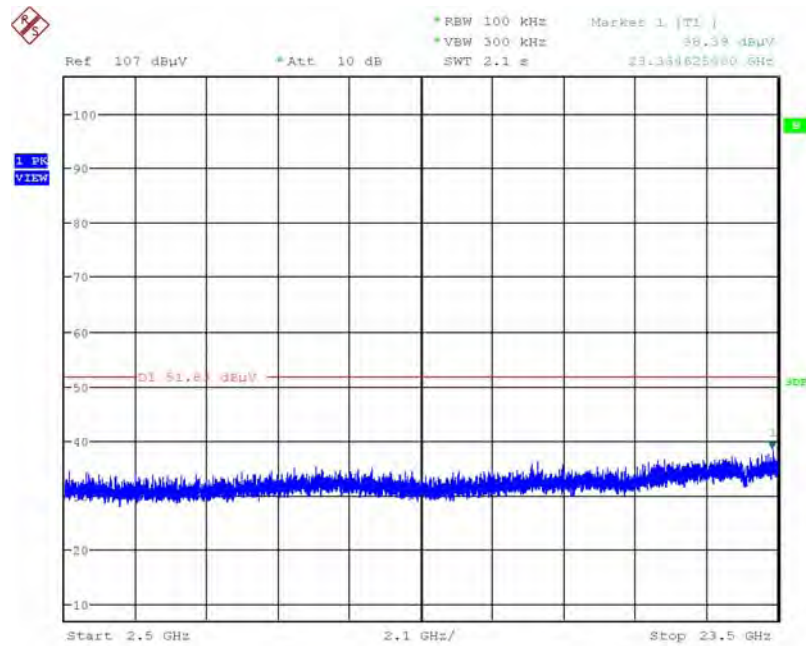


Date: 28.NOV.2015 22:55:23

Plot on Configuration 802.11ac MCS0/Nss1 VHT40 / Reference Level

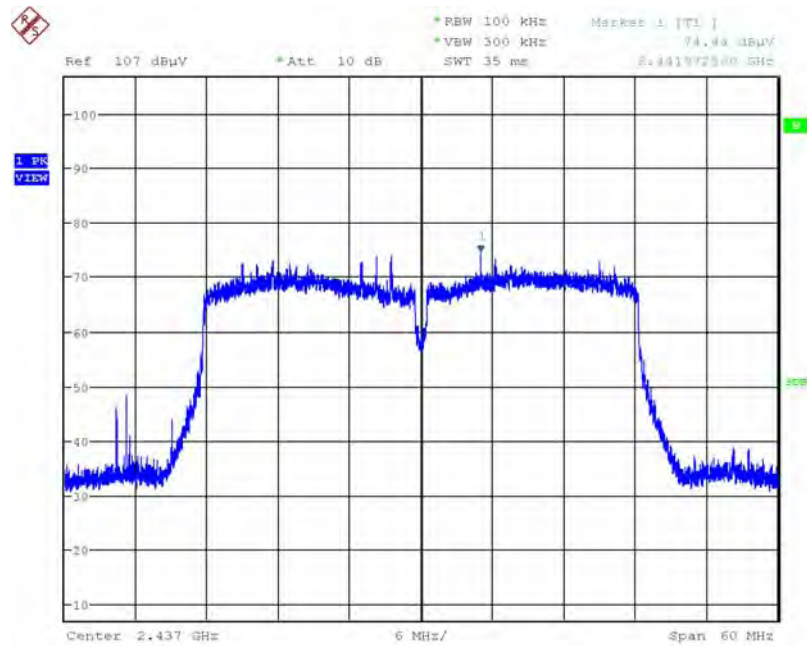


Date: 28.NOV.2015 22:57:19

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

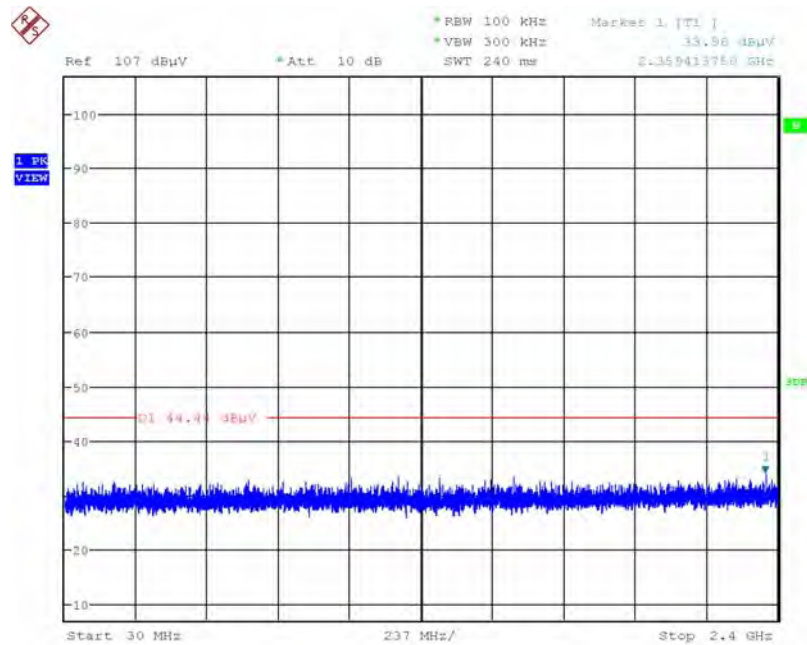


Date: 28.NOV.2015 22:58:35

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

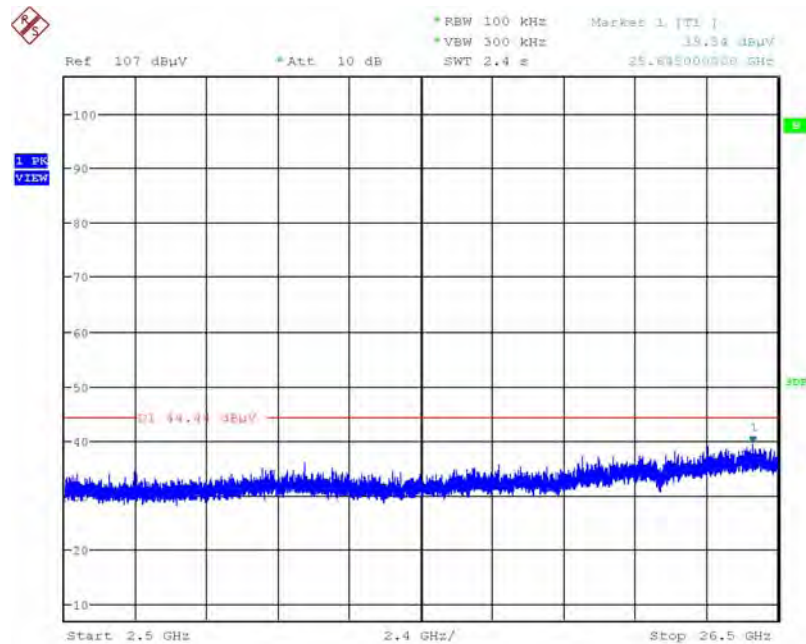


Date: 28.NOV.2015 22:59:11

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

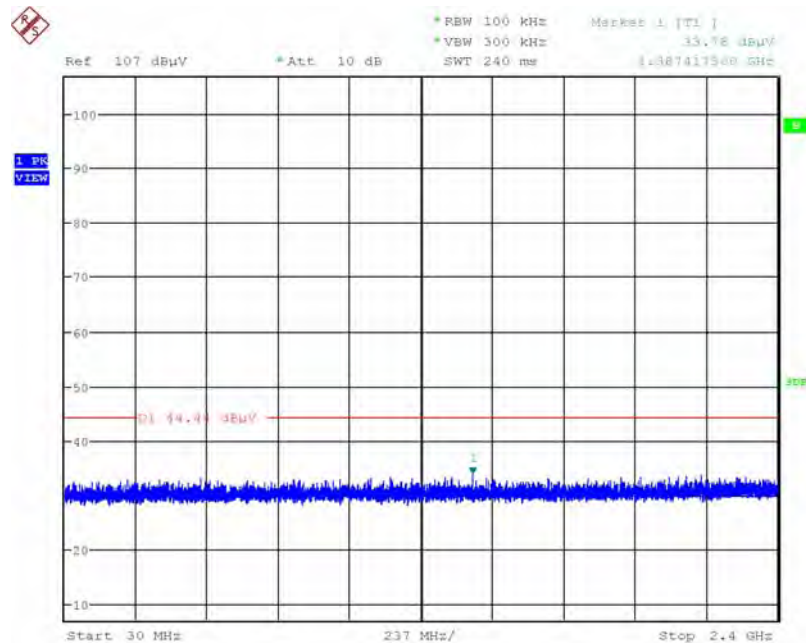

Date: 28.NOV.2015 23:39:08


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

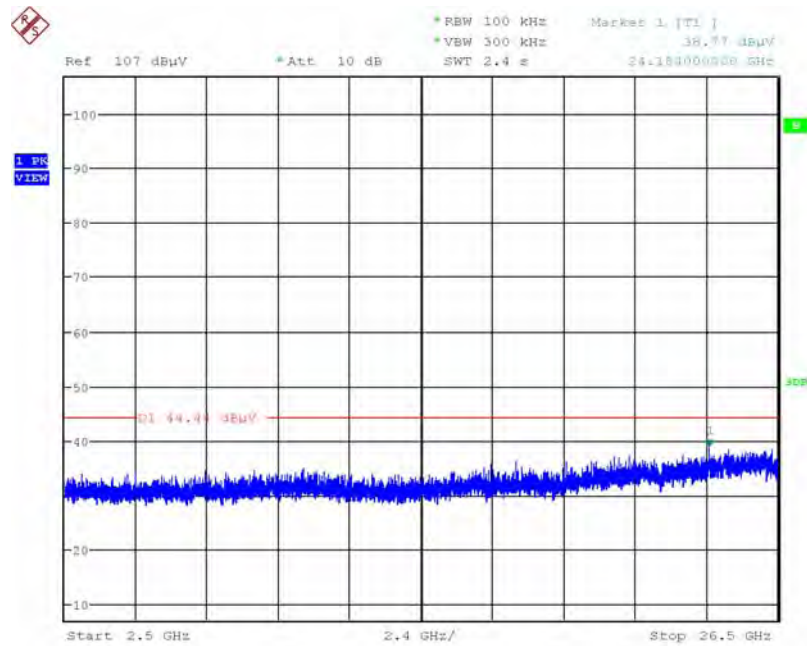

Date: 28.NOV.2015 23:39:38


Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

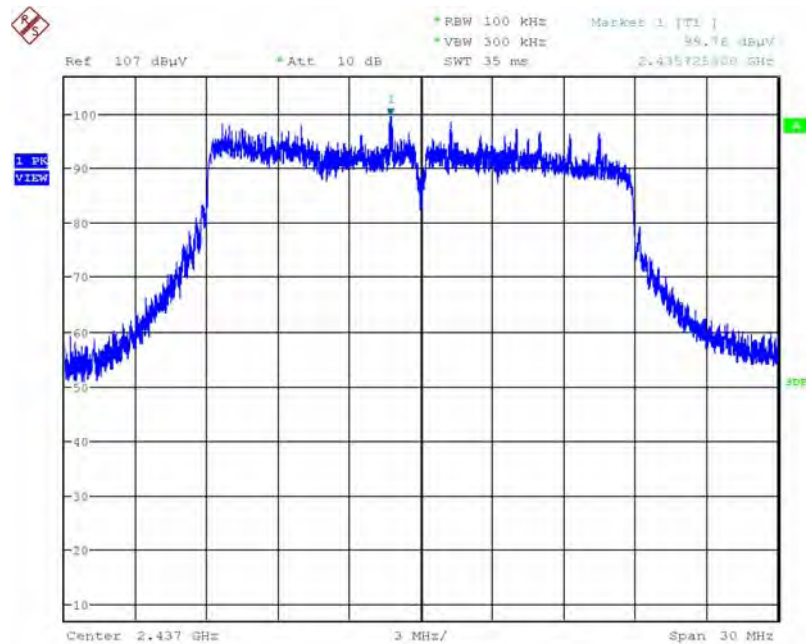

Date: 28.NOV.2015 14:57:29

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

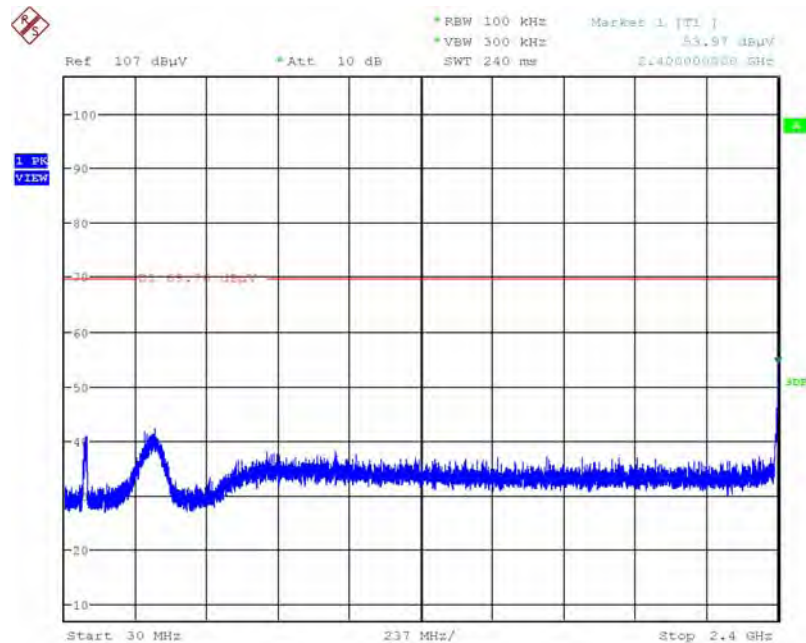

Date: 28.NOV.2015 14:58:41



Ref 107 dBuV * Att. 10 dB * RBW 100 kHz * VBW 300 kHz * SWT 2.4 s Market 1 [T1] 41.27 dBuV

Start 2.5 GHz 2.4 GHz/ Stop 26.5 GHz

1 PK VIEW


Ref 107 dBuV *Att. 10 dB *RBW 100 kHz *VBW 300 kHz SWT 240 ms Marker 1 [T1] 42.64 dBuV 314.103750000 MHz

1 PR VIEW

Start 30 MHz 237 MHz/ Stop 2.4 GHz


Issued Date : Jan. 12, 2016

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

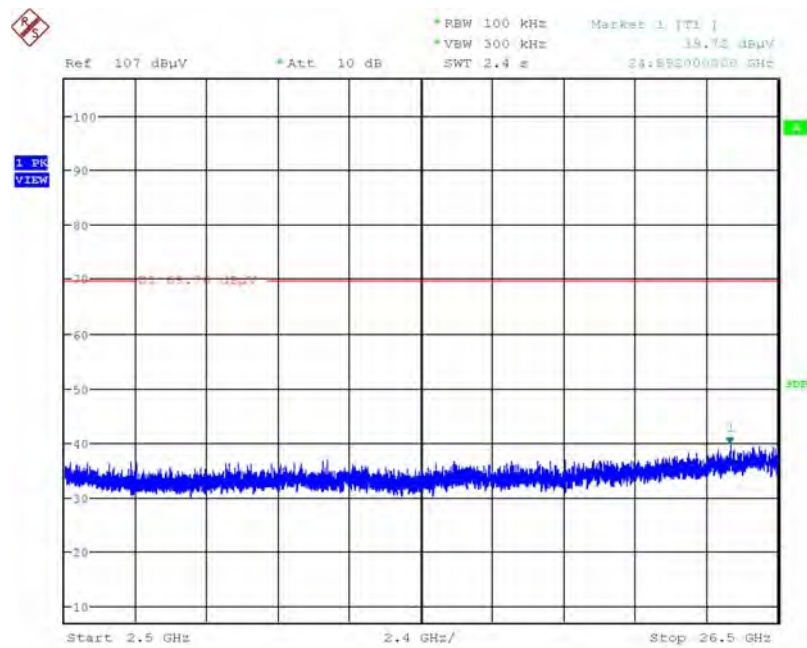


Date: 28.NOV.2015 15:00:36

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

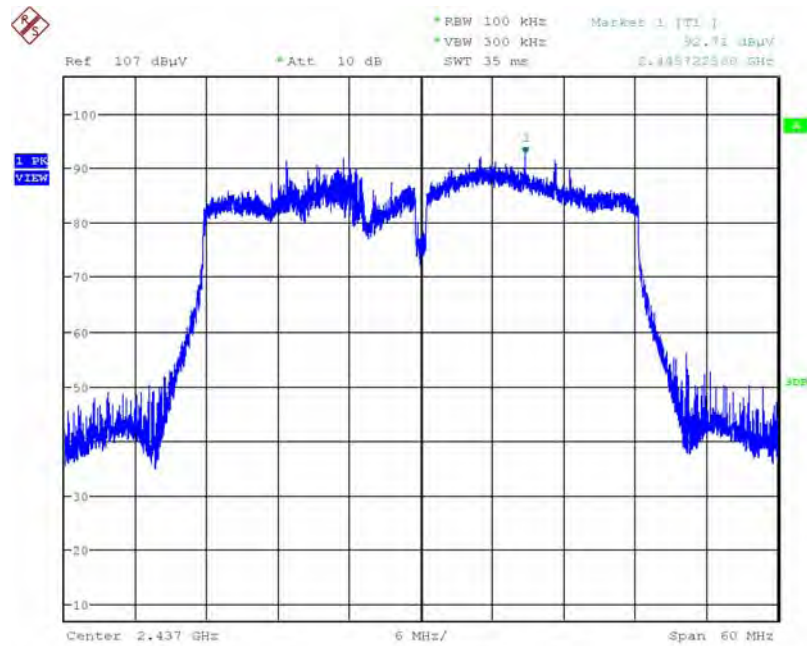


Date: 28.NOV.2015 15:02:04

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

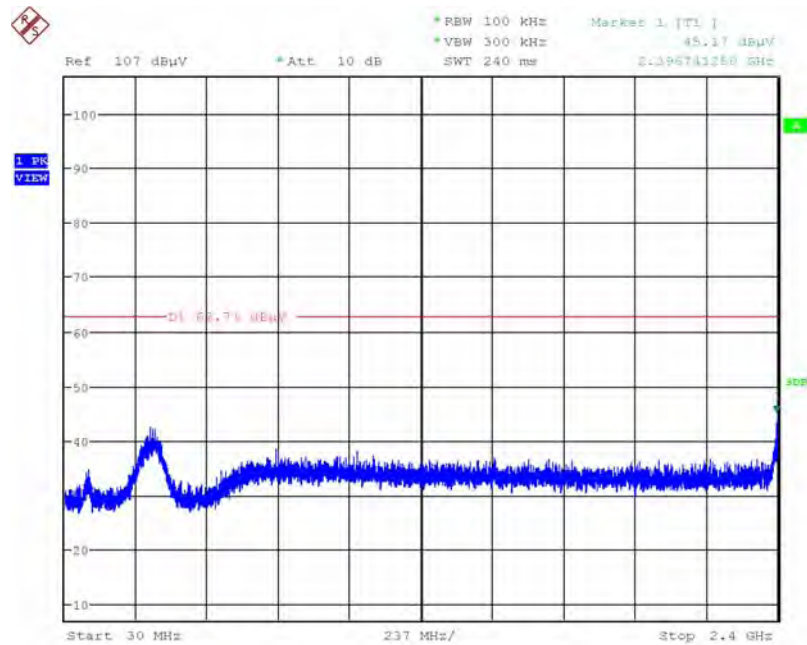


Date: 28.NOV.2015 15:04:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

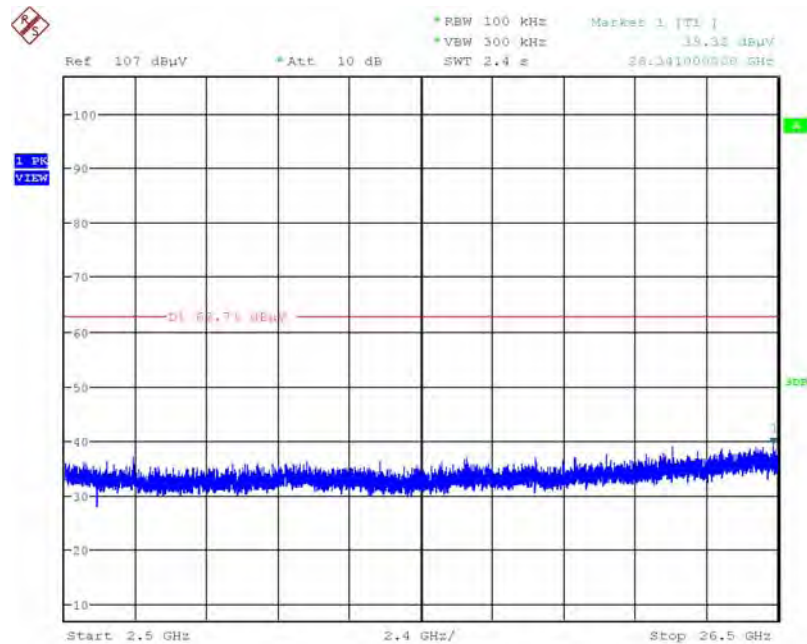


Date: 28.NOV.2015 15:04:49

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

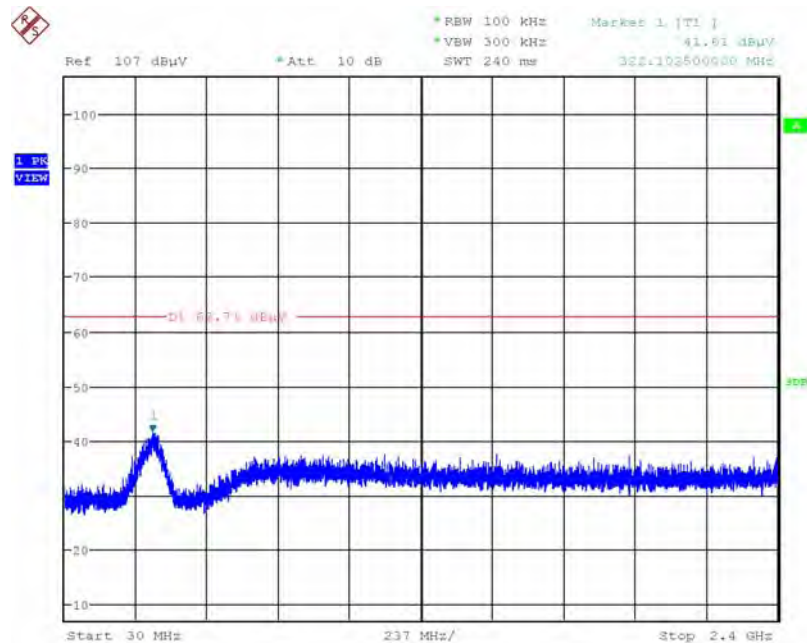

Date: 28.NOV.2015 15:05:44


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

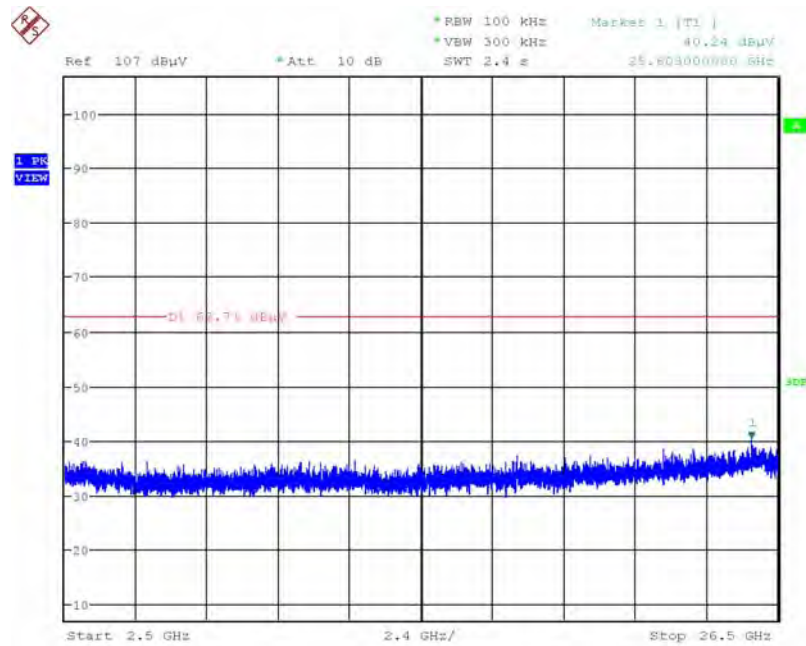

Date: 28.NOV.2015 15:06:07


Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

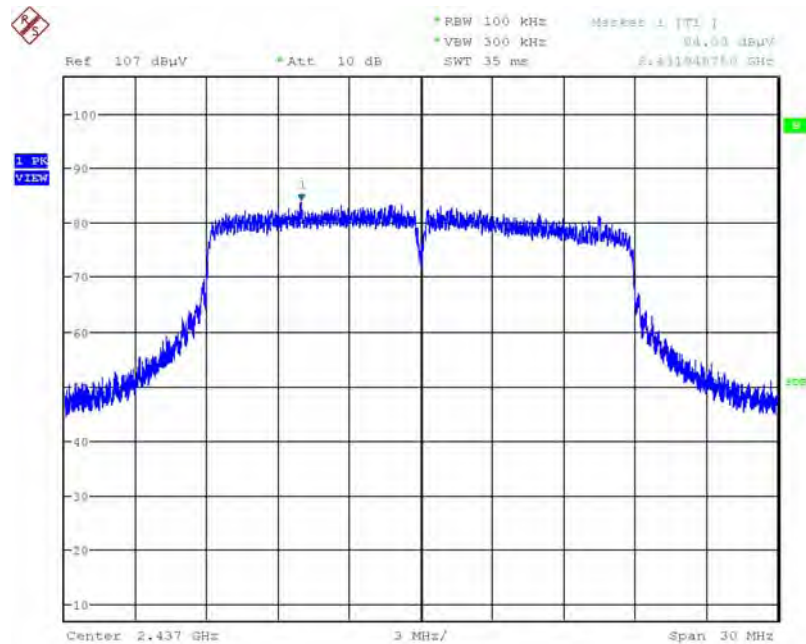


Date: 28.NOV.2015 18:27:25

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

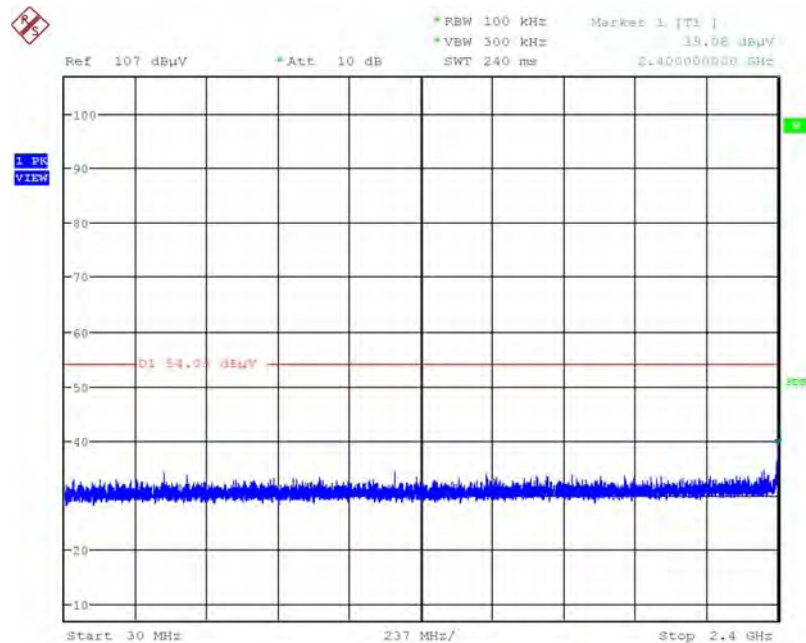


Date: 28.NOV.2015 18:29:15

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

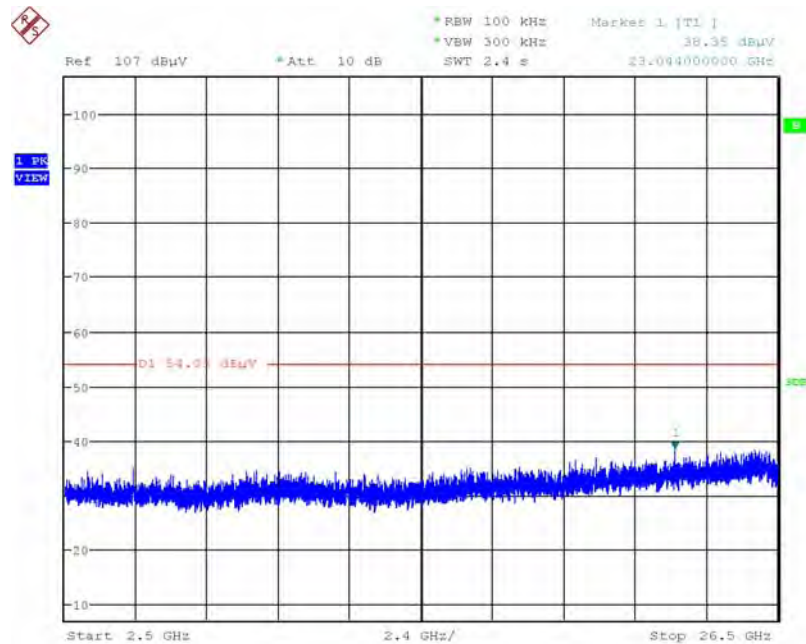


Date: 28.NOV.2015 18:29:43

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

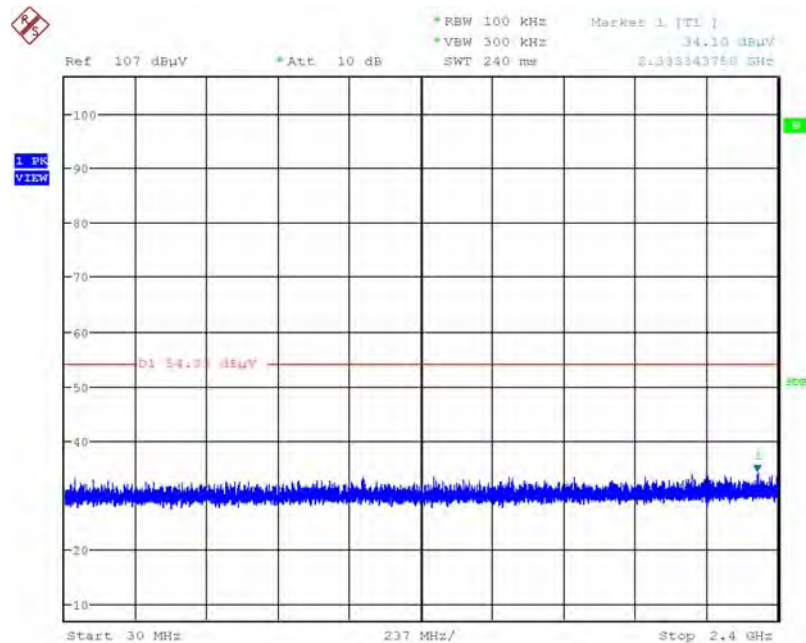


Date: 28.NOV.2015 18:30:57

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

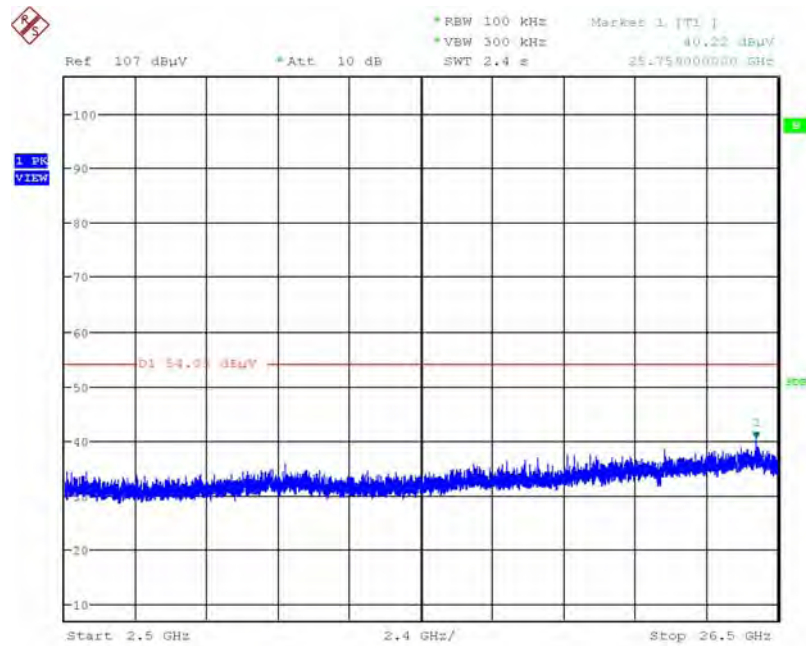


Date: 28.NOV.2015 18:31:31

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

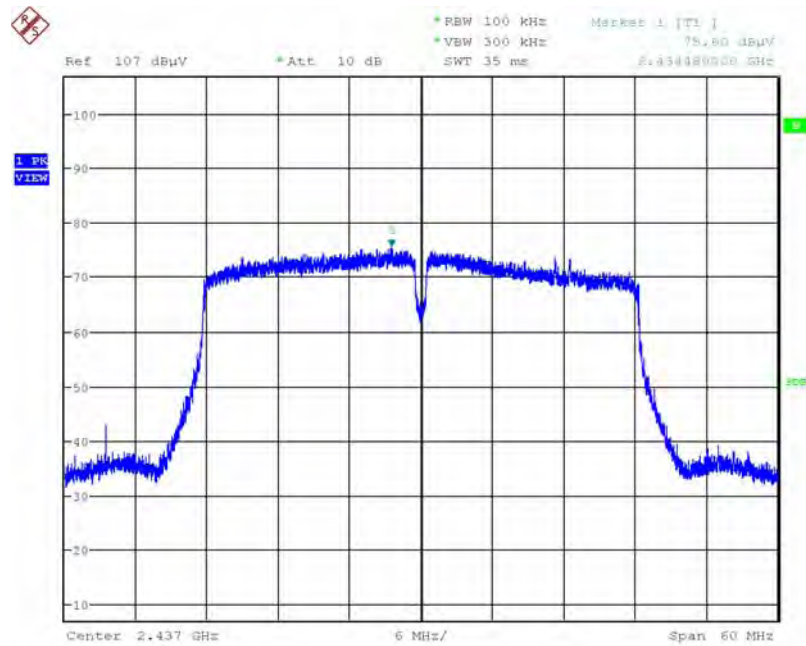


Date: 28.NOV.2015 18:34:10

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

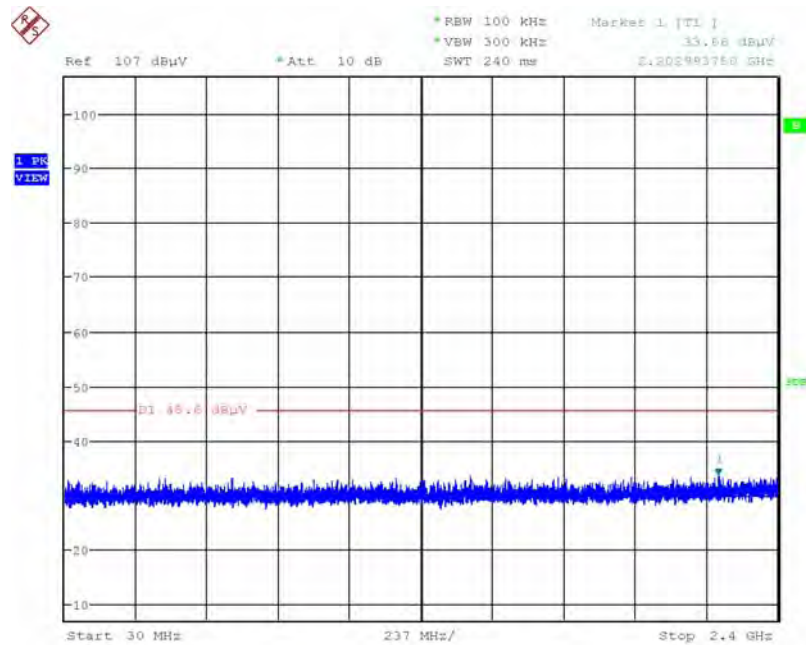


Date: 28.NOV.2015 18:36:09

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

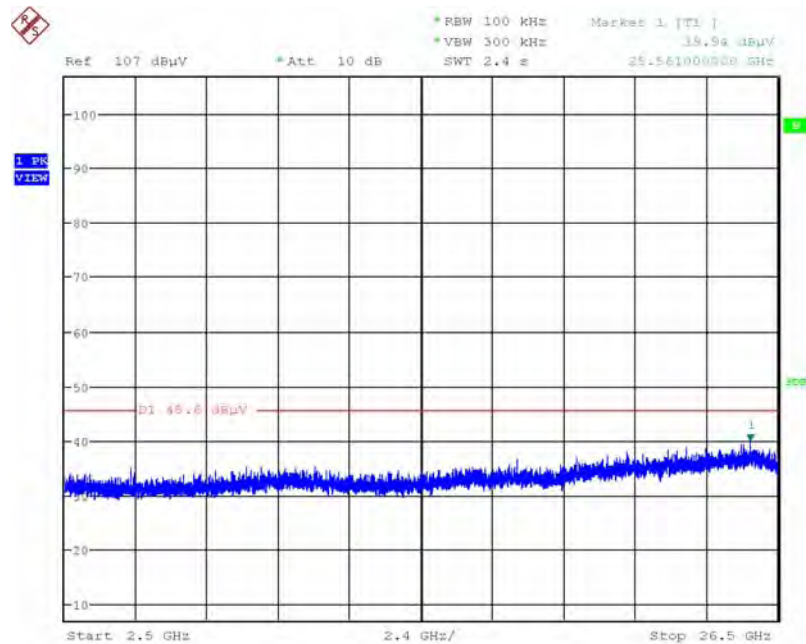


Date: 28.NOV.2015 18:36:53

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

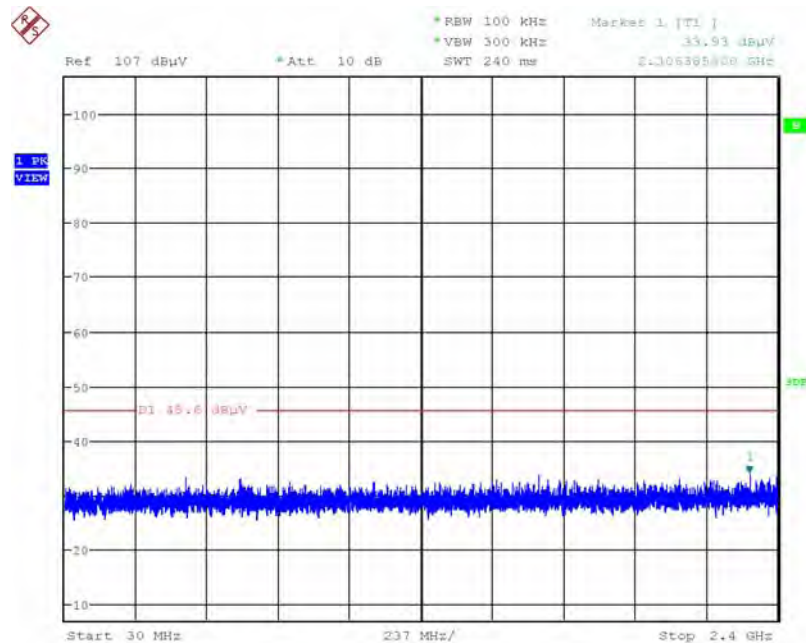

Date: 28.NOV.2015 18:37:58


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

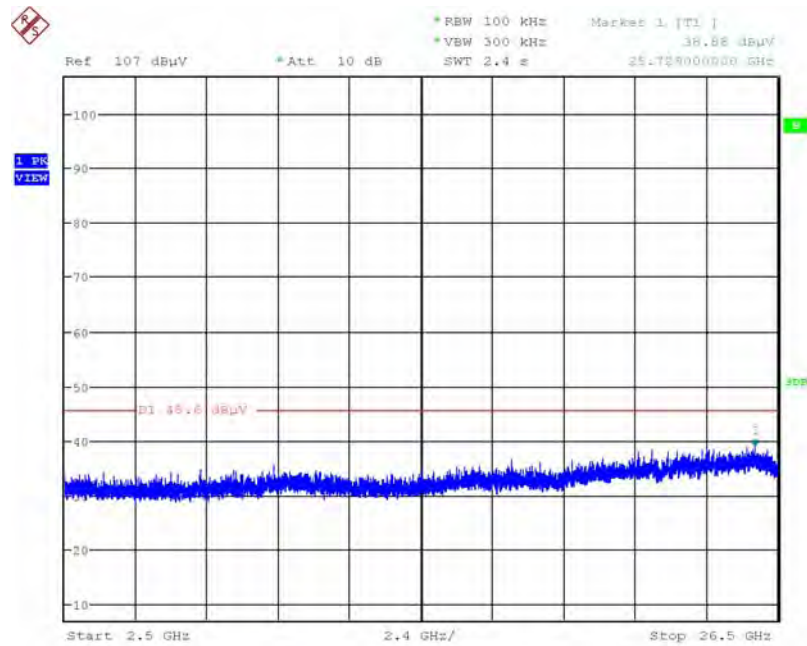

Date: 28.NOV.2015 18:38:40


Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

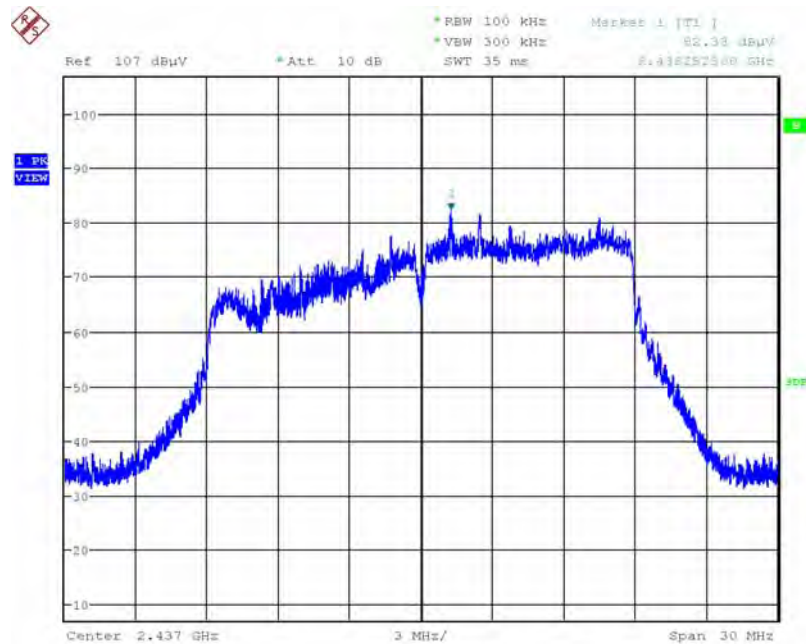


Date: 29.NOV.2015 00:36:22

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

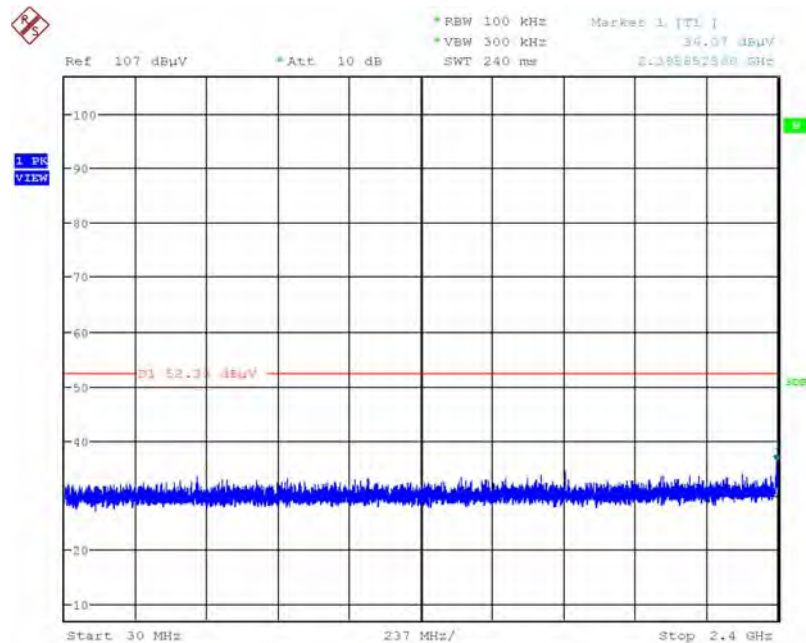


Date: 29.NOV.2015 00:37:55

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

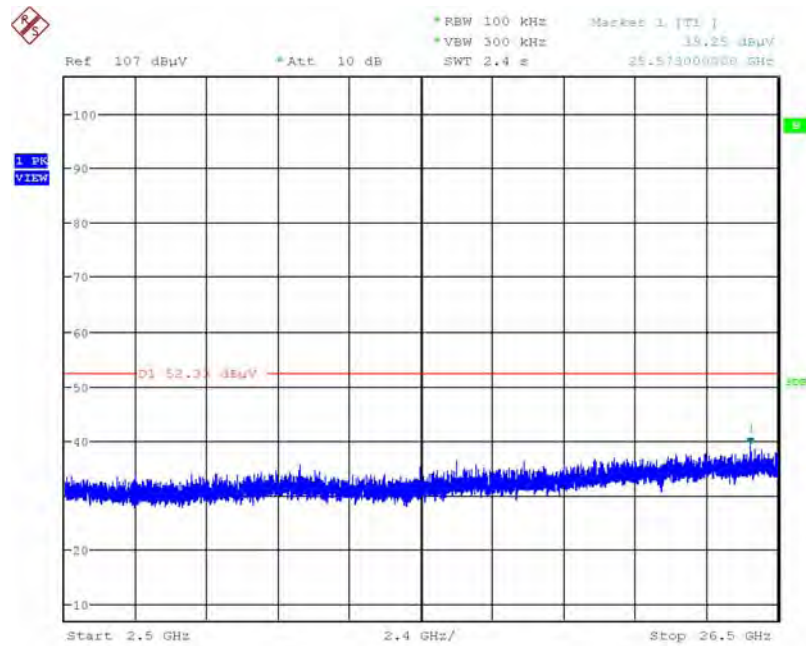


Date: 29.NOV.2015 00:38:21

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

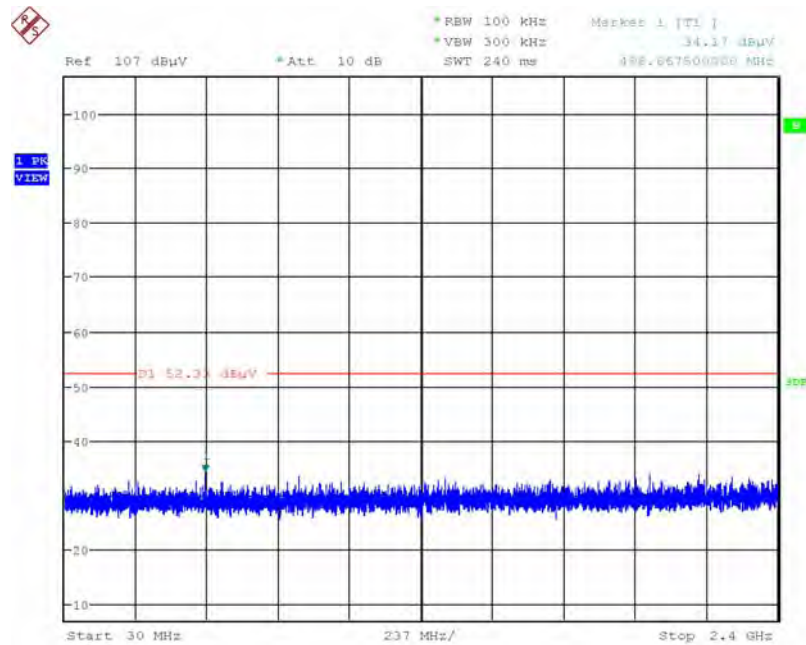


Date: 29.NOV.2015 00:39:14

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

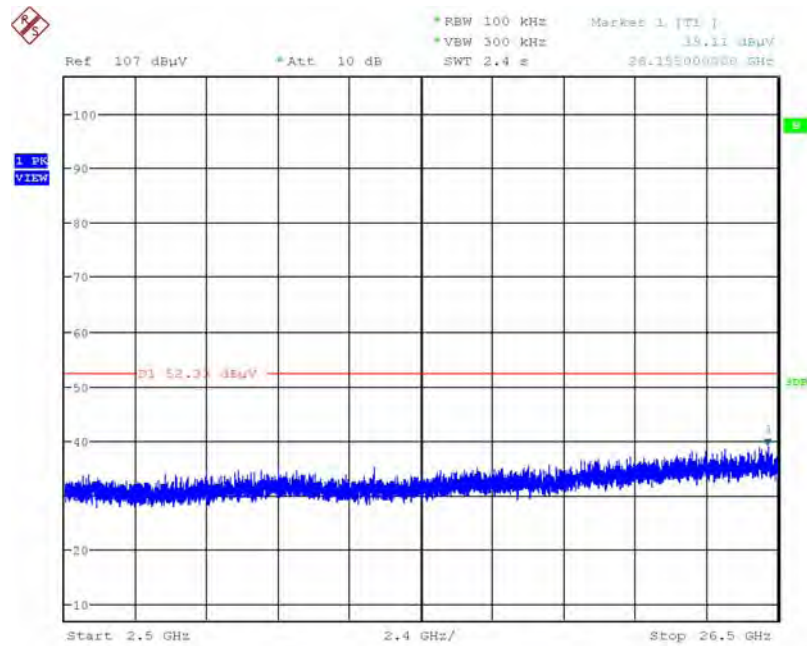


Date: 29.NOV.2015 00:39:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

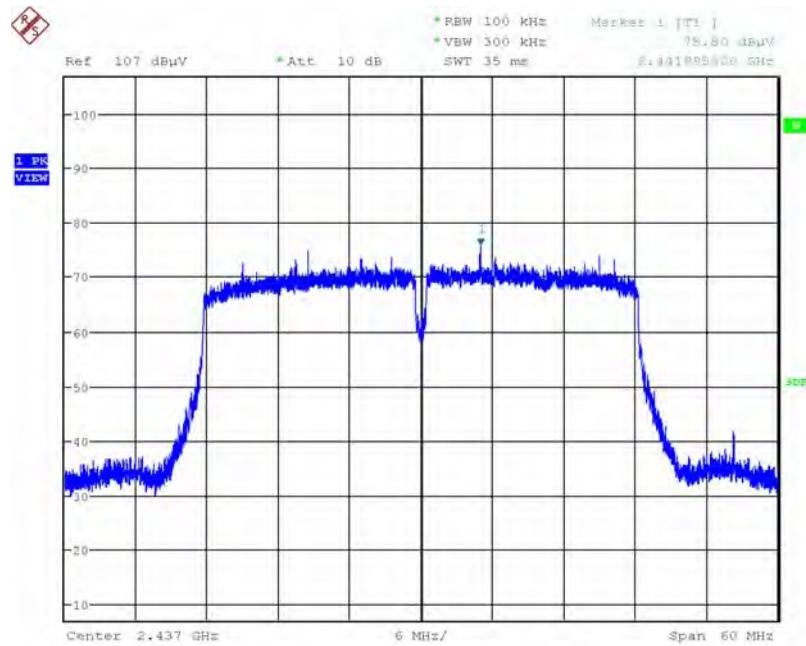


Date: 29.NOV.2015 00:41:11

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

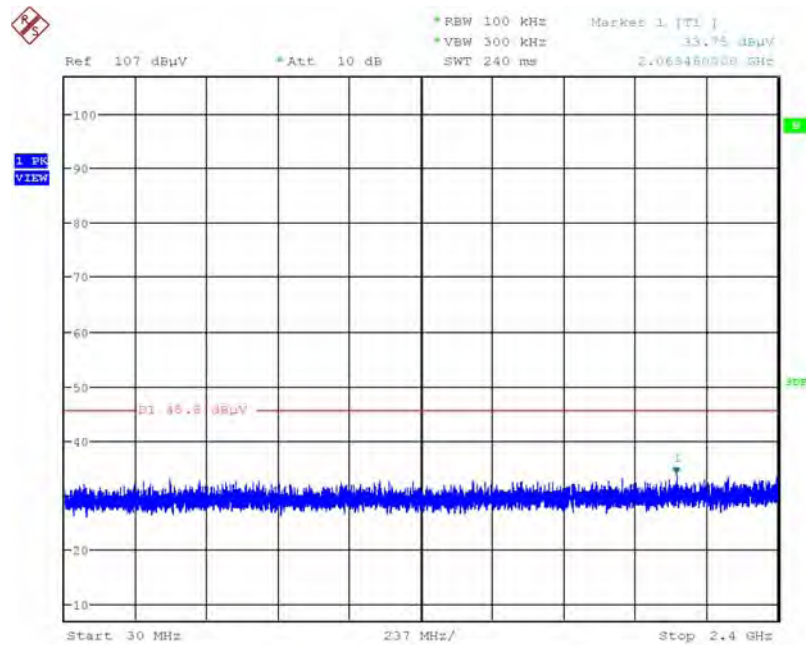


Date: 29.NOV.2015 00:42:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

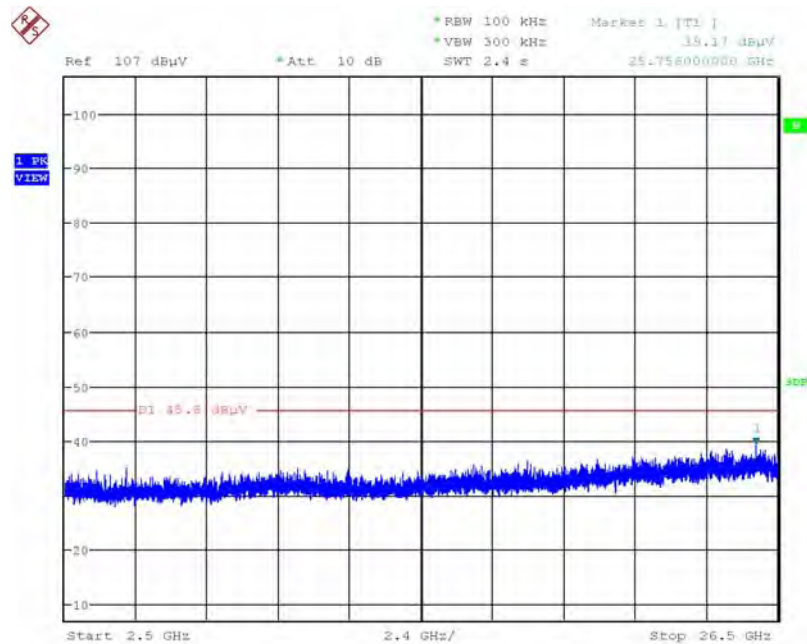


Date: 29.NOV.2015 00:42:47

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

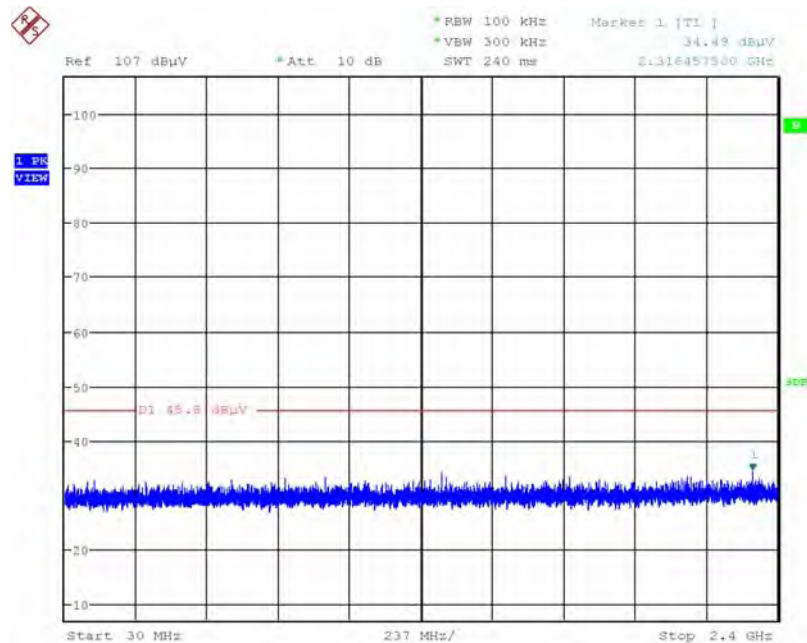

Date: 29.NOV.2015 00:43:43


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

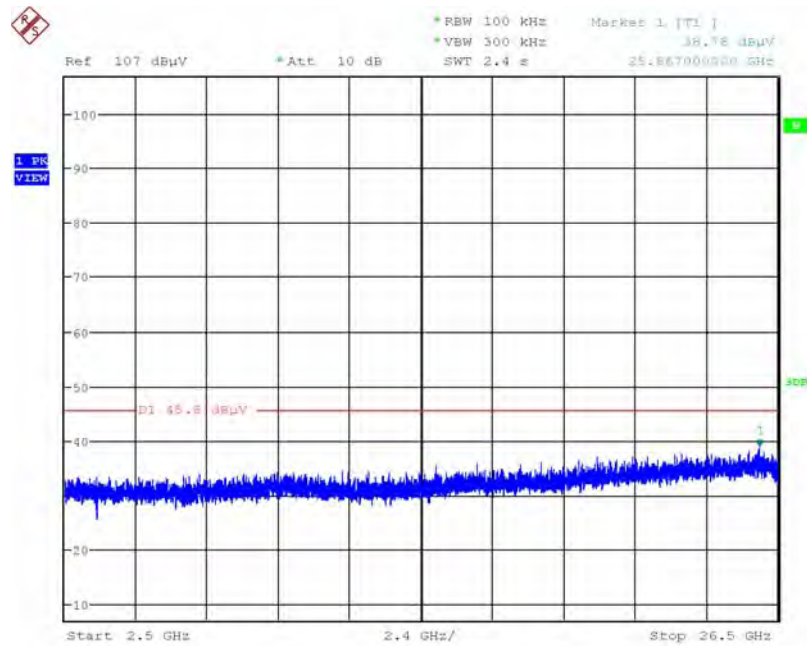

Date: 29.NOV.2015 00:44:13


Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

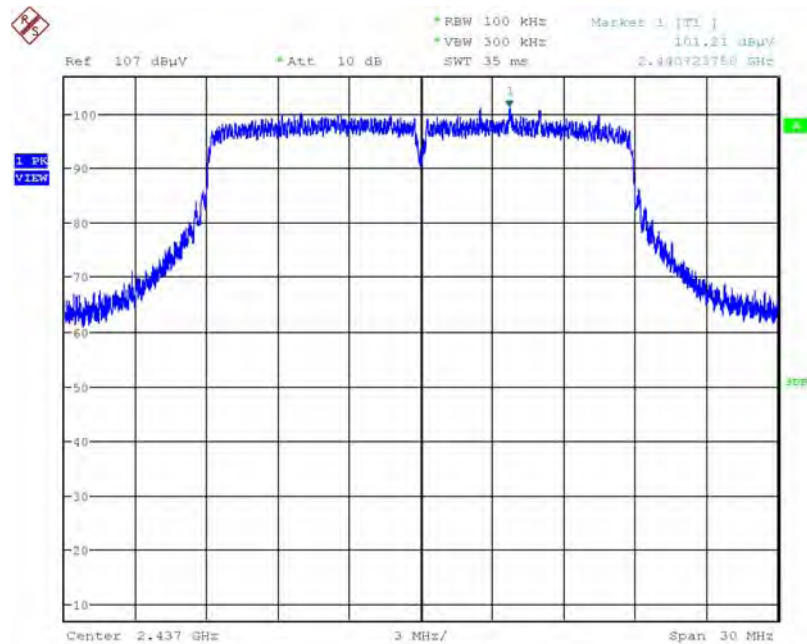


Date: 28.NOV.2015 12:06:05

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

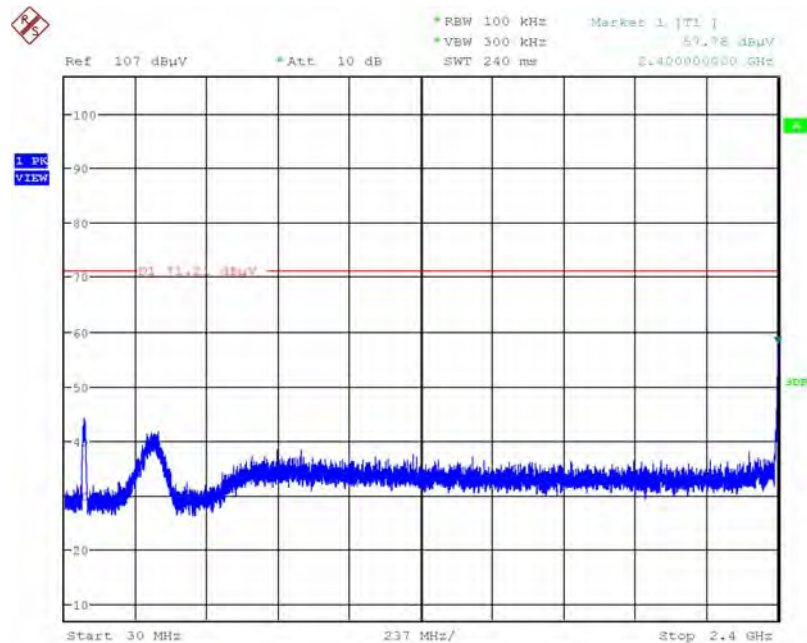


Date: 28.NOV.2015 12:07:18

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

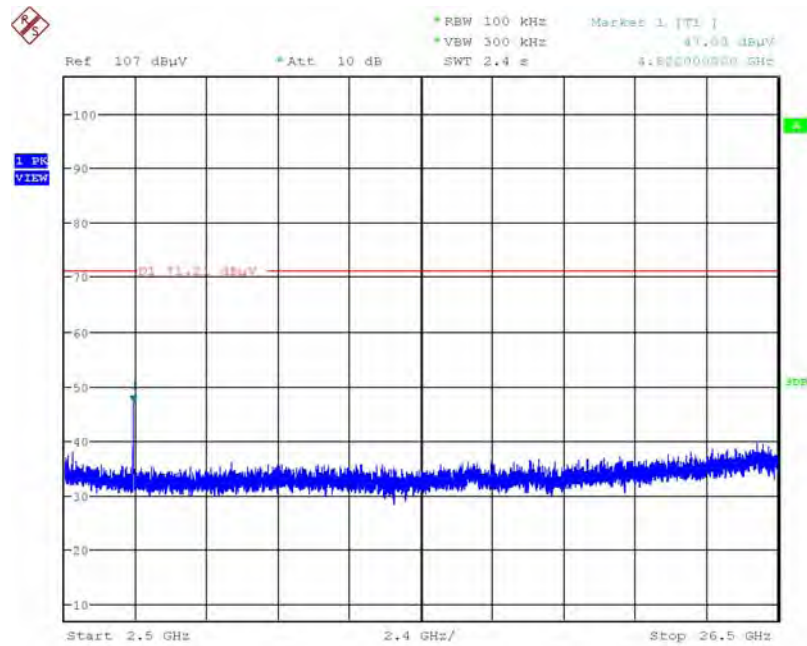


Date: 28.NOV.2015 12:07:42

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

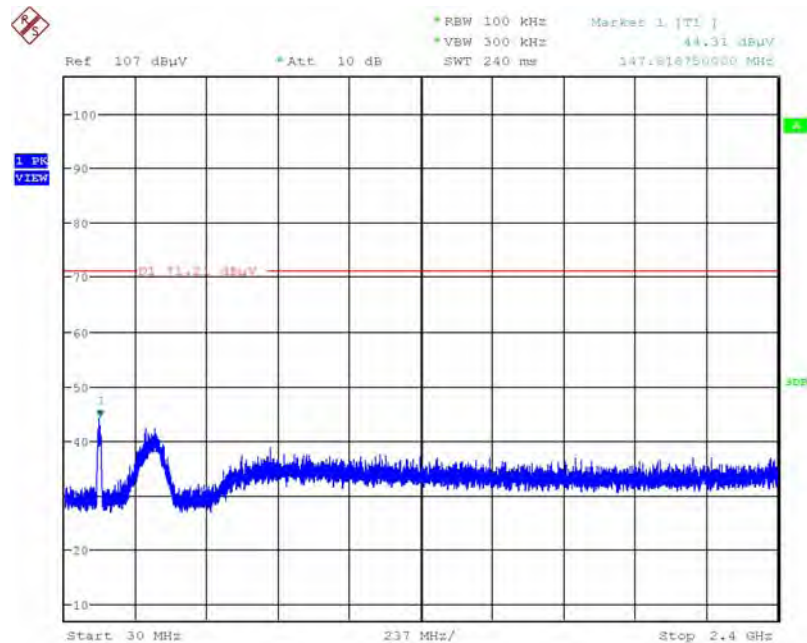


Date: 28.NOV.2015 12:08:32

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

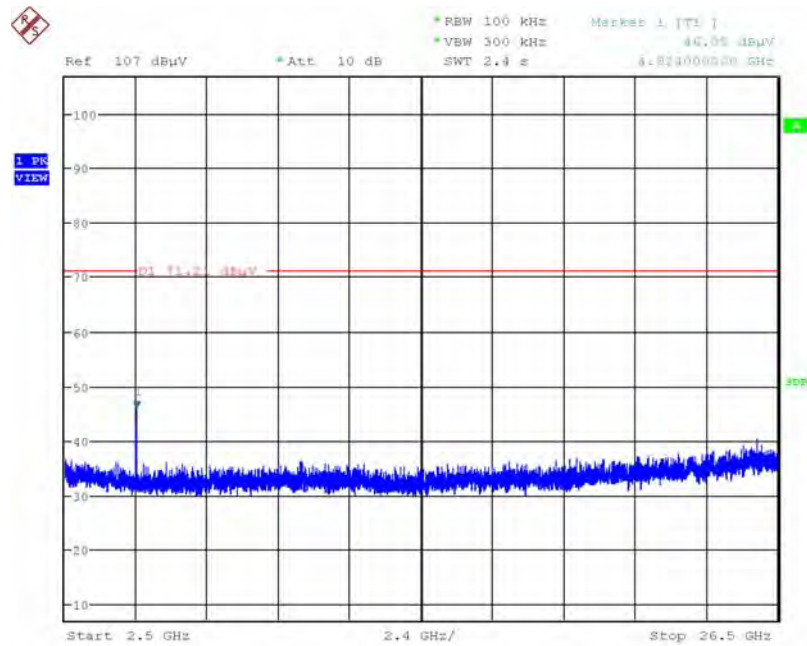


Date: 28.NOV.2015 12:08:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

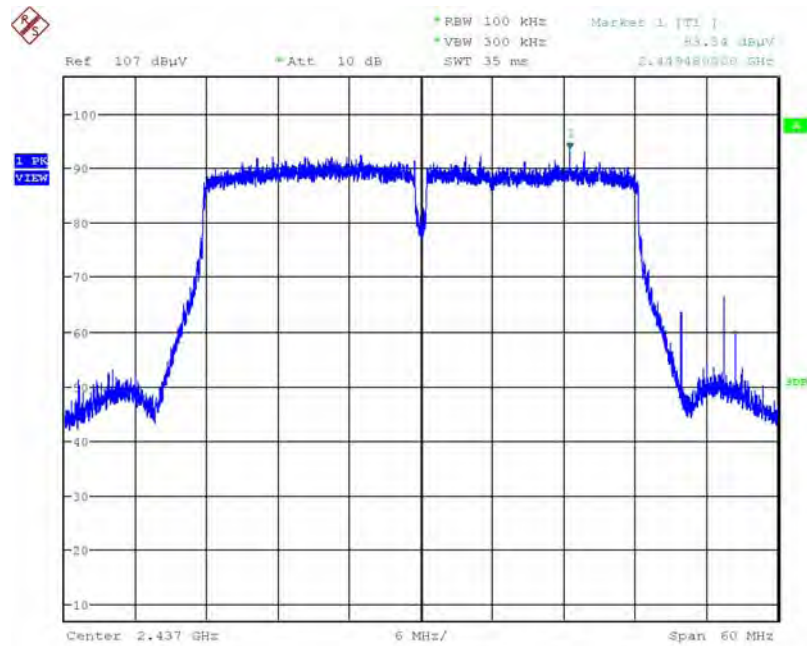


Date: 28.NOV.2015 12:11:28

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

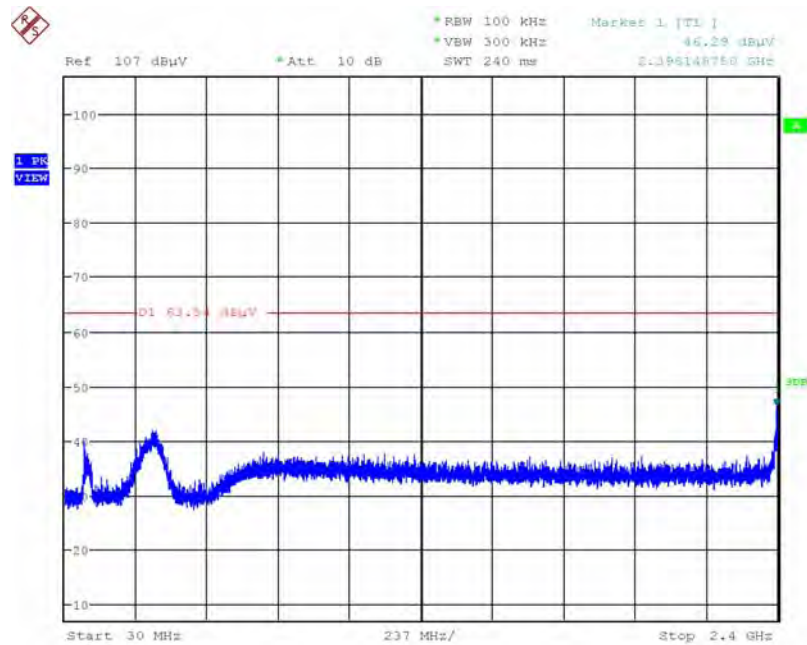


Date: 28.NOV.2015 12:14:28

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

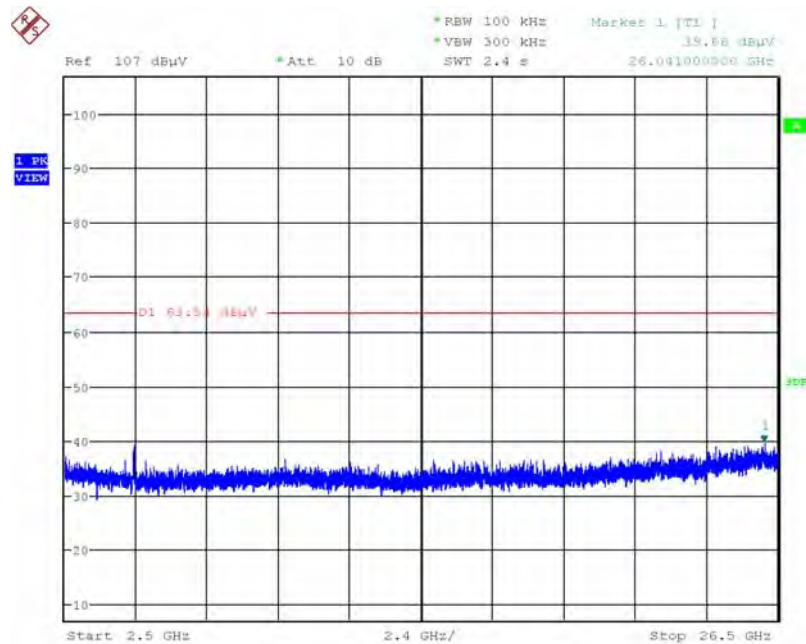


Date: 28.NOV.2015 12:14:53

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

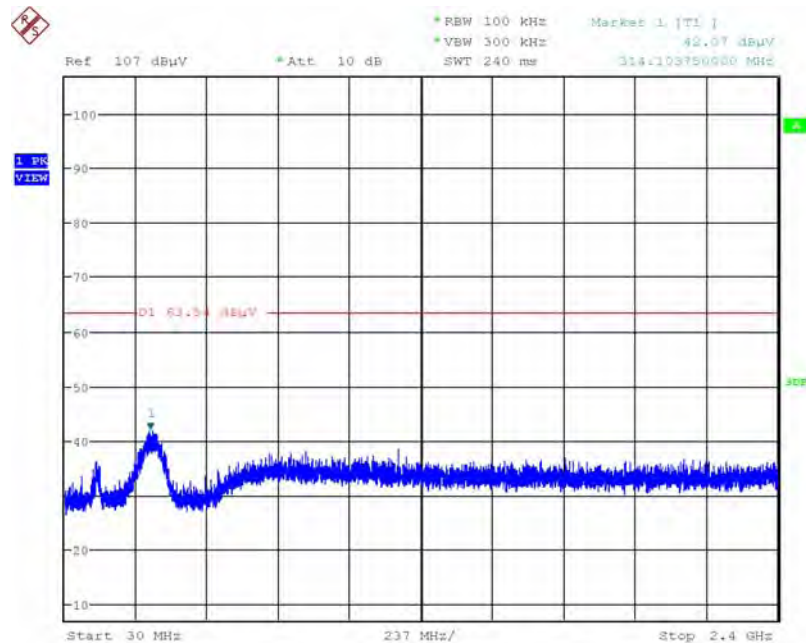

Date: 28.NOV.2015 12:15:44


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

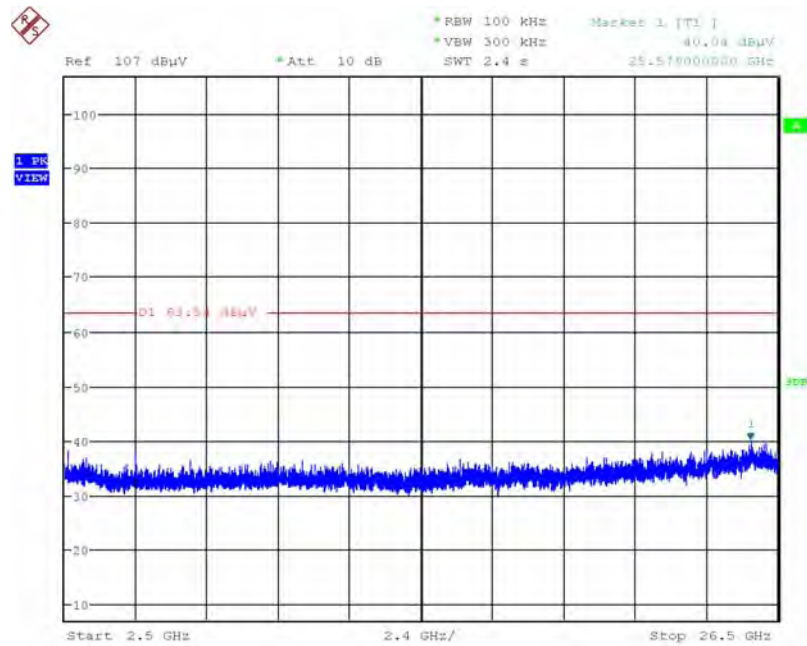

Date: 28.NOV.2015 12:16:09


Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

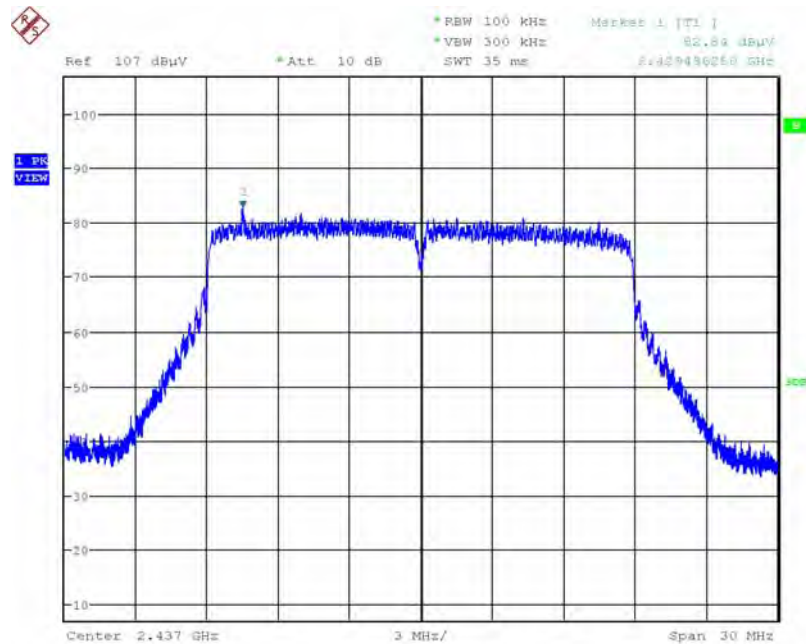


Date: 28.NOV.2015 21:03:23

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

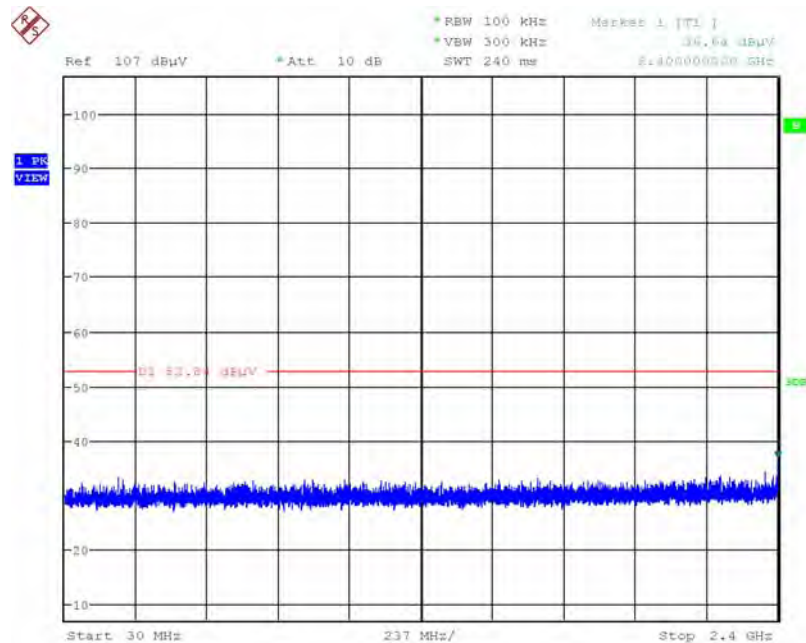


Date: 28.NOV.2015 21:04:55

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

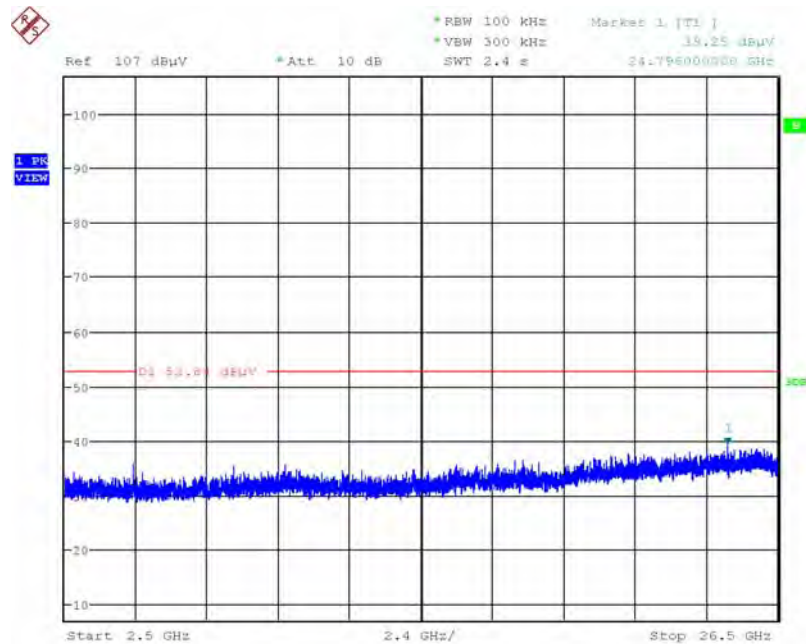


Date: 28.NOV.2015 21:05:30

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

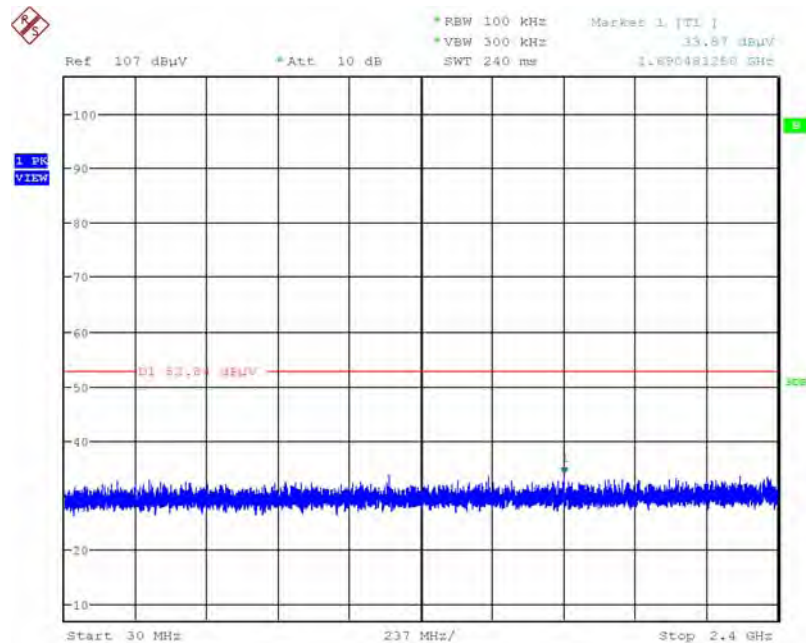


Date: 28.NOV.2015 21:06:37

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

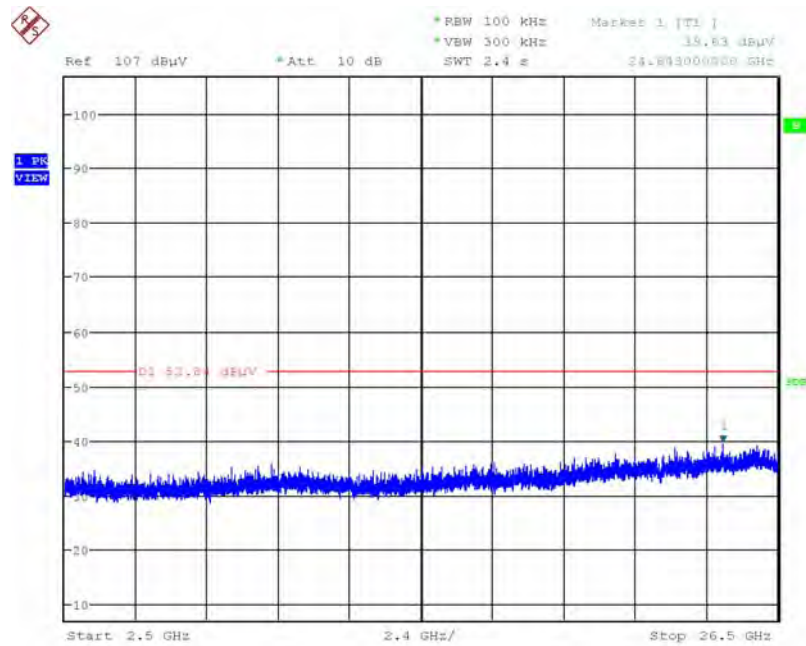


Date: 28.NOV.2015 21:07:12

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

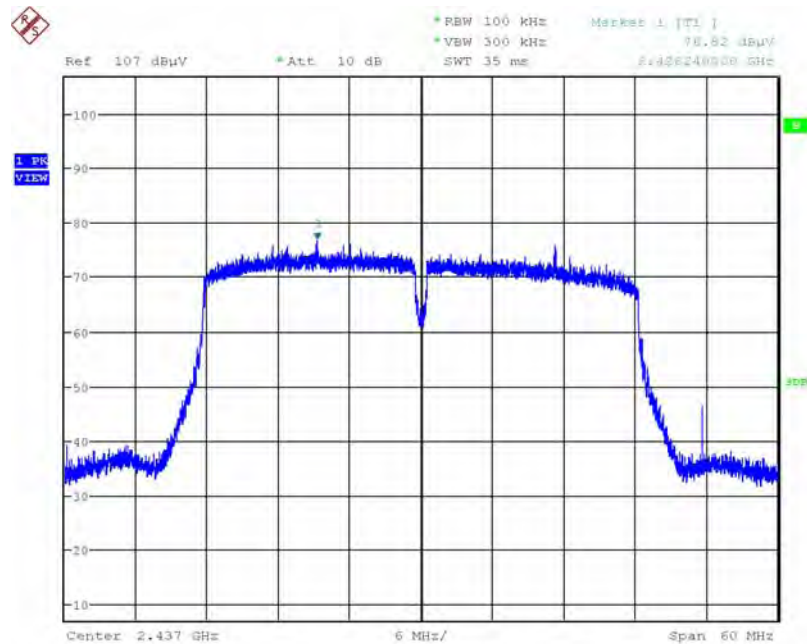


Date: 28.NOV.2015 21:08:40

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

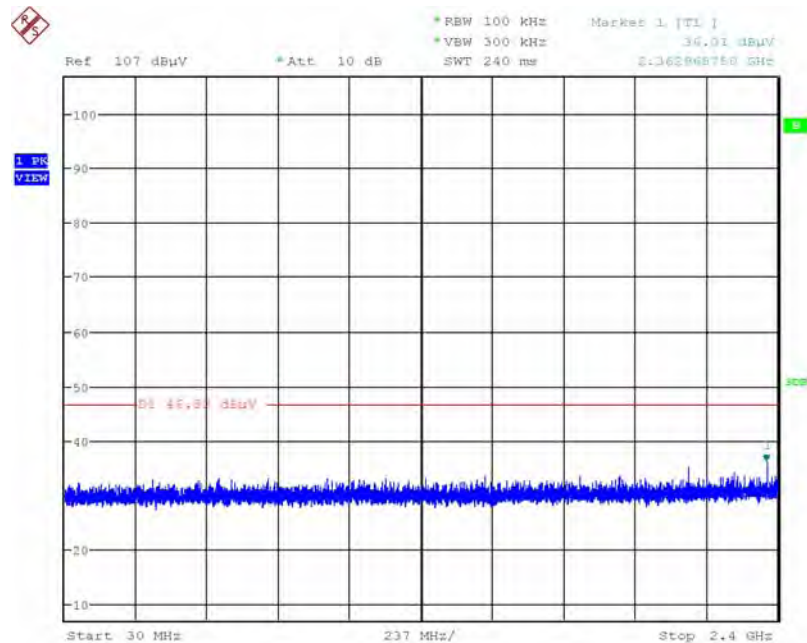


Date: 28.NOV.2015 21:10:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

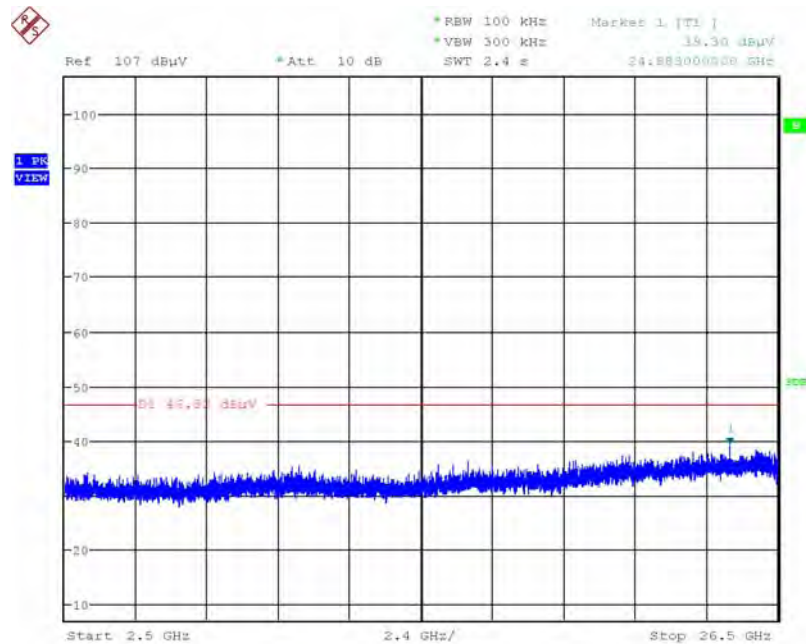


Date: 28.NOV.2015 21:10:53

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

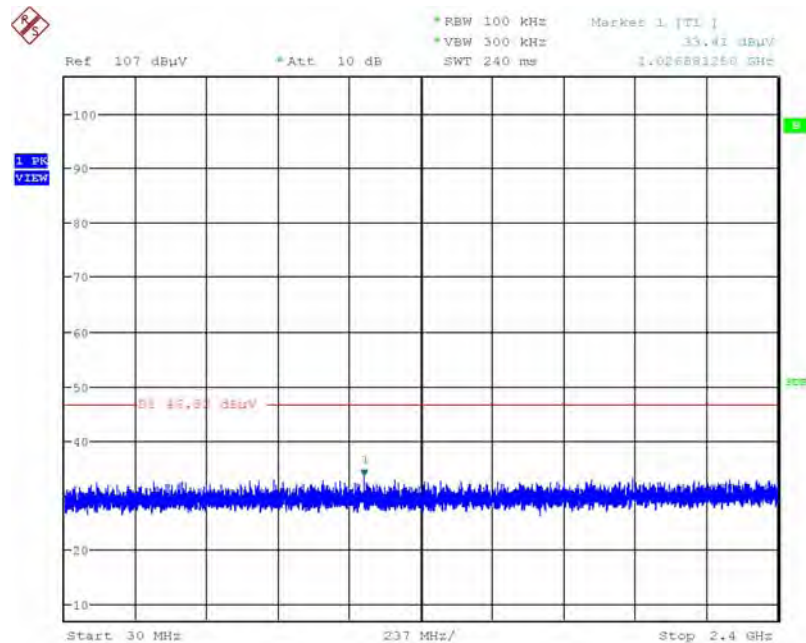

Date: 28.NOV.2015 21:11:51


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

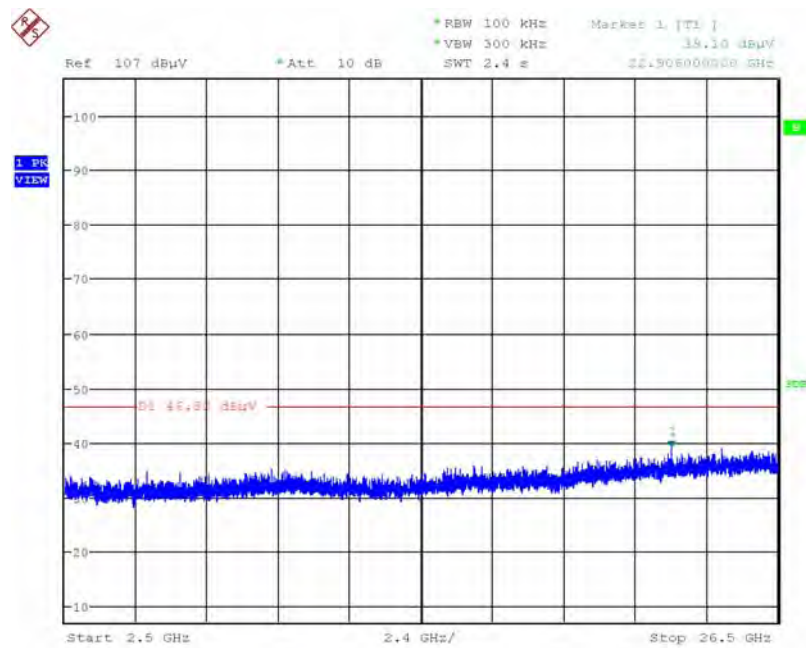

Date: 28.NOV.2015 21:12:25


Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

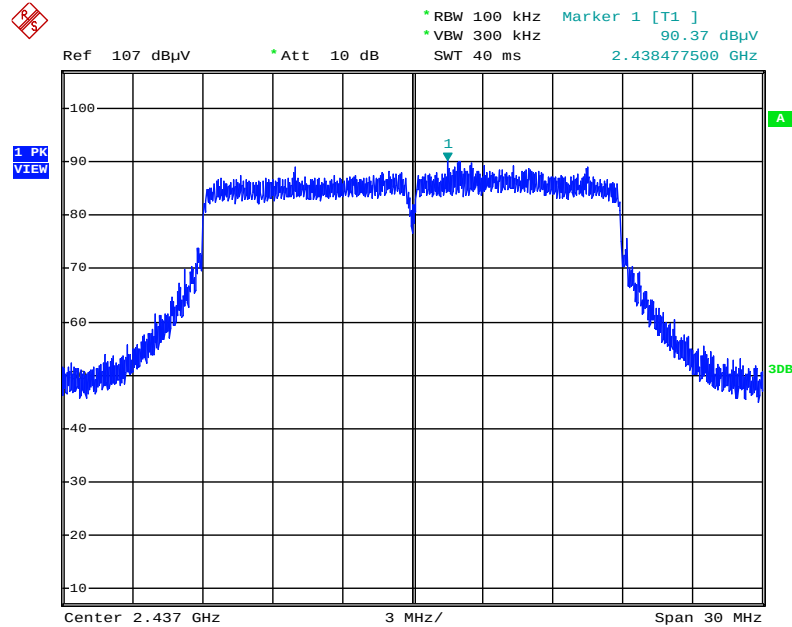


Date: 28.NOV.2015 13:11:56

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

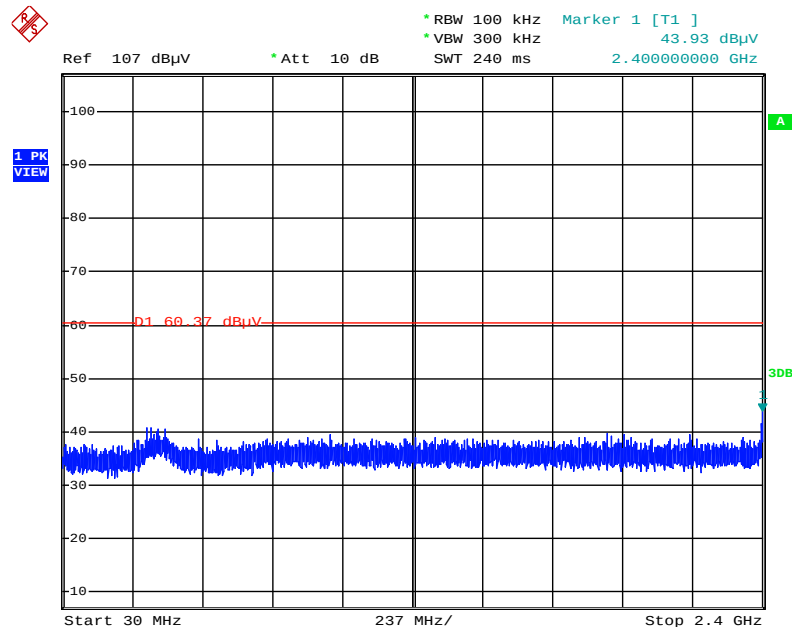


Date: 28.NOV.2015 13:13:36

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

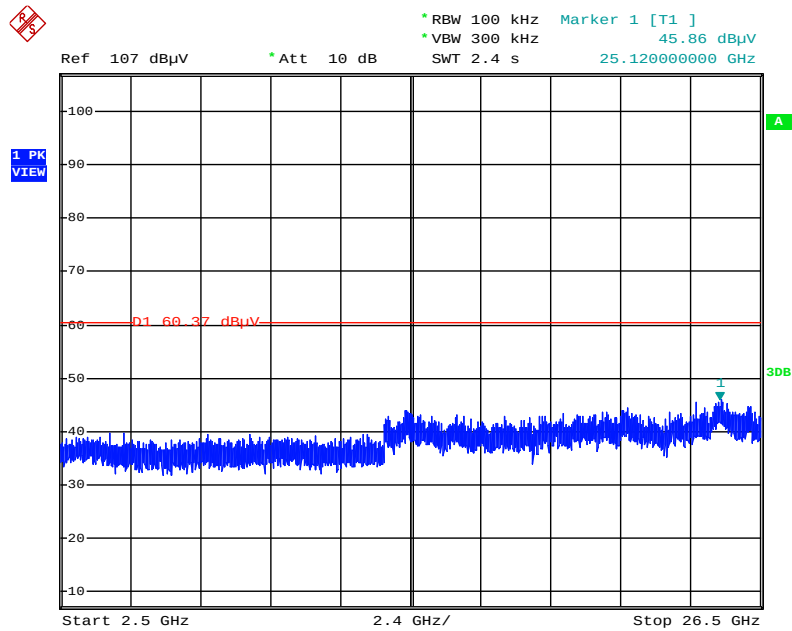


Date: 28.NOV.2015 13:14:02

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

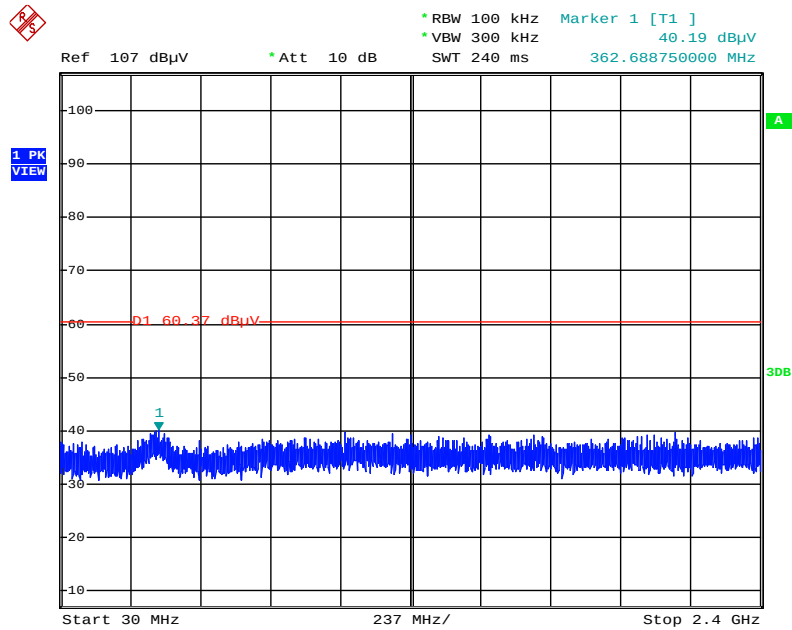


Date: 28.NOV.2015 13:15:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

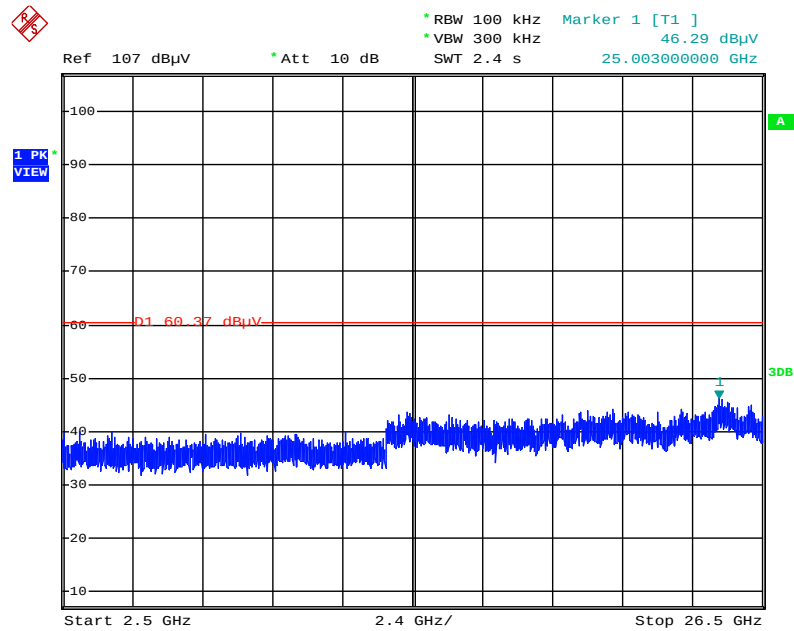


Date: 28.NOV.2015 13:15:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

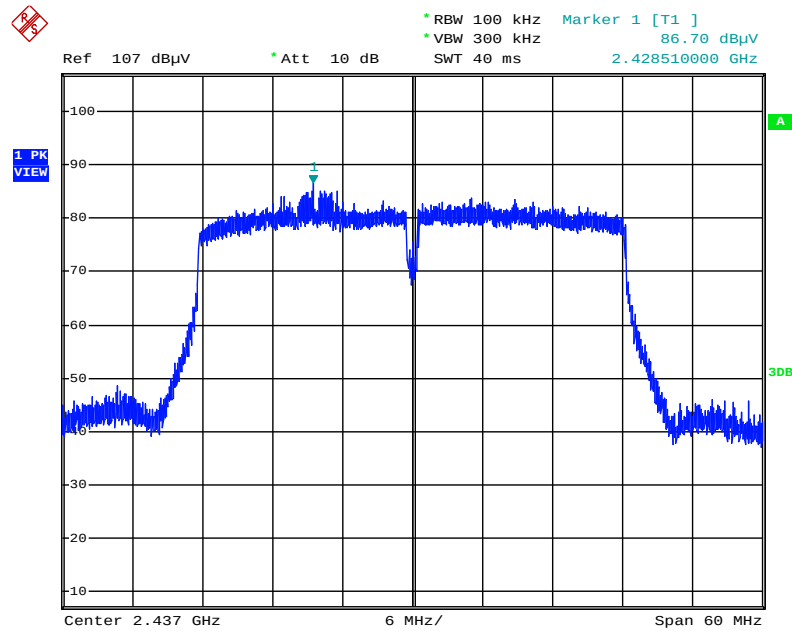


Date: 28.NOV.2015 13:16:34

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

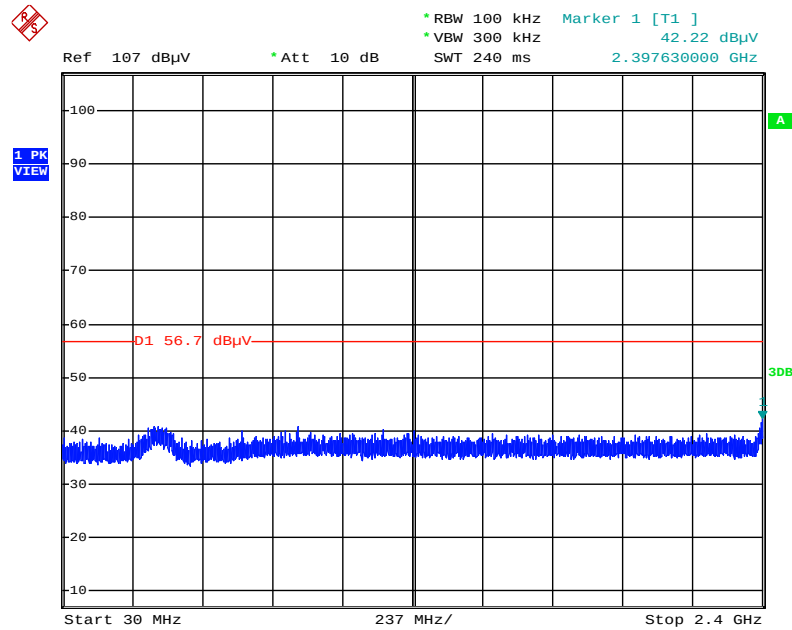


Date: 28.NOV.2015 13:17:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

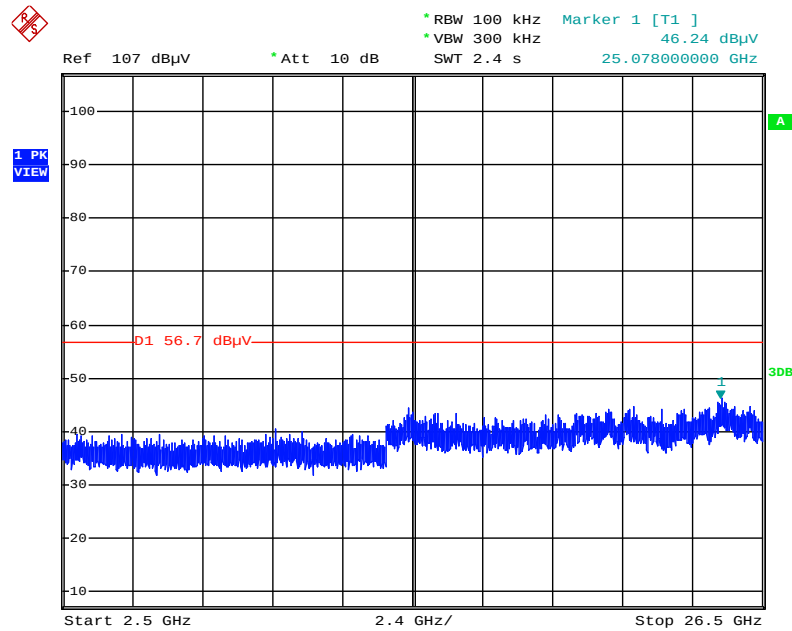


Date: 28.NOV.2015 13:21:29

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

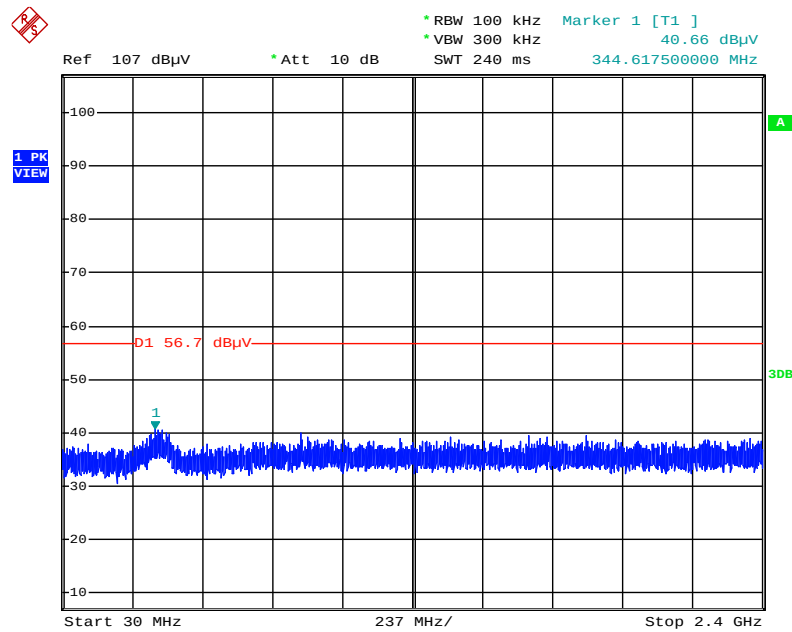

Date: 28.NOV.2015 13:18:59

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

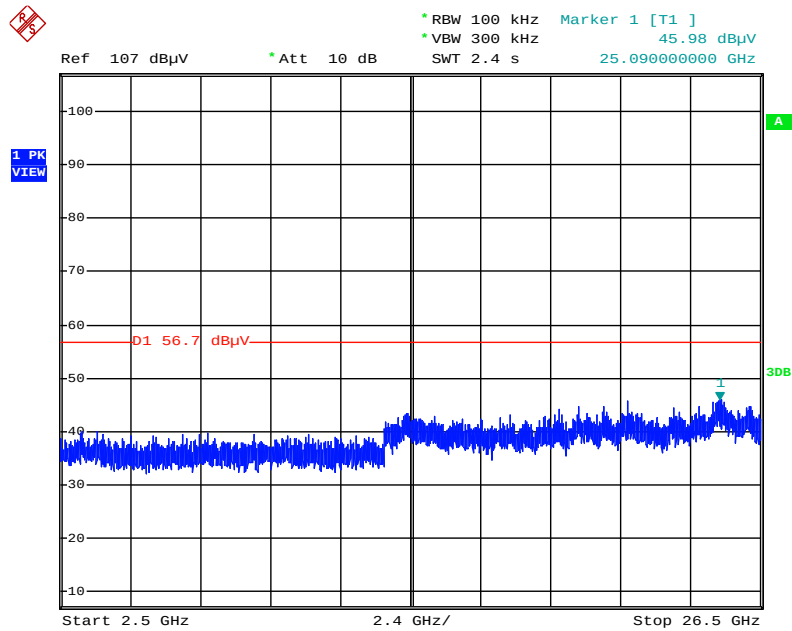

Date: 28.NOV.2015 13:19:21

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%