

FCC Test Report

Report No.: RF170731C08-1

FCC ID: QXO-AP3917I

Test Model: AP3917i

Series Model: AP7662i (refer to item 3.1 for more details)

Received Date: Jul. 31, 2017

Test Date: Aug. 30 ~ Oct. 03, 2017

Issued Date: Oct. 05, 2017

Applicant: Extreme Networks, Inc.

Address: 6480 VIA DEL ORO SAN JOSE CA 95119 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	15
3.4 Description of Support Units	16
3.4.1 Configuration of System under Test	16
For all tests, expect radiated emission above 1GHz test	16
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement.....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	52
4.2.1 Limits of Conducted Emission Measurement	52
4.2.2 Test Instruments	52
4.2.3 Test Procedures.....	53
4.2.4 Deviation from Test Standard	53
4.2.5 Test Setup.....	53
4.2.6 EUT Operating Conditions.....	53
4.2.7 Test Results	54
4.3 Transmit Power Measurement	56
4.3.1 Limits of Transmit Power Measurement	56
4.3.2 Test Setup.....	57
4.3.3 Test Instruments	57
4.3.4 Test Procedure	57
4.3.5 Deviation from Test Standard	58
4.3.6 EUT Operating Conditions.....	58
4.3.7 Test Result.....	59
4.4 Occupied Bandwidth Measurement	67
4.4.1 Test Setup.....	67
4.4.2 Test Instruments	67
4.4.3 Test Procedure	67
4.4.4 Test Result.....	68
4.5 Peak Power Spectral Density Measurement	72
4.5.1 Limits of Peak Power Spectral Density Measurement	72
4.5.2 Test Setup.....	72
4.5.3 Test Instruments	72
4.5.4 Test Procedures.....	73
4.5.5 Deviation from Test Standard	74
4.5.6 EUT Operating Conditions.....	74
4.5.7 Test Results	75

4.6	Frequency Stability.....	82
4.6.1	Limits of Frequency Stability Measurement	82
4.6.2	Test Setup.....	82
4.6.3	Test Instruments	82
4.6.4	Test Procedure	82
4.6.5	Deviation from Test Standard	82
4.6.6	EUT Operating Condition	82
4.6.7	Test Results	83
4.7	6dB Bandwidth Measurement.....	84
4.7.1	Limits of 6dB Bandwidth Measurement.....	84
4.7.2	Test Setup.....	84
4.7.3	Test Instruments	84
4.7.4	Test Procedure	84
4.7.5	Deviation from Test Standard	84
4.7.6	EUT Operating Condition	84
4.7.7	Test Results	85
5	Pictures of Test Arrangements.....	87
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	88
	Appendix – Information on the Testing Laboratories	91

Release Control Record

Issue No.	Description	Date Issued
RF170731C08-1	Original release.	Oct. 05, 2017

1 Certificate of Conformity

Product: Wireless 802.11 a/ac+b/g/n Access Point

Brand: Extreme Networks

Test Model: AP3917i

Series Model: AP7662i (refer to item 3.1 for more details)


Sample Status: Engineering sample

Applicant: Extreme Networks, Inc.

Test Date: Aug. 30 ~ Oct. 03, 2017

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Oct. 05, 2017
Polly Chen / Specialist

Approved by :  , **Date:** Oct. 05, 2017
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.21dB at 0.50547MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless 802.11 a/ac+b/g/n Access Point
Brand	Extreme Networks
Test Model	AP3917i
Series Model	AP7632i
Model Difference	Refer to note for more details
Sample Status	Engineering sample
Power Supply Rating	54Vdc from POE
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180~5240MHz, 5745~5825MHz
Number of Channel	5180~5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11n (HT40): 2 802.11ac (VHT80): 1 5745~5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11n (HT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180~5240MHz: 403.75mW 5745~5825MHz: 434.259mW Beamforming Mode: 5180~5240MHz: 403.75mW 5745~5825MHz: 434.259mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Wall mount, 1.75m non-shielded Grounding cable without core
Cable Supplied	NA

Note:

- All models are listed as below. Model: AP3917i was chosen for final test.

Brand	Model	Difference
Extreme Networks	AP3917i	All models are electrically identical, only cover printing different.
	AP7662i	

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function	Beamforming
802.11a	2TX	Not Support
802.11n (HT20)	2TX	Support
802.11n (HT40)	2TX	Support
802.11ac (VHT20)	2TX	Support
802.11ac (VHT40)	2TX	Support
802.11ac (VHT80)	2TX	Support



* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

3. The EUT consumes power from the following POE. (Support units only)

POE	
Brand	EnGenius
Model	EPA5006GP
Input Power	100-240Vac, 50-60Hz, 0.8A
Output Power	54Vdc, 0.6A Pin 4, 5: 54Vdc Pin 7, 8: Return


4. The following antennas were provided to the EUT.

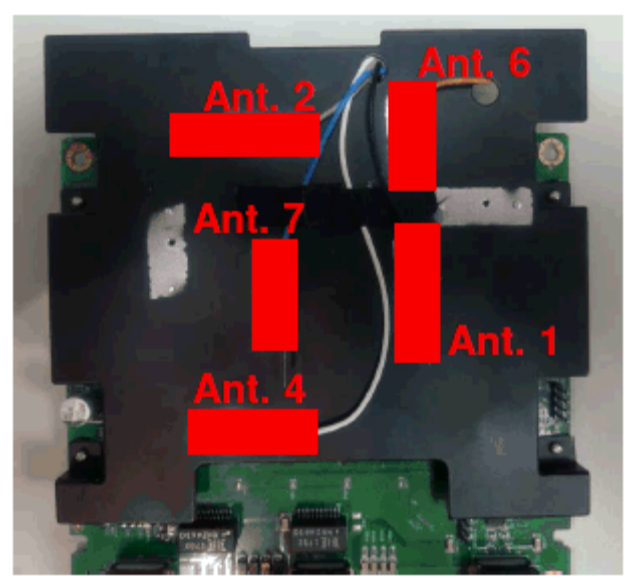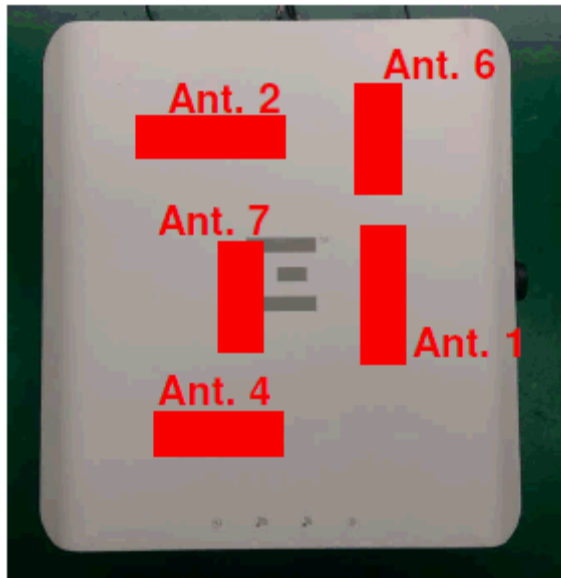

Antenna Type	PIFA	Antenna Connector	IPEX
Gain (dBi)	Frequency (MHz)		
	2400-2500	4900-5850	
1	4.06	-	
2	3.94	-	
4	-	6.18	
6	-	6.00	
7 (BT LE / Zigbee)	3.53	-	

* Ant. was cross-polarized antenna.

5. The EUT will install at outdoor area, the highest antenna gain from the horizon above 30 degrees as below, for more detail information please refer to antenna specification and user manual

5150~5850MHz Antenna gain	Antenna install degree
5.543 dBi	

Due to device will restricted installation position as above photo, thus consider to above 30 degrees highest antenna gain are chosen from XZ Plane (antenna specification of 210-330°) and XY Plane (antenna specification of 120-240°).

6. Power Setting as below.

Outdoor:

CDD Mode						
	802.11a	802.11n (HT20)		802.11n (HT40)		802.11ac (VHT80)
CH 36	12	12	CH 38	12	CH 42	12
CH 40	12	12	CH 46	11.5	CH 155	19.5
CH 48	12	12	CH 151	23		
CH 149	23	23	CH 159	23		
CH 157	23	23				
CH 165	23	23				
Beamforming Mode						
	802.11n (HT20)		802.11n (HT40)		802.11ac (VHT80)	
CH 36	12	CH 38	12	CH 42	12	
CH 40	12	CH 46	11.5	CH 155	19.5	
CH 48	12	CH 151	23			
CH 149	23	CH 159	23			
CH 157	23					
CH 165	23					

Indoor:

CDD Mode						
	802.11a	802.11n (HT20)		802.11n (HT40)		802.11ac (VHT80)
CH 36	20	20.5	CH 38	18	CH 42	17.5
CH 40	23	23	CH 46	23	CH 155	19.5
CH 48	23	23	CH 151	23		
CH 149	23	23	CH 159	23		
CH 157	23	23				
CH 165	23	23				
Beamforming Mode						
	802.11n (HT20)		802.11n (HT40)		802.11ac (VHT80)	
CH 36	20.5	CH 38	18	CH 42	17.5	
CH 40	23	CH 46	23	CH 155	19.5	
CH 48	23	CH 151	23			
CH 149	23	CH 159	23			
CH 157	23					
CH 165	23					

7. 2.4GHz & 4.9GHz/5GHz & BT LE or 2.4GHz & 4.9GHz/5GHz & Zigbee technology can transmit at same time. BT LE and Zigbee cannot transmit simultaneously.
8. Spurious emission of the simultaneous operation (2.4GHz & 4.9GHz/5GHz & BT LE or 2.4GHz & 4.9GHz/5GHz & Zigbee) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11n (HT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11n (HT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	6.0
	802.11a	5745-5825	149 to 165		OFDM	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	6.0
	802.11a	5745-5825	149 to 165		OFDM	6.0

Transmit Power Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
CDD Mode						
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3
Beamforming Mode						
-	802.11n (HT20)	5180-5240	36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11n (HT20)	5745-5825	149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Peak Power Spectral Density, Bandwidth and Frequency Stability Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
RE \geq 1G	24 deg. C, 68% RH	120Vac, 60Hz	Willy Cheng
RE<1G	23 deg. C, 69% RH	120Vac, 60Hz	Willy Cheng
PLC	23 deg. C, 64% RH	120Vac, 60Hz	Willy Cheng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Edward Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


Duty cycle of test signal is $< 98\%$, duty factor is required.

802.11a: Duty cycle = $2.060/2.155 = 0.956$, Duty factor = $10 * \log(1/0.956) = 0.20$

802.11n (HT20): Duty cycle = $4.995/5.095 = 0.9803$

802.11n (HT40): Duty cycle = $2.417/2.512 = 0.962$, Duty factor = $10 * \log(1/0.962) = 0.17$

802.11ac (VHT80): Duty cycle = $1.143/1.229 = 0.930$, Duty factor = $10 * \log(1/0.930) = 0.32$

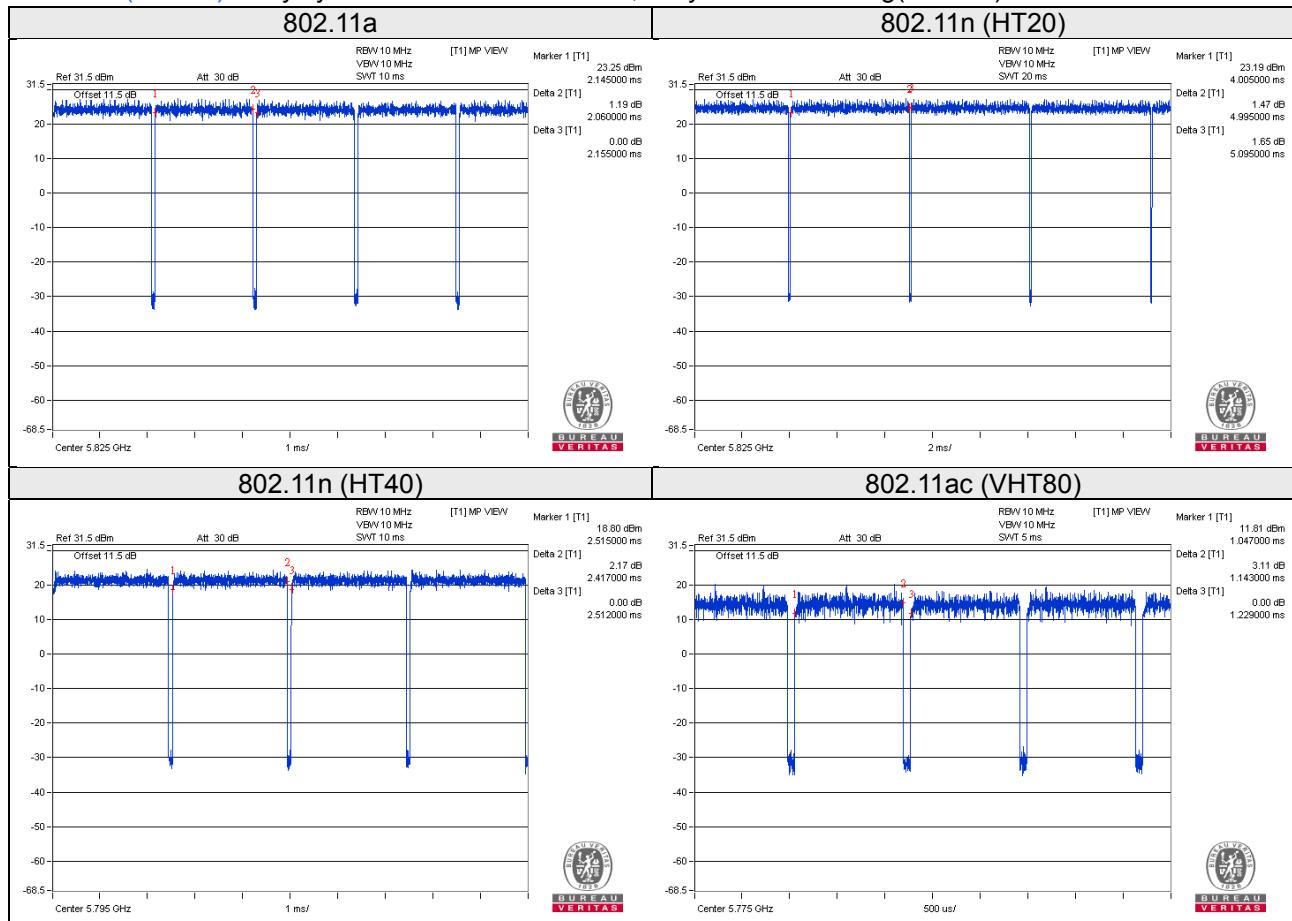

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	POE	EnGenius	EPA5006GP	NA	NA	Provided by manufacturer
C.	Load	NA	NA	NA	NA	-


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	1	1.8	N	0	-
3.	Console cable	1	1	N	0	Provided by manufacturer
4.	Ground cable	1	1.75	N	0	Accessory Device
5.	RJ45, Cat5e	1	1.8	N	0	-

3.4.1 Configuration of System under Test

For all tests, expect radiated emission above 1GHz test

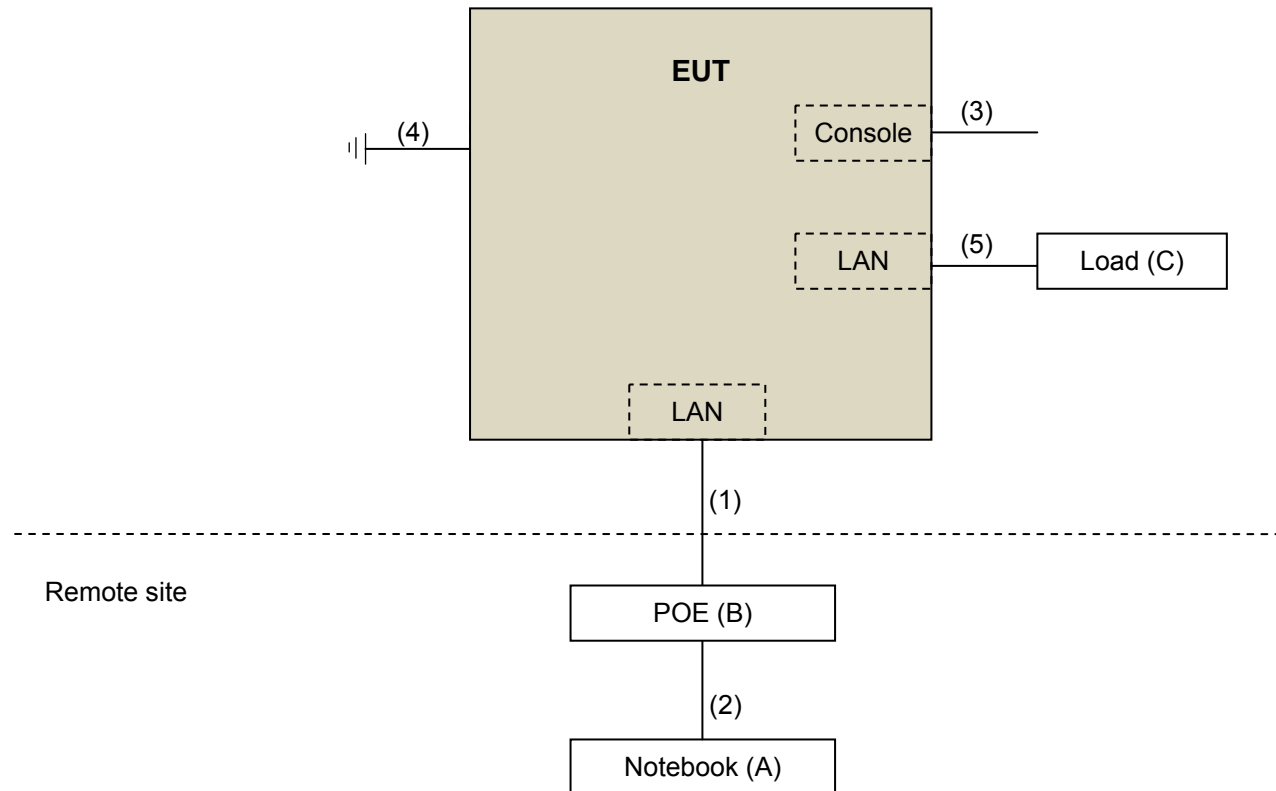

Radiated emission above 1GHz test

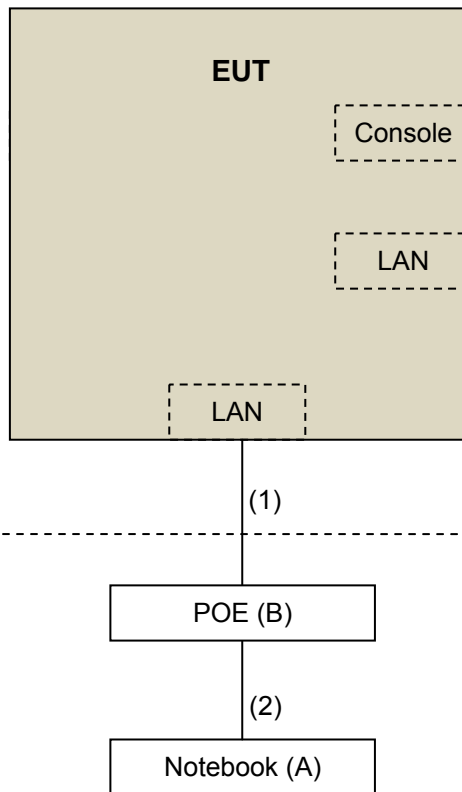

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v01r04		Field Strength at 3m	
		PK: 74 (dBuV/m)	AV: 54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK: 105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK: 122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 02, 2017	May 01, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 16, 2016	Nov. 15, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	9120D	209	Dec. 27, 2016	Dec. 26, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent	8447D	2944A10738	Aug. 21, 2017	Aug. 20, 2018
Preamplifier Agilent	8449B	3008A02465	Apr. 05, 2017	Apr. 04, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2017	Aug. 20, 2018
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 106	Cable-CH3-03 (309224+12738)	Aug. 21, 2017	Aug. 20, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2017	Jun. 07, 2018
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 17, 2016	Oct. 16, 2017

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

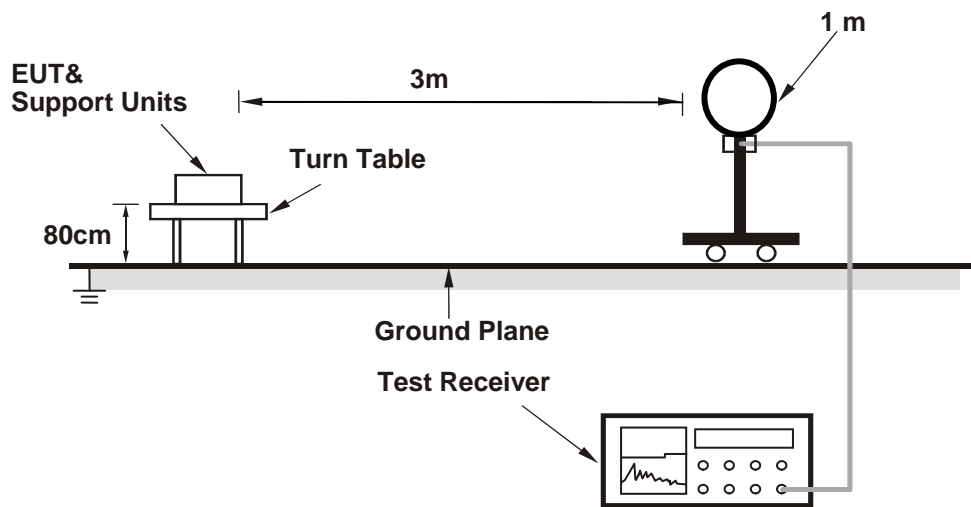

For Radiated emission 30MHz to 1GHz

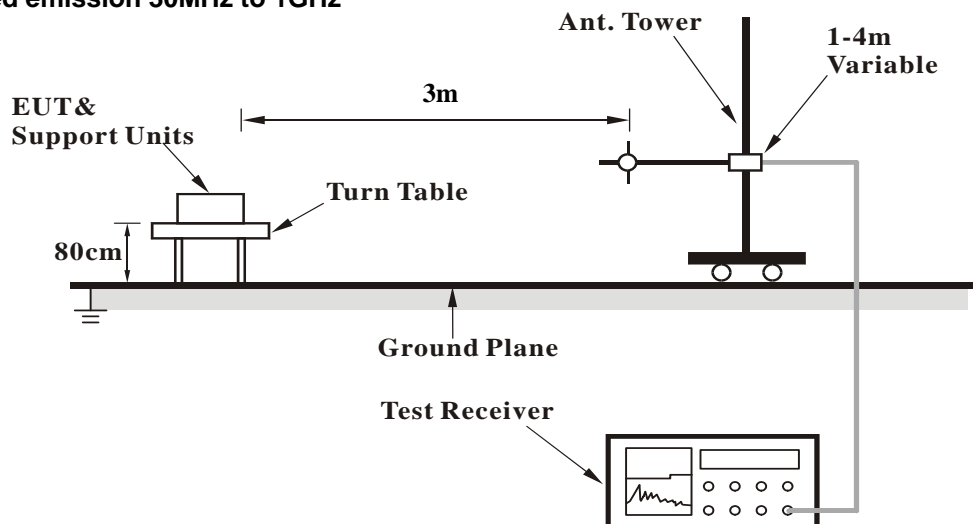

For Radiated emission above 1GHz

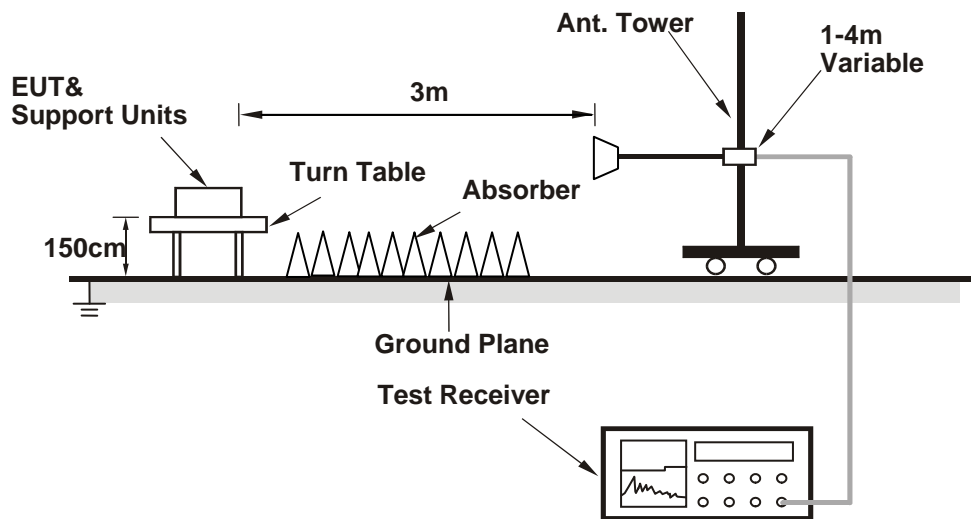

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz data:

802.11a

Indoor:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	3.11 H	40	63.40	3.60
2	5150.00	52.7 AV	54.0	-1.3	3.11 H	40	49.10	3.60
3	*5180.00	117.7 PK			1.73 H	50	78.20	39.50
4	*5180.00	107.4 AV			1.73 H	50	67.90	39.50
5	#10360.00	59.2 PK	74.0	-14.8	2.03 H	165	43.50	15.70
6	#10360.00	46.0 AV	54.0	-8.0	2.03 H	165	30.30	15.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.2 PK	74.0	-10.8	2.17 V	7	59.60	3.60
2	5150.00	49.1 AV	54.0	-4.9	2.17 V	7	45.50	3.60
3	*5180.00	115.6 PK			2.09 V	7	76.10	39.50
4	*5180.00	105.4 AV			2.09 V	7	65.90	39.50
5	#10360.00	58.4 PK	74.0	-15.6	2.17 V	345	42.70	15.70
6	#10360.00	45.3 AV	54.0	-8.7	2.17 V	345	29.60	15.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	119.6 PK			1.83 H	54	80.10	39.50
2	*5200.00	109.4 AV			1.83 H	54	69.90	39.50
3	#10400.00	58.9 PK	74.0	-15.1	2.10 H	160	43.30	15.60
4	#10400.00	45.9 AV	54.0	-8.1	2.10 H	160	30.30	15.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.4 PK			2.06 V	11	78.90	39.50
2	*5200.00	108.3 AV			2.06 V	11	68.80	39.50
3	#10400.00	58.2 PK	74.0	-15.8	1.60 V	341	42.60	15.60
4	#10400.00	45.2 AV	54.0	-8.8	1.60 V	341	29.60	15.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	120.8 PK			1.74 H	55	81.30	39.50
2	*5240.00	110.7 AV			1.74 H	55	71.20	39.50
3	5350.00	58.5 PK	74.0	-15.5	1.83 H	60	54.60	3.90
4	5350.00	47.2 AV	54.0	-6.8	1.83 H	60	43.30	3.90
5	#10480.00	59.8 PK	74.0	-14.2	2.06 H	169	43.00	16.80
6	#10480.00	46.9 AV	54.0	-7.1	2.06 H	169	30.10	16.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.3 PK			2.09 V	11	78.80	39.50
2	*5240.00	107.9 AV			2.09 V	11	68.40	39.50
3	5350.00	56.5 PK	74.0	-17.5	2.02 V	355	52.60	3.90
4	5350.00	45.3 AV	54.0	-8.7	2.02 V	355	41.40	3.90
5	#10480.00	59.2 PK	74.0	-14.8	1.71 V	349	42.40	16.80
6	#10480.00	46.1 AV	54.0	-7.9	1.71 V	349	29.30	16.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Outdoor:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	3.49 H	49	57.00	1.70
2	5150.00	44.8 AV	54.0	-9.2	3.49 H	49	43.10	1.70
3	*5180.00	110.6 PK			1.94 H	52	71.10	39.50
4	*5180.00	99.6 AV			1.94 H	52	60.10	39.50
5	#10360.00	58.0 PK	74.0	-16.0	2.01 H	108	45.10	12.90
6	#10360.00	44.9 AV	54.0	-9.1	2.01 H	108	32.00	12.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	2.35 V	10	54.10	1.70
2	5150.00	42.6 AV	54.0	-11.4	2.35 V	10	40.90	1.70
3	*5180.00	107.1 PK			2.05 V	8	67.60	39.50
4	*5180.00	97.7 AV			2.05 V	8	58.20	39.50
5	#10360.00	58.2 PK	74.0	-15.8	1.66 V	226	45.30	12.90
6	#10360.00	44.8 AV	54.0	-9.2	1.66 V	226	31.90	12.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	2.86 H	51	55.90	1.70
2	5150.00	42.1 AV	54.0	-11.9	2.86 H	51	40.40	1.70
3	*5200.00	110.3 PK			2.04 H	47	70.80	39.50
4	*5200.00	100.1 AV			2.04 H	47	60.60	39.50
5	#10400.00	57.9 PK	74.0	-16.1	2.30 H	264	45.00	12.90
6	#10400.00	44.5 AV	54.0	-9.5	2.30 H	264	31.60	12.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	4.00 V	5	54.10	1.70
2	5150.00	42.0 AV	54.0	-12.0	4.00 V	5	40.30	1.70
3	*5200.00	107.8 PK			2.17 V	4	68.30	39.50
4	*5200.00	96.5 AV			2.17 V	4	57.00	39.50
5	#10400.00	58.3 PK	74.0	-15.7	1.43 V	104	45.40	12.90
6	#10400.00	44.9 AV	54.0	-9.1	1.43 V	104	32.00	12.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.1 PK			2.11 H	50	71.50	39.60
2	*5240.00	99.7 AV			2.11 H	50	60.10	39.60
3	5350.00	46.0 PK	74.0	-28.0	1.81 H	56	44.10	1.90
4	5350.00	42.6 AV	54.0	-11.4	1.81 H	56	40.70	1.90
5	#10480.00	58.9 PK	74.0	-15.1	1.84 H	177	45.10	13.80
6	#10480.00	45.0 AV	54.0	-9.0	1.84 H	177	31.20	13.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.8 PK			3.64 V	7	67.20	39.60
2	*5240.00	97.2 AV			3.64 V	7	57.60	39.60
3	5350.00	52.1 PK	74.0	-21.9	3.18 V	38	50.20	1.90
4	5350.00	42.5 AV	54.0	-11.5	3.18 V	38	40.60	1.90
5	#10480.00	58.2 PK	74.0	-15.8	2.41 V	103	44.40	13.80
6	#10480.00	45.3 AV	54.0	-8.7	2.41 V	103	31.50	13.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.80	56.4 PK	68.2	-11.8	2.12 H	51	53.90	2.50
2	*5745.00	119.1 PK			2.12 H	51	78.40	40.70
3	*5745.00	108.5 AV			2.12 H	51	67.80	40.70
4	#5925.60	57.9 PK	68.2	-10.3	2.12 H	51	54.80	3.10
5	11490.00	60.4 PK	74.0	-13.6	3.09 H	266	45.40	15.00
6	11490.00	47.1 AV	54.0	-6.9	3.09 H	266	32.10	15.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	57.2 PK	68.2	-11.0	1.33 V	17	54.70	2.50
2	*5745.00	120.9 PK			1.33 V	17	80.20	40.70
3	*5745.00	110.4 AV			1.33 V	17	69.70	40.70
4	#5947.20	57.4 PK	68.2	-10.8	1.33 V	17	54.20	3.20
5	11490.00	58.3 PK	74.0	-15.7	2.02 V	344	43.30	15.00
6	11490.00	44.9 AV	54.0	-9.1	2.02 V	344	29.90	15.00

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	56.8 PK	68.2	-11.4	1.98 H	56	54.30	2.50
2	*5785.00	118.8 PK			1.98 H	56	78.00	40.80
3	*5785.00	108.1 AV			1.98 H	56	67.30	40.80
4	#5964.80	57.2 PK	68.2	-11.0	1.98 H	56	53.90	3.30
5	11570.00	60.4 PK	74.0	-13.6	2.79 H	301	45.50	14.90
6	11570.00	47.0 AV	54.0	-7.0	2.79 H	301	32.10	14.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	56.2 PK	68.2	-12.0	1.58 V	20	53.70	2.50
2	*5785.00	117.3 PK			1.58 V	20	76.50	40.80
3	*5785.00	109.5 AV			1.58 V	20	68.70	40.80
4	#5969.60	57.8 PK	68.2	-10.4	1.58 V	20	54.50	3.30
5	11570.00	59.7 PK	74.0	-14.3	1.77 V	357	44.80	14.90
6	11570.00	46.1 AV	54.0	-7.9	1.77 V	357	31.20	14.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5605.60	56.4 PK	68.2	-11.8	2.22 H	50	53.90	2.50
2	*5825.00	118.3 PK			2.22 H	50	77.40	40.90
3	*5825.00	107.7 AV			2.22 H	50	66.80	40.90
4	#5930.40	57.8 PK	68.2	-10.4	2.22 H	50	54.60	3.20
5	11650.00	60.5 PK	74.0	-13.5	2.88 H	341	45.60	14.90
6	11650.00	46.8 AV	54.0	-7.2	2.88 H	341	31.90	14.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	55.8 PK	68.2	-12.4	1.38 V	17	53.30	2.50
2	*5825.00	116.7 PK			1.38 V	17	75.80	40.90
3	*5825.00	106.4 AV			1.38 V	17	65.50	40.90
4	#5980.80	57.6 PK	68.2	-10.6	1.38 V	17	54.20	3.40
5	11650.00	59.7 PK	74.0	-14.3	1.75 V	12	44.80	14.90
6	11650.00	46.6 AV	54.0	-7.4	1.75 V	12	31.70	14.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

Indoor:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	1.94 H	48	64.70	3.60
2	5150.00	53.0 AV	54.0	-1.0	1.94 H	48	49.40	3.60
3	*5180.00	117.4 PK			1.75 H	49	77.90	39.50
4	*5180.00	106.9 AV			1.75 H	49	67.40	39.50
5	#10360.00	59.1 PK	74.0	-14.9	2.08 H	171	43.40	15.70
6	#10360.00	46.7 AV	54.0	-7.3	2.08 H	171	31.00	15.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	2.03 V	12	61.50	3.60
2	5150.00	50.3 AV	54.0	-3.7	2.03 V	12	46.70	3.60
3	*5180.00	115.2 PK			2.09 V	7	75.70	39.50
4	*5180.00	105.0 AV			2.09 V	7	65.50	39.50
5	#10360.00	58.8 PK	74.0	-15.2	1.73 V	350	43.10	15.70
6	#10360.00	46.1 AV	54.0	-7.9	1.73 V	350	30.40	15.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	121.0 PK			1.76 H	282	81.50	39.50
2	*5200.00	110.1 AV			1.76 H	282	70.60	39.50
3	#10400.00	59.6 PK	74.0	-14.4	2.22 H	159	44.00	15.60
4	#10400.00	46.5 AV	54.0	-7.5	2.22 H	159	30.90	15.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.5 PK			2.08 V	10	78.00	39.50
2	*5200.00	107.2 AV			2.08 V	10	67.70	39.50
3	#10400.00	58.1 PK	74.0	-15.9	1.70 V	339	42.50	15.60
4	#10400.00	45.1 AV	54.0	-8.9	1.70 V	339	29.50	15.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	121.4 PK			1.66 H	286	81.90	39.50
2	*5240.00	110.4 AV			1.66 H	286	70.90	39.50
3	5350.00	54.6 PK	74.0	-19.4	1.90 H	35	50.70	3.90
4	5350.00	47.6 AV	54.0	-6.4	1.90 H	35	43.70	3.90
5	#10480.00	60.6 PK	74.0	-13.4	1.99 H	66	43.80	16.80
6	#10480.00	47.6 AV	54.0	-6.4	1.99 H	66	30.80	16.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.4 PK			2.06 V	5	78.90	39.50
2	*5240.00	108.0 AV			2.06 V	5	68.50	39.50
3	5350.00	57.5 PK	74.0	-16.5	1.69 V	0	53.60	3.90
4	5350.00	46.7 AV	54.0	-7.3	1.69 V	0	42.80	3.90
5	#10480.00	59.5 PK	74.0	-14.5	1.66 V	347	42.70	16.80
6	#10480.00	46.6 AV	54.0	-7.4	1.66 V	347	29.80	16.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Outdoor:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	1.94 H	48	64.70	3.60
2	5150.00	53.0 AV	54.0	-1.0	1.94 H	48	49.40	3.60
3	*5180.00	117.4 PK			1.75 H	49	77.90	39.50
4	*5180.00	106.9 AV			1.75 H	49	67.40	39.50
5	#10360.00	59.1 PK	74.0	-14.9	2.08 H	171	43.40	15.70
6	#10360.00	46.7 AV	54.0	-7.3	2.08 H	171	31.00	15.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	2.03 V	12	61.50	3.60
2	5150.00	50.3 AV	54.0	-3.7	2.03 V	12	46.70	3.60
3	*5180.00	115.2 PK			2.09 V	7	75.70	39.50
4	*5180.00	105.0 AV			2.09 V	7	65.50	39.50
5	#10360.00	58.8 PK	74.0	-15.2	1.73 V	350	43.10	15.70
6	#10360.00	46.1 AV	54.0	-7.9	1.73 V	350	30.40	15.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	121.0 PK			1.76 H	282	81.50	39.50
2	*5200.00	110.1 AV			1.76 H	282	70.60	39.50
3	#10400.00	59.6 PK	74.0	-14.4	2.22 H	159	44.00	15.60
4	#10400.00	46.5 AV	54.0	-7.5	2.22 H	159	30.90	15.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.5 PK			2.08 V	10	78.00	39.50
2	*5200.00	107.2 AV			2.08 V	10	67.70	39.50
3	#10400.00	58.1 PK	74.0	-15.9	1.70 V	339	42.50	15.60
4	#10400.00	45.1 AV	54.0	-8.9	1.70 V	339	29.50	15.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	121.4 PK			1.66 H	286	81.90	39.50
2	*5240.00	110.4 AV			1.66 H	286	70.90	39.50
3	5350.00	54.6 PK	74.0	-19.4	1.90 H	35	50.70	3.90
4	5350.00	47.6 AV	54.0	-6.4	1.90 H	35	43.70	3.90
5	#10480.00	60.6 PK	74.0	-13.4	1.99 H	66	43.80	16.80
6	#10480.00	47.6 AV	54.0	-6.4	1.99 H	66	30.80	16.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.4 PK			2.06 V	5	78.90	39.50
2	*5240.00	108.0 AV			2.06 V	5	68.50	39.50
3	5350.00	57.5 PK	74.0	-16.5	1.69 V	0	53.60	3.90
4	5350.00	46.7 AV	54.0	-7.3	1.69 V	0	42.80	3.90
5	#10480.00	59.5 PK	74.0	-14.5	1.66 V	347	42.70	16.80
6	#10480.00	46.6 AV	54.0	-7.4	1.66 V	347	29.80	16.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.20	57.7 PK	68.2	-10.5	1.93 H	55	55.20	2.50
2	*5745.00	119.8 PK			1.93 H	55	79.10	40.70
3	*5745.00	108.6 AV			1.93 H	55	67.90	40.70
4	#5948.80	58.0 PK	68.2	-10.2	1.93 H	55	54.80	3.20
5	11490.00	60.5 PK	74.0	-13.5	2.74 H	321	45.50	15.00
6	11490.00	47.2 AV	54.0	-6.8	2.74 H	321	32.20	15.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.40	56.3 PK	68.2	-11.9	1.56 V	17	53.80	2.50
2	*5745.00	118.1 PK			1.56 V	17	77.40	40.70
3	*5745.00	108.3 AV			1.56 V	17	67.60	40.70
4	#5940.80	56.8 PK	68.2	-11.4	1.56 V	17	53.60	3.20
5	11490.00	59.7 PK	74.0	-14.3	1.49 V	33	44.70	15.00
6	11490.00	46.4 AV	54.0	-7.6	1.49 V	33	31.40	15.00

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.00	56.7 PK	68.2	-11.5	2.01 H	57	54.20	2.50
2	*5785.00	119.3 PK			2.01 H	57	78.50	40.80
3	*5785.00	108.4 AV			2.01 H	57	67.60	40.80
4	#5942.40	58.2 PK	68.2	-10.0	2.01 H	57	55.00	3.20
5	11570.00	60.2 PK	74.0	-13.8	2.99 H	327	45.30	14.90
6	11570.00	46.8 AV	54.0	-7.2	2.99 H	327	31.90	14.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.40	56.0 PK	68.2	-12.2	1.46 V	20	53.50	2.50
2	*5785.00	116.0 PK			1.46 V	20	75.20	40.80
3	*5785.00	107.0 AV			1.46 V	20	66.20	40.80
4	#5929.60	56.9 PK	68.2	-11.3	1.46 V	20	53.80	3.10
5	11570.00	59.7 PK	74.0	-14.3	1.68 V	11	44.80	14.90
6	11570.00	46.5 AV	54.0	-7.5	1.68 V	11	31.60	14.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.80	57.0 PK	68.2	-11.2	2.23 H	52	54.50	2.50
2	*5825.00	118.9 PK			2.23 H	52	78.00	40.90
3	*5825.00	108.1 AV			2.23 H	52	67.20	40.90
4	#5931.20	57.7 PK	68.2	-10.5	2.23 H	52	54.50	3.20
5	11650.00	60.2 PK	74.0	-13.8	2.88 H	342	45.30	14.90
6	11650.00	46.8 AV	54.0	-7.2	2.88 H	342	31.90	14.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.40	55.1 PK	68.2	-13.1	1.24 V	17	52.60	2.50
2	*5825.00	116.1 PK			1.24 V	17	75.20	40.90
3	*5825.00	105.5 AV			1.24 V	17	64.60	40.90
4	#5964.80	57.1 PK	68.2	-11.1	1.24 V	17	53.80	3.30
5	11650.00	59.7 PK	74.0	-14.3	1.72 V	28	44.80	14.90
6	11650.00	46.2 AV	54.0	-7.8	1.72 V	28	31.30	14.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

Indoor:

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	1.65 H	285	61.90	3.60
2	5150.00	52.6 AV	54.0	-1.4	1.65 H	285	49.00	3.60
3	*5190.00	112.4 PK			1.84 H	284	72.90	39.50
4	*5190.00	103.1 AV			1.84 H	284	63.60	39.50
5	#10380.00	58.6 PK	74.0	-15.4	2.01 H	159	42.90	15.70
6	#10380.00	45.6 AV	54.0	-8.4	2.01 H	159	29.90	15.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	1.81 V	4	56.10	3.60
2	5150.00	48.2 AV	54.0	-5.8	1.81 V	4	44.60	3.60
3	*5190.00	110.7 PK			2.06 V	9	71.20	39.50
4	*5190.00	101.0 AV			2.06 V	9	61.50	39.50
5	#10380.00	57.9 PK	74.0	-16.1	1.86 V	359	42.20	15.70
6	#10380.00	44.9 AV	54.0	-9.1	1.86 V	359	29.20	15.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.72 H	285	62.00	3.60
2	5150.00	53.0 AV	54.0	-1.0	1.72 H	285	49.40	3.60
3	*5230.00	116.8 PK			1.79 H	287	77.30	39.50
4	*5230.00	107.4 AV			1.79 H	287	67.90	39.50
5	5350.00	57.4 PK	74.0	-16.6	1.72 H	279	53.50	3.90
6	5350.00	46.5 AV	54.0	-7.5	1.72 H	279	42.60	3.90
7	#10460.00	59.3 PK	74.0	-14.7	2.01 H	166	42.90	16.40
8	#10460.00	46.7 AV	54.0	-7.3	2.01 H	166	30.30	16.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	2.00 V	10	60.50	3.60
2	5150.00	49.1 AV	54.0	-4.9	2.00 V	10	45.50	3.60
3	*5230.00	115.3 PK			2.03 V	9	75.80	39.50
4	*5230.00	105.4 AV			2.03 V	9	65.90	39.50
5	5350.00	57.5 PK	74.0	-16.5	2.17 V	0	53.60	3.90
6	5350.00	46.1 AV	54.0	-7.9	2.17 V	0	42.20	3.90
7	#10460.00	59.0 PK	74.0	-15.0	1.81 V	351	42.60	16.40
8	#10460.00	46.2 AV	54.0	-7.8	1.81 V	351	29.80	16.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Outdoor:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	1.57 H	59	52.10	1.70
2	5150.00	42.0 AV	54.0	-12.0	1.57 H	59	40.30	1.70
3	*5180.00	109.3 PK			2.16 H	48	69.80	39.50
4	*5180.00	99.6 AV			2.16 H	48	60.10	39.50
5	#10360.00	58.6 PK	74.0	-15.4	1.73 H	261	45.70	12.90
6	#10360.00	45.0 AV	54.0	-9.0	1.73 H	261	32.10	12.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.3 PK	74.0	-17.7	2.35 V	359	54.60	1.70
2	5150.00	49.4 AV	54.0	-4.6	2.35 V	359	47.70	1.70
3	*5180.00	107.1 PK			2.21 V	3	67.60	39.50
4	*5180.00	97.6 AV			2.21 V	3	58.10	39.50
5	#10360.00	58.1 PK	74.0	-15.9	1.82 V	313	45.20	12.90
6	#10360.00	44.8 AV	54.0	-9.2	1.82 V	313	31.90	12.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.55 H	54	55.80	1.70
2	5150.00	42.3 AV	54.0	-11.7	1.55 H	54	40.60	1.70
3	*5200.00	108.4 PK			1.38 H	284	68.90	39.50
4	*5200.00	97.2 AV			1.38 H	284	57.70	39.50
5	#10400.00	57.9 PK	74.0	-16.1	2.22 H	212	45.00	12.90
6	#10400.00	44.5 AV	54.0	-9.5	2.22 H	212	31.60	12.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	2.34 V	11	54.50	1.70
2	5150.00	43.2 AV	54.0	-10.8	2.34 V	11	41.50	1.70
3	*5200.00	106.7 PK			1.95 V	8	67.20	39.50
4	*5200.00	96.1 AV			1.95 V	8	56.60	39.50
5	#10400.00	57.7 PK	74.0	-16.3	1.77 V	111	44.80	12.90
6	#10400.00	44.5 AV	54.0	-9.5	1.77 V	111	31.60	12.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.3 PK			2.13 H	53	69.70	39.60
2	*5240.00	91.0 AV			2.13 H	53	51.40	39.60
3	5350.00	55.0 PK	74.0	-19.0	1.70 H	67	53.10	1.90
4	5350.00	43.7 AV	54.0	-10.3	1.70 H	67	41.80	1.90
5	#10480.00	58.7 PK	74.0	-15.3	1.43 H	122	44.90	13.80
6	#10480.00	45.2 AV	54.0	-8.8	1.43 H	122	31.40	13.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.2 PK			2.00 V	7	66.60	39.60
2	*5240.00	96.5 AV			2.00 V	7	56.90	39.60
3	5350.00	55.4 PK	74.0	-18.6	2.73 V	144	53.50	1.90
4	5350.00	42.7 AV	54.0	-11.3	2.73 V	144	40.80	1.90
5	#10480.00	58.6 PK	74.0	-15.4	1.58 V	314	44.80	13.80
6	#10480.00	45.1 AV	54.0	-8.9	1.58 V	314	31.30	13.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	62.2 PK	68.2	-6.0	2.10 H	55	59.70	2.50
2	*5755.00	117.2 PK			2.10 H	55	76.50	40.70
3	*5755.00	107.5 AV			2.10 H	55	66.80	40.70
4	#5938.40	58.1 PK	68.2	-10.1	2.10 H	55	54.90	3.20
5	11510.00	60.0 PK	74.0	-14.0	2.69 H	271	44.90	15.10
6	11510.00	47.1 AV	54.0	-6.9	2.69 H	271	32.00	15.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.00	59.8 PK	68.2	-8.4	1.43 V	16	57.30	2.50
2	*5755.00	114.6 PK			1.43 V	16	73.90	40.70
3	*5755.00	104.9 AV			1.43 V	16	64.20	40.70
4	#5935.20	57.2 PK	68.2	-11.0	1.43 V	16	54.00	3.20
5	11510.00	59.5 PK	74.0	-14.5	1.61 V	29	44.40	15.10
6	11510.00	46.3 AV	54.0	-7.7	1.61 V	29	31.20	15.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.40	57.1 PK	68.2	-11.1	2.44 H	40	54.60	2.50
2	*5795.00	115.4 PK			2.44 H	40	74.60	40.80
3	*5795.00	104.9 AV			2.44 H	40	64.10	40.80
4	#5928.80	58.8 PK	68.2	-9.4	2.44 H	40	55.70	3.10
5	11590.00	60.4 PK	74.0	-13.6	2.49 H	342	45.50	14.90
6	11590.00	47.0 AV	54.0	-7.0	2.49 H	342	32.10	14.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	56.2 PK	68.2	-12.0	1.44 V	14	53.70	2.50
2	*5795.00	112.6 PK			1.44 V	14	71.80	40.80
3	*5795.00	103.3 AV			1.44 V	14	62.50	40.80
4	#5971.20	57.5 PK	68.2	-10.7	1.44 V	14	54.20	3.30
5	11590.00	59.1 PK	74.0	-14.9	1.64 V	10	44.20	14.90
6	11590.00	45.7 AV	54.0	-8.3	1.64 V	10	30.80	14.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

Indoor:

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.73 H	281	59.90	3.60
2	5150.00	52.4 AV	54.0	-1.6	1.73 H	281	48.80	3.60
3	*5210.00	108.2 PK			1.84 H	285	68.70	39.50
4	*5210.00	98.6 AV			1.84 H	285	59.10	39.50
5	5350.00	56.5 PK	74.0	-17.5	1.75 H	280	52.60	3.90
6	5350.00	45.3 AV	54.0	-8.7	1.75 H	280	41.40	3.90
7	#10420.00	58.0 PK	74.0	-16.0	2.00 H	176	42.10	15.90
8	#10420.00	44.9 AV	54.0	-9.1	2.00 H	176	29.00	15.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	2.19 V	13	55.80	3.60
2	5150.00	47.2 AV	54.0	-6.8	2.19 V	13	43.60	3.60
3	*5210.00	106.6 PK			2.17 V	7	67.10	39.50
4	*5210.00	97.1 AV			2.17 V	7	57.60	39.50
5	5350.00	55.5 PK	74.0	-18.5	2.19 V	17	51.60	3.90
6	5350.00	44.2 AV	54.0	-9.8	2.19 V	17	40.30	3.90
7	#10420.00	57.4 PK	74.0	-16.6	1.70 V	350	41.50	15.90
8	#10420.00	44.4 AV	54.0	-9.6	1.70 V	350	28.50	15.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Outdoor:

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.44 H	287	57.00	1.70
2	5150.00	46.9 AV	54.0	-7.1	1.44 H	287	45.20	1.70
3	*5190.00	106.0 PK			1.69 H	287	66.50	39.50
4	*5190.00	97.6 AV			1.69 H	287	58.10	39.50
5	#10380.00	58.3 PK	74.0	-15.7	1.44 H	263	45.30	13.00
6	#10380.00	44.9 AV	54.0	-9.1	1.44 H	263	31.90	13.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	2.35 V	331	53.50	1.70
2	5150.00	42.6 AV	54.0	-11.4	2.35 V	331	40.90	1.70
3	*5190.00	101.3 PK			2.47 V	12	61.80	39.50
4	*5190.00	91.6 AV			2.47 V	12	52.10	39.50
5	#10380.00	58.1 PK	74.0	-15.9	1.88 V	244	45.10	13.00
6	#10380.00	44.9 AV	54.0	-9.1	1.88 V	244	31.90	13.00

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	63.2 PK	68.2	-5.0	2.16 H	52	60.70	2.50
2	#5650.00	66.5 PK	68.2	-1.7	1.88 H	53	64.00	2.50
3	*5775.00	110.8 PK			2.16 H	52	70.00	40.80
4	*5775.00	101.1 AV			2.16 H	52	60.30	40.80
5	#5925.00	64.1 PK	68.2	-4.1	2.23 H	50	61.00	3.10
6	#5933.60	62.1 PK	68.2	-6.1	2.16 H	52	58.90	3.20
7	11550.00	59.6 PK	74.0	-14.4	2.88 H	265	44.50	15.10
8	11550.00	46.8 AV	54.0	-7.2	2.88 H	265	31.70	15.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	61.5 PK	68.2	-6.7	1.46 V	18	59.00	2.50
2	#5650.00	64.0 PK	68.2	-4.2	1.45 V	16	61.50	2.50
3	*5775.00	110.1 PK			1.46 V	18	69.30	40.80
4	*5775.00	99.8 AV			1.46 V	18	59.00	40.80
5	#5925.00	63.4 PK	68.2	-4.8	2.10 V	15	60.30	3.10
6	#5926.40	58.7 PK	68.2	-9.5	1.46 V	18	55.60	3.10
7	11550.00	60.0 PK	74.0	-14.0	1.82 V	26	44.90	15.10
8	11550.00	46.7 AV	54.0	-7.3	1.82 V	26	31.60	15.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	31.4 QP	40.0	-8.6	1.49 H	99	46.90	-15.50
2	125.17	32.1 QP	43.5	-11.4	1.49 H	99	47.90	-15.80
3	212.66	25.1 QP	43.5	-18.4	1.00 H	140	41.40	-16.30
4	309.88	24.0 QP	46.0	-22.0	1.00 H	134	36.60	-12.60
5	685.13	28.9 QP	46.0	-17.1	1.00 H	6	35.20	-6.30
6	836.78	27.3 QP	46.0	-18.7	1.49 H	8	31.20	-3.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.34	37.8 QP	40.0	-2.2	1.48 V	165	53.40	-15.60
2	64.90	33.9 QP	40.0	-6.1	1.00 V	16	49.40	-15.50
3	125.17	27.0 QP	43.5	-16.5	2.00 V	71	42.80	-15.80
4	212.66	25.4 QP	43.5	-18.1	1.49 V	186	41.70	-16.30
5	383.76	25.8 QP	46.0	-20.2	1.49 V	105	37.30	-11.50
6	836.78	30.0 QP	46.0	-16.0	1.00 V	324	33.90	-3.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Tested date: Sep. 11, 2017

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Aug. 17, 2017	Aug. 16, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 08, 2017	Sep. 07, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 17, 2017	Jan. 16, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 02, 2017	Aug. 01, 2018
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

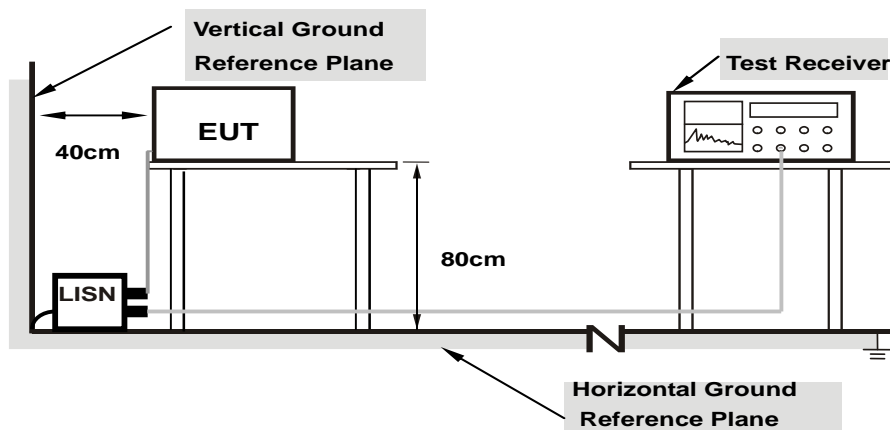

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	10.40	35.74	23.01	46.14	33.41	65.58
2	0.50547	10.42	36.89	32.37	47.31	42.79	56.00	46.00	-8.69	-3.21
3	0.98203	10.48	22.84	18.79	33.32	29.27	56.00	46.00	-22.68	-16.73
4	3.94922	10.60	26.32	21.94	36.92	32.54	56.00	46.00	-19.08	-13.46
5	10.32422	10.71	33.67	29.37	44.38	40.08	60.00	50.00	-15.62	-9.92
6	19.85156	10.89	22.94	18.51	33.83	29.40	60.00	50.00	-26.17	-20.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

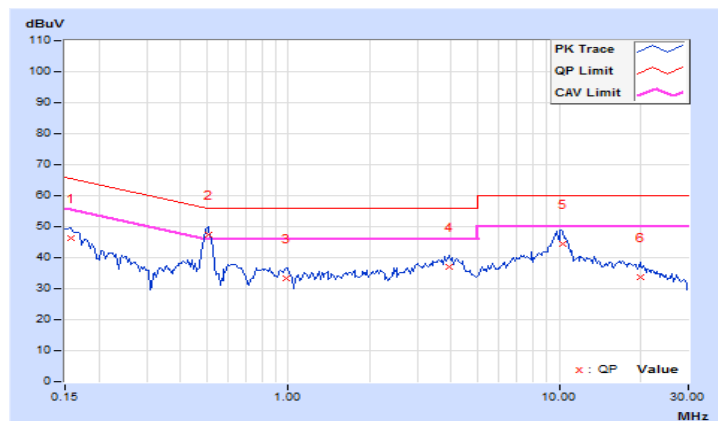


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.41	35.59	22.42	46.00	32.83	65.38	55.38	-19.38	-22.55
2	0.50547	10.40	35.76	31.42	46.16	41.82	56.00	46.00	-9.84	-4.18
3	1.54297	10.49	17.99	15.81	28.48	26.30	56.00	46.00	-27.52	-19.70
4	3.98828	10.60	22.12	16.70	32.72	27.30	56.00	46.00	-23.28	-18.70
5	10.26953	10.66	32.67	27.85	43.33	38.51	60.00	50.00	-16.67	-11.49
6	19.86719	10.99	18.97	14.16	29.96	25.15	60.00	50.00	-30.04	-24.85

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

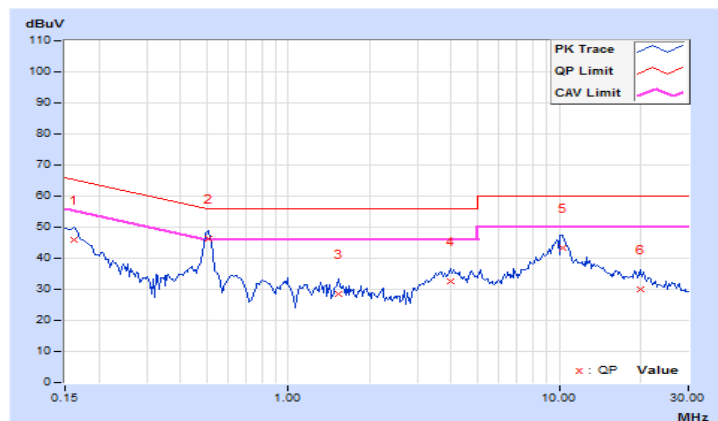

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Outdoor Access Point mode

Operation Band	EUT Category		Limit
U-NII-1	√	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≤ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

Indoor Access Point mode

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≤ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

802.11a, 802.11n (HT20), 802.11n (HT40)

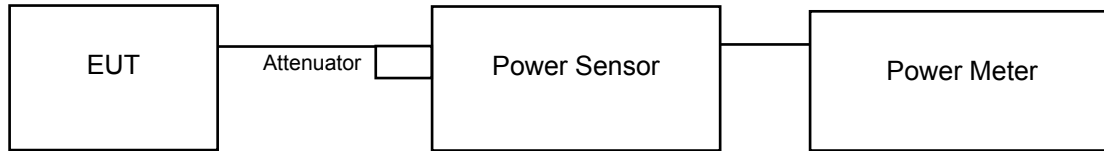

802.11ac (VHT80)



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to "free run".
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz.
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

For U-NII-1 Band (Outdoor Access Point)

CDD Mode

802.11a

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
36	5180	12.53	11.73	32.800	15.16	29.82	5.543	20.703	21.00	Pass
40	5200	12.37	11.88	32.675	15.14	29.82	5.543	20.683	21.00	Pass
48	5240	12.49	12.23	34.453	15.37	29.82	5.543	20.913	21.00	Pass

Note:

Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

Gain = 5.543dBi (above 30 degrees from the horizon),

EIRP = conducted power + (5.543dBi) + array gain = (0 dB (i.e., no array gain) for $N_{ANT} \leq 4$).

802.11n (HT20)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
36	5180	12.56	11.69	32.787	15.16	29.82	5.543	20.703	21.00	Pass
40	5200	12.51	11.84	33.100	15.20	29.82	5.543	20.743	21.00	Pass
48	5240	12.47	12.11	33.915	15.30	29.82	5.543	20.843	21.00	Pass

Note:

Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

Gain = 5.543dBi (above 30 degrees from the horizon),

EIRP = conducted power + (5.543dBi) + array gain = (0 dB (i.e., no array gain) for $N_{ANT} \leq 4$).

802.11n (HT40)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
38	5190	12.60	11.97	33.937	15.31	29.82	5.543	20.853	21.00	Pass
46	5230	12.34	11.92	32.700	15.15	29.82	5.543	20.693	21.00	Pass

Note:

Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

Gain = 5.543dBi (above 30 degrees from the horizon),

EIRP = conducted power + (5.543dBi) + array gain = (0 dB (i.e., no array gain) for $N_{ANT} \leq 4$).

802.11ac (VHT80)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
42	5210	12.63	11.95	33.991	15.31	29.82	5.543	20.853	21.00	Pass

Note:

Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

Gain = 5.543dBi (above 30 degrees from the horizon),

EIRP = conducted power + (5.543dBi) + array gain = (0 dB (i.e., no array gain) for $N_{ANT} \leq 4$).

For U-NII-1 Band (Indoor Access Point Mode) & U-NII-3 Band

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	19.88	19.33	182.979	22.62	29.82	Pass
40	5200	22.76	22.09	350.607	25.45	29.82	Pass
48	5240	23.01	22.27	368.641	25.67	29.82	Pass
149	5745	23.41	22.66	403.782	26.06	29.82	Pass
157	5785	23.56	22.43	401.971	26.04	29.82	Pass
165	5825	23.52	22.35	396.696	25.98	29.82	Pass

Note: Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.31	19.74	201.588	23.04	29.82	Pass
40	5200	22.86	22.02	352.418	25.47	29.82	Pass
48	5240	23.20	22.40	382.710	25.83	29.82	Pass
149	5745	23.37	22.65	401.347	26.04	29.82	Pass
157	5785	23.42	22.51	398.024	26.00	29.82	Pass
165	5825	23.44	22.33	391.802	25.93	29.82	Pass

Note: Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.16	17.78	125.443	20.98	29.82	Pass
46	5230	23.27	22.82	403.750	26.06	29.82	Pass
151	5755	23.41	23.17	426.771	26.30	29.82	Pass
159	5795	23.61	23.11	434.259	26.38	29.82	Pass

Note: Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.68	17.11	110.018	20.41	29.82	Pass
155	5775	20.02	19.22	184.022	22.65	29.82	Pass

Note: Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30 - (6.18 - 6) = 29.82$ dBm.

Beamforming Mode

For U-NII-1 Band (Outdoor Access Point)

802.11n (HT20)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
36	5180	12.56	11.69	32.800	15.16	29.82	5.543	20.703	21.00	Pass
40	5200	12.51	11.84	33.113	15.20	29.82	5.543	20.743	21.00	Pass
48	5240	12.47	12.11	33.884	15.30	29.82	5.543	20.843	21.00	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to 30-(6.18-6) = 29.82dBm.
3. Gain = 5.543dBi (above 30 degrees from the horizon).
4. Beamforming Gain = 0dBi
5. EIRP = conducted power + (5.543dBi) + beamforming gain (0dBi).

802.11n (HT40)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
38	5190	12.60	11.97	33.937	15.31	29.82	5.543	20.853	21.00	Pass
46	5230	12.34	11.92	32.700	15.15	29.82	5.543	20.693	21.00	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to 30-(6.18-6) = 29.82dBm.
3. Gain = 5.543dBi (above 30 degrees from the horizon).
4. Beamforming Gain = 0dBi
5. EIRP = conducted power + (5.543dBi) + beamforming gain (0dBi).

802.11ac (VHT80)

Chan.	Freq. (MHz)	Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	Pass / Fail
		Chain 0	Chain 1							
42	5210	12.63	11.95	33.991	15.31	29.82	5.543	20.853	21.00	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to 30-(6.18-6) = 29.82dBm.
3. Gain = 5.543dBi (above 30 degrees from the horizon).
4. Beamforming Gain = 0dBi
5. EIRP = conducted power + (5.543dBi) + beamforming gain (0dBi).

For U-NII-1 Band (Indoor Access Point Mode) & U-NII-3 Band
 802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.31	19.74	201.588	23.04	29.82	Pass
40	5200	22.86	22.02	352.418	25.47	29.82	Pass
48	5240	23.20	22.40	382.710	25.83	29.82	Pass
149	5745	23.37	22.65	401.347	26.04	29.82	Pass
157	5785	23.42	22.51	398.024	26.00	29.82	Pass
165	5825	23.44	22.33	391.802	25.93	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30-(6.18-6) = 29.82\text{dBm}$.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.16	17.78	125.443	20.98	29.82	Pass
46	5230	23.27	22.82	403.750	26.06	29.82	Pass
151	5755	23.41	23.17	426.771	26.30	29.82	Pass
159	5795	23.61	23.11	434.259	26.38	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30-(6.18-6) = 29.82\text{dBm}$.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.68	17.11	110.018	20.41	29.82	Pass
155	5775	20.02	19.22	184.022	22.65	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the limit shall be reduced to $30-(6.18-6) = 29.82\text{dBm}$.

26dB Bandwidth:

Outdoor Access Point Mode

802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	19.60	19.21	Pass
40	5200	19.42	19.11	Pass
48	5240	19.54	19.06	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	20.36	20.41	Pass
40	5200	20.45	20.54	Pass
48	5240	20.43	20.45	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	40.75	40.70	Pass
46	5230	40.78	40.47	Pass



802.11ac (VHT80)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	83.48	83.04	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

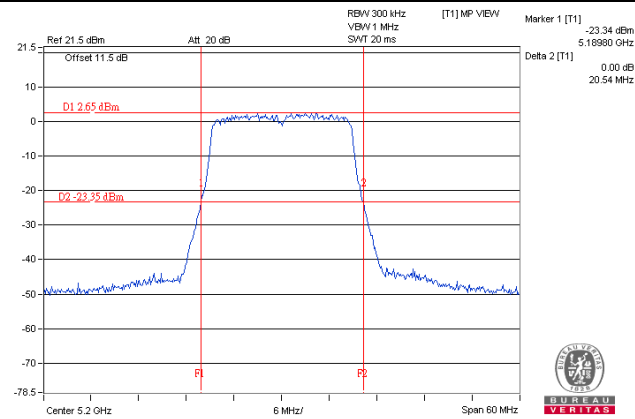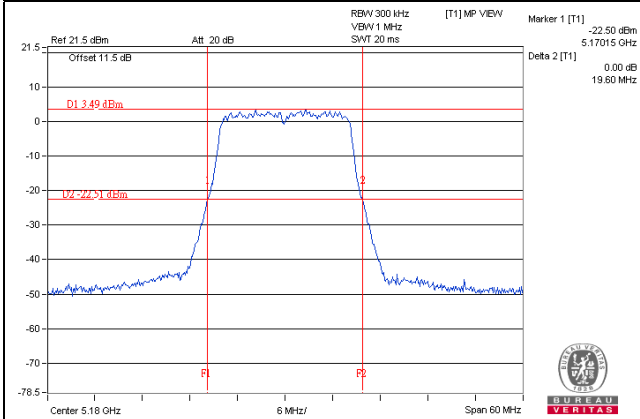

802.11n (HT40)

802.11ac (VHT80)

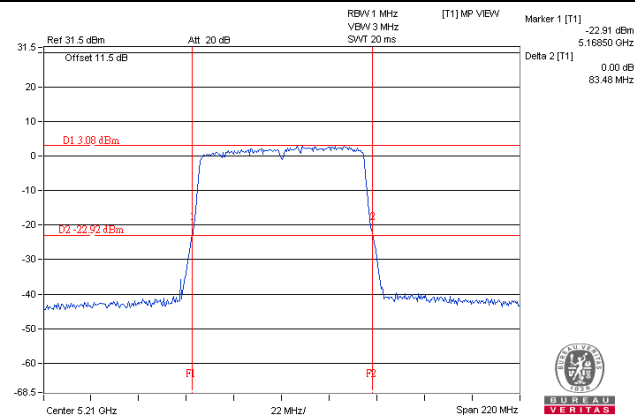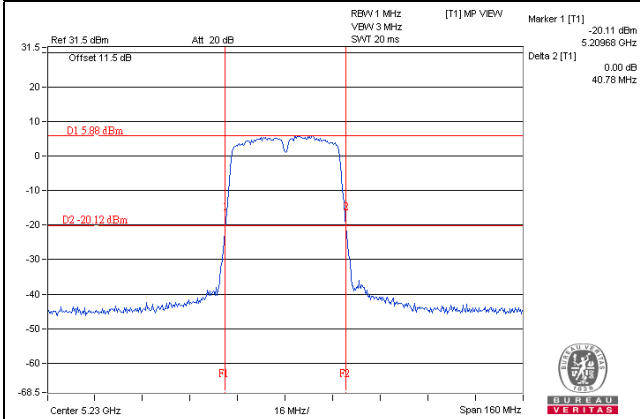

Indoor Access Point Mode

802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	19.49	19.38	Pass
40	5200	20.99	26.32	Pass
48	5240	21.82	31.79	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	20.42	20.52	Pass
40	5200	20.61	29.96	Pass
48	5240	20.65	31.64	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	40.66	40.76	Pass
46	5230	58.33	73.20	Pass



802.11ac (VHT80)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	84.04	83.73	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

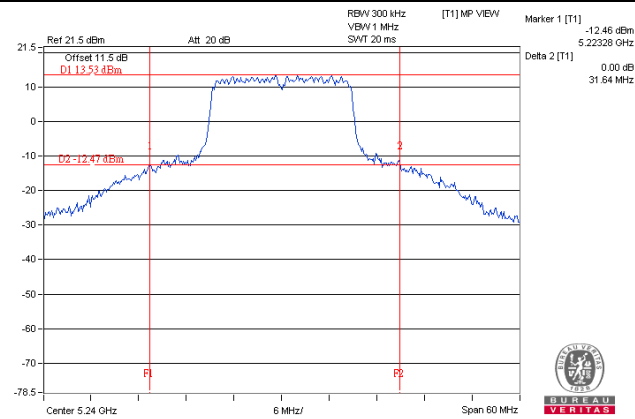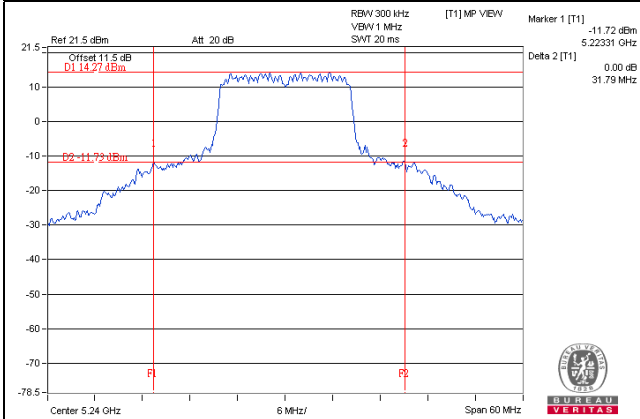


802.11n (HT40)

802.11ac (VHT80)

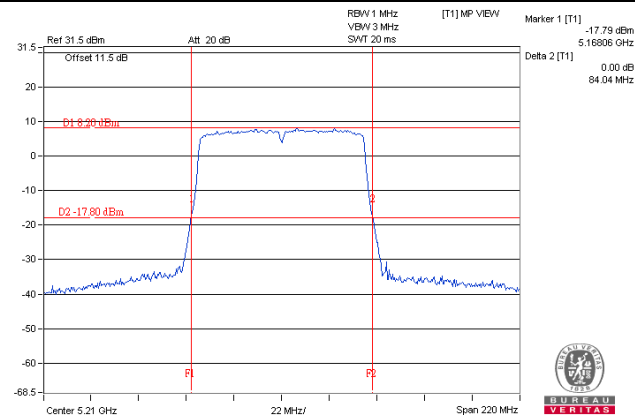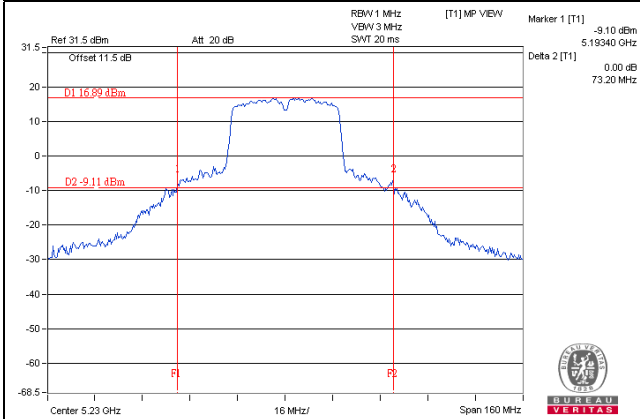

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

Outdoor Access Point Mode

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.44	16.44
40	5200	16.44	16.56
48	5240	16.44	16.44
149	5745	16.68	20.88
157	5785	16.68	21.72
165	5825	16.68	22.80

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.64	17.76
40	5200	17.64	17.64
48	5240	17.64	17.64
149	5745	17.64	21.36
157	5785	17.76	23.16
165	5825	17.76	23.40

802.11n (HT40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.24	36.36
46	5230	36.24	36.12
151	5755	36.24	40.92
159	5795	36.36	42.96


802.11ac (VHT80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	75.84
155	5775	75.84	75.84


Spectrum Plot of Worst Value

802.11a

802.11n (HT20)

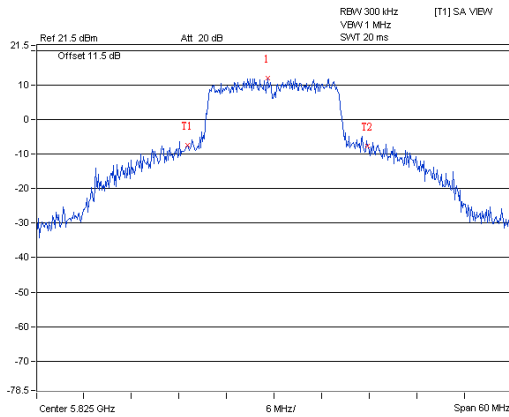


Marker 1 [T1]
 12.13 dBm
 5.82416 GHz
 OBW 22.80 MHz
 Temp 1 [T1] OBW -7.49 dBm
 5.81396 GHz
 Temp 2 [T1] OBW -7.58 dBm
 5.83676 GHz

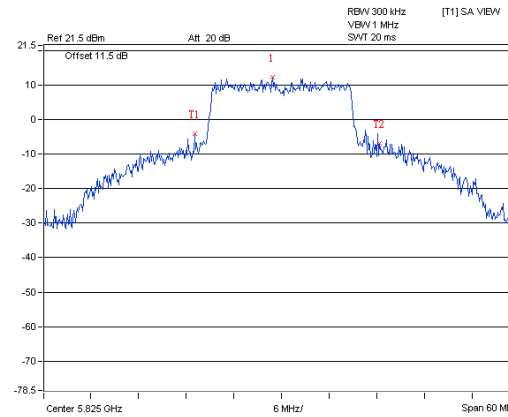


Marker 1 [T1]
 12.17 dBm
 5.82380 GHz
 OBW 23.40 MHz
 Temp 1 [T1] OBW -4.20 dBm
 5.81396 GHz
 Temp 2 [T1] OBW -6.97 dBm
 5.83736 GHz

802.11n (HT40)

802.11ac (VHT80)

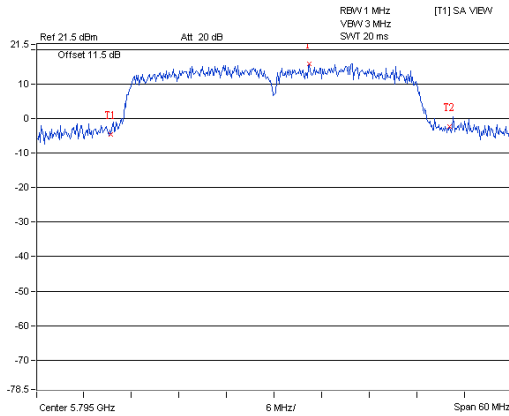

Marker 1 [T1]
 15.81 dBm
 5.79944 GHz
 OBW 42.96 MHz
 Temp 1 [T1] OBW -4.67 dBm
 5.77424 GHz
 Temp 2 [T1] OBW -2.40 dBm
 5.81720 GHz

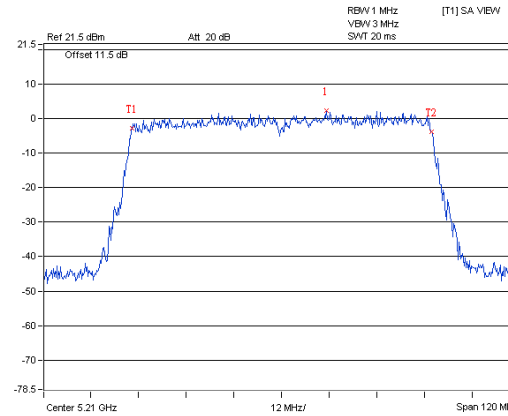

Marker 1 [T1]
 2.23 dBm
 5.22128 GHz
 OBW 75.84 MHz
 Temp 1 [T1] OBW -2.88 dBm
 5.17208 GHz
 Temp 2 [T1] OBW -3.79 dBm
 5.24792 GHz

Indoor Access Point Mode

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.44	16.44
40	5200	16.56	16.68
48	5240	16.56	16.68
149	5745	16.68	20.88
157	5785	16.68	21.72
165	5825	16.68	22.80

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.64	17.64
40	5200	17.64	17.88
48	5240	17.64	17.88
149	5745	17.64	21.36
157	5785	17.76	23.16
165	5825	17.76	23.40

802.11n (HT40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.12	36.12
46	5230	36.24	36.72
151	5755	36.24	40.92
159	5795	36.36	42.96



802.11ac (VHT80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	75.84
155	5775	75.84	75.84

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

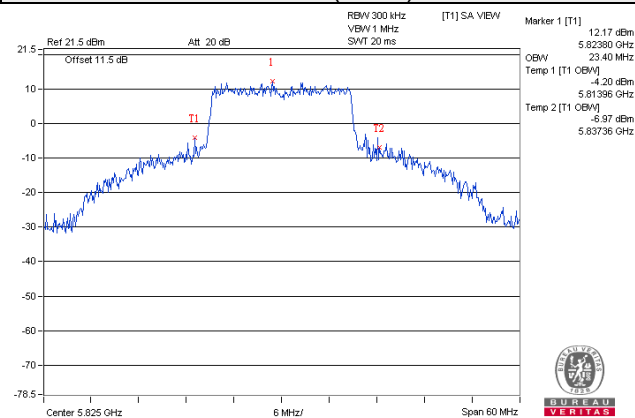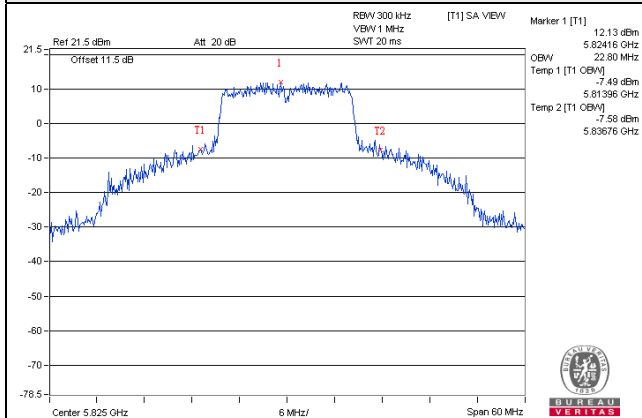

802.11n (HT40)

802.11ac (VHT80)

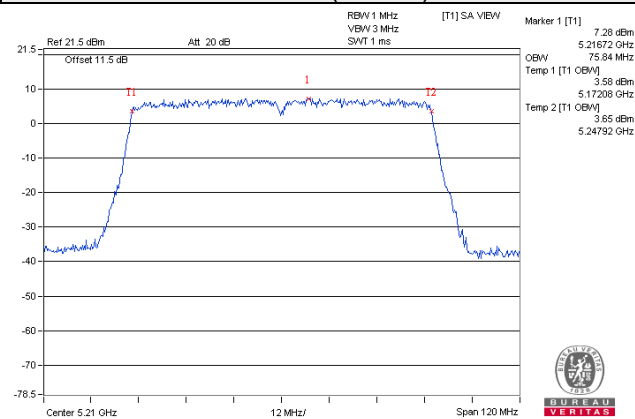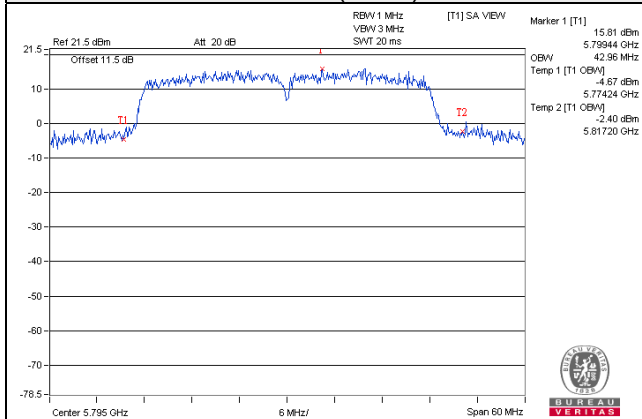

4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement


Outdoor Access Point mode

Operation Band	EUT Category		Limit
U-NII-1	√	Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	11dBm/ MHz
		Mobile and Portable client device	
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

Indoor Access Point mode

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	11dBm/ MHz
		Mobile and Portable client device	
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1 band:

Duty cycle of test signal is > 98%

Using method SA-1

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- c. Sweep time = auto, trigger set to "free run".
- d. Trace average at least 100 traces in power averaging mode.
- e. Record the max value

Duty cycle of test signal is < 98%

Using method SA-2

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 1MHz, Set VBW \geq 3 MHz, Detector = RMS
- c. Set Channel power measure = 1MHz
- d. Sweep time = auto, trigger set to "free run".
- e. Trace average at least 100 traces in power averaging mode.
- f. Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3 band:

Duty cycle of test signal is > 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value

Duty cycle of test signal is < 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 Band (Outdoor Access Point Mode)

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	-2.14	-3.51	0.20	0.43	16.82	Pass
40	5200	-2.13	-3.12	0.20	0.61	16.82	Pass
48	5240	-2.00	-2.55	0.20	0.94	16.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82$ dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-2.58	-3.32	0.08	16.82	Pass
40	5200	-2.40	-3.15	0.25	16.82	Pass
48	5240	-2.37	-2.52	0.57	16.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82$ dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	-5.11	-5.77	0.17	-2.25	16.82	Pass
46	5230	-5.07	-5.54	0.17	-2.12	16.82	Pass

Note:


1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82$ dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-8.32	-9.08	0.32	-5.36	16.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to 17-(6.18-6) = 16.82dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

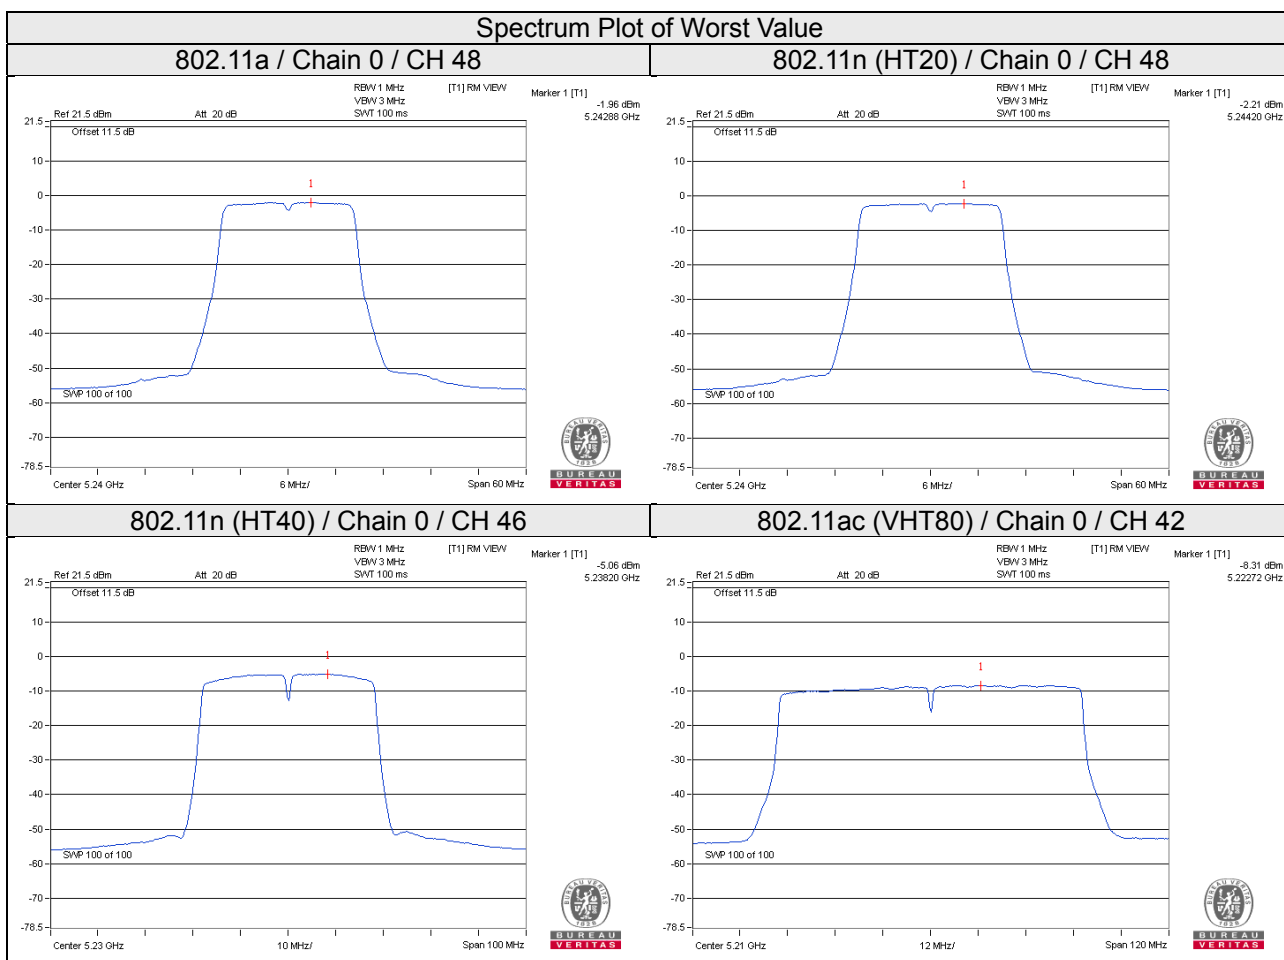

For U-NII-1 Band (Indoor Access Point Mode)

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	6.47	5.90	0.20	9.41	16.82	Pass
40	5200	9.42	8.69	0.20	12.28	16.82	Pass
48	5240	9.50	9.13	0.20	12.53	16.82	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- This antenna was cross-polarized antenna.
Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	6.57	6.35	9.47	16.82	Pass
40	5200	9.11	8.57	11.86	16.82	Pass
48	5240	9.16	8.85	12.02	16.82	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- This antenna was cross-polarized antenna.
Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82\text{dBm}$.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	1.42	1.19	0.17	4.49	16.82	Pass
46	5230	6.52	6.45	0.17	9.67	16.82	Pass

Note:


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- This antenna was cross-polarized antenna.
Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $17-(6.18-6) = 16.82\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-2.39	-2.74	0.32	0.77	16.82	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. This antenna was cross-polarized antenna.
Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to 17-(6.18-6) = 16.82dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

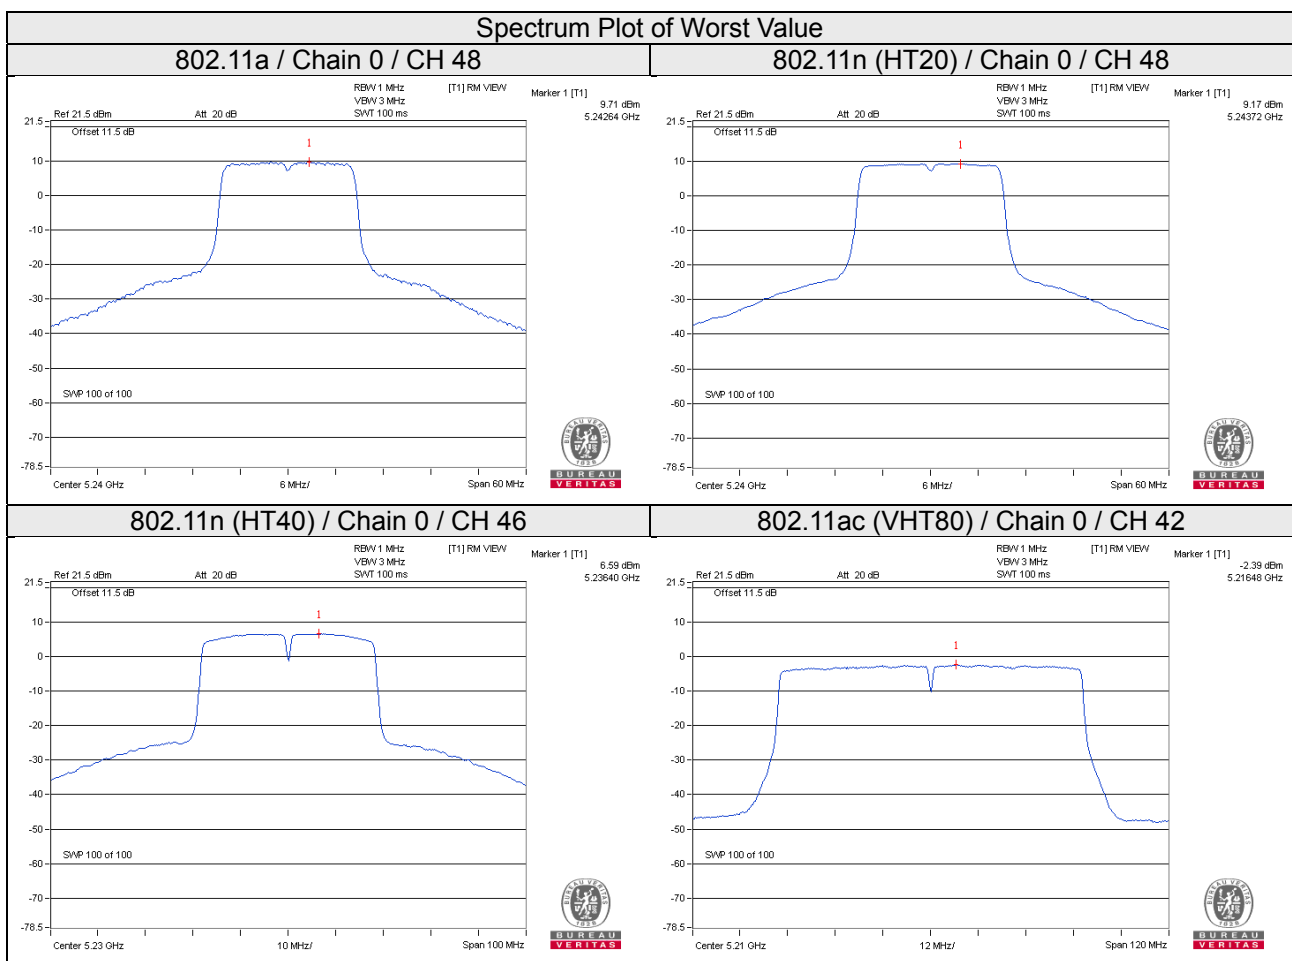

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	0.86	3.08	3.01	0.20	6.29	29.82	Pass
	157	5785	0.60	2.82	3.01	0.20	6.03	29.82	Pass
	165	5825	0.76	2.98	3.01	0.20	6.19	29.82	Pass
1	149	5745	0.56	2.78	3.01	0.20	5.99	29.82	Pass
	157	5785	0.16	2.38	3.01	0.20	5.59	29.82	Pass
	165	5825	0.01	2.23	3.01	0.20	5.44	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $30-(6.18-6) = 29.82$ dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	0.92	3.14	3.01	6.15	29.82	Pass
	157	5785	0.75	2.97	3.01	5.98	29.82	Pass
	165	5825	0.61	2.83	3.01	5.84	29.82	Pass
1	149	5745	0.10	2.32	3.01	5.33	29.82	Pass
	157	5785	-0.24	1.98	3.01	4.99	29.82	Pass
	165	5825	-0.29	1.93	3.01	4.94	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $30-(6.18-6) = 29.82$ dBm.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	151	5755	-2.22	0.00	3.01	0.17	3.18	29.82	Pass
	159	5795	-2.42	-0.20	3.01	0.17	2.98	29.82	Pass
1	151	5755	-2.18	0.04	3.01	0.17	3.22	29.82	Pass
	159	5795	-2.42	-0.20	3.01	0.17	2.98	29.82	Pass

Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $30-(6.18-6) = 29.82$ dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-9.50	-7.28	3.01	0.32	-3.95	29.82	Pass
1	155	5775	-9.77	-7.55	3.01	0.32	-4.22	29.82	Pass



Note:

1. This antenna was cross-polarized antenna.
2. Gain = 6.18dBi > 6dBi, so the power density limit shall be reduced to $30-(6.18-6) = 29.82$ dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

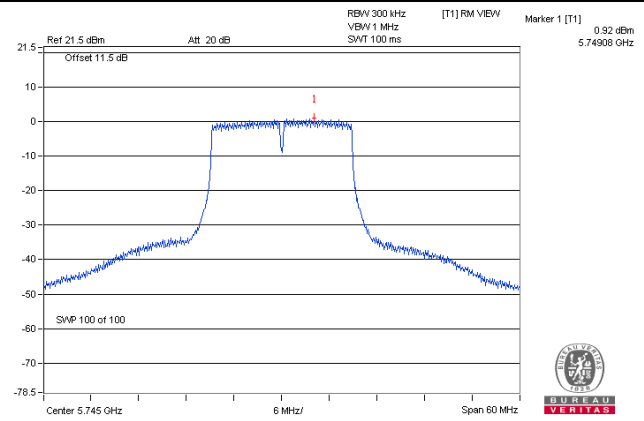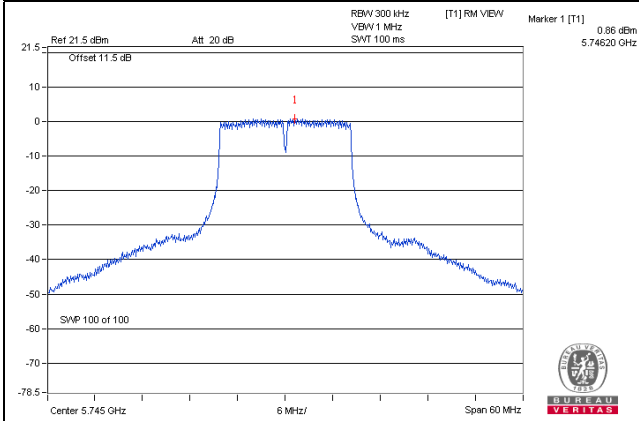

802.11n (HT40)

802.11ac (VHT80)

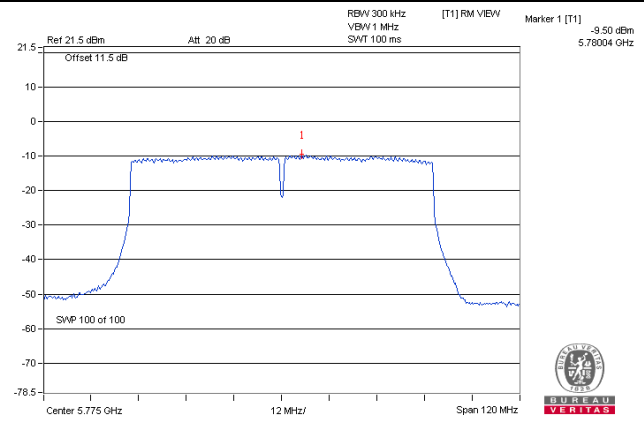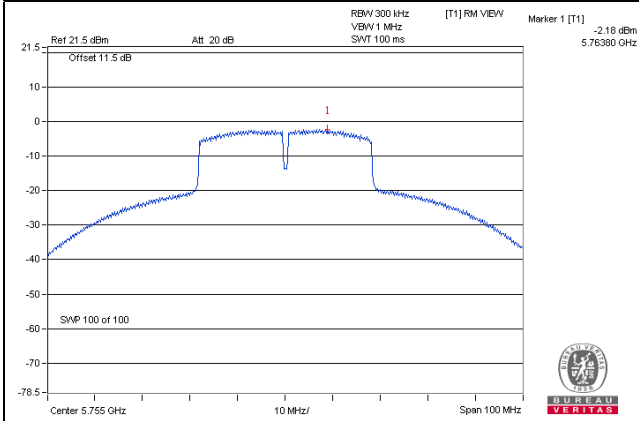


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

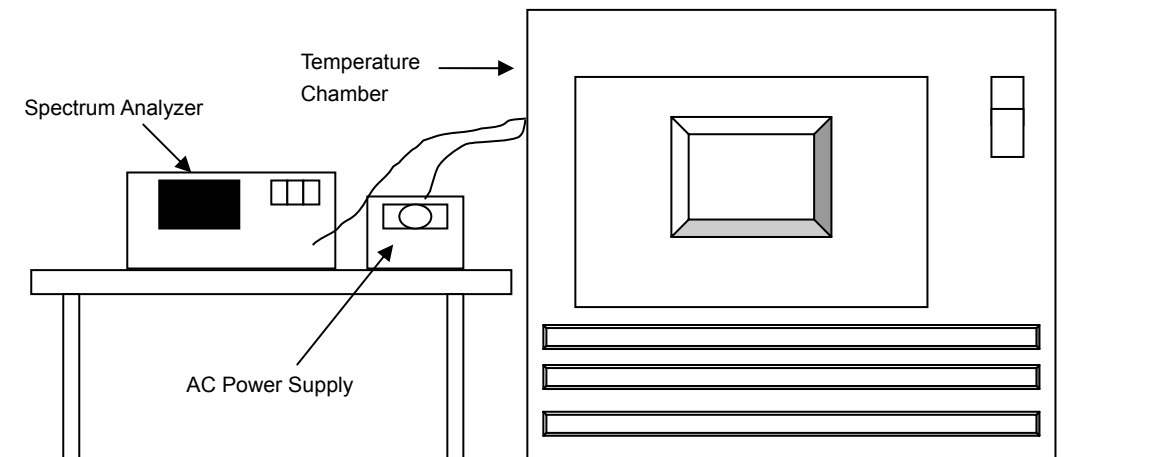

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5180.0129	0.00025	5180.0104	0.00020	5180.0103	0.00020	5180.011	0.00021
40	120	5180.0008	0.00002	5179.9989	-0.00002	5180.0005	0.00001	5180.0021	0.00004
30	120	5180.0000	0.00000	5180.0001	0.00000	5179.9971	-0.00006	5180.0000	0.00000
20	120	5179.9894	-0.00020	5179.9892	-0.00021	5179.9891	-0.00021	5179.9882	-0.00023
10	120	5180.0076	0.00015	5180.0052	0.00010	5180.0078	0.00015	5180.0074	0.00014
0	120	5180.013	0.00025	5180.0138	0.00027	5180.0146	0.00028	5180.0125	0.00024
-10	120	5179.9936	-0.00012	5179.9973	-0.00005	5179.9959	-0.00008	5179.9979	-0.00004
-20	120	5179.9984	-0.00003	5180.0001	0.00000	5180.003	0.00006	5179.9982	-0.00003
-30	120	5179.9816	-0.00036	5179.9796	-0.00039	5179.9808	-0.00037	5179.9798	-0.00039


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5179.9887	-0.00022	5179.9888	-0.00022	5179.9882	-0.00023	5179.989	-0.00021
	120	5179.9894	-0.00020	5179.9892	-0.00021	5179.9891	-0.00021	5179.9882	-0.00023
	102	5179.9889	-0.00021	5179.9895	-0.00020	5179.9899	-0.00019	5179.9891	-0.00021

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.40	16.43	0.5	Pass
157	5785	16.42	16.41	0.5	Pass
165	5825	16.41	16.42	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.63	17.65	0.5	Pass
157	5785	17.64	17.65	0.5	Pass
165	5825	17.63	17.64	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.35	35.51	0.5	Pass
159	5795	35.40	35.84	0.5	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.42	75.98	0.5	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

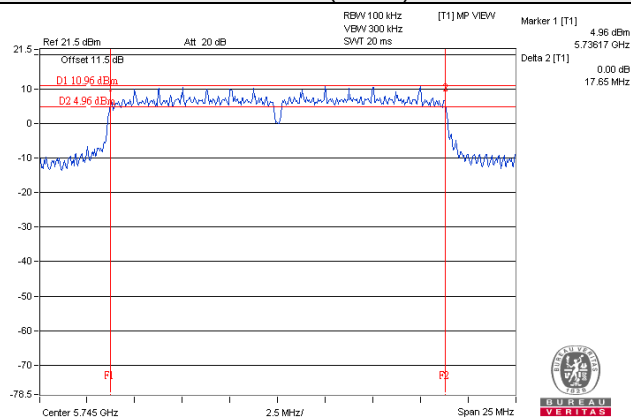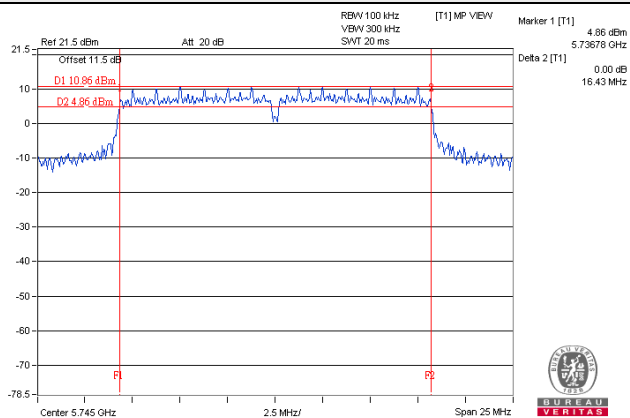

802.11n (HT40)

802.11ac (VHT80)

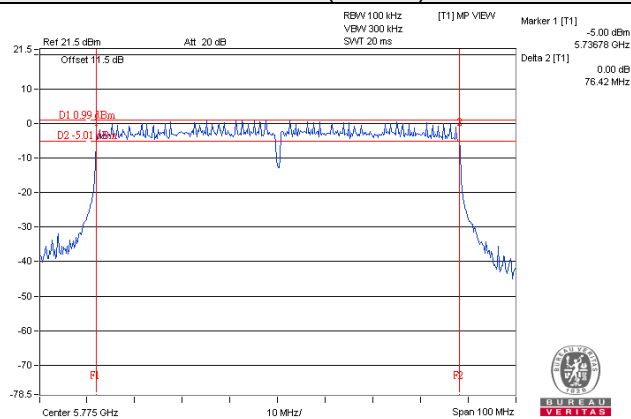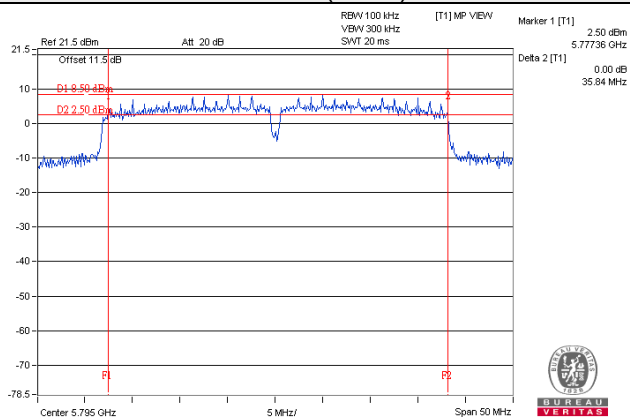


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

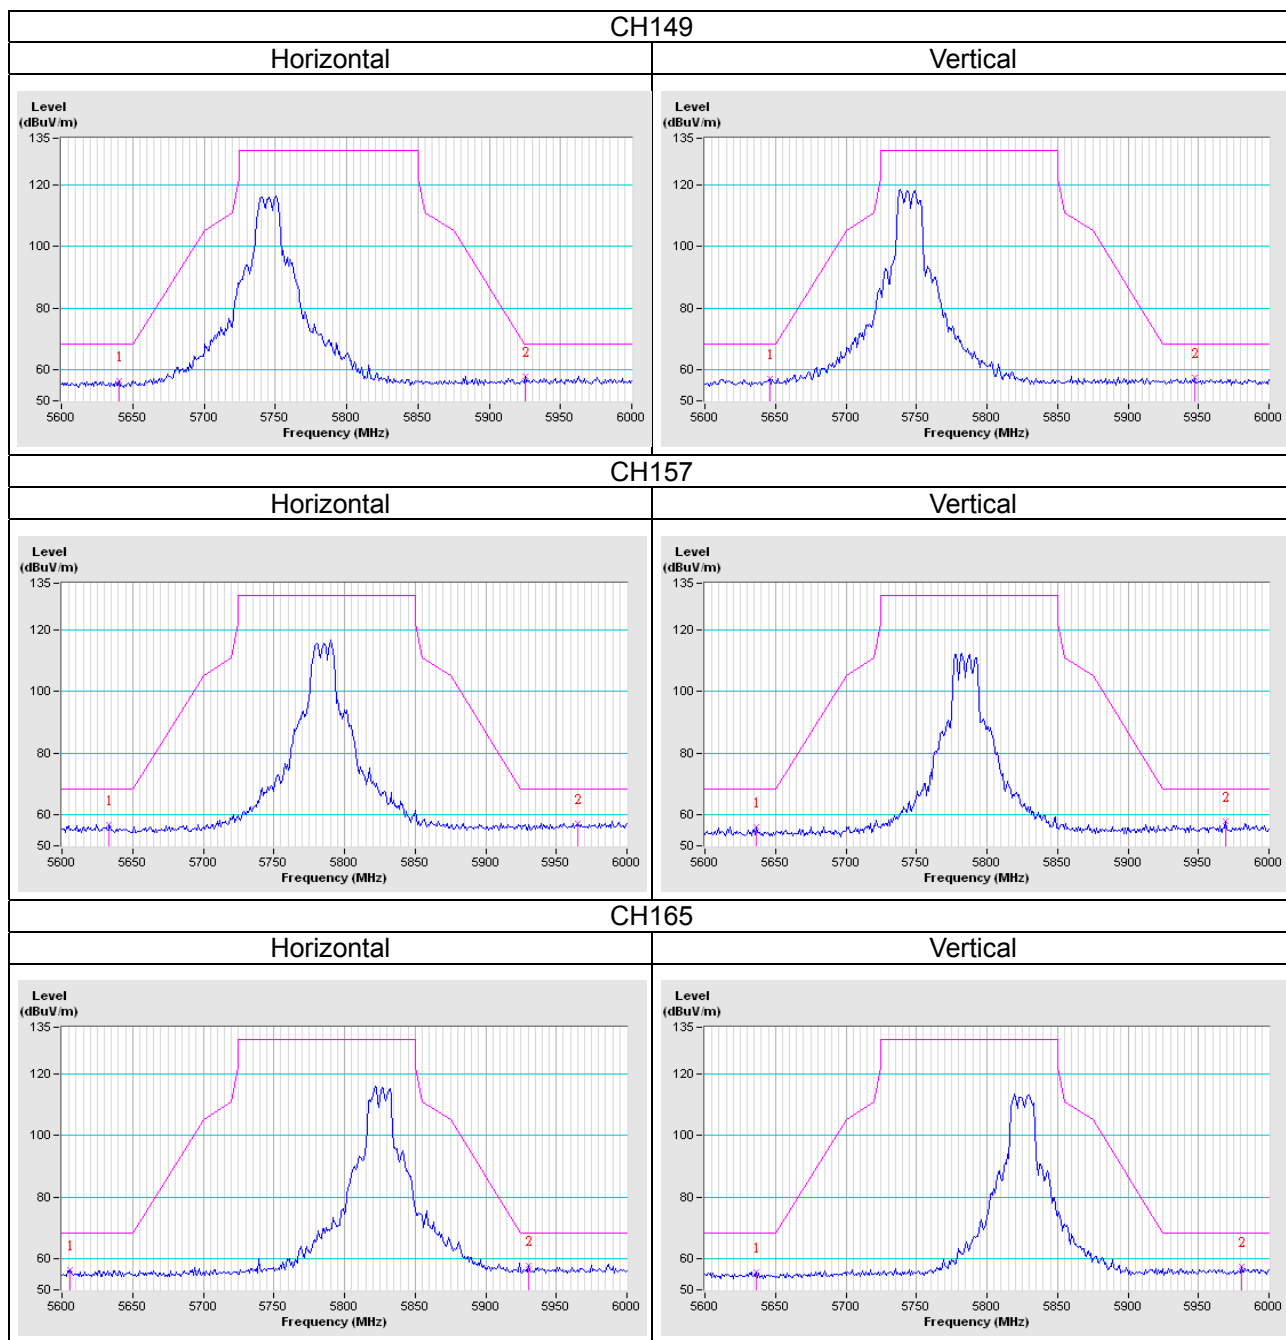


802.11n (HT20)

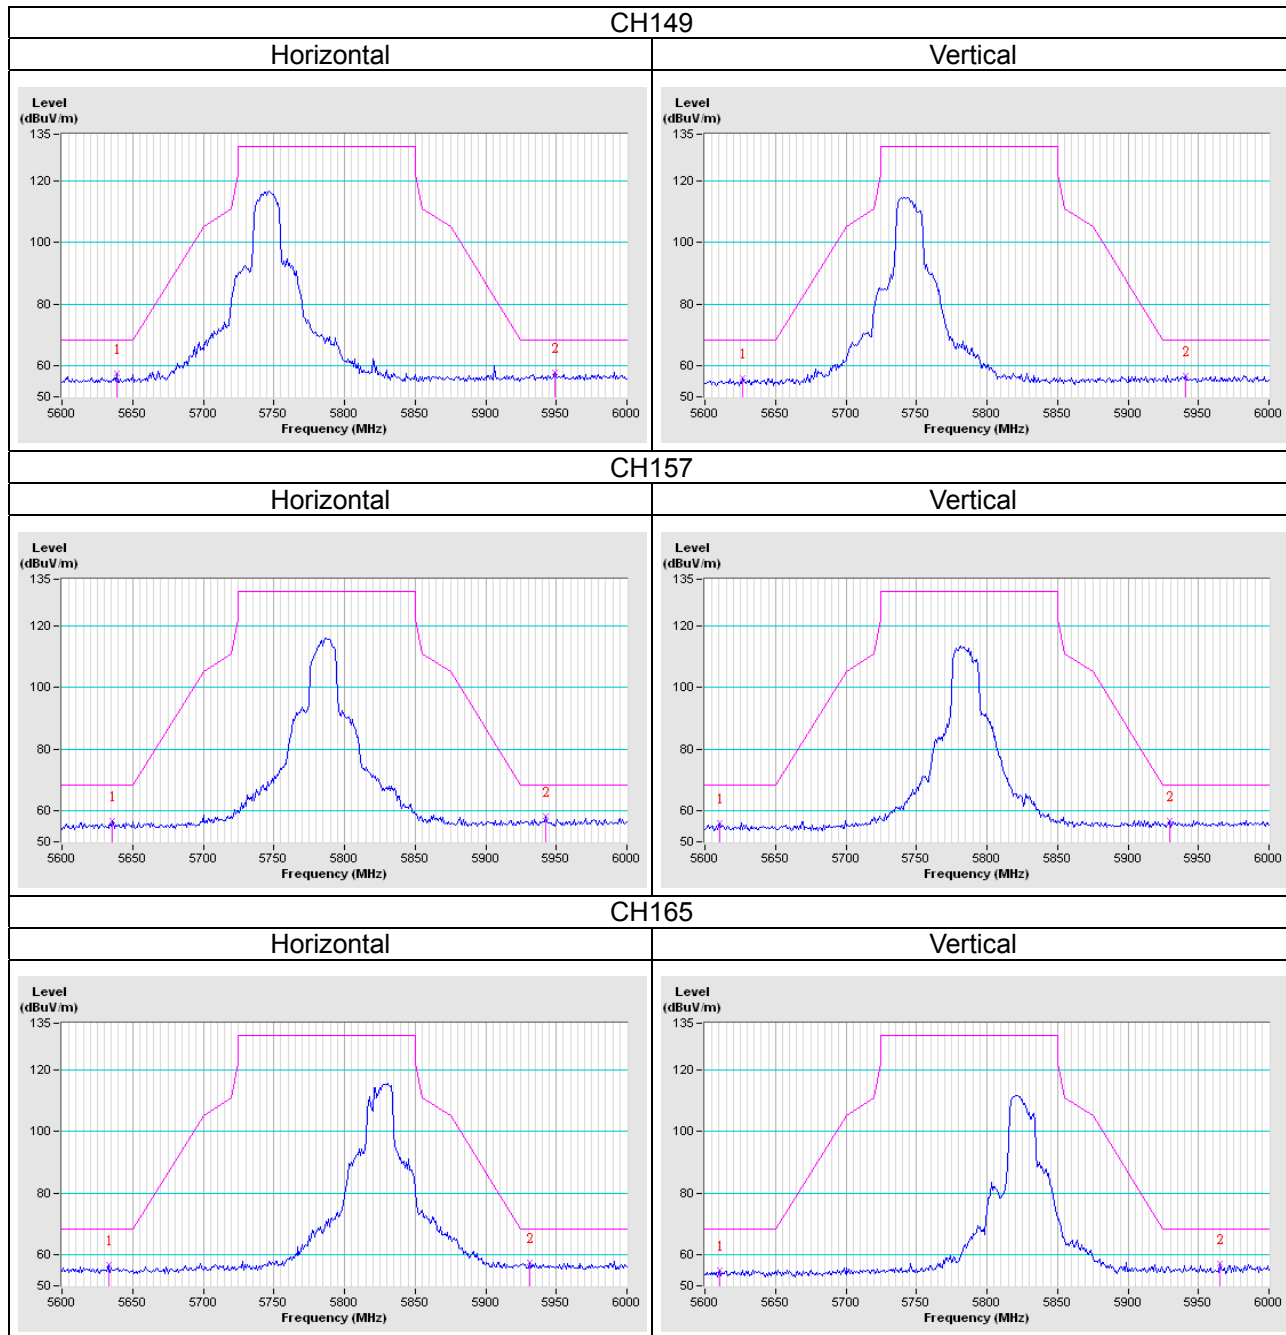

802.11n (HT40)

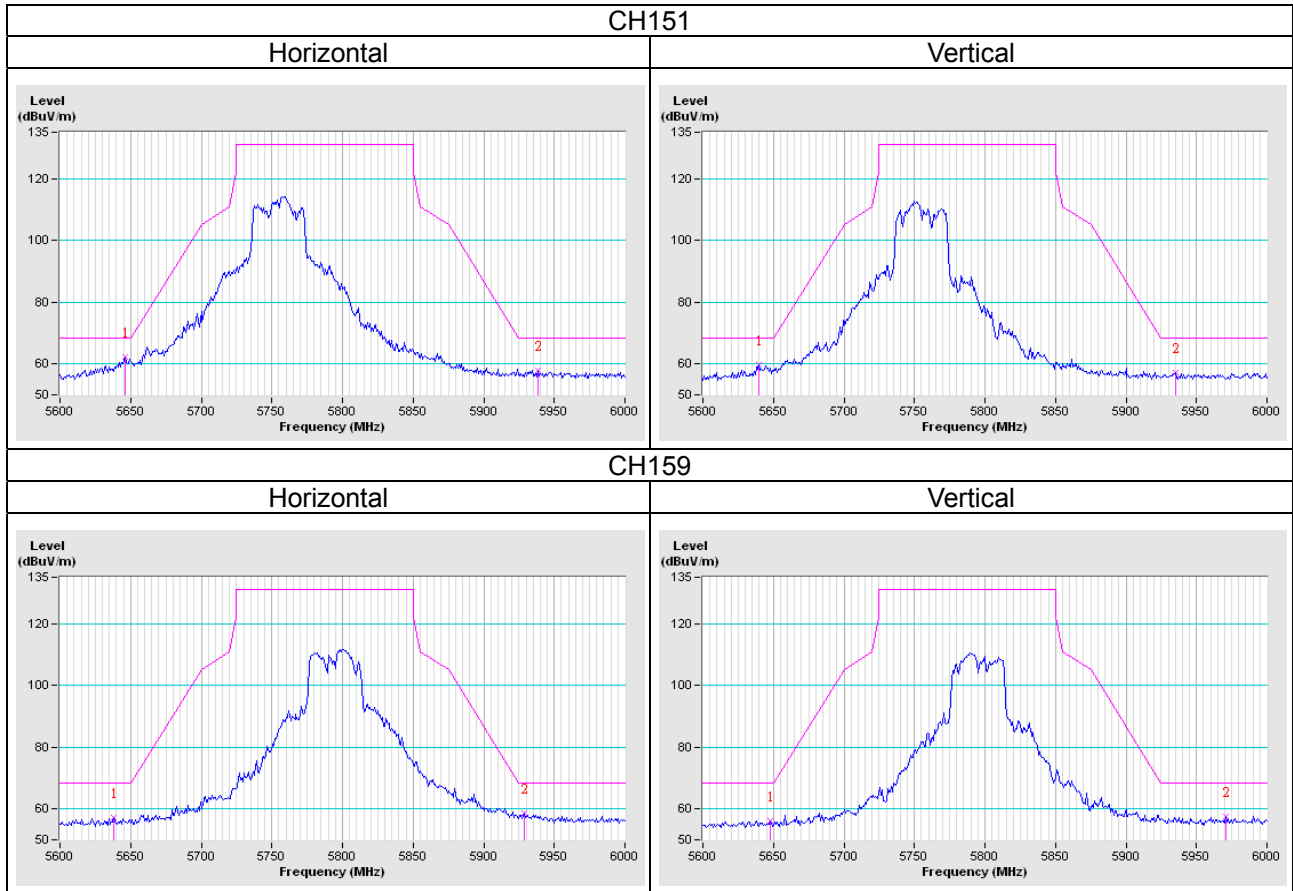

802.11ac (VHT80)

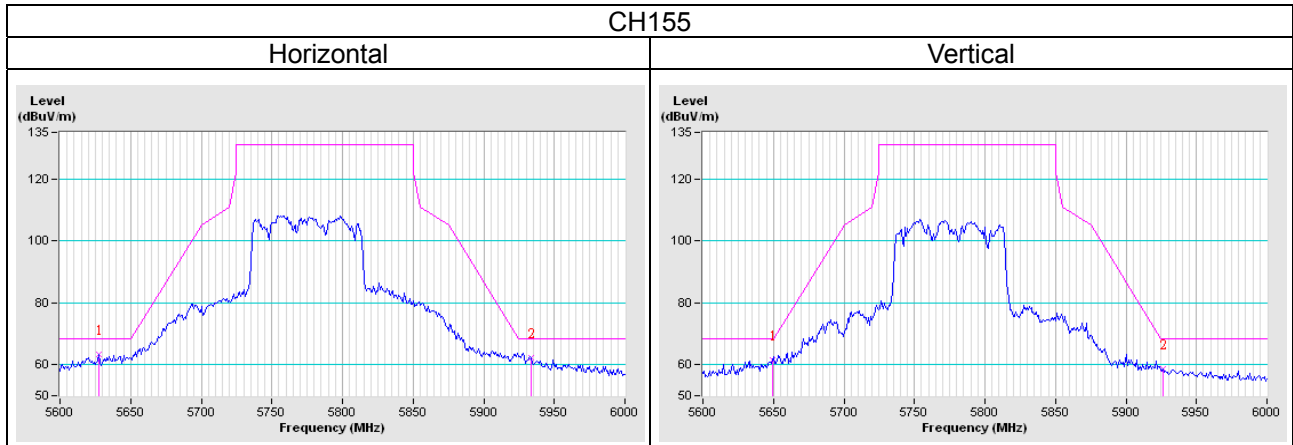

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---