



RADIO TEST REPORT

FCC ID : QXO-AP4000U
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP4000U
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Standard : 47 CFR FCC Part 15.407

The product was received on May 22, 2021, and testing was started from May 22, 2021 and completed on Jun. 29, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	13
1.3 Testing Location Information	13
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration.....	18
2.3 EUT Operation during Test	19
2.4 Accessories	19
2.5 Support Equipment.....	20
2.6 Test Setup Diagram	21
3 Transmitter Test Result	22
3.1 Emission Bandwidth	22
3.2 Maximum Output Power	24
3.3 Power Spectral Density	27
3.4 Unwanted Emissions.....	30
4 Test Equipment and Calibration Data	33
Appendix A. Test Results of Emission Bandwidth	
Appendix B. Test Results of Maximum Output Power	
Appendix C. Test Results of Power Spectral Density	
Appendix D. Test Results of Unwanted Emissions	
Appendix E. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Output Power	PASS	-
3.3	15.407(a)	Power Spectral Density	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5250-5350	a, n (HT20), ac (VHT20), ax (HEW20)	5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5250-5350	n (HT40), ac (VHT40), ax (HEW40)	5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5250-5350	ac (VHT80), ax (HEW80)	5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5150-5350	ac (VHT160), ax (HEW160)	5250	50 [1]
5470-5725		5570	114 [1]

For Radio 2

Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11a	20	1, 2
5.25-5.35GHz	802.11n HT20	20	1, 2
5.25-5.35GHz	802.11n HT20-BF	20	2
5.25-5.35GHz	802.11ac VHT20	20	1, 2
5.25-5.35GHz	802.11ac VHT20-BF	20	2
5.25-5.35GHz	802.11ax HEW20	20	1, 2
5.25-5.35GHz	802.11ax HEW20-BF	20	2
5.25-5.35GHz	802.11n HT40	40	1, 2
5.25-5.35GHz	802.11n HT40-BF	40	2
5.25-5.35GHz	802.11ac VHT40	40	1, 2
5.25-5.35GHz	802.11ac VHT40-BF	40	2
5.25-5.35GHz	802.11ax HEW40	40	1, 2
5.25-5.35GHz	802.11ax HEW40-BF	40	2
5.25-5.35GHz	802.11ac VHT80	80	1, 2
5.25-5.35GHz	802.11ac VHT80-BF	80	2
5.25-5.35GHz	802.11ax HEW80	80	1, 2
5.25-5.35GHz	802.11ax HEW80-BF	80	2
5.47-5.725GHz	802.11a	20	1, 2
5.47-5.725GHz	802.11n HT20	20	1, 2
5.47-5.725GHz	802.11n HT20-BF	20	2
5.47-5.725GHz	802.11ac VHT20	20	1, 2
5.47-5.725GHz	802.11ac VHT20-BF	20	2



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11ax HEW20	20	1, 2
5.47-5.725GHz	802.11ax HEW20-BF	20	2
5.47-5.725GHz	802.11n HT40	40	1, 2
5.47-5.725GHz	802.11n HT40-BF	40	2
5.47-5.725GHz	802.11ac VHT40	40	1, 2
5.47-5.725GHz	802.11ac VHT40-BF	40	2
5.47-5.725GHz	802.11ax HEW40	40	1, 2
5.47-5.725GHz	802.11ax HEW40-BF	40	2
5.47-5.725GHz	802.11ac VHT80	80	1, 2
5.47-5.725GHz	802.11ac VHT80-BF	80	2
5.47-5.725GHz	802.11ax HEW80	80	1, 2
5.47-5.725GHz	802.11ax HEW80-BF	80	2

For Scanning radio 3

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11ac VHT160	160	2
5.15-5.25GHz	802.11ax HEW160	160	2
5.25-5.35GHz	802.11a	20	2
5.25-5.35GHz	802.11n HT20	20	2
5.25-5.35GHz	802.11ac VHT20	20	2
5.25-5.35GHz	802.11ax HEW20	20	2
5.25-5.35GHz	802.11n HT40	40	2
5.25-5.35GHz	802.11ac VHT40	40	2
5.25-5.35GHz	802.11ax HEW40	40	2
5.25-5.35GHz	802.11ac VHT80	80	2
5.25-5.35GHz	802.11ax HEW80	80	2
5.25-5.35GHz	802.11ac VHT160	160	2
5.25-5.35GHz	802.11ax HEW160	160	2
5.47-5.725GHz	802.11a	20	2
5.47-5.725GHz	802.11n HT20	20	2
5.47-5.725GHz	802.11ac VHT20	20	2
5.47-5.725GHz	802.11ax HEW20	20	2
5.47-5.725GHz	802.11n HT40	40	2
5.47-5.725GHz	802.11ac VHT40	40	2
5.47-5.725GHz	802.11ax HEW40	40	2
5.47-5.725GHz	802.11ac VHT80	80	2
5.47-5.725GHz	802.11ax HEW80	80	2
5.47-5.725GHz	802.11ac VHT160	160	2
5.47-5.725GHz	802.11ax HEW160	160	2



Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port					Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz (Radio 1) / 5GHz (Radio 2)	WLAN 2.4GHz+ 5GHz (Radio 3)	WLAN 6GHz (Radio 3)	Bluetooth / IEEE802.15.4 (Radio 4)	UWB (Radio 5)				
1	2	-	-	-	-	N/A	PIFA	I-PEX	Note 1
2	1	-	-	-	-	N/A	PIFA	I-PEX	
3	-	2	-	-	-	N/A	PIFA	I-PEX	
4	-	1	-	-	-	N/A	PIFA	I-PEX	
5	-	-	1	-	-	N/A	PIFA	I-PEX	
6	-	-	2	-	-	N/A	PIFA	I-PEX	
7	-	-	-	1	-	N/A	PIFA	I-PEX	
8	-	-	-	-	1	N/A	PIFA	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)														
	WLAN 2.4GHz (Radio 1)	WLAN 2.4GHz (Radio 3)	WLAN 5GHz (Radio 2)				WLAN 5GHz (Radio 3)				WLAN 6GHz (Radio 3)				Bluetooth / IEEE802.1 5.4 (Radio 4)
			UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	4	-	5.14	5.14	4.23	4.43	-	-	-	-	-	-	-	-	-
2	3.61	-	4.53	4.53	3.49	3.08	-	-	-	-	-	-	-	-	-
3	-	5.20	-	-	-	-	5.91	5.91	5.39	5.80	-	-	-	-	-
4	-	5.32	-	-	-	-	5.11	5.11	5.11	5.62	-	-	-	-	-
5	-	-	-	-	-	-	-	-	-	-	4.34	4.56	4.56	4.50	-
6	-	-	-	-	-	-	-	-	-	-	4.88	5.25	5.25	5.05	-
7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.26
8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.16

Ant.	Directional Gain (dBi)									
	WLAN 2.4GHz (Radio 1)		WLAN 5GHz (Radio 2)							
			UNII 1		UNII 2A		UNII 2C		UNII 3	
	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S
1	4.7	1.87	3.77	1.20	3.36	1.37	3.85	1.42	2.96	1.05
2										

Note 2: The EUT has eight antennas.

Note 3: The above information was declared by manufacturer.

Note 4: Radio 1, 2: Maximum Directional Gain following KDB662911 D03. The antenna report is provided in the operational description for this application.

Note 5: Radio 3: Maximum Directional Gain following KDB662911 D01.

For Radio 1

For 2.4GHz:

For IEEE 802.11b/g/n/VHT/ax mode (1TX, 2TX/2RX):

For 1TX

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2

For 5GHz UNII 1~3:

For IEEE 802.11a/n/ac/ax mode (1TX, 2TX/2RX):



For 1TX

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For scanning radio 3

For 2.4GHz:

For IEEE 802.11b/g/n/VHT/ax mode (2TX/2RX):

For 5GHz UNII 1~3:

For IEEE 802.11a/n/ac/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6E UNII 5~8 (1TX, 2TX/2RX):

For 1TX

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 2 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 4

Bluetooth / IEEE802.15.4 (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 5

UBW (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle****For Radio 2****1T1S**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.953	0.21	2.068m	1k
802.11ax HEW20	0.981	0.08	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ax HEW40	0.964	0.16	782.5u	3k
802.11ax HEW80	0.932	0.31	417.5u	3k

2T1S

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.953	0.21	2.068m	1k

2T2S

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20	0.965	0.15	790u	3k
802.11ax HEW40	0.935	0.29	437.5u	3k
802.11ax HEW80	0.894	0.49	247.5u	10k

For Scanning radio 3**2T1S**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.987	0.06	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

2T2S

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20	0.964	0.16	782.5u	3k
802.11ax HEW40	0.934	0.3	425u	3k
802.11ax HEW80	0.894	0.49	242.5u	10k
802.11ax HEW160	0.84	0.76	157.5u	10k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

EUT Power Type	From PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax in 2.4GHz of radio 1, n/ac/ax in 5GHz UNII 1~UNII 3 of radio 2, and ax in 6GHz UNII 5~UNII 8 of radio 3.			
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☒	Indoor P2M
	☐	Fixed P2P	☐	Client
TPC Function	☒	With TPC	☐	Without TPC
Test Software Version	accessMtool [version 3.2.1.0]			

Note: The above information was declared by manufacturer.

1.1.5 Table for Radio function

Radio	WLAN 2.4GHz	5GHz UNII 1~3	Scanning radio (WLAN 2.4GHz / 5GHz UNII 1~3 / 6E (UNII 5~8))	Bluetooth / IEEE802.15.4	UWB
1	V (AP, Bridge, Mesh)	-	-	-	-
2	-	V AP for UNII 1~3 Bridge, Mesh for UNII 1, 3	-	-	-
3	-	-	V (AP)	-	-
4	-	-	-	V	-
5	-	-	-	-	V

Note: The above information was declared by manufacturer.

1.1.6 Table for EUT support function

Function
AP
Bridge
Mesh

Note: For above table list, only AP mode was tested and recorded in this test.

Note: The above information was declared by manufacturer.



1.1.7 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR151220AB.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add UNII 2A and UNII 2C (5250~5350MHz and 5470~5725MHz) for this device. 2. Add 160MHz for Radio 3.	1. Emission Bandwidth 2. Maximum Output Power 3. Power Spectral Density 4. Unwanted Emissions above 1GHz



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Paul Chen	23.4~24 / 55~60	May 22, 2021~Jun. 29, 2021
Radiated	03CH02-CB	Nyle Chang	26.3~27.1 / 64~68	May 27, 2021

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.5 dB	Confidence levels of 95%
Bandwidth Measurement	0.9%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Radio 2
1T1S

Mode	Power Setting	Power Setting (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-
5260MHz	90	22.5
5300MHz	91	22.75
5320MHz	90	22.5
5500MHz	83	20.75
5580MHz	93	23.25
5700MHz	78	19.5
5720MHz Straddle 5.47-5.725GHz	90	22.5
5720MHz Straddle 5.725-5.85GHz	90	22.5
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-
5260MHz	89	22.25
5300MHz	88	22
5320MHz	87	21.75
5500MHz	78	19.5
5580MHz	91	22.75
5700MHz	72	18
5720MHz Straddle 5.47-5.725GHz	87	21.75
5720MHz Straddle 5.725-5.85GHz	87	21.75
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-
5230MHz	89	22.25
5270MHz	93	23.25
5310MHz	77	19.25
5510MHz	72	18
5550MHz	91	22.75
5670MHz	87	21.75
5710MHz Straddle 5.47-5.725GHz	94	23.5
5710MHz Straddle 5.725-5.85GHz	94	23.5
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-
5290MHz	75	18.75
5530MHz	70	17.5
5610MHz	90	22.5
5690MHz Straddle 5.47-5.725GHz	89	22.25
5690MHz Straddle 5.725-5.85GHz	89	22.25

**2T1S**

Mode	Power Setting	Power Setting (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-
5260MHz	78	19.5
5300MHz	78	19.5
5320MHz	79	19.75
5500MHz	78	19.5
5580MHz	80	20
5700MHz	71	17.75
5720MHz Straddle 5.47-5.725GHz	77	19.25
5720MHz Straddle 5.725-5.85GHz	77	19.25

2T2S

Mode	Power Setting	PowerSetting (dBm)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-
5260MHz	79	19.75
5300MHz	79	19.75
5320MHz	79	19.75
5500MHz	77	19.25
5580MHz	80	20.00
5700MHz	71	17.75
5720MHz Straddle 5.47-5.725GHz	78	19.50
5720MHz Straddle 5.725-5.85GHz	78	19.50
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-
5270MHz	82	20.50
5310MHz	68	17.00
5510MHz	61	15.25
5550MHz	80	20.00
5670MHz	77	19.25
5710MHz Straddle 5.47-5.725GHz	78	19.50
5710MHz Straddle 5.725-5.85GHz	78	19.50
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-
5290MHz	66	16.50
5530MHz	62	15.50
5610MHz	80	20.00
5690MHz Straddle 5.47-5.725GHz	77	19.25
5690MHz Straddle 5.725-5.85GHz	77	19.25

**For Scanning radio 3
2T1S**

Mode	Power Setting	Power Setting (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-
5260MHz	68	17
5300MHz	69	17.25
5320MHz	70	17.5
5500MHz	64	16
5580MHz	69	17.25
5700MHz	60	15
5720MHz Straddle 5.47-5.725GHz	67	16.75
5720MHz Straddle 5.725-5.85GHz	67	16.75

2T2S

Mode	Power Setting	PowerSetting (dBm)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-
5260MHz	79	19.75
5300MHz	80	20.00
5320MHz	75	18.75
5500MHz	74	18.50
5580MHz	80	20.00
5700MHz	62	15.50
5720MHz Straddle 5.47-5.725GHz	77	19.25
5720MHz Straddle 5.725-5.85GHz	77	19.25
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-
5270MHz	83	20.75
5310MHz	84	21.00
5510MHz	60	15.00
5550MHz	80	20.00
5670MHz	66	16.50
5710MHz Straddle 5.47-5.725GHz	78	19.50
5710MHz Straddle 5.725-5.85GHz	78	19.50
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-
5290MHz	66	16.50
5530MHz	69	17.25
5610MHz	80	20.00
5690MHz Straddle 5.47-5.725GHz	77	19.25
5690MHz Straddle 5.725-5.85GHz	77	19.25
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-
5250MHz Straddle 5.15-5.25GHz	62	15.50
5250MHz Straddle 5.25-5.35GHz	62	15.50



RADIO TEST REPORT

Report No. : FR151220-02

Mode	Power Setting	PowerSetting (dBm)
5570MHz	60	15.00

Note:

- ♦ Evaluated VHT20/VHT40/VHT80/VHT160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160 mode are the same or lower than VHT20/VHT40/VHT80/VHT160.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains
1	Refer to note 1 for detail operating mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
	1. For Radio 2 and Scanning radio 3 The EUT was performed at X axis, Y axis and Z axis and the worst case was found at Z axis. So the measurement will follow this same test configuration. 2. Refer to note 1 for detail operating mode
1	Radio 2_1T1S_EUT in Z axis
2	Radio 2_2T1S_EUT in Z axis
3	Radio 2_2T2S_EUT in Z axis
4	Scanning radio 3_2T1S_EUT in Z axis
5	Scanning radio 3_2T2S_EUT in Z axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_2.4GHz + Radio 4_Bluetooth
2	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_2.4GHz + Radio 4_802.15.4
3	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_2.4GHz + Radio 4_UWB
4	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_5GHz + Radio 4_Bluetooth
5	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_5GHz + Radio 4_802.15.4
6	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_5GHz + Radio 4_UWB
7	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E + Radio 4_Bluetooth
8	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E + Radio 4_802.15.4
9	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E + Radio 4_UWB
Refer to Sporton Test Report No.: FA151220-02 for Co-location RF Exposure Evaluation.	



Note 1: Test Mode

Test Item	Test Mode					
	802.11a			802.11ax HEW20/40/80/160		
	1T1S	CDD 2T1S	CDD 2T2S	1T1S	CDD 2T1S	CDD 2T2S
Maximum Conducted Output Power	V	V	-	V	Note 2	V
Emission Bandwidth	V	V	-	V	Note 2	V
Peak Power Spectral Density	V	V	-	V	Note 2	V
Radiated Emission	V	V	-	V	Note 2	V
Band Edge Emission	V	V	-	V	Note 2	V

Note 2: 802.11ax HEW20/40 2T1S CDD mode was covered by 802.11ax HEW20/40 2T2S, due to
 $2T1S = \min(2T2S, (2T2S - (10 \cdot \log(2/1) - 2T2S \text{ (worst case of PSD/BE/Harmonic) MARGIN})))$.

Note 3: The PoE is for measurement only, would not be marketed.

PoE information as below:

Power	Brand	Model
PoE	Microsemi	PD-9001-10GC/AC

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
Cradle*1



2.5 Support Equipment


For Radiated:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Microsemi	PD-9001-10GC/AC	N/A

For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Microsemi	PD-9001-10GC/AC	N/A

2.6 Test Setup Diagram

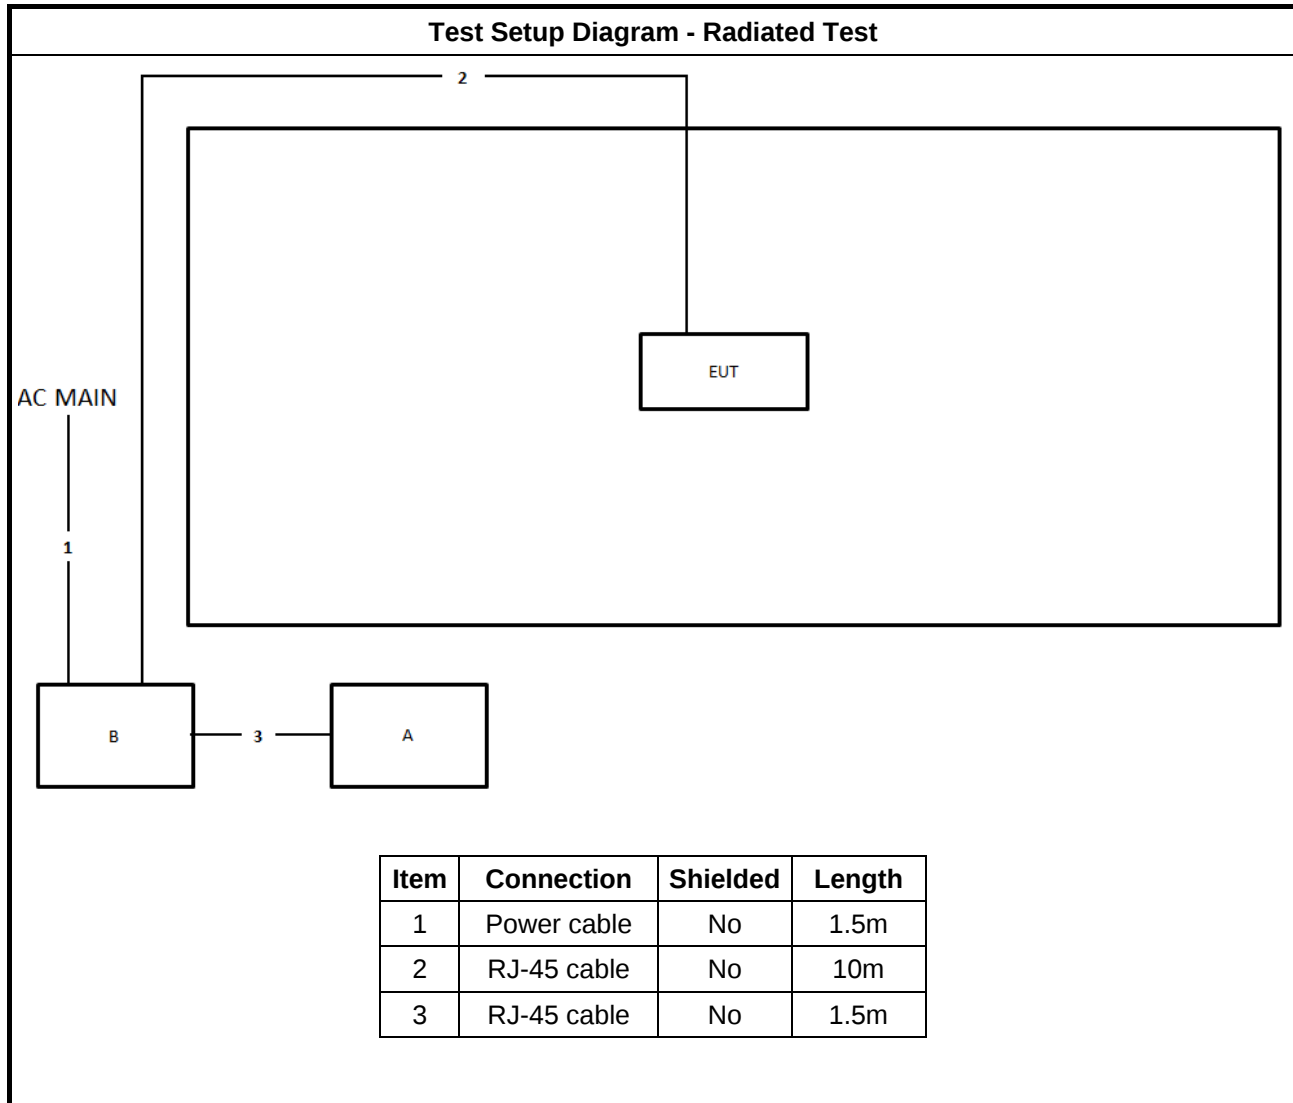



3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.
☐	For the 5.85-5.895 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

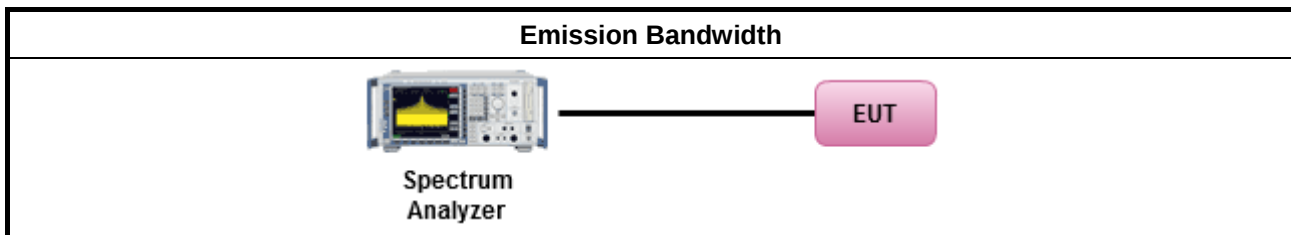

3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A



3.2 Maximum Output Power

3.2.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
Maximum EIRP Limit	
☐ For the 5.85-5.895 GHz band:	
	- Indoor AP & subordinate device < 36 dBm - Client device < 30 dBm
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
☐ For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
☐ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the

lesser of 1 W.

P_{Out} = maximum conducted output power in dBm,

G_{Tx} = the maximum transmitting antenna directional gain in dBi.

3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
Maximum Conducted Output Power	
Average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$	

3.2.4 Test Setup

For Straddle channel

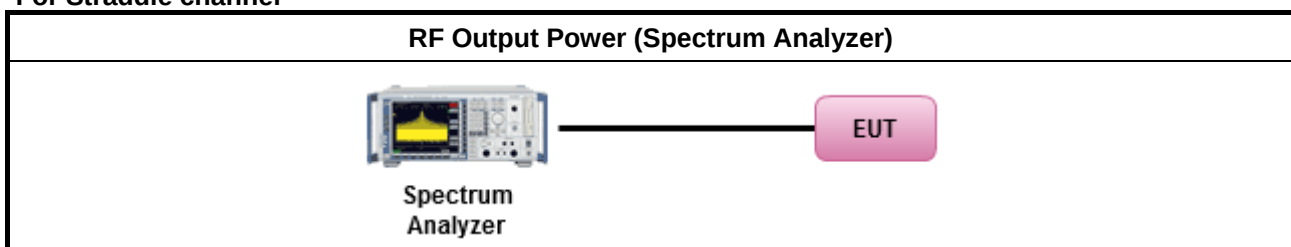

For others channel

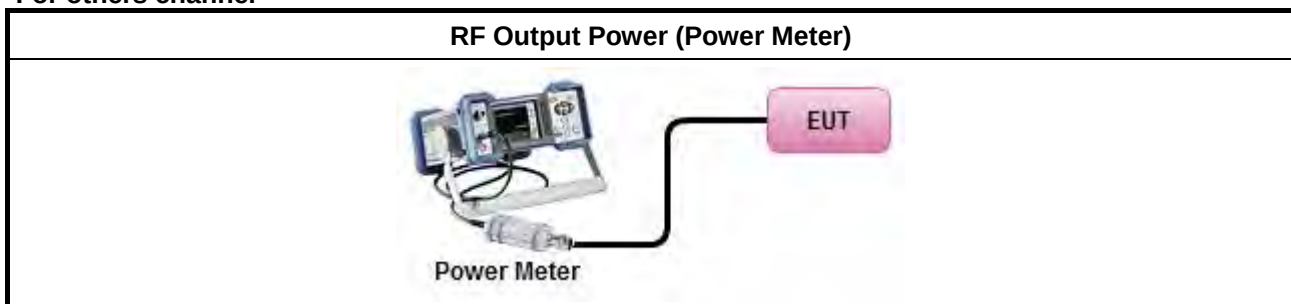



3.2.5 Test Result of Maximum Output Power

Refer as Appendix B



3.3 Power Spectral Density

3.3.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
EIRP Power Spectral Density Limit	
☐ For the 5.85-5.895 GHz band:	
	- Indoor AP & subordinate device < 20dBm/MHz - Client device < 14dBm/MHz
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output	



power shall be used to determine the power spectral density. And power spectral density in dBm/MHz
 G_{TX} = the maximum transmitting antenna directional gain in dBi.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.3.4 Test Setup

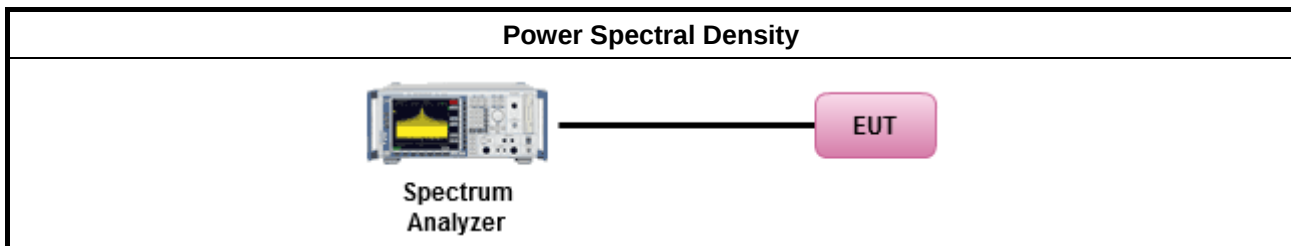

3.3.5 Test Result of Power Spectral Density

Refer as Appendix C



3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
☐ 5.85 - 5.895 GHz	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of - 7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an



	e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz. (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/ MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	

Test Method

- All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

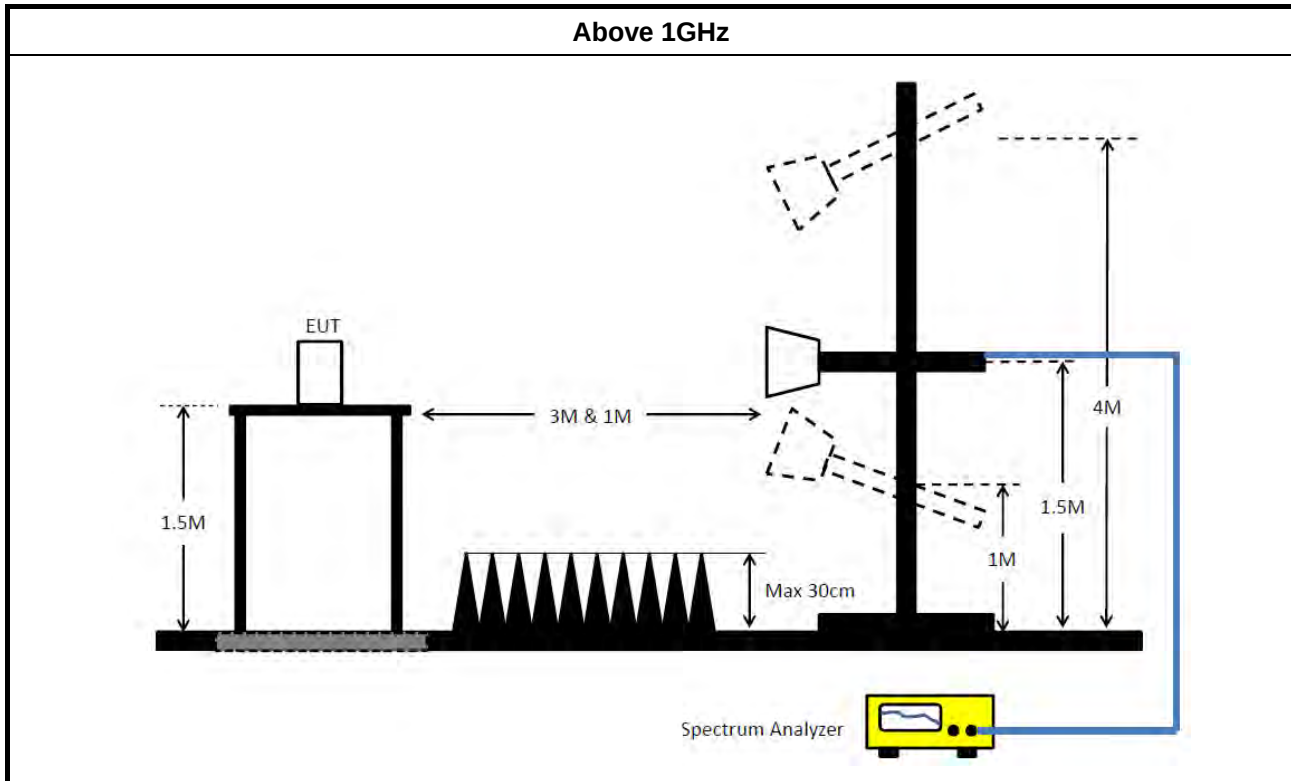

3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.4.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.4.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz 3m	Mar. 27, 2021	Mar. 26, 2022	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	May 04, 2021	May 03, 2022	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 20, 2021	May 19, 2022	Radiation (03CH02-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 15, 2020	Oct. 14, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 27, 2020	Jul. 26, 2021	Conduction (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conduction (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conduction (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conduction (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conduction (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conduction (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conduction (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conduction (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

**For Radio 2 / 1T1S
Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	37.59M	19.79M	19M8D1D	37.38M	18.471M
802.11ax HEW20_Nss1,(MCS0)_1TX	41.1M	19.76M	19M8D1D	36.51M	19.34M
802.11ax HEW40_Nss1,(MCS0)_1TX	81.84M	39.16M	39M2D1D	40.74M	37.601M
802.11ax HEW80_Nss1,(MCS0)_1TX	81.36M	76.882M	76M9D1D	81.36M	76.882M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	37.5M	19.37M	19M4D1D	21.45M	14.658M
802.11ax HEW20_Nss1,(MCS0)_1TX	40.14M	19.55M	19M5D1D	21.63M	14.728M
802.11ax HEW40_Nss1,(MCS0)_1TX	74.88M	38.801M	38M8D1D	40.2M	34.595M
802.11ax HEW80_Nss1,(MCS0)_1TX	153.6M	79.76M	79M8D1D	81.48M	74.208M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	3.135M	9.88M	9M88D1D	3.135M	9.88M
802.11ax HEW20_Nss1,(MCS0)_1TX	4.455M	9.235M	9M24D1D	4.455M	9.235M
802.11ax HEW40_Nss1,(MCS0)_1TX	3.78M	23.523M	23M5D1D	3.78M	23.523M
802.11ax HEW80_Nss1,(MCS0)_1TX	3.585M	26.642M	26M6D1D	3.585M	26.642M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5260MHz	Pass	Inf	37.38M	19.1M
5300MHz	Pass	Inf	37.59M	19.79M
5320MHz	Pass	Inf	37.59M	18.471M
5500MHz	Pass	Inf	26.67M	16.942M
5580MHz	Pass	Inf	37.5M	19.37M
5700MHz	Pass	Inf	21.45M	16.822M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	23.8M	14.658M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.135M	9.88M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5260MHz	Pass	Inf	41.1M	19.76M
5300MHz	Pass	Inf	40.11M	19.52M
5320MHz	Pass	Inf	36.51M	19.34M
5500MHz	Pass	Inf	22.47M	19.07M
5580MHz	Pass	Inf	40.14M	19.55M
5700MHz	Pass	Inf	21.63M	19.04M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	25.27M	14.728M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.455M	9.235M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5270MHz	Pass	Inf	81.84M	39.16M
5310MHz	Pass	Inf	40.74M	37.601M
5510MHz	Pass	Inf	40.2M	37.541M
5550MHz	Pass	Inf	74.88M	38.801M
5670MHz	Pass	Inf	58.56M	37.961M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	53.888M	34.595M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.78M	23.523M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5290MHz	Pass	Inf	81.36M	76.882M
5530MHz	Pass	Inf	81.48M	77.001M
5610MHz	Pass	Inf	153.6M	79.76M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	105.555M	74.208M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.585M	26.642M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth;

802.11a_Nss1,(6Mbps)_1TX

EBW
5260MHz


15/06/2021

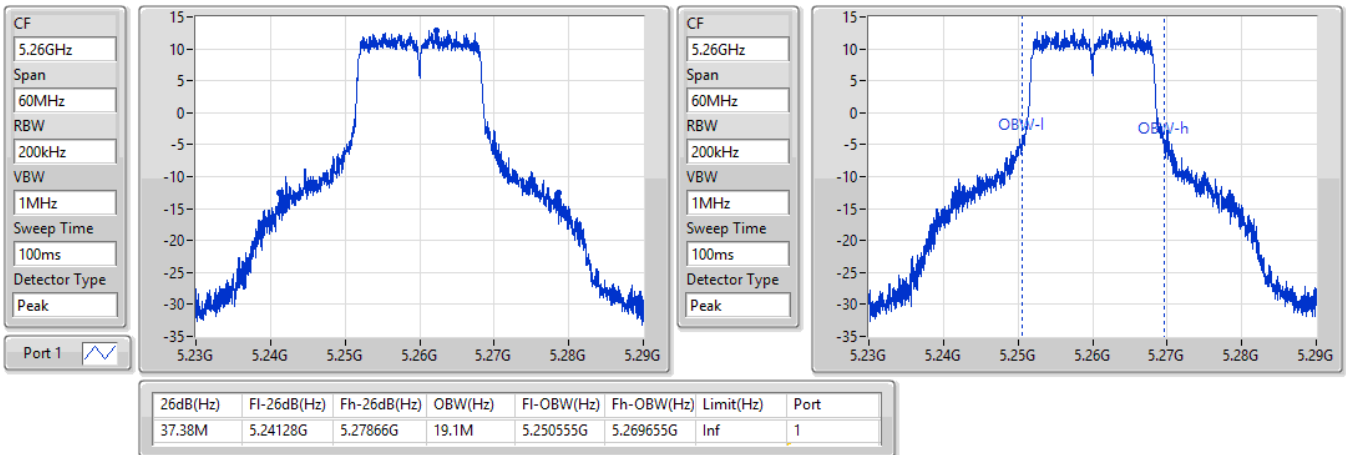

802.11a_Nss1,(6Mbps)_1TX

EBW
5300MHz


15/06/2021

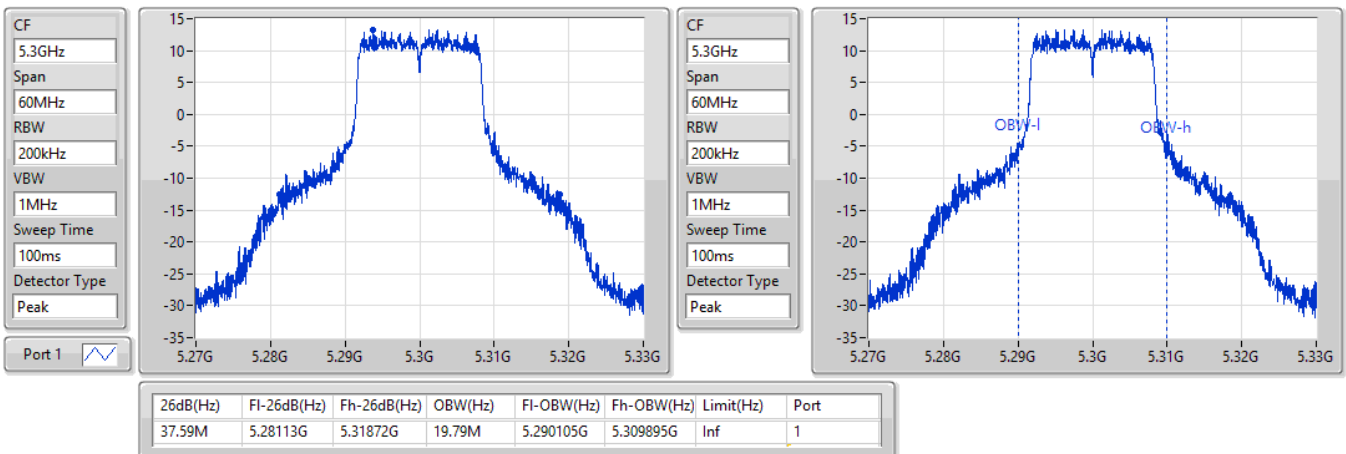

802.11a_Nss1,(6Mbps)_1TX

EBW
5320MHz


15/06/2021

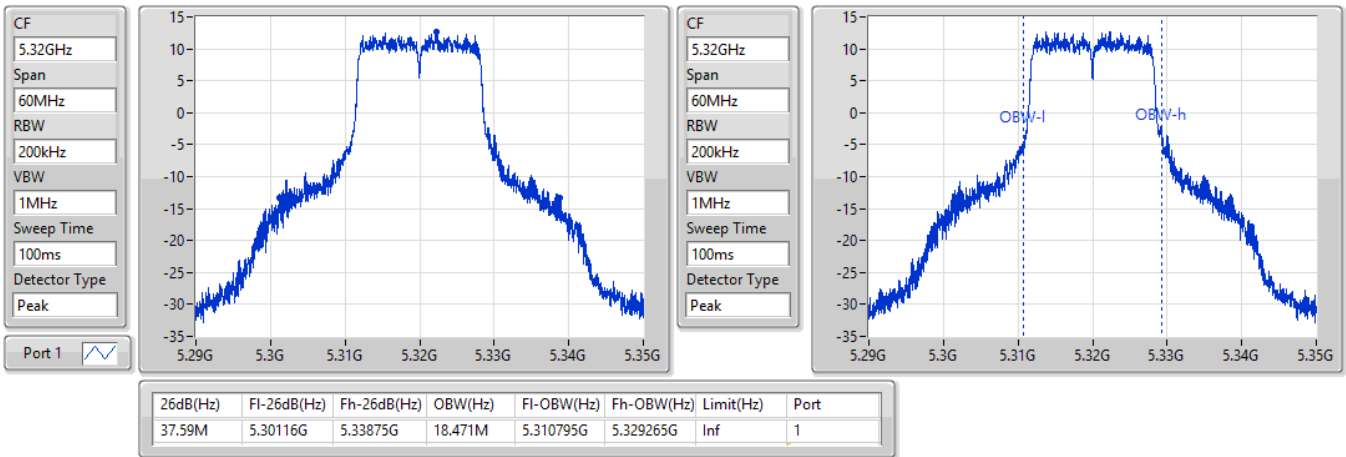

802.11a_Nss1,(6Mbps)_1TX


EBW
5500MHz

15/06/2021

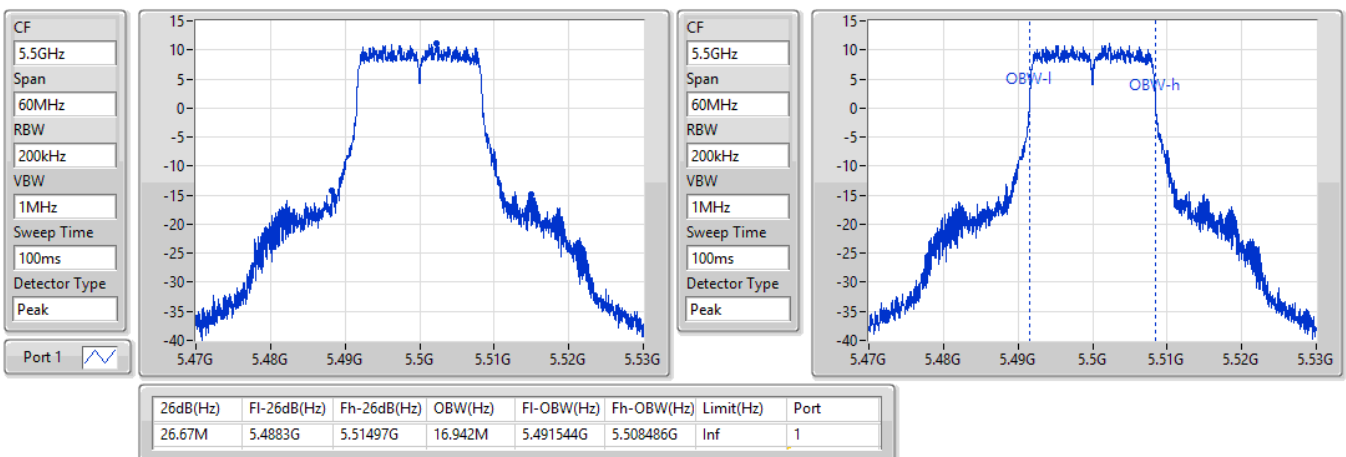


802.11a_Nss1,(6Mbps)_1TX
EBW
5580MHz

15/06/2021

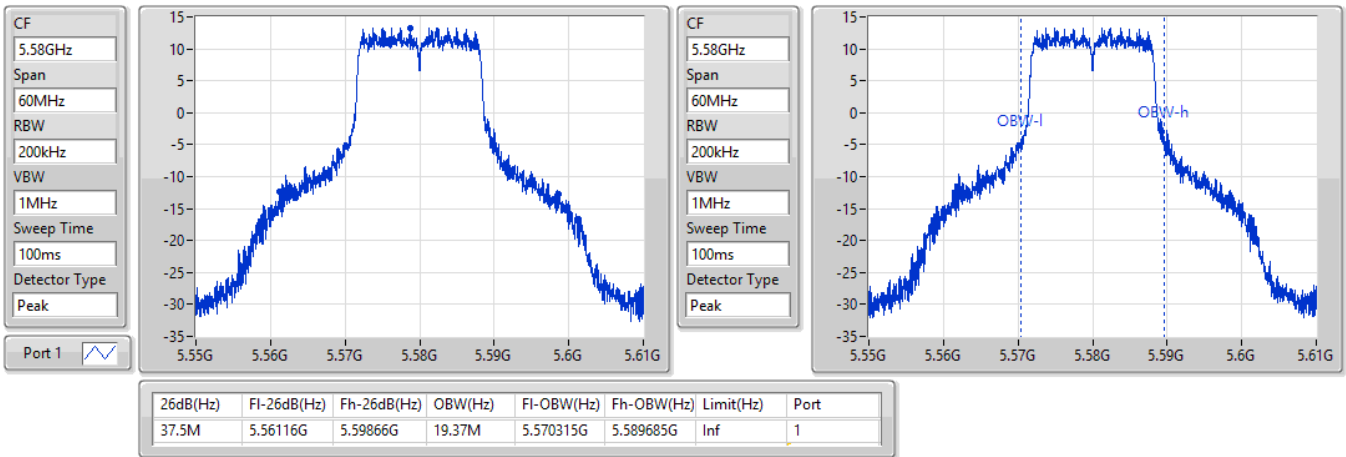

802.11a_Nss1,(6Mbps)_1TX
EBW
5700MHz

15/06/2021

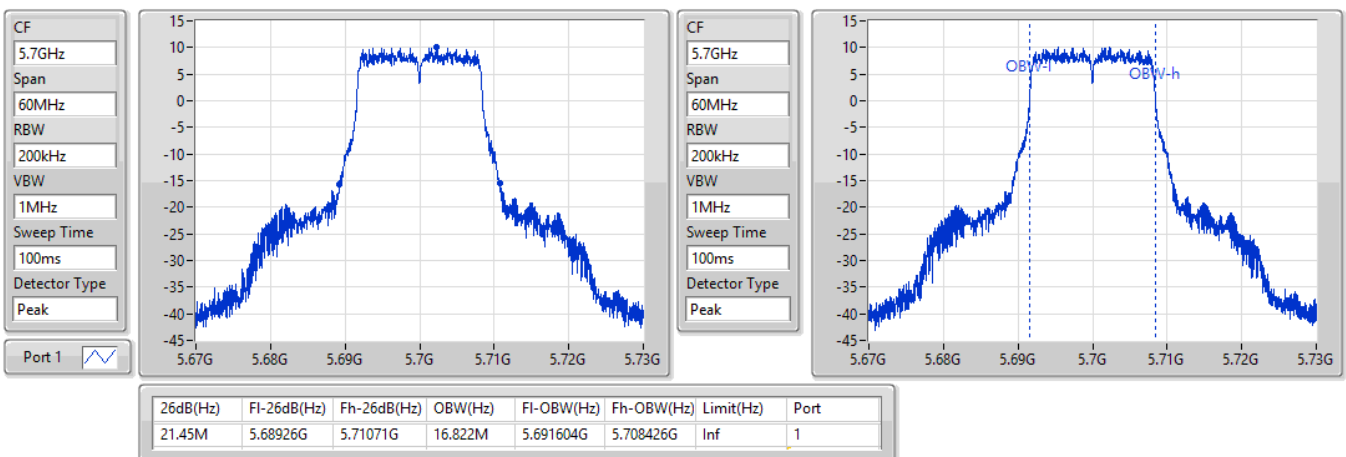


802.11a_Nss1,(6Mbps)_1TX
EBW
5720MHz Straddle 5.47-5.725GHz

16/06/2021

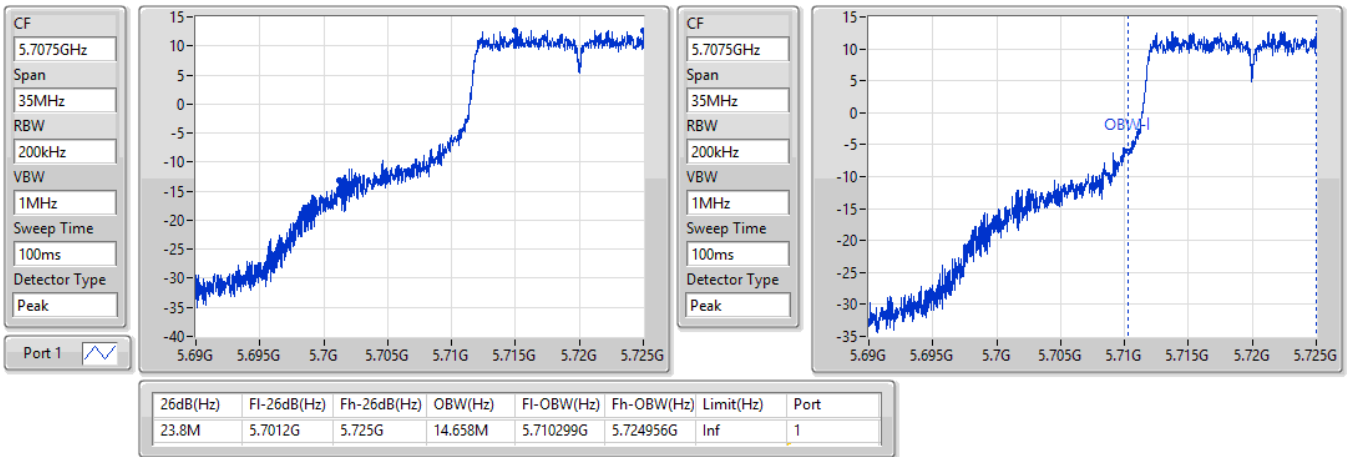

802.11a_Nss1,(6Mbps)_1TX
EBW
5720MHz Straddle 5.725-5.85GHz

16/06/2021

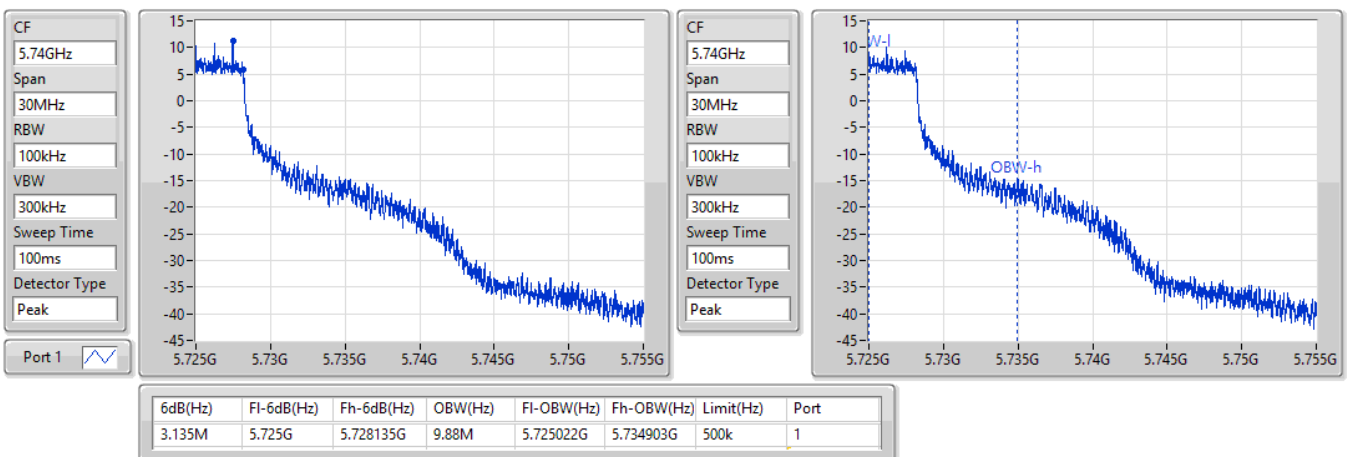


802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5260MHz

15/06/2021

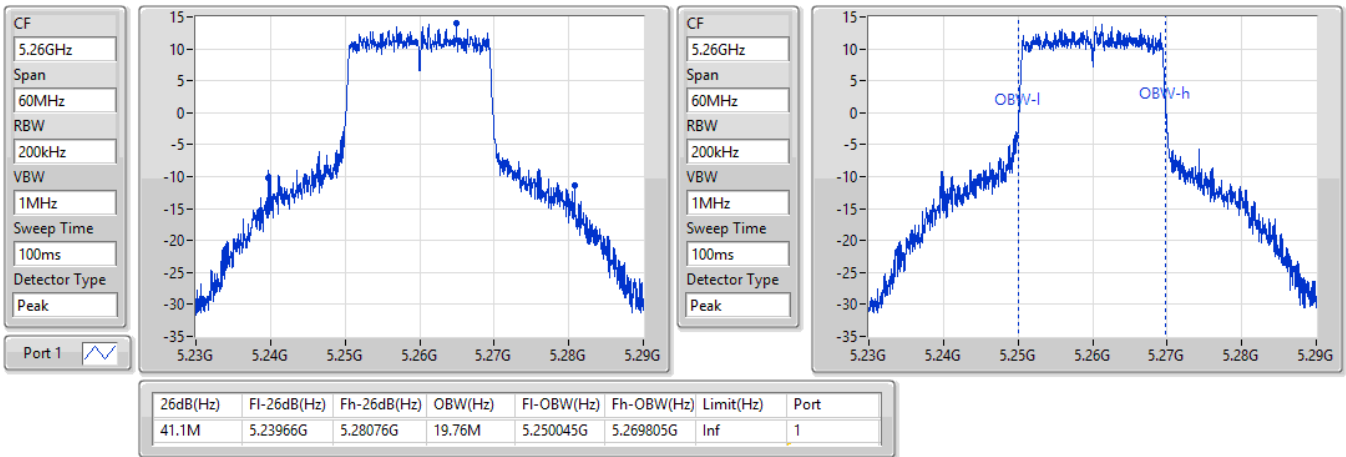

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5300MHz

15/06/2021

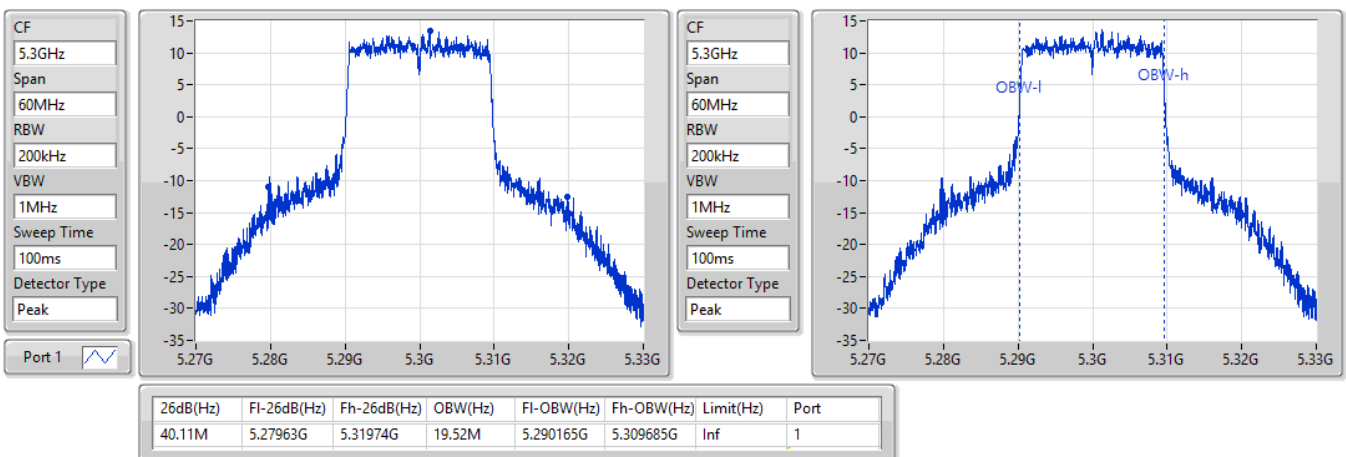


802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5320MHz

15/06/2021

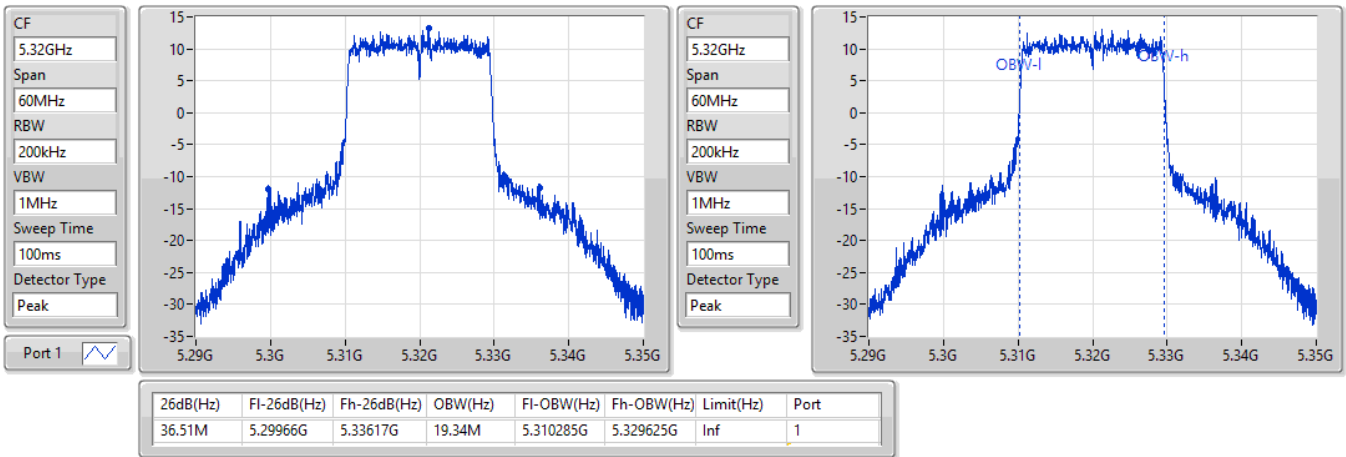

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5500MHz

15/06/2021

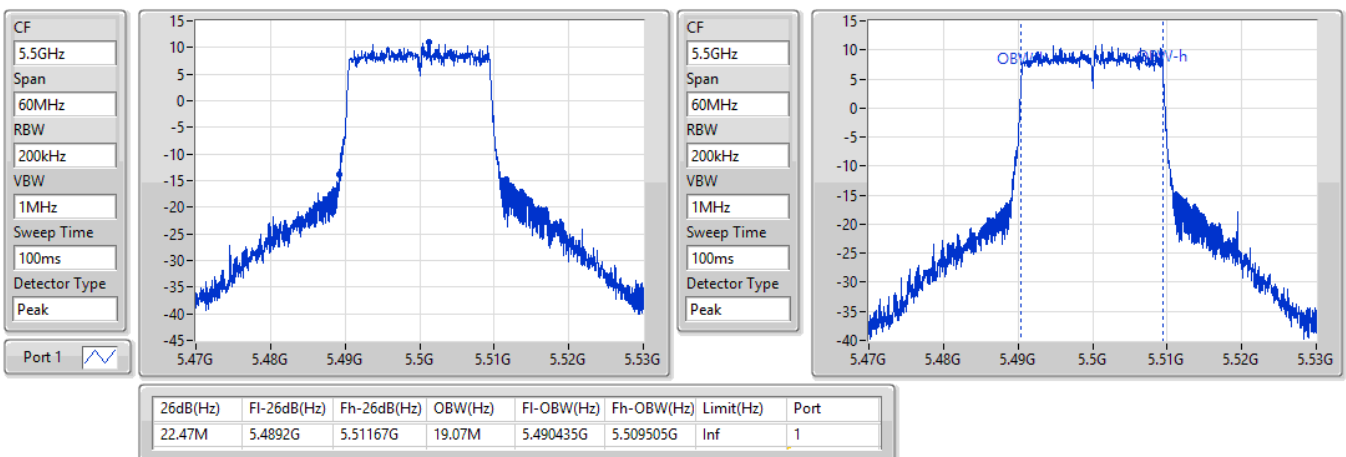


802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5580MHz

15/06/2021

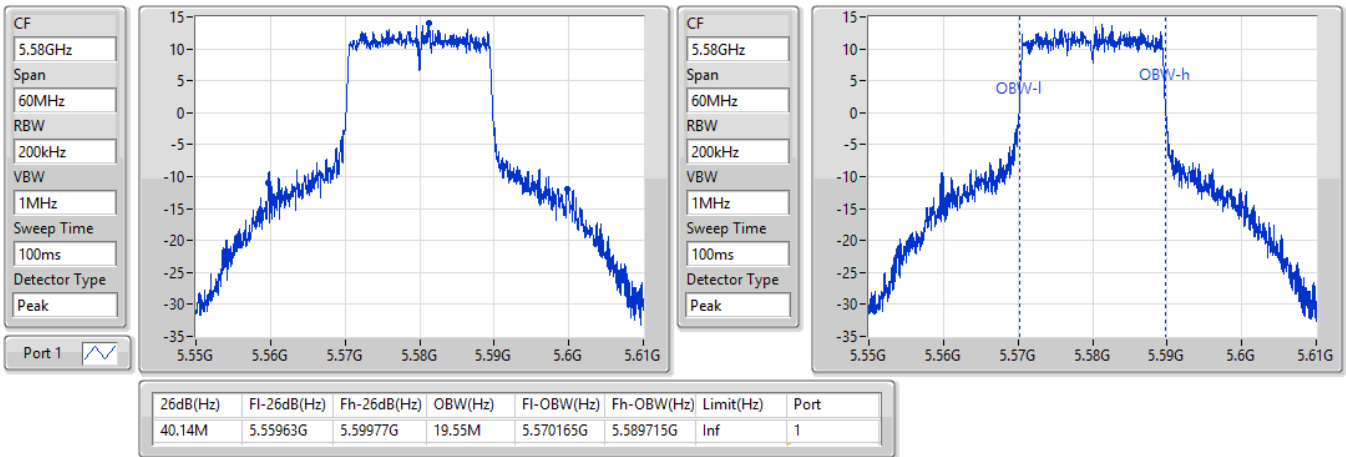

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5700MHz

15/06/2021

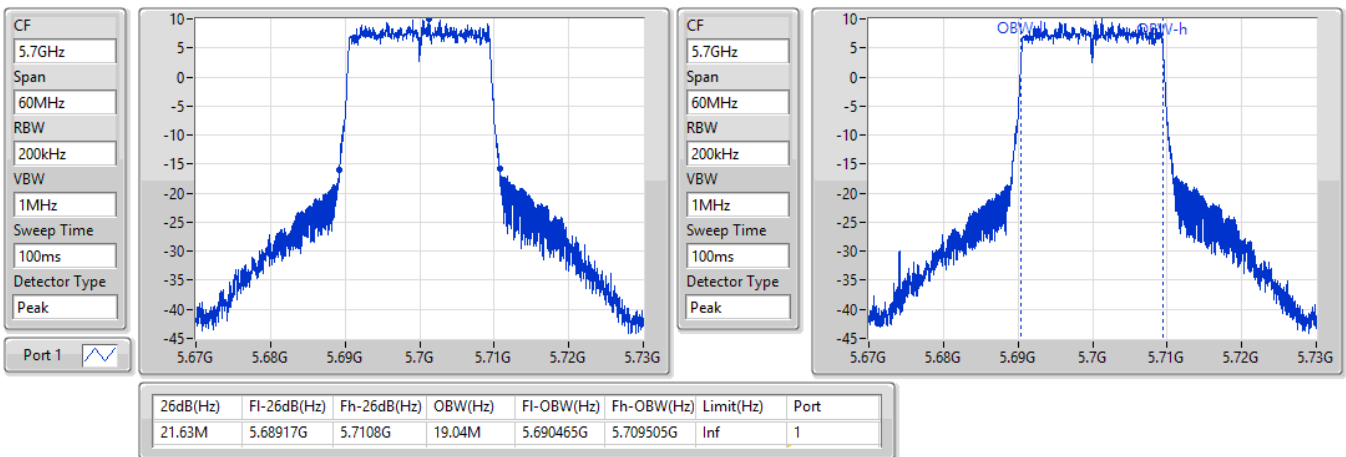


802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5720MHz Straddle 5.47-5.725GHz

16/06/2021

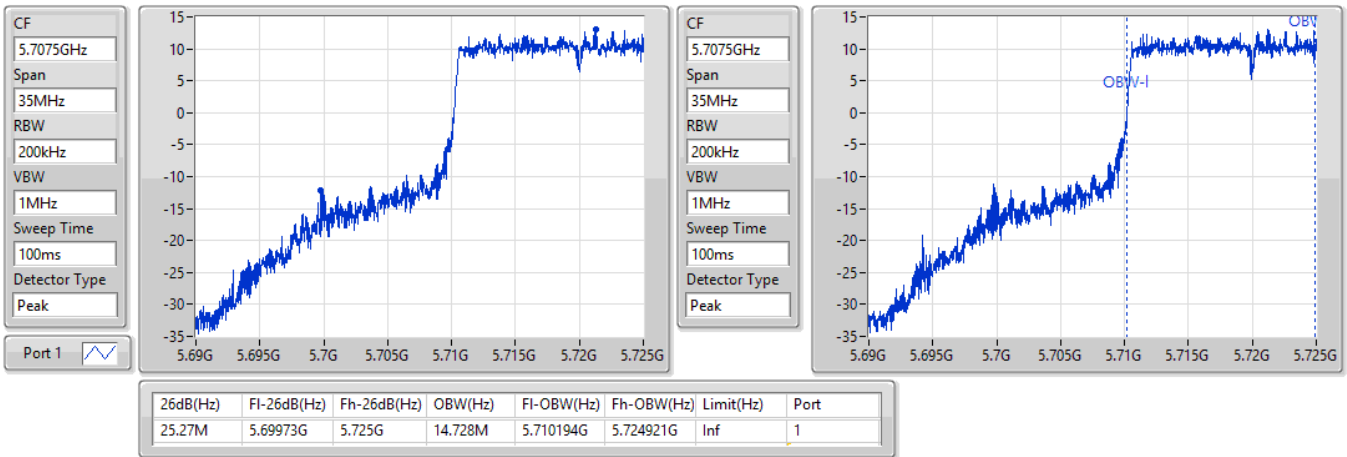

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5720MHz Straddle 5.725-5.85GHz

15/06/2021

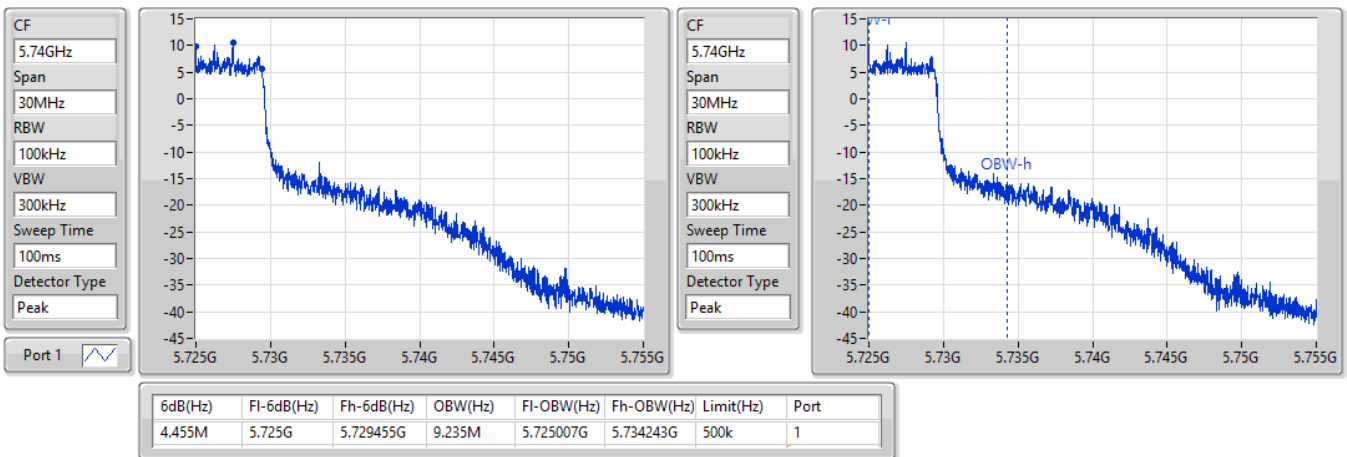


802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5270MHz

15/06/2021

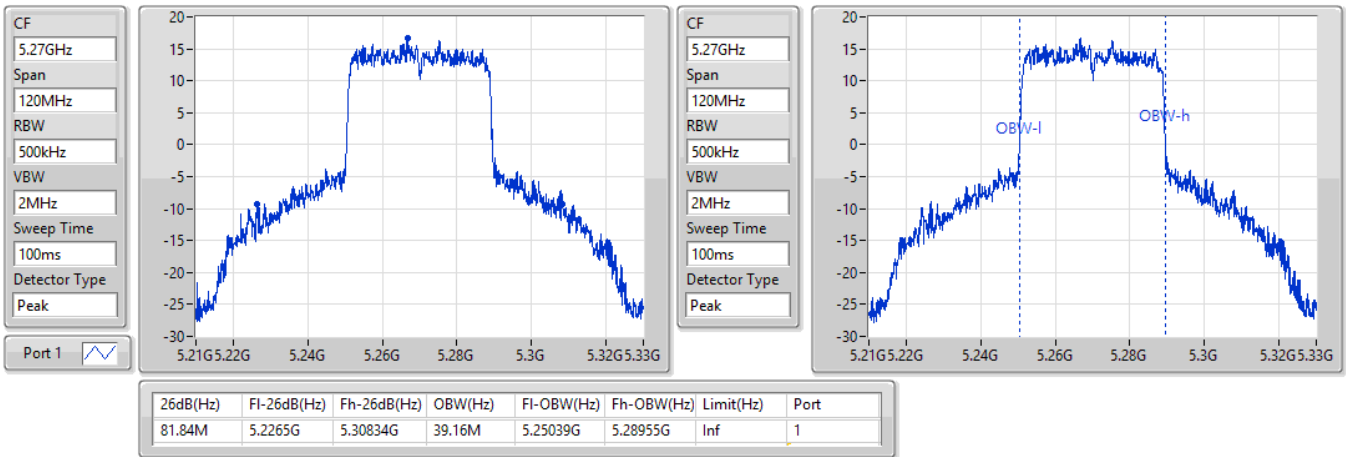

802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5310MHz

15/06/2021

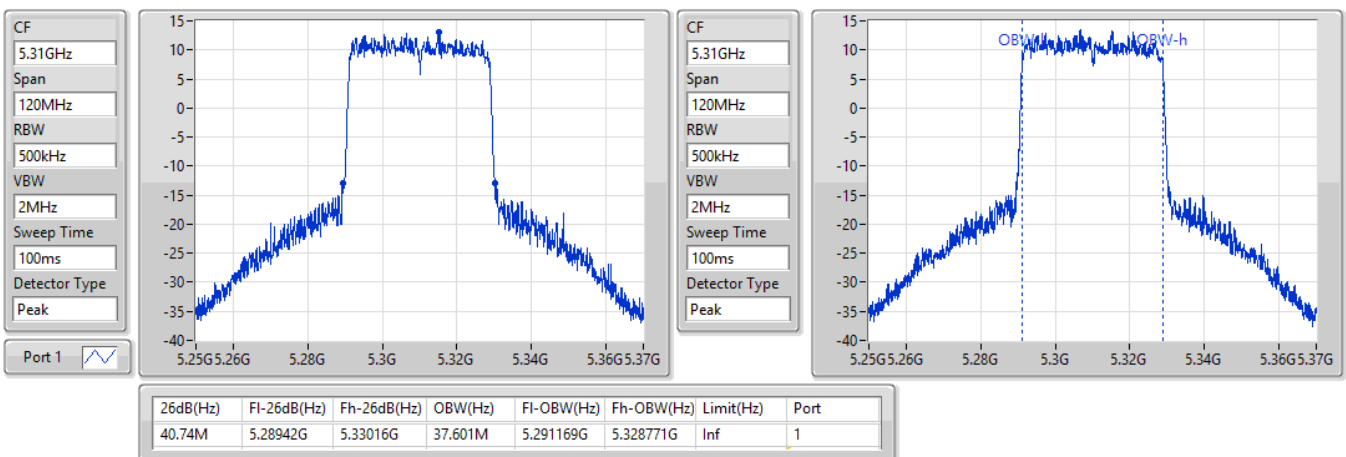


802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5510MHz

15/06/2021

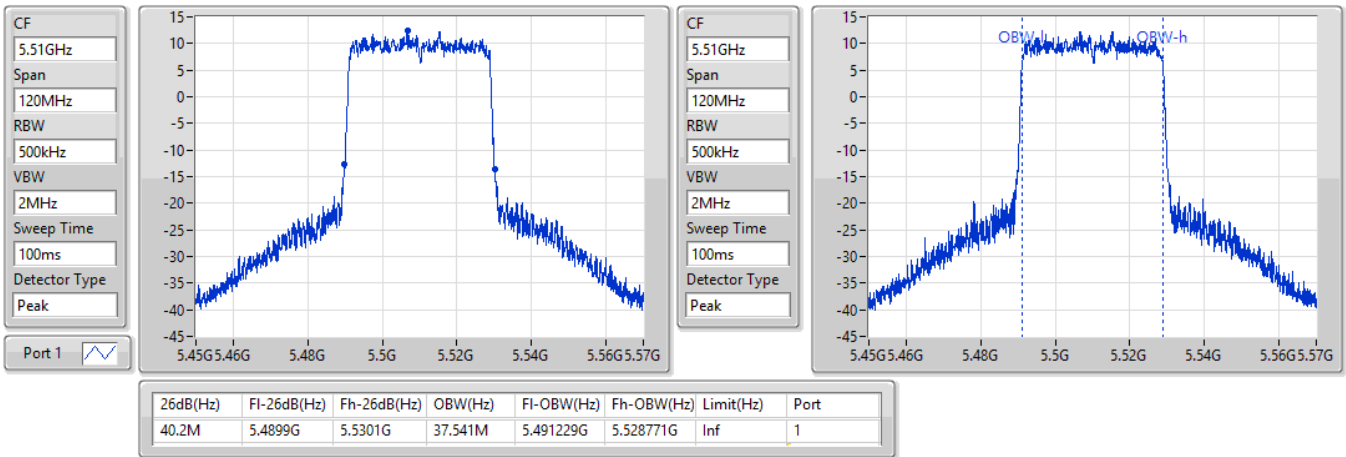

802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5550MHz

15/06/2021

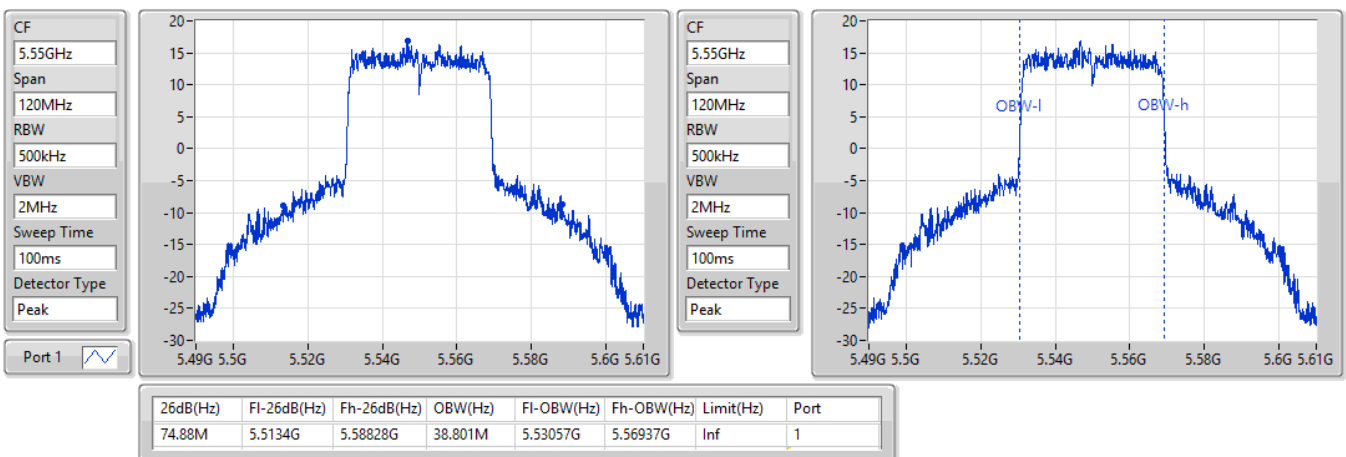


802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5670MHz

15/06/2021

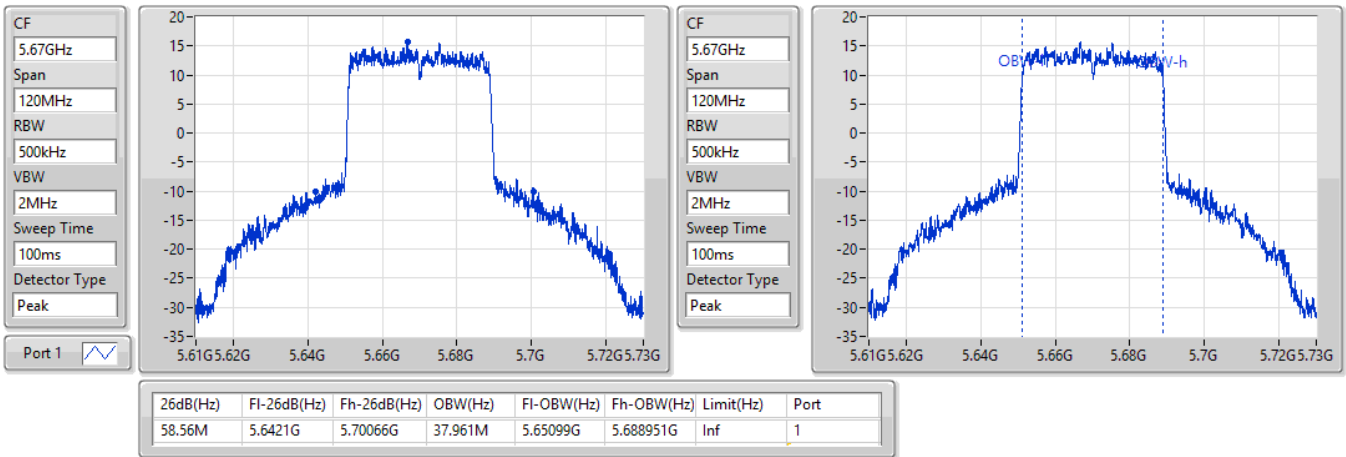

802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5710MHz Straddle 5.47-5.725GHz

15/06/2021

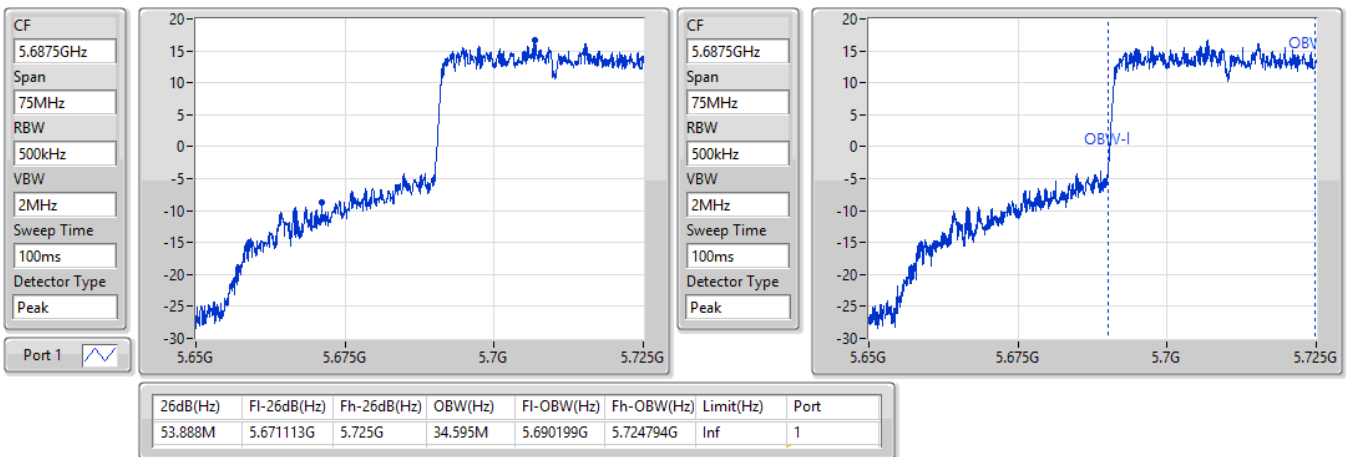


802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
5710MHz Straddle 5.725-5.85GHz

15/06/2021

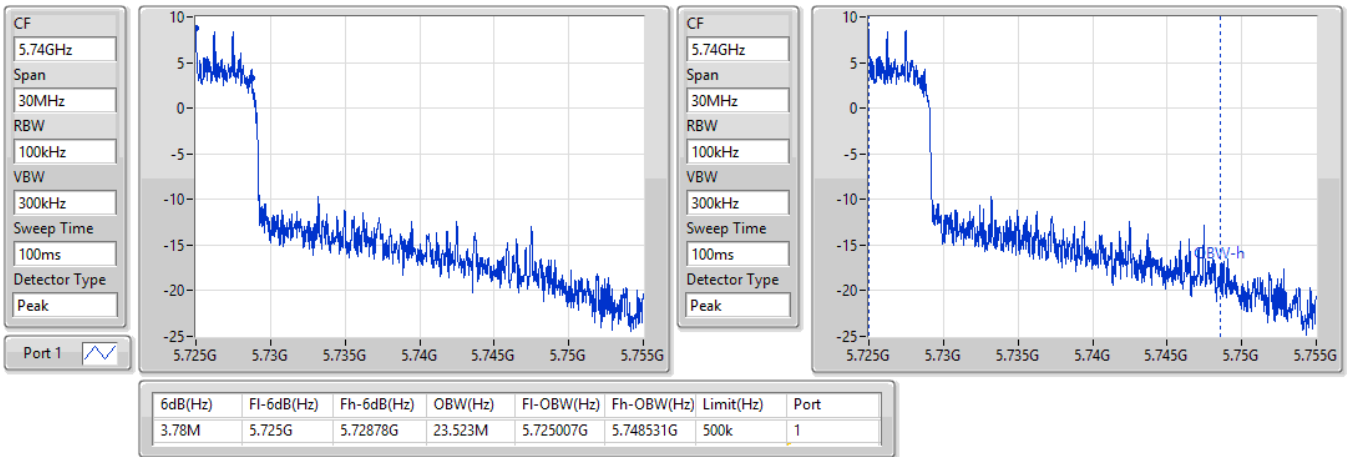

802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5290MHz

15/06/2021

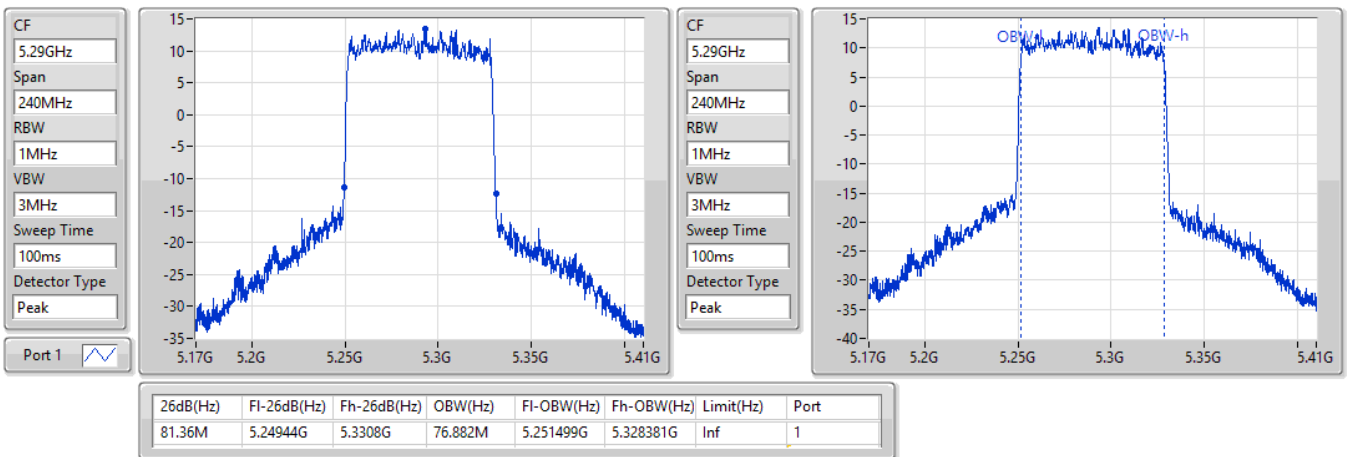


802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5530MHz

15/06/2021

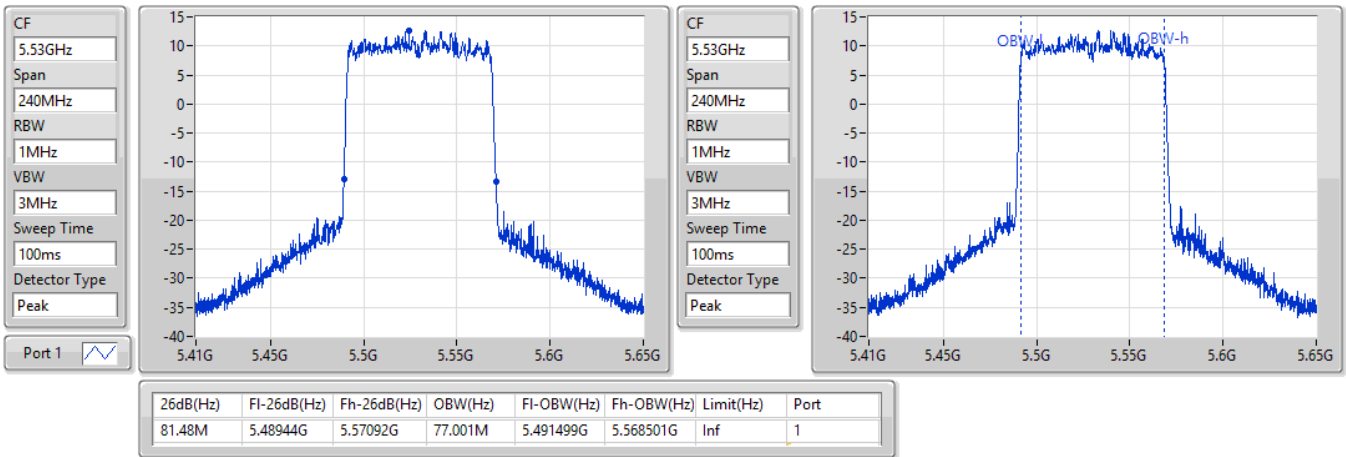

802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5610MHz

15/06/2021

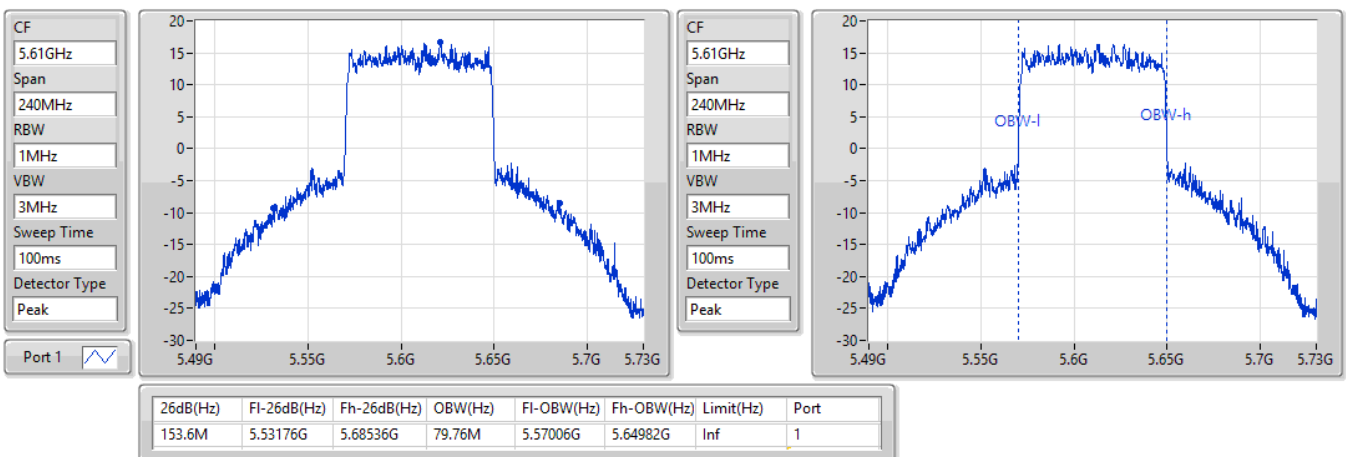


802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5690MHz Straddle 5.47-5.725GHz

15/06/2021

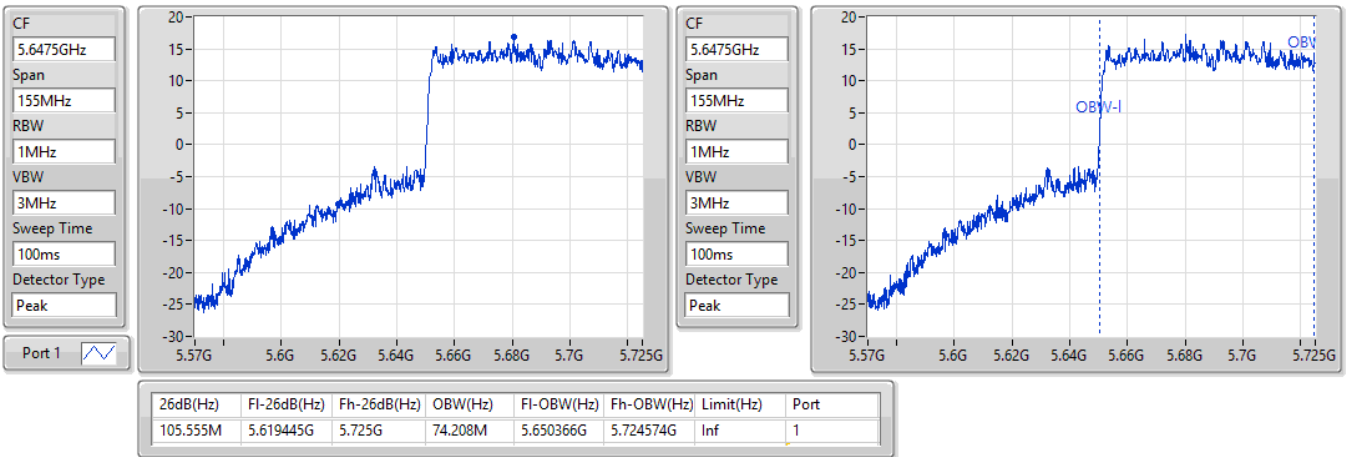
802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5690MHz Straddle 5.725-5.85GHz

15/06/2021

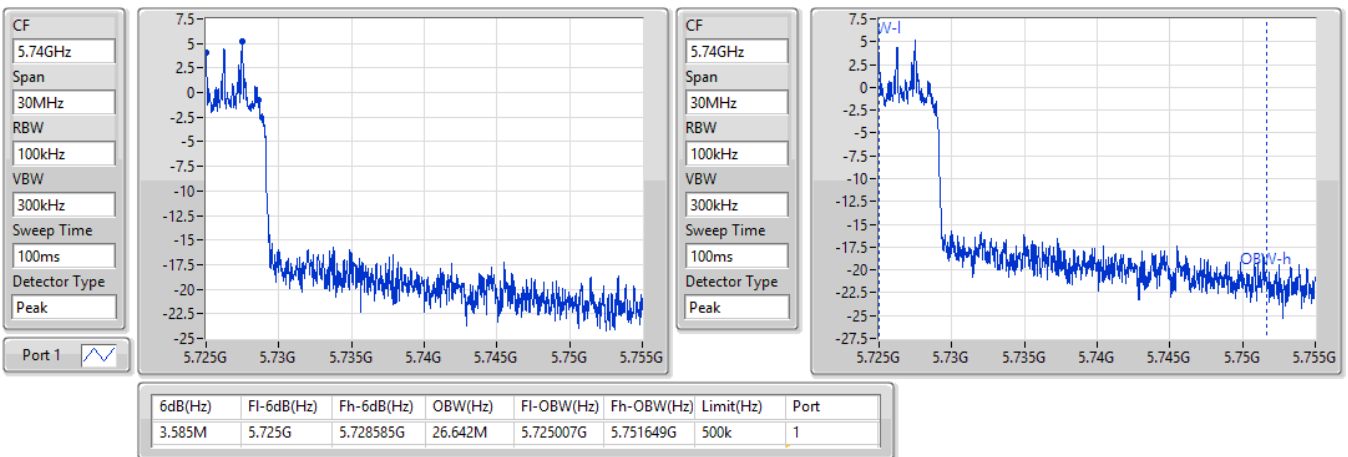

**For 2T1S
Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	24.66M	16.972M	17M0D1D	21.69M	16.792M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.02M	16.852M	16M9D1D	16.013M	13.468M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	3.15M	5.322M	5M32D1D	3.15M	4.708M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	24.66M	16.972M	24.42M	16.852M
5300MHz	Pass	Inf	21.9M	16.852M	22.2M	16.792M
5320MHz	Pass	Inf	21.69M	16.822M	22.26M	16.792M
5500MHz	Pass	Inf	21.75M	16.852M	22.02M	16.732M
5580MHz	Pass	Inf	21.81M	16.852M	21.87M	16.732M
5700MHz	Pass	Inf	21.33M	16.762M	21.69M	16.672M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.765M	13.538M	16.013M	13.468M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.15M	5.322M	3.15M	4.708M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;

802.11a_Nss1,(6Mbps)_2TX
EBW
5260MHz

15/06/2021

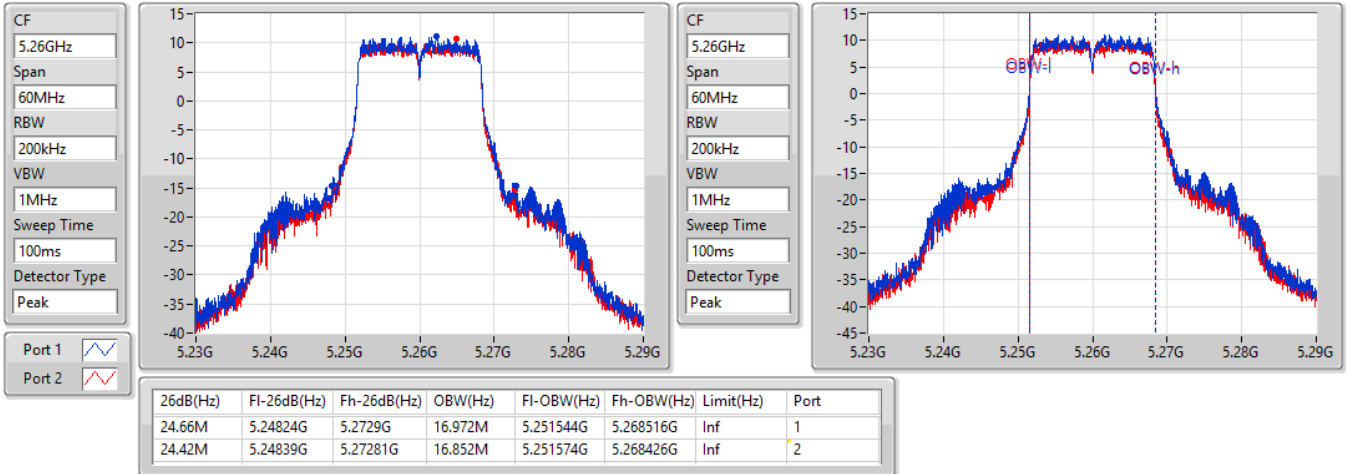

802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

15/06/2021

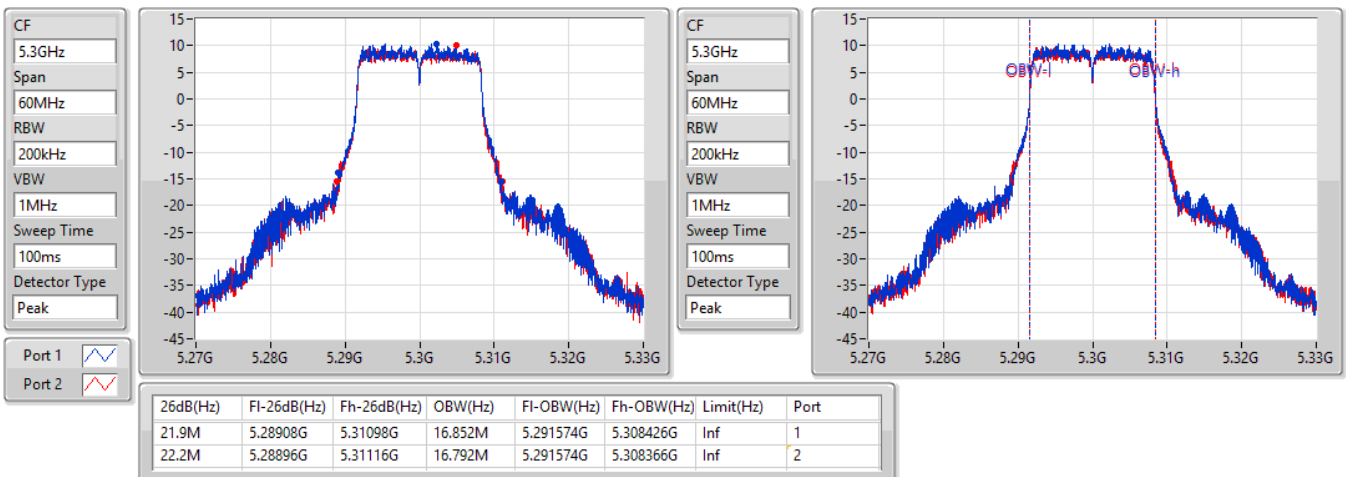


802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

15/06/2021

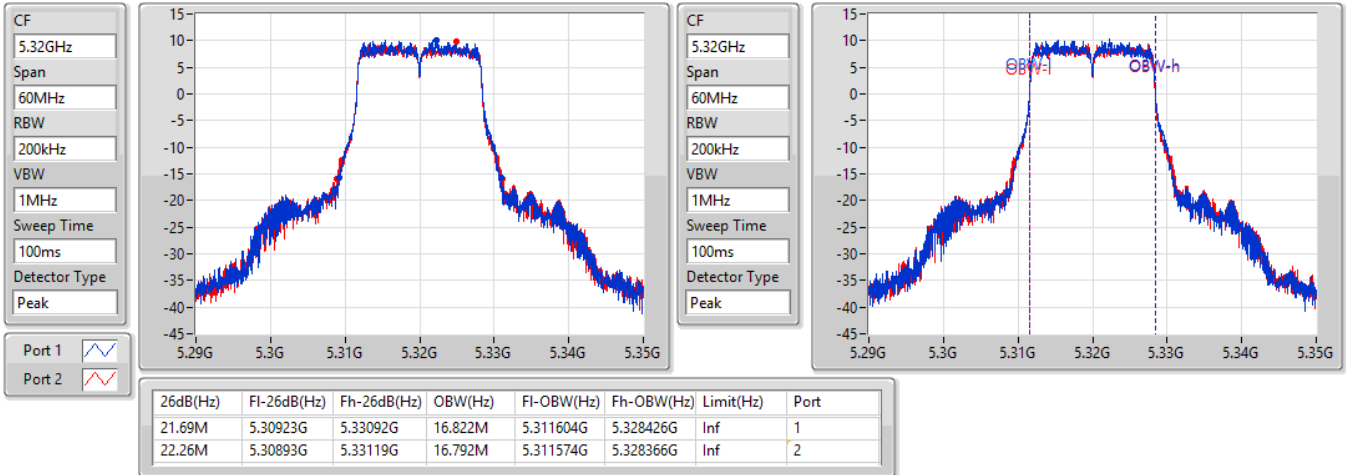

802.11a_Nss1,(6Mbps)_2TX
EBW
5500MHz

15/06/2021

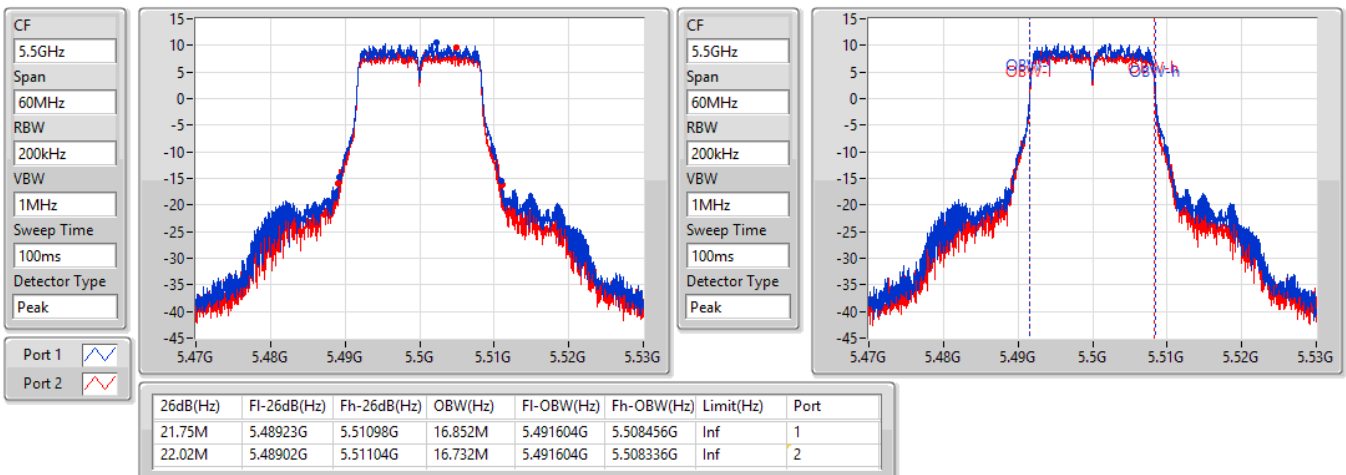


802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

15/06/2021

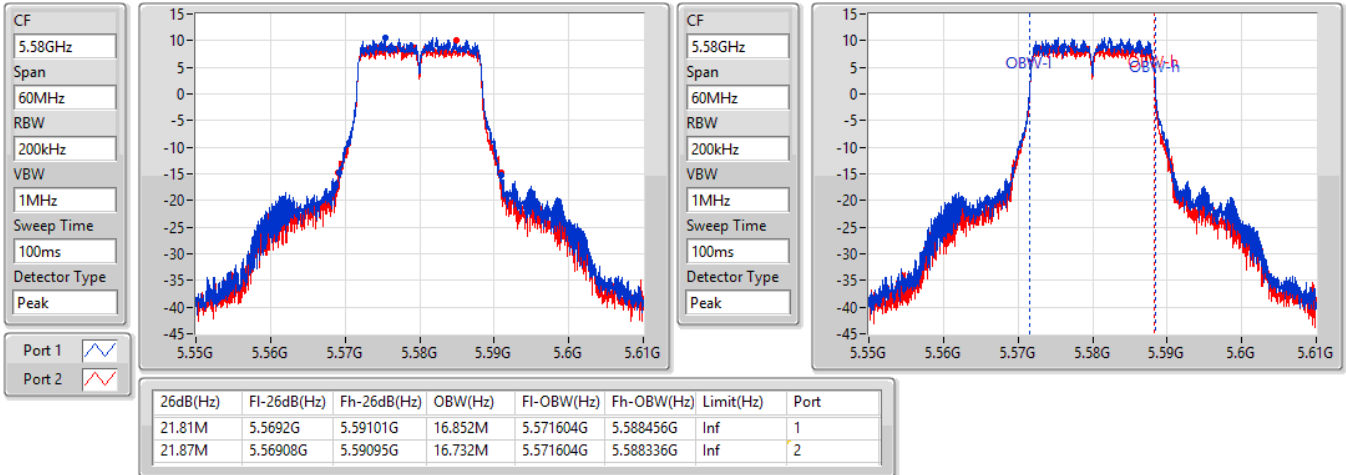

802.11a_Nss1,(6Mbps)_2TX
EBW
5700MHz

15/06/2021

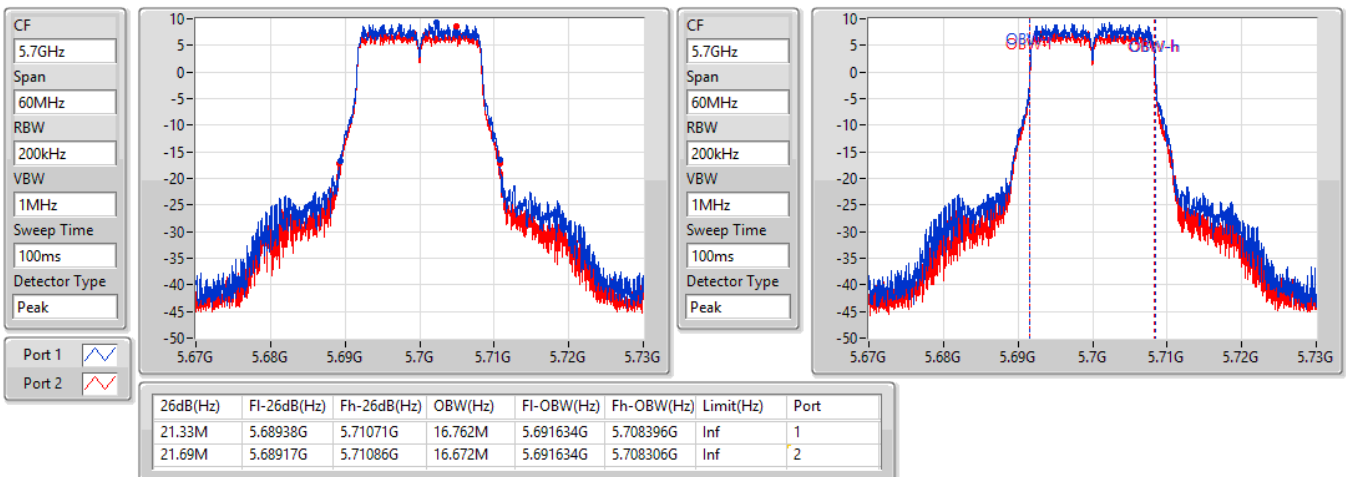


802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

15/06/2021

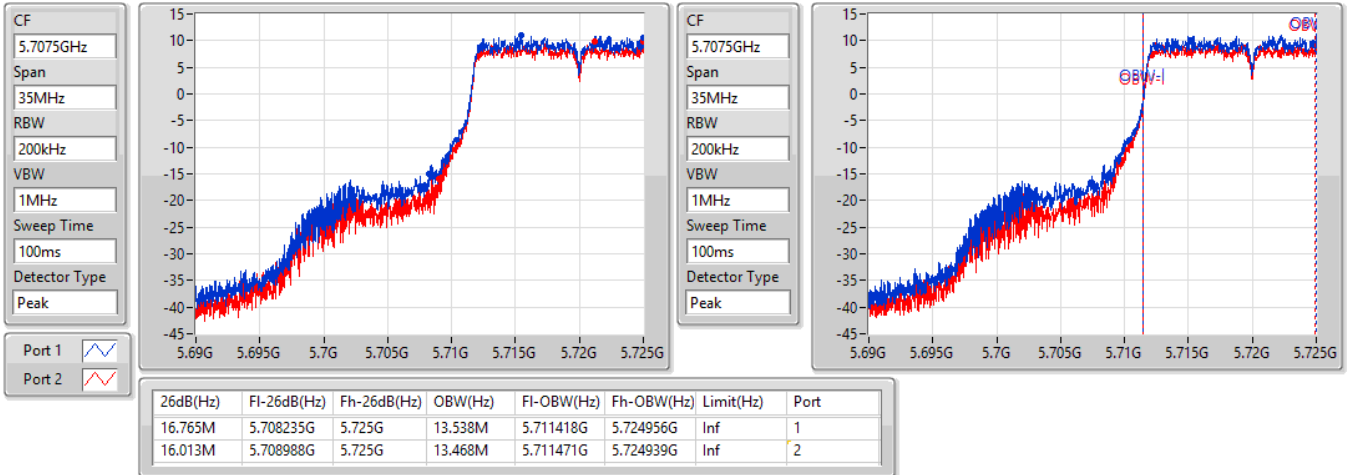
802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.725-5.85GHz

15/06/2021

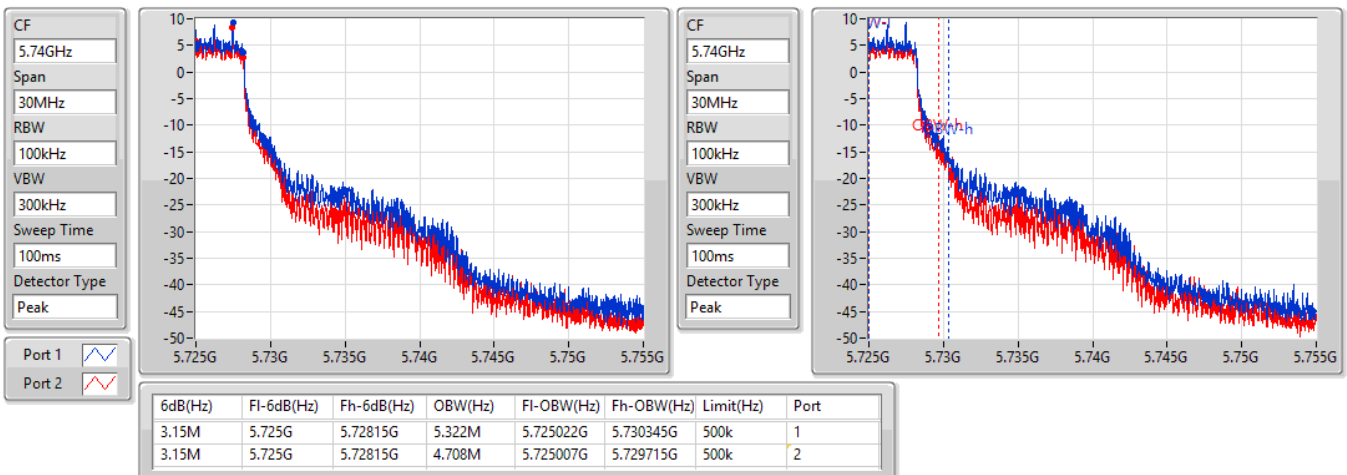

**For 2T2S
Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	31.38M	19.22M	19M2D1D	21.48M	19.16M
802.11ax HEW40_Nss2,(MCS0)_2TX	56.46M	37.901M	37M9D1D	39.96M	37.601M
802.11ax HEW80_Nss2,(MCS0)_2TX	81.6M	77.121M	77M1D1D	81.24M	76.882M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	25.98M	19.16M	19M2D1D	17.675M	14.64M
802.11ax HEW40_Nss2,(MCS0)_2TX	58.92M	37.781M	37M8D1D	34.95M	33.733M
802.11ax HEW80_Nss2,(MCS0)_2TX	113.4M	77.481M	77M5D1D	75.718M	73.123M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	4.47M	6.507M	6M51D1D	4.395M	4.843M
802.11ax HEW40_Nss2,(MCS0)_2TX	3.765M	12.099M	12M1D1D	3.66M	4.528M
802.11ax HEW80_Nss2,(MCS0)_2TX	3.9M	16.582M	16M6D1D	3.315M	5.367M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	31.38M	19.19M	23.67M	19.19M
5300MHz	Pass	Inf	31.35M	19.16M	23.61M	19.22M
5320MHz	Pass	Inf	26.13M	19.16M	21.48M	19.19M
5500MHz	Pass	Inf	21.93M	19.1M	21.57M	19.13M
5580MHz	Pass	Inf	25.98M	19.16M	21.6M	19.13M
5700MHz	Pass	Inf	21.42M	19.1M	21.39M	19.1M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	23.17M	14.675M	17.675M	14.64M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.47M	6.507M	4.395M	4.843M
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	56.46M	37.901M	51.12M	37.721M
5310MHz	Pass	Inf	39.96M	37.601M	40.02M	37.601M
5510MHz	Pass	Inf	39.9M	37.541M	39.96M	37.601M
5550MHz	Pass	Inf	58.92M	37.781M	45.66M	37.721M
5670MHz	Pass	Inf	48.54M	37.721M	39.96M	37.601M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	42.975M	33.771M	34.95M	33.733M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.765M	12.099M	3.66M	4.528M
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	81.6M	76.882M	81.24M	77.121M
5530MHz	Pass	Inf	81.48M	76.882M	81.36M	77.241M
5610MHz	Pass	Inf	113.4M	77.481M	81.6M	77.481M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	93.465M	73.123M	75.718M	73.201M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.9M	16.582M	3.315M	5.367M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss2,(MCS0)_2TX

EBW

5260MHz

15/06/2021

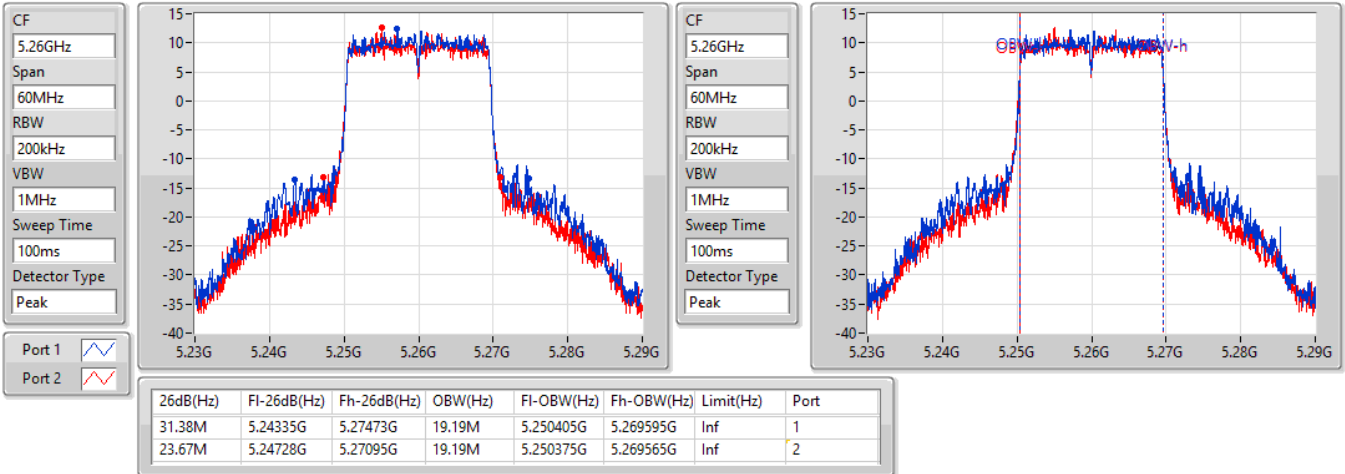


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW


5300MHz

15/06/2021

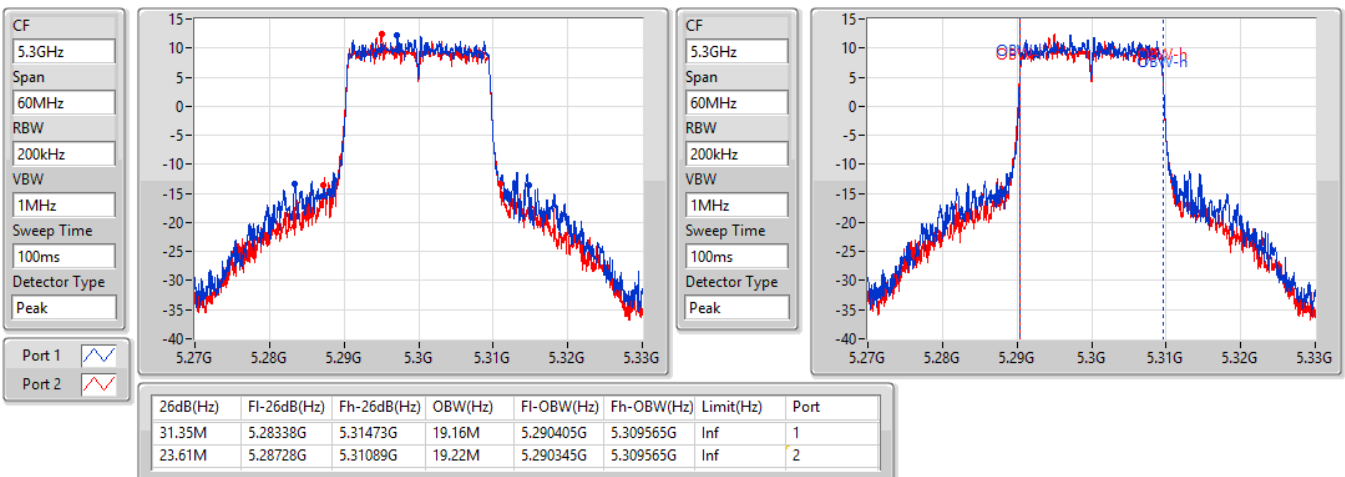


802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5320MHz

15/06/2021

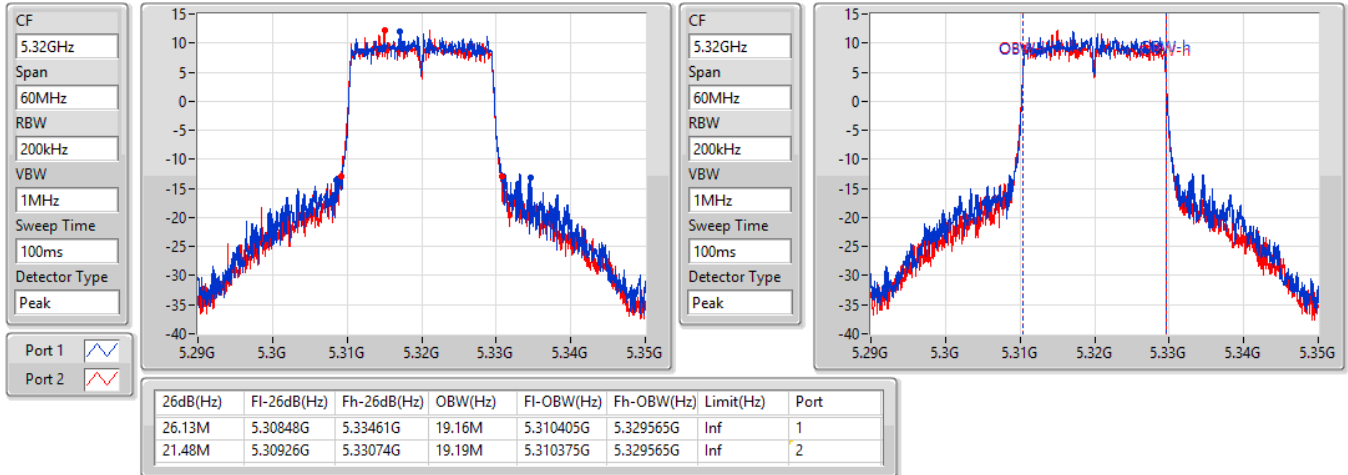
802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5500MHz

15/06/2021

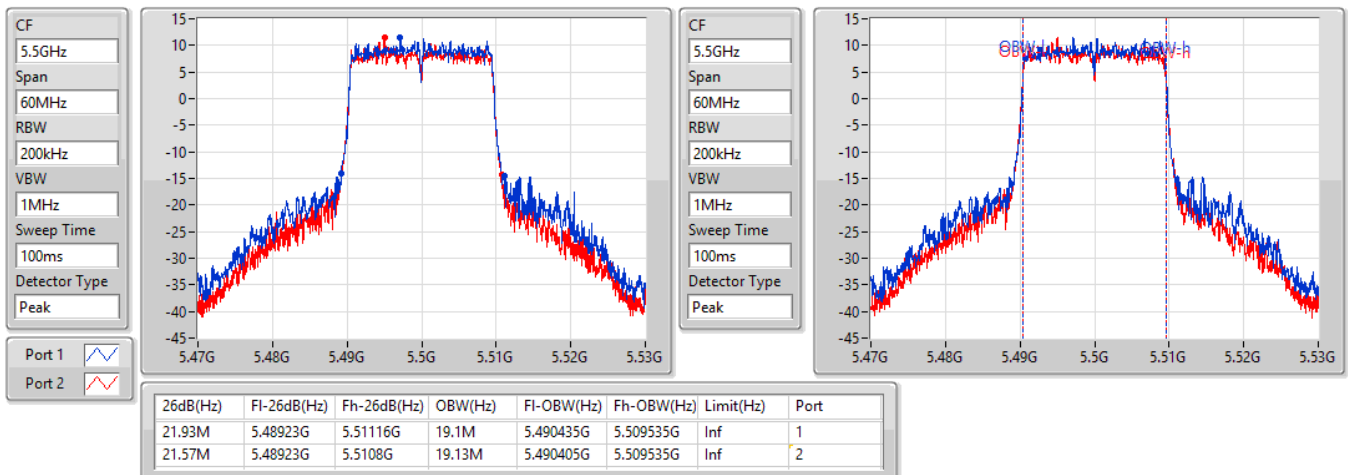


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW

5580MHz

15/06/2021

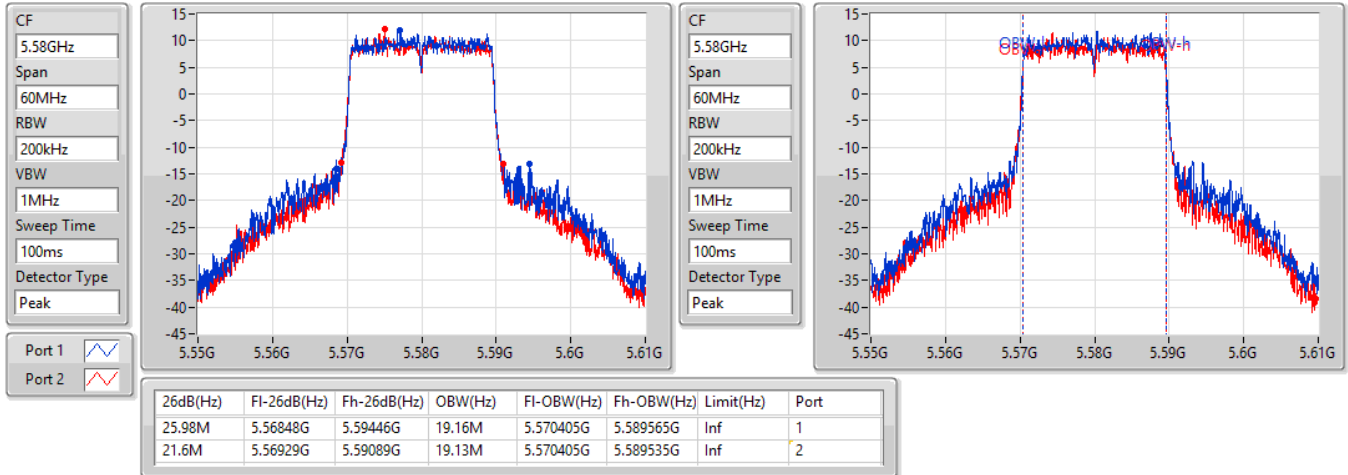


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW


5700MHz

15/06/2021

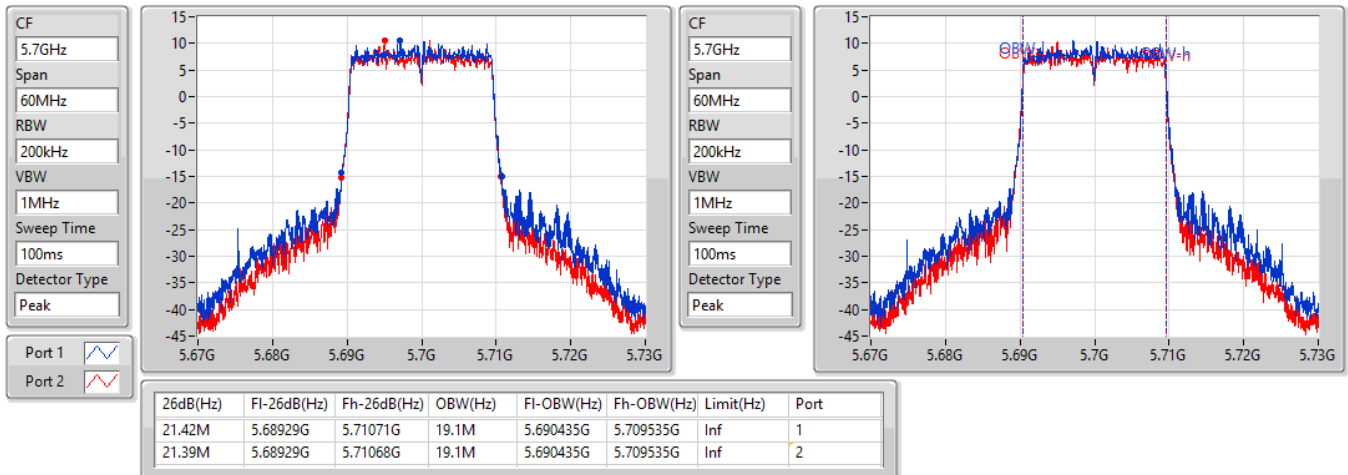


802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

15/06/2021

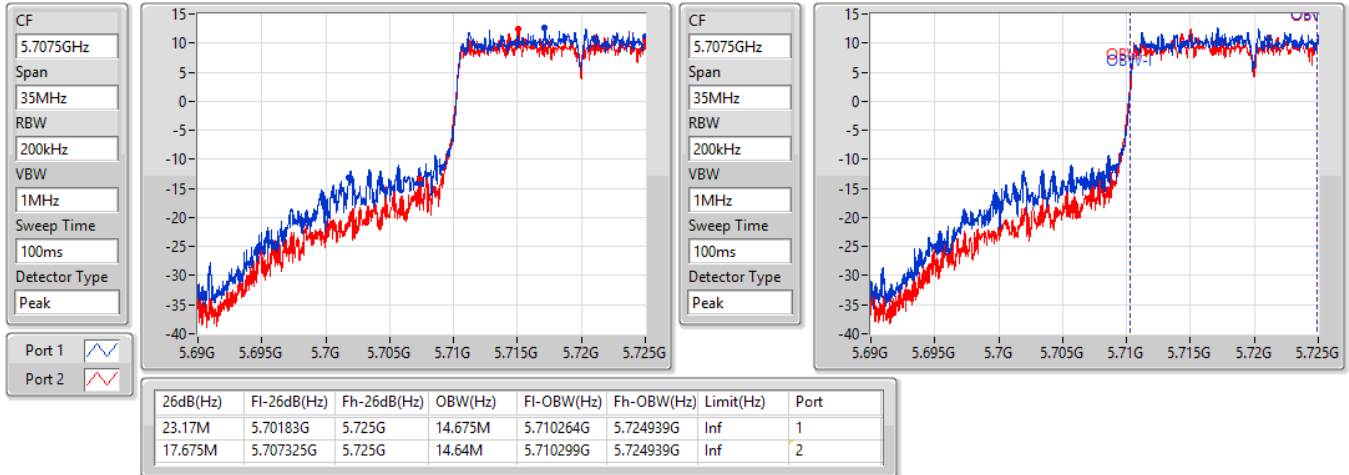

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5720MHz Straddle 5.725-5.85GHz

15/06/2021

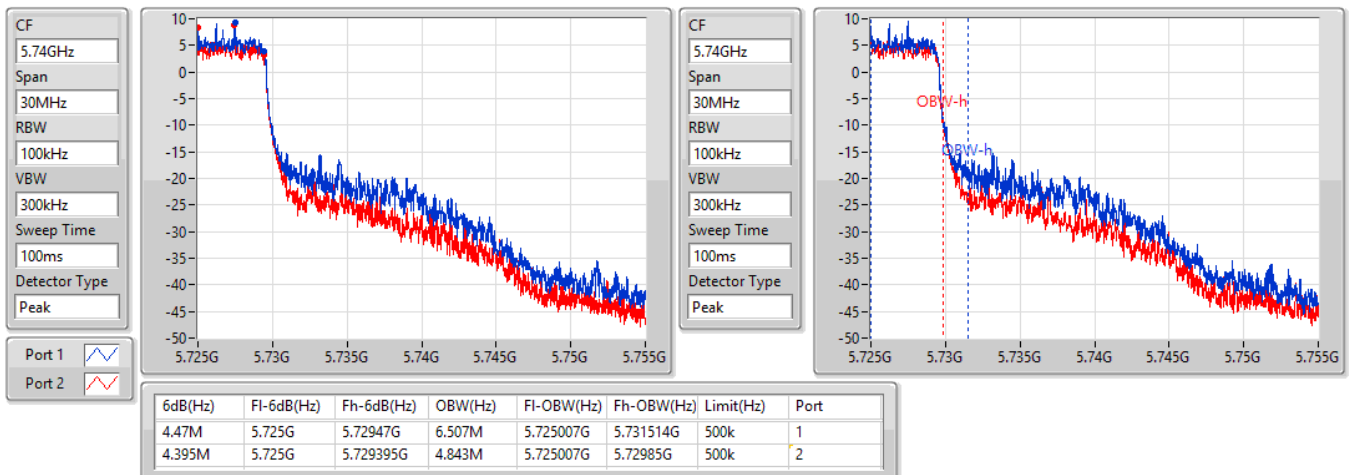


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5270MHz

15/06/2021

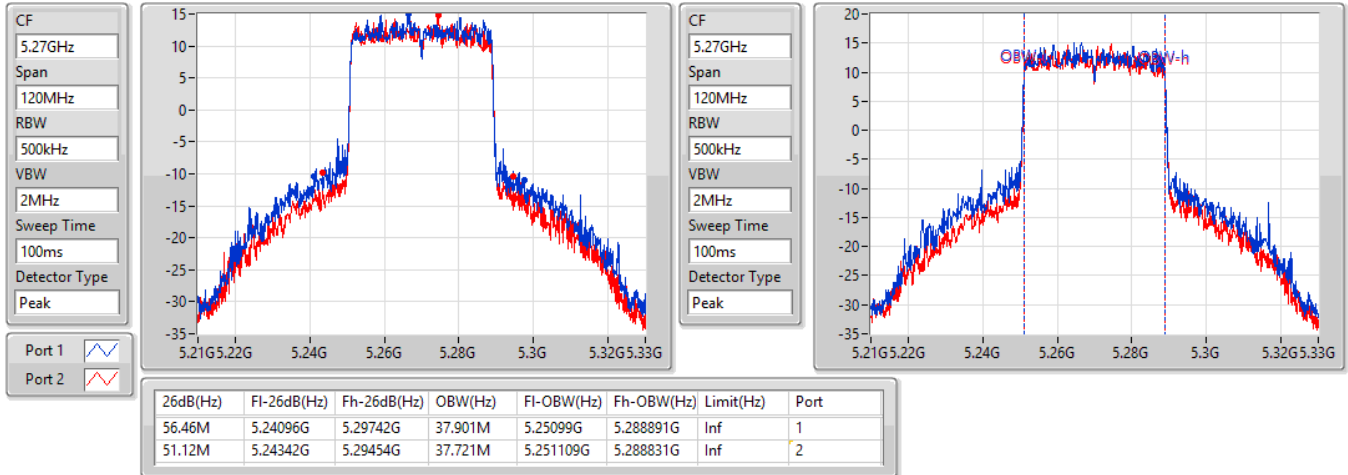

802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5310MHz

15/06/2021

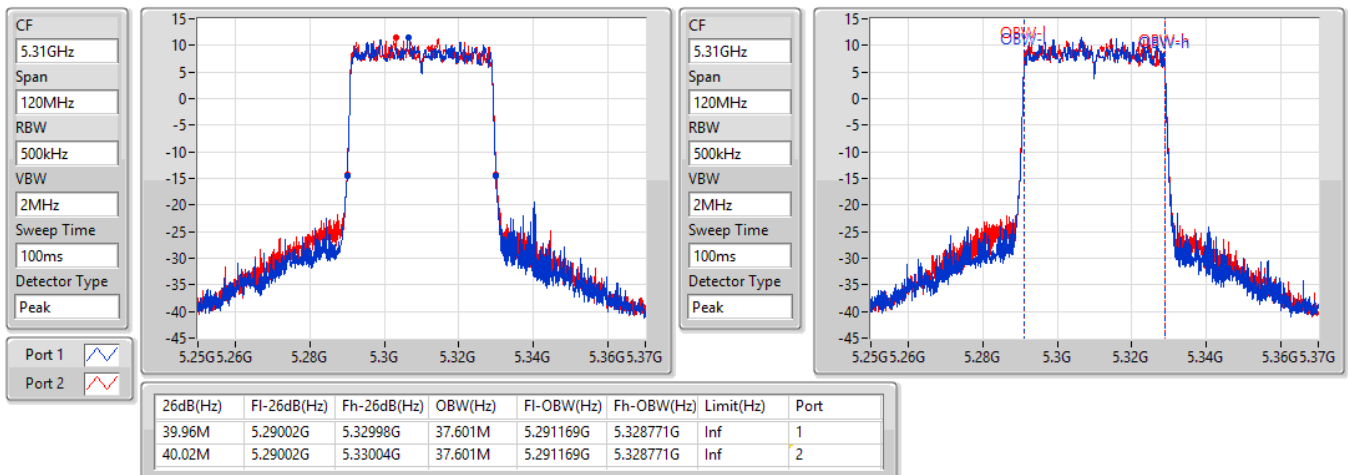


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5510MHz

15/06/2021

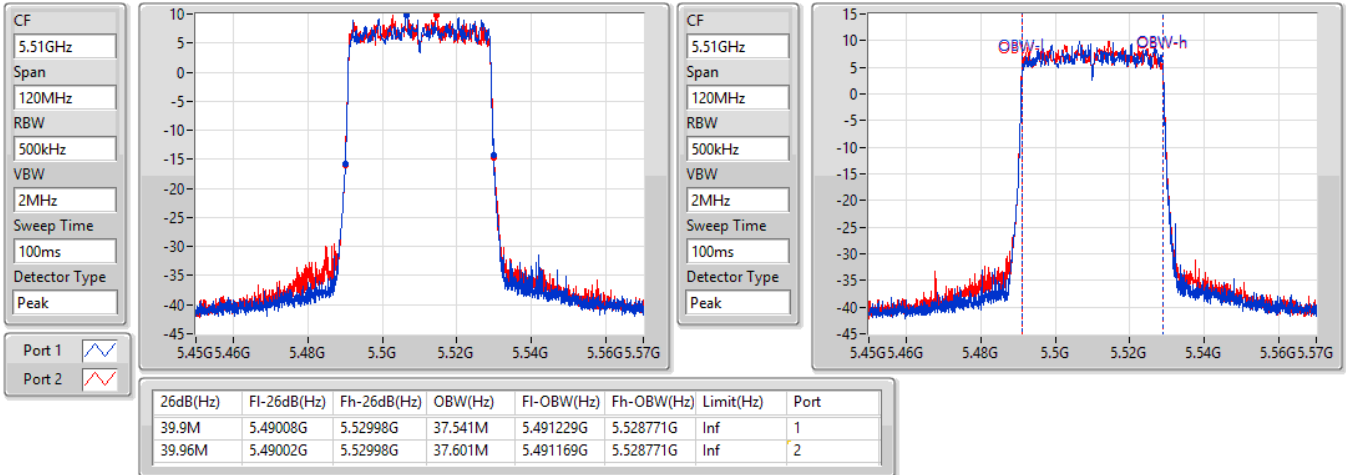
802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5550MHz

15/06/2021

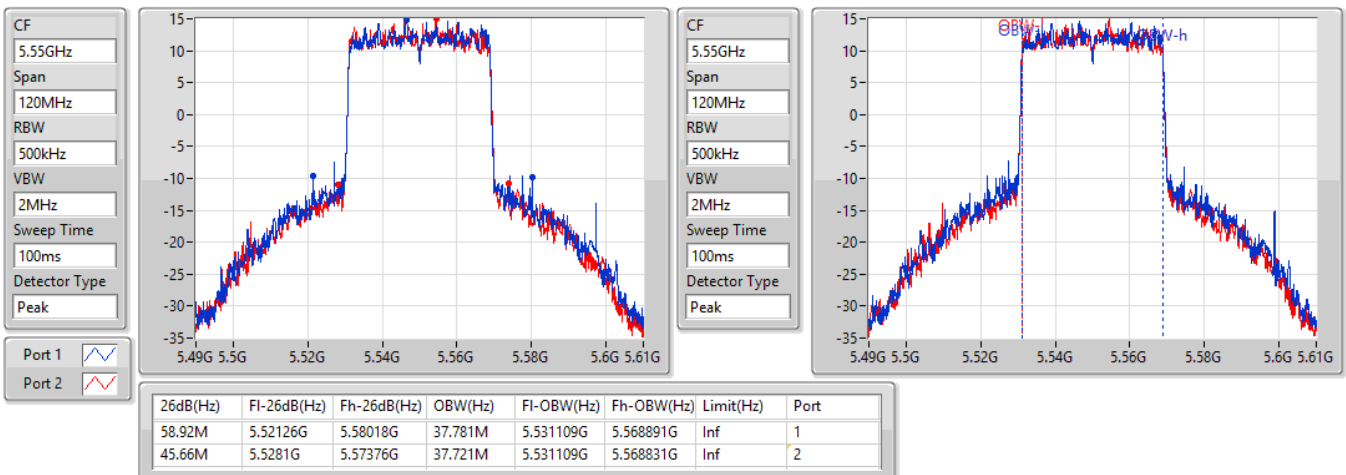


802.11ax HEW40_Nss2,(MCS0)_2TX

EBW

5670MHz

15/06/2021

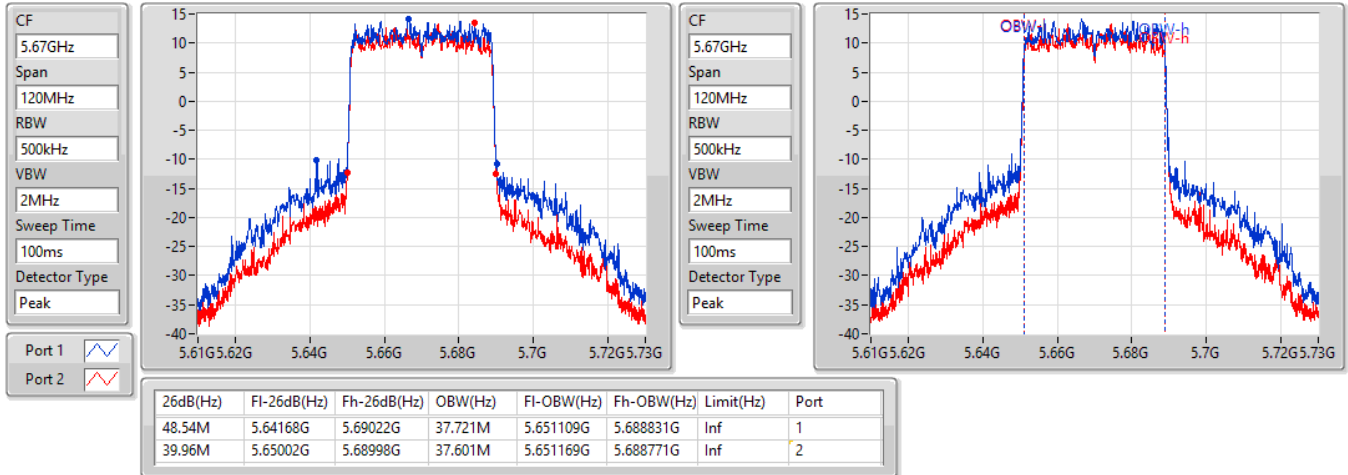


802.11ax HEW40_Nss2,(MCS0)_2TX

EBW


5710MHz Straddle 5.47-5.725GHz

15/06/2021

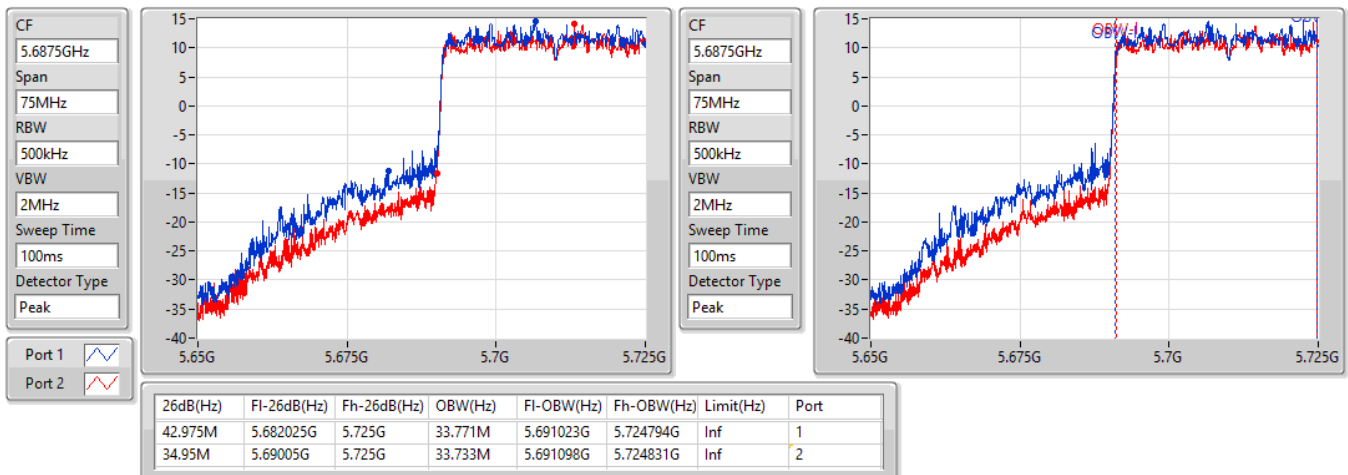


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5710MHz Straddle 5.725-5.85GHz

15/06/2021

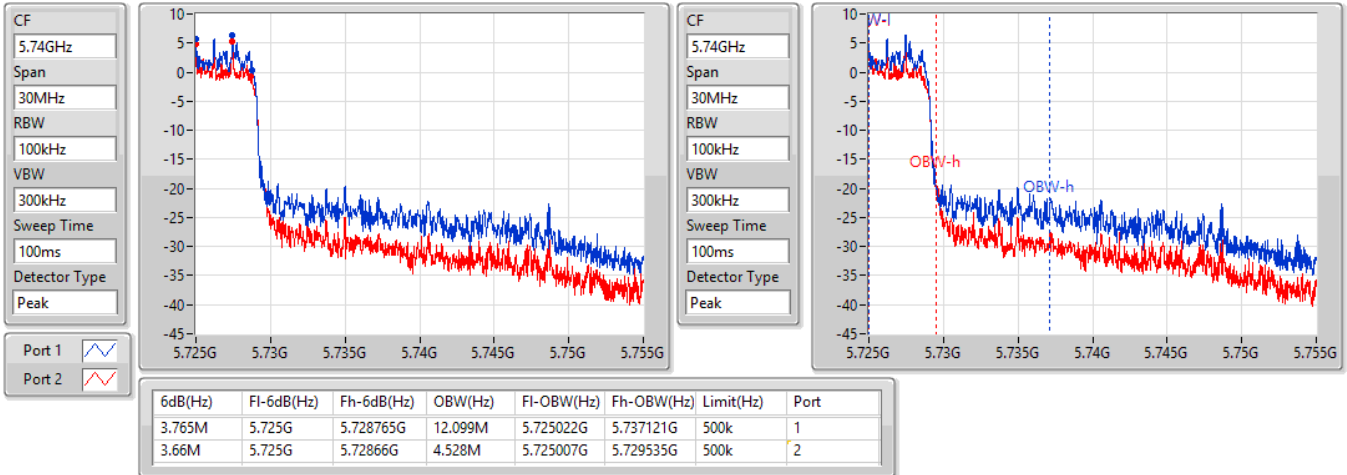

802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5290MHz

15/06/2021

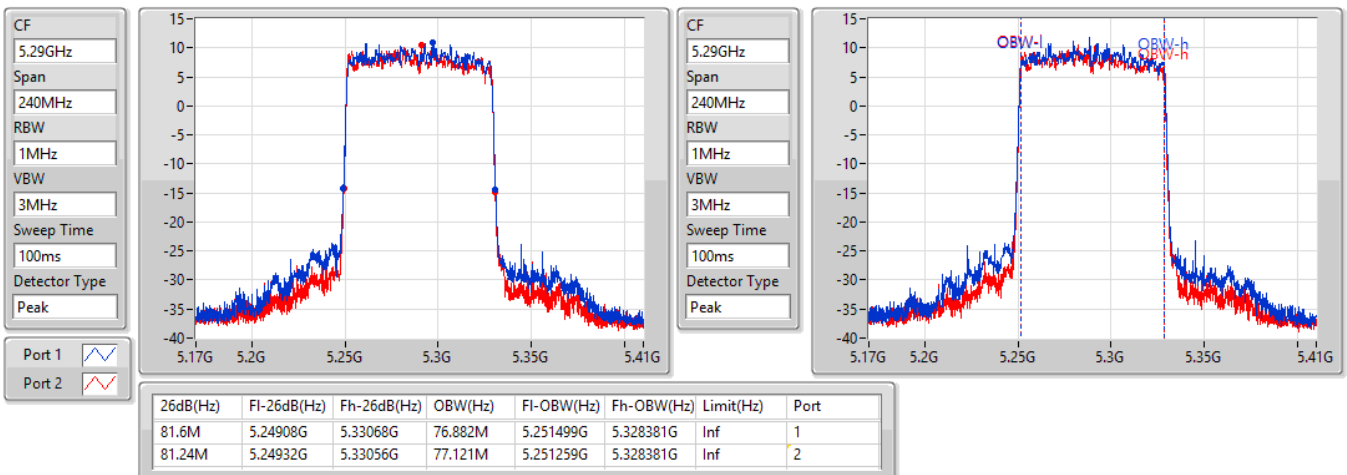


802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5530MHz

15/06/2021

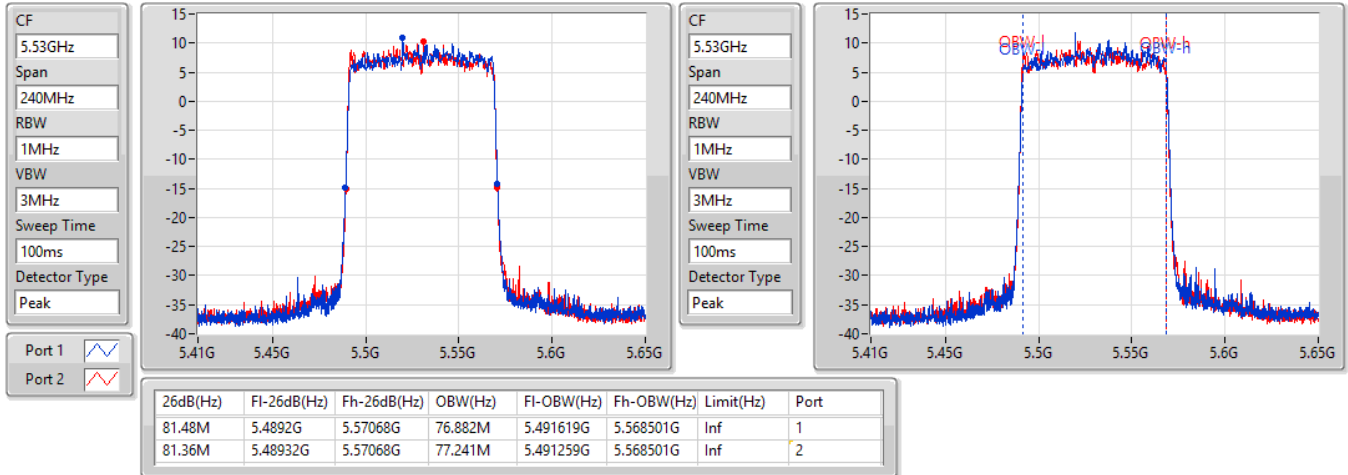
802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5610MHz

15/06/2021

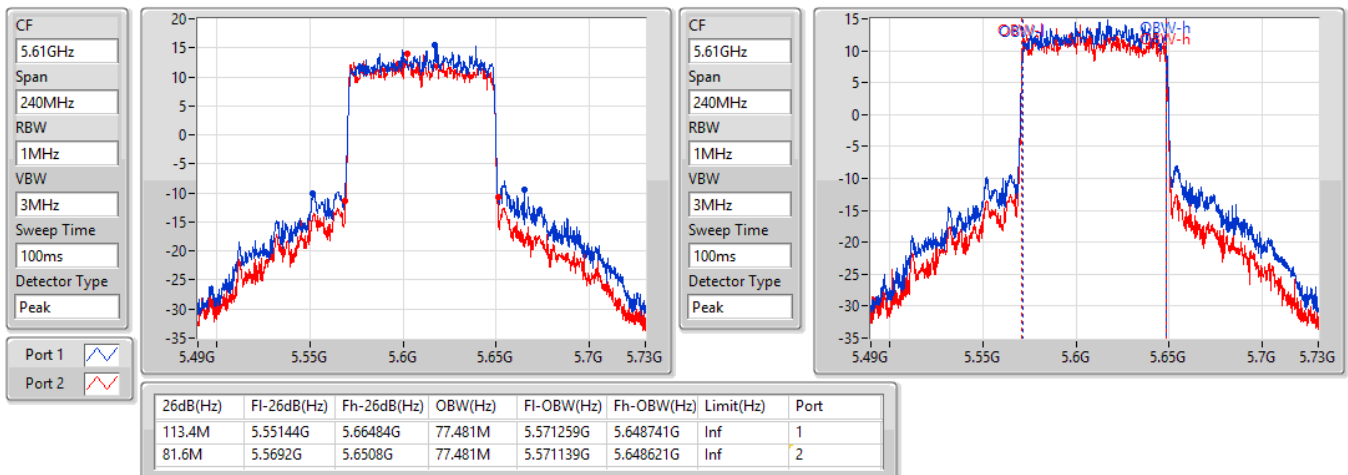


802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

5690MHz Straddle 5.47-5.725GHz

15/06/2021

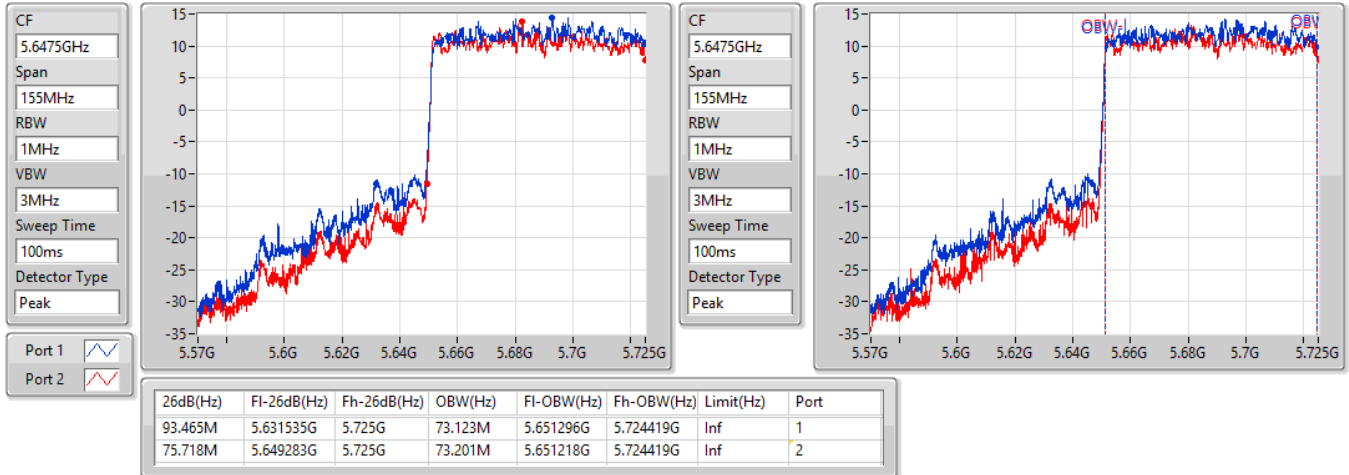


802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

15/06/2021

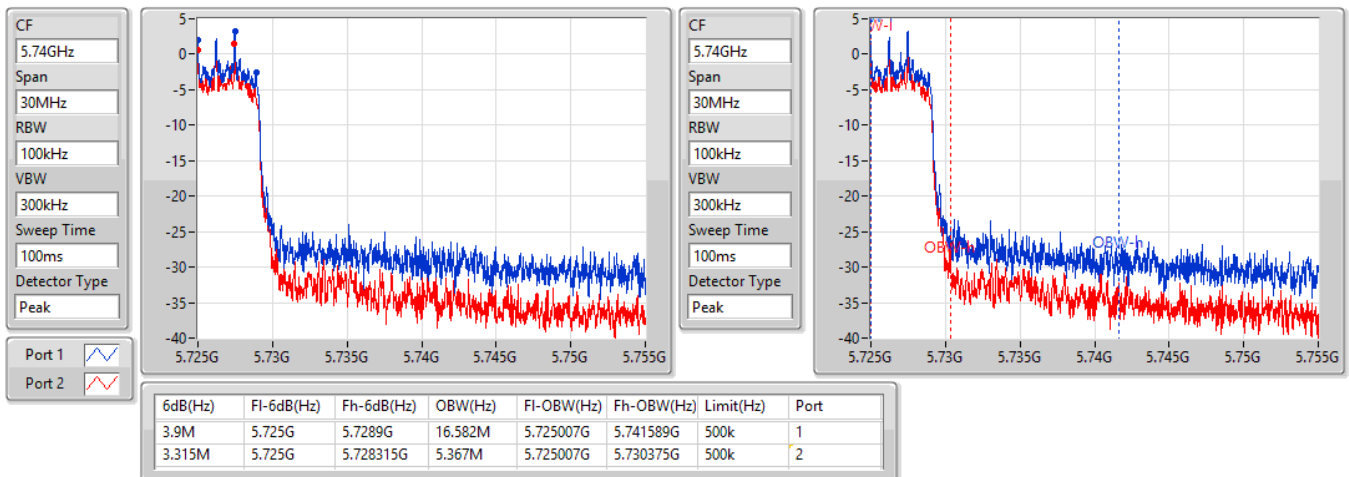

For Scanning radio 3 / 2T1S

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.6M	16.792M	16M8D1D	21.21M	16.642M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.75M	16.792M	16M8D1D	15.575M	13.381M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	3.165M	4.333M	4M33D1D	3.15M	4.273M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	21.24M	16.762M	21.45M	16.642M
5300MHz	Pass	Inf	21.21M	16.792M	21.6M	16.642M
5320MHz	Pass	Inf	21.21M	16.792M	21.51M	16.672M
5500MHz	Pass	Inf	21.3M	16.762M	21.39M	16.672M
5580MHz	Pass	Inf	21.24M	16.762M	21.75M	16.702M
5700MHz	Pass	Inf	21.27M	16.792M	21.39M	16.642M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.575M	13.381M	15.82M	13.398M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.15M	4.333M	3.165M	4.273M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;

802.11a_Nss1,(6Mbps)_2TX
EBW
5260MHz

16/06/2021

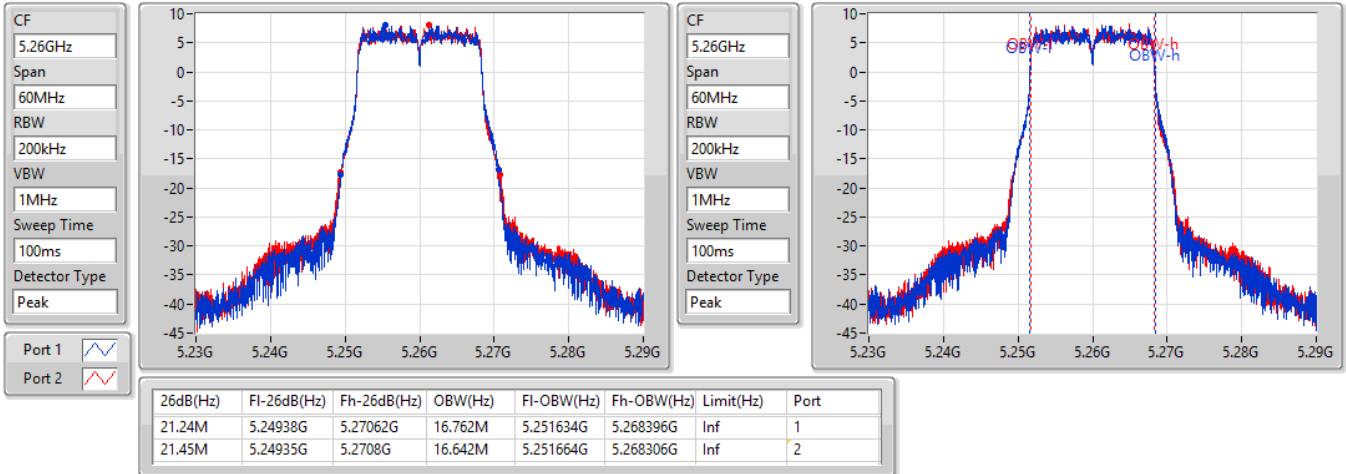

802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

16/06/2021

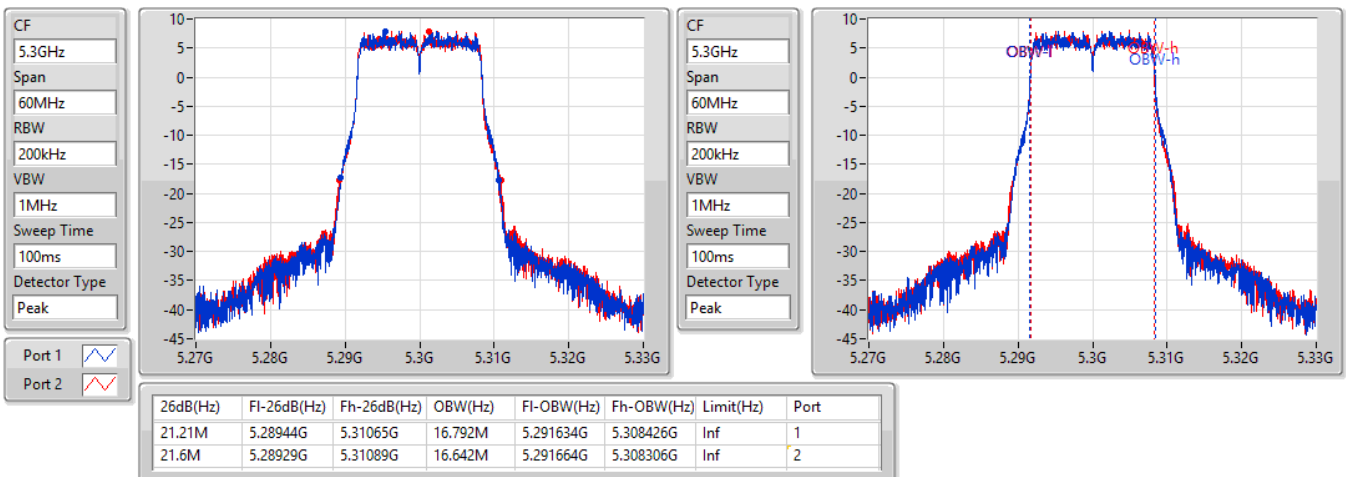


802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

16/06/2021

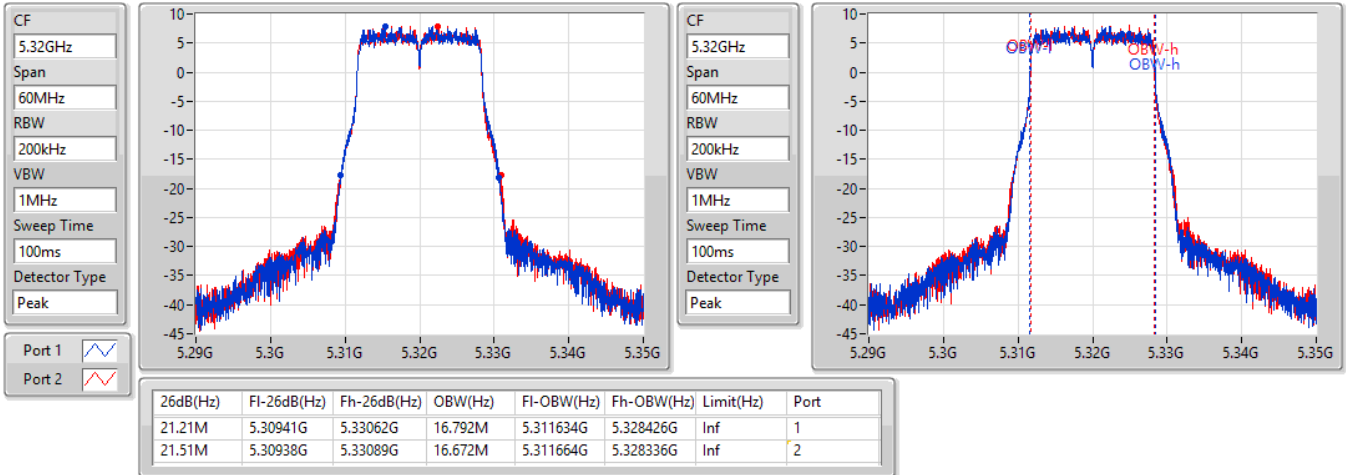

802.11a_Nss1,(6Mbps)_2TX
EBW
5500MHz

16/06/2021

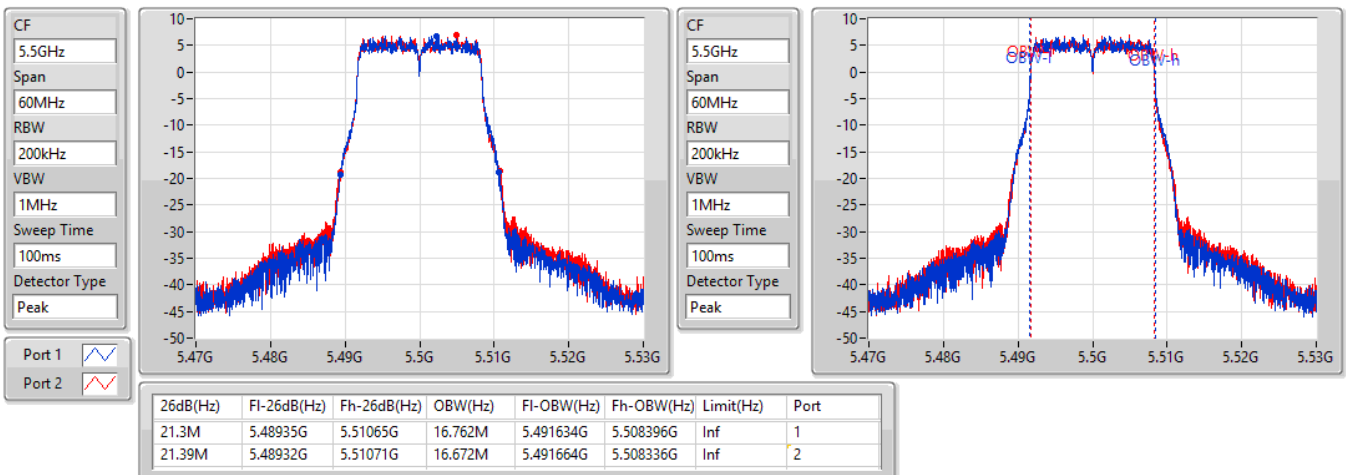


802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

16/06/2021

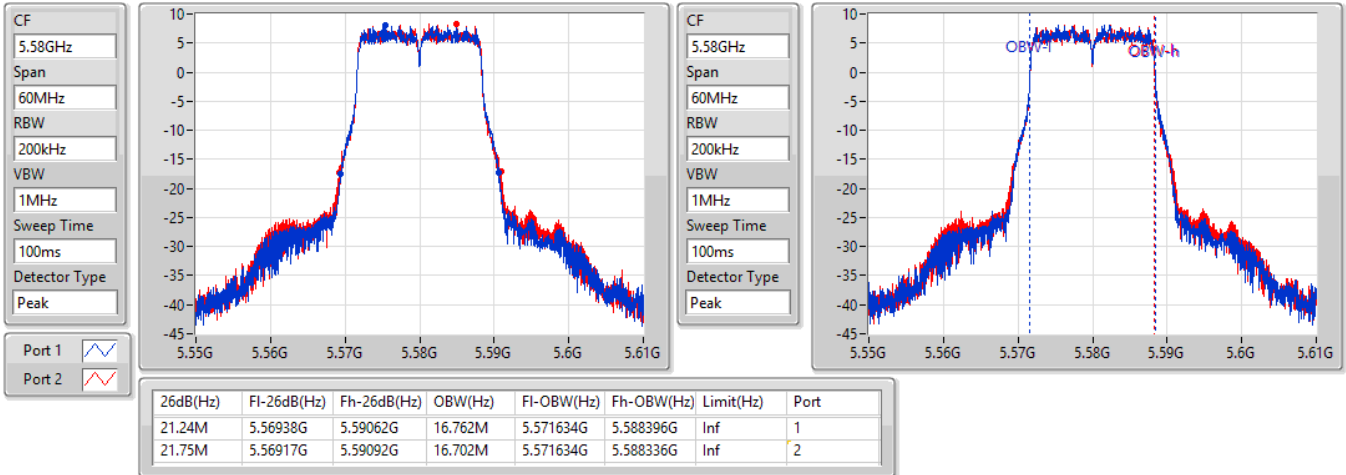

802.11a_Nss1,(6Mbps)_2TX
EBW
5700MHz

16/06/2021

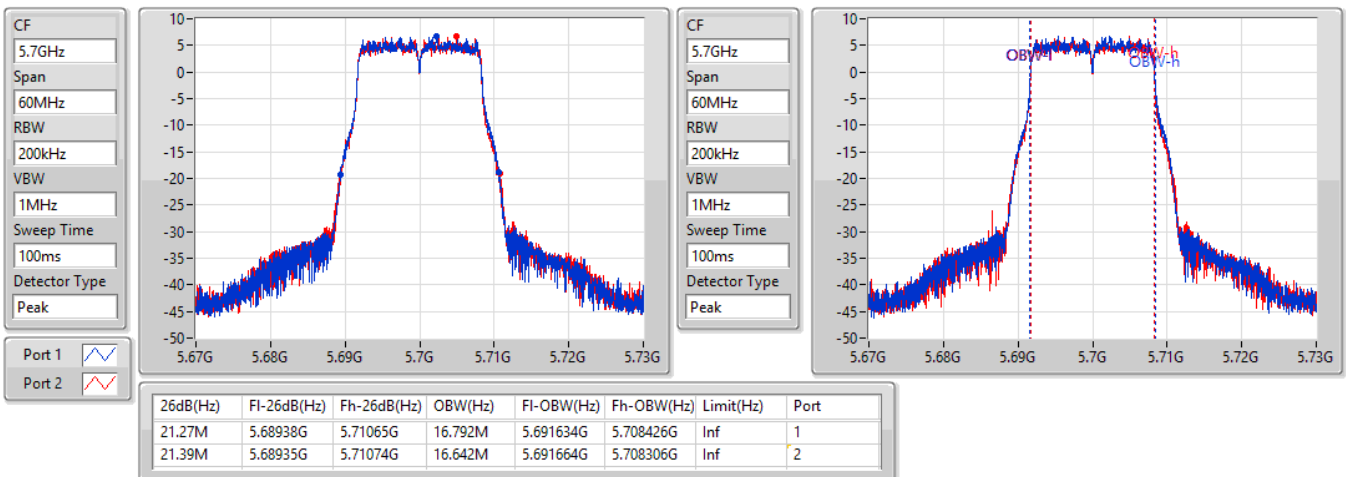


802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

16/06/2021

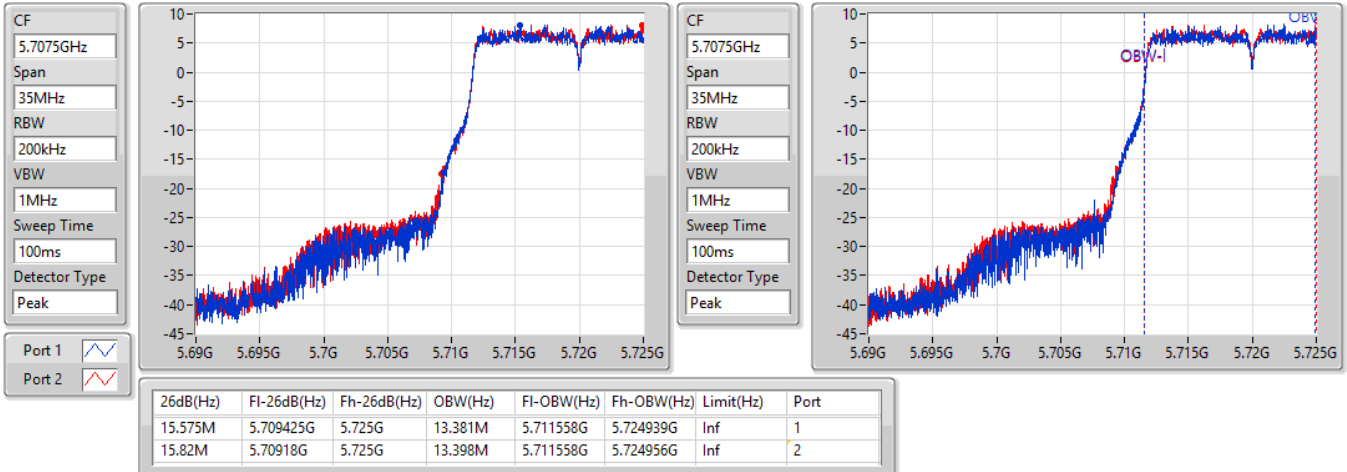
802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.725-5.85GHz

16/06/2021

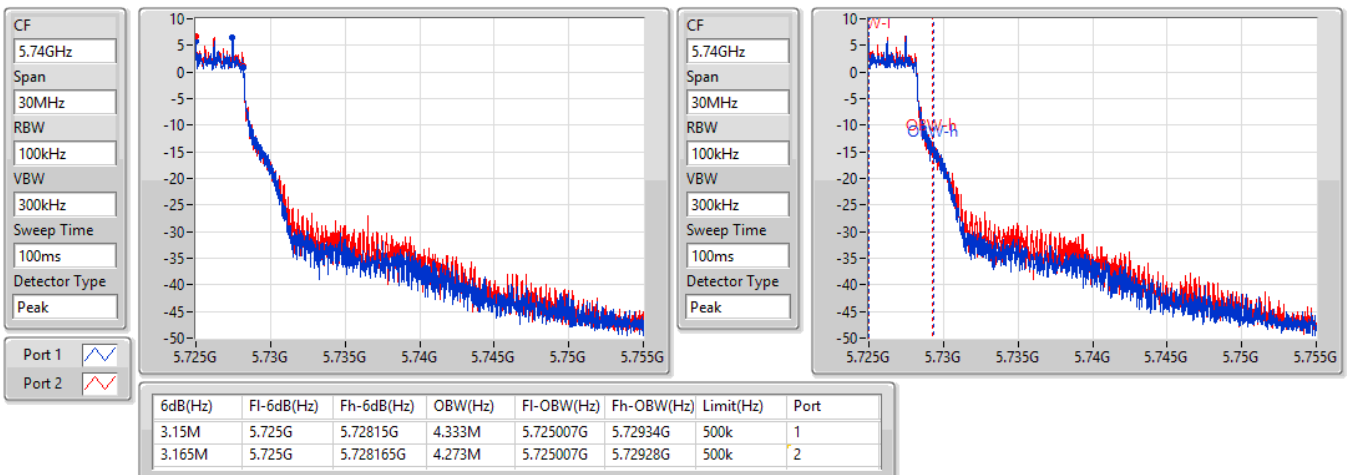

**For 2T2S
Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW160_Nss2,(MCS0)_2TX	81.96M	78.561M	78M6D1D	81.84M	77.841M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.04M	19.07M	19M1D1D	21.24M	19.04M
802.11ax HEW40_Nss2,(MCS0)_2TX	62.46M	37.781M	37M8D1D	54.06M	37.721M
802.11ax HEW80_Nss2,(MCS0)_2TX	81.6M	77.121M	77M1D1D	81.36M	77.121M
802.11ax HEW160_Nss2,(MCS0)_2TX	83.76M	78.081M	78M1D1D	83.28M	77.721M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	26.52M	19.16M	19M2D1D	18.795M	14.535M
802.11ax HEW40_Nss2,(MCS0)_2TX	68.82M	37.781M	37M8D1D	36.788M	33.658M
802.11ax HEW80_Nss2,(MCS0)_2TX	116.64M	77.601M	77M6D1D	75.253M	73.201M
802.11ax HEW160_Nss2,(MCS0)_2TX	219.36M	156.402M	156MD1D	166.08M	155.682M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	4.47M	6.177M	6M18D1D	4.455M	4.963M
802.11ax HEW40_Nss2,(MCS0)_2TX	3.75M	14.573M	14M6D1D	3.69M	12.534M
802.11ax HEW80_Nss2,(MCS0)_2TX	3.795M	18.621M	18M6D1D	3.75M	15.982M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	23.04M	19.04M	22.65M	19.07M
5300MHz	Pass	Inf	21.63M	19.07M	21.36M	19.07M
5320MHz	Pass	Inf	21.54M	19.04M	21.24M	19.04M
5500MHz	Pass	Inf	21.51M	19.04M	21.42M	19.07M
5580MHz	Pass	Inf	24.45M	19.1M	26.52M	19.16M
5700MHz	Pass	Inf	21.6M	19.04M	21.27M	19.04M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	18.795M	14.57M	19.793M	14.535M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.47M	4.963M	4.455M	6.177M
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	54.96M	37.781M	62.34M	37.721M
5310MHz	Pass	Inf	54.06M	37.781M	62.46M	37.721M
5510MHz	Pass	Inf	39.9M	37.601M	39.9M	37.541M
5550MHz	Pass	Inf	62.34M	37.781M	68.82M	37.721M
5670MHz	Pass	Inf	40.02M	37.661M	39.84M	37.541M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	40.838M	33.846M	36.788M	33.658M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.75M	12.534M	3.69M	14.573M
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	81.6M	77.121M	81.36M	77.121M
5530MHz	Pass	Inf	81.36M	77.121M	81.96M	77.121M
5610MHz	Pass	Inf	99.72M	77.481M	116.64M	77.601M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.253M	73.201M	84.165M	73.278M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.795M	15.982M	3.75M	18.621M
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.96M	78.561M	81.84M	77.841M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	83.28M	77.721M	83.76M	78.081M
5570MHz	Pass	Inf	166.08M	156.402M	219.36M	155.682M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss2,(MCS0)_2TX

EBW

5260MHz

16/06/2021

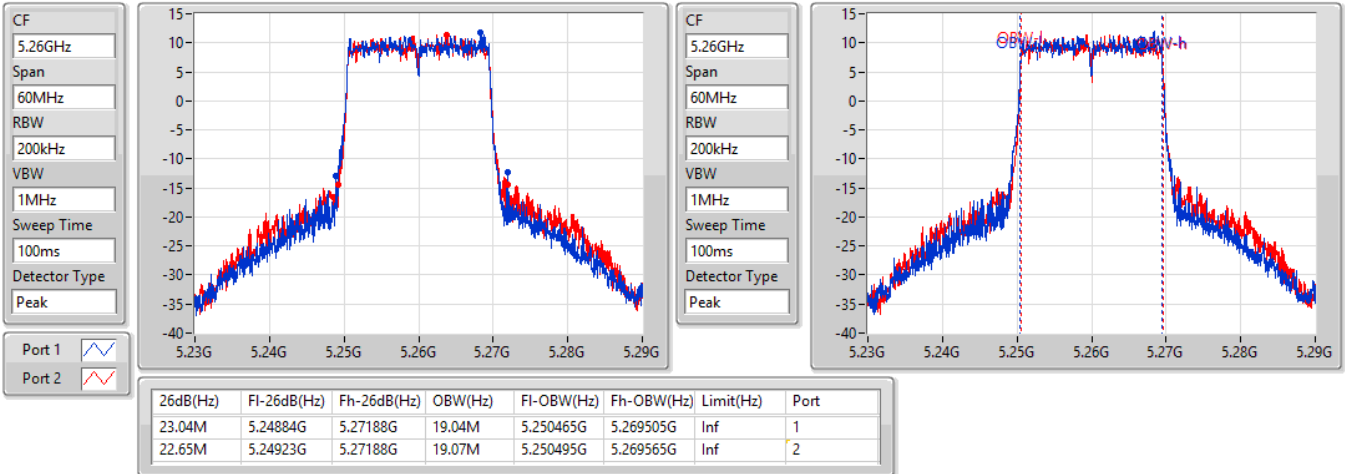


802.11ax HEW20_Nss2,(MCS0)_2TX

EBW


5300MHz

16/06/2021

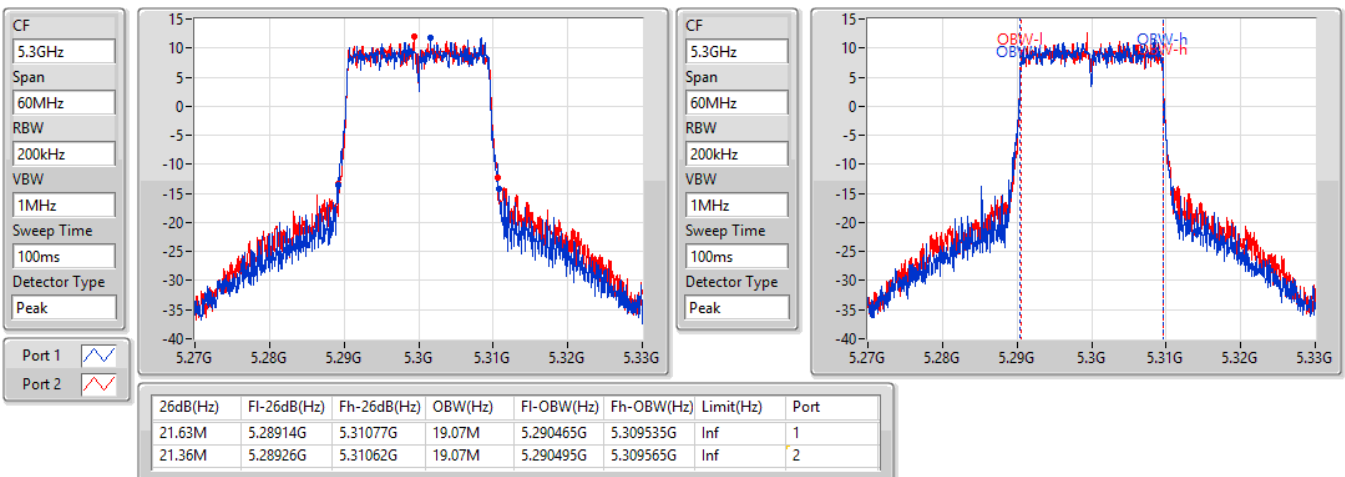


802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5320MHz

16/06/2021

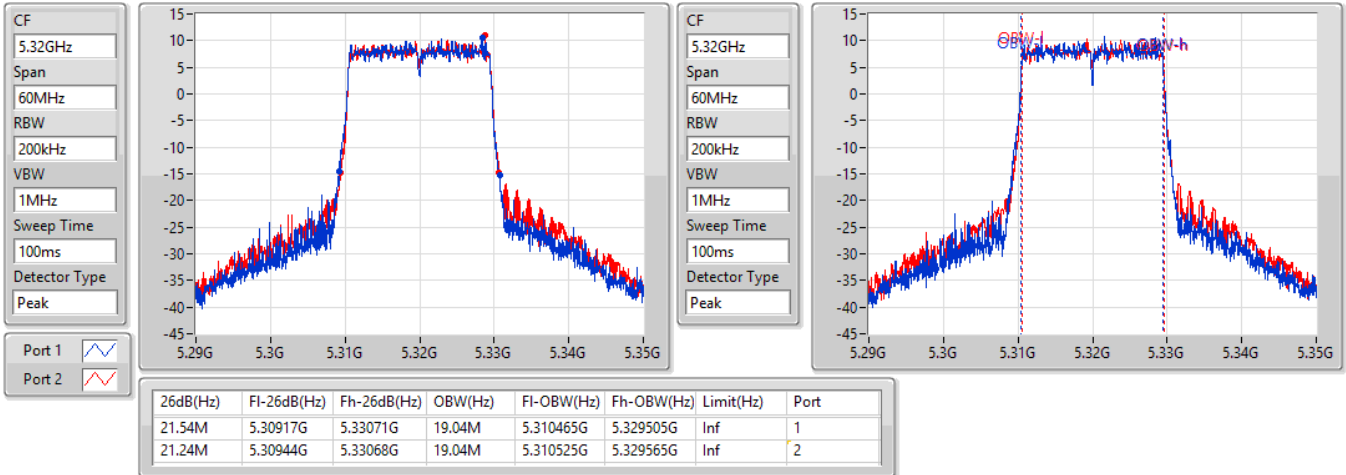

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5500MHz

16/06/2021

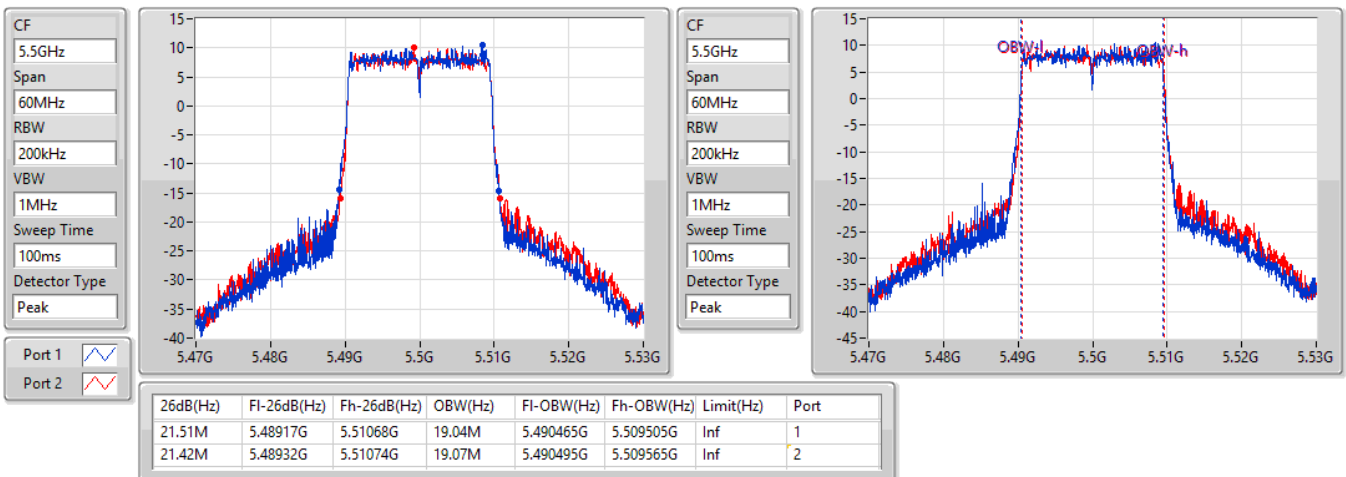


802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5580MHz

16/06/2021

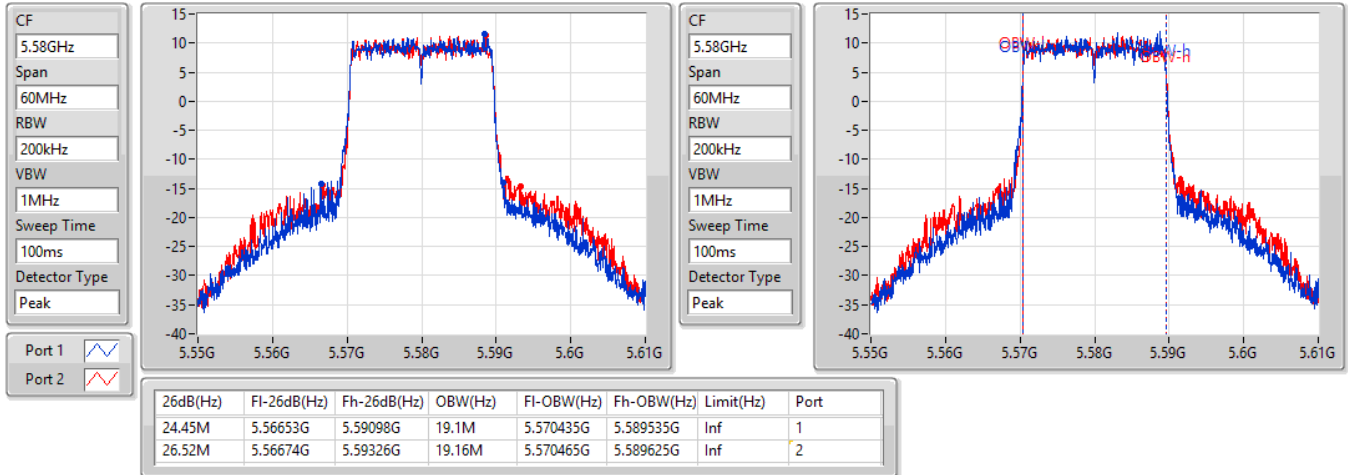

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5700MHz

16/06/2021

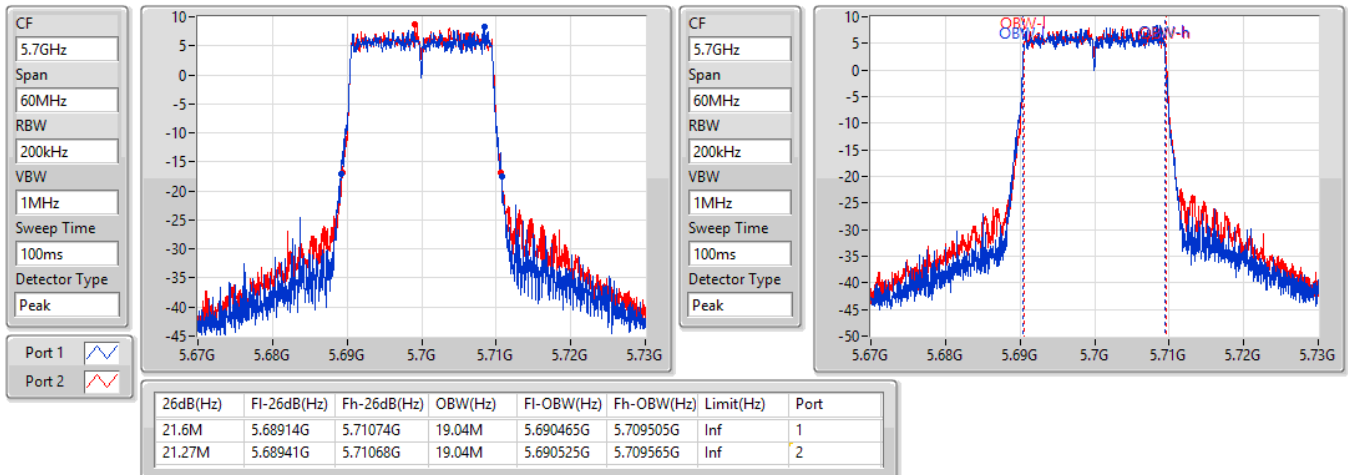


802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

16/06/2021

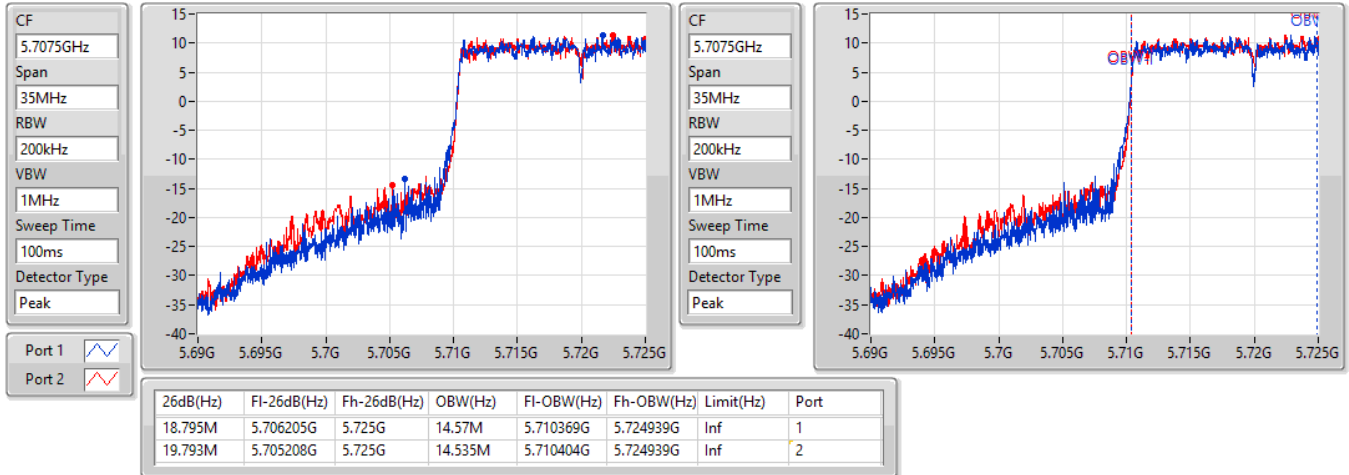

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5720MHz Straddle 5.725-5.85GHz

16/06/2021

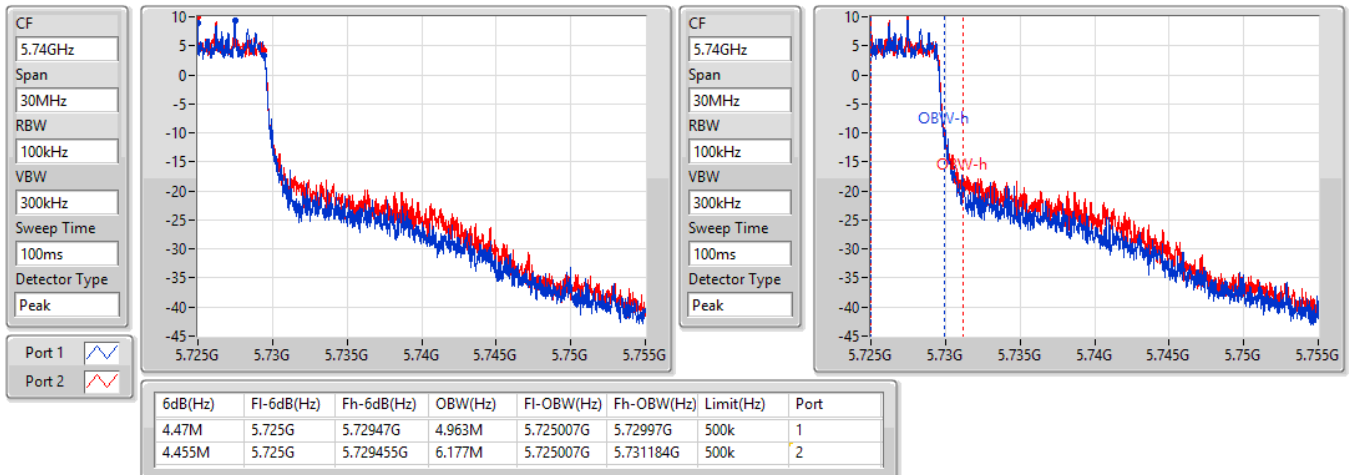


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5270MHz

16/06/2021

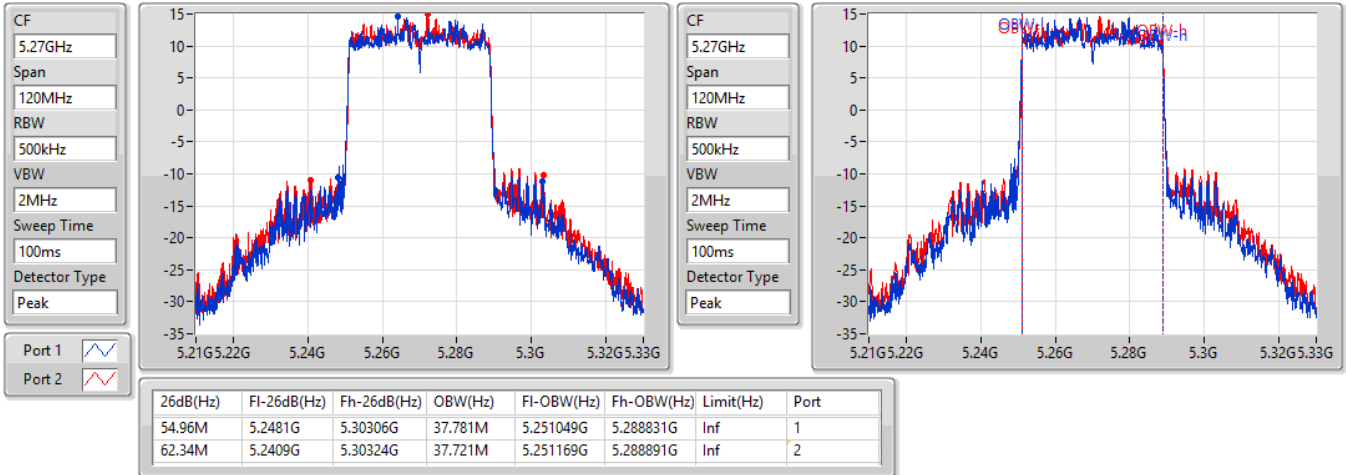
802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5310MHz

16/06/2021

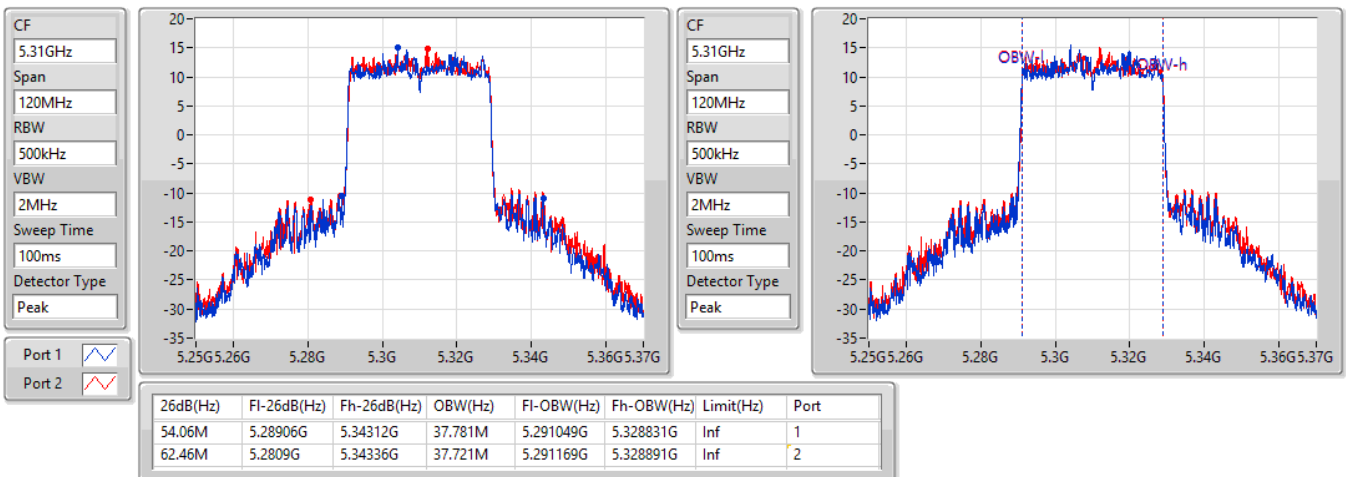


802.11ax HEW40_Nss2,(MCS0)_2TX

EBW

5510MHz

16/06/2021

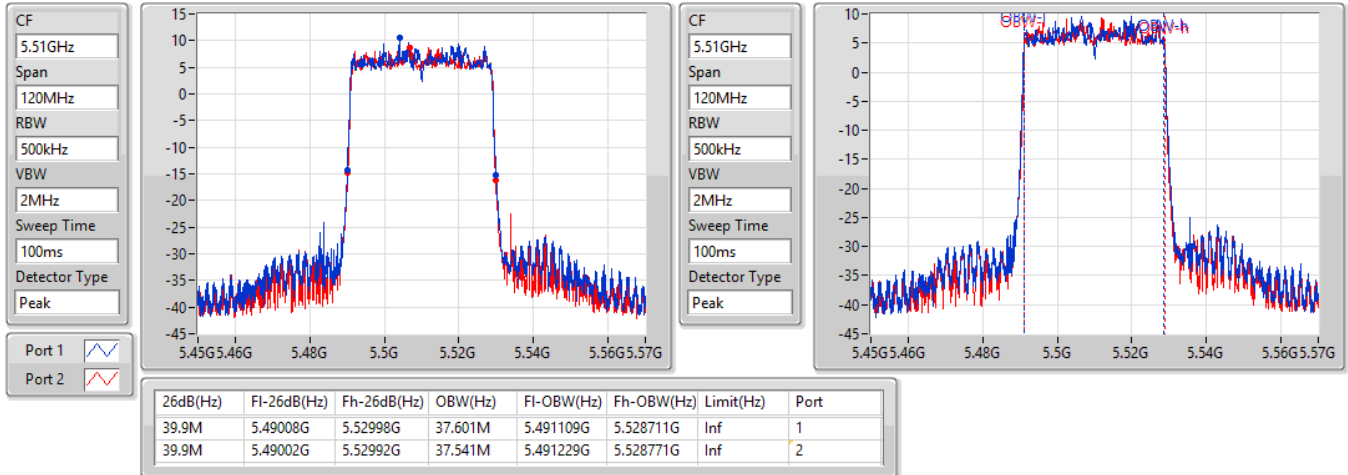


802.11ax HEW40_Nss2,(MCS0)_2TX

EBW


5550MHz

16/06/2021

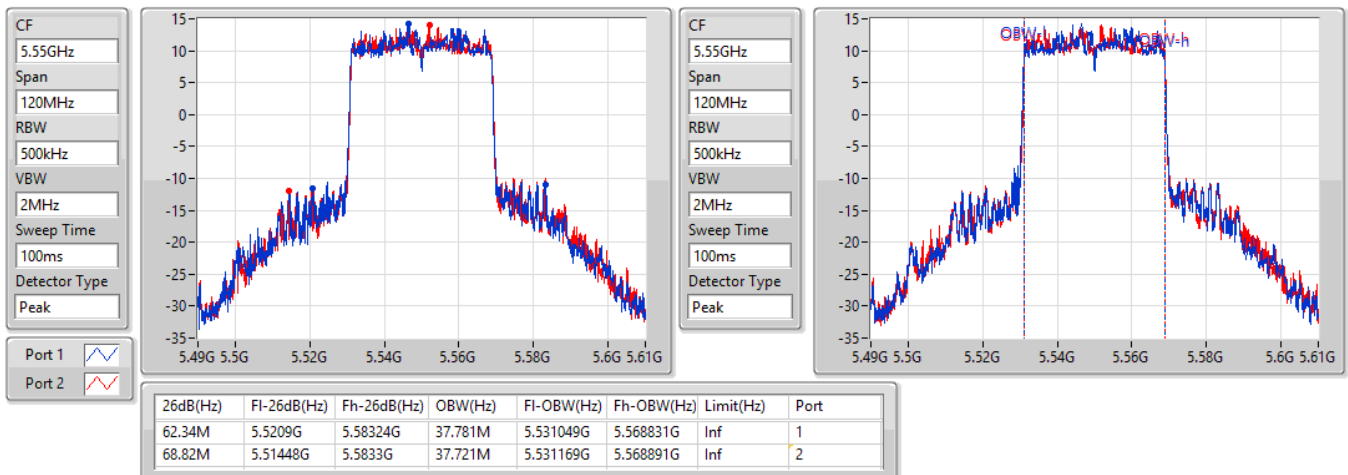


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5670MHz

16/06/2021

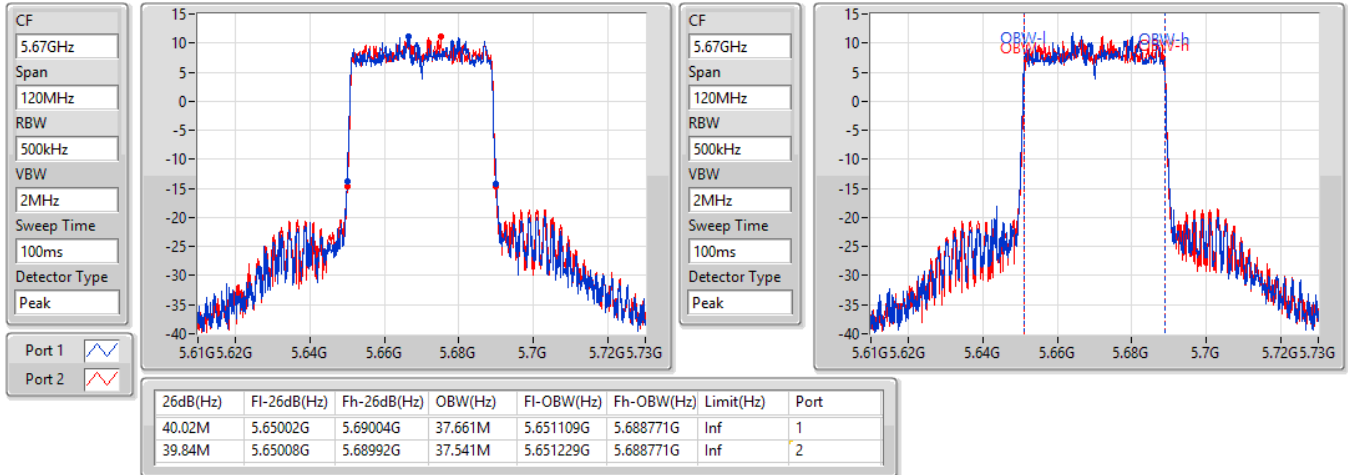

802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5710MHz Straddle 5.47-5.725GHz

16/06/2021

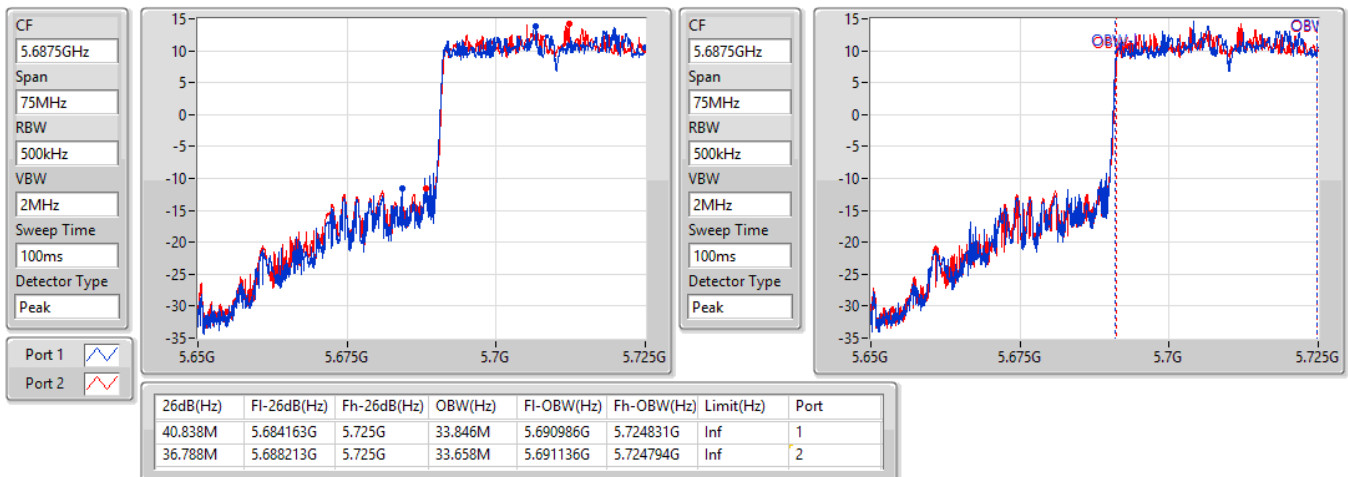


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5710MHz Straddle 5.725-5.85GHz

16/06/2021

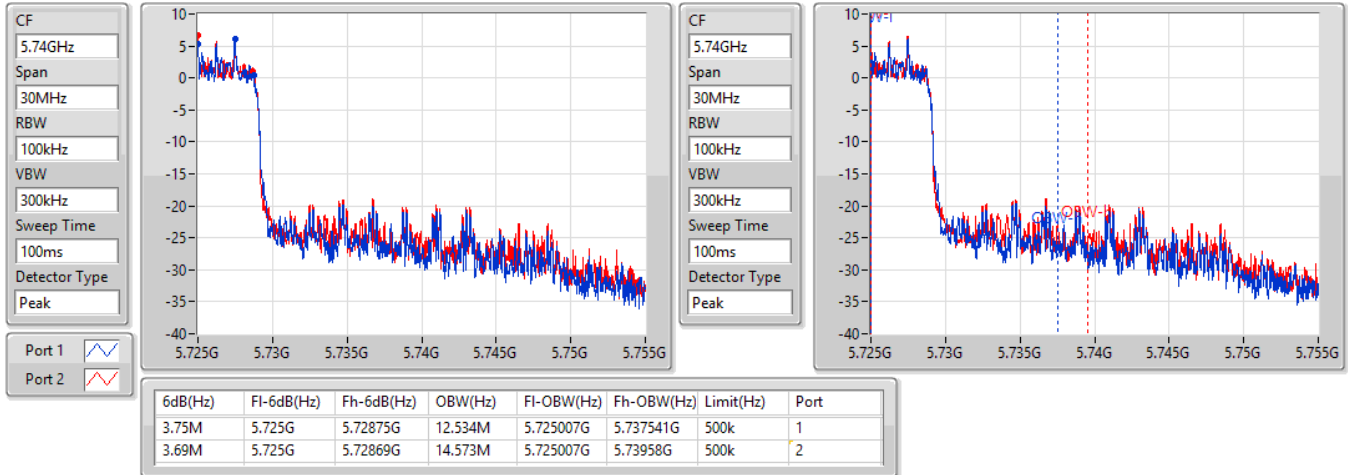

802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5290MHz

16/06/2021

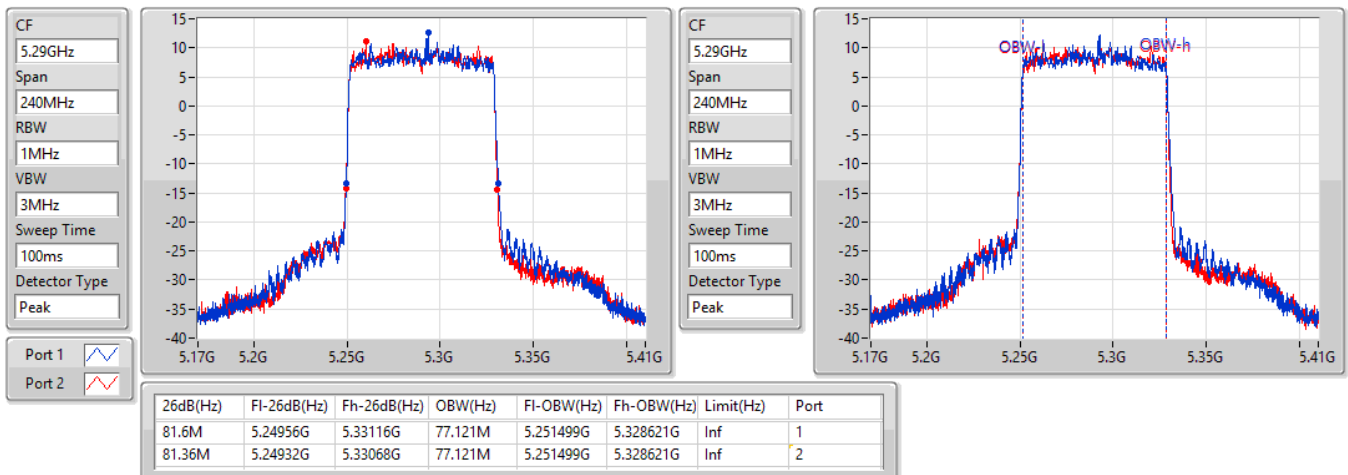


802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5530MHz

16/06/2021

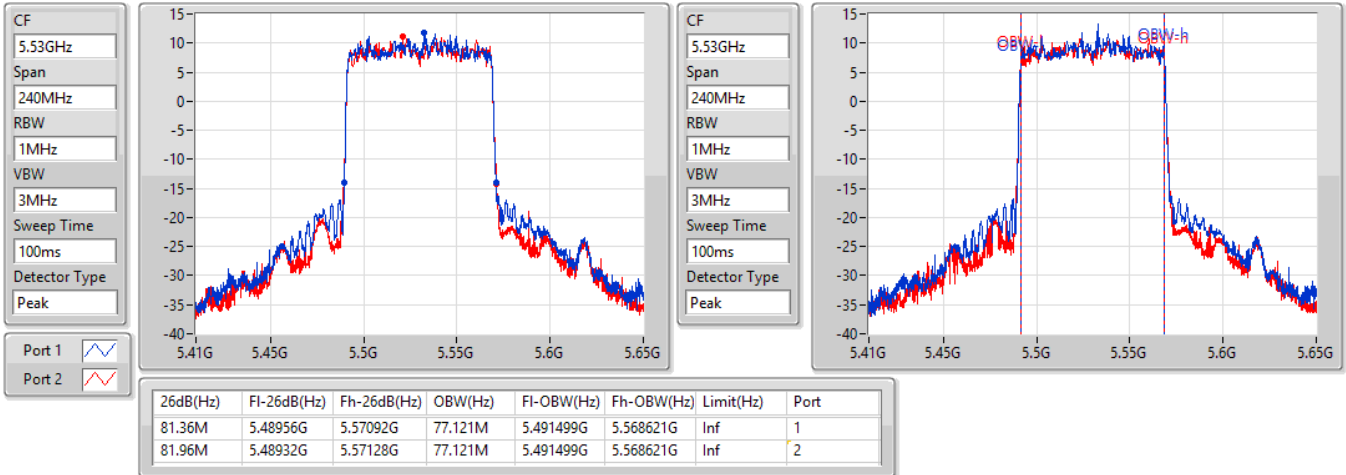
802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
5610MHz

16/06/2021

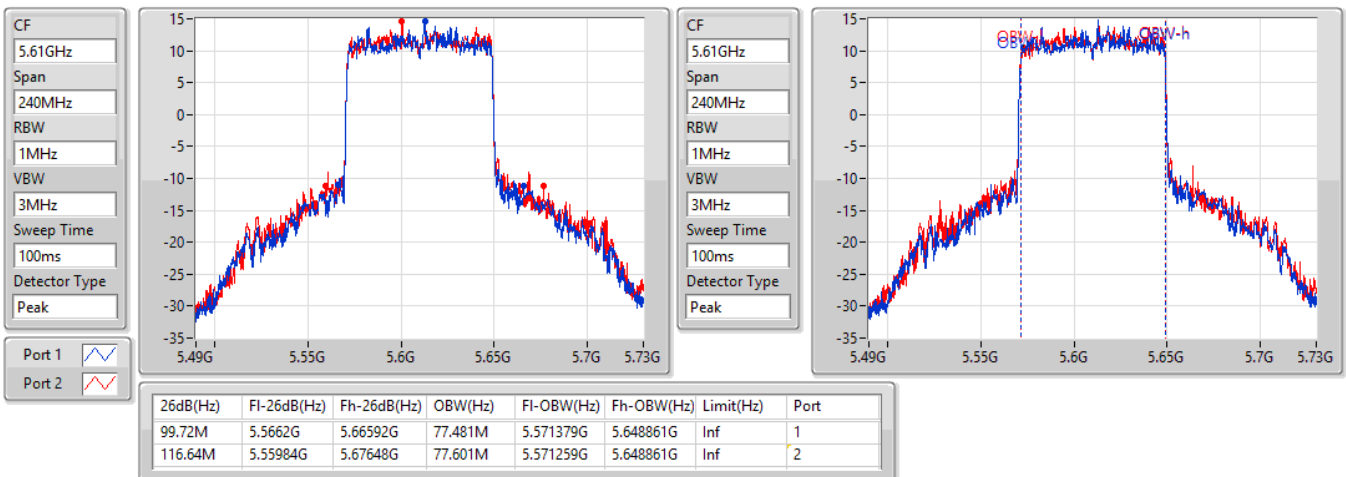


802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

5690MHz Straddle 5.47-5.725GHz

16/06/2021

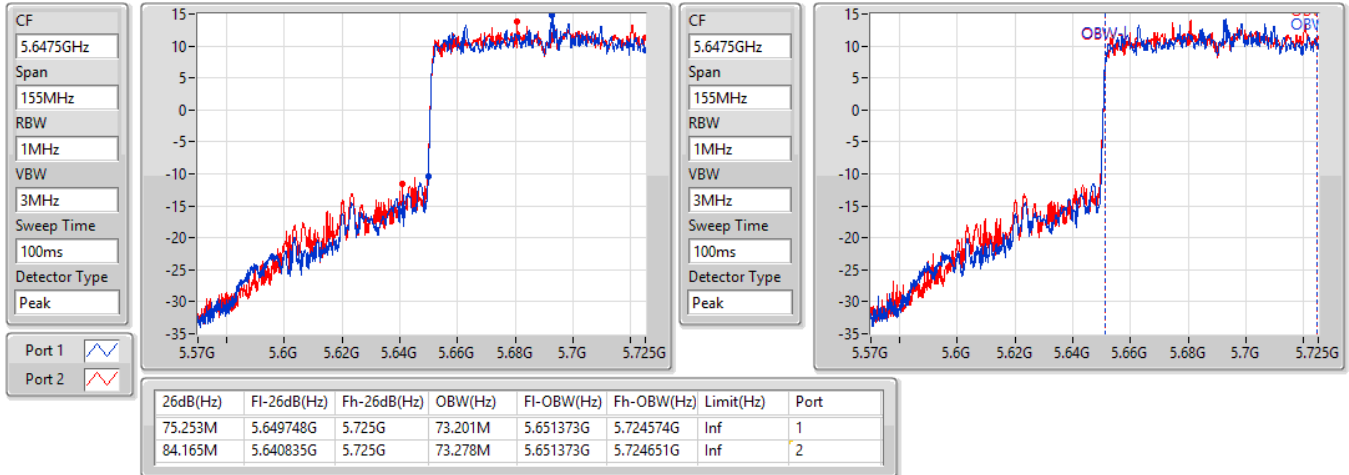


802.11ax HEW80_Nss2,(MCS0)_2TX

EBW


5690MHz Straddle 5.725-5.85GHz

16/06/2021

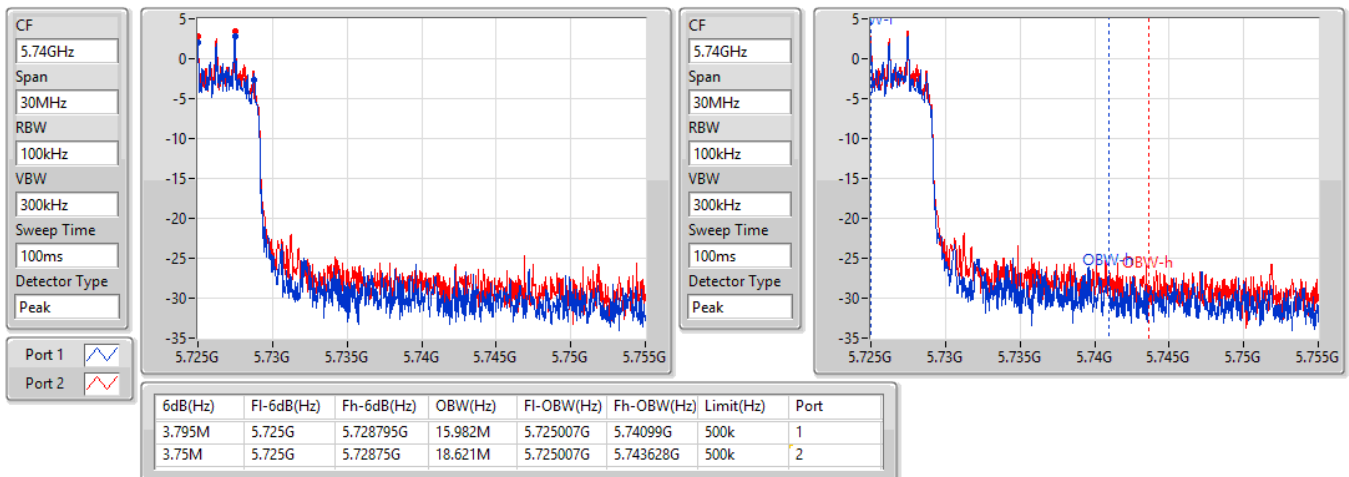


802.11ax HEW160_Nss2,(MCS0)_2TX
EBW
5250MHz Straddle 5.15-5.25GHz

16/06/2021

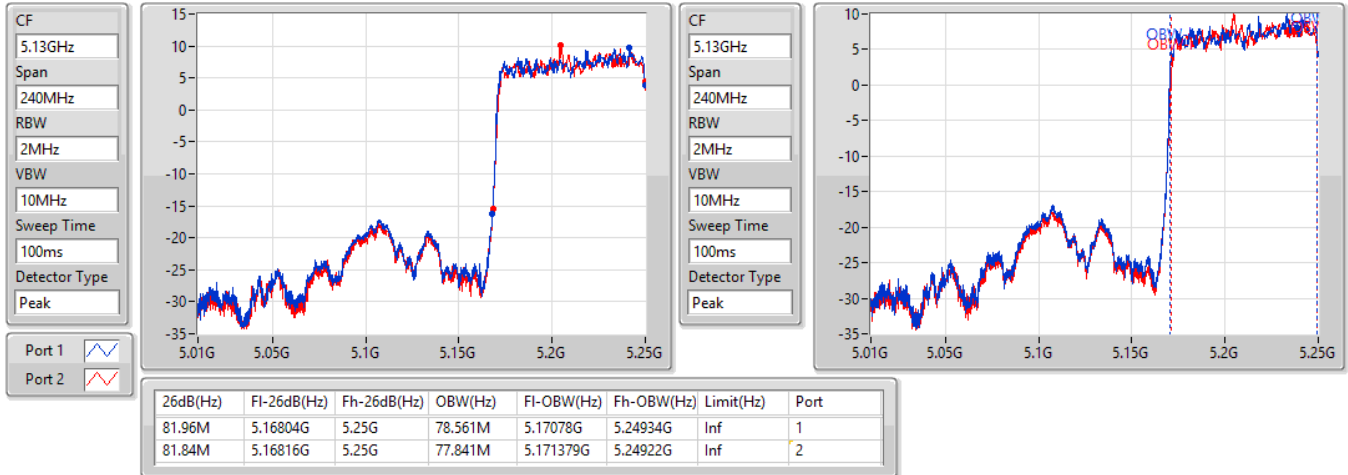
802.11ax HEW160_Nss2,(MCS0)_2TX
EBW
5250MHz Straddle 5.25-5.35GHz

16/06/2021

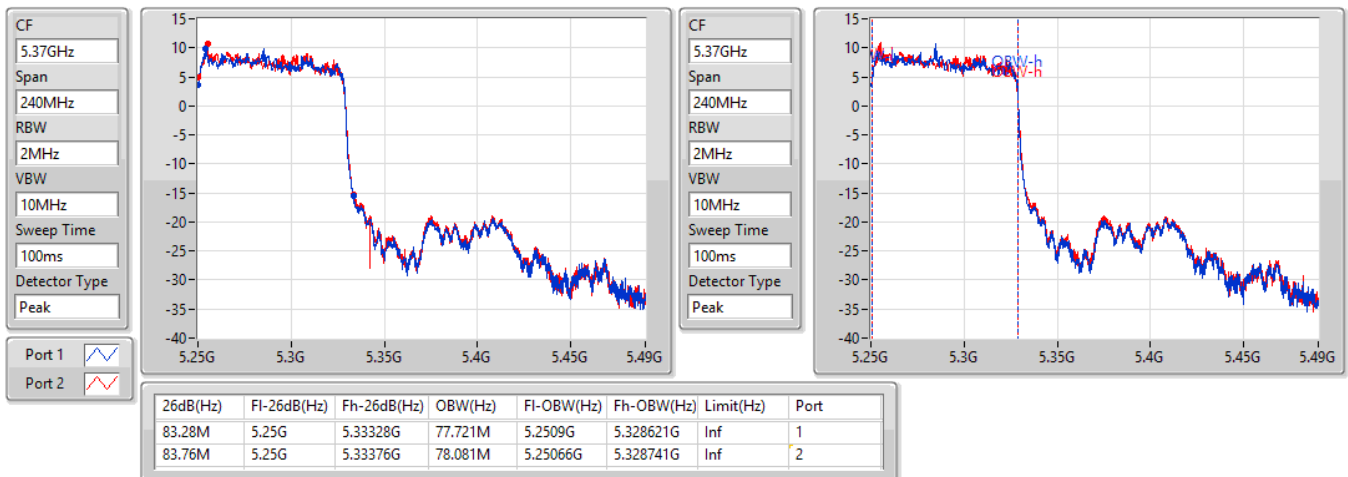


802.11ax HEW160_Nss2,(MCS0)_2TX

EBW

5570MHz

16/06/2021

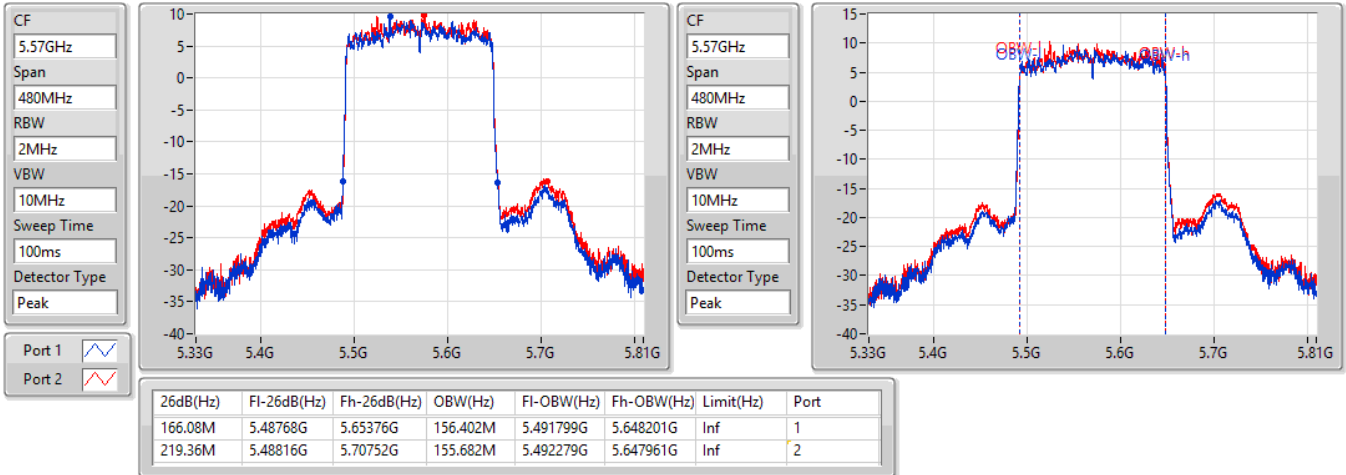

**For Radio 2 / 1T1S
Summary**

Mode	Total Power (dBm)	Total Power (W)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	22.35	0.17179
802.11ax HEW20_Nss1,(MCS0)_1TX	22.28	0.16904
802.11ax HEW40_Nss1,(MCS0)_1TX	22.93	0.19634
802.11ax HEW80_Nss1,(MCS0)_1TX	19.19	0.08299
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	23.08	0.20324
802.11ax HEW20_Nss1,(MCS0)_1TX	22.79	0.19011
802.11ax HEW40_Nss1,(MCS0)_1TX	23.79	0.23933
802.11ax HEW80_Nss1,(MCS0)_1TX	23.58	0.22803
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	15.85	0.03846
802.11ax HEW20_Nss1,(MCS0)_1TX	16.27	0.04236
802.11ax HEW40_Nss1,(MCS0)_1TX	13.90	0.02455
802.11ax HEW80_Nss1,(MCS0)_1TX	9.80	0.00955

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
5260MHz	Pass	5.14	22.22	22.22	23.98	22.5
5300MHz	Pass	5.14	22.35	22.35	23.98	22.75
5320MHz	Pass	5.14	22.31	22.31	23.98	22.5
5500MHz	Pass	4.23	20.80	20.80	23.98	20.75
5580MHz	Pass	4.23	23.08	23.08	23.98	23.25
5700MHz	Pass	4.23	19.99	19.99	23.98	19.5
5720MHz Straddle 5.47-5.725GHz	Pass	4.23	22.09	22.09	23.98	22.5
5720MHz Straddle 5.725-5.85GHz	Pass	4.43	15.85	15.85	30.00	22.5
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5260MHz	Pass	5.14	22.28	22.28	23.98	22.25
5300MHz	Pass	5.14	22.04	22.04	23.98	22
5320MHz	Pass	5.14	21.82	21.82	23.98	21.75
5500MHz	Pass	4.23	19.92	19.92	23.98	19.5
5580MHz	Pass	4.23	22.79	22.79	23.98	22.75
5700MHz	Pass	4.23	18.89	18.89	23.98	18
5720MHz Straddle 5.47-5.725GHz	Pass	4.23	21.55	21.55	23.98	21.75
5720MHz Straddle 5.725-5.85GHz	Pass	4.43	16.27	16.27	30.00	21.75
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5270MHz	Pass	5.14	22.93	22.93	23.98	23.25
5310MHz	Pass	5.14	19.53	19.53	23.98	19.25
5510MHz	Pass	4.23	18.73	18.73	23.98	18
5550MHz	Pass	4.23	23.10	23.10	23.98	22.75
5670MHz	Pass	4.23	21.98	21.98	23.98	21.75
5710MHz Straddle 5.47-5.725GHz	Pass	4.23	23.79	23.79	23.98	23.5
5710MHz Straddle 5.725-5.85GHz	Pass	4.43	13.90	13.90	30.00	23.5
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5290MHz	Pass	5.14	19.19	19.19	23.98	18.75
5530MHz	Pass	4.23	18.65	18.65	23.98	17.5
5610MHz	Pass	4.23	23.05	23.05	23.98	22.5
5690MHz Straddle 5.47-5.725GHz	Pass	4.23	23.58	23.58	23.98	22.25
5690MHz Straddle 5.725-5.85GHz	Pass	4.43	9.80	9.80	30.00	22.25


DG = Directional Gain; Port X = Port X output power

Note : Conducted setting = Pass conducted setting division 4

802.11a_Nss1,(6Mbps)_1TX

AV Power


5720MHz Straddle 5.47-5.725GHz

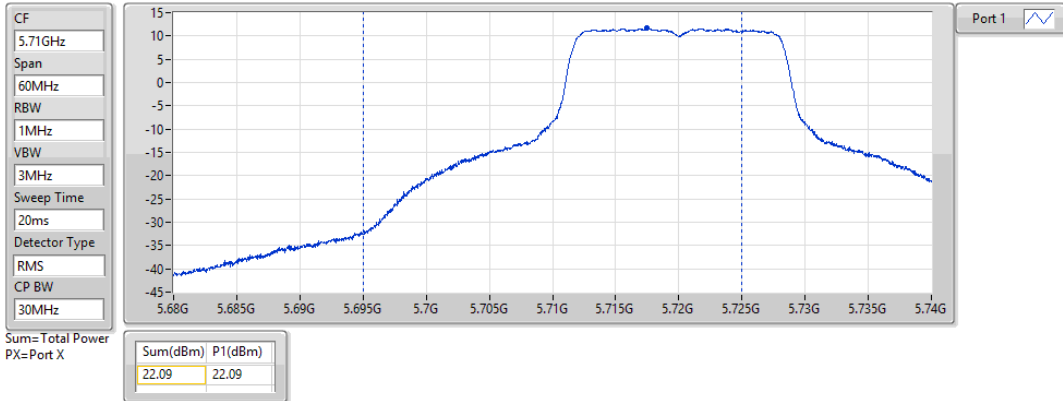

802.11a_Nss1,(6Mbps)_1TX

AV Power


5720MHz Straddle 5.725-5.85GHz

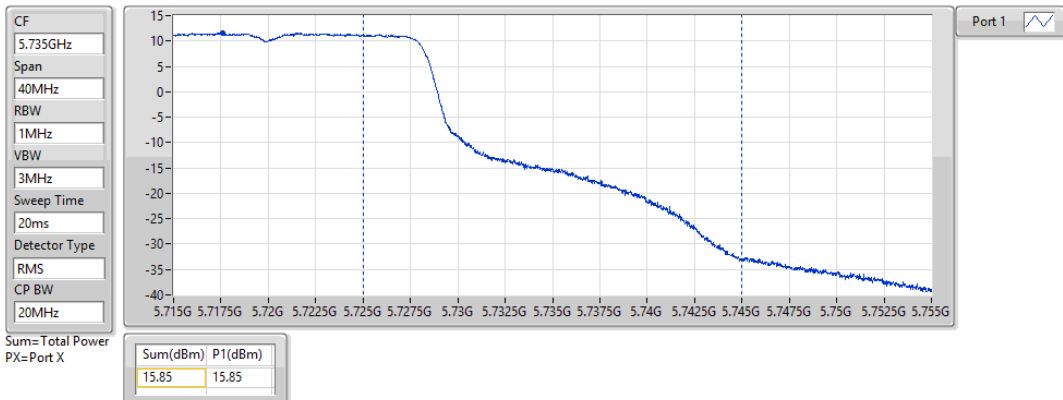

802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz

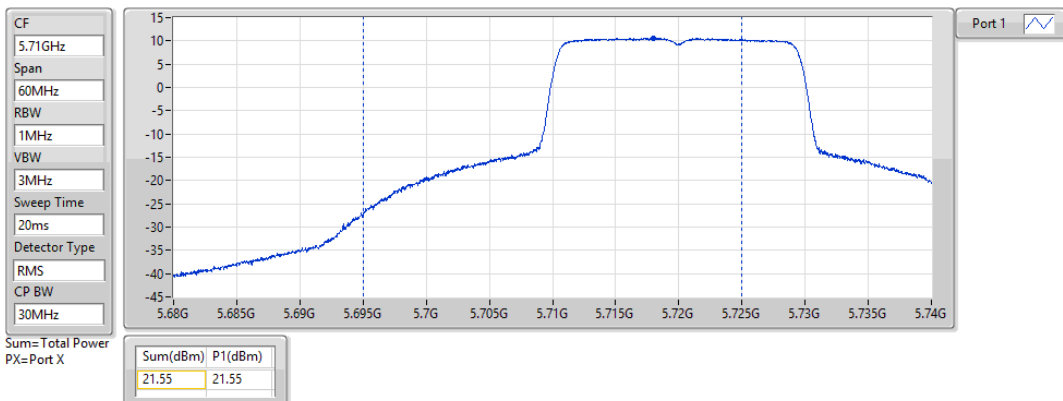


802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz

15/06/2021

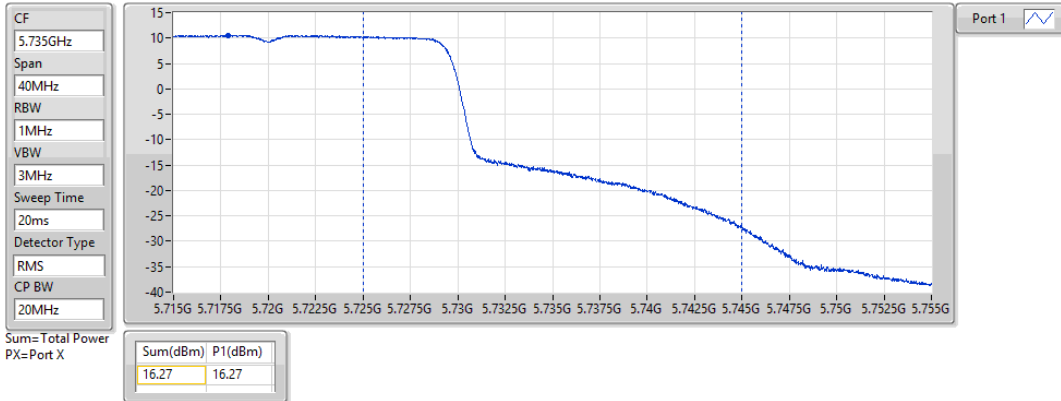


802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz

15/06/2021

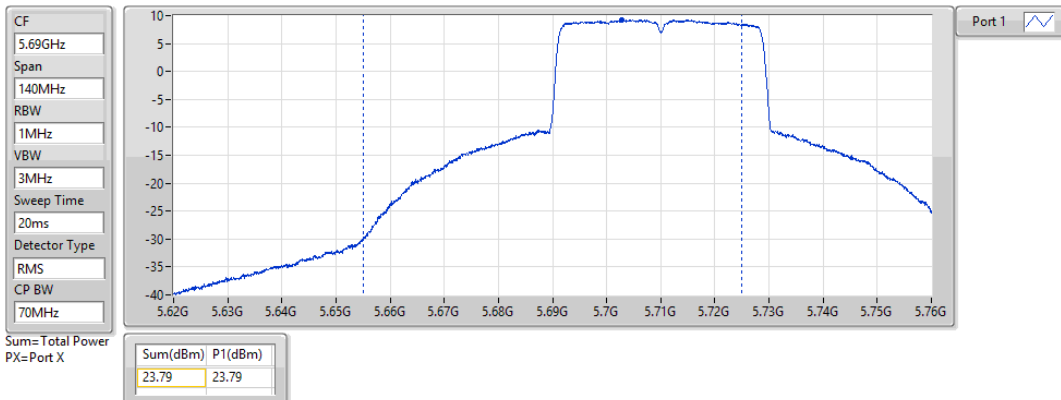


802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.725-5.85GHz

15/06/2021

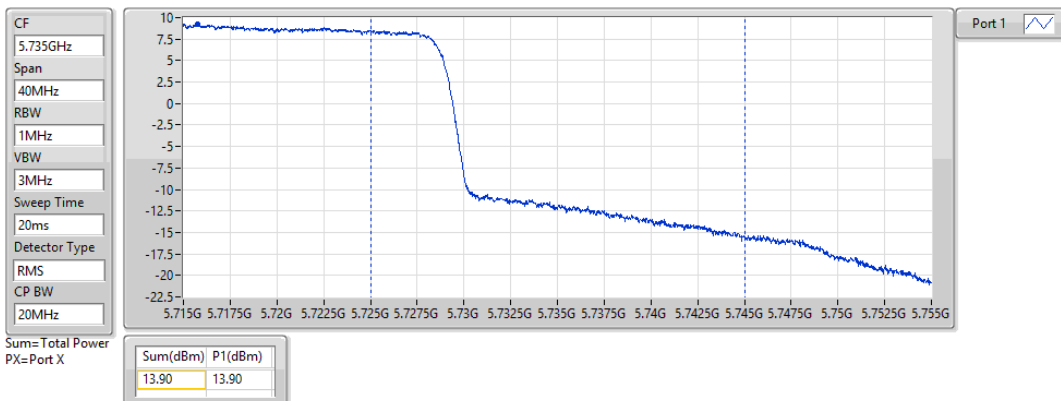


802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.47-5.725GHz

15/06/2021

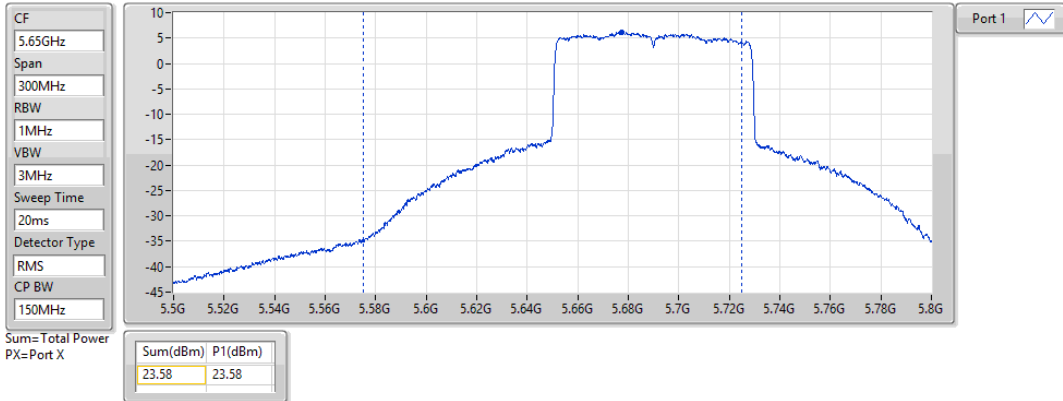


802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.725-5.85GHz

15/06/2021

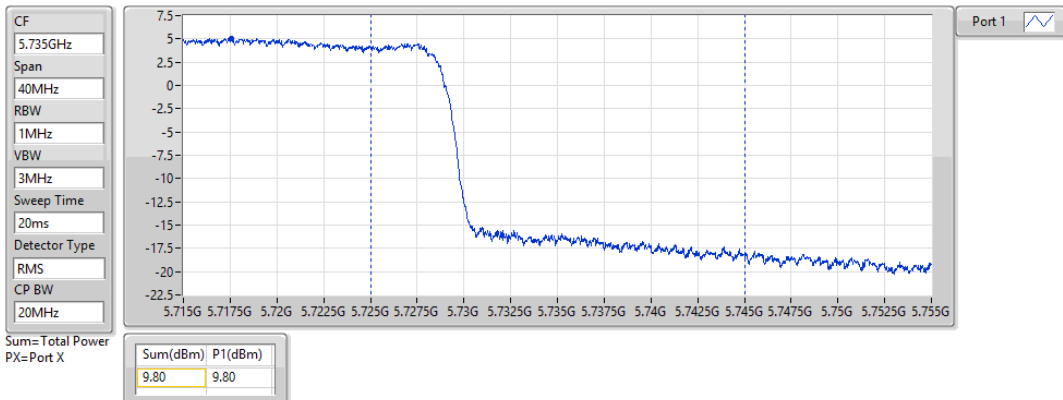



Average Power

Appendix B.2

For 2T1S Summary

Mode	Total Power (dBm)	Total Power (W)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	23.09	0.20370
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	23.45	0.22131
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.71	0.04688

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5260MHz	Pass	5.14	20.00	19.67	22.85	23.98	19.5
5300MHz	Pass	5.14	19.87	19.70	22.80	23.98	19.5
5320MHz	Pass	5.14	20.25	19.90	23.09	23.98	19.75
5500MHz	Pass	4.23	20.25	19.68	22.98	23.98	19.5
5580MHz	Pass	4.23	20.74	20.12	23.45	23.98	20
5700MHz	Pass	4.23	19.15	18.22	21.72	23.98	17.75
5720MHz Straddle 5.47-5.725GHz	Pass	4.23	20.39	19.46	22.96	23.04	19.25
5720MHz Straddle 5.725-5.85GHz	Pass	4.43	14.21	13.12	16.71	30.00	19.25


DG = Directional Gain; **Port X** = Port X output power

802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz

15/06/2021

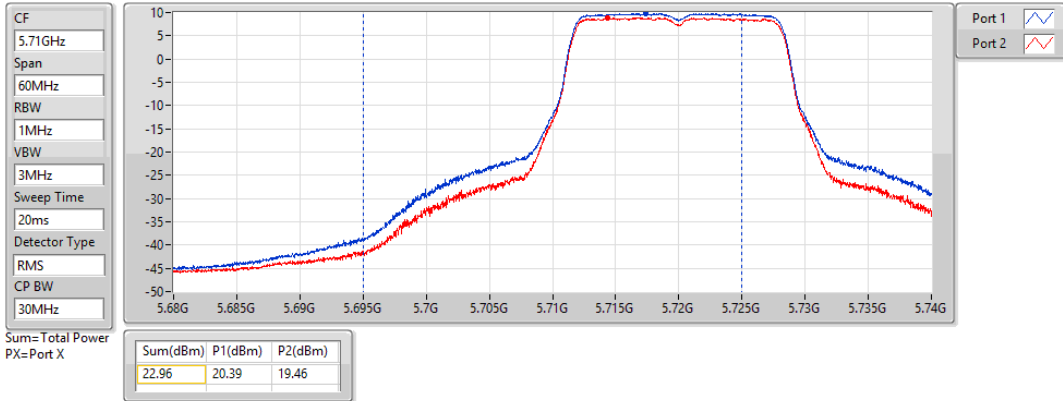


802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz

15/06/2021

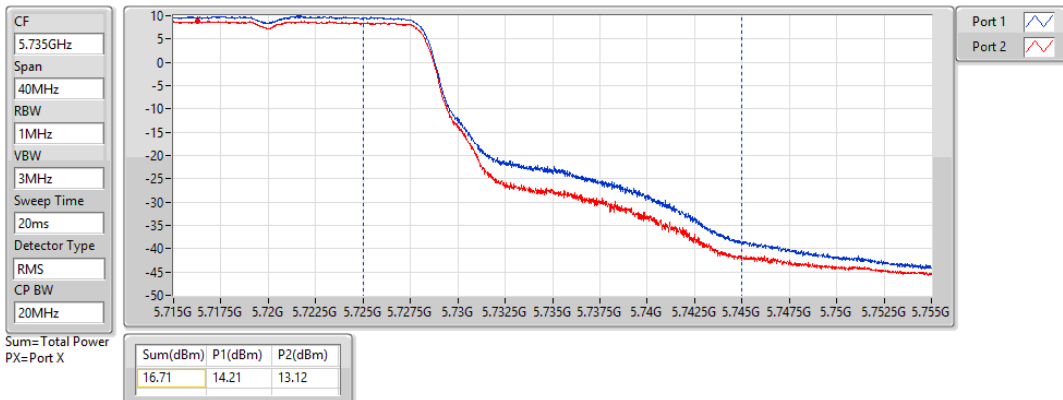

For 2T2S Summary

Mode	Total Power (dBm)	Total Power (W)
5.25-5.35GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.37	0.21727
802.11ax HEW40_Nss2,(MCS0)_2TX	23.97	0.24946
802.11ax HEW80_Nss2,(MCS0)_2TX	19.78	0.09506
5.47-5.725GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.66	0.23227
802.11ax HEW40_Nss2,(MCS0)_2TX	23.92	0.24660
802.11ax HEW80_Nss2,(MCS0)_2TX	23.65	0.23174
5.725-5.85GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	18.01	0.06324
802.11ax HEW40_Nss2,(MCS0)_2TX	14.05	0.02541
802.11ax HEW80_Nss2,(MCS0)_2TX	9.97	0.00993

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5260MHz	Pass	1.37	20.48	20.18	23.34	23.98	19.75
5300MHz	Pass	1.37	20.44	20.27	23.37	23.98	19.75
5320MHz	Pass	1.37	20.41	20.15	23.29	23.98	19.75
5500MHz	Pass	1.42	20.17	19.63	22.92	23.98	19.25
5580MHz	Pass	1.42	20.82	20.48	23.66	23.98	20.00
5700MHz	Pass	1.42	19.26	18.54	21.93	23.98	17.75
5720MHz Straddle 5.47-5.725GHz	Pass	1.42	20.71	19.83	23.30	23.47	19.50
5720MHz Straddle 5.725-5.85GHz	Pass	1.05	15.47	14.47	18.01	30.00	19.50
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5270MHz	Pass	1.37	21.26	20.64	23.97	23.98	20.50
5310MHz	Pass	1.37	17.53	17.59	20.57	23.98	17.00
5510MHz	Pass	1.42	16.21	16.23	19.23	23.98	15.25
5550MHz	Pass	1.42	20.98	20.57	23.79	23.98	20.00
5670MHz	Pass	1.42	20.68	19.55	23.16	23.98	19.25
5710MHz Straddle 5.47-5.725GHz	Pass	1.42	21.40	20.35	23.92	23.98	19.50
5710MHz Straddle 5.725-5.85GHz	Pass	1.05	11.66	10.32	14.05	30.00	19.50
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5290MHz	Pass	1.37	17.08	16.44	19.78	23.98	16.50
5530MHz	Pass	1.42	16.50	16.27	19.40	23.98	15.50
5610MHz	Pass	1.42	21.11	20.06	23.63	23.98	20.00
5690MHz Straddle 5.47-5.725GHz	Pass	1.42	21.08	20.16	23.65	23.98	19.25
5690MHz Straddle 5.725-5.85GHz	Pass	1.05	7.54	6.29	9.97	30.00	19.25

DG = Directional Gain; **Port X** = Port X output power

802.11ax HEW20_Nss2,(MCS0)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz

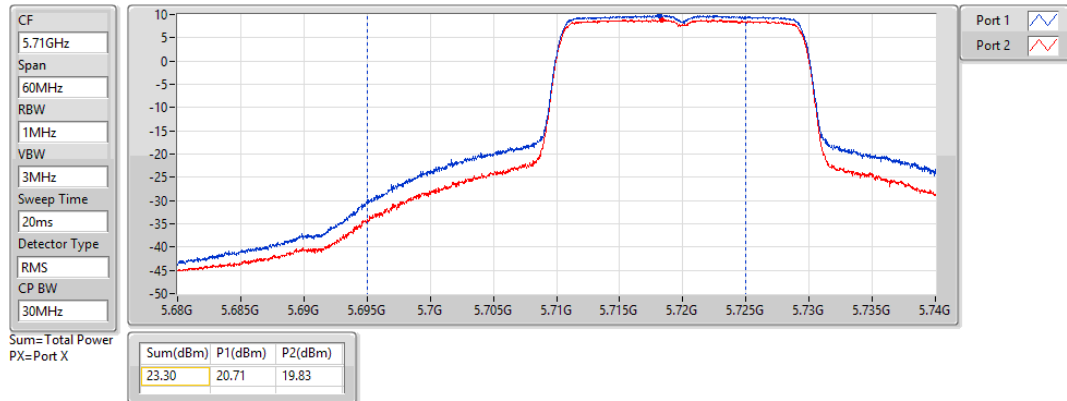

802.11ax HEW20_Nss2,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz

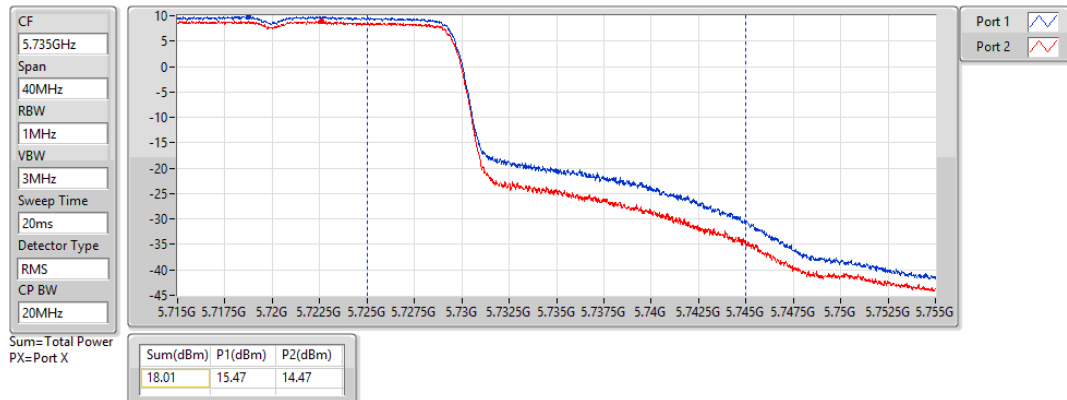

802.11ax HEW40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz

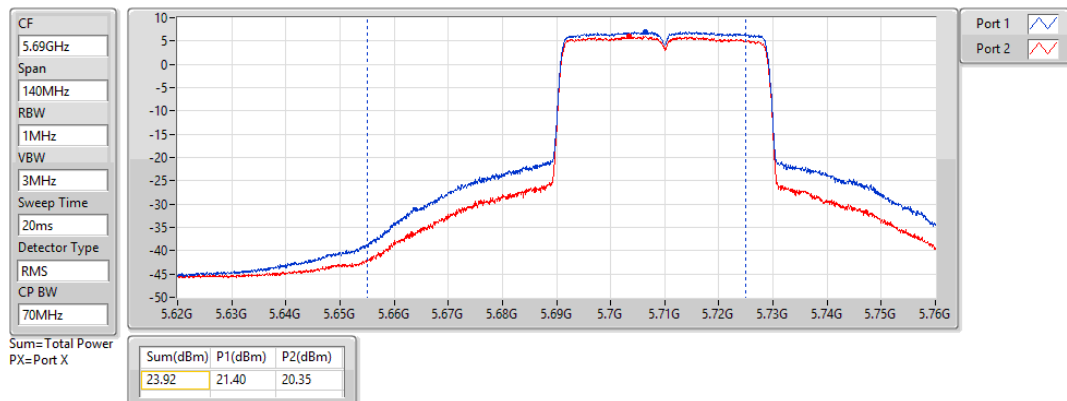


802.11ax HEW40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.725-5.85GHz

15/06/2021

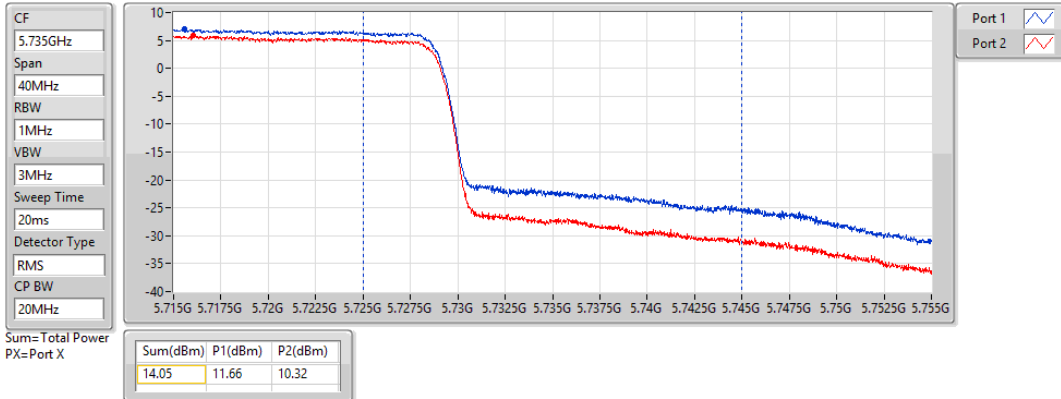


802.11ax HEW80_Nss2,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz

29/06/2021

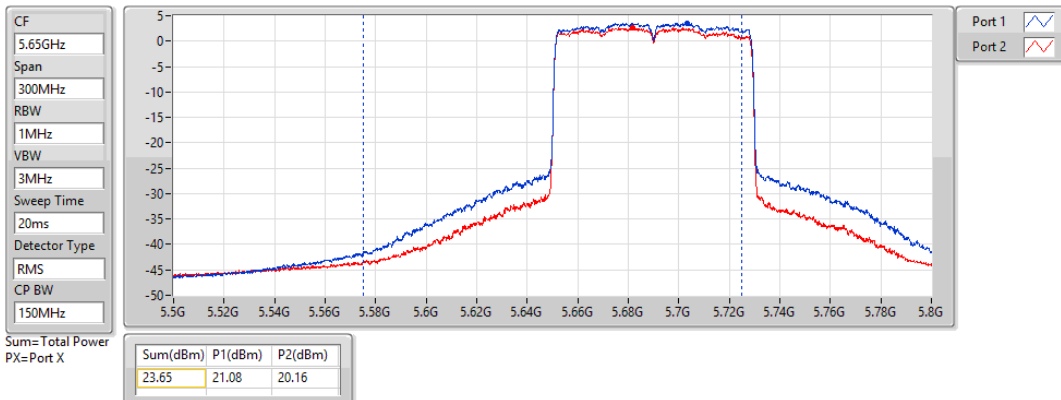


802.11ax HEW80_Nss2,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz

29/06/2021

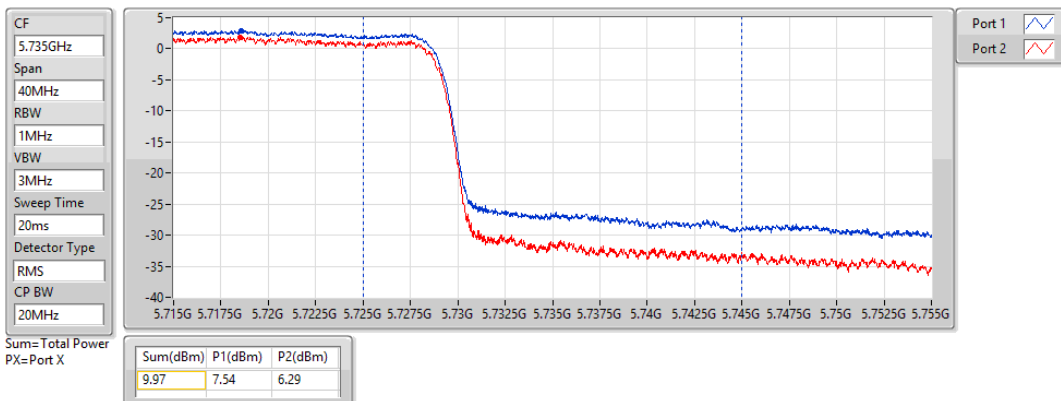



Average Power

Appendix B.4

For Scanning radio 3 / 2T1S Summary

Mode	Total Power (dBm)	Total Power (W)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.98	0.12531
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.42	0.13868
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	14.62	0.02897

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5260MHz	Pass	5.91	17.82	18.03	20.94	23.98	17
5300MHz	Pass	5.91	17.73	17.99	20.87	23.98	17.25
5320MHz	Pass	5.91	17.83	18.10	20.98	23.98	17.5
5500MHz	Pass	5.39	16.88	17.25	20.08	23.98	16
5580MHz	Pass	5.39	18.29	18.52	21.42	23.98	17.25
5700MHz	Pass	5.39	16.76	16.87	19.83	23.98	15
5720MHz Straddle 5.47-5.725GHz	Pass	5.39	17.46	17.91	20.70	22.92	16.75
5720MHz Straddle 5.725-5.85GHz	Pass	5.80	11.36	11.84	14.62	30.00	16.75

DG = Directional Gain; **Port X** = Port X output power

802.11a_Nss1,(6Mbps)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz

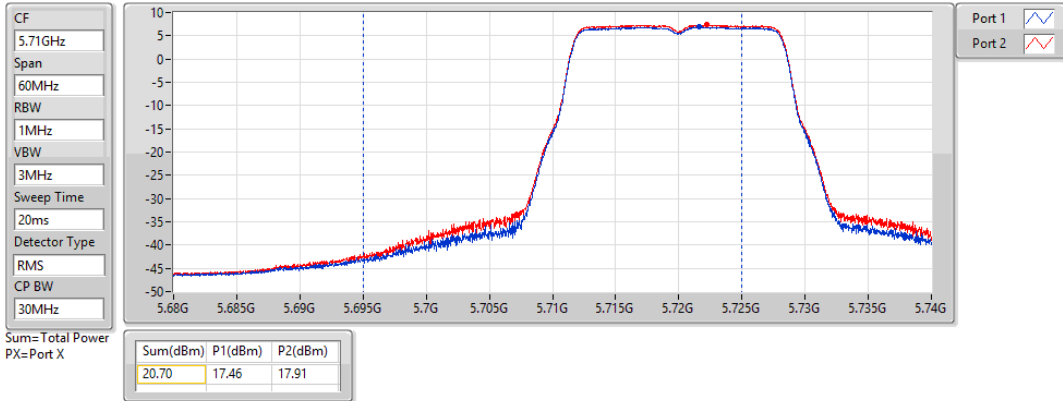

802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz

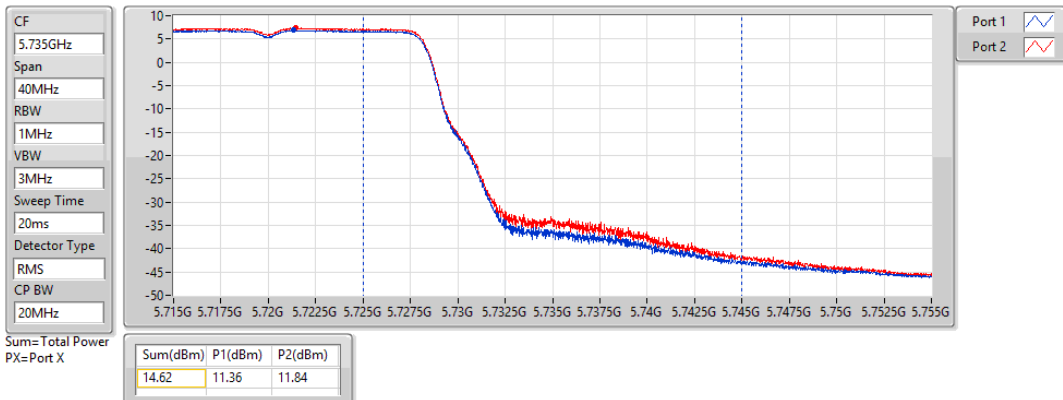

2T2S Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11ax HEW160_Nss2,(MCS0)_2TX	17.30	0.05370
5.25-5.35GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.49	0.22336
802.11ax HEW40_Nss2,(MCS0)_2TX	23.82	0.24099
802.11ax HEW80_Nss2,(MCS0)_2TX	19.97	0.09931
802.11ax HEW160_Nss2,(MCS0)_2TX	17.68	0.05861
5.47-5.725GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.77	0.23823
802.11ax HEW40_Nss2,(MCS0)_2TX	23.82	0.24099
802.11ax HEW80_Nss2,(MCS0)_2TX	23.96	0.24889
802.11ax HEW160_Nss2,(MCS0)_2TX	18.95	0.07852
5.725-5.85GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	18.15	0.06531
802.11ax HEW40_Nss2,(MCS0)_2TX	14.22	0.02642
802.11ax HEW80_Nss2,(MCS0)_2TX	10.72	0.01180

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5260MHz	Pass	5.53	20.37	20.58	23.49	23.98	19.75
5300MHz	Pass	5.53	20.23	20.48	23.37	23.98	20.00
5320MHz	Pass	5.53	19.18	19.48	22.34	23.98	18.75
5500MHz	Pass	5.25	19.41	19.52	22.48	23.98	18.50
5580MHz	Pass	5.25	20.57	20.94	23.77	23.98	20.00
5700MHz	Pass	5.25	17.02	17.52	20.29	23.98	15.50
5720MHz Straddle 5.47-5.725GHz	Pass	5.25	20.02	20.51	23.28	23.74	19.25
5720MHz Straddle 5.725-5.85GHz	Pass	5.71	14.90	15.37	18.15	30.00	19.25
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5270MHz	Pass	5.53	20.50	21.02	23.78	23.98	20.75
5310MHz	Pass	5.53	20.56	21.04	23.82	23.98	21.00
5510MHz	Pass	5.25	16.02	15.99	19.02	23.98	15.00
5550MHz	Pass	5.25	20.51	20.67	23.60	23.98	20.00
5670MHz	Pass	5.25	17.49	17.81	20.66	23.98	16.50
5710MHz Straddle 5.47-5.725GHz	Pass	5.25	20.62	20.99	23.82	23.98	19.50
5710MHz Straddle 5.725-5.85GHz	Pass	5.71	11.04	11.38	14.22	30.00	19.50
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5290MHz	Pass	5.53	16.76	17.15	19.97	23.98	16.50
5530MHz	Pass	5.25	17.85	17.76	20.82	23.98	17.25
5610MHz	Pass	5.25	20.36	20.77	23.58	23.98	20.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.25	20.74	21.15	23.96	23.98	19.25
5690MHz Straddle 5.725-5.85GHz	Pass	5.71	7.43	7.97	10.72	30.00	19.25
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.53	14.32	14.25	17.30	30.00	15.50
5250MHz Straddle 5.25-5.35GHz	Pass	5.53	14.58	14.75	17.68	23.98	15.50
5570MHz	Pass	5.25	15.66	16.21	18.95	23.98	15.00

DG = Directional Gain; **Port X** = Port X output power

802.11ax HEW20_Nss2,(MCS0)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz

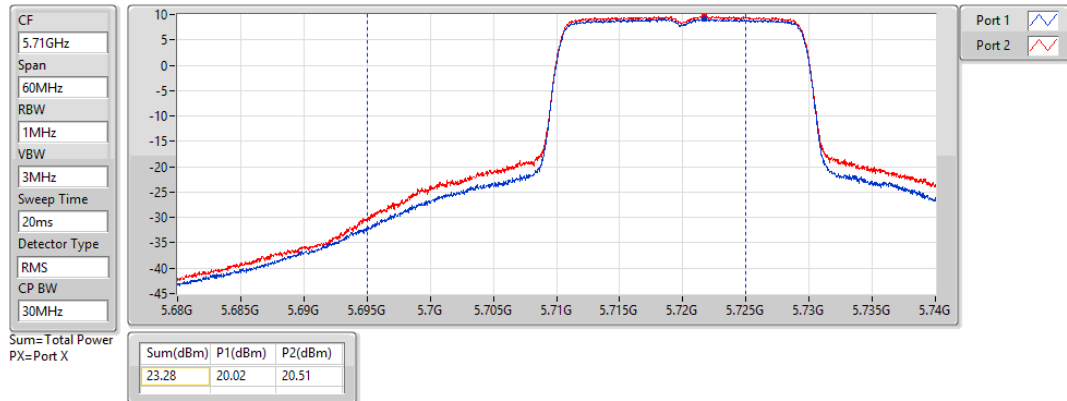

802.11ax HEW20_Nss2,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz

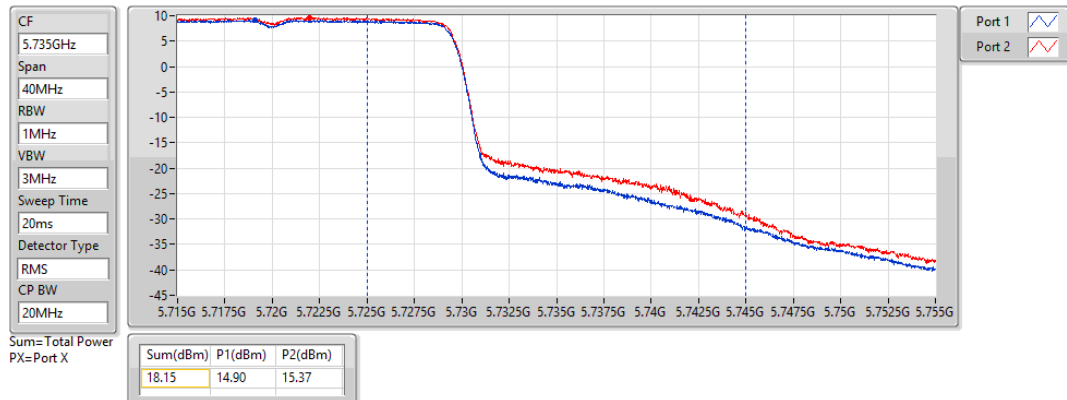

802.11ax HEW40_Nss2,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz

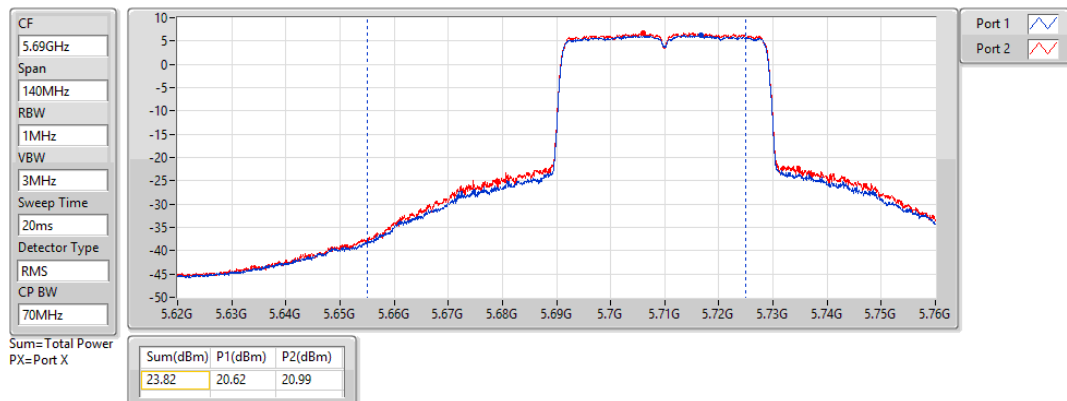

802.11ax HEW40_Nss2,(MCS0)_2TX


AV Power

5710MHz Straddle 5.725-5.85GHz

16/06/2021

CF
5.735GHz
Span
40MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

Sum=Total Power
PX=Port X

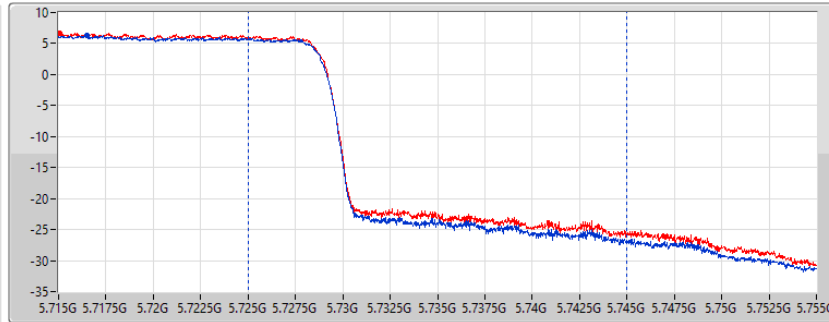

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
14.22	11.04	11.38

802.11ax HEW80_Nss2,(MCS0)_2TX


AV Power

5690MHz Straddle 5.47-5.725GHz

16/06/2021

CF
5.65GHz
Span
300MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
150MHz

Sum=Total Power
PX=Port X

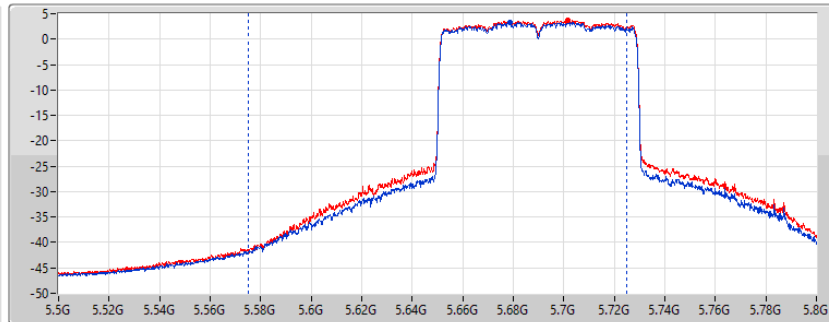

Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
23.96	20.74	21.15

802.11ax HEW80_Nss2,(MCS0)_2TX


AV Power

5690MHz Straddle 5.725-5.85GHz

16/06/2021

CF
5.735GHz
Span
40MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

Sum=Total Power
PX=Port X

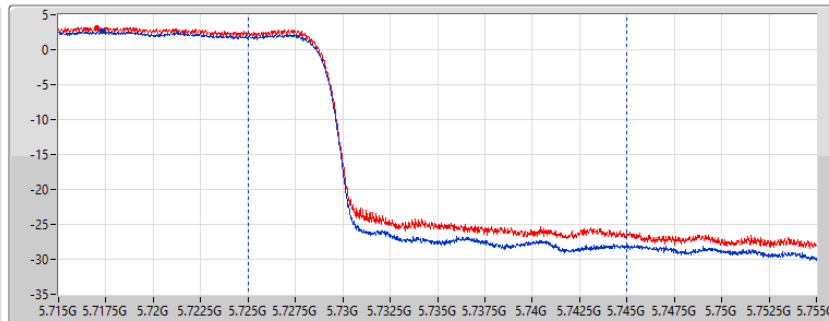


Port 1
Port 2

Sum(dBm)	P1(dBm)	P2(dBm)
10.72	7.43	7.97

802.11ax HEW160_Nss2,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz

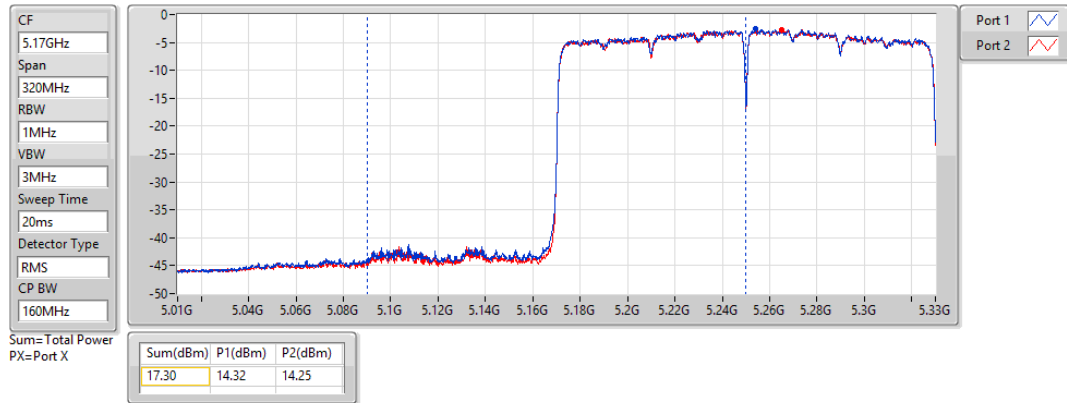

802.11ax HEW160_Nss2,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz

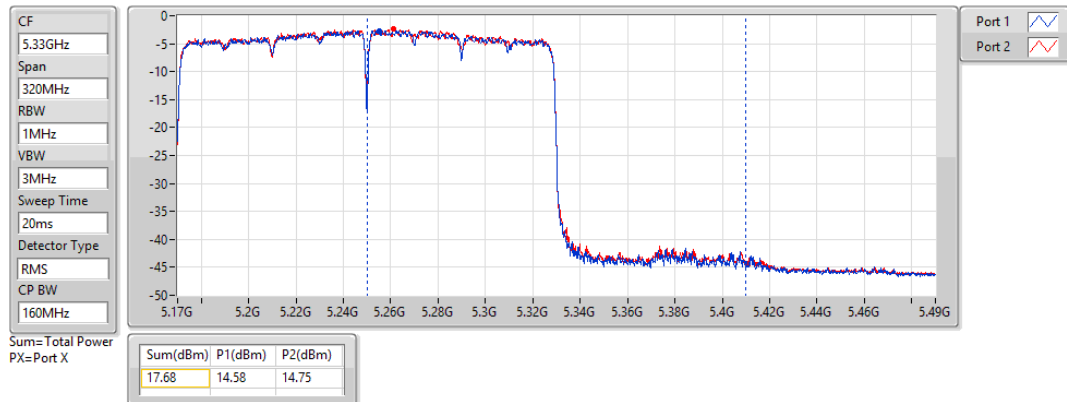

**For Radio 2 / 1T1S
Summary**

Mode	PD (dBm/RBW)
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.40
802.11ax HEW20_Nss1,(MCS0)_1TX	9.63
802.11ax HEW40_Nss1,(MCS0)_1TX	7.74
802.11ax HEW80_Nss1,(MCS0)_1TX	1.52
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.61
802.11ax HEW20_Nss1,(MCS0)_1TX	9.74
802.11ax HEW40_Nss1,(MCS0)_1TX	7.80
802.11ax HEW80_Nss1,(MCS0)_1TX	4.78
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	8.17
802.11ax HEW20_Nss1,(MCS0)_1TX	7.24
802.11ax HEW40_Nss1,(MCS0)_1TX	5.45
802.11ax HEW80_Nss1,(MCS0)_1TX	1.67

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5260MHz	Pass	5.14	10.21	10.21	11.00
5300MHz	Pass	5.14	10.40	10.40	11.00
5320MHz	Pass	5.14	10.04	10.04	11.00
5500MHz	Pass	4.23	8.47	8.47	11.00
5580MHz	Pass	4.23	10.61	10.61	11.00
5700MHz	Pass	4.23	7.55	7.55	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.23	10.03	10.03	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.43	8.17	8.17	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5260MHz	Pass	5.14	9.63	9.63	11.00
5300MHz	Pass	5.14	9.38	9.38	11.00
5320MHz	Pass	5.14	8.98	8.98	11.00
5500MHz	Pass	4.23	6.86	6.86	11.00
5580MHz	Pass	4.23	9.74	9.74	11.00
5700MHz	Pass	4.23	5.85	5.85	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.23	9.02	9.02	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.43	7.24	7.24	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5270MHz	Pass	5.14	7.74	7.74	11.00
5310MHz	Pass	5.14	4.22	4.22	11.00
5510MHz	Pass	4.23	3.06	3.06	11.00
5550MHz	Pass	4.23	7.49	7.49	11.00
5670MHz	Pass	4.23	6.40	6.40	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.23	7.80	7.80	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.43	5.45	5.45	30.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5290MHz	Pass	5.14	1.52	1.52	11.00
5530MHz	Pass	4.23	0.37	0.37	11.00
5610MHz	Pass	4.23	4.78	4.78	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.23	4.69	4.69	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.43	1.67	1.67	30.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11a_Nss1,(6Mbps)_1TX

PSD

5260MHz

15/06/2021

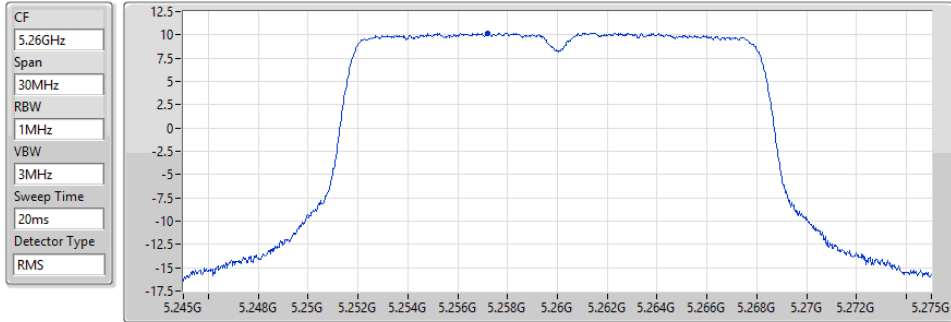


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.21	10.21	10.21

802.11a_Nss1,(6Mbps)_1TX

PSD

5300MHz

15/06/2021

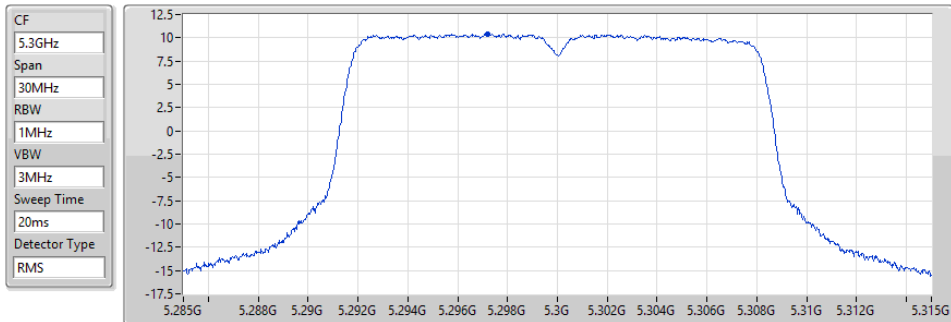


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.40	10.40	10.40

802.11a_Nss1,(6Mbps)_1TX

PSD

5320MHz

15/06/2021

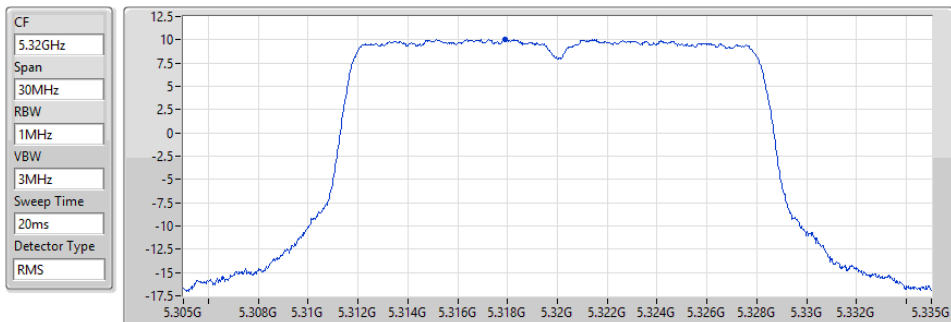


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.04	10.04	10.04

802.11a_Nss1,(6Mbps)_1TX

PSD

5500MHz

15/06/2021

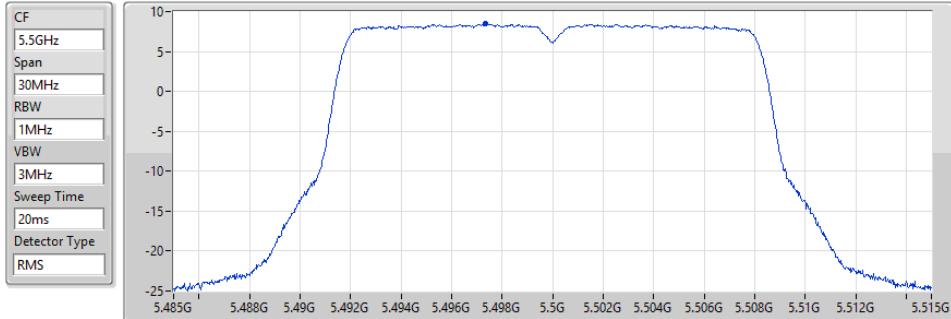


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.47	8.47	8.47

802.11a_Nss1,(6Mbps)_1TX

PSD

5580MHz

15/06/2021

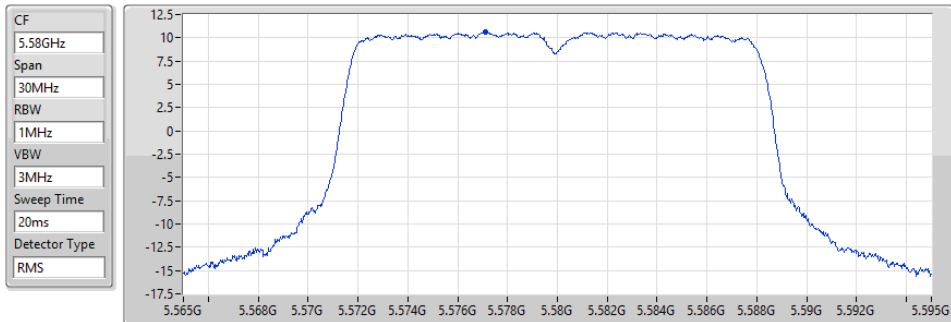


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.61	10.61	10.61

802.11a_Nss1,(6Mbps)_1TX

PSD

5700MHz

15/06/2021

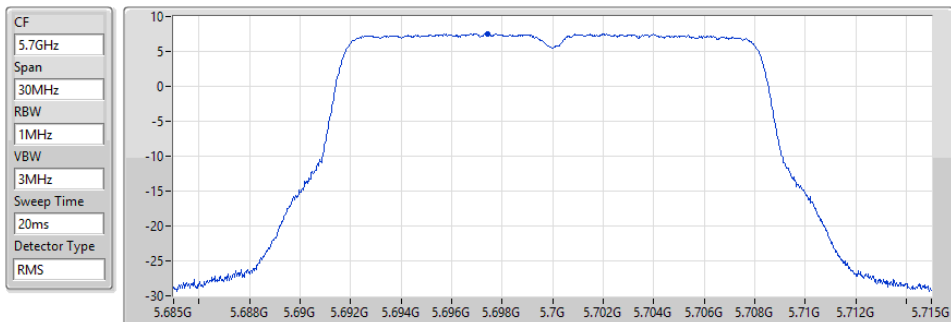


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.55	7.55	7.55

802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

16/06/2021

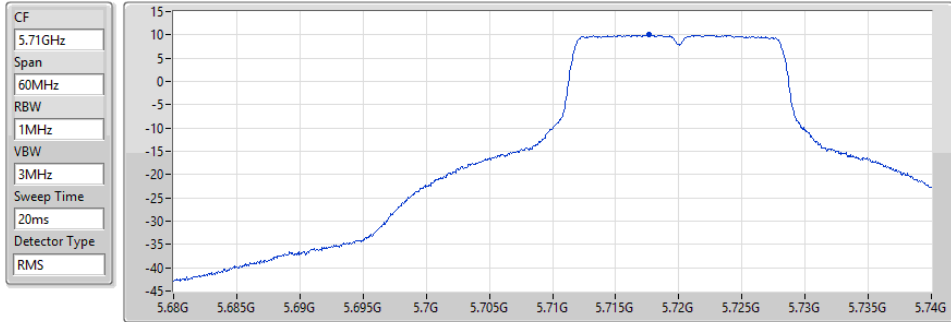


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.03	10.03	10.03

802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

16/06/2021

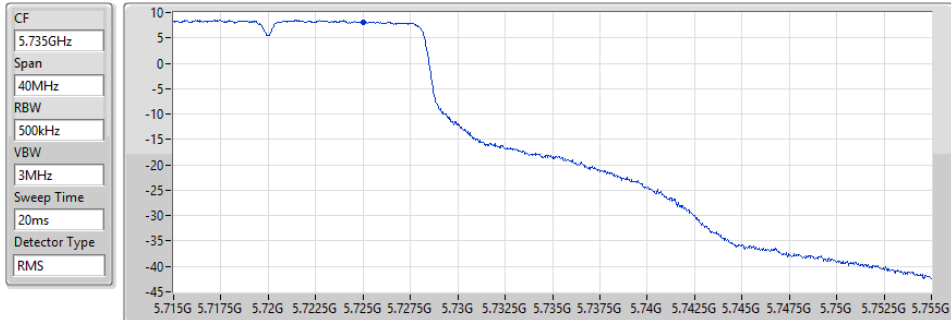


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
8.17	8.17	8.17

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5260MHz

15/06/2021

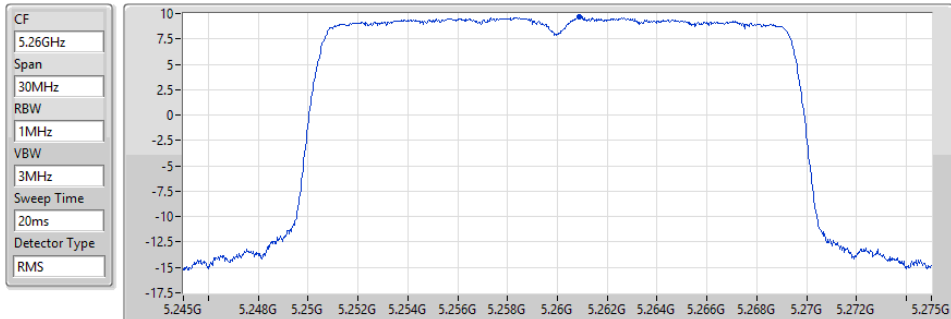


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.63	9.63	9.63

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5300MHz

15/06/2021

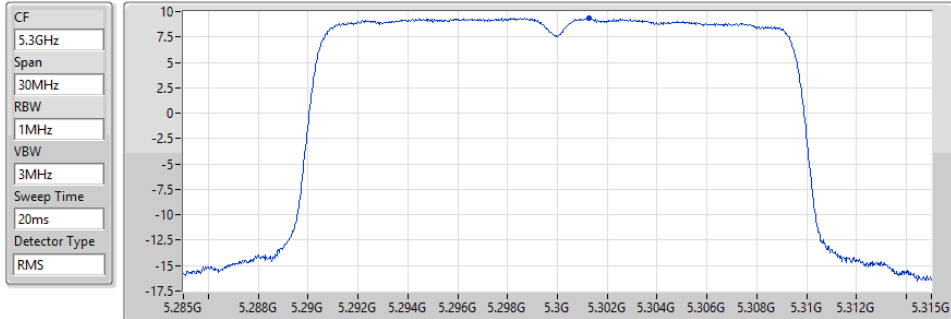


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.38	9.38	9.38

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5320MHz

15/06/2021

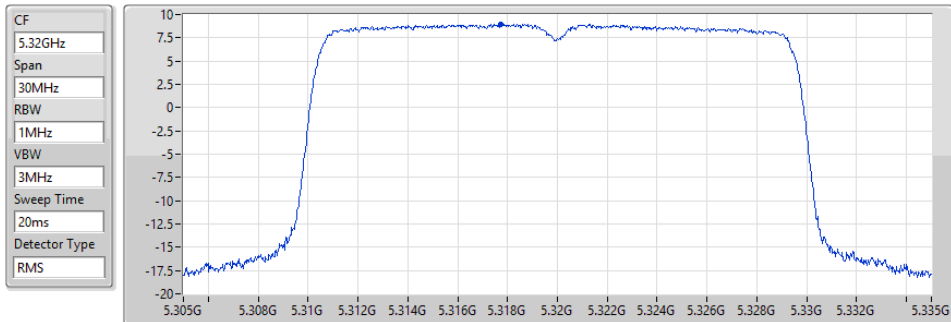


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.98	8.98	8.98

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5500MHz

15/06/2021

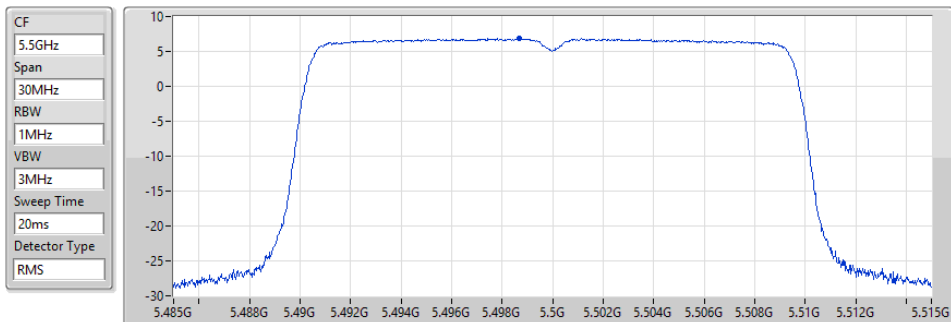


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.86	6.86	6.86

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5580MHz

15/06/2021

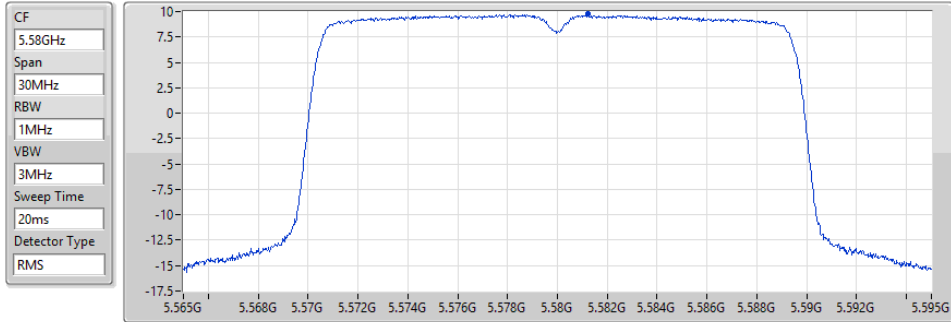


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.74	9.74	9.74

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5700MHz

15/06/2021

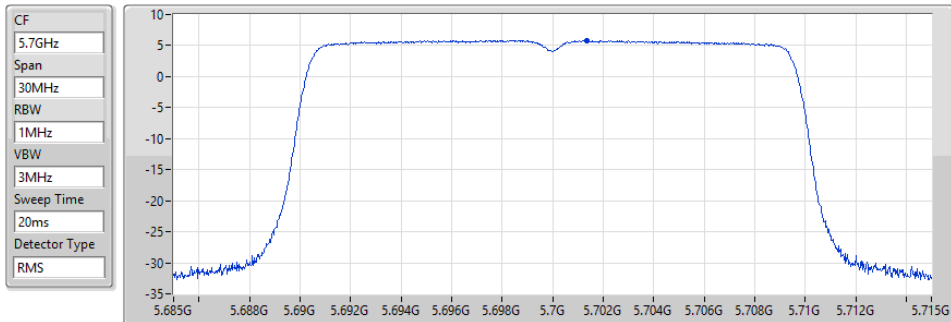


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.85	5.85	5.85

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

15/06/2021

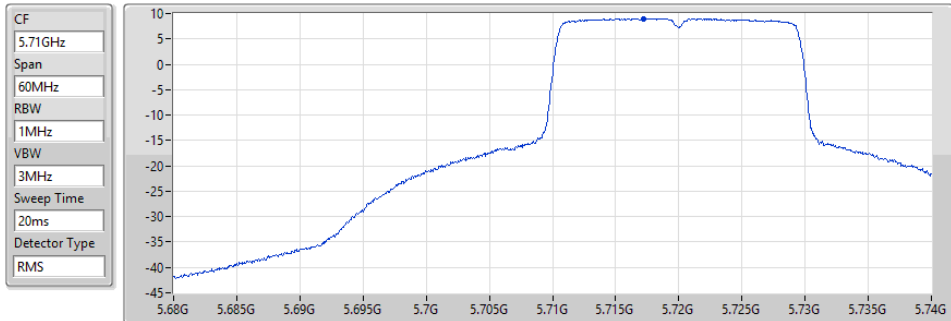


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.02	9.02	9.02

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

15/06/2021

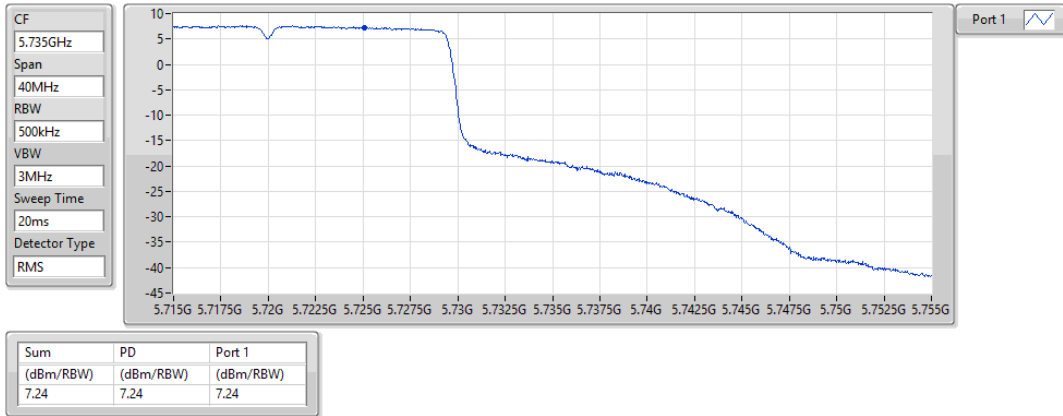


802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5270MHz

15/06/2021

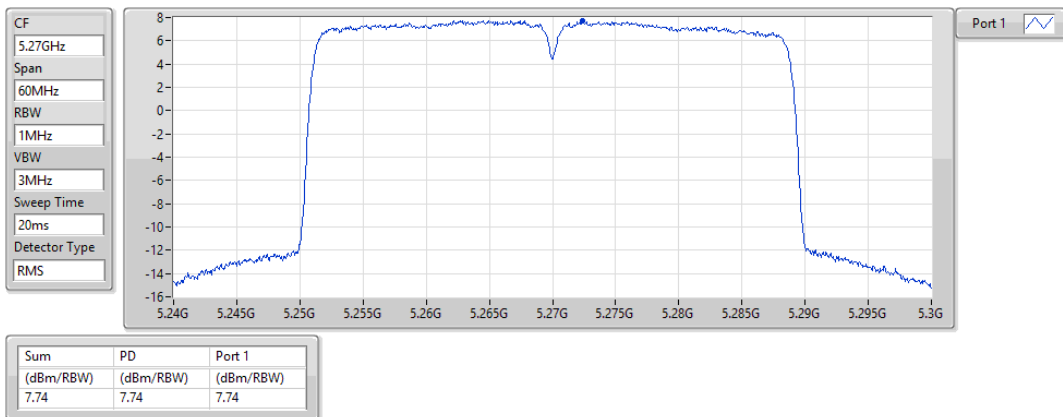


802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5310MHz

15/06/2021

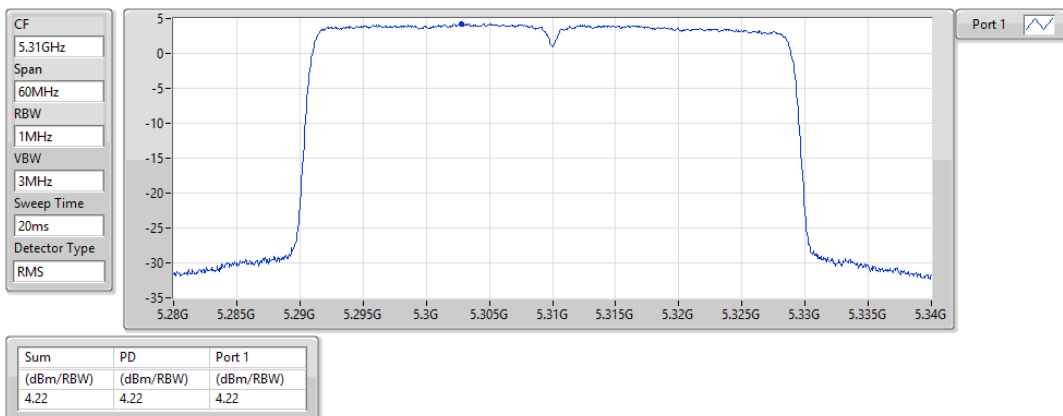


802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5510MHz

15/06/2021

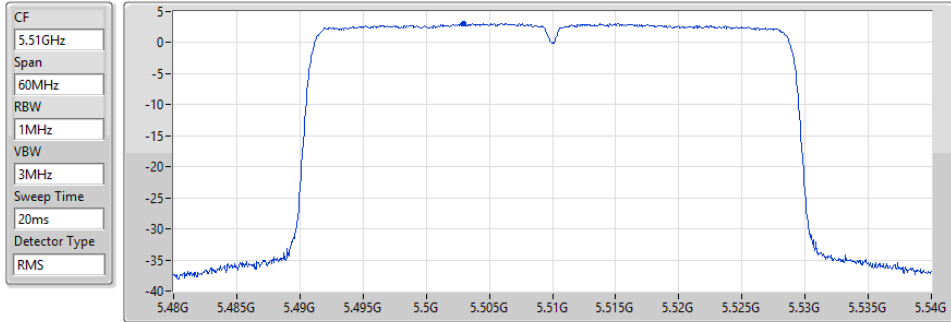


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.06	3.06	3.06

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5550MHz

15/06/2021

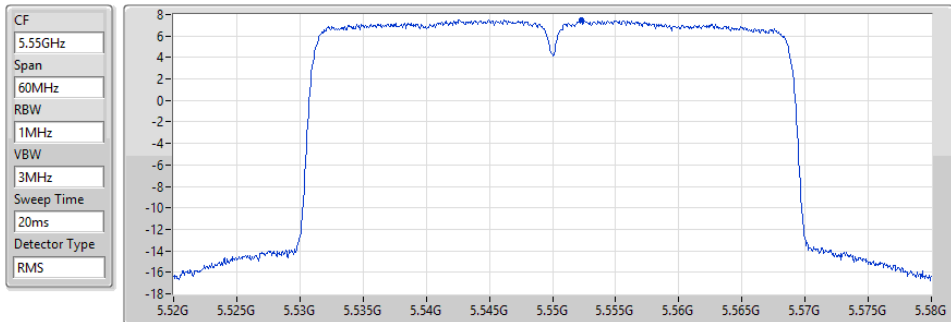


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.49	7.49	7.49

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5670MHz

15/06/2021

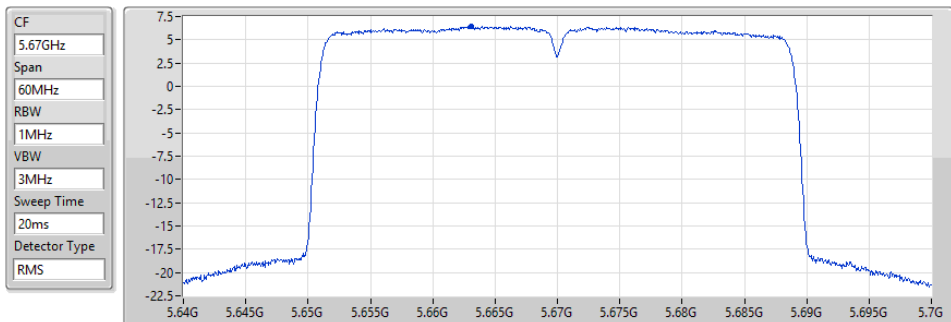


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.40	6.40	6.40

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.47-5.725GHz

15/06/2021

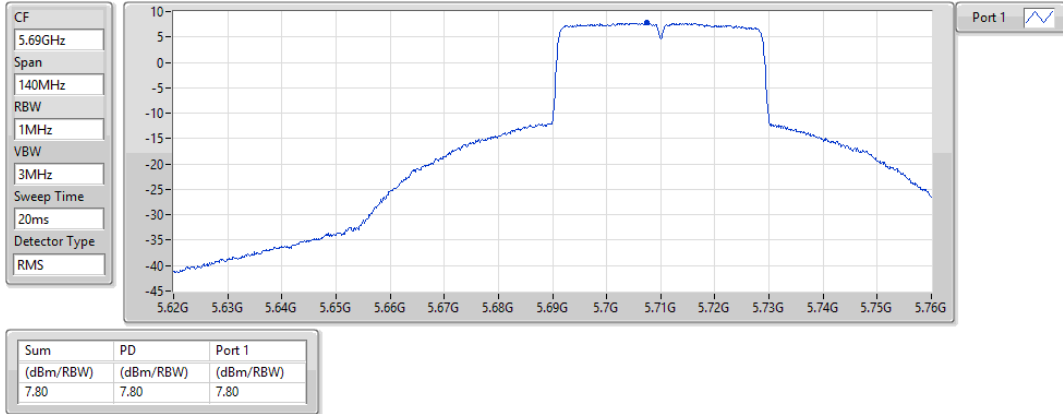


802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.725-5.85GHz

15/06/2021

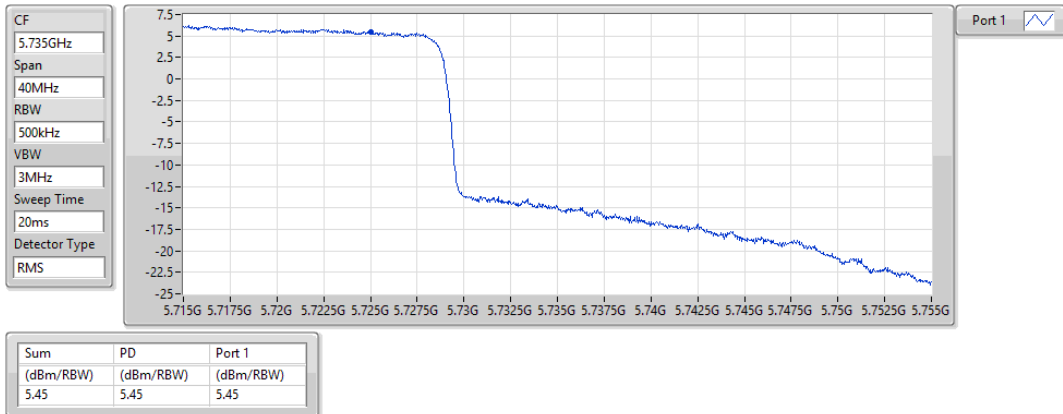


802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5290MHz

15/06/2021

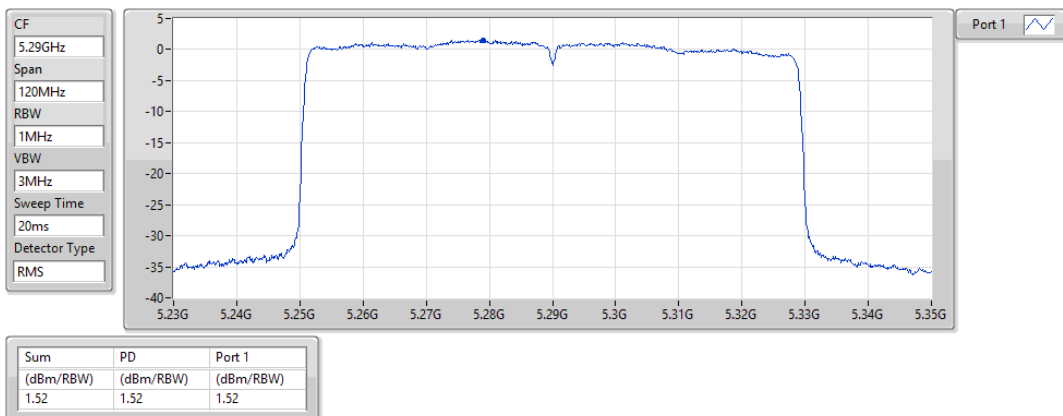


802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5530MHz

15/06/2021

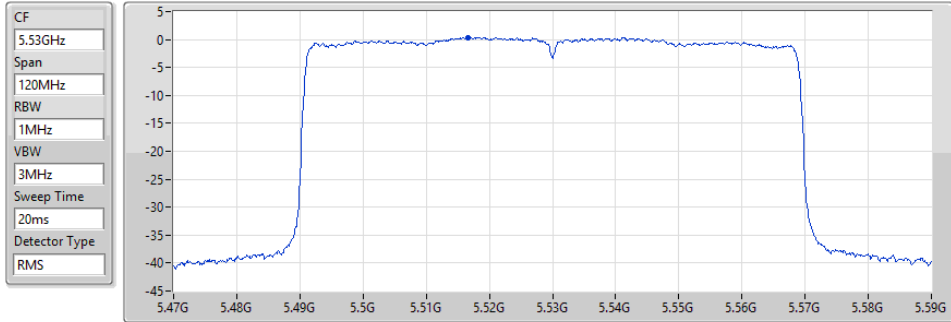


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.37	0.37	0.37

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5610MHz

15/06/2021

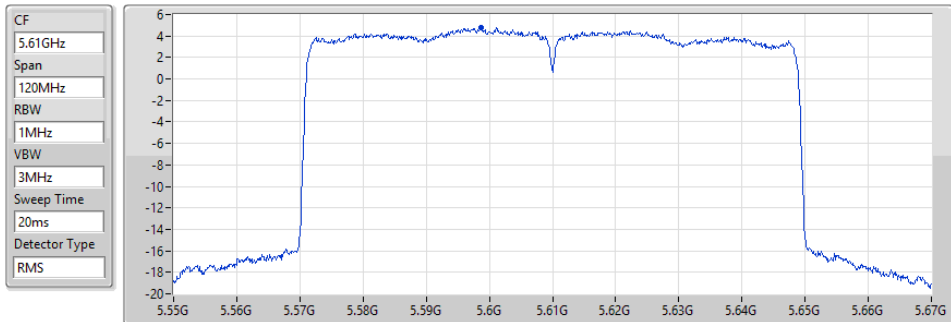


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.78	4.78	4.78

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

15/06/2021

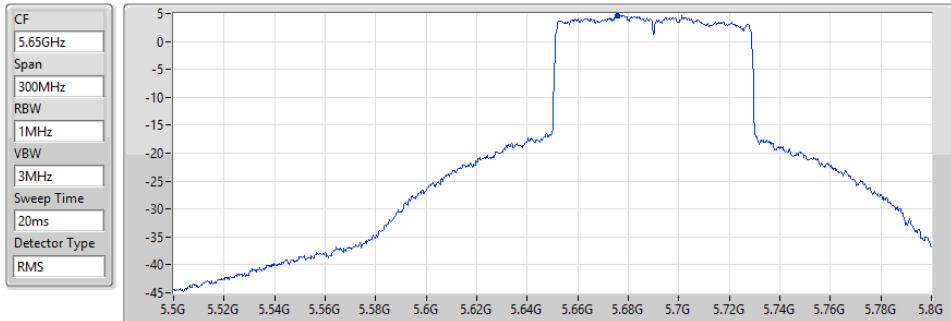


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.69	4.69	4.69

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.725-5.85GHz

15/06/2021

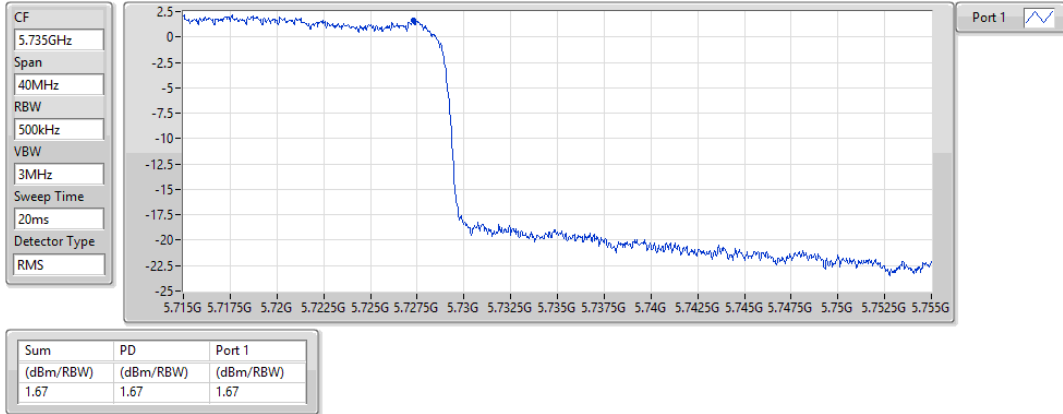

**For 2T1S
Summary**

Mode	PD (dBm/RBW)
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.93
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.94
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.10

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1_(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	3.36	8.02	7.81	10.86	11.00
5300MHz	Pass	3.36	8.19	7.67	10.86	11.00
5320MHz	Pass	3.36	8.15	7.81	10.93	11.00
5500MHz	Pass	3.85	7.84	7.29	10.52	11.00
5580MHz	Pass	3.85	8.34	7.75	10.94	11.00
5700MHz	Pass	3.85	6.79	5.91	9.32	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	3.85	8.31	7.33	10.82	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	2.96	6.60	5.52	9.10	30.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

15/06/2021

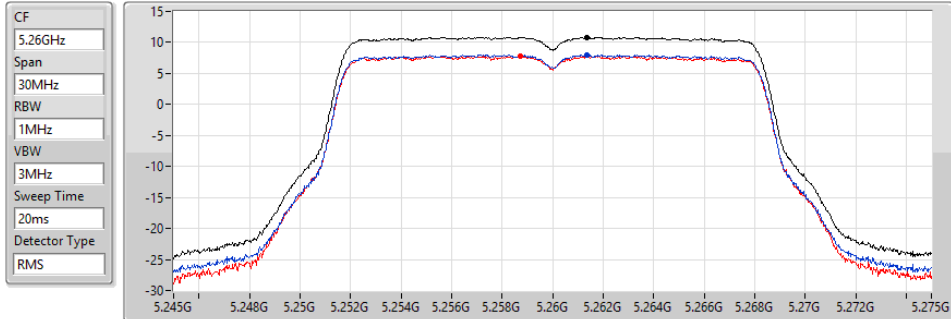


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.86	10.86	8.02	7.81

802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

15/06/2021

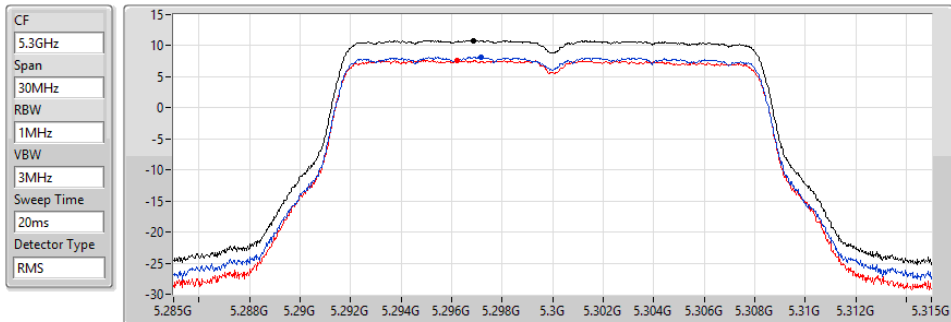


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.86	10.86	8.19	7.67

802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

15/06/2021

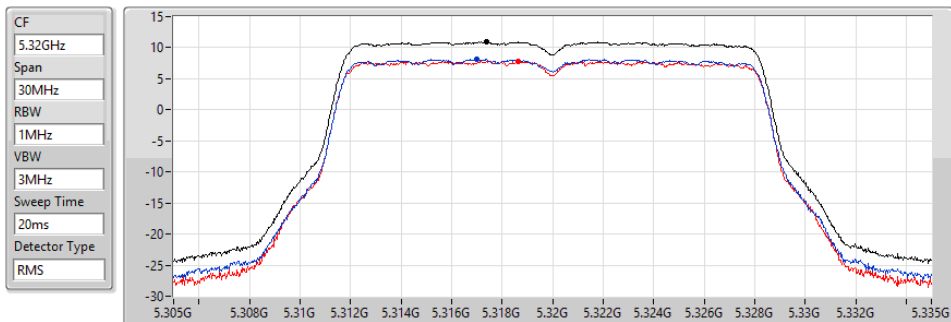


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	8.15	7.81

802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

15/06/2021

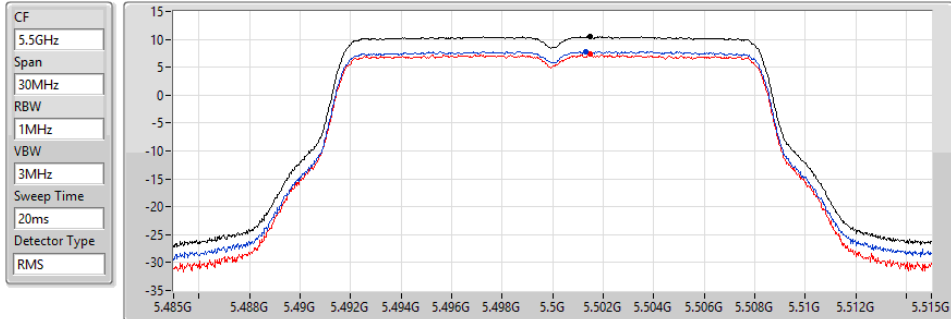


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.52	10.52	7.84	7.29

802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

15/06/2021

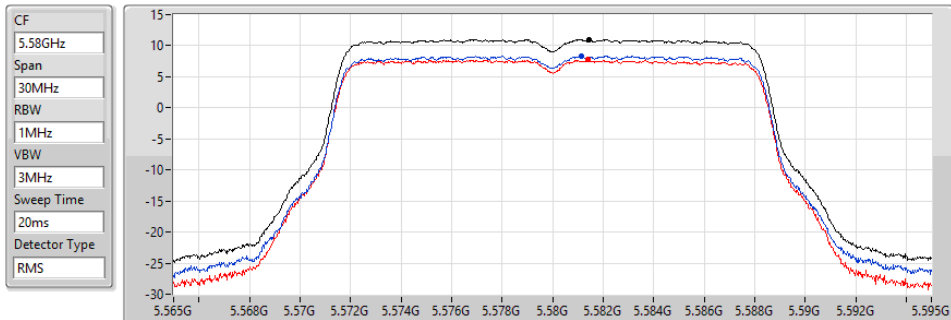


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.94	10.94	8.34	7.75

802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

15/06/2021

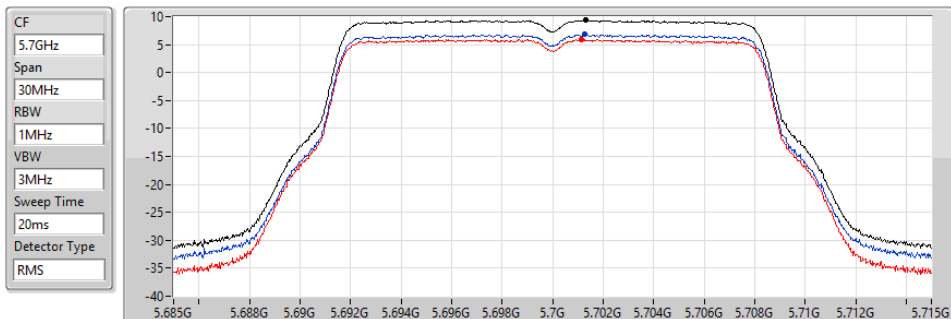


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.32	9.32	6.79	5.91

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz

PSD

15/06/2021

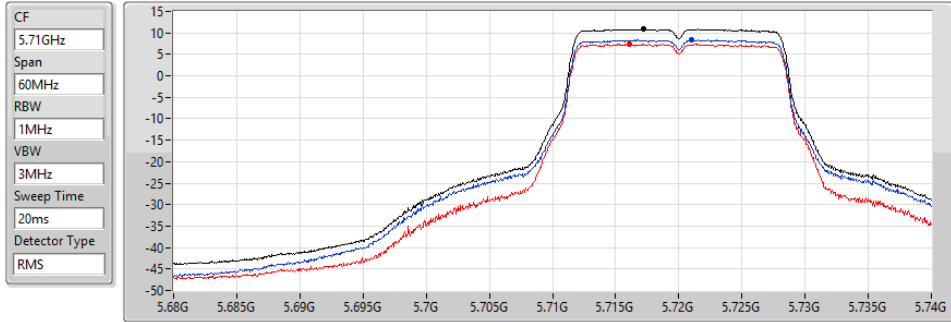


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.82	10.82	8.31	7.33

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.725-5.85GHz

PSD

15/06/2021

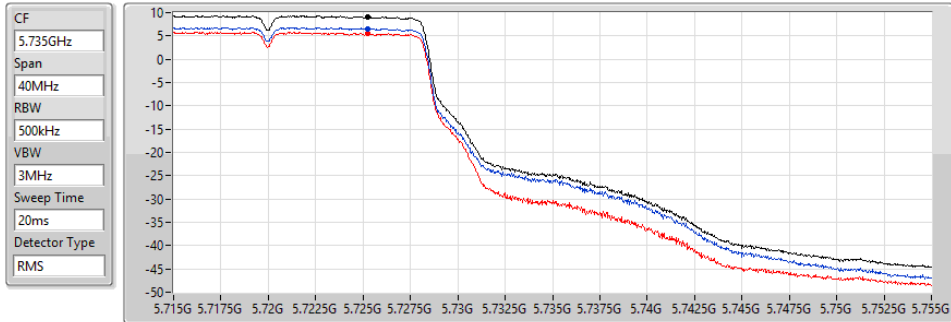

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.10	9.10	6.60	5.52

**For 2T2S
Summary**

Mode	PD (dBm/RBW)
5.25-5.35GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	10.93
802.11ax HEW40_Nss2,(MCS0)_2TX	9.01
802.11ax HEW80_Nss2,(MCS0)_2TX	2.21
5.47-5.725GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	10.86
802.11ax HEW40_Nss2,(MCS0)_2TX	8.42
802.11ax HEW80_Nss2,(MCS0)_2TX	5.52
5.725-5.85GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	9.04
802.11ax HEW40_Nss2,(MCS0)_2TX	5.84
802.11ax HEW80_Nss2,(MCS0)_2TX	2.37

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	1.37	8.18	7.76	10.93	11.00
5300MHz	Pass	1.37	8.11	7.85	10.90	11.00
5320MHz	Pass	1.37	7.89	7.55	10.68	11.00
5500MHz	Pass	1.42	7.49	6.86	10.13	11.00
5580MHz	Pass	1.42	8.03	7.59	10.79	11.00
5700MHz	Pass	1.42	6.49	5.78	9.14	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	1.42	8.32	7.35	10.86	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	1.05	6.45	5.66	9.04	30.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	1.37	6.24	5.82	9.01	11.00
5310MHz	Pass	1.37	2.38	2.39	5.35	11.00
5510MHz	Pass	1.42	0.72	0.86	3.74	11.00
5550MHz	Pass	1.42	5.67	5.36	8.42	11.00
5670MHz	Pass	1.42	5.29	4.33	7.73	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	1.42	5.50	4.55	7.97	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	1.05	3.43	2.20	5.84	30.00
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	1.37	-0.37	-1.00	2.21	11.00
5530MHz	Pass	1.42	-1.44	-1.76	1.32	11.00
5610MHz	Pass	1.42	3.16	1.97	5.52	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	1.42	2.53	1.40	4.92	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	1.05	0.05	-1.17	2.37	30.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5260MHz

15/06/2021

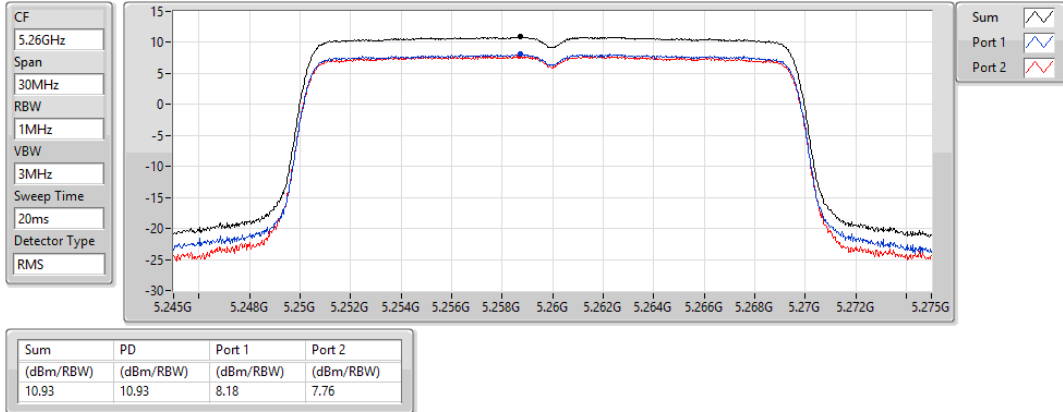


802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5300MHz

15/06/2021

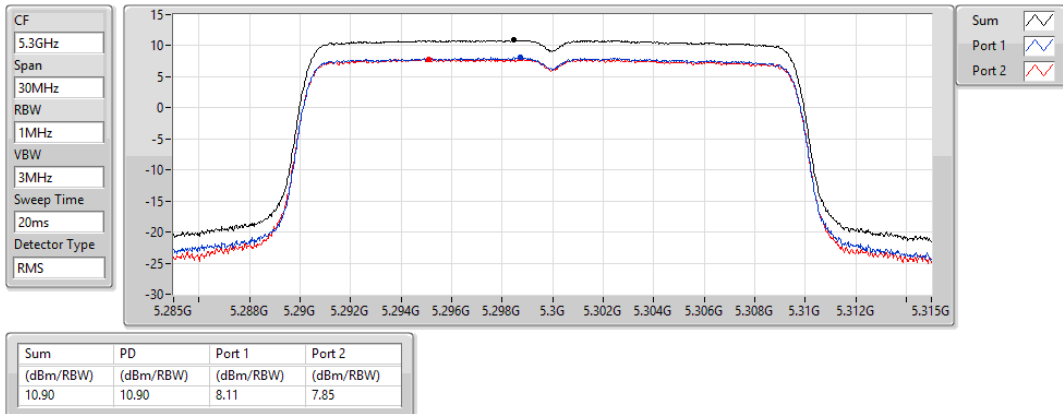


802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5320MHz

15/06/2021

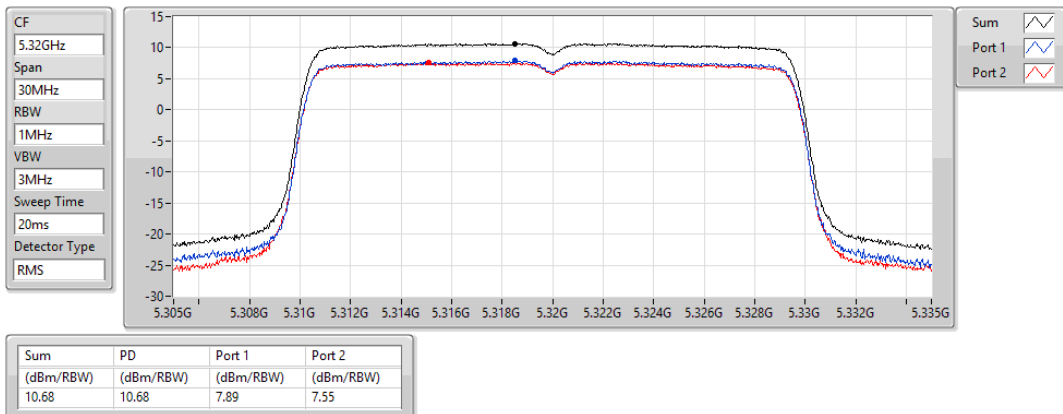


802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5500MHz

15/06/2021

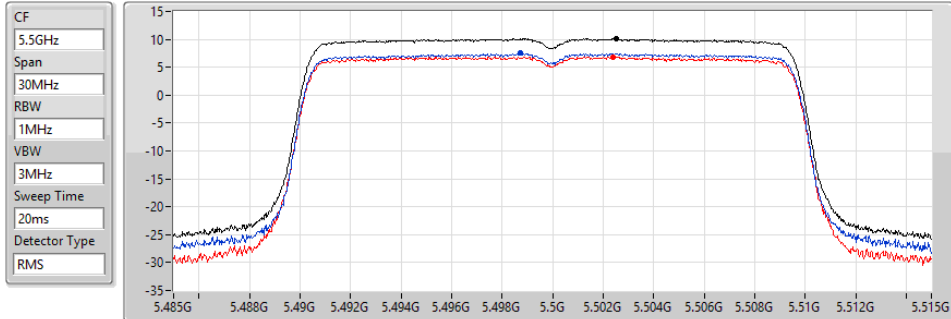


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.13	10.13	7.49	6.86

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5580MHz

15/06/2021

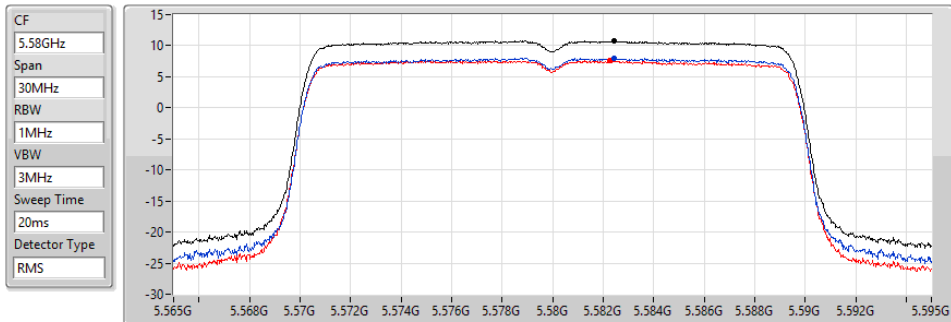


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.79	10.79	8.03	7.59

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5700MHz

15/06/2021

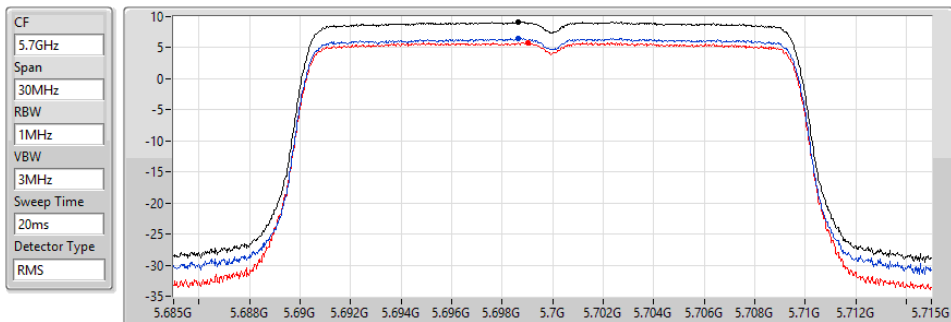


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.14	9.14	6.49	5.78

802.11ax HEW20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz

PSD

15/06/2021

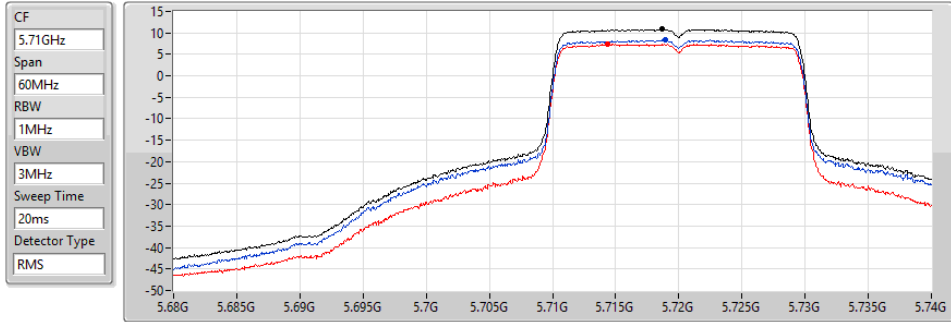


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.86	10.86	8.32	7.35

802.11ax HEW20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.725-5.85GHz

PSD

15/06/2021

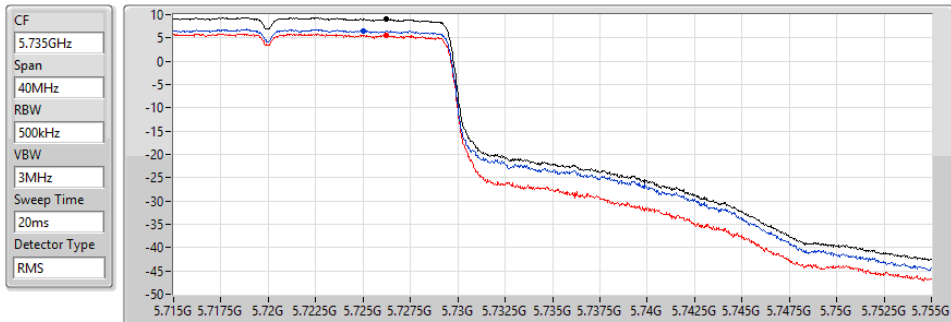


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.04	9.04	6.45	5.66

802.11ax HEW40_Nss2,(MCS0)_2TX

5270MHz

PSD

15/06/2021

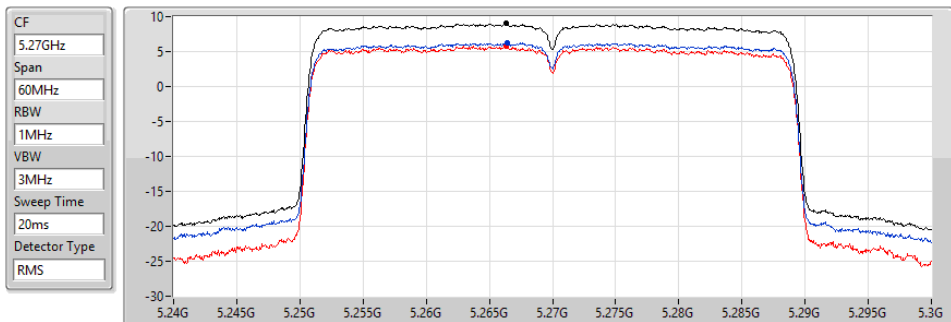


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.01	9.01	6.24	5.82

802.11ax HEW40_Nss2,(MCS0)_2TX


PSD

5310MHz

15/06/2021

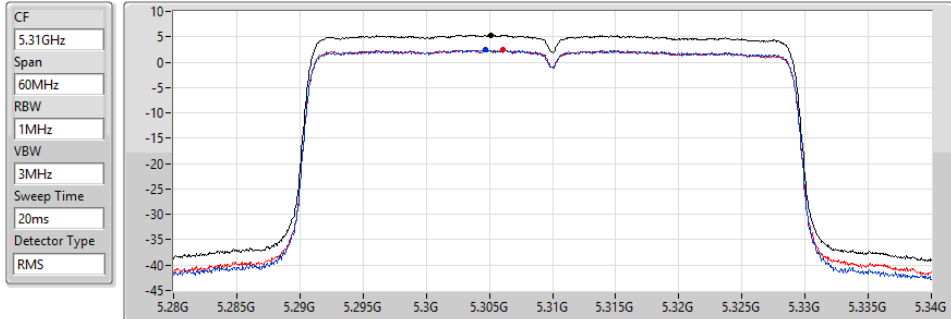

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.35	5.35	2.38	2.39




802.11ax HEW40_Nss2,(MCS0)_2TX


PSD

5510MHz

15/06/2021

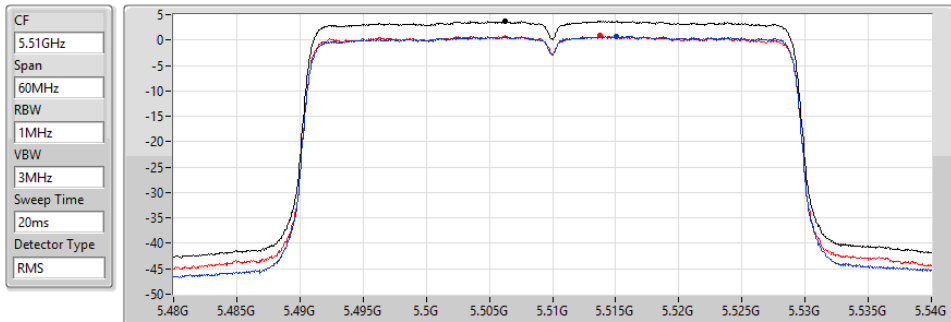

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.74	3.74	0.72	0.86




802.11ax HEW40_Nss2,(MCS0)_2TX


PSD

5550MHz

15/06/2021

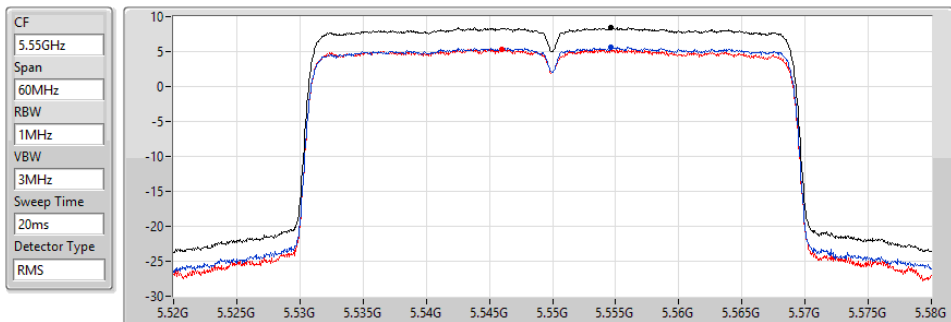

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.42	8.42	5.67	5.36




802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5670MHz

15/06/2021

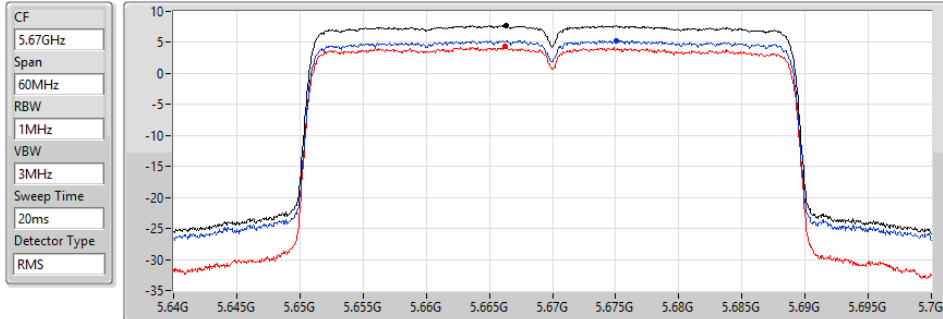


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.73	7.73	5.29	4.33

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

15/06/2021

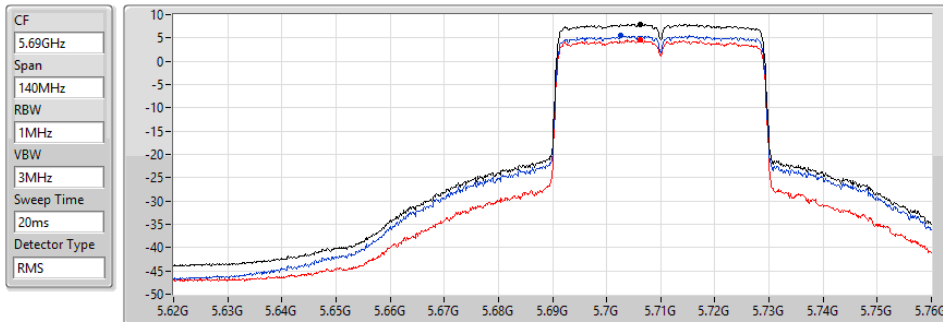


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.97	7.97	5.50	4.55

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

15/06/2021

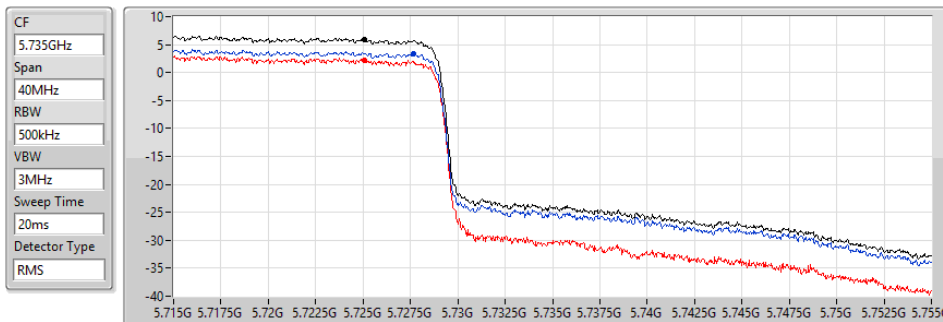


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.84	5.84	3.43	2.20

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5290MHz

15/06/2021

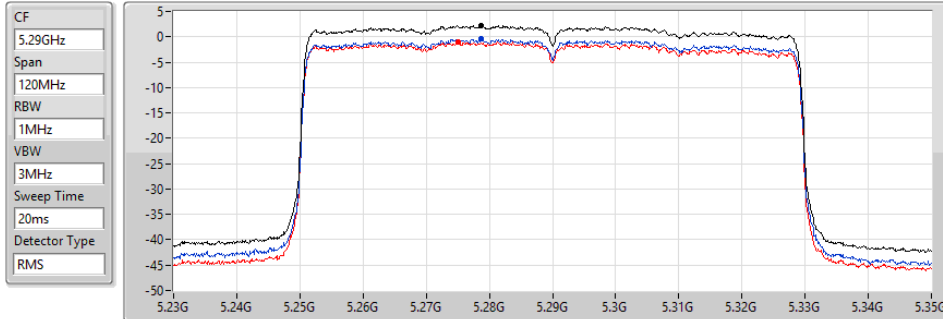


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.21	2.21	-0.37	-1.00

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5530MHz

15/06/2021

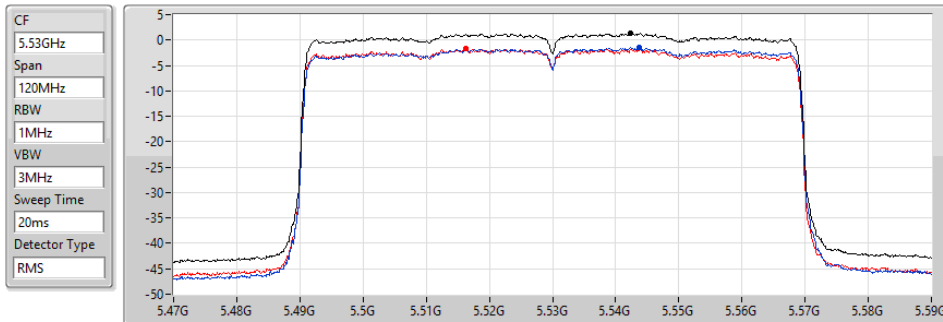


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.32	1.32	-1.44	-1.76

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5610MHz

15/06/2021

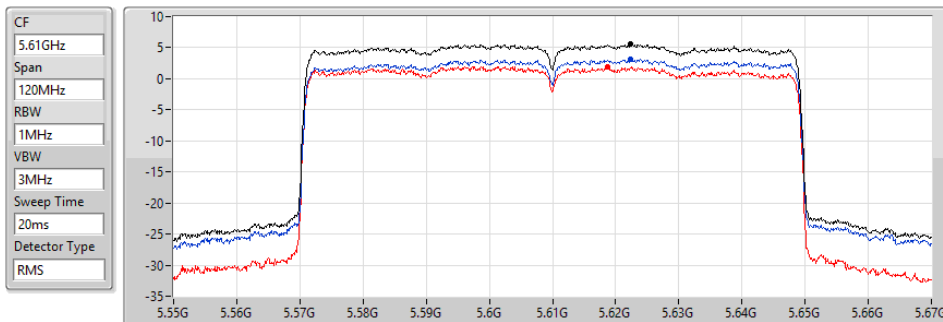


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.52	5.52	3.16	1.97

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

15/06/2021

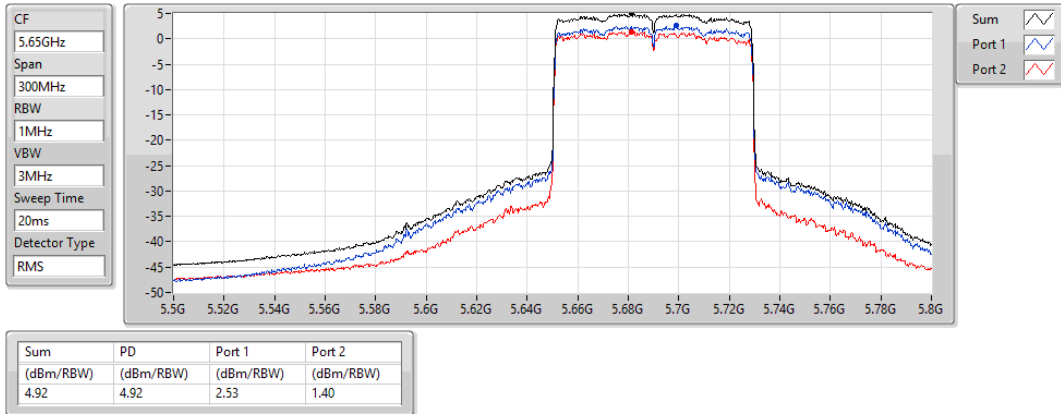


802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

15/06/2021

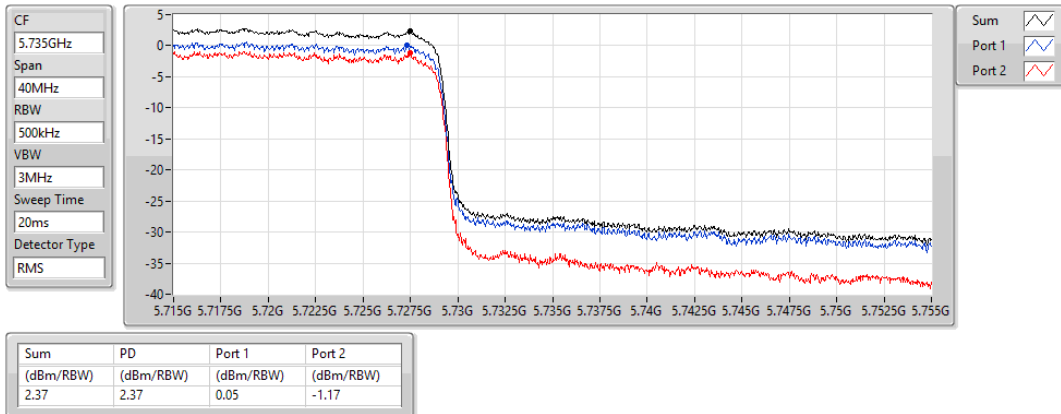

**For Scanning radio 3 / 2T1S
Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.46	16.99
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.67	16.93
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	6.91	15.63

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	8.53	5.37	5.60	8.46	8.47	16.99	17.00
5300MHz	Pass	8.53	5.33	5.56	8.43	8.47	16.96	17.00
5320MHz	Pass	8.53	5.29	5.56	8.40	8.47	16.93	17.00
5500MHz	Pass	8.26	4.18	4.47	7.30	8.74	15.56	17.00
5580MHz	Pass	8.26	5.54	5.78	8.67	8.74	16.93	17.00
5700MHz	Pass	8.26	4.11	4.16	7.11	8.74	15.37	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	8.26	5.44	5.81	8.62	8.74	16.88	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	8.72	3.67	4.25	6.91	27.28	15.63	36.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;


802.11a_Nss1,(6Mbps)_2TX

5260MHz

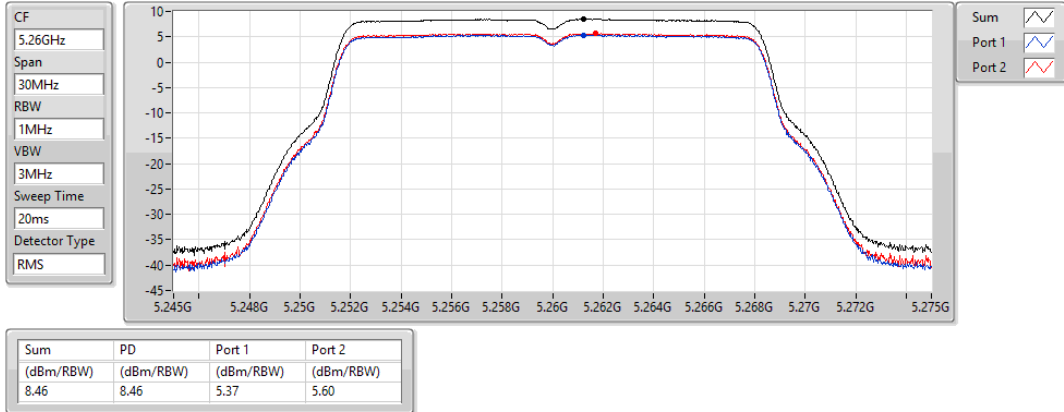


802.11a_Nss1,(6Mbps)_2TX

5300MHz

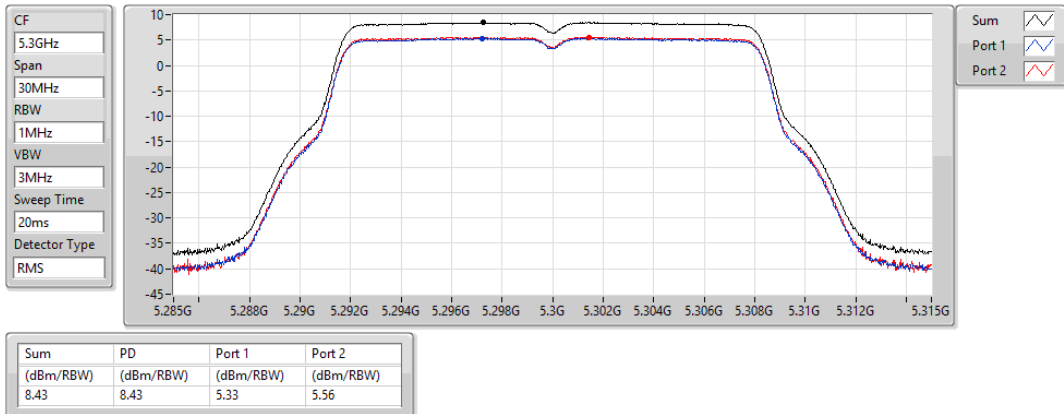

802.11a_Nss1,(6Mbps)_2TX

5320MHz

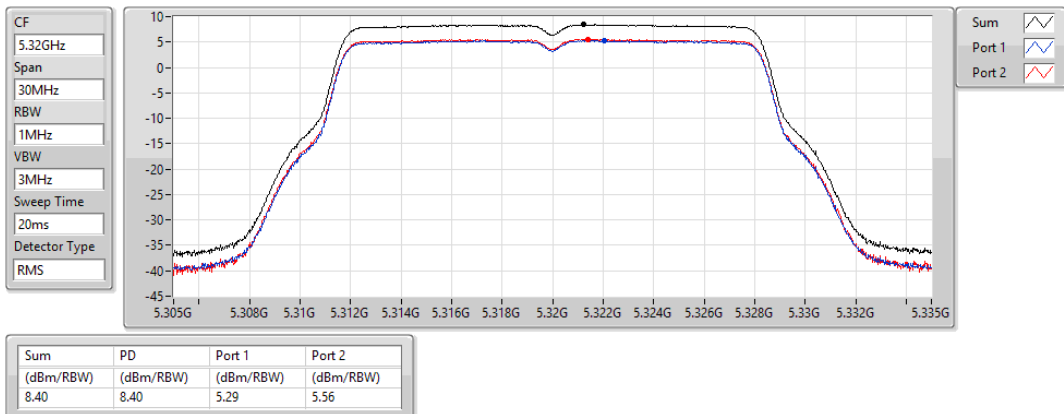


802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

16/06/2021

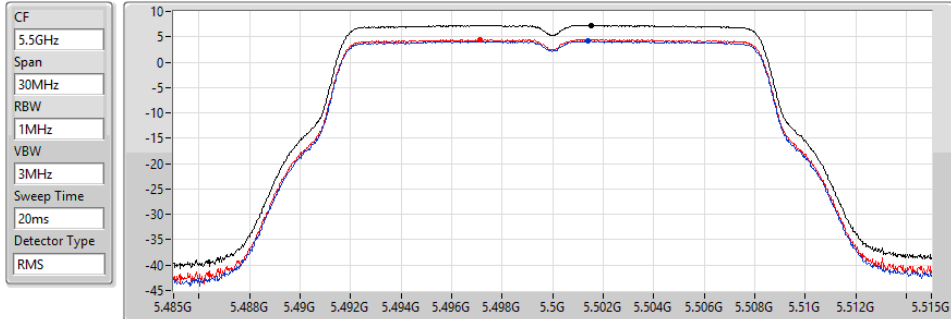


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.30	7.30	4.18	4.47

802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

16/06/2021

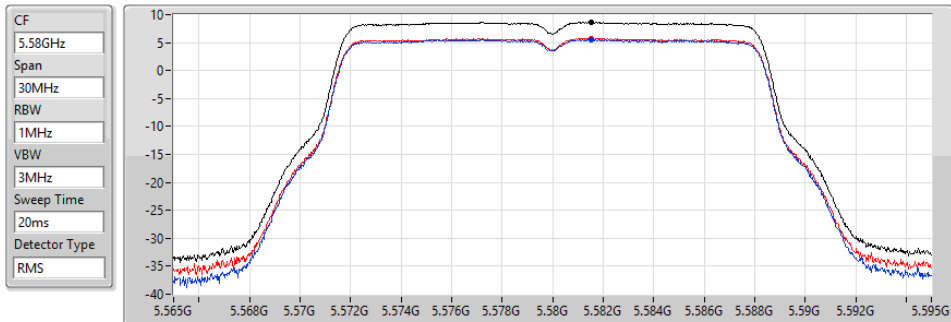


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.67	8.67	5.54	5.78

802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

16/06/2021

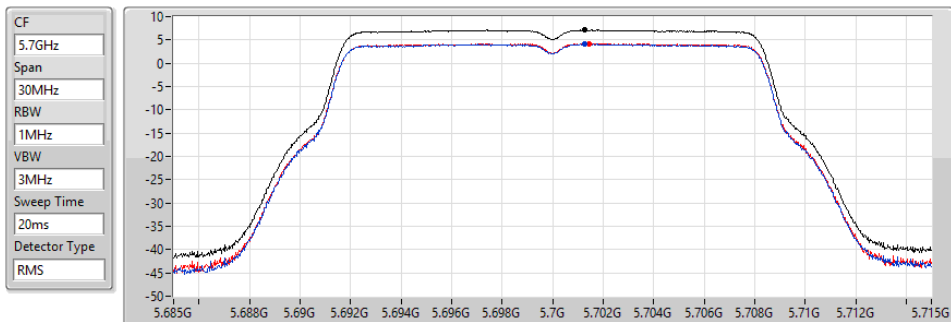


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.11	7.11	4.11	4.16

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz

PSD

16/06/2021

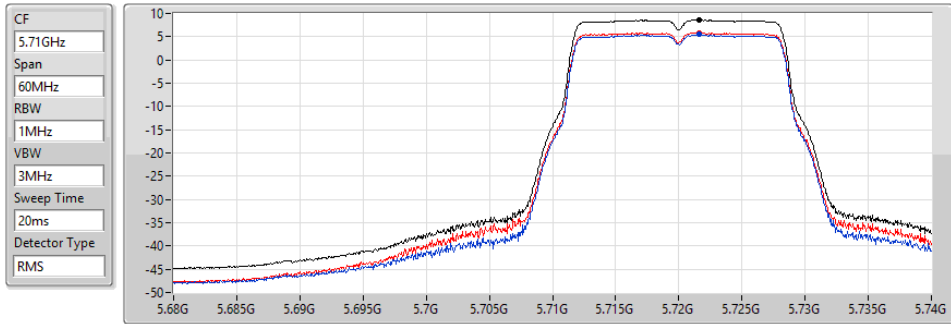


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.62	8.62	5.44	5.81

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.725-5.85GHz

PSD

16/06/2021

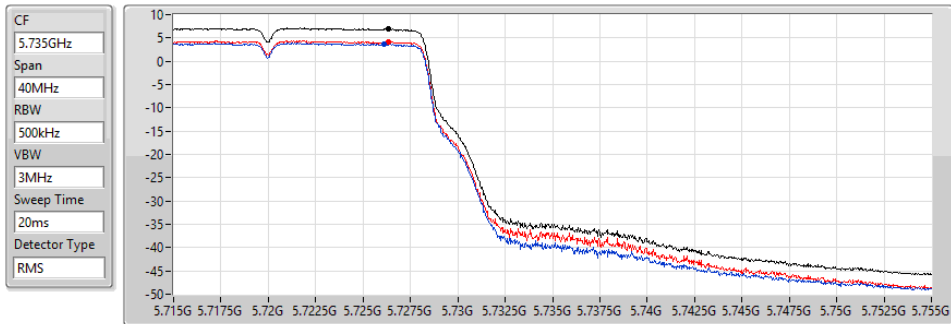

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.91	6.91	3.67	4.25

**For 2T2S
Summary**

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW160_Nss2,(MCS0)_2TX	-1.48
5.25-5.35GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	10.92
802.11ax HEW40_Nss2,(MCS0)_2TX	8.78
802.11ax HEW80_Nss2,(MCS0)_2TX	2.21
802.11ax HEW160_Nss2,(MCS0)_2TX	-1.11
5.47-5.725GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	10.85
802.11ax HEW40_Nss2,(MCS0)_2TX	8.19
802.11ax HEW80_Nss2,(MCS0)_2TX	5.66
802.11ax HEW160_Nss2,(MCS0)_2TX	-1.38
5.725-5.85GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	9.21
802.11ax HEW40_Nss2,(MCS0)_2TX	6.06
802.11ax HEW80_Nss2,(MCS0)_2TX	2.65

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	5.53	7.80	8.07	10.92	11.00
5300MHz	Pass	5.53	7.67	7.94	10.79	11.00
5320MHz	Pass	5.53	6.50	6.75	9.57	11.00
5500MHz	Pass	5.25	6.51	6.60	9.53	11.00
5580MHz	Pass	5.25	7.61	7.93	10.78	11.00
5700MHz	Pass	5.25	4.28	4.74	7.46	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.25	7.60	8.07	10.85	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.71	5.93	6.46	9.21	30.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	5.53	5.43	6.10	8.73	11.00
5310MHz	Pass	5.53	5.50	6.08	8.78	11.00
5510MHz	Pass	5.25	0.46	0.49	3.47	11.00
5550MHz	Pass	5.25	5.10	5.30	8.19	11.00
5670MHz	Pass	5.25	2.01	2.42	5.20	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.25	4.79	5.14	7.91	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.71	3.02	3.20	6.06	30.00
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	5.53	-0.85	-0.57	2.21	11.00
5530MHz	Pass	5.25	-0.16	-0.34	2.70	11.00
5610MHz	Pass	5.25	2.36	2.97	5.66	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.25	1.76	2.24	5.00	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.71	-0.61	0.03	2.65	30.00
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.53	-4.34	-4.37	-1.48	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.53	-4.22	-3.97	-1.11	11.00
5570MHz	Pass	5.25	-4.71	-4.00	-1.38	11.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11ax HEW20_Nss2,(MCS0)_2TX


PSD

5260MHz

16/06/2021

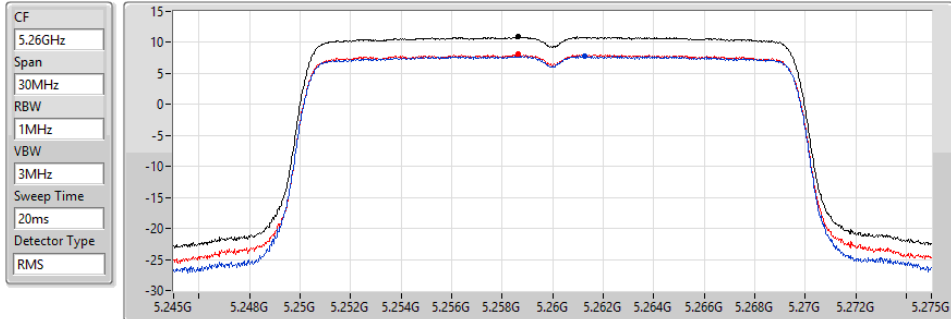

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.92	10.92	7.80	8.07




802.11ax HEW20_Nss2,(MCS0)_2TX


PSD

5300MHz

16/06/2021

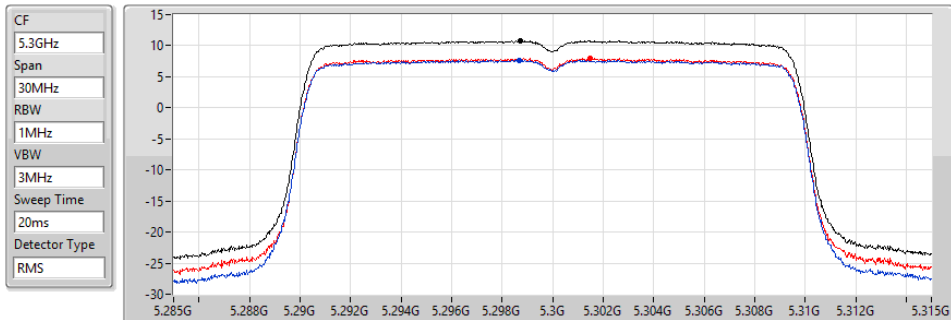

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.79	10.79	7.67	7.94




802.11ax HEW20_Nss2,(MCS0)_2TX


PSD

5320MHz

16/06/2021

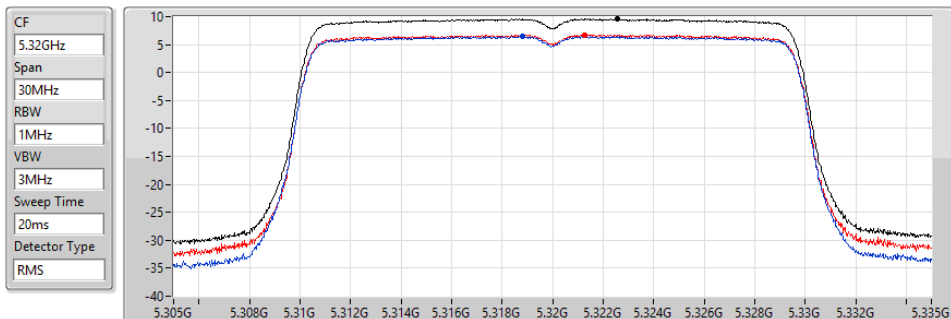

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.57	9.57	6.50	6.75




802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5500MHz

16/06/2021

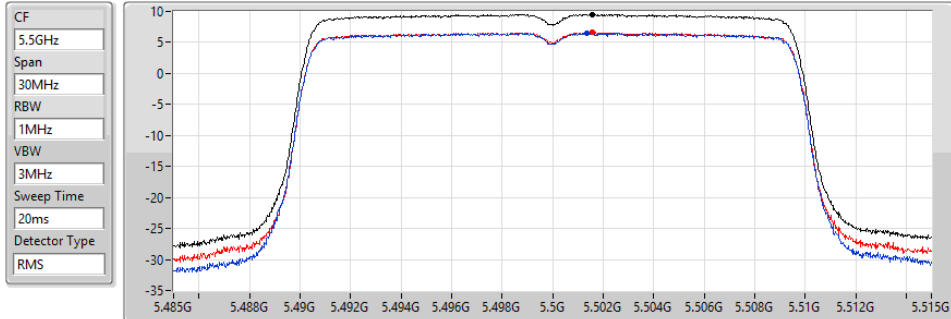


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.53	9.53	6.51	6.60

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5580MHz

16/06/2021

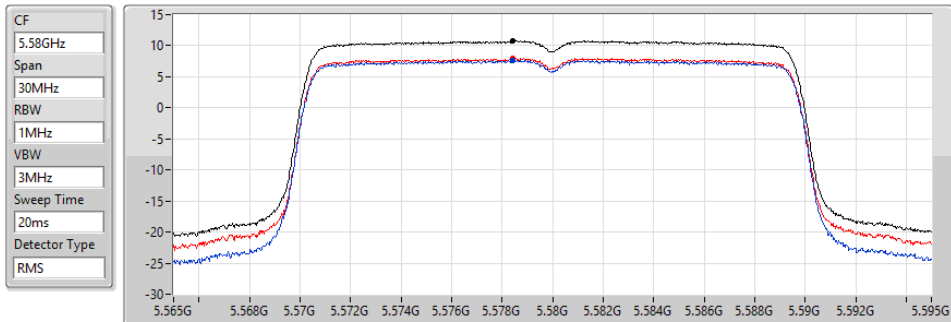


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.78	10.78	7.61	7.93

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5700MHz

16/06/2021

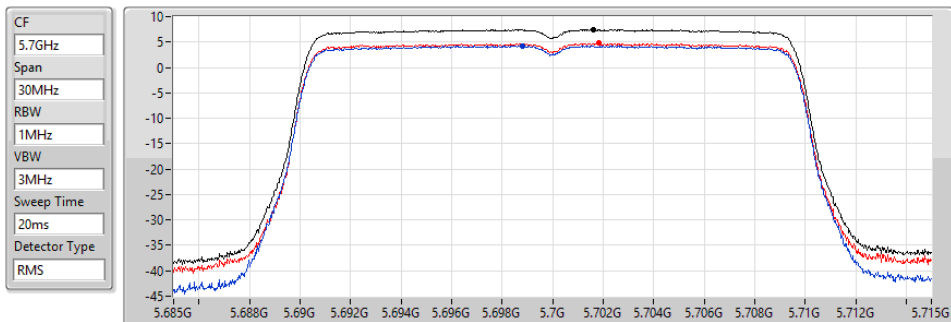


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.46	7.46	4.28	4.74

802.11ax HEW20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz

PSD

16/06/2021

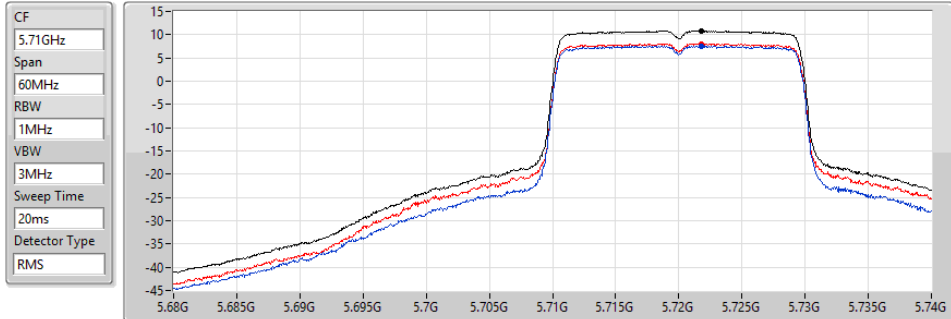


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.85	10.85	7.60	8.07

802.11ax HEW20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.725-5.85GHz

PSD

16/06/2021

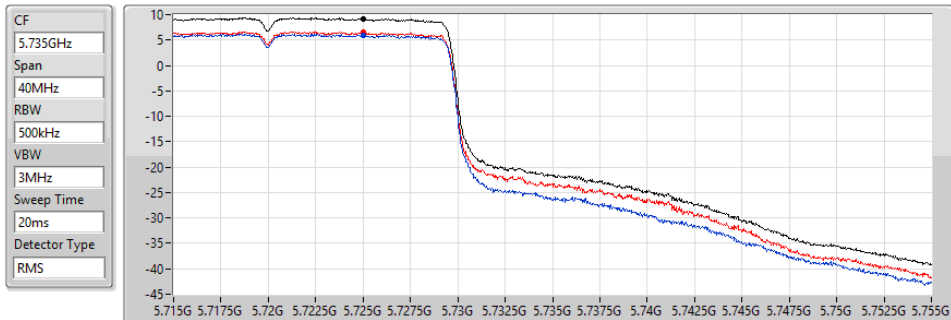


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.21	9.21	5.93	6.46

802.11ax HEW40_Nss2,(MCS0)_2TX

5270MHz

PSD

16/06/2021

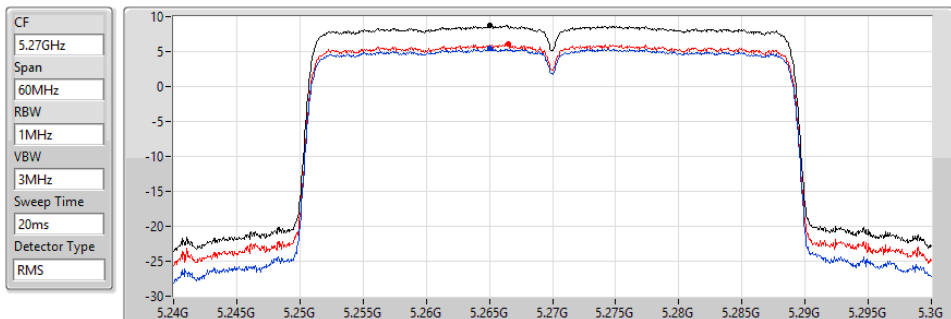


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.73	8.73	5.43	6.10

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5310MHz

16/06/2021

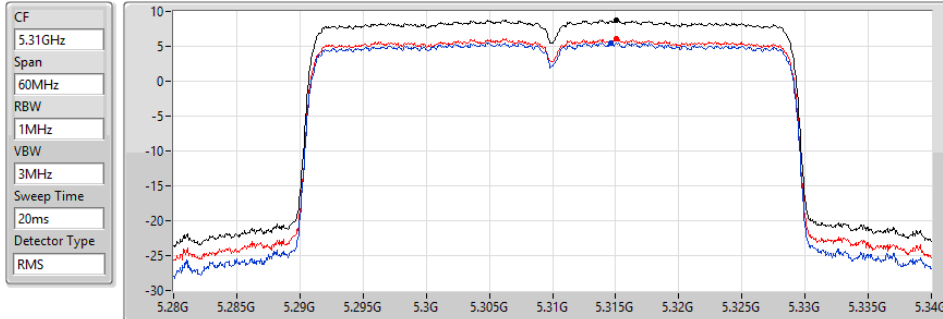


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.78	8.78	5.50	6.08

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5510MHz

16/06/2021

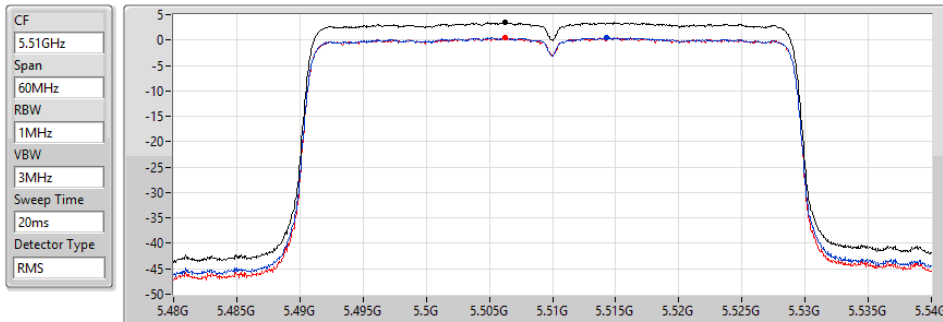


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.47	3.47	0.46	0.49

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5550MHz

16/06/2021

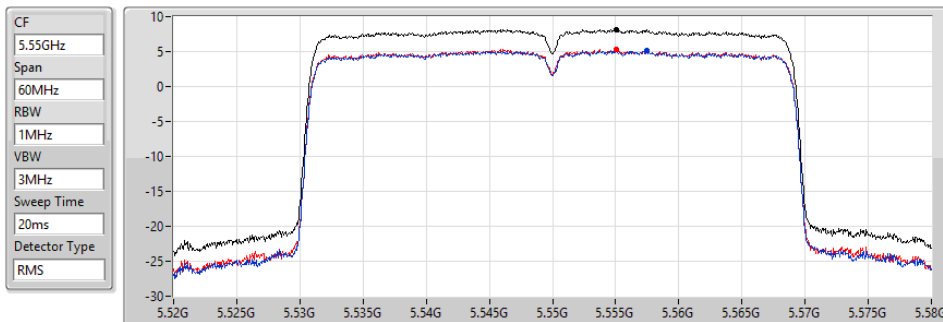


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.19	8.19	5.10	5.30

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5670MHz

16/06/2021

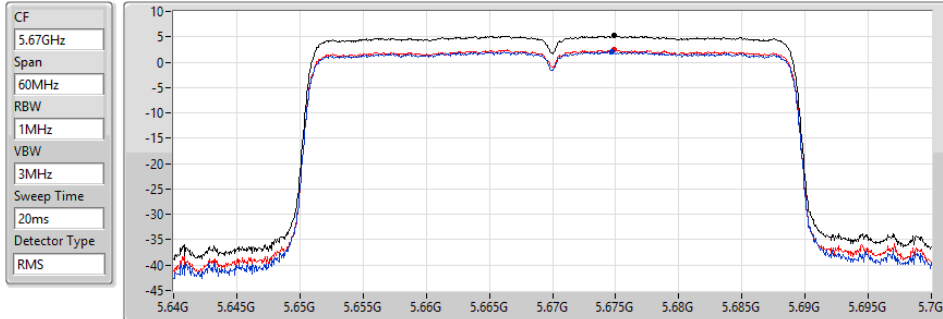


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.20	5.20	2.01	2.42

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

16/06/2021

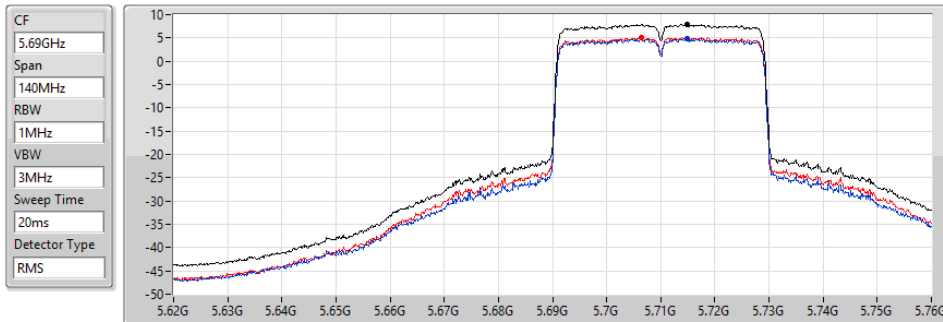


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.91	7.91	4.79	5.14

802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

16/06/2021

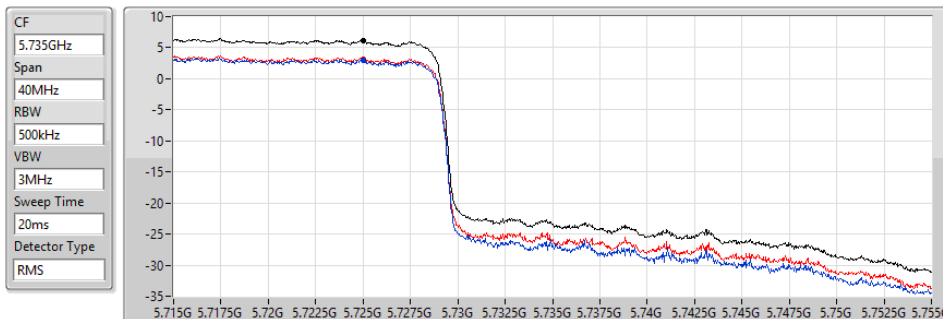


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.06	6.06	3.02	3.20

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5290MHz

16/06/2021

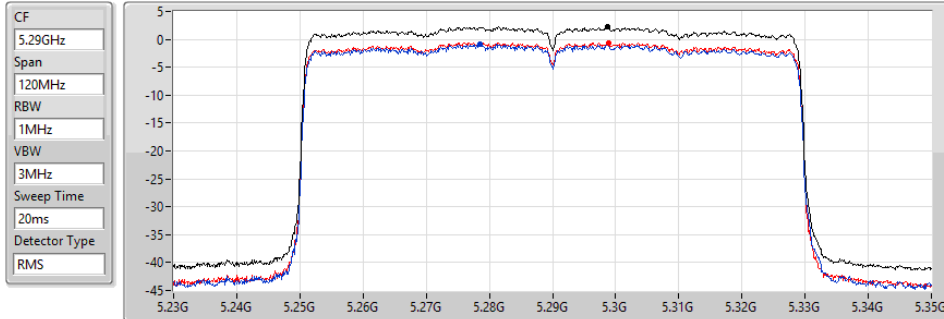


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.21	2.21	-0.85	-0.57

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5530MHz

16/06/2021

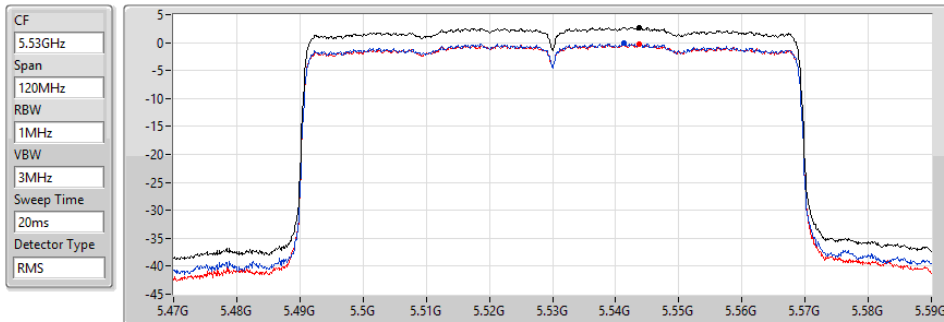


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.70	2.70	-0.16	-0.34

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5610MHz

16/06/2021

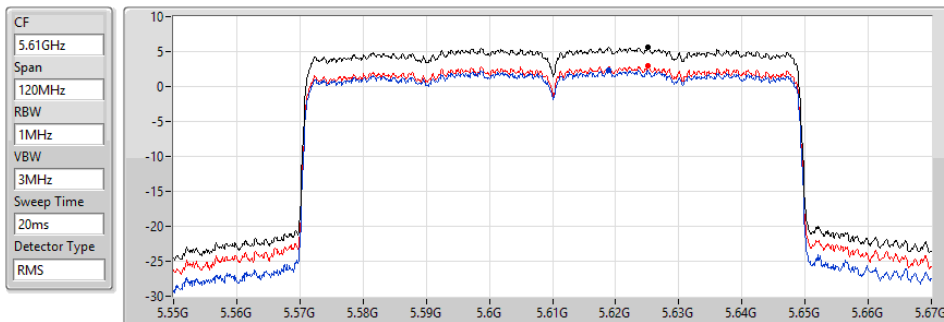


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.66	5.66	2.36	2.97

802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

16/06/2021

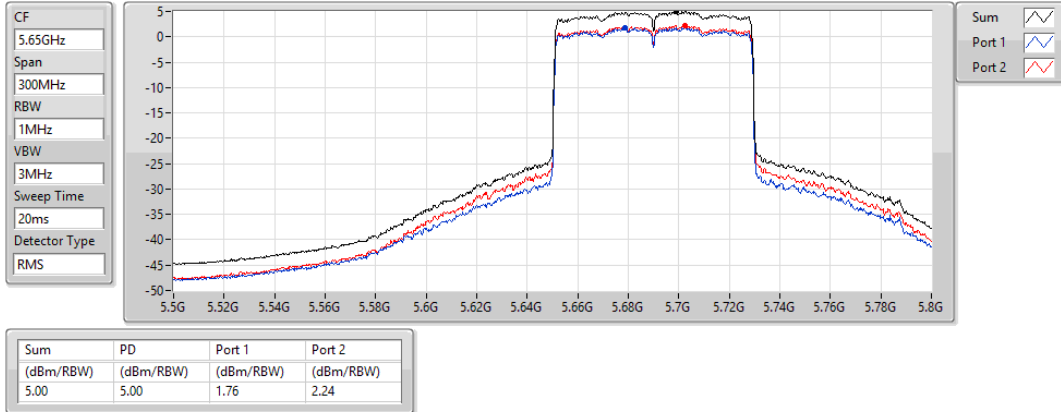


802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

16/06/2021

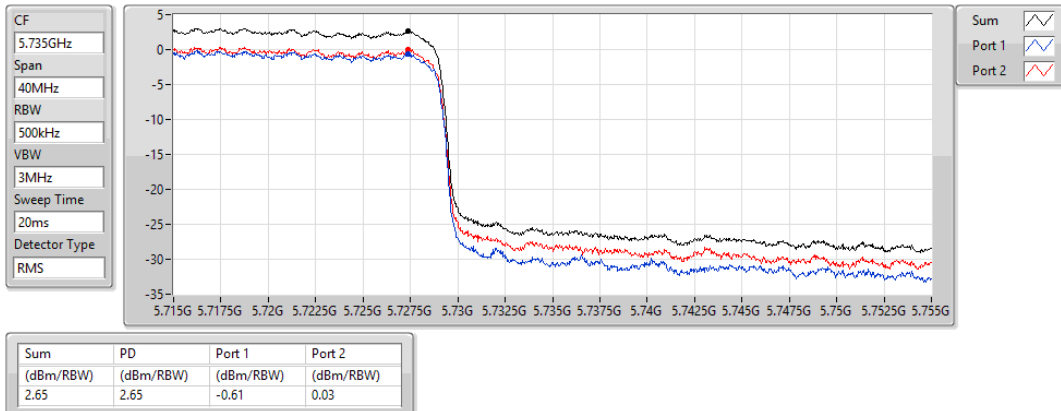


802.11ax HEW160_Nss2,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

16/06/2021

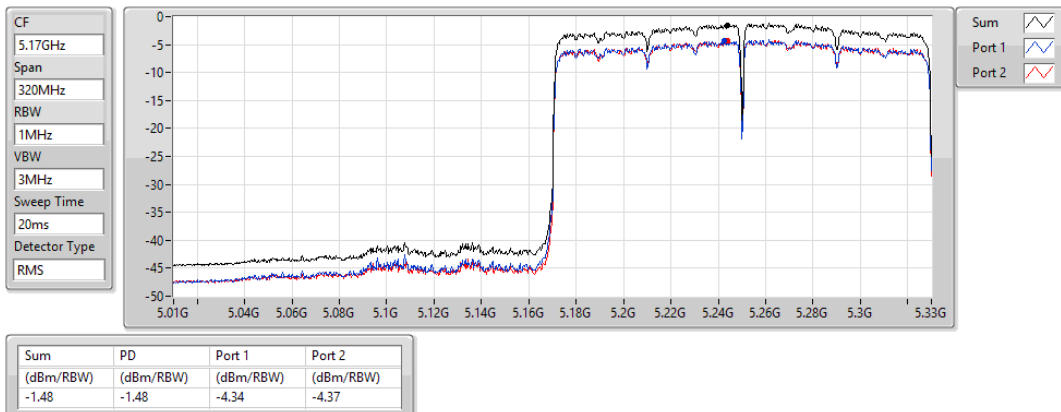


802.11ax HEW160_Nss2,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

16/06/2021

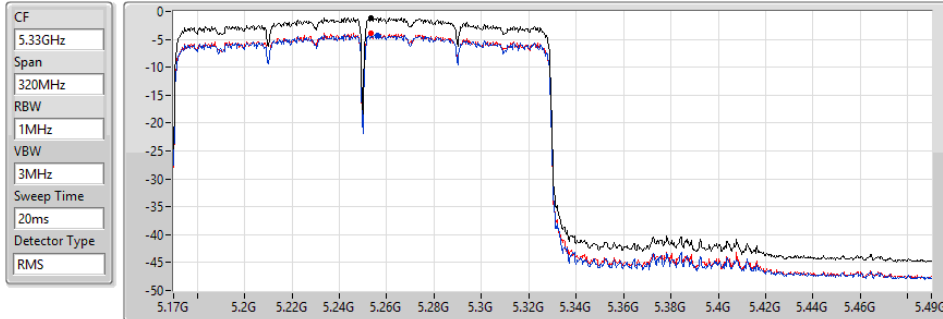


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.11	-1.11	-4.22	-3.97

802.11ax HEW160_Nss2,(MCS0)_2TX

PSD

5570MHz

16/06/2021

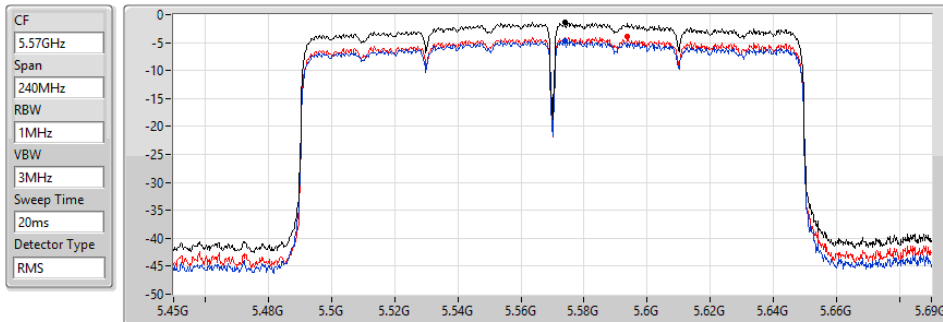

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.38	-1.38	-4.71	-4.00




For Radio 2 / 1T1S
Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.7254G	68.18	68.20	-0.02	3	Vertical	305	2.46	-

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5260MHz_TX

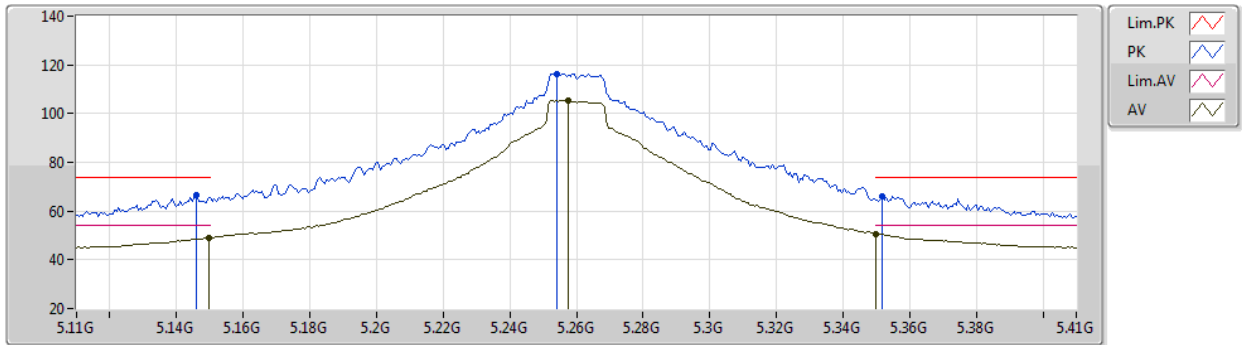


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.146G	66.31	74.00	-7.69	59.55	3	Vertical	74	2.18	-	33.50	4.99	31.73
AV	5.1496G	48.86	54.00	-5.14	42.09	3	Vertical	74	2.18	-	33.50	5.00	31.73
PK	5.254G	116.39	Inf	-Inf	109.36	3	Vertical	74	2.18	-	33.61	5.07	31.65
AV	5.2576G	105.53	Inf	-Inf	98.49	3	Vertical	74	2.18	-	33.62	5.07	31.65
PK	5.3518G	65.86	74.00	-8.14	58.72	3	Vertical	74	2.18	-	33.70	5.02	31.58
AV	5.35G	50.61	54.00	-3.39	43.46	3	Vertical	74	2.18	-	33.70	5.03	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5260MHz_TX

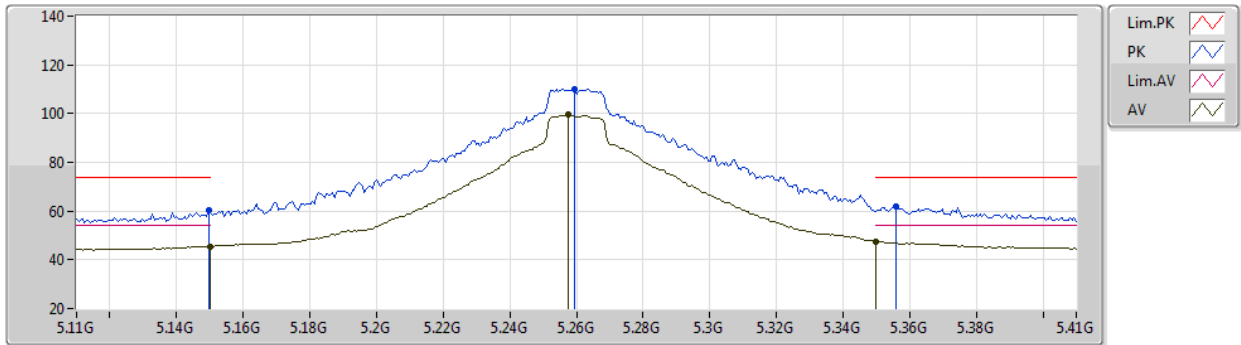


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	60.24	74.00	-13.76	53.47	3	Horizontal	115	2.73	-	33.50	5.00	31.73
AV	5.15G	45.37	54.00	-8.63	38.60	3	Horizontal	115	2.73	-	33.50	5.00	31.73
PK	5.2594G	110.20	Inf	-Inf	103.16	3	Horizontal	115	2.73	-	33.62	5.07	31.65
AV	5.2576G	99.59	Inf	-Inf	92.55	3	Horizontal	115	2.73	-	33.62	5.07	31.65
PK	5.356G	61.68	74.00	-12.32	54.53	3	Horizontal	115	2.73	-	33.71	5.02	31.58
AV	5.35G	47.49	54.00	-6.51	40.34	3	Horizontal	115	2.73	-	33.70	5.03	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5260MHz_TX

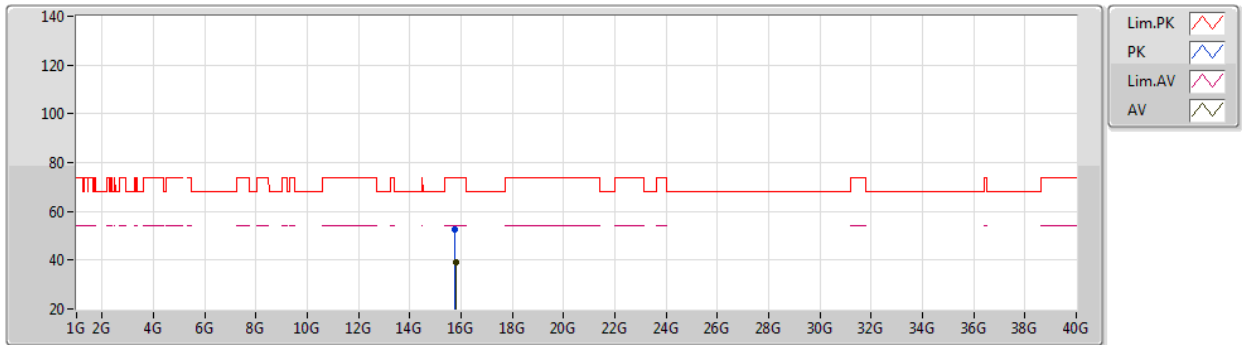


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.76878G	52.34	74.00	-21.66	38.68	3	Vertical	263	3.00	-	37.40	9.12	32.86
AV	15.78582G	39.24	54.00	-14.76	25.57	3	Vertical	263	3.00	-	37.40	9.13	32.86

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5260MHz_TX

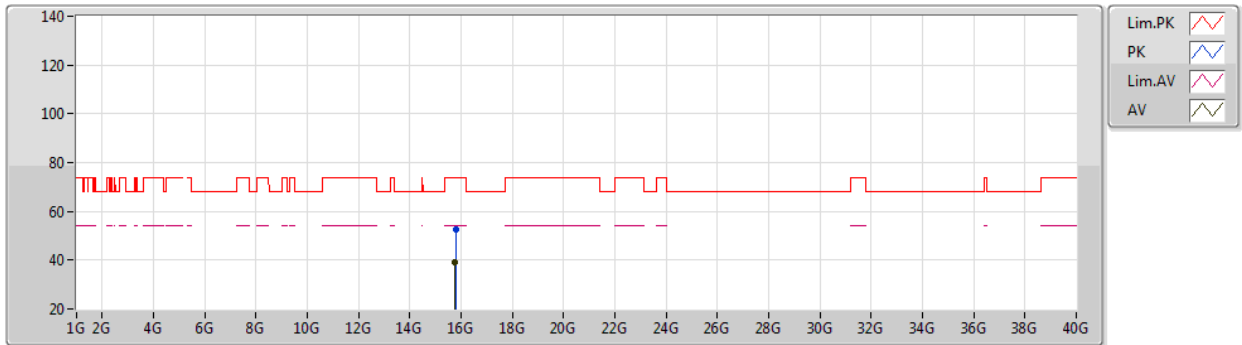


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.78708G	52.67	74.00	-21.33	39.00	3	Horizontal	278	1.52	-	37.40	9.13	32.86
AV	15.77784G	39.27	54.00	-14.73	25.61	3	Horizontal	278	1.52	-	37.40	9.12	32.86

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5300MHz_TX

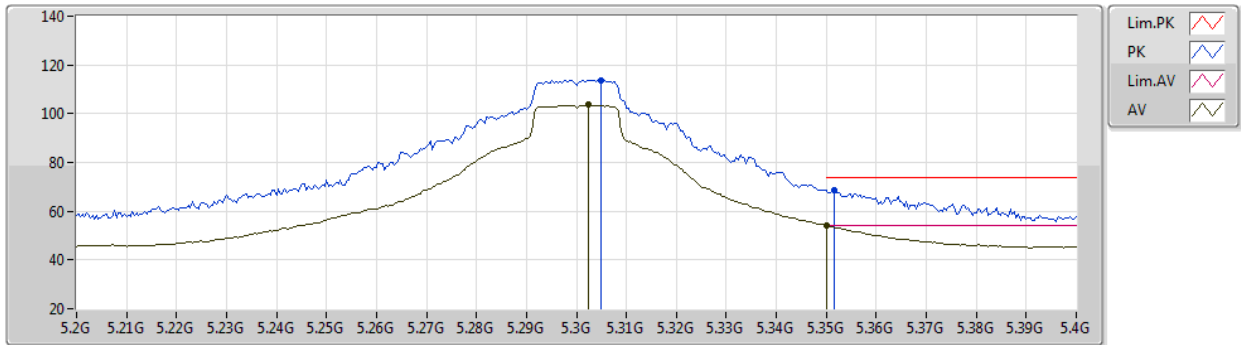


EUT Z_1TX
Setting 99
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3048G	113.72	Inf	-Inf	106.58	3	Vertical	74	2.28	-	33.70	5.05	31.61
AV	5.3024G	103.74	Inf	-Inf	96.61	3	Vertical	74	2.28	-	33.70	5.05	31.62
PK	5.3516G	68.62	74.00	-5.38	61.48	3	Vertical	74	2.28	-	33.70	5.02	31.58
AV	5.35G	53.96	54.00	-0.04	46.81	3	Vertical	74	2.28	-	33.70	5.03	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5300MHz_TX

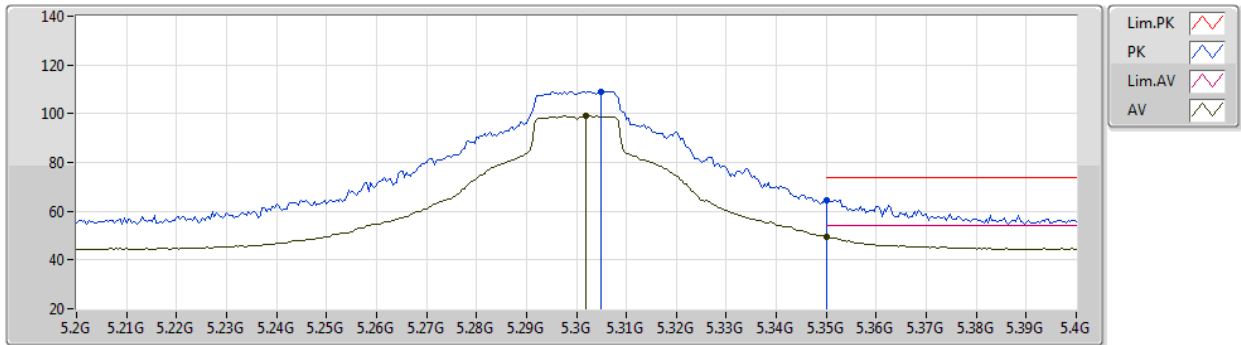


EUT Z_1TX
Setting 99
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3048G	109.17	Inf	-Inf	102.03	3	Horizontal	117	2.46	-	33.70	5.05	31.61
AV	5.302G	99.20	Inf	-Inf	92.07	3	Horizontal	117	2.46	-	33.70	5.05	31.62
PK	5.35G	64.74	74.00	-9.26	57.59	3	Horizontal	117	2.46	-	33.70	5.03	31.58
AV	5.35G	49.41	54.00	-4.59	42.26	3	Horizontal	117	2.46	-	33.70	5.03	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5300MHz_TX

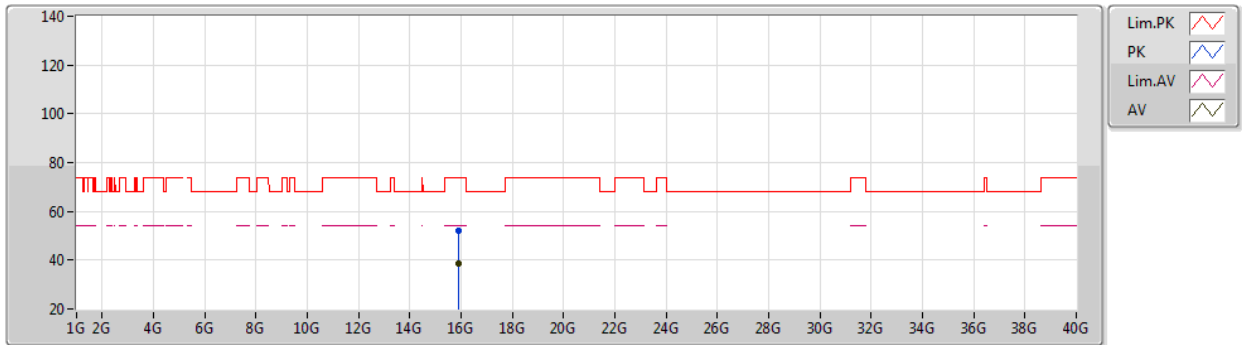


EUT Z_1TX
Setting 99
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.9108G	52.29	74.00	-21.71	38.50	3	Vertical	348	1.80	-	37.49	9.17	32.87
AV	15.89106G	38.86	54.00	-15.14	25.08	3	Vertical	348	1.80	-	37.49	9.16	32.87

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5300MHz_TX

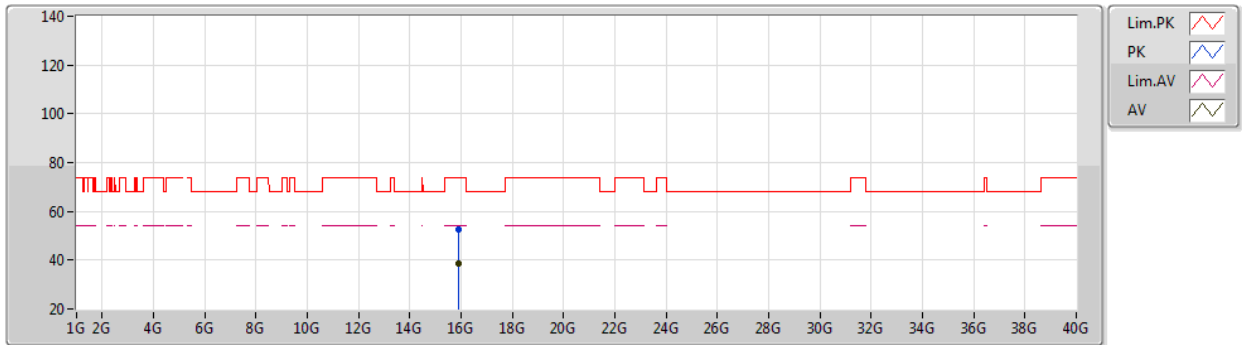


EUT Z_1TX
Setting 99
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.891G	52.68	74.00	-21.32	38.90	3	Horizontal	244	1.80	-	37.49	9.16	32.87
AV	15.89532G	38.83	54.00	-15.17	25.04	3	Horizontal	244	1.80	-	37.50	9.16	32.87

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5320MHz_TX

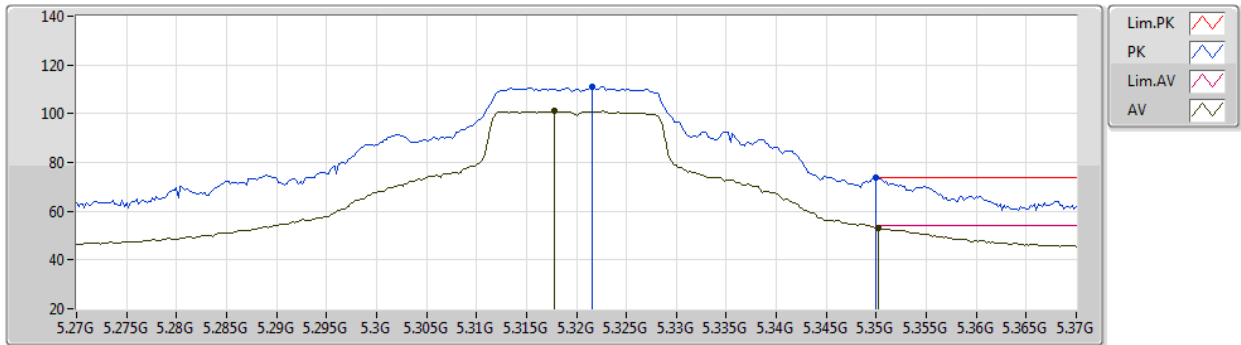


EUT Z_1TX
Setting 90
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3216G	111.06	Inf	-Inf	103.92	3	Vertical	76	2.15	-	33.70	5.04	31.60
AV	5.3178G	100.99	Inf	-Inf	93.85	3	Vertical	76	2.15	-	33.70	5.04	31.60
PK	5.35G	73.76	74.00	-0.24	66.61	3	Vertical	76	2.15	-	33.70	5.03	31.58
AV	5.3502G	53.17	54.00	-0.83	46.03	3	Vertical	76	2.15	-	33.70	5.02	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5320MHz_TX

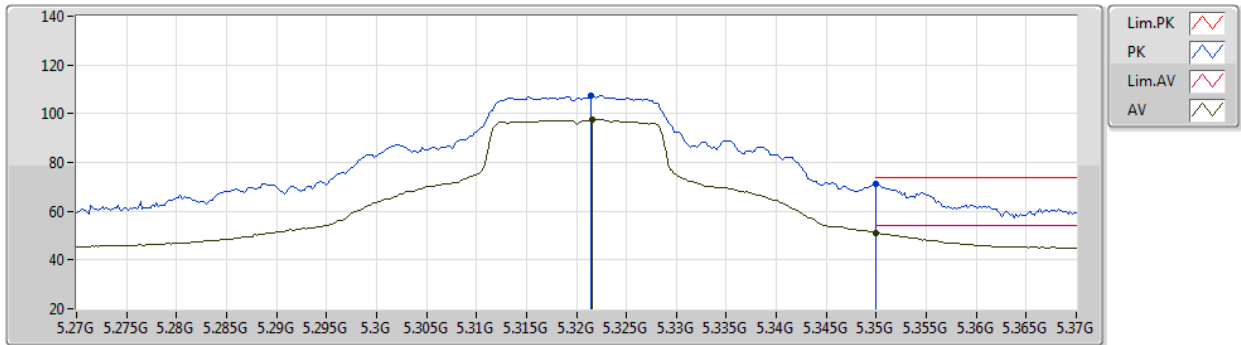


EUT Z_1TX
Setting 90
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3214G	107.56	Inf	-Inf	100.42	3	Horizontal	114	2.46	-	33.70	5.04	31.60
AV	5.3216G	97.47	Inf	-Inf	90.33	3	Horizontal	114	2.46	-	33.70	5.04	31.60
PK	5.35G	70.98	74.00	-3.02	63.83	3	Horizontal	114	2.46	-	33.70	5.03	31.58
AV	5.35G	51.15	54.00	-2.85	44.00	3	Horizontal	114	2.46	-	33.70	5.03	31.58

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5320MHz_TX

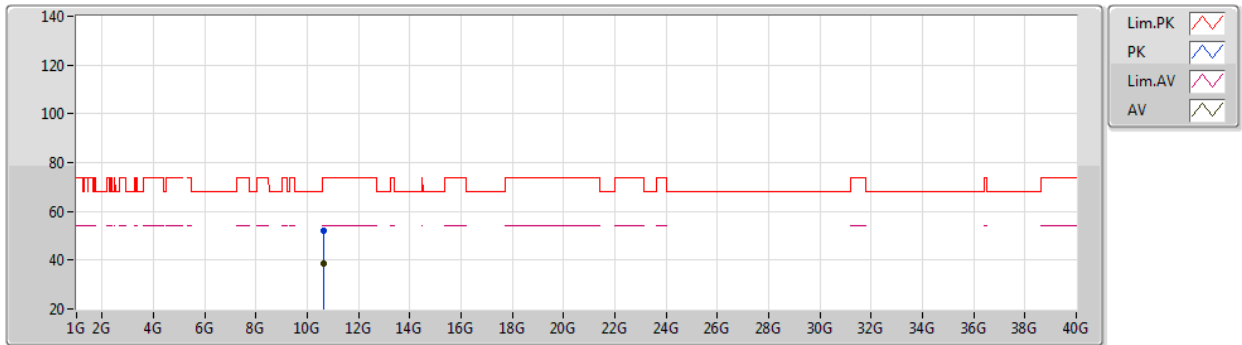


EUT Z_1TX
Setting 90
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.63502G	52.01	74.00	-21.99	38.84	3	Vertical	28	1.80	-	38.46	7.32	32.61
AV	10.6316G	38.84	54.00	-15.16	25.66	3	Vertical	28	1.80	-	38.47	7.32	32.61

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5320MHz_TX

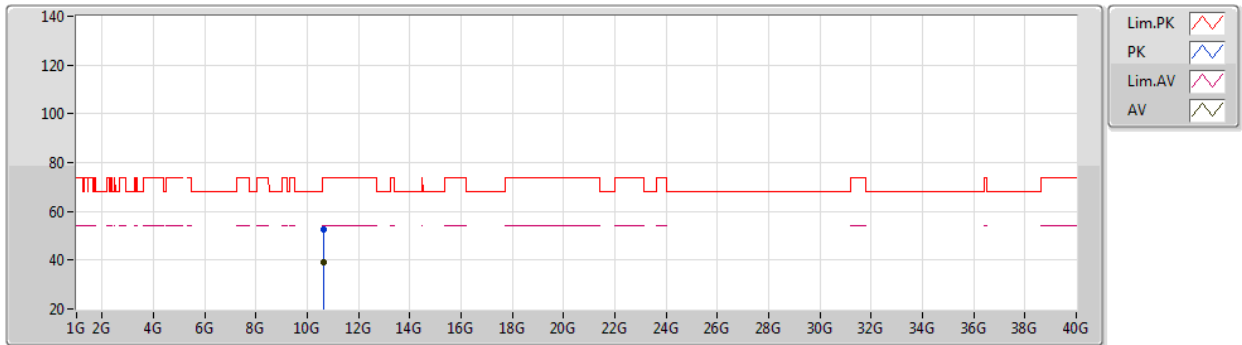


EUT Z_1TX
Setting 90
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.63748G	52.39	74.00	-21.61	39.22	3	Horizontal	19	1.80	-	38.46	7.32	32.61
AV	10.64462G	38.92	54.00	-15.08	25.74	3	Horizontal	19	1.80	-	38.46	7.33	32.61

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5500MHz_TX

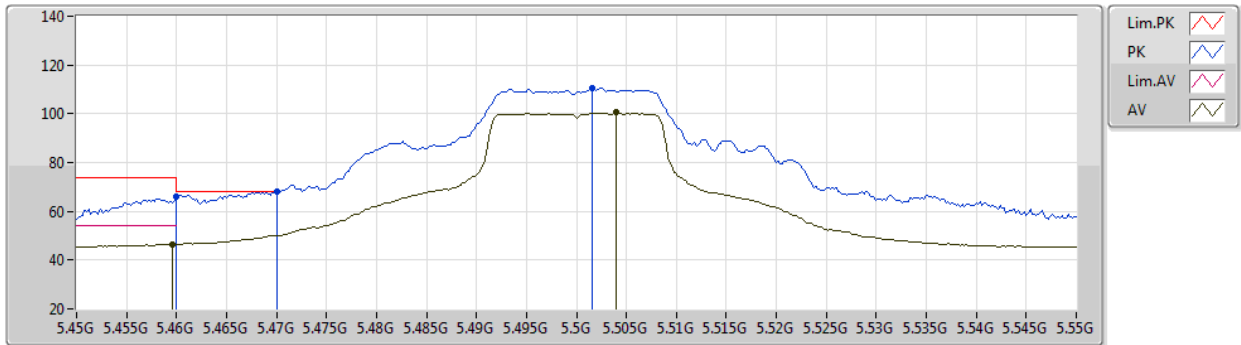


EUT Z_1TX
Setting 83
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.46G	66.08	74.00	-7.92	58.62	3	Vertical	296	2.72	-	33.90	5.06	31.50
AV	5.4596G	46.60	54.00	-7.40	39.14	3	Vertical	296	2.72	-	33.90	5.06	31.50
PK	5.47G	68.14	68.20	-0.06	60.66	3	Vertical	296	2.72	-	33.90	5.07	31.49
PK	5.5016G	110.49	Inf	-Inf	102.96	3	Vertical	296	2.72	-	33.90	5.10	31.47
AV	5.504G	100.45	Inf	-Inf	92.92	3	Vertical	296	2.72	-	33.90	5.10	31.47

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5500MHz_TX

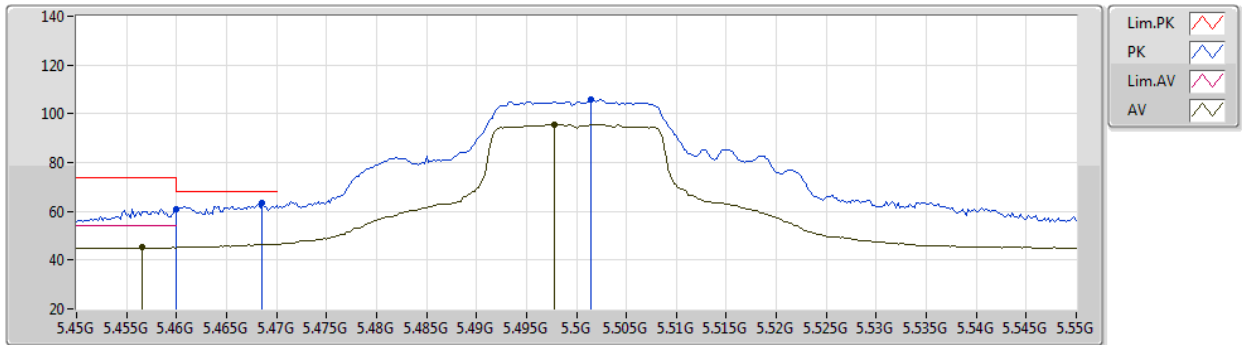


EUT Z_1TX
Setting 83
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.46G	60.96	74.00	-13.04	53.50	3	Horizontal	286	2.96	-	33.90	5.06	31.50
AV	5.4566G	45.22	54.00	-8.78	37.76	3	Horizontal	286	2.96	-	33.90	5.06	31.50
PK	5.4686G	63.27	68.20	-4.93	55.79	3	Horizontal	286	2.96	-	33.90	5.07	31.49
PK	5.5014G	105.82	Inf	-Inf	98.29	3	Horizontal	286	2.96	-	33.90	5.10	31.47
AV	5.4978G	95.56	Inf	-Inf	88.03	3	Horizontal	286	2.96	-	33.90	5.10	31.47

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5500MHz_TX

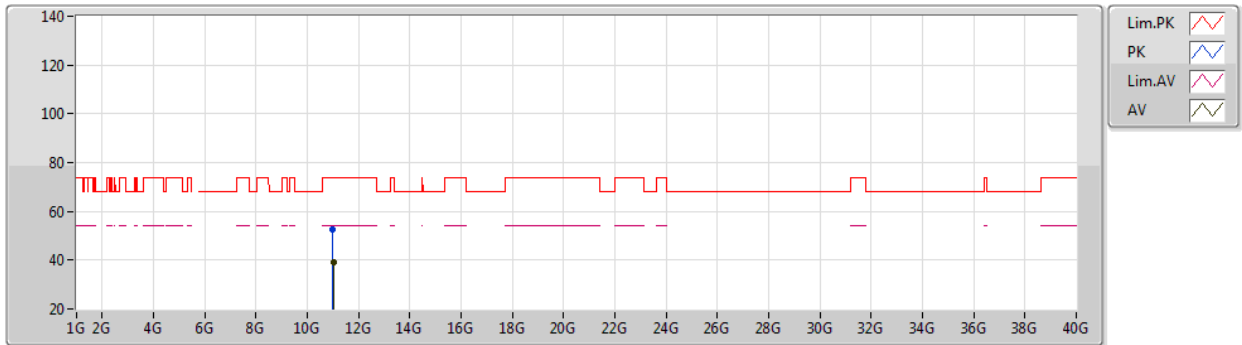


EUT Z_1TX
Setting 83
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.00528G	52.34	74.00	-21.66	39.14	3	Vertical	159	2.54	-	38.51	7.45	32.76
AV	11.01386G	38.92	54.00	-15.08	25.72	3	Vertical	159	2.54	-	38.51	7.45	32.76

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5500MHz_TX

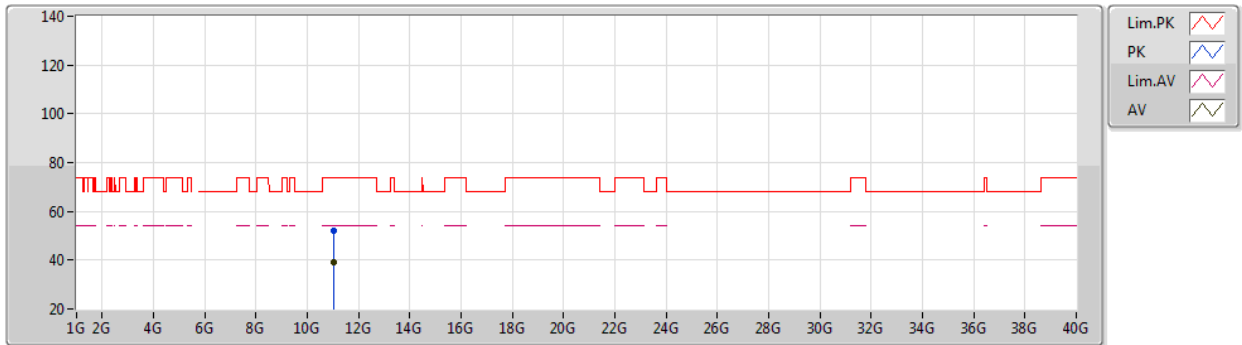


EUT Z_1TX
Setting 83
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.01416G	52.09	74.00	-21.91	38.89	3	Horizontal	121	2.71	-	38.51	7.45	32.76
AV	11.01482G	39.01	54.00	-14.99	25.81	3	Horizontal	121	2.71	-	38.51	7.46	32.77

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5580MHz_TX

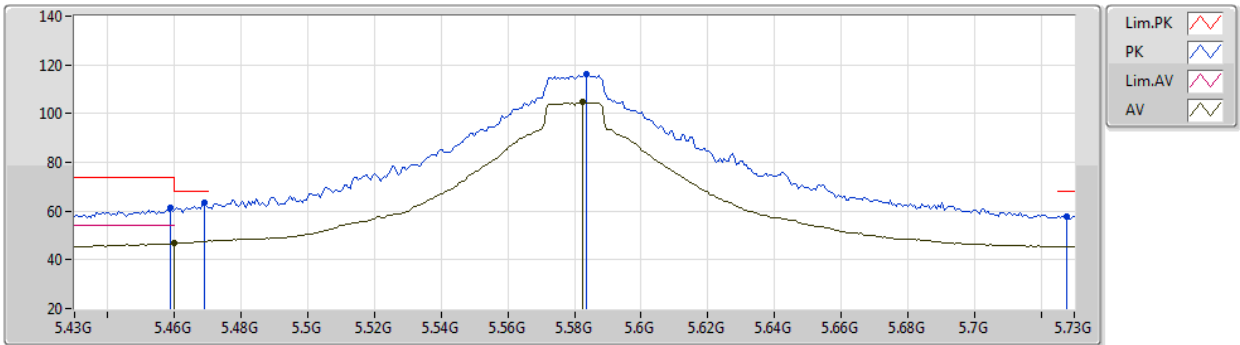


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4588G	61.31	74.00	-12.69	53.85	3	Vertical	301	2.53	-	33.90	5.06	31.50
AV	5.46G	46.80	54.00	-7.20	39.34	3	Vertical	301	2.53	-	33.90	5.06	31.50
PK	5.469G	63.26	68.20	-4.94	55.78	3	Vertical	301	2.53	-	33.90	5.07	31.49
PK	5.5836G	116.18	Inf	-Inf	108.57	3	Vertical	301	2.53	-	33.90	5.18	31.47
AV	5.5824G	105.02	Inf	-Inf	97.41	3	Vertical	301	2.53	-	33.90	5.18	31.47
PK	5.7276G	57.81	68.20	-10.39	50.44	3	Vertical	301	2.53	-	33.76	5.07	31.46

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5580MHz_TX

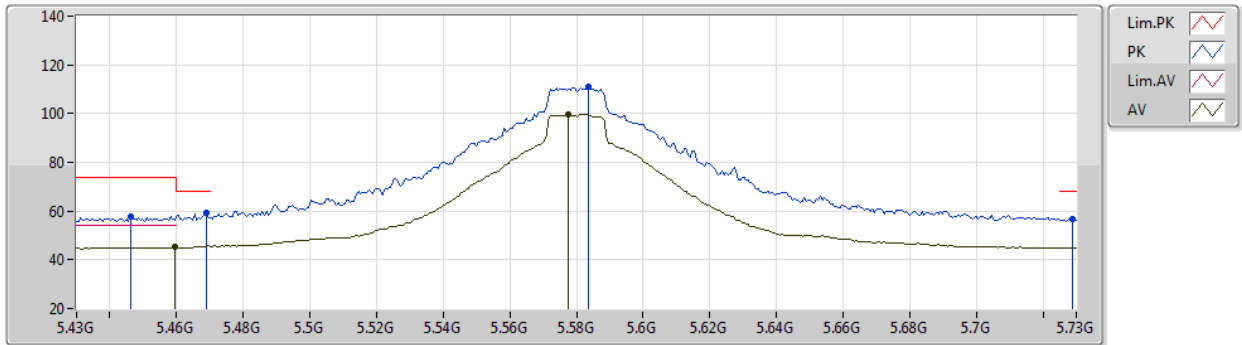


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4462G	57.80	74.00	-16.20	50.37	3	Horizontal	115	2.73	-	33.89	5.05	31.51
PK	5.469G	59.35	68.20	-8.85	51.87	3	Horizontal	115	2.73	-	33.90	5.07	31.49
AV	5.4594G	45.11	54.00	-8.89	37.65	3	Horizontal	115	2.73	-	33.90	5.06	31.50
PK	5.5836G	110.80	Inf	-Inf	103.19	3	Horizontal	115	2.73	-	33.90	5.18	31.47
AV	5.5776G	99.74	Inf	-Inf	92.13	3	Horizontal	115	2.73	-	33.90	5.18	31.47
PK	5.7288G	56.79	68.20	-11.41	49.42	3	Horizontal	115	2.73	-	33.76	5.07	31.46

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5580MHz_TX

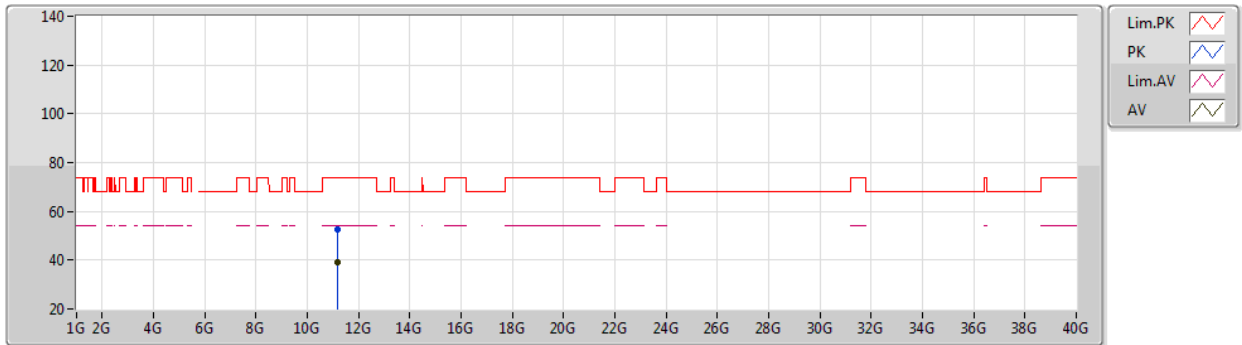


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.17428G	52.67	74.00	-21.33	39.31	3	Vertical	22	2.37	-	38.67	7.51	32.82
AV	11.17122G	39.25	54.00	-14.75	25.89	3	Vertical	22	2.37	-	38.67	7.51	32.82

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5580MHz_TX

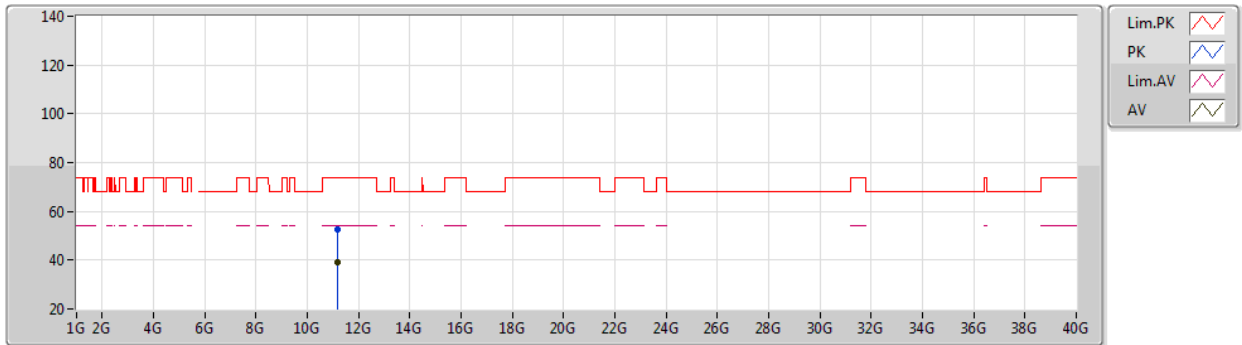


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.16066G	52.69	74.00	-21.31	39.33	3	Horizontal	300	1.73	-	38.66	7.51	32.81
AV	11.16438G	39.23	54.00	-14.77	25.88	3	Horizontal	300	1.73	-	38.66	7.51	32.82

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5700MHz_TX

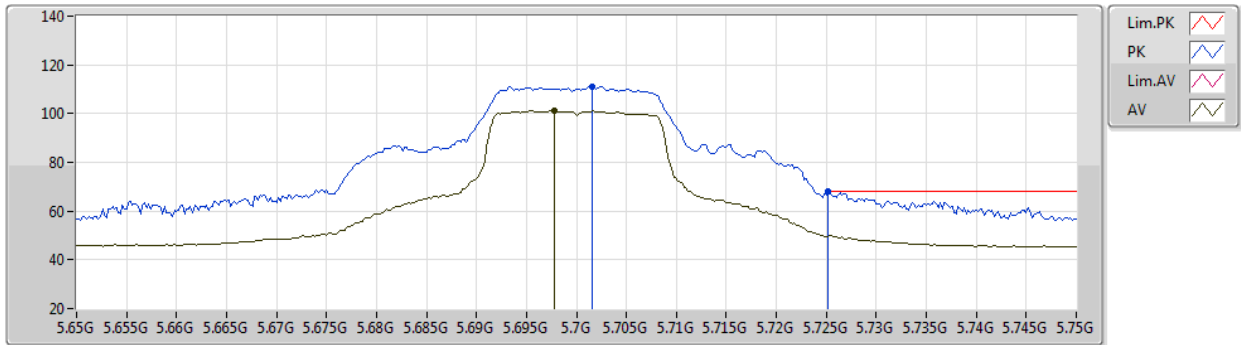


EUT Z_1TX
Setting 78
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7016G	111.23	Inf	-Inf	103.89	3	Vertical	307	2.55	-	33.70	5.10	31.46
AV	5.6978G	101.15	Inf	-Inf	93.81	3	Vertical	307	2.55	-	33.70	5.10	31.46
PK	5.7252G	67.97	68.20	-0.23	60.61	3	Vertical	307	2.55	-	33.75	5.07	31.46

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5700MHz_TX

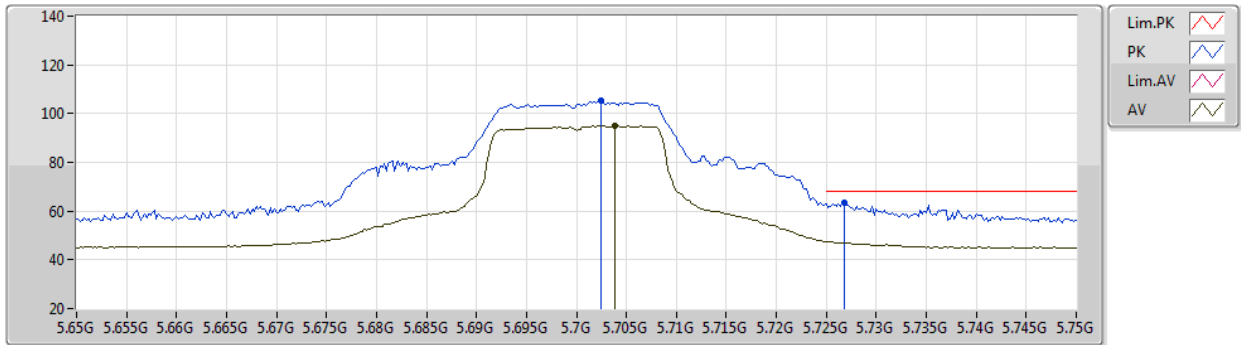


EUT Z_1TX
Setting 78
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7024G	105.13	Inf	-Inf	97.79	3	Horizontal	126	2.70	-	33.70	5.10	31.46
AV	5.7038G	95.05	Inf	-Inf	87.70	3	Horizontal	126	2.70	-	33.71	5.10	31.46
PK	5.7268G	63.40	68.20	-4.80	56.04	3	Horizontal	126	2.70	-	33.75	5.07	31.46

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5700MHz_TX

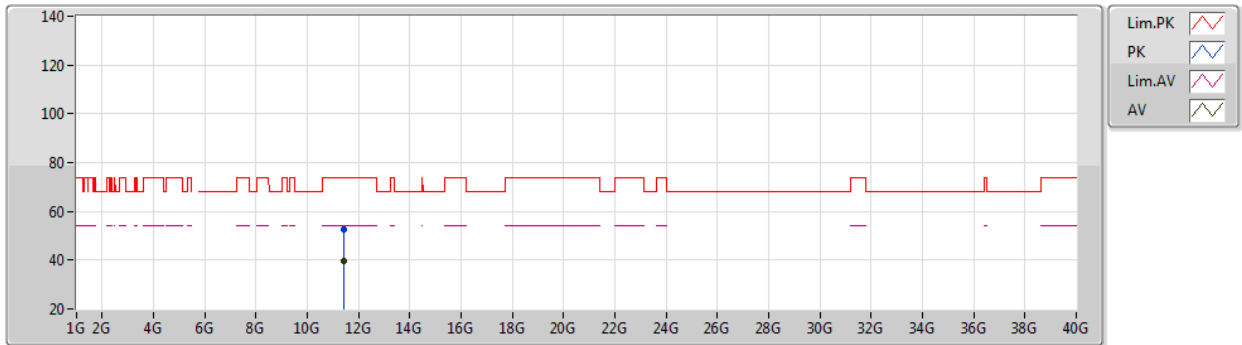


EUT Z_1TX
Setting 78
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.41182G	52.47	74.00	-21.53	38.96	3	Vertical	309	1.80	-	38.82	7.59	32.90
AV	11.41476G	39.61	54.00	-14.39	26.08	3	Vertical	309	1.80	-	38.83	7.60	32.90

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5700MHz_TX

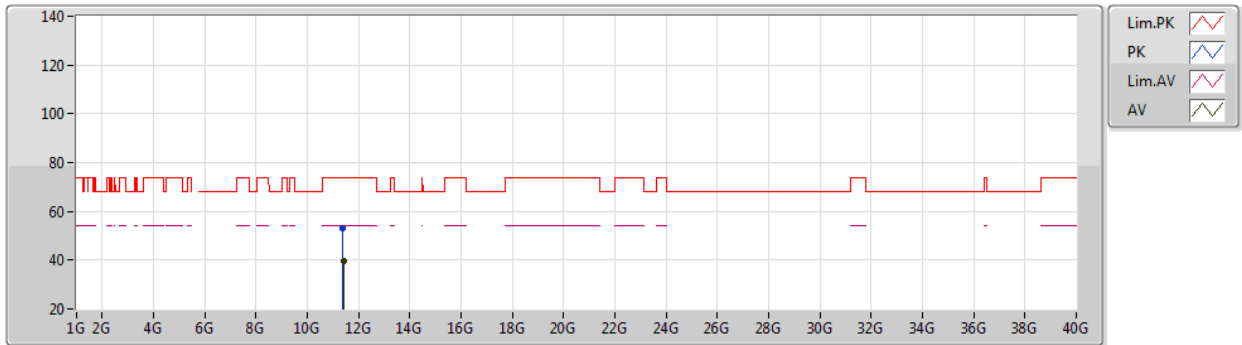


EUT Z_1TX
Setting 78
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.39496G	52.93	74.00	-21.07	39.44	3	Horizontal	132	1.10	-	38.79	7.59	32.89
AV	11.41176G	39.72	54.00	-14.28	26.21	3	Horizontal	132	1.10	-	38.82	7.59	32.90

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

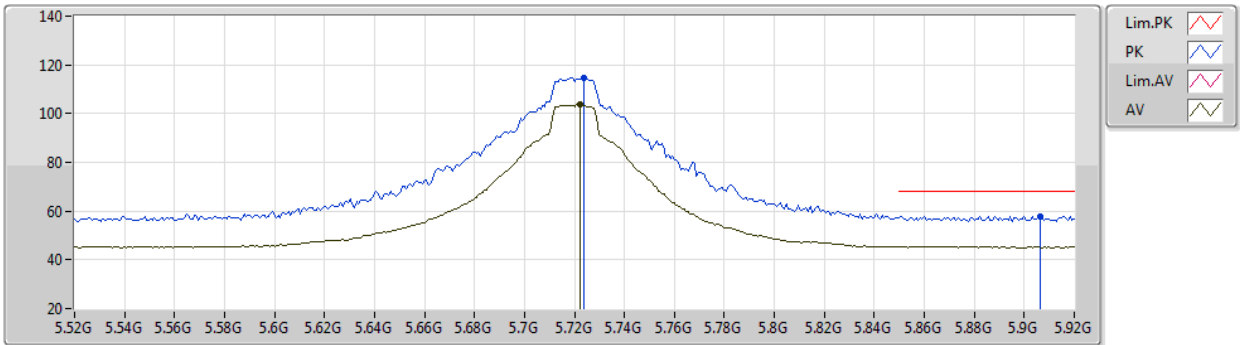


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.724G	114.72	Inf	-Inf	107.35	3	Vertical	309	2.25	-	33.75	5.08	31.46
AV	5.7224G	103.92	Inf	-Inf	96.56	3	Vertical	309	2.25	-	33.74	5.08	31.46
PK	5.9064G	57.90	68.20	-10.30	50.02	3	Vertical	309	2.25	-	34.01	5.32	31.45

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

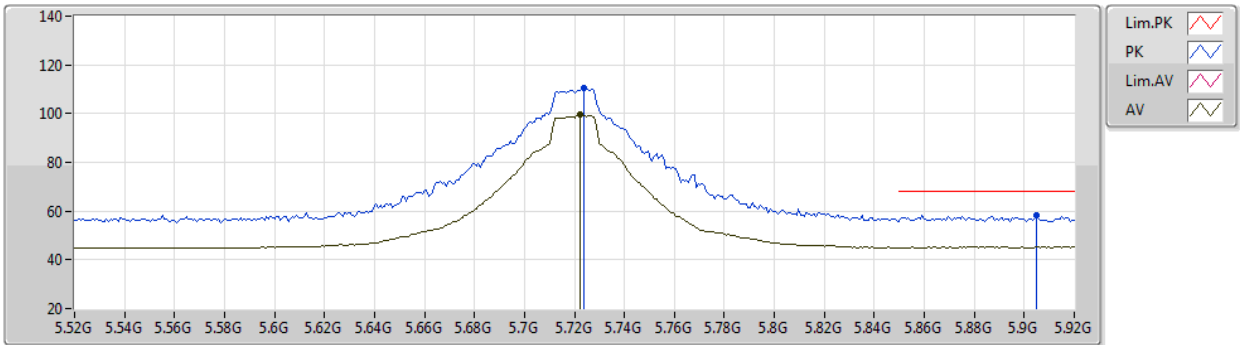


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.724G	110.30	Inf	-Inf	102.93	3	Horizontal	109	2.63	-	33.75	5.08	31.46
AV	5.7224G	99.46	Inf	-Inf	92.10	3	Horizontal	109	2.63	-	33.74	5.08	31.46
PK	5.9048G	58.26	68.20	-9.94	50.39	3	Horizontal	109	2.63	-	34.01	5.31	31.45

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

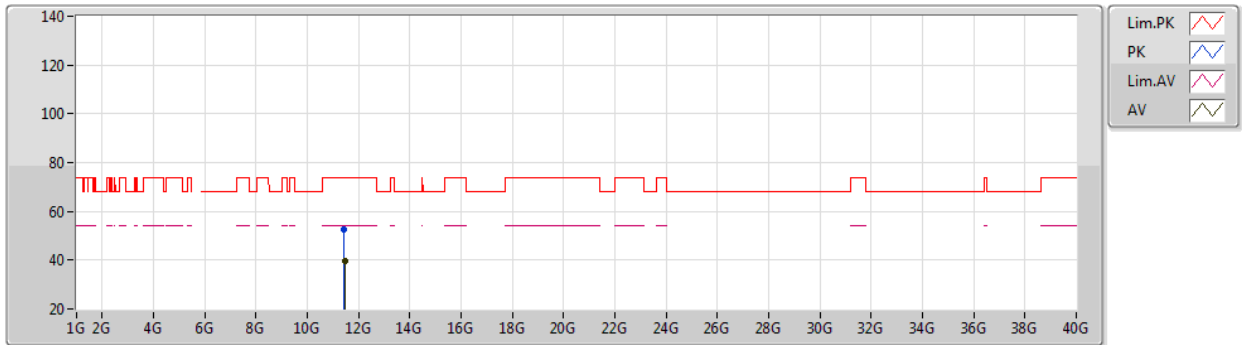


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.4478G	52.69	74.00	-21.31	39.09	3	Vertical	352	1.61	-	38.90	7.61	32.91
AV	11.452G	39.48	54.00	-14.52	25.88	3	Vertical	352	1.61	-	38.90	7.61	32.91

802.11a_Nss1,(6Mbps)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

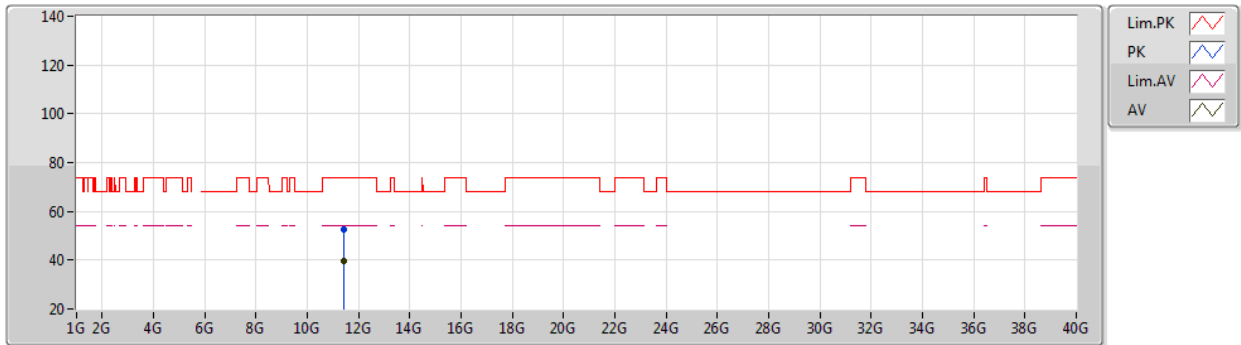


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.43154G	52.55	74.00	-21.45	39.00	3	Horizontal	274	2.41	-	38.86	7.60	32.91
AV	11.42662G	39.40	54.00	-14.60	25.86	3	Horizontal	274	2.41	-	38.85	7.60	32.91

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5260MHz_TX

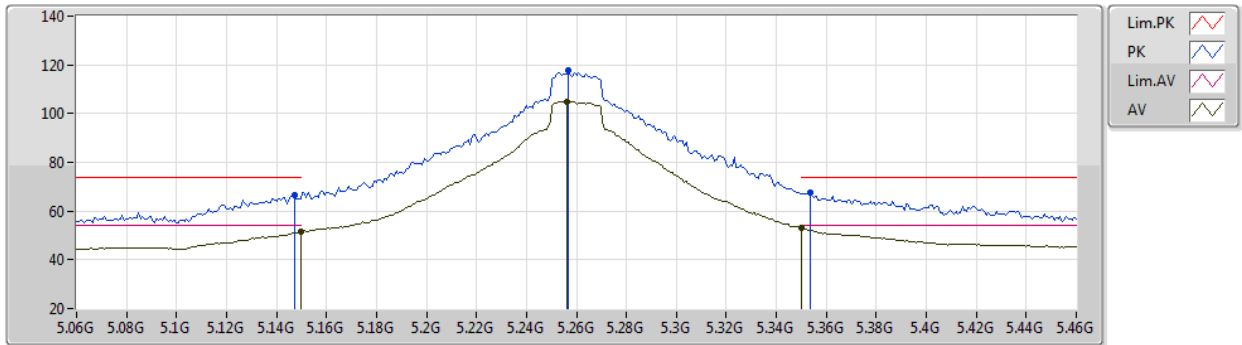

EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1472G	66.40	74.00	-7.60	59.64	3	Vertical	73	2.19	-	33.50	4.99	31.73
AV	5.1496G	51.39	54.00	-2.61	44.62	3	Vertical	73	2.19	-	33.50	5.00	31.73
PK	5.2568G	117.70	Inf	-Inf	110.67	3	Vertical	73	2.19	-	33.61	5.07	31.65
AV	5.256G	104.96	Inf	-Inf	97.93	3	Vertical	73	2.19	-	33.61	5.07	31.65
PK	5.3536G	67.73	74.00	-6.27	60.58	3	Vertical	73	2.19	-	33.71	5.02	31.58
AV	5.35G	53.08	54.00	-0.92	45.94	3	Vertical	73	2.19	-	33.70	5.02	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5260MHz_TX

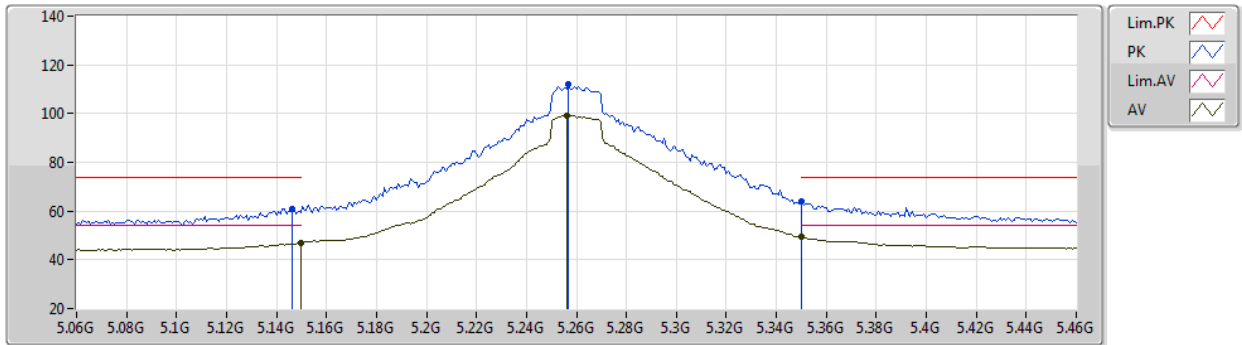

EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1464G	60.76	74.00	-13.24	54.00	3	Horizontal	115	2.72	-	33.50	4.99	31.73
AV	5.1496G	46.82	54.00	-7.18	40.05	3	Horizontal	115	2.72	-	33.50	5.00	31.73
PK	5.2568G	112.28	Inf	-Inf	105.25	3	Horizontal	115	2.72	-	33.61	5.07	31.65
AV	5.256G	99.21	Inf	-Inf	92.18	3	Horizontal	115	2.72	-	33.61	5.07	31.65
PK	5.35G	64.16	74.00	-9.84	57.02	3	Horizontal	115	2.72	-	33.70	5.02	31.58
AV	5.35G	49.45	54.00	-4.55	42.31	3	Horizontal	115	2.72	-	33.70	5.02	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5260MHz_TX

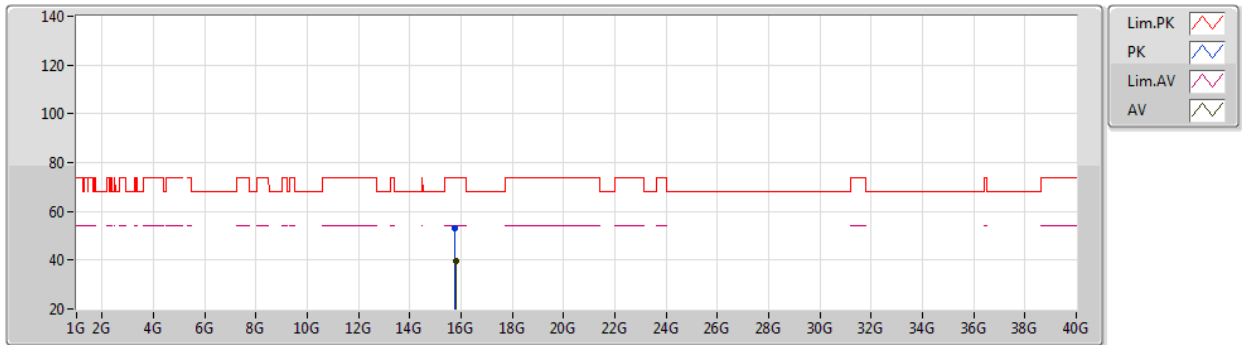


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.77432G	53.06	74.00	-20.94	39.40	3	Vertical	341	2.90	-	37.40	9.12	32.86
AV	15.78448G	39.61	54.00	-14.39	25.95	3	Vertical	341	2.90	-	37.40	9.12	32.86

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5260MHz_TX

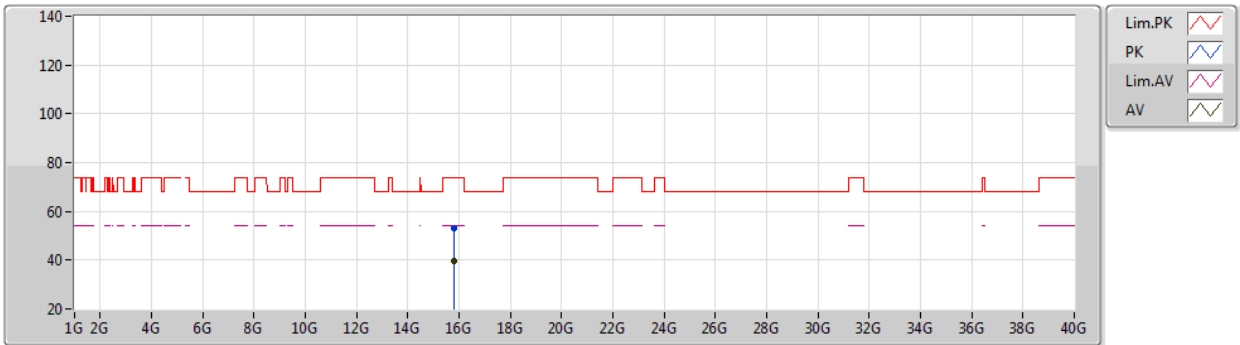


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.78024G	52.96	74.00	-21.04	39.30	3	Horizontal	272	1.74	-	37.40	9.12	32.86
AV	15.78316G	39.57	54.00	-14.43	25.91	3	Horizontal	272	1.74	-	37.40	9.12	32.86

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5300MHz_TX

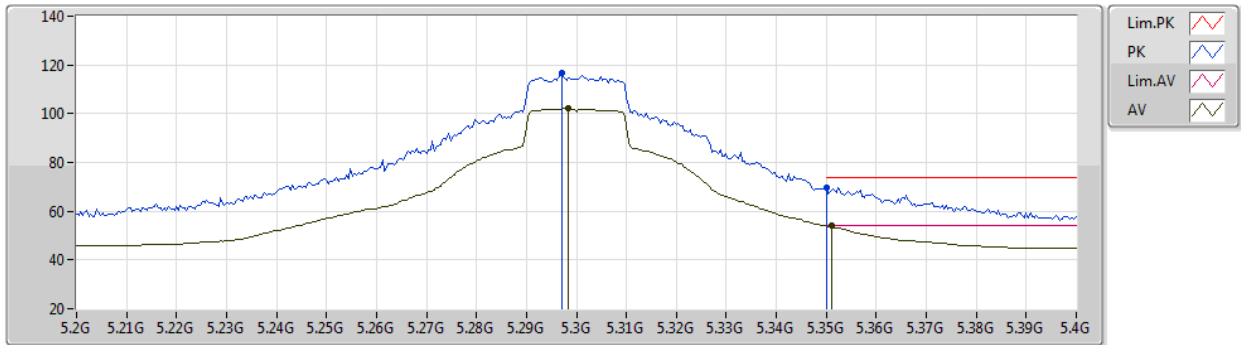


EUT Z_1TX
Setting 98
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2972G	116.49	Inf	-Inf	109.37	3	Vertical	76	2.17	-	33.69	5.05	31.62
AV	5.2984G	102.17	Inf	-Inf	95.04	3	Vertical	76	2.17	-	33.70	5.05	31.62
PK	5.35G	69.65	74.00	-4.35	62.50	3	Vertical	76	2.17	-	33.70	5.03	31.58
AV	5.351G	53.90	54.00	-0.10	46.76	3	Vertical	76	2.17	-	33.70	5.02	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5300MHz_TX

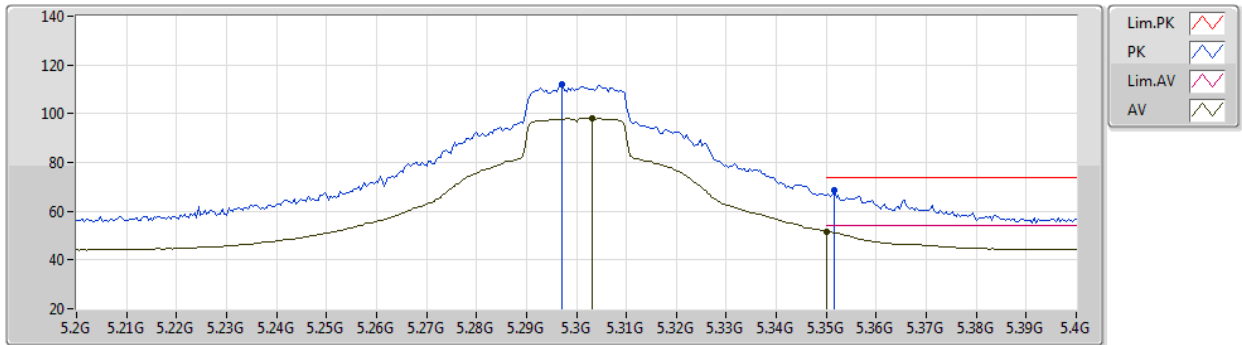


EUT Z_1TX
Setting 98
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2972G	112.07	Inf	-Inf	104.95	3	Horizontal	115	2.45	-	33.69	5.05	31.62
AV	5.3032G	98.01	Inf	-Inf	90.88	3	Horizontal	115	2.45	-	33.70	5.05	31.62
PK	5.3516G	68.54	74.00	-5.46	61.40	3	Horizontal	115	2.45	-	33.70	5.02	31.58
AV	5.35G	51.55	54.00	-2.45	44.40	3	Horizontal	115	2.45	-	33.70	5.03	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5300MHz_TX

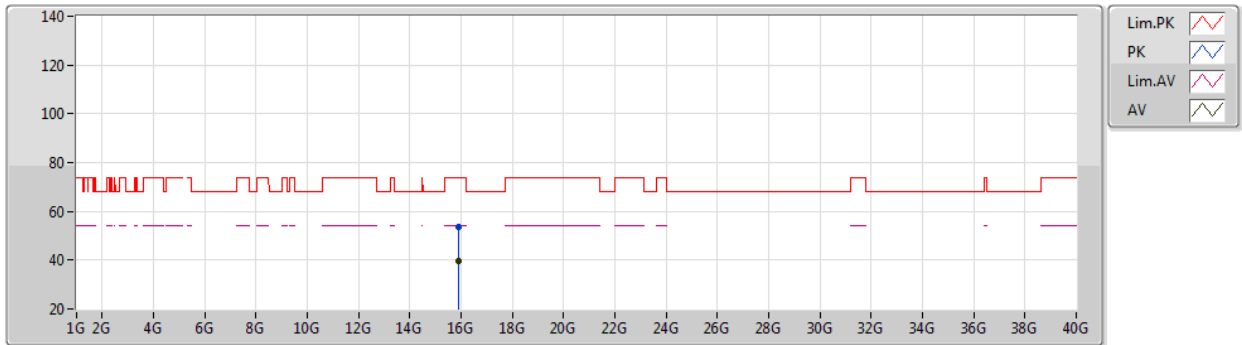


EUT Z_1TX
Setting 98
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.901G	53.60	74.00	-20.40	39.80	3	Vertical	281	2.70	-	37.50	9.17	32.87
AV	15.90544G	39.57	54.00	-14.43	25.78	3	Vertical	281	2.70	-	37.49	9.17	32.87

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5300MHz_TX

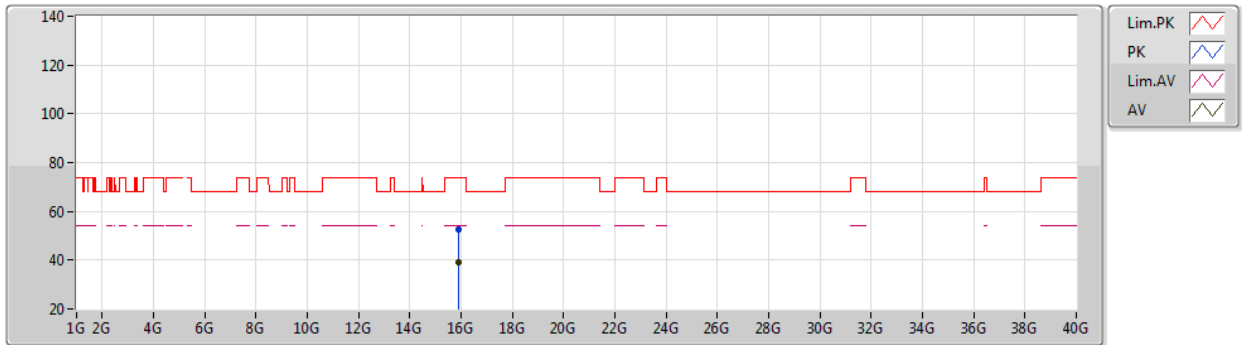


EUT Z_1TX
Setting 98
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.9098G	52.57	74.00	-21.43	38.78	3	Horizontal	259	1.27	-	37.49	9.17	32.87
AV	15.89056G	38.89	54.00	-15.11	25.11	3	Horizontal	259	1.27	-	37.49	9.16	32.87

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5320MHz_TX

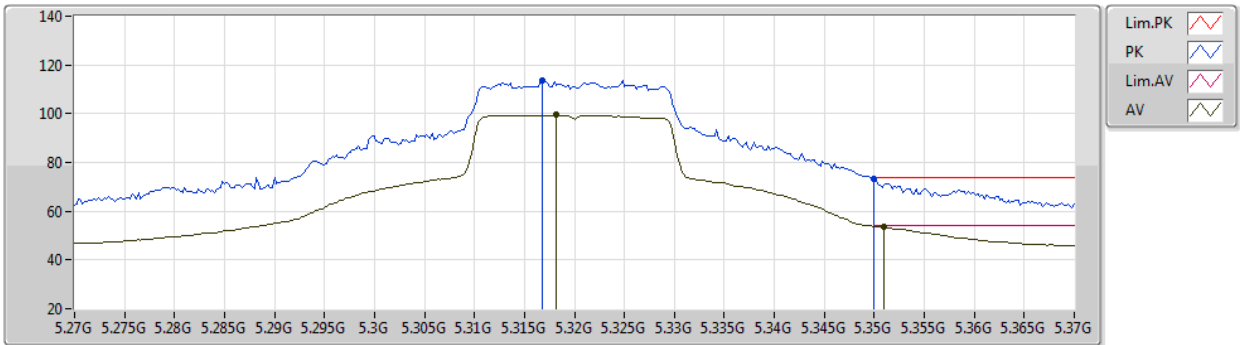


EUT Z_1TX
Setting 87
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3168G	113.70	Inf	-Inf	106.57	3	Vertical	76	2.15	-	33.70	5.04	31.61
AV	5.3182G	99.44	Inf	-Inf	92.30	3	Vertical	76	2.15	-	33.70	5.04	31.60
PK	5.35G	73.39	74.00	-0.61	66.24	3	Vertical	76	2.15	-	33.70	5.03	31.58
AV	5.351G	53.80	54.00	-0.20	46.66	3	Vertical	76	2.15	-	33.70	5.02	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5320MHz_TX

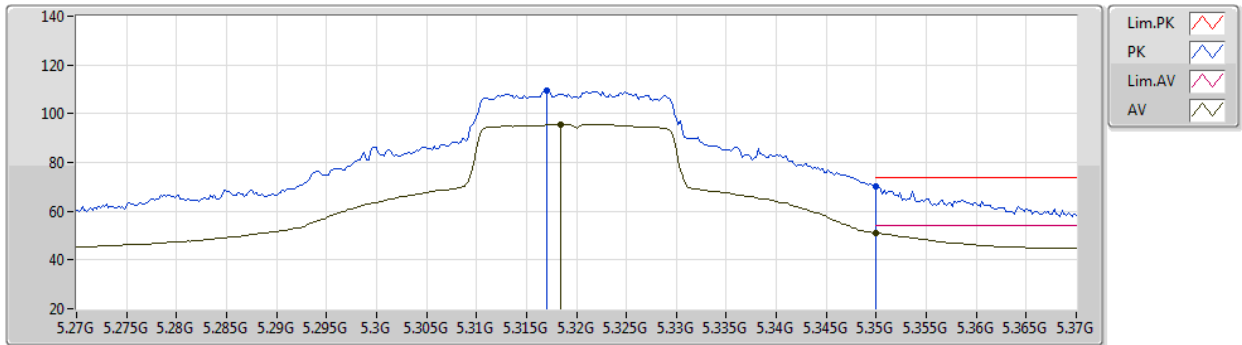


EUT_Z_1TX
Setting 87
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.317G	109.69	Inf	-Inf	102.56	3	Horizontal	114	2.47	-	33.70	5.04	31.61
AV	5.3184G	95.66	Inf	-Inf	88.52	3	Horizontal	114	2.47	-	33.70	5.04	31.60
PK	5.35G	69.93	74.00	-4.07	62.78	3	Horizontal	114	2.47	-	33.70	5.03	31.58
AV	5.35G	51.01	54.00	-2.99	43.86	3	Horizontal	114	2.47	-	33.70	5.03	31.58

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5320MHz_TX

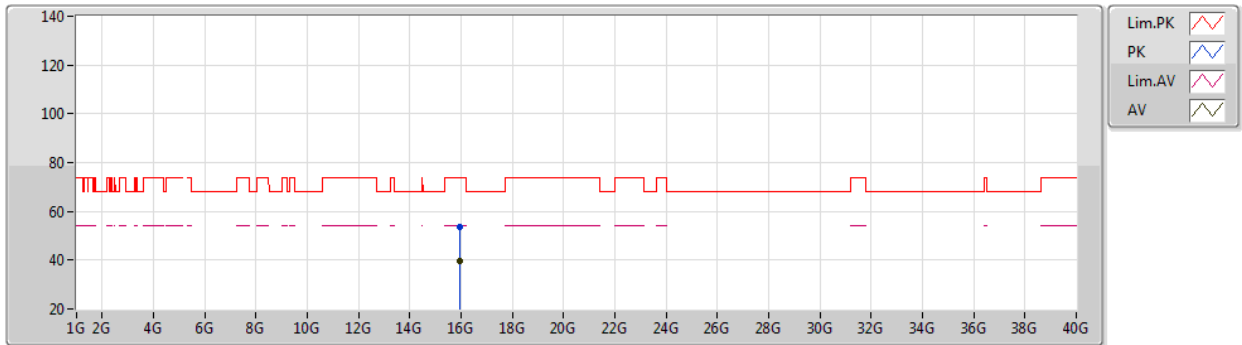


EUT Z_1TX
Setting 87
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.9508G	53.45	74.00	-20.55	39.70	3	Vertical	193	2.86	-	37.45	9.18	32.88
AV	15.95052G	39.40	54.00	-14.60	25.65	3	Vertical	193	2.86	-	37.45	9.18	32.88

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5320MHz_TX

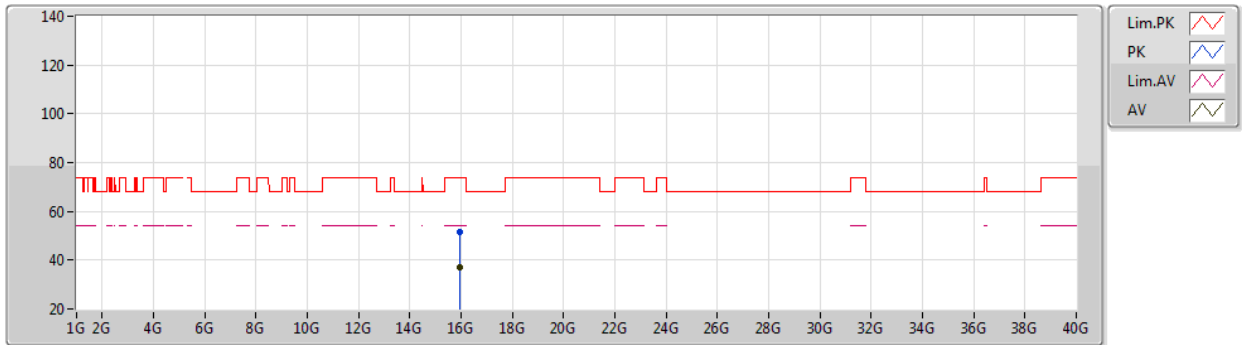


EUT Z_1TX
Setting 87
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.95072G	51.65	74.00	-22.35	37.90	3	Horizontal	39	1.28	-	37.45	9.18	32.88
AV	15.95048G	37.25	54.00	-16.75	23.50	3	Horizontal	39	1.28	-	37.45	9.18	32.88

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5500MHz_TX

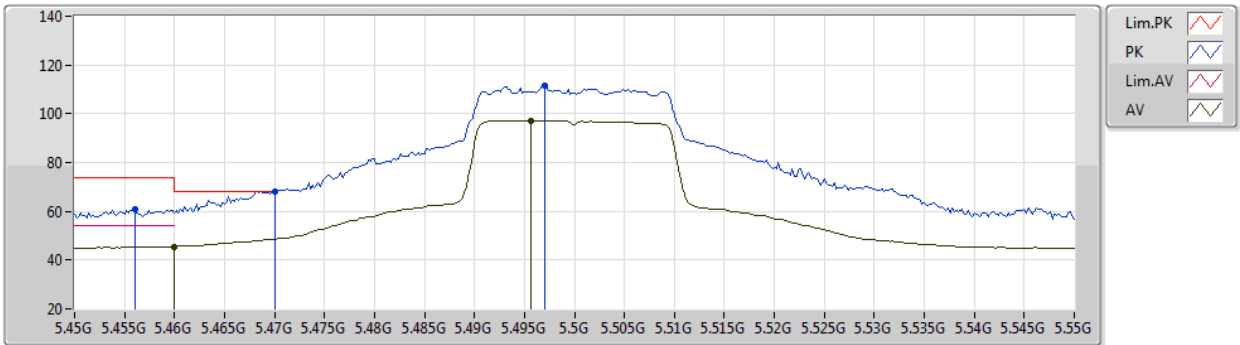


EUT Z_1TX
Setting 78
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.456G	60.70	74.00	-13.30	53.24	3	Vertical	302	2.61	-	33.90	5.06	31.50
AV	5.46G	45.59	54.00	-8.41	38.13	3	Vertical	302	2.61	-	33.90	5.06	31.50
PK	5.47G	68.02	68.20	-0.18	60.54	3	Vertical	302	2.61	-	33.90	5.07	31.49
PK	5.497G	111.55	Inf	-Inf	104.02	3	Vertical	302	2.61	-	33.90	5.10	31.47
AV	5.4956G	97.23	Inf	-Inf	89.70	3	Vertical	302	2.61	-	33.90	5.10	31.47

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5500MHz_TX

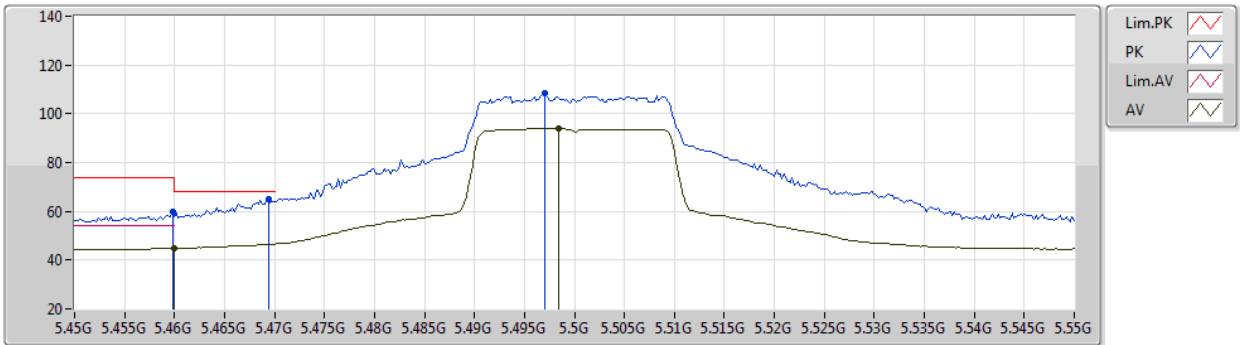


EUT Z_1TX
Setting 78
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4598G	59.77	74.00	-14.23	52.31	3	Horizontal	128	2.78	-	33.90	5.06	31.50
AV	5.46G	44.80	54.00	-9.20	37.34	3	Horizontal	128	2.78	-	33.90	5.06	31.50
PK	5.4694G	64.84	68.20	-3.36	57.36	3	Horizontal	128	2.78	-	33.90	5.07	31.49
PK	5.497G	108.21	Inf	-Inf	100.68	3	Horizontal	128	2.78	-	33.90	5.10	31.47
AV	5.4984G	94.05	Inf	-Inf	86.52	3	Horizontal	128	2.78	-	33.90	5.10	31.47

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5500MHz_TX

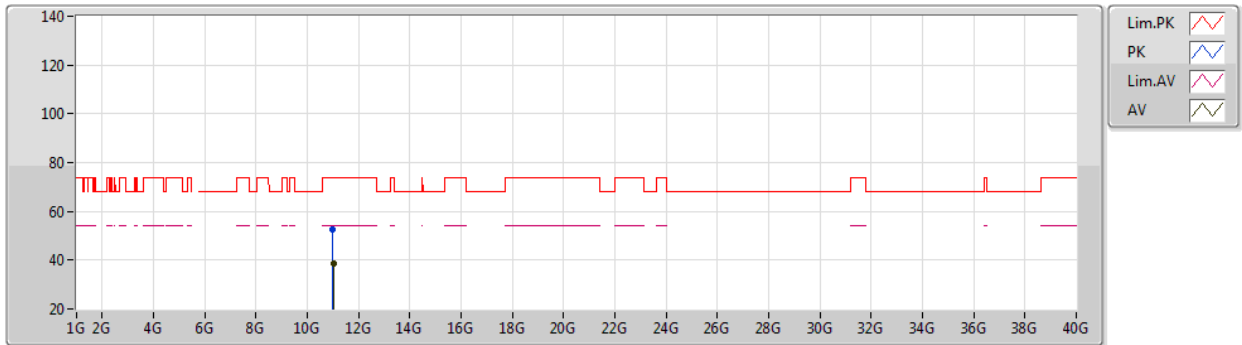


EUT Z_1TX
Setting 78
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.00676G	52.69	74.00	-21.31	39.49	3	Vertical	259	2.02	-	38.51	7.45	32.76
AV	11.00968G	38.44	54.00	-15.56	25.24	3	Vertical	259	2.02	-	38.51	7.45	32.76

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5500MHz_TX

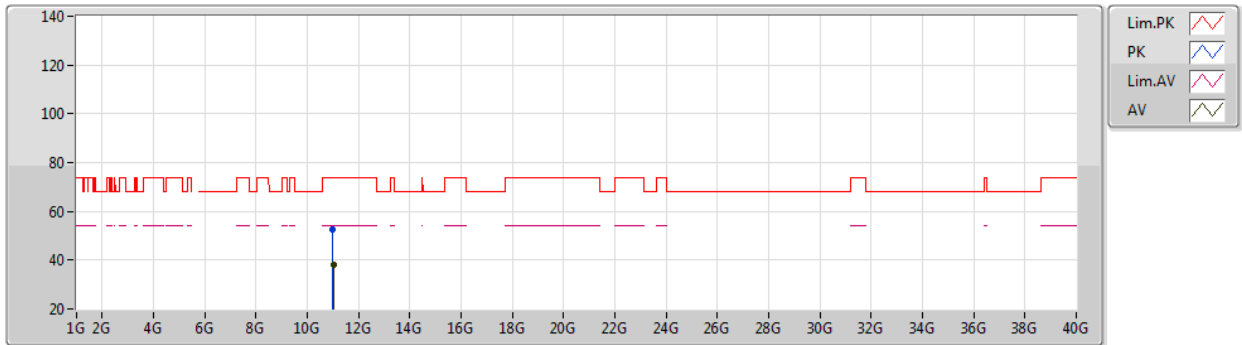


EUT Z_1TX
Setting 78
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.00708G	52.63	74.00	-21.37	39.43	3	Horizontal	281	1.48	-	38.51	7.45	32.76
AV	11.00948G	38.34	54.00	-15.66	25.14	3	Horizontal	281	1.48	-	38.51	7.45	32.76

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5580MHz_TX

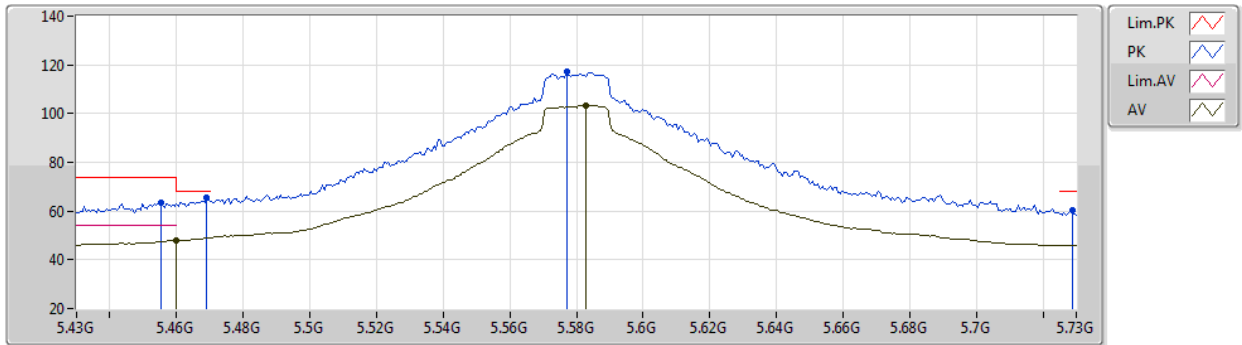


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4552G	63.47	74.00	-10.53	56.01	3	Vertical	300	2.54	-	33.90	5.06	31.50
AV	5.46G	47.92	54.00	-6.08	40.46	3	Vertical	300	2.54	-	33.90	5.06	31.50
PK	5.469G	65.45	68.20	-2.75	57.97	3	Vertical	300	2.54	-	33.90	5.07	31.49
PK	5.577G	117.00	Inf	-Inf	109.39	3	Vertical	300	2.54	-	33.90	5.18	31.47
AV	5.583G	103.42	Inf	-Inf	95.81	3	Vertical	300	2.54	-	33.90	5.18	31.47
PK	5.7288G	60.51	68.20	-7.69	53.14	3	Vertical	300	2.54	-	33.76	5.07	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5580MHz_TX

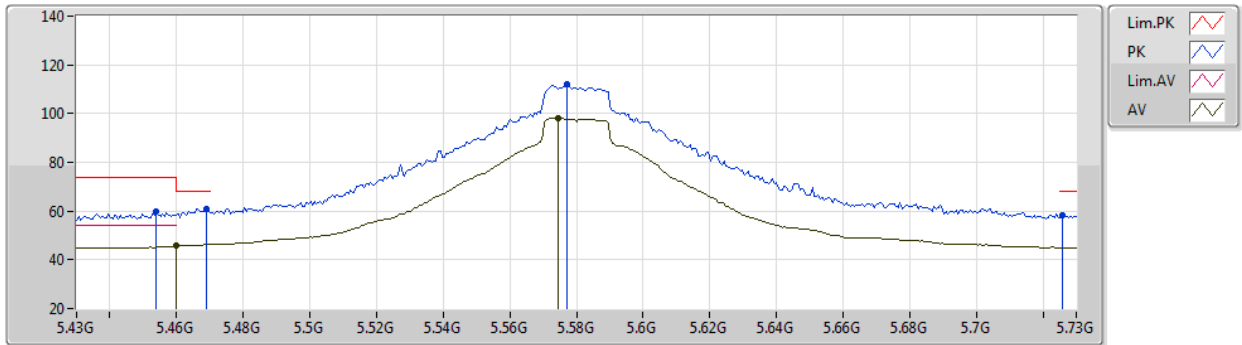


EUT_Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.454G	59.63	74.00	-14.37	52.18	3	Horizontal	121	2.73	-	33.90	5.05	31.50
AV	5.46G	45.69	54.00	-8.31	38.23	3	Horizontal	121	2.73	-	33.90	5.06	31.50
PK	5.469G	60.69	68.20	-7.51	53.21	3	Horizontal	121	2.73	-	33.90	5.07	31.49
PK	5.577G	112.12	Inf	-Inf	104.51	3	Horizontal	121	2.73	-	33.90	5.18	31.47
AV	5.5746G	98.04	Inf	-Inf	90.44	3	Horizontal	121	2.73	-	33.90	5.17	31.47
PK	5.7258G	58.10	68.20	-10.10	50.74	3	Horizontal	121	2.73	-	33.75	5.07	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5580MHz_TX

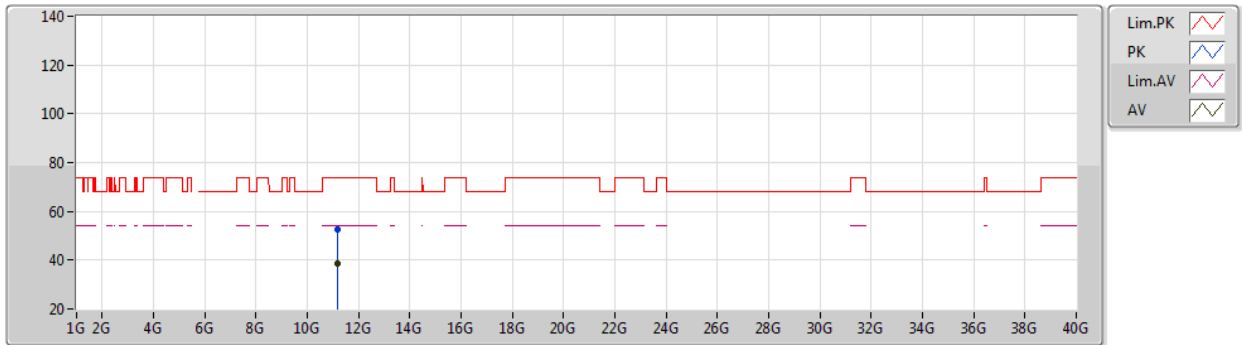


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.16248G	52.34	74.00	-21.66	38.99	3	Vertical	273	2.31	-	38.66	7.51	32.82
AV	11.1608G	38.49	54.00	-15.51	25.13	3	Vertical	273	2.31	-	38.66	7.51	32.81

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5580MHz_TX

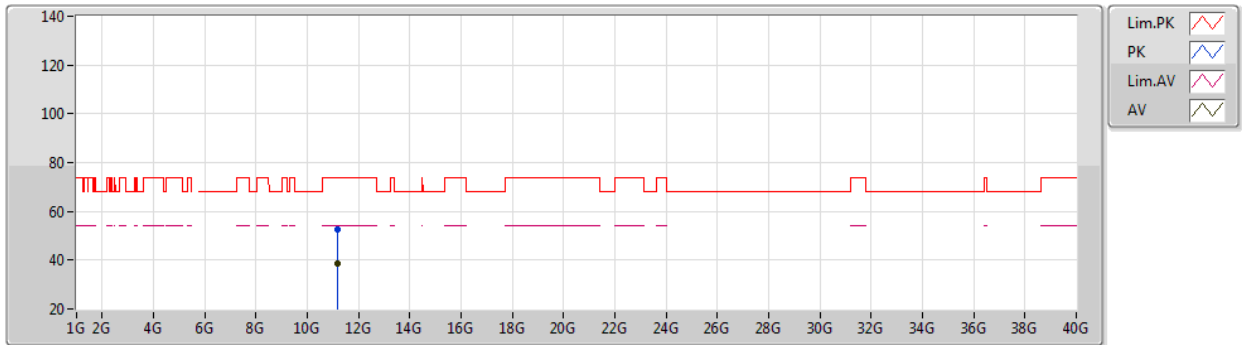


EUT Z_1TX
Setting 104
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.1628G	52.55	74.00	-21.45	39.20	3	Horizontal	126	1.66	-	38.66	7.51	32.82
AV	11.1608G	38.48	54.00	-15.52	25.12	3	Horizontal	126	1.66	-	38.66	7.51	32.81

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5700MHz_TX

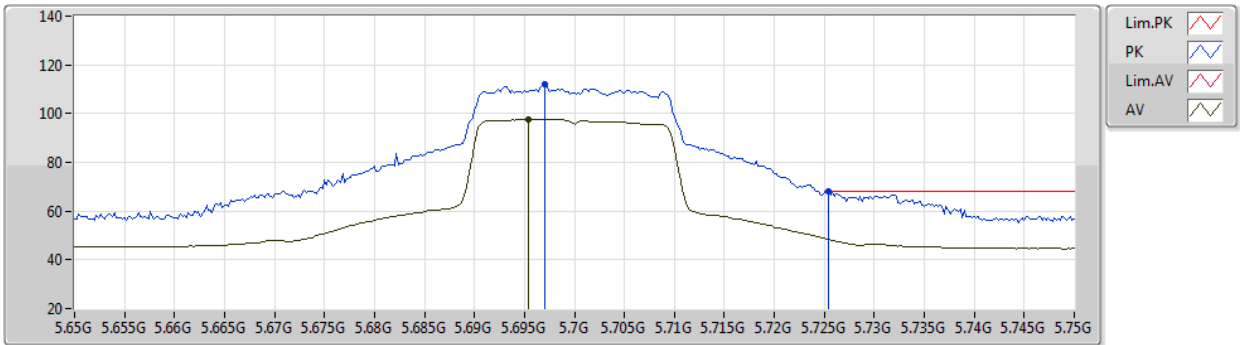


EUT Z_1TX
Setting 72
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.697G	111.87	Inf	-Inf	104.52	3	Vertical	305	2.46	-	33.71	5.10	31.46
AV	5.6954G	97.63	Inf	-Inf	90.28	3	Vertical	305	2.46	-	33.71	5.10	31.46
PK	5.7254G	68.18	68.20	-0.02	60.82	3	Vertical	305	2.46	-	33.75	5.07	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5700MHz_TX

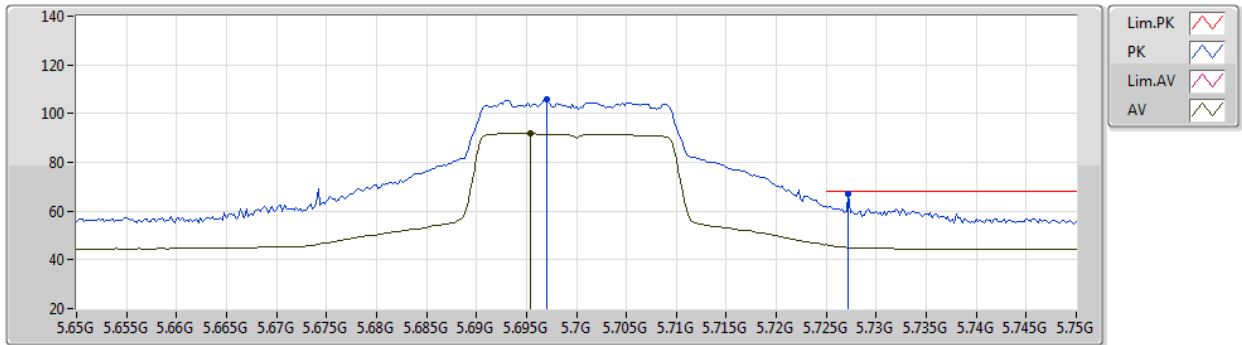


EUT Z_1TX
Setting 72
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.697G	105.87	Inf	-Inf	98.52	3	Horizontal	327	2.81	-	33.71	5.10	31.46
AV	5.6954G	91.86	Inf	-Inf	84.51	3	Horizontal	327	2.81	-	33.71	5.10	31.46
PK	5.7272G	67.20	68.20	-1.00	59.84	3	Horizontal	327	2.81	-	33.75	5.07	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5700MHz_TX

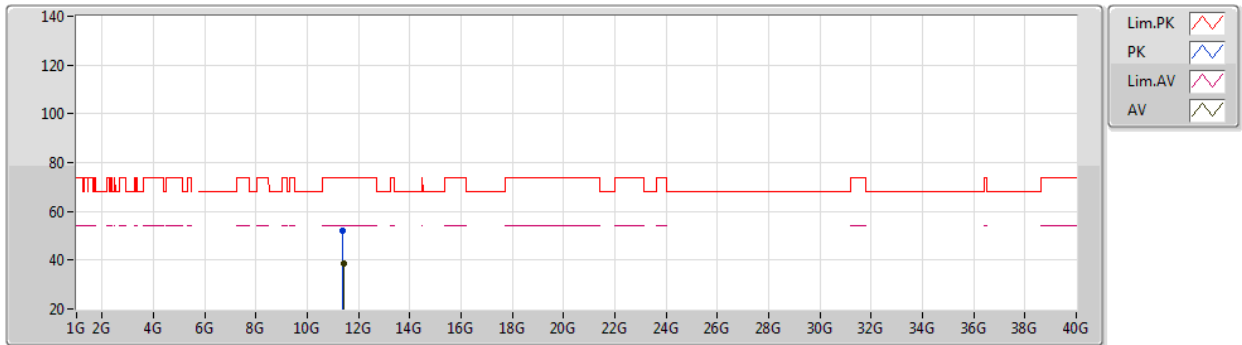


EUT Z_1TX
Setting 72
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.39716G	52.18	74.00	-21.82	38.69	3	Vertical	59	2.20	-	38.80	7.59	32.90
AV	11.40896G	38.65	54.00	-15.35	25.14	3	Vertical	59	2.20	-	38.82	7.59	32.90

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5700MHz_TX

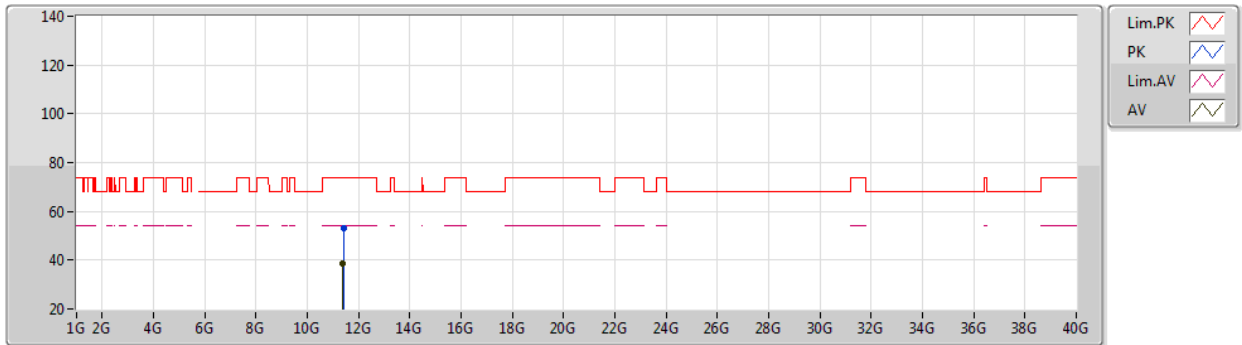


EUT Z_1TX
Setting 72
02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.4028G	53.26	74.00	-20.74	39.76	3	Horizontal	250	2.62	-	38.81	7.59	32.90
AV	11.39428G	38.60	54.00	-15.40	25.11	3	Horizontal	250	2.62	-	38.79	7.59	32.89

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

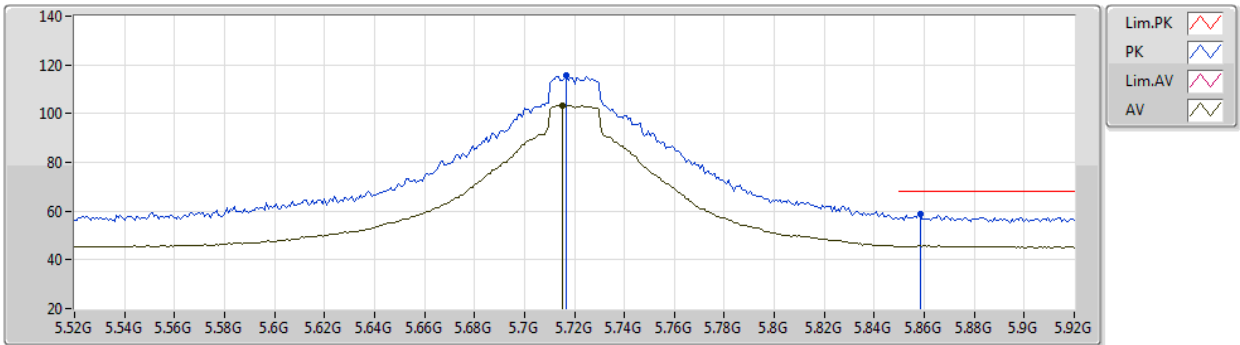


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7168G	115.86	Inf	-Inf	108.51	3	Vertical	305	2.53	-	33.73	5.08	31.46
AV	5.7152G	103.29	Inf	-Inf	95.94	3	Vertical	305	2.53	-	33.73	5.08	31.46
PK	5.8584G	58.72	68.20	-9.48	51.17	3	Vertical	305	2.53	-	33.83	5.18	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX

27/05/2021

5720MHz Straddle 5.47-5.725GHz_TX

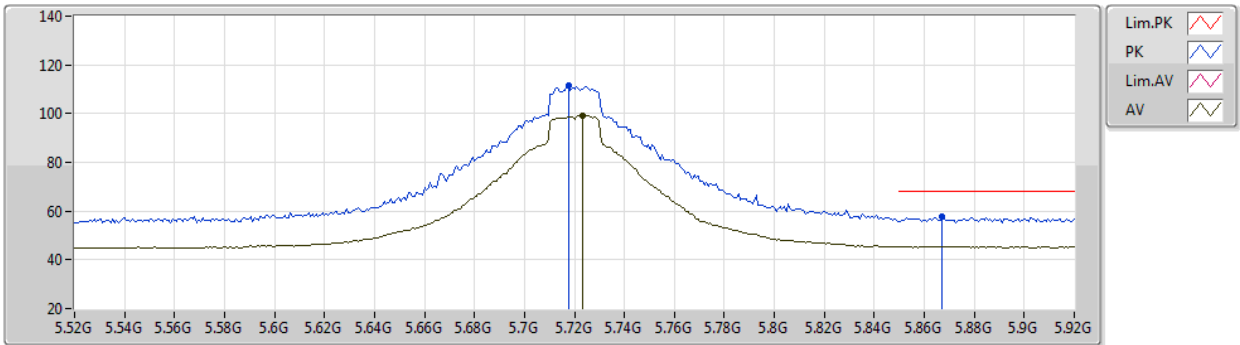


EUT Z_1TX
Setting 104
02-B-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7176G	111.65	Inf	-Inf	104.29	3	Horizontal	110	2.63	-	33.74	5.08	31.46
AV	5.7232G	99.19	Inf	-Inf	91.82	3	Horizontal	110	2.63	-	33.75	5.08	31.46
PK	5.8672G	57.76	68.20	-10.44	50.15	3	Horizontal	110	2.63	-	33.87	5.20	31.46

802.11ax HEW20_Nss1,(MCS0)_1TX
5720MHz Straddle 5.47-5.725GHz_TX

27/05/2021

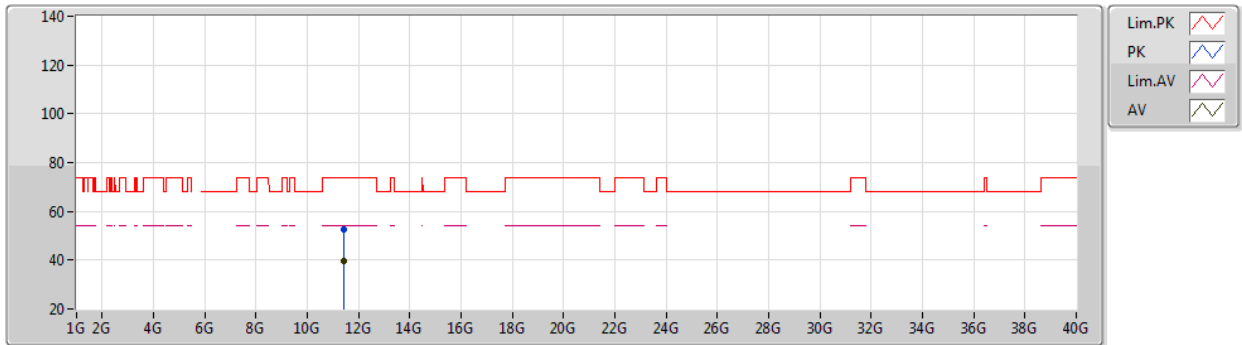


EUT Z_1TX
 Setting 104
 02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.444G	52.80	74.00	-21.20	39.21	3	Vertical	196	1.18	-	38.89	7.61	32.91
AV	11.44784G	39.44	54.00	-14.56	25.84	3	Vertical	196	1.18	-	38.90	7.61	32.91

802.11ax HEW20_Nss1,(MCS0)_1TX
5720MHz Straddle 5.47-5.725GHz_TX

27/05/2021

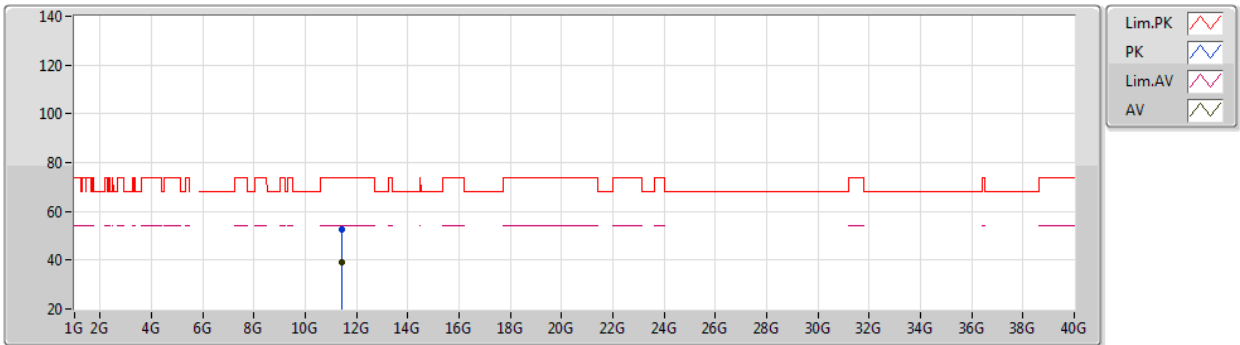


EUT Z_1TX
 Setting 104
 02-B-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.44404G	52.50	74.00	-21.50	38.91	3	Horizontal	310	1.47	-	38.89	7.61	32.91
AV	11.44624G	39.38	54.00	-14.62	25.79	3	Horizontal	310	1.47	-	38.89	7.61	32.91

802.11ax HEW40_Nss1,(MCS0)_1TX

27/05/2021

5270MHz_TX

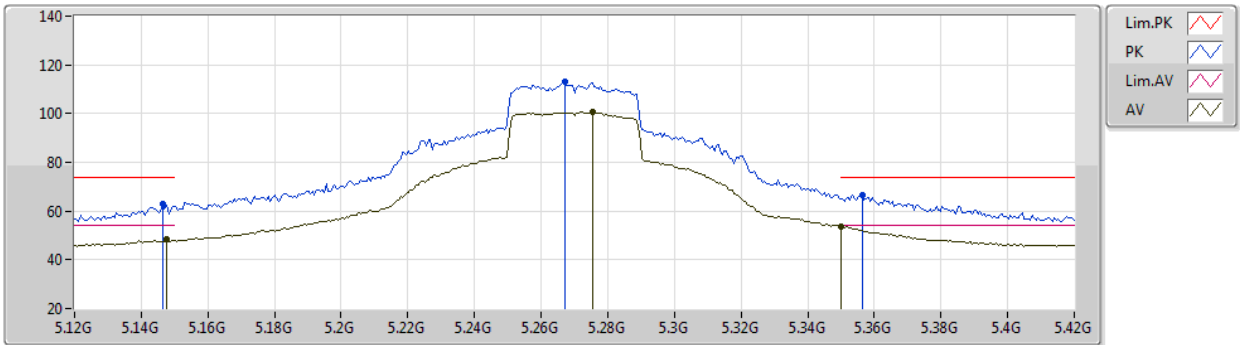

EUT Z_1TX
Setting 95
02-B-J-7-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1464G	62.78	74.00	-11.22	56.02	3	Vertical	73	2.29	-	33.50	4.99	31.73
AV	5.1476G	48.41	54.00	-5.59	41.64	3	Vertical	73	2.29	-	33.50	5.00	31.73
PK	5.267G	112.94	Inf	-Inf	105.88	3	Vertical	73	2.29	-	33.63	5.07	31.64
AV	5.2754G	100.65	Inf	-Inf	93.58	3	Vertical	73	2.29	-	33.65	5.06	31.64
PK	5.3564G	66.58	74.00	-7.42	59.43	3	Vertical	73	2.29	-	33.71	5.02	31.58
AV	5.35G	53.76	54.00	-0.24	46.61	3	Vertical	73	2.29	-	33.70	5.03	31.58