



2437MHz by 802.11ax(20MHz):

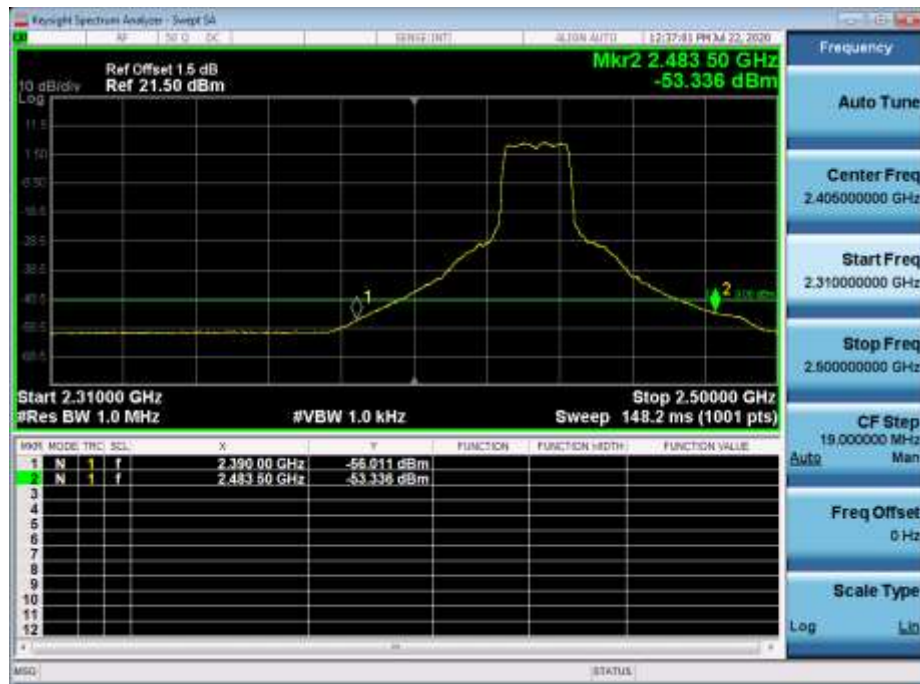

2457MHz by 802.11ax(20MHz):

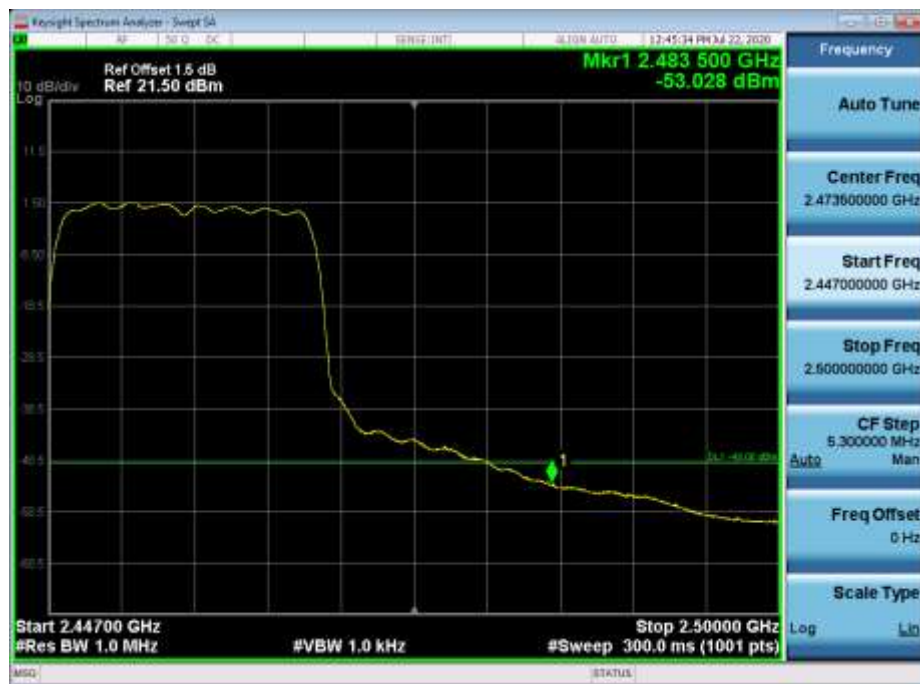


2462MHz by 802.11ax(20MHz):




PK Limit-SISO:


2412MHz by 802.11b:

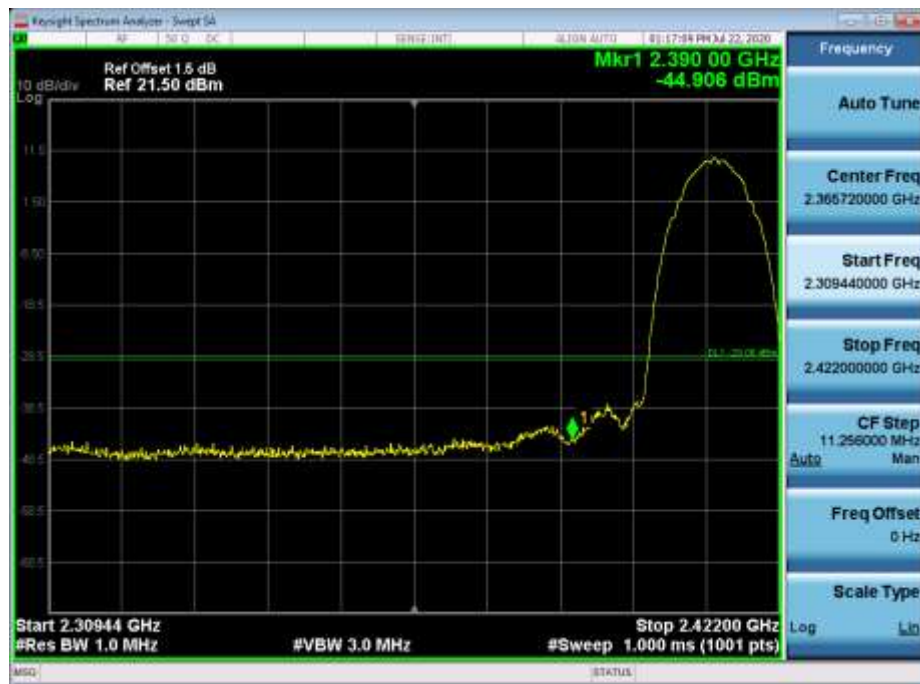


2417MHz by 802.11b:

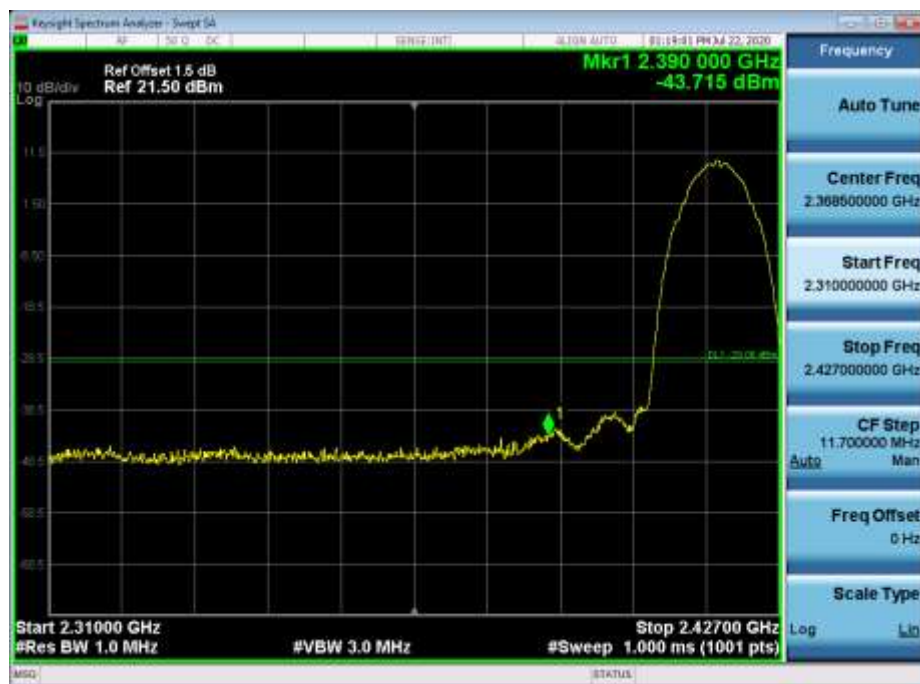

2437MHz by 802.11b:

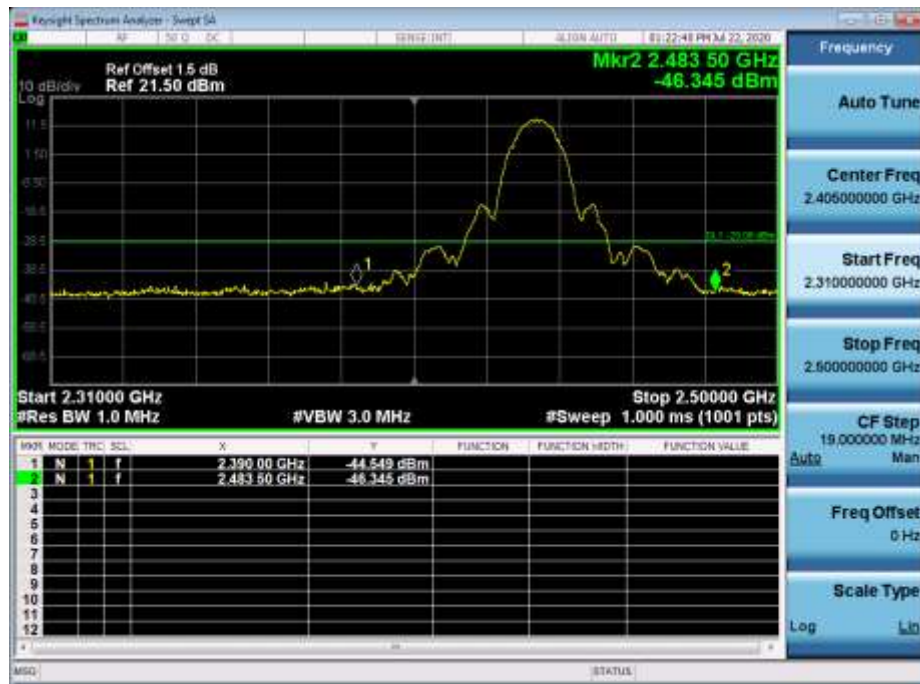


2457MHz by 802.11b:

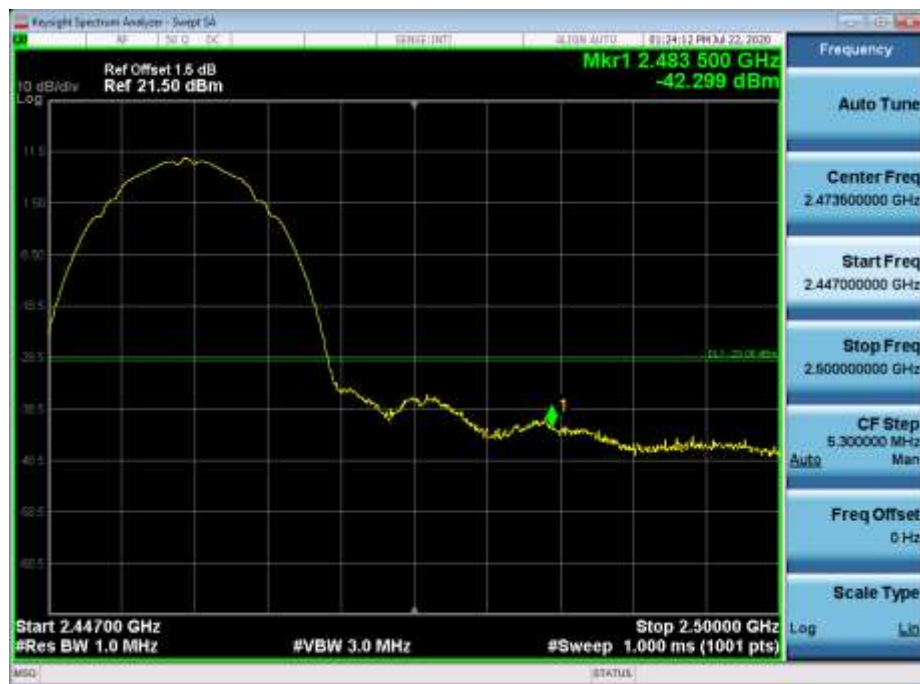


2462MHz by 802.11b:




2412MHz by 802.11g:

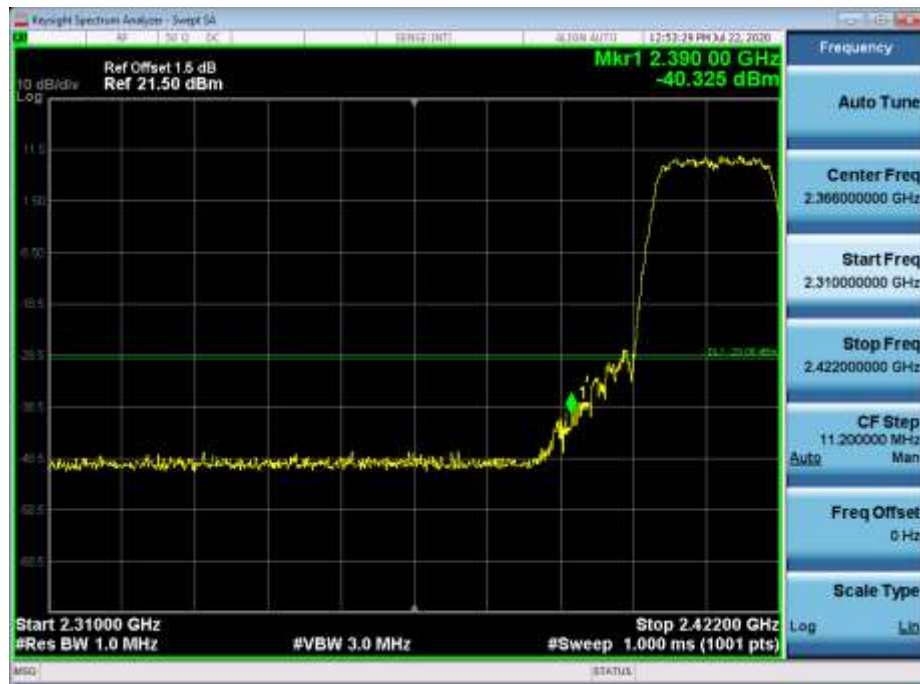


2417MHz by 802.11g:

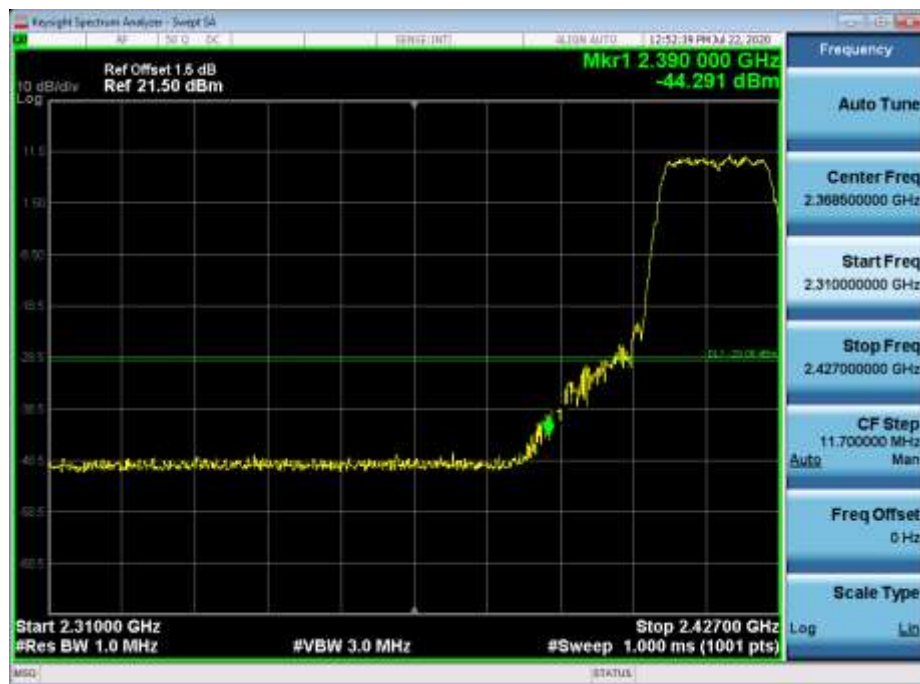


2437MHz by 802.11g:

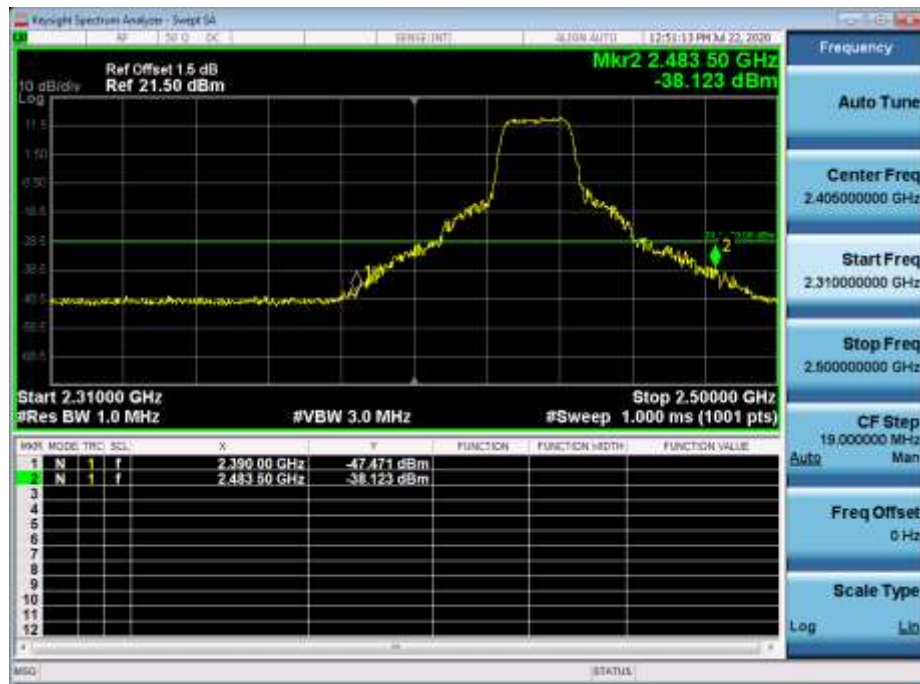


2457MHz by 802.11g:

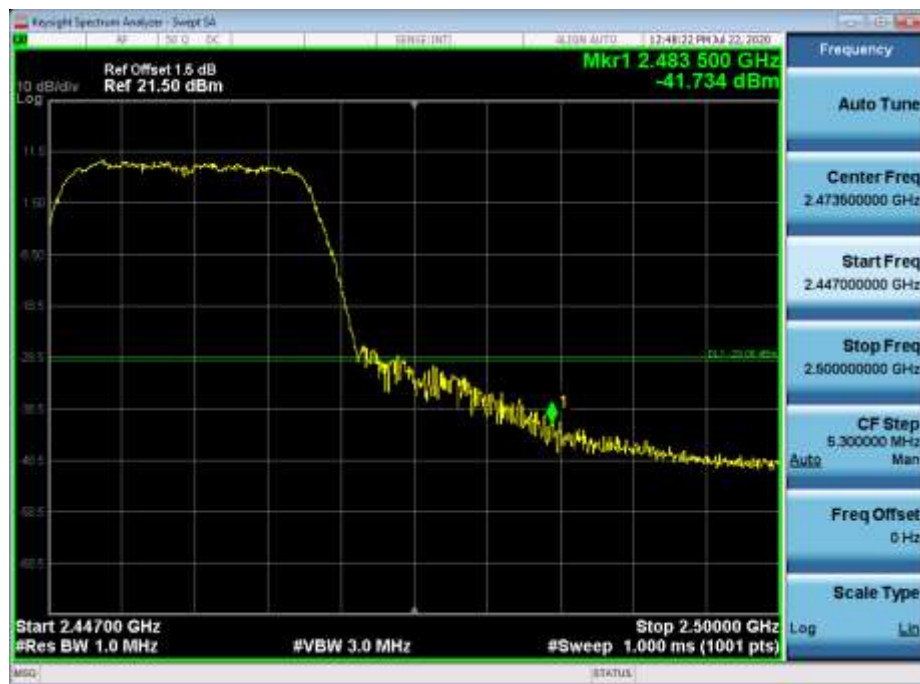


2462MHz by 802.11g:

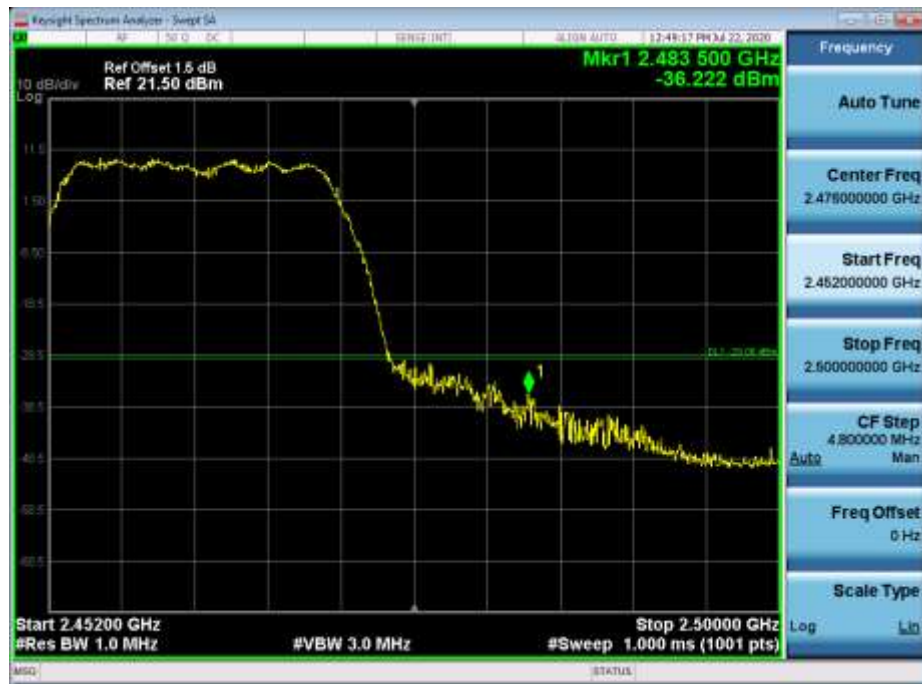


2412MHz by 802.11n(20MHz):

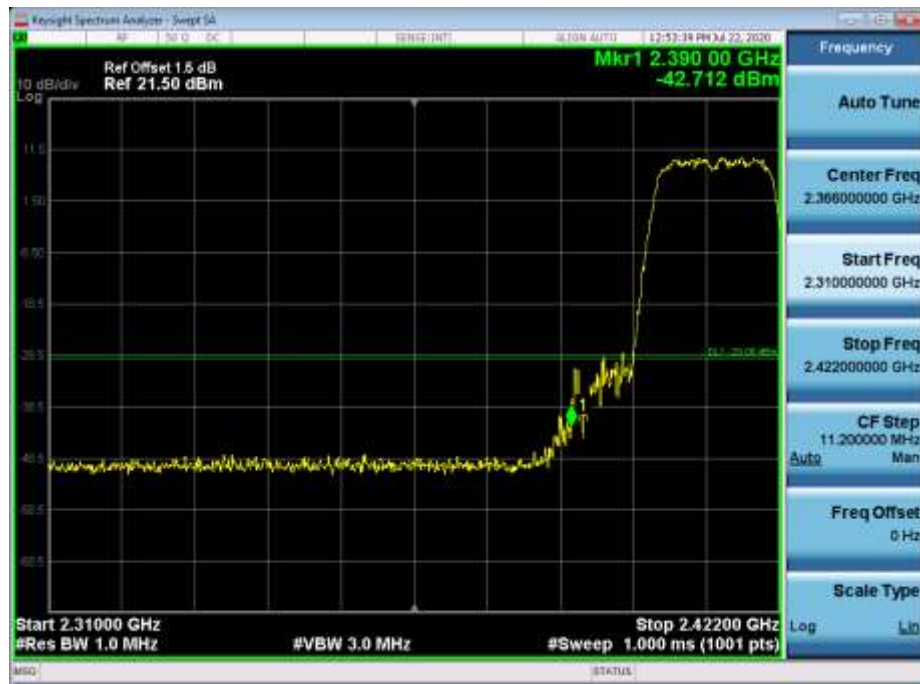


2417MHz by 802.11n(20MHz):

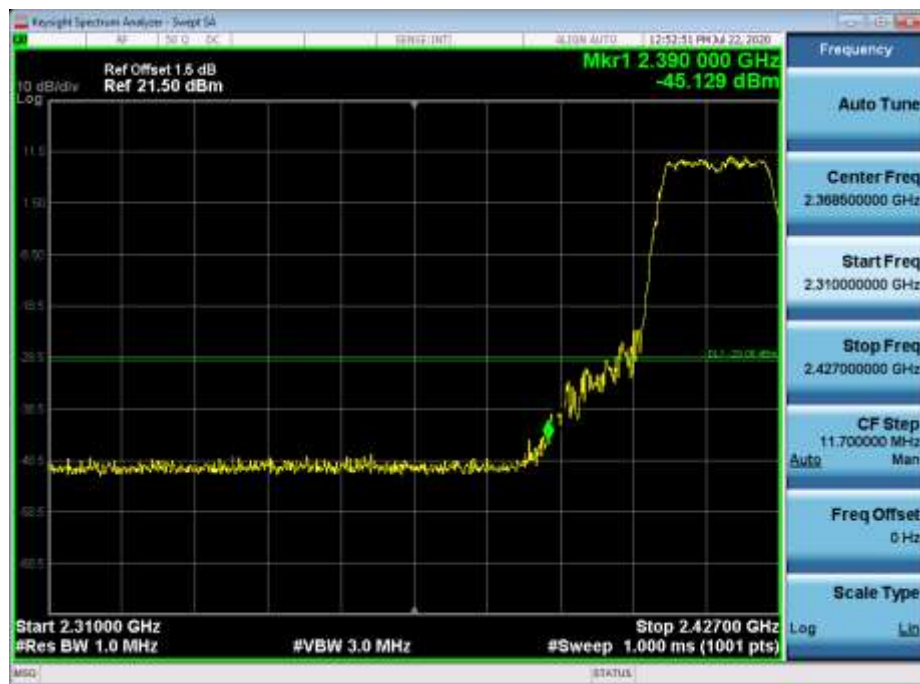


2437MHz by 802.11n(20MHz):

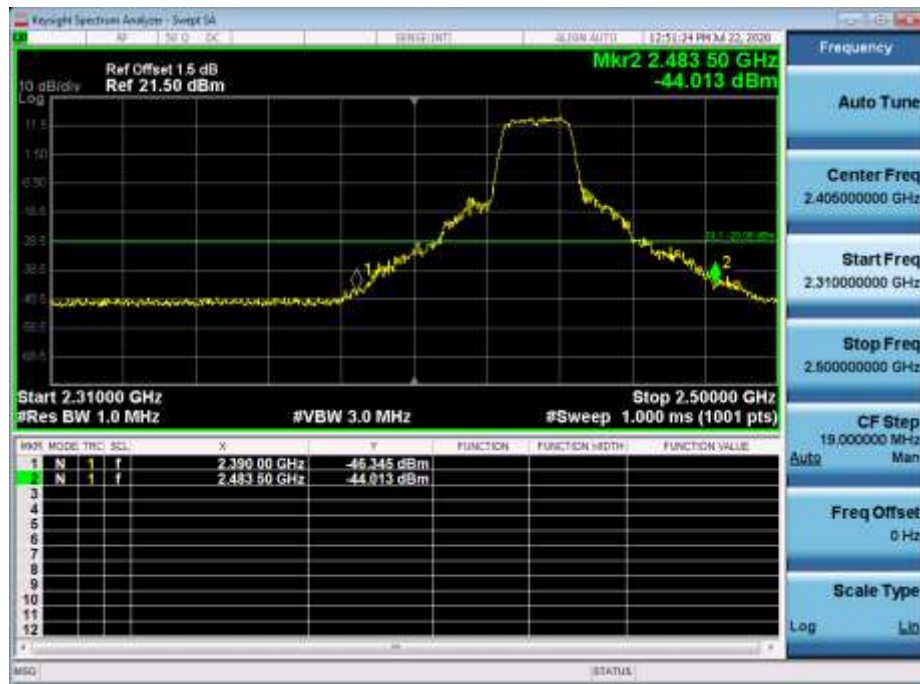


2457MHz by 802.11n(20MHz):

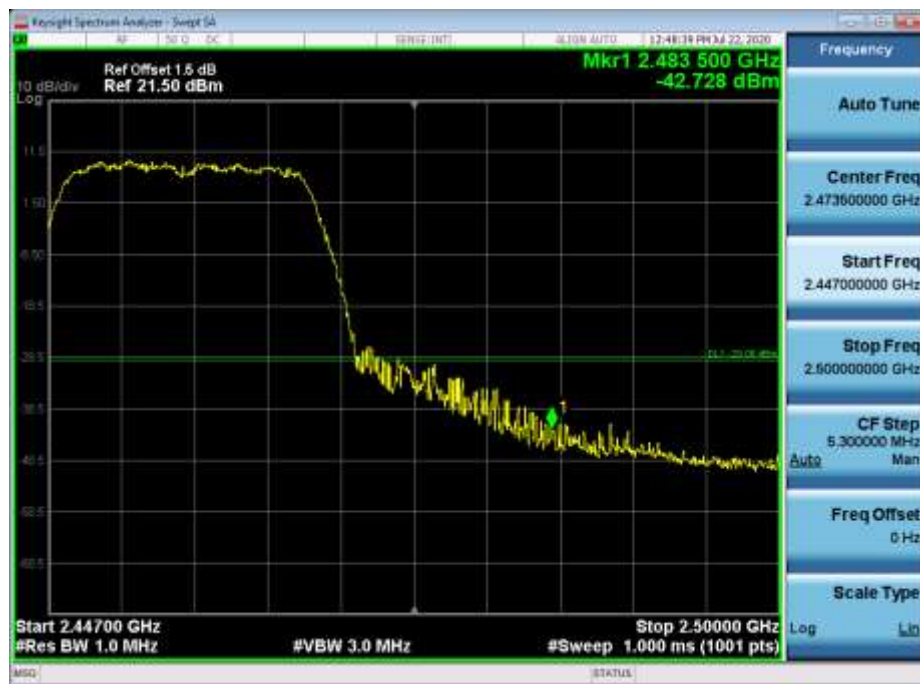


2462MHz by 802.11n(20MHz):

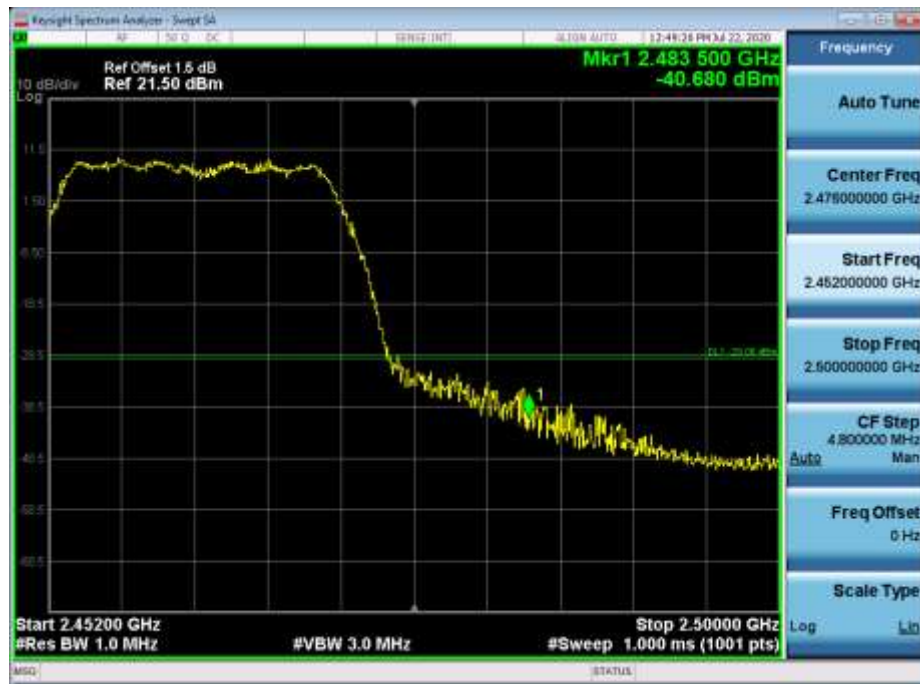


2412MHz by 802.11ax(20MHz):

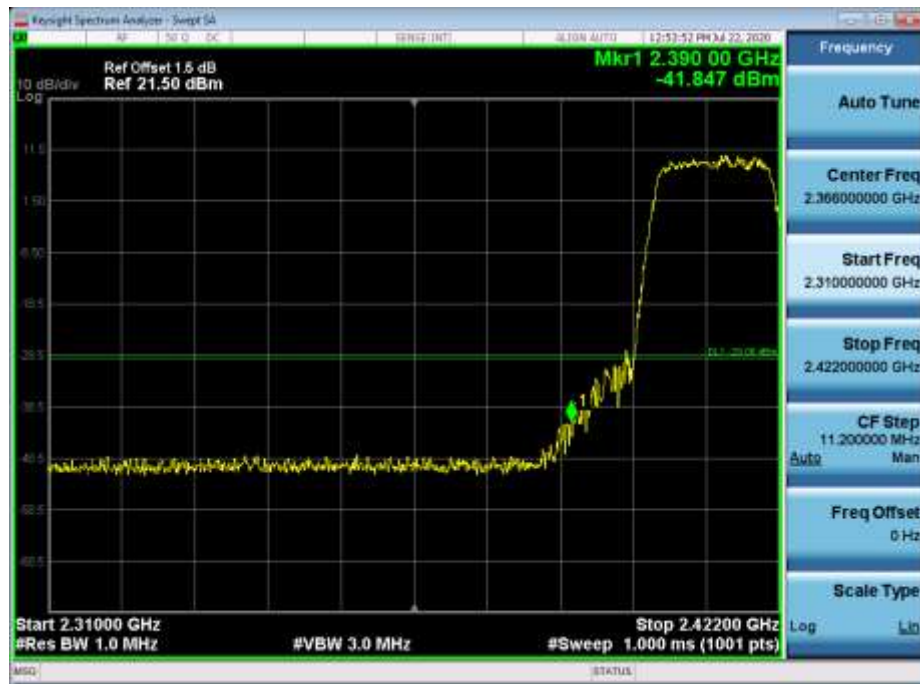


2417MHz by 802.11ax(20MHz):

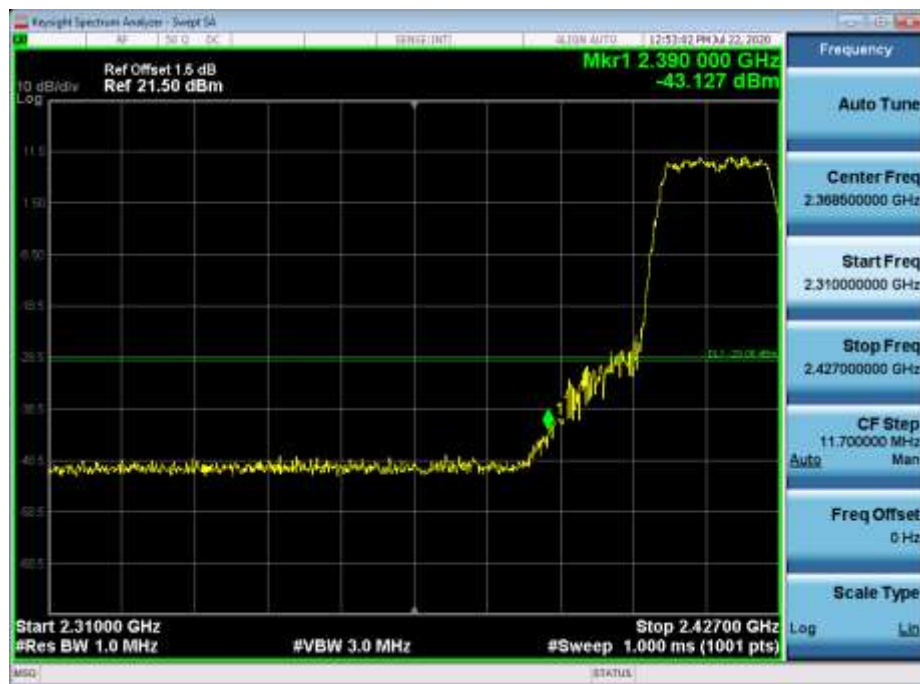


2437MHz by 802.11ax(20MHz):


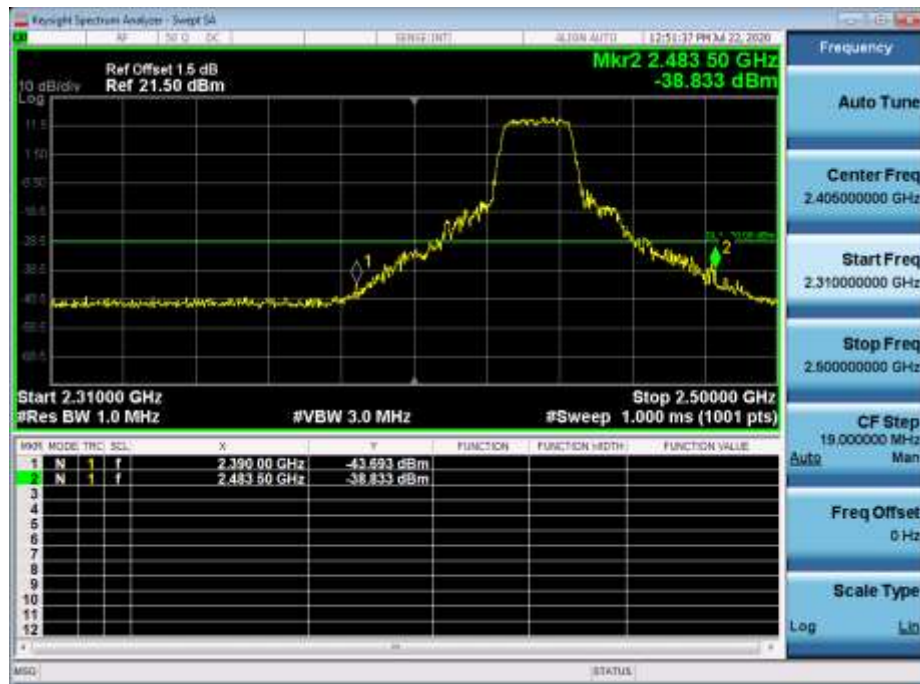


2457MHz by 802.11ax(20MHz):

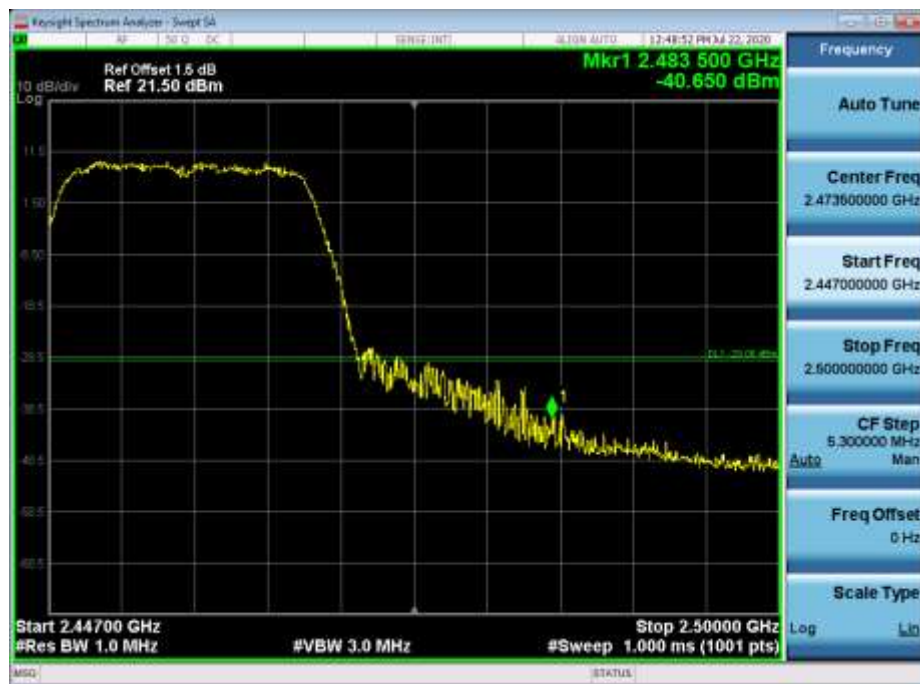

2462MHz by 802.11ax(20MHz):

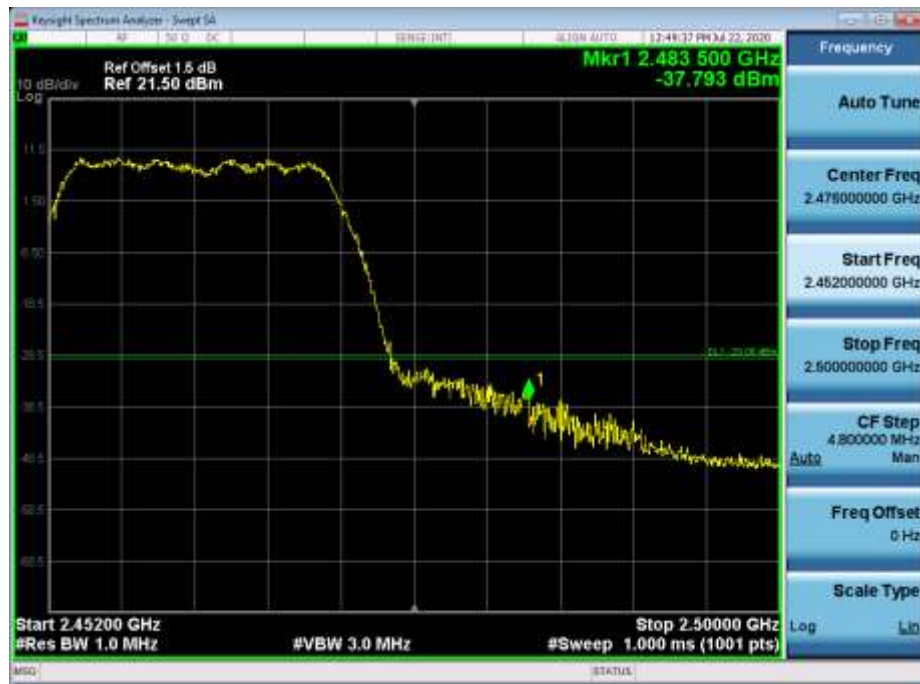


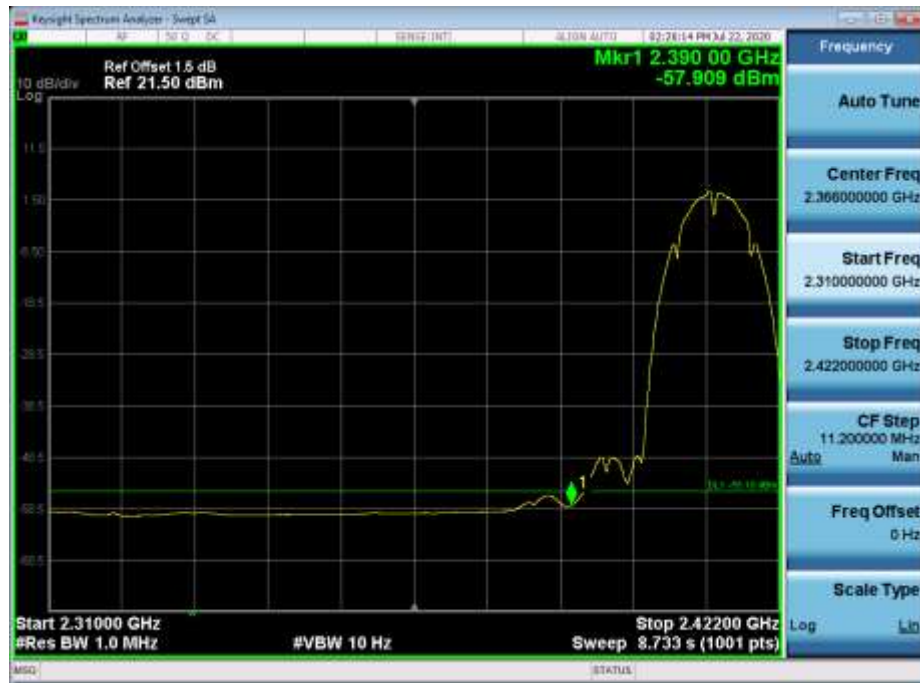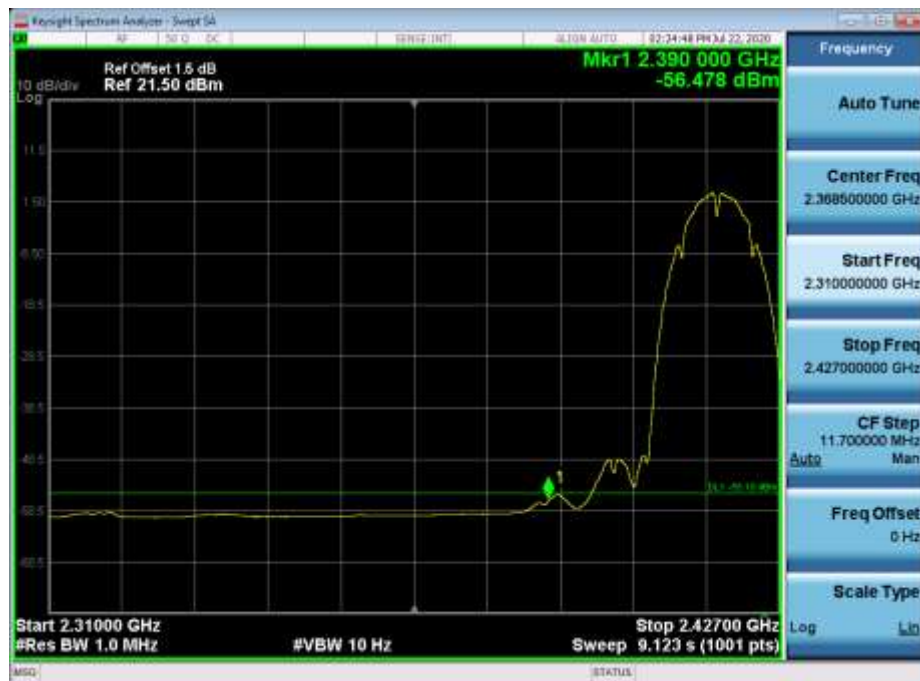Radio 2**AV Limit-CDD:****2412MHz by 802.11b:****2417MHz by 802.11b:**

2437MHz by 802.11b:




2457MHz by 802.11b:

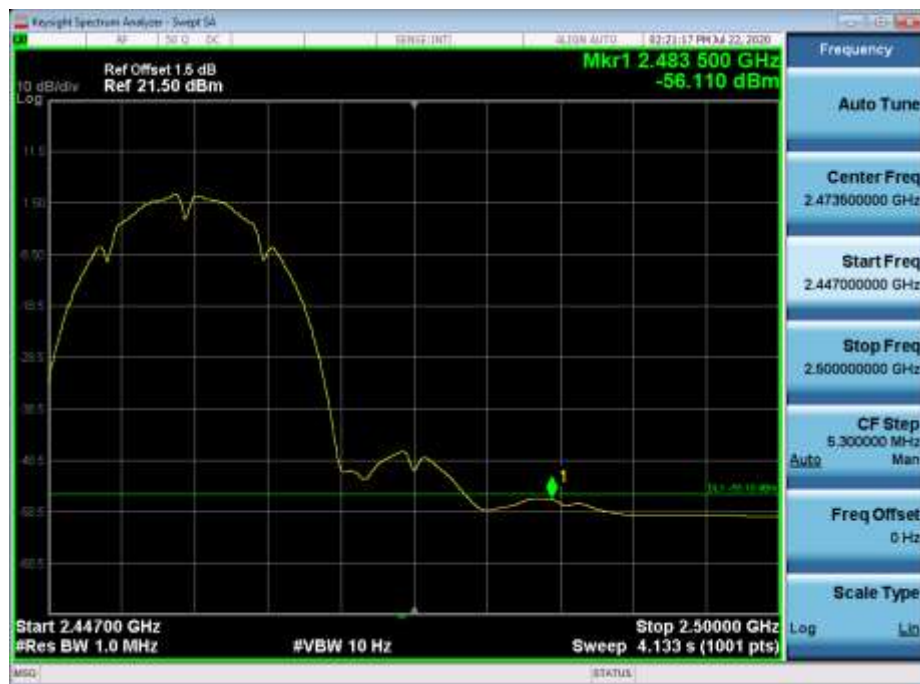


2462MHz by 802.11b:




2412MHz by 802.11g:

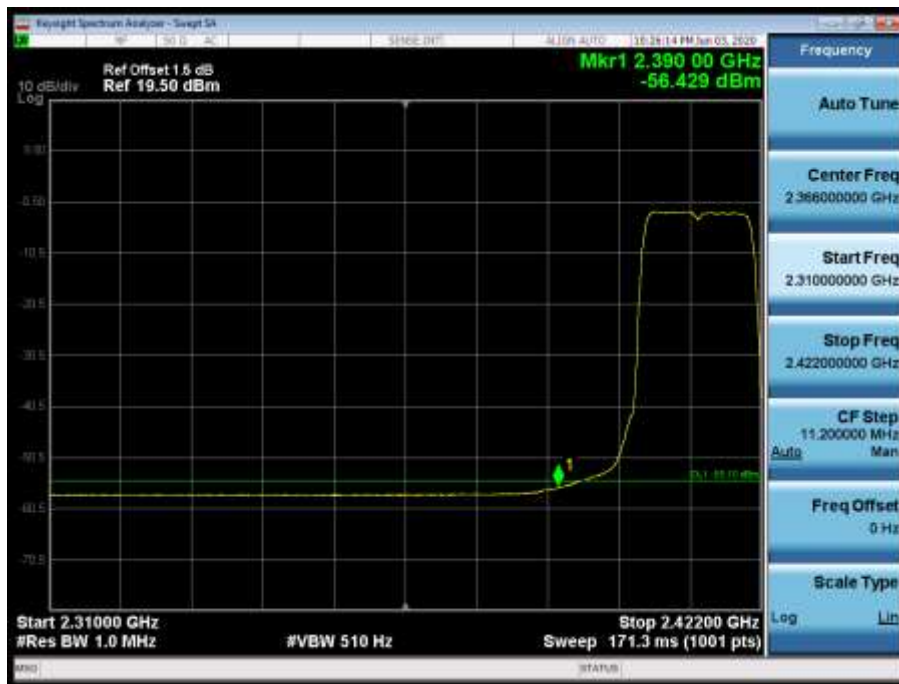


2417MHz by 802.11g:

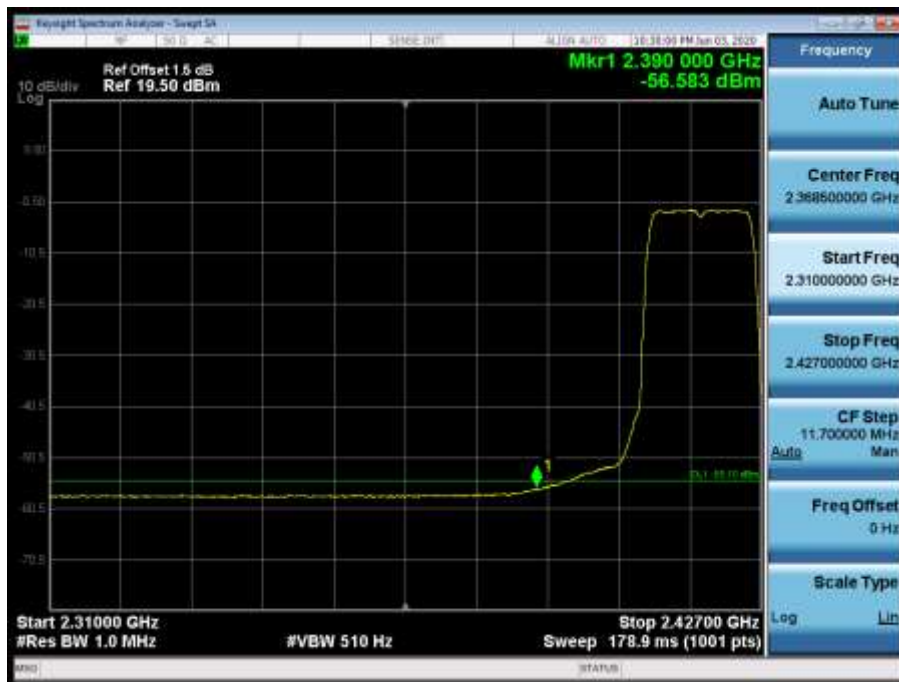

2437MHz by 802.11g:

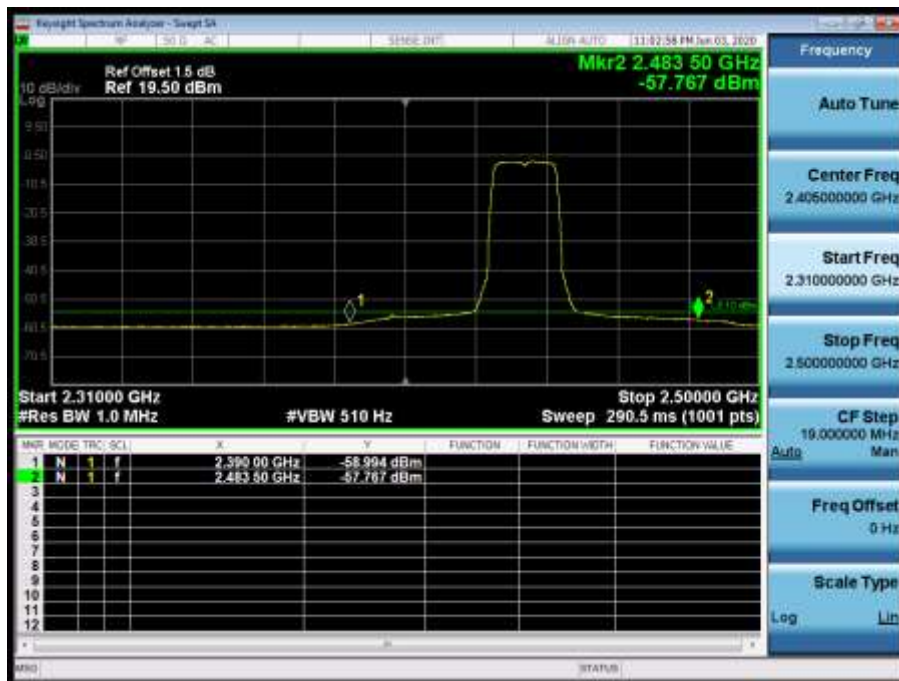


2457MHz by 802.11g:

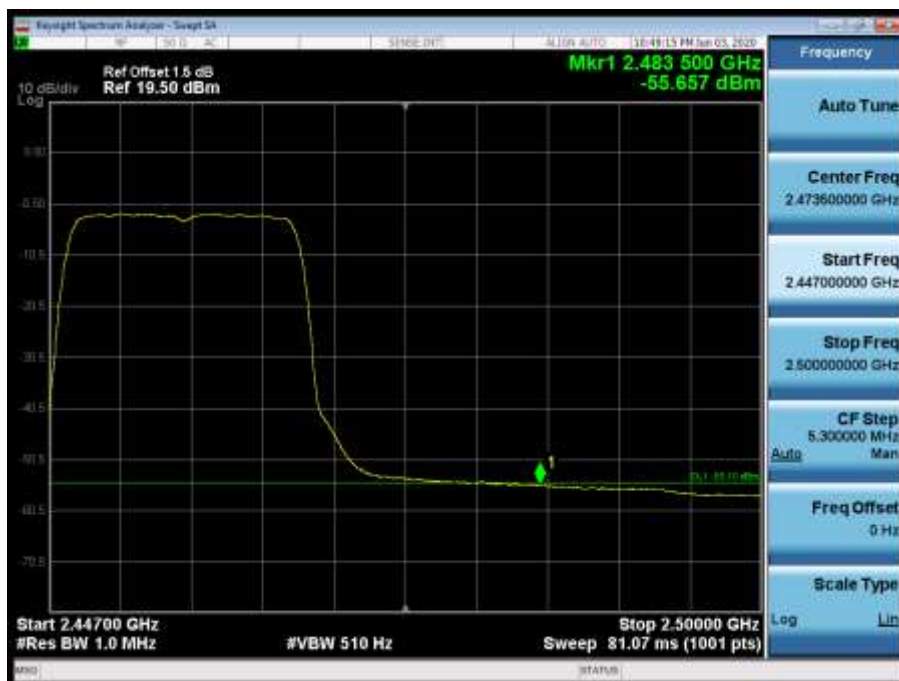


2462MHz by 802.11g:




2412MHz by 802.11n(20MHz):

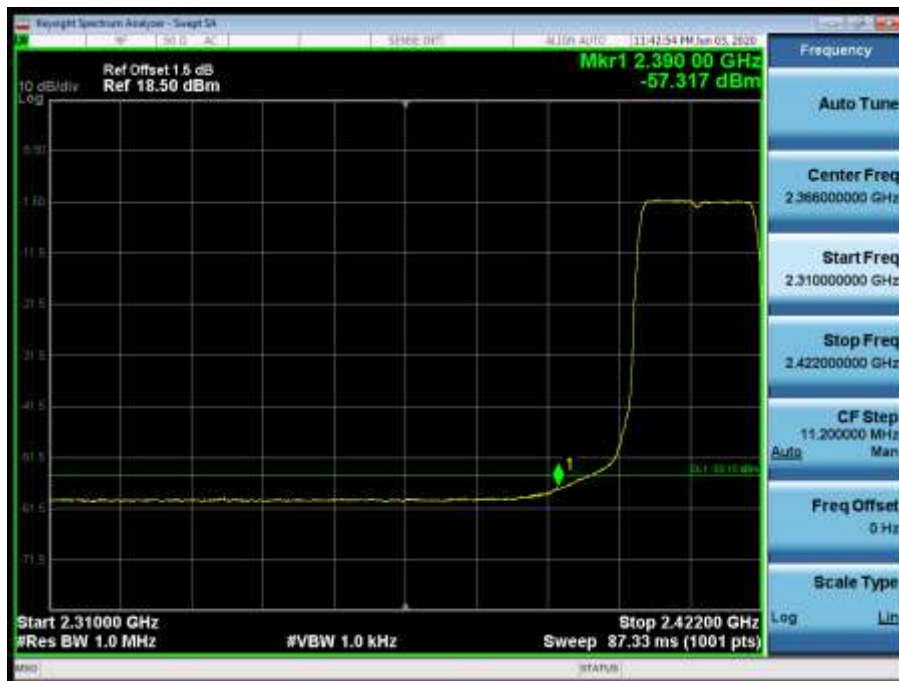


2417MHz by 802.11n(20MHz):

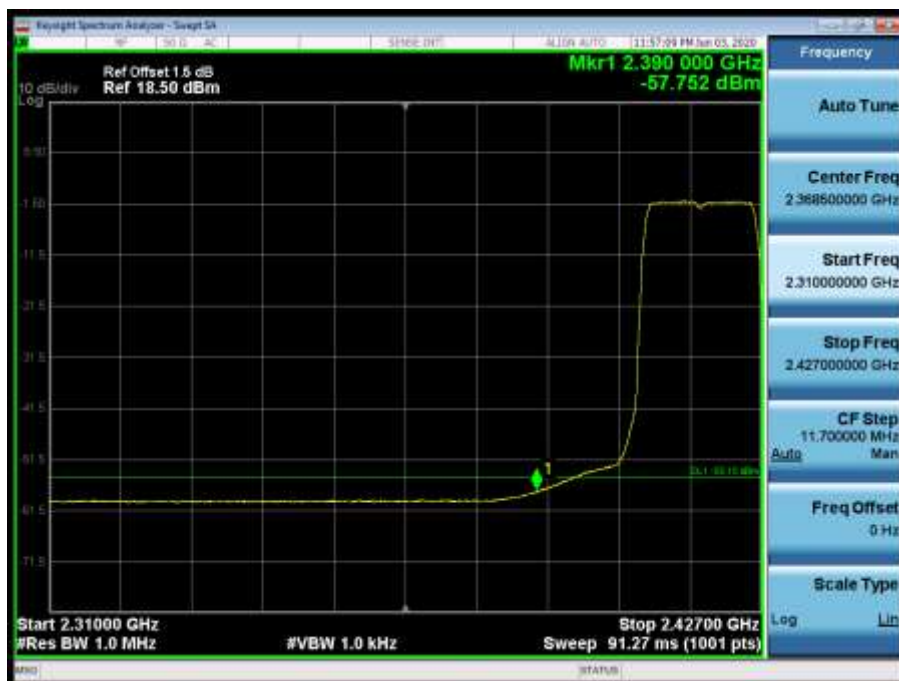


2437MHz by 802.11n(20MHz):

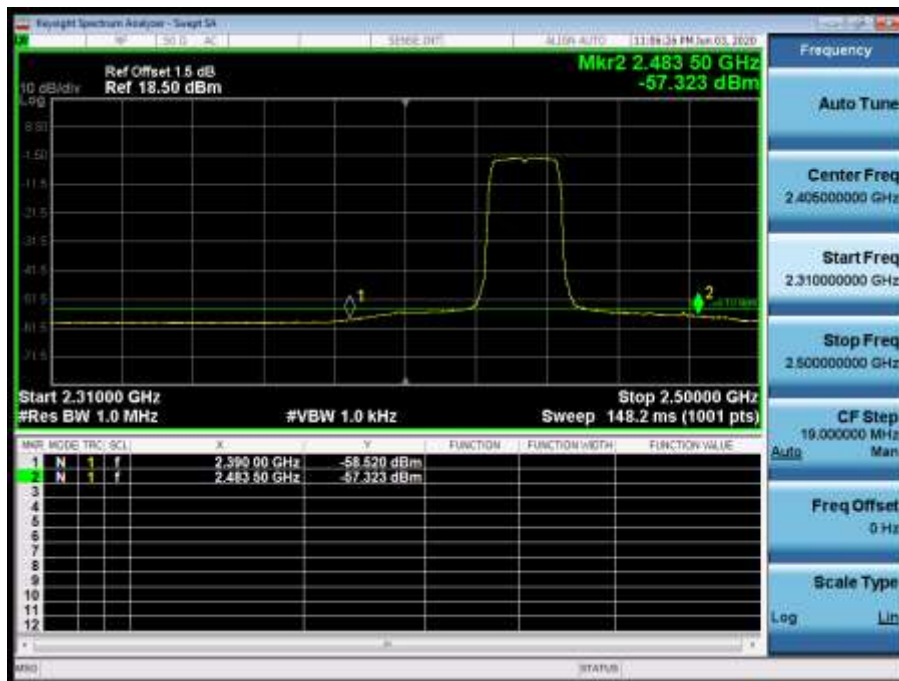


2457MHz by 802.11n(20MHz):

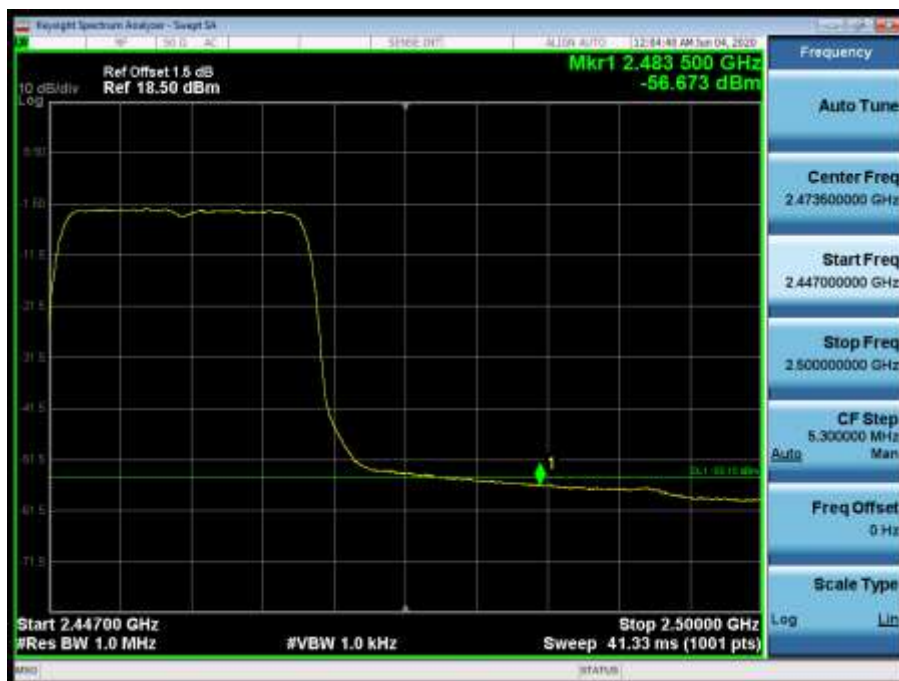


2462MHz by 802.11n(20MHz):

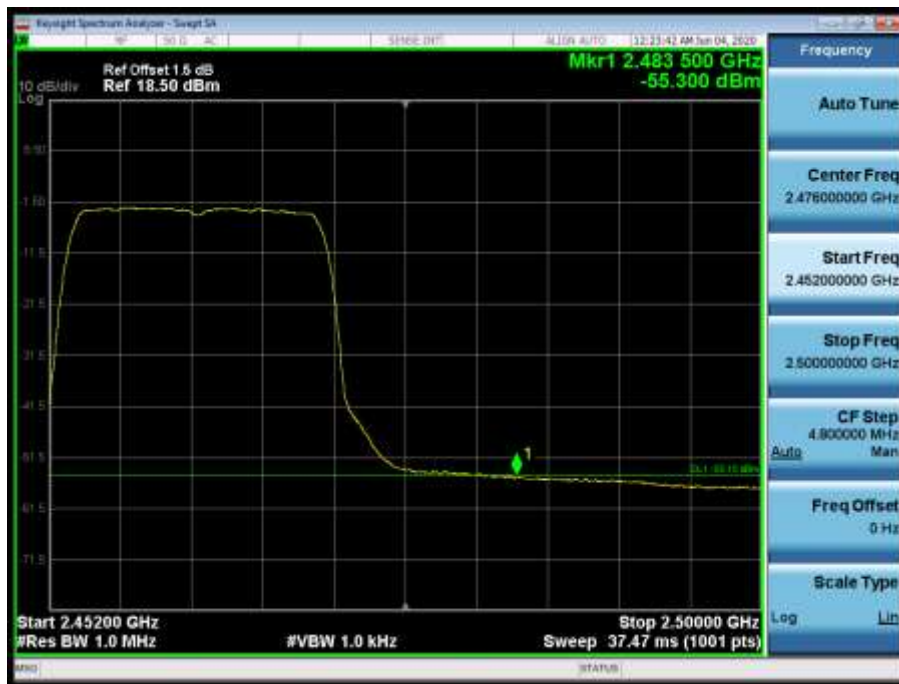


2412MHz by 802.11ax(20MHz):

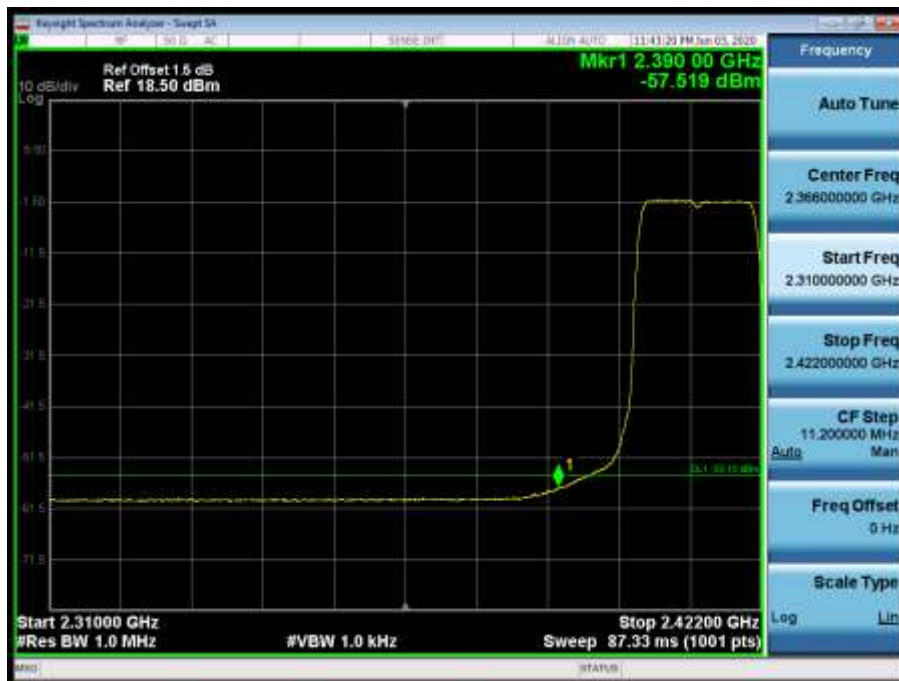


2417MHz by 802.11ax(20MHz):

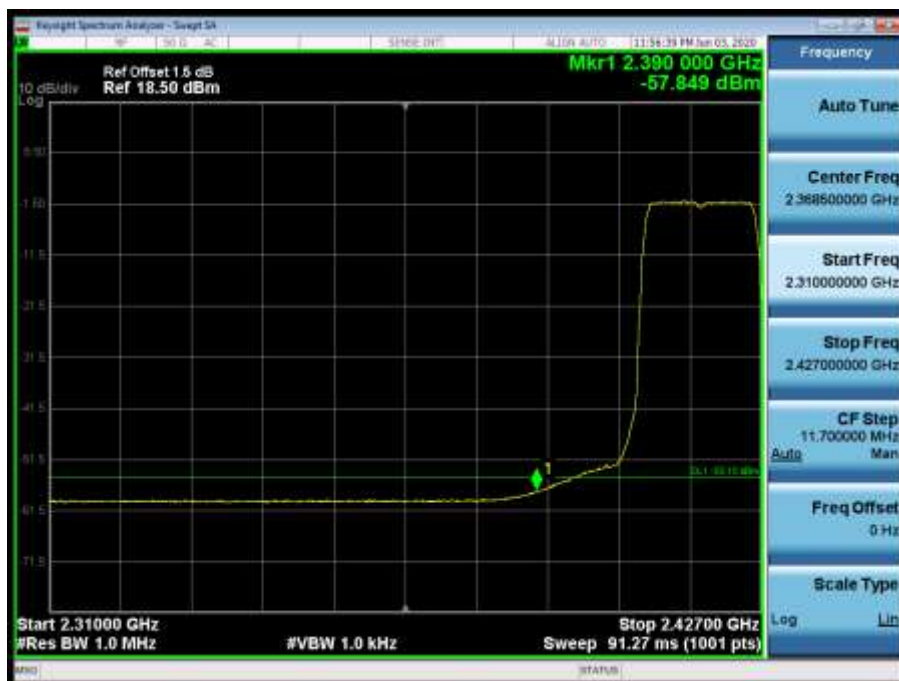


2437MHz by 802.11ax(20MHz):

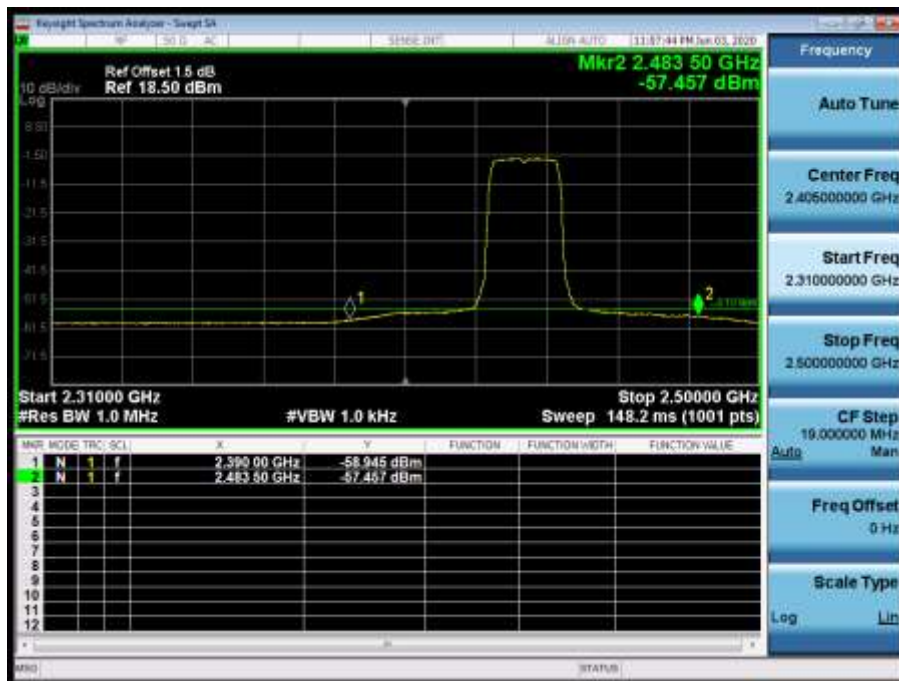

2457MHz by 802.11ax(20MHz):

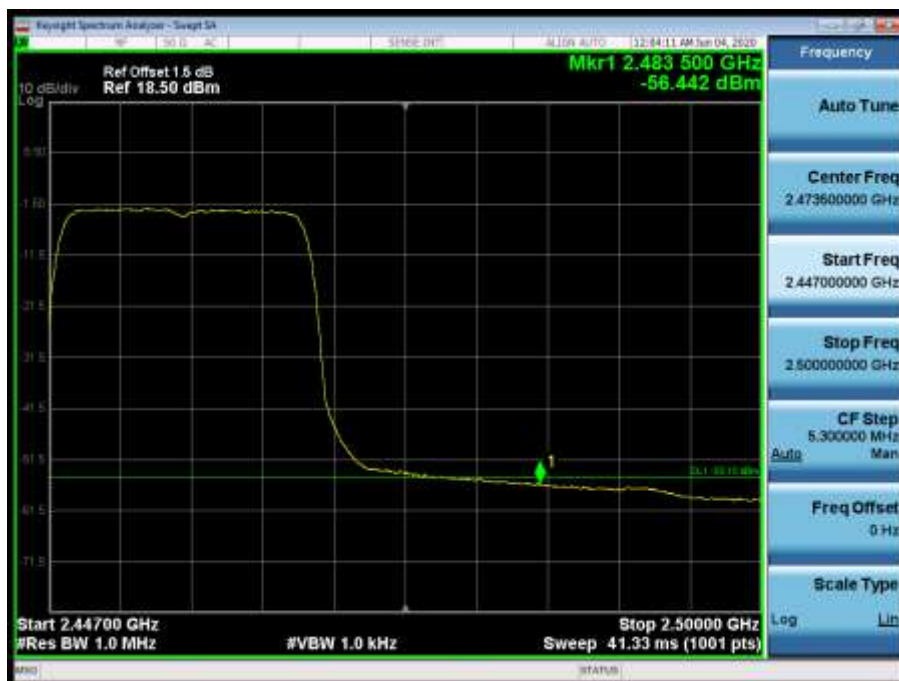


2462MHz by 802.11ax(20MHz):

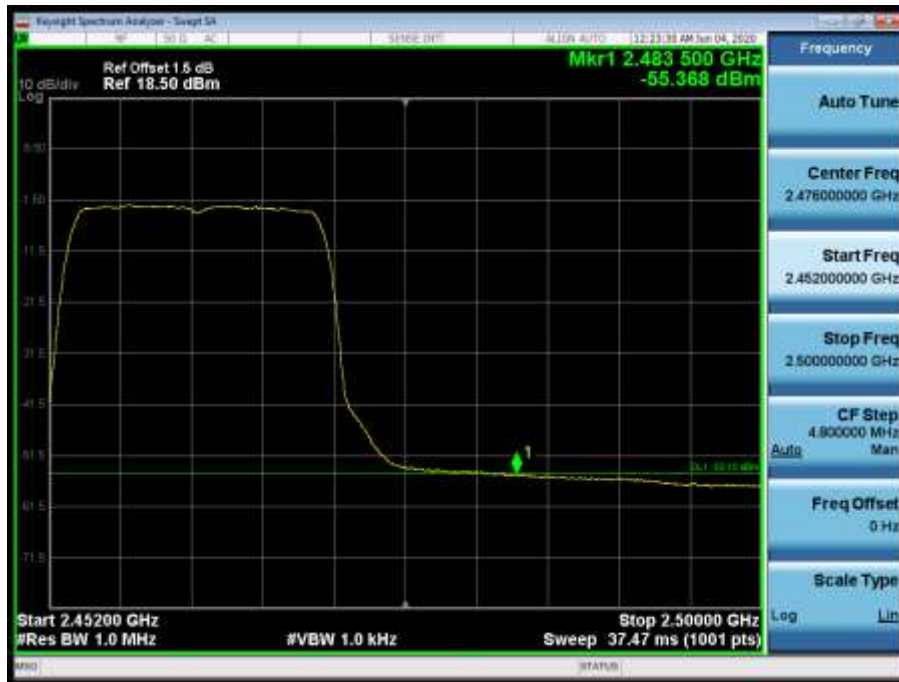


PK Limit-CDD:


2412MHz by 802.11b:

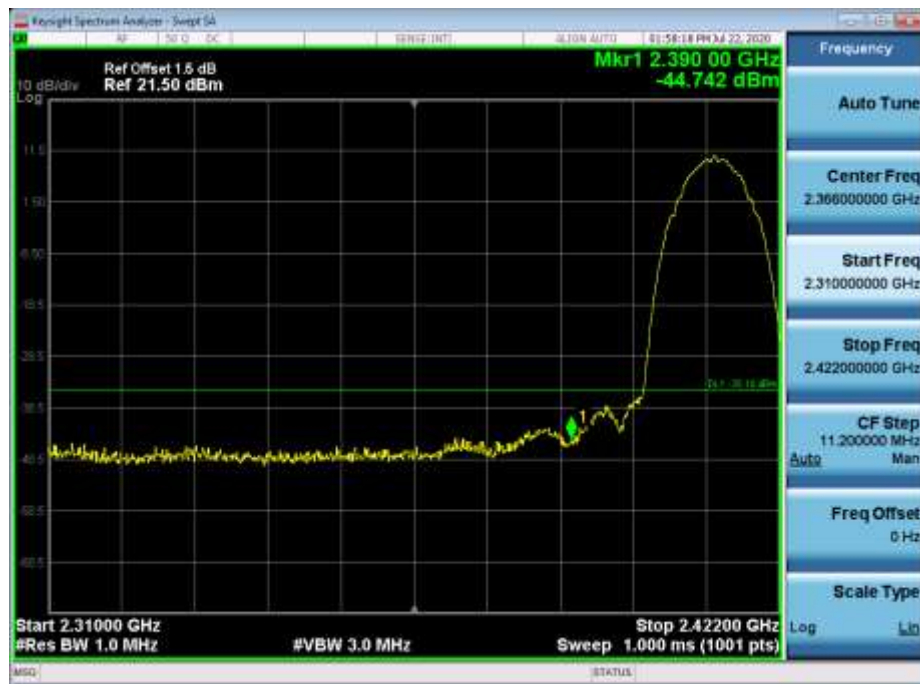


2417MHz by 802.11b:

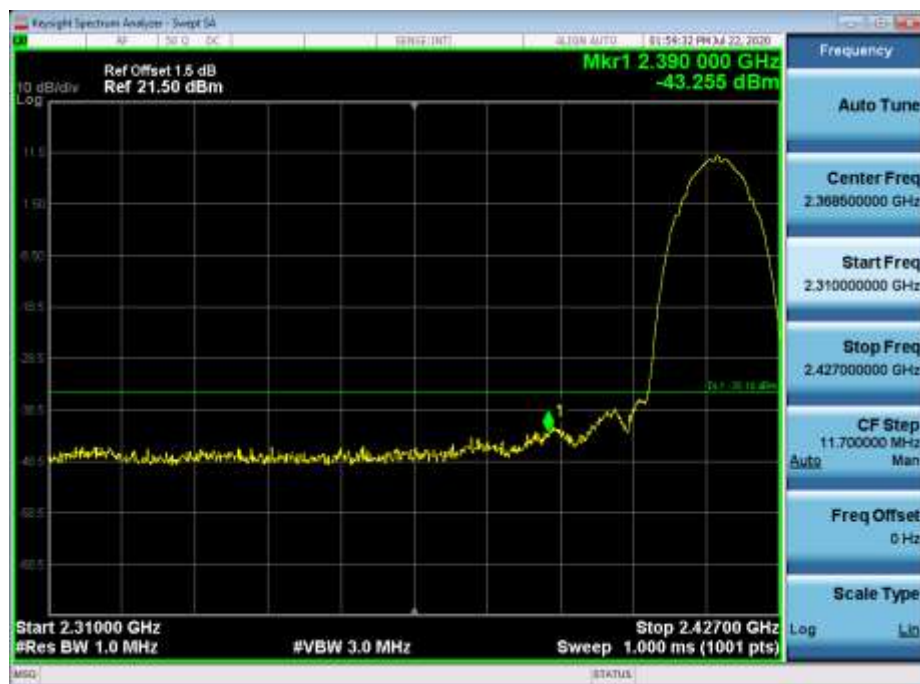

2437MHz by 802.11b:

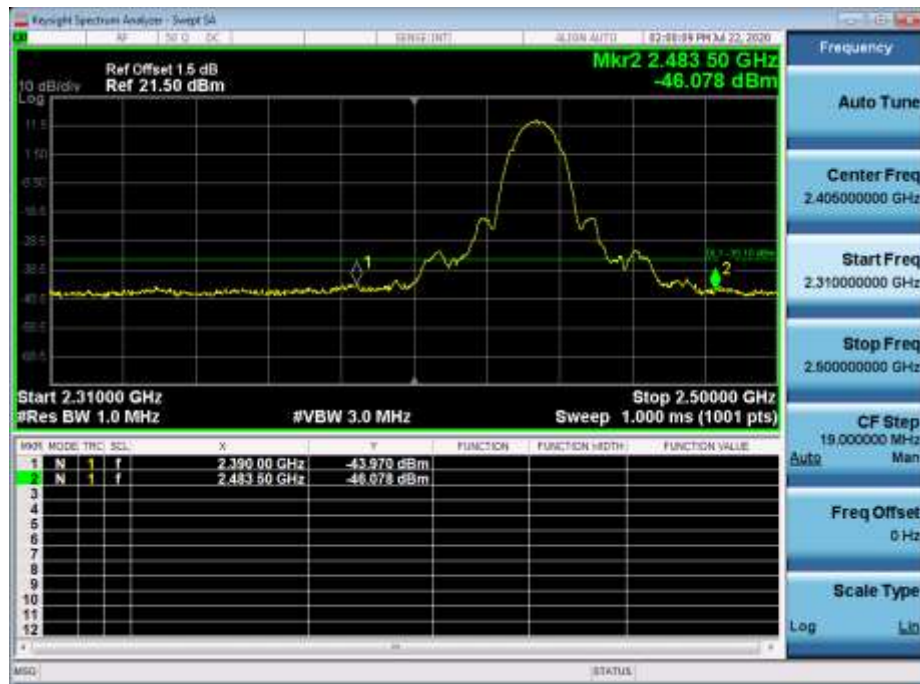


2457MHz by 802.11b:

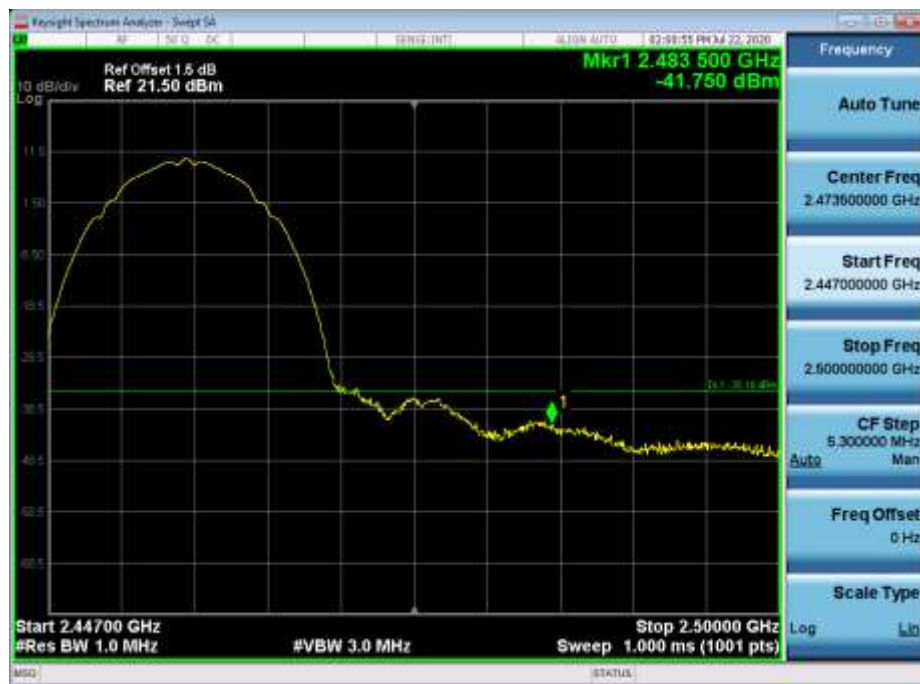


2462MHz by 802.11b:




2412MHz by 802.11g:

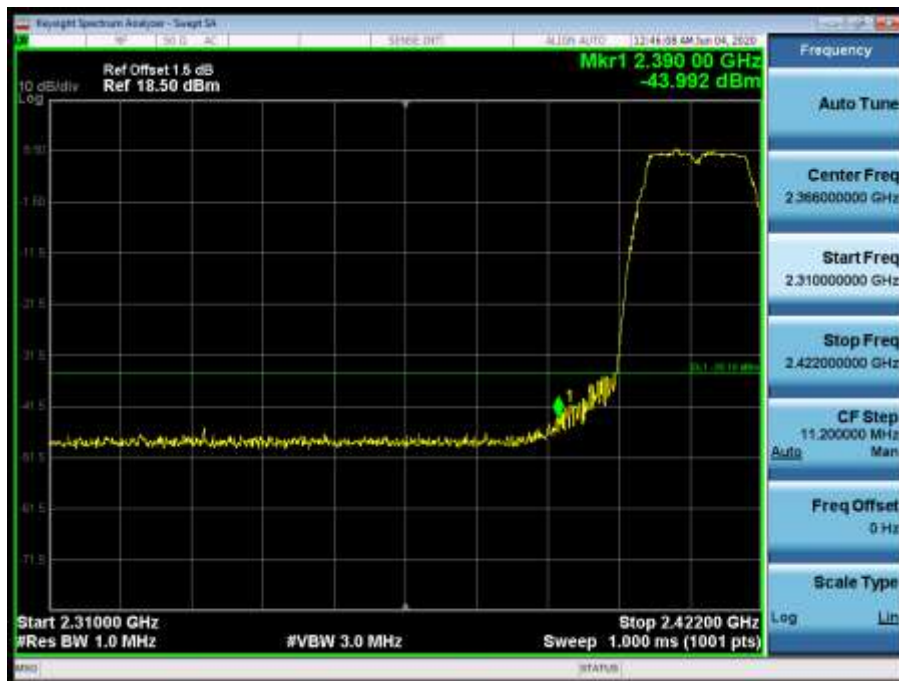


2417MHz by 802.11g:

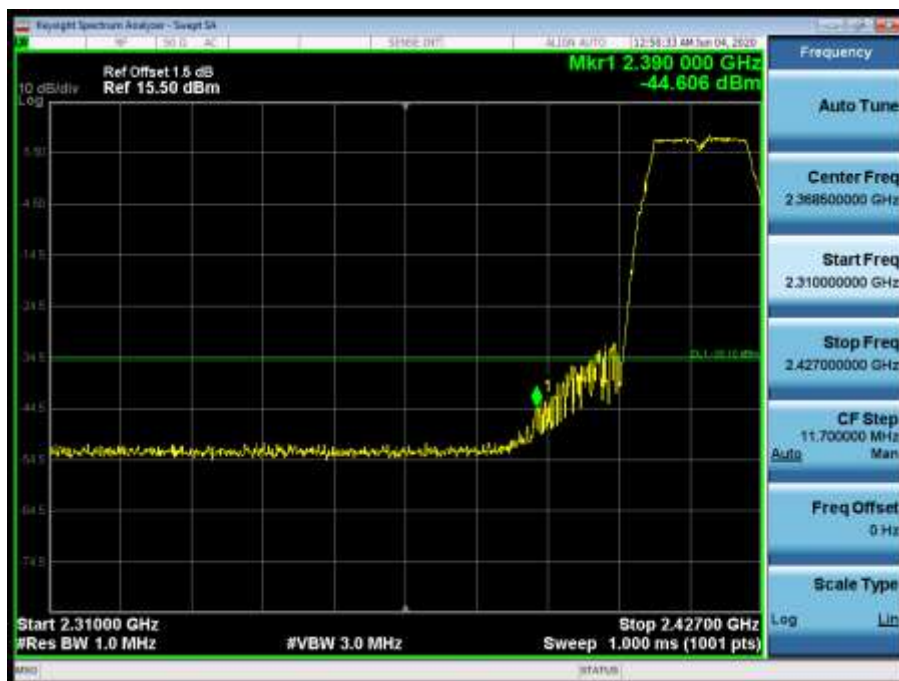


2437MHz by 802.11g:

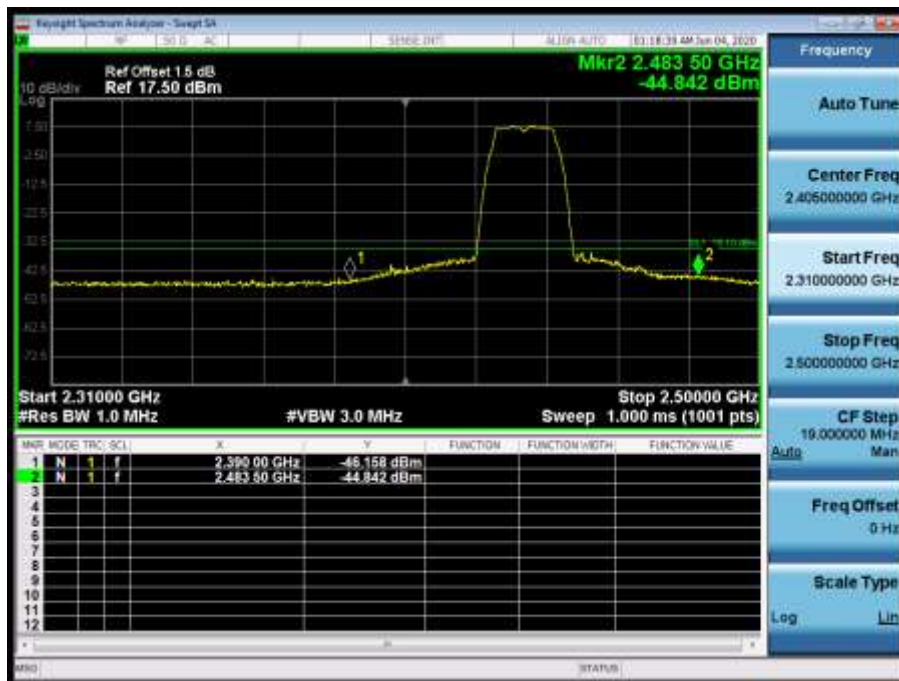


2457MHz by 802.11g:

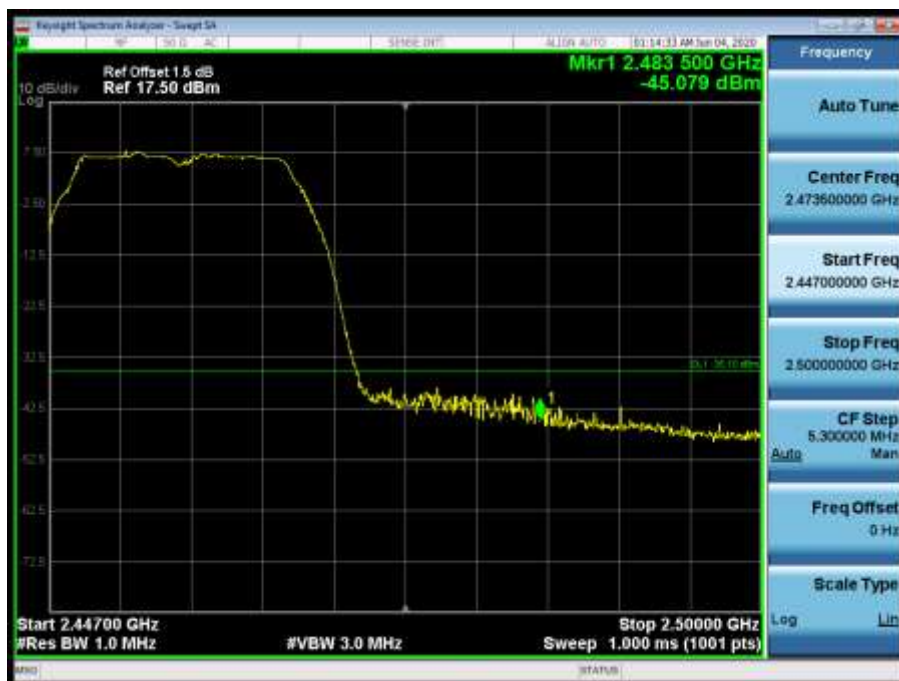


2462MHz by 802.11g:

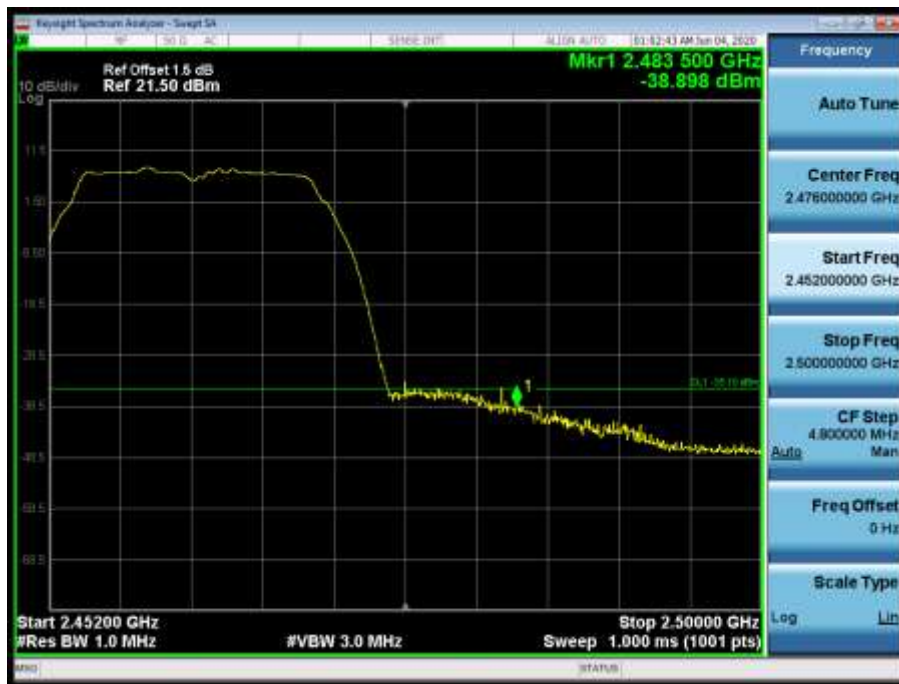


2412MHz by 802.11n(20MHz):

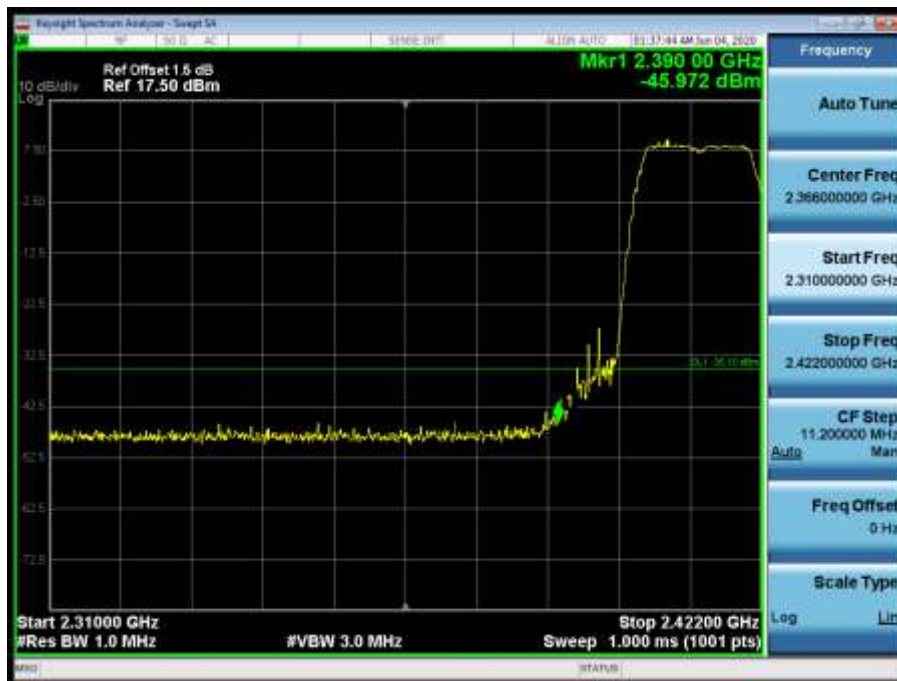


2417MHz by 802.11n(20MHz):

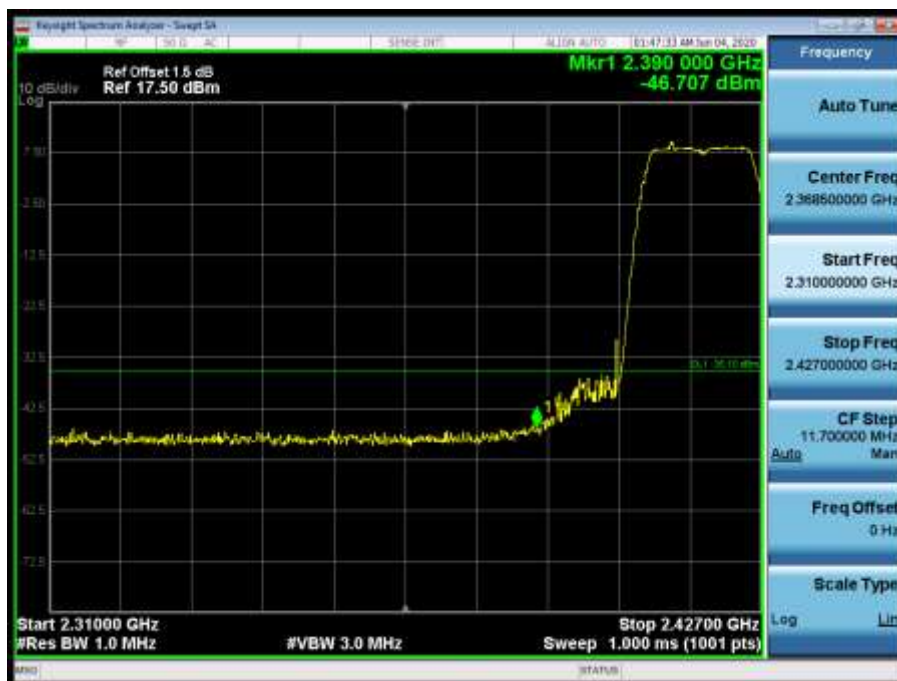


2437MHz by 802.11n(20MHz):

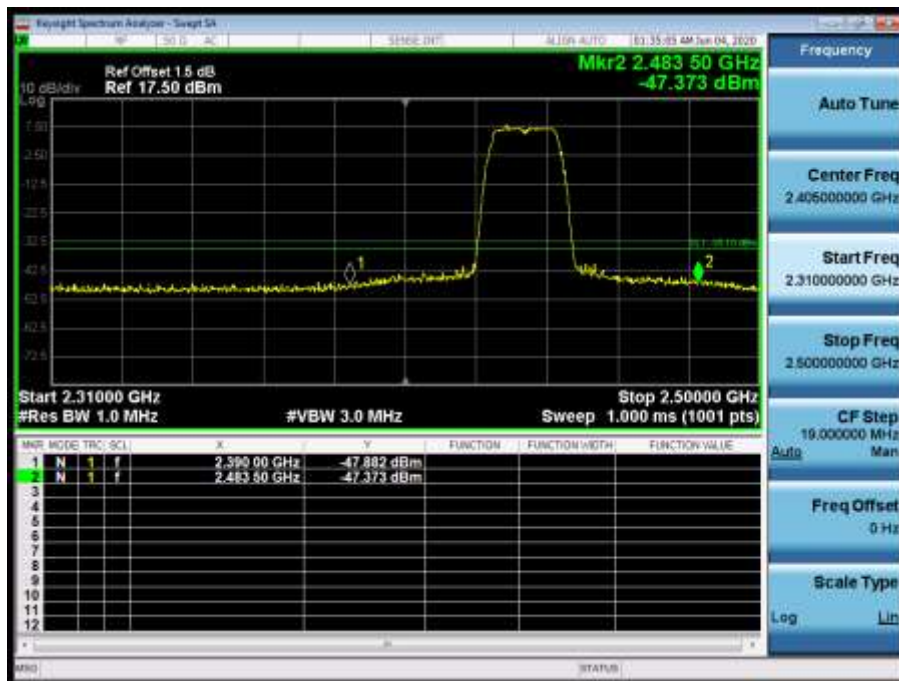


2457MHz by 802.11n(20MHz):

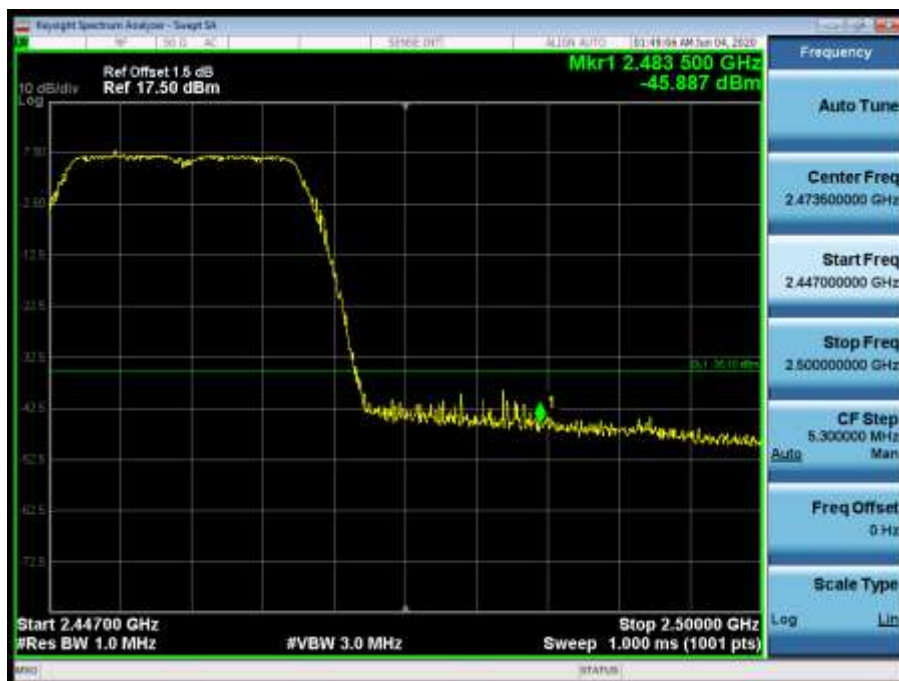


2462MHz by 802.11n(20MHz):

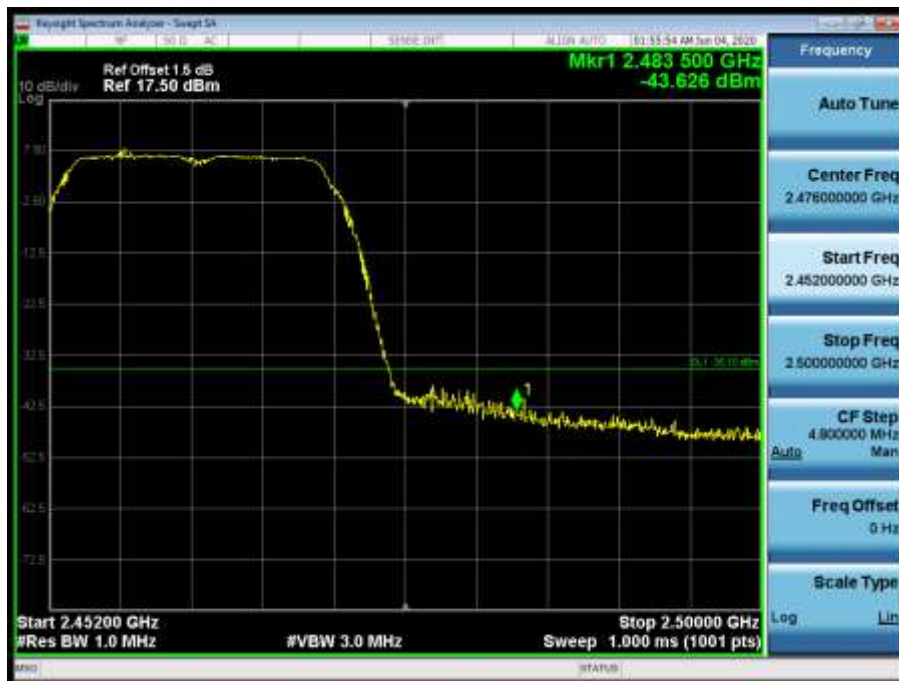


2412MHz by 802.11ax(20MHz):

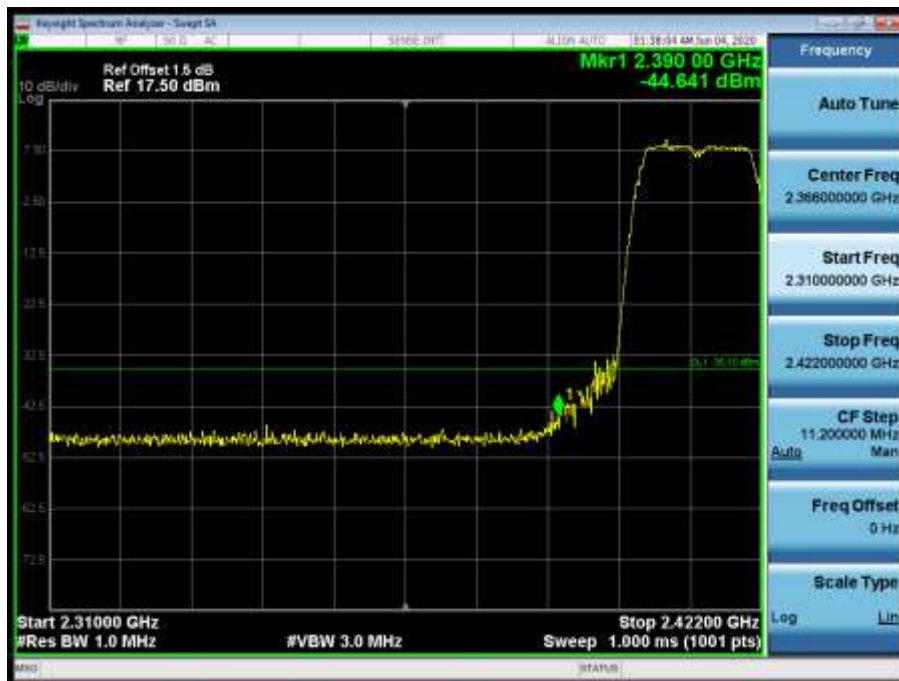


2417MHz by 802.11ax(20MHz):

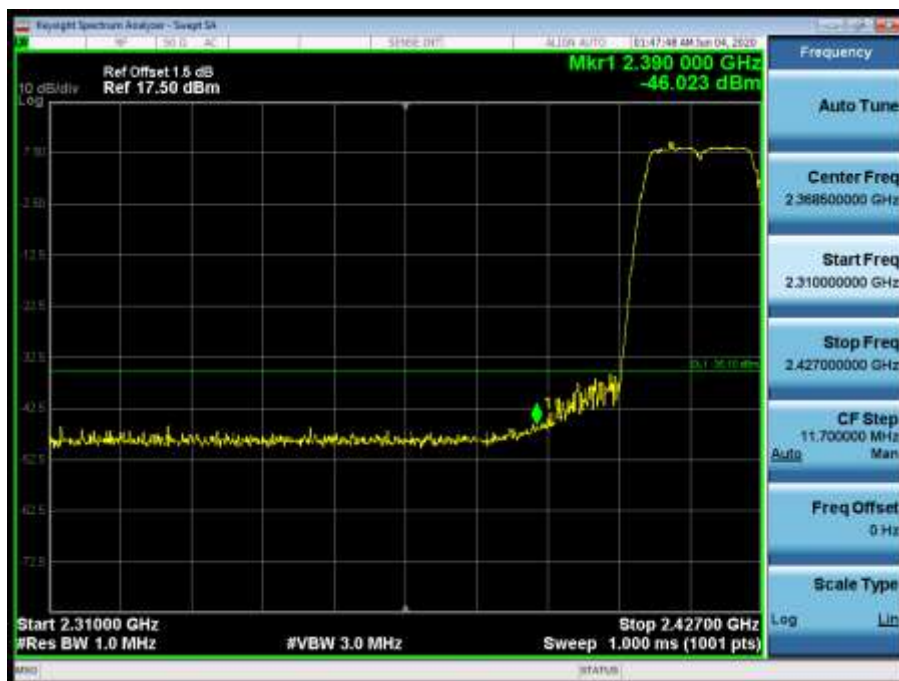


2437MHz by 802.11ax(20MHz):

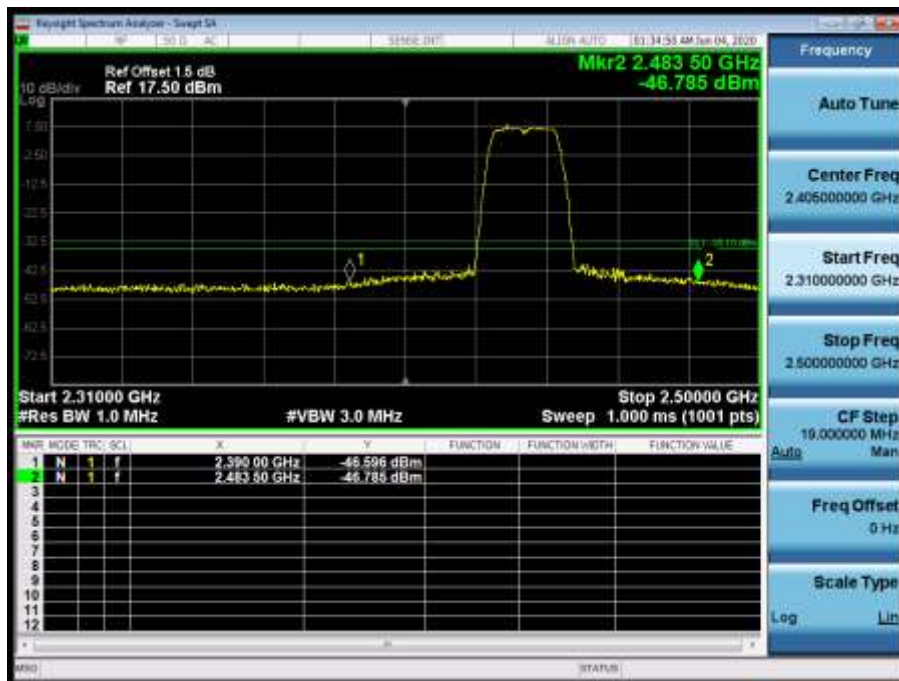


2457MHz by 802.11ax(20MHz):

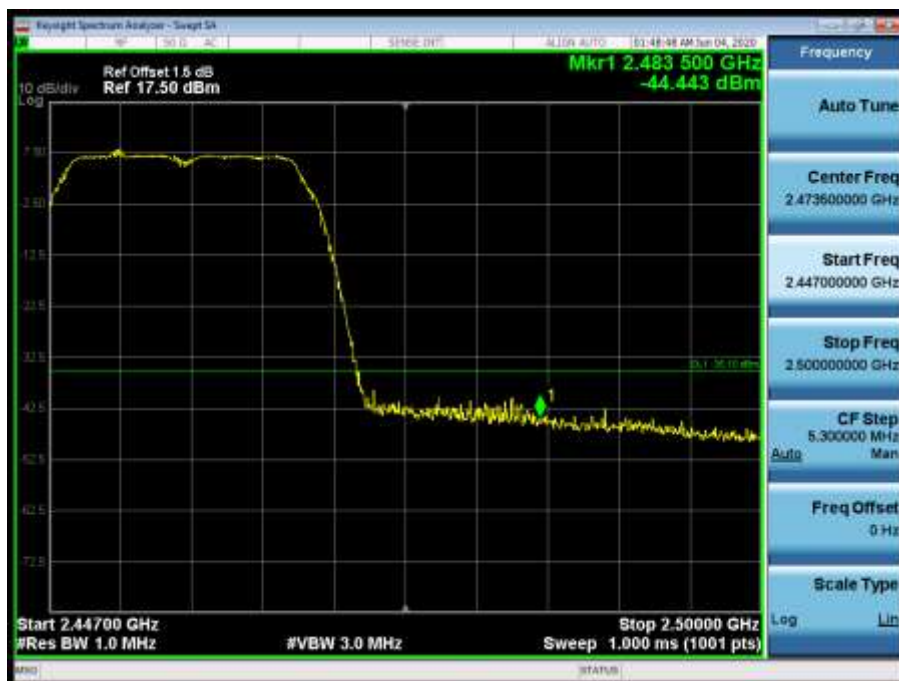


2462MHz by 802.11ax(20MHz):

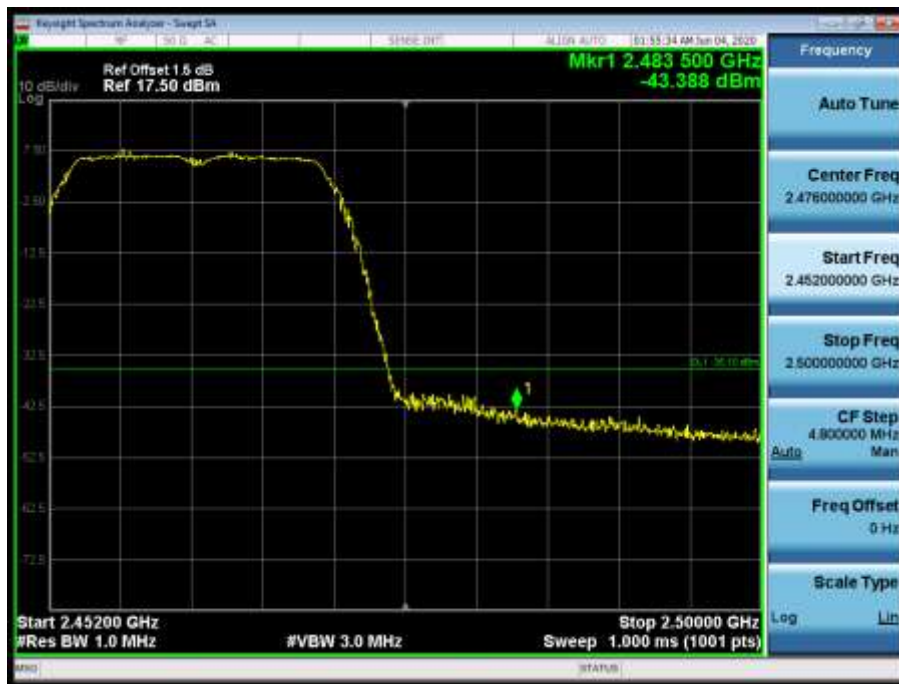


AV Limit-Beamforming:
2412MHz by 802.11n(20MHz):

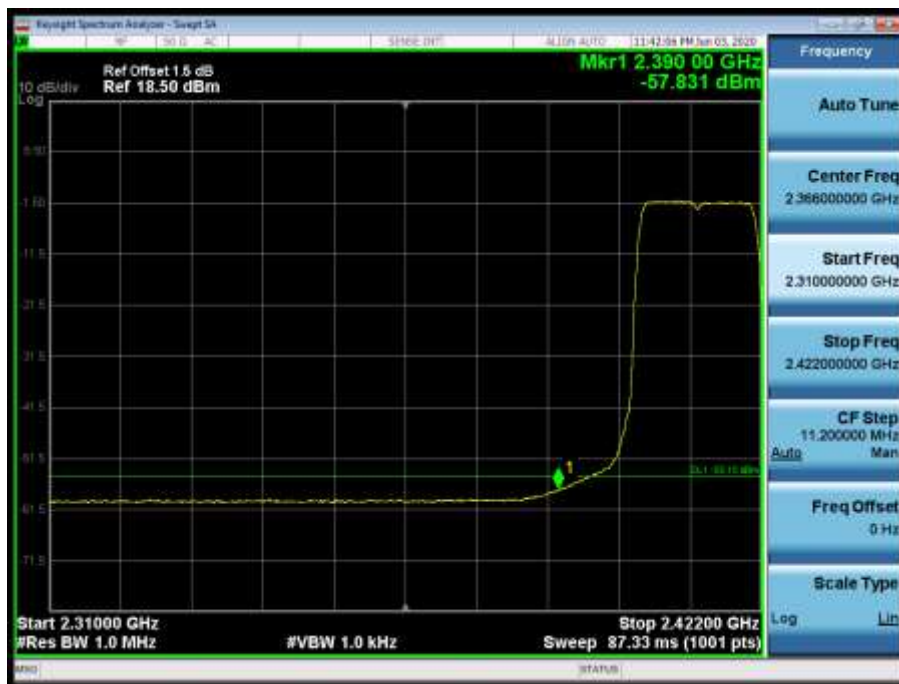


2417MHz by 802.11n(20MHz):

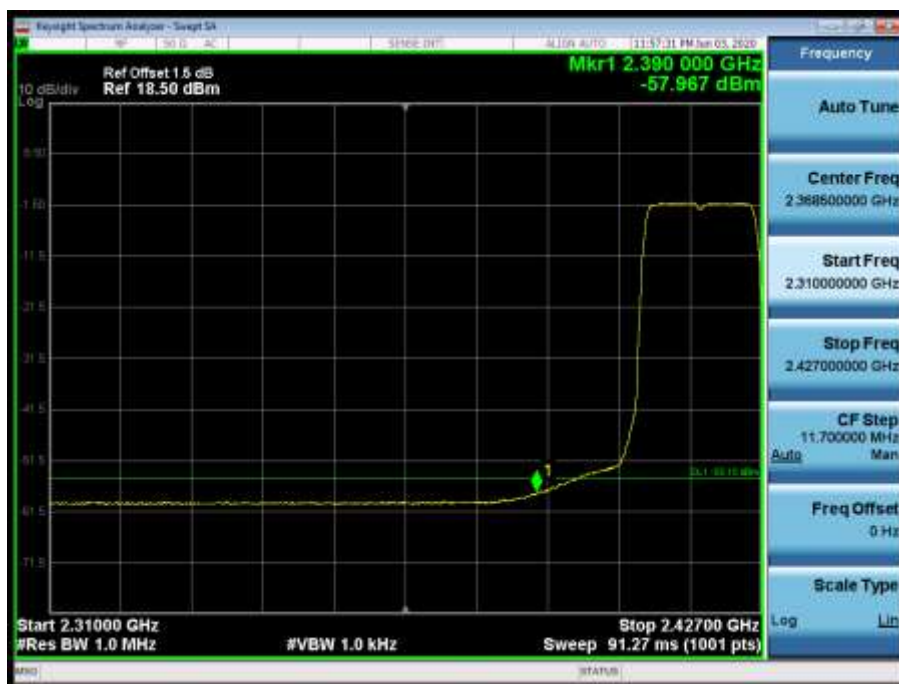


2437MHz by 802.11n(20MHz):

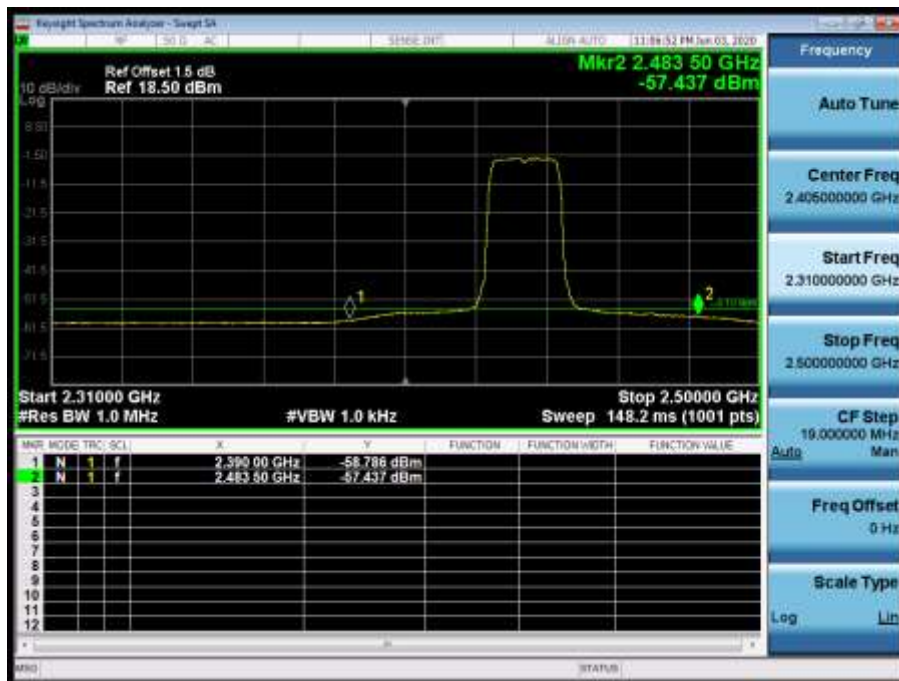


2457MHz by 802.11n(20MHz):

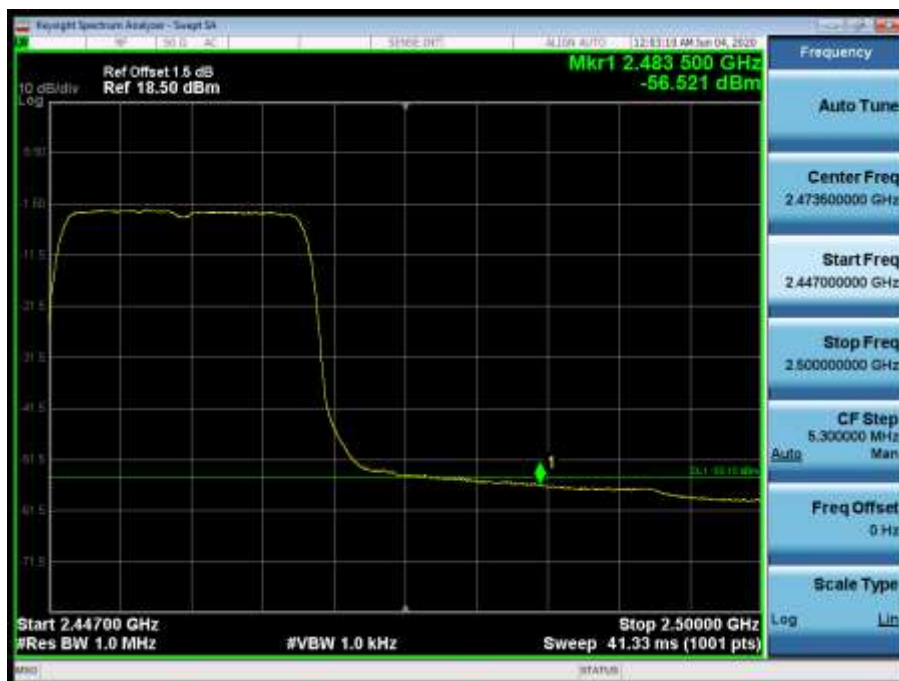


2462MHz by 802.11n(20MHz):

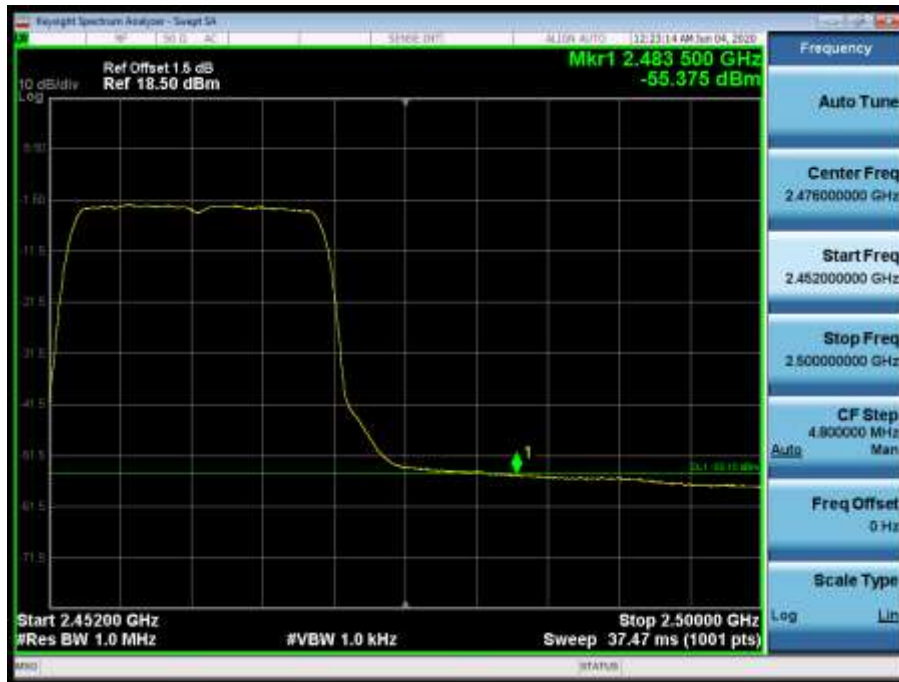


2412MHz by 802.11ax(20MHz):

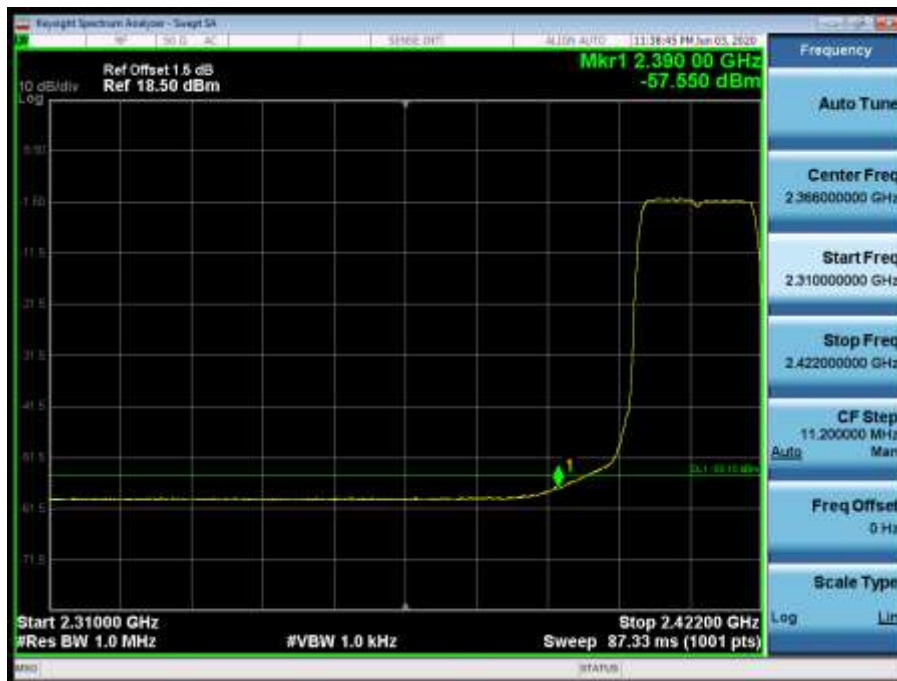


2417MHz by 802.11ax(20MHz):

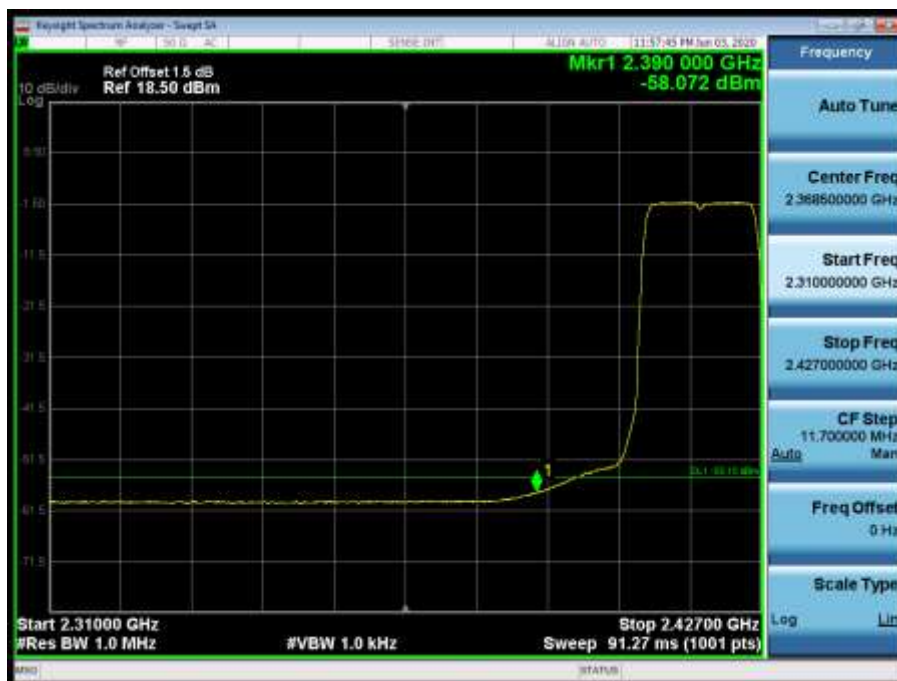


2437MHz by 802.11ax(20MHz):


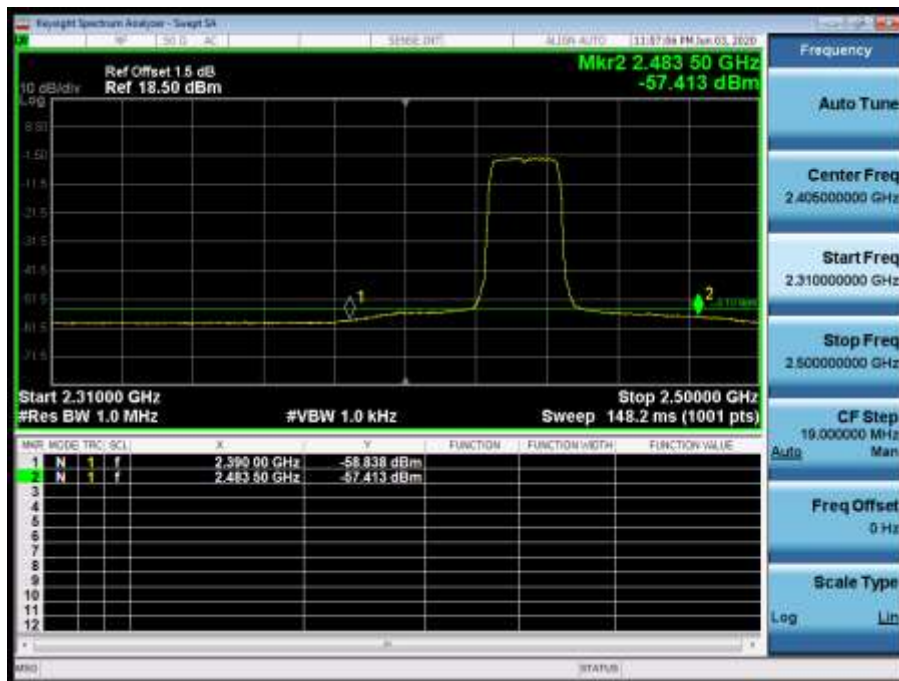


2457MHz by 802.11ax(20MHz):

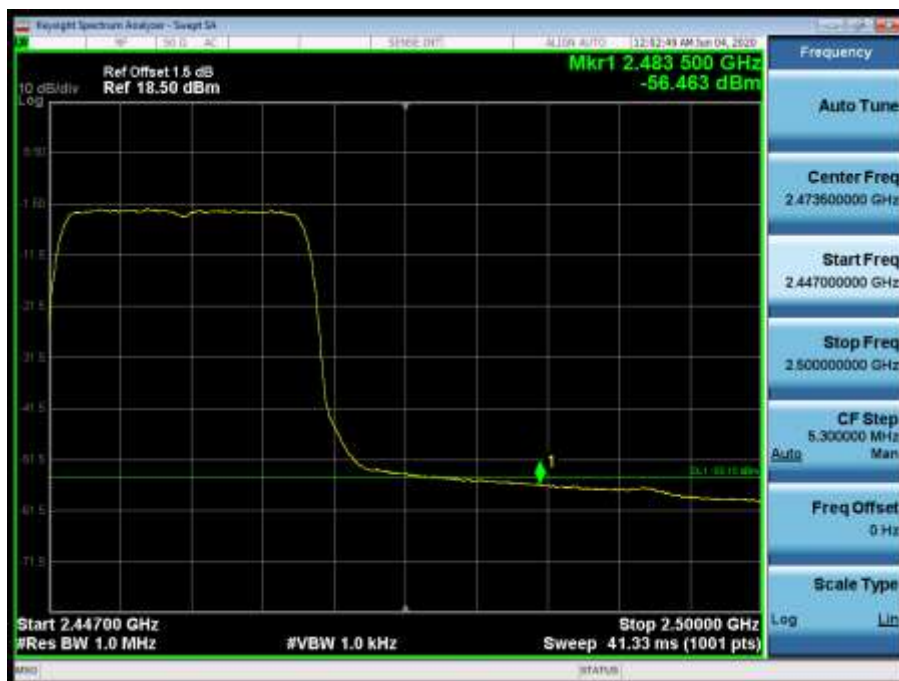


2462MHz by 802.11ax(20MHz):

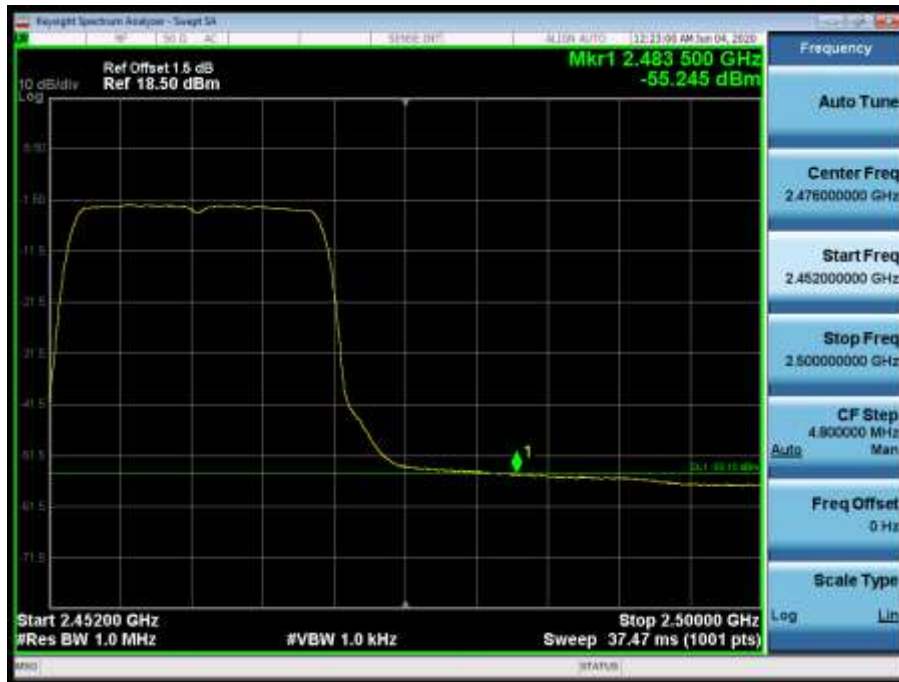


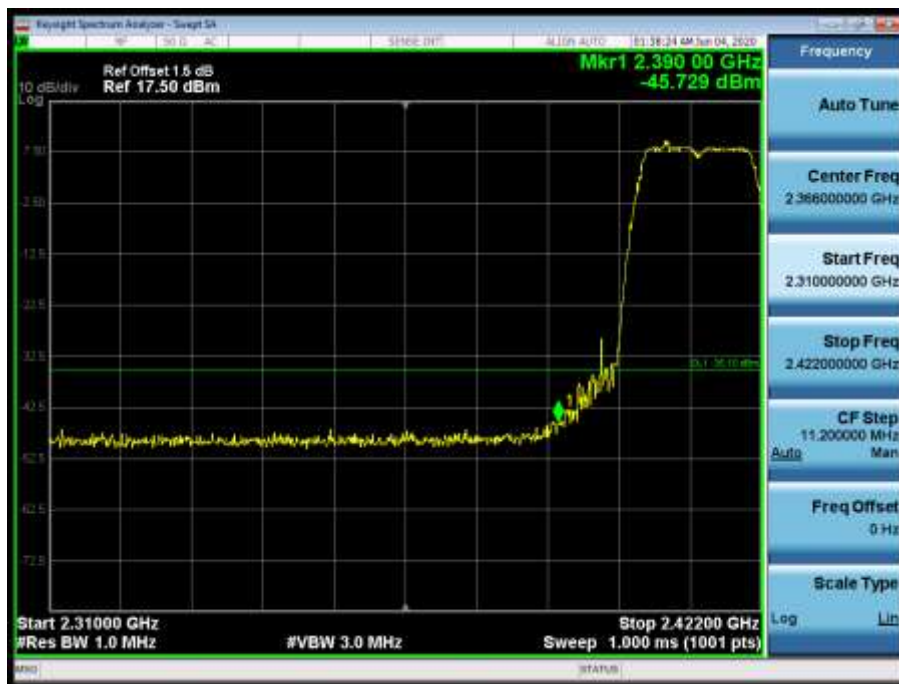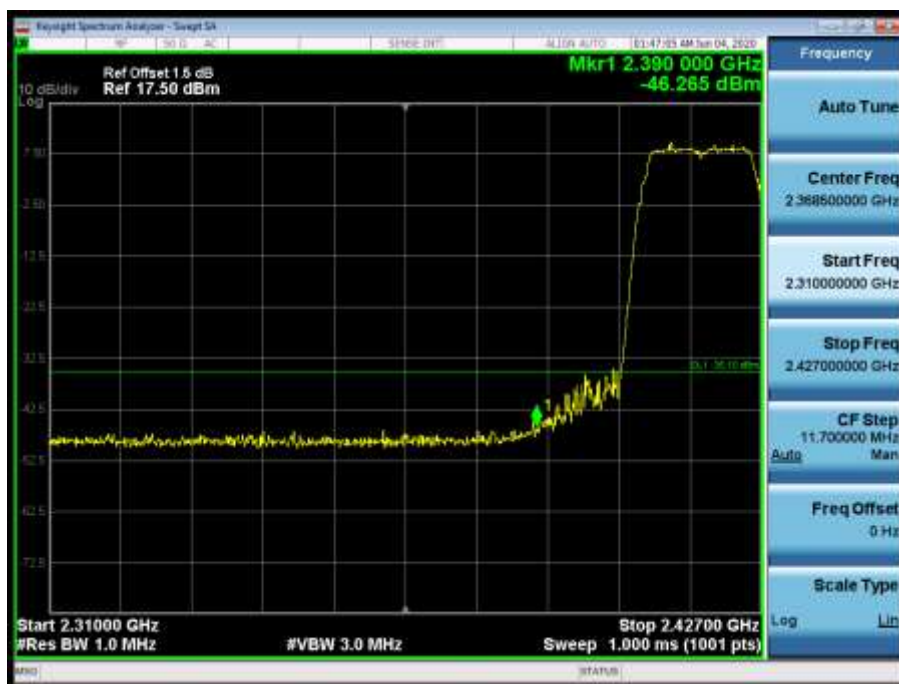PK Limit-Beamforming**2412MHz by 802.11n(20MHz):****2417MHz by 802.11n(20MHz):**


2437MHz by 802.11n(20MHz):

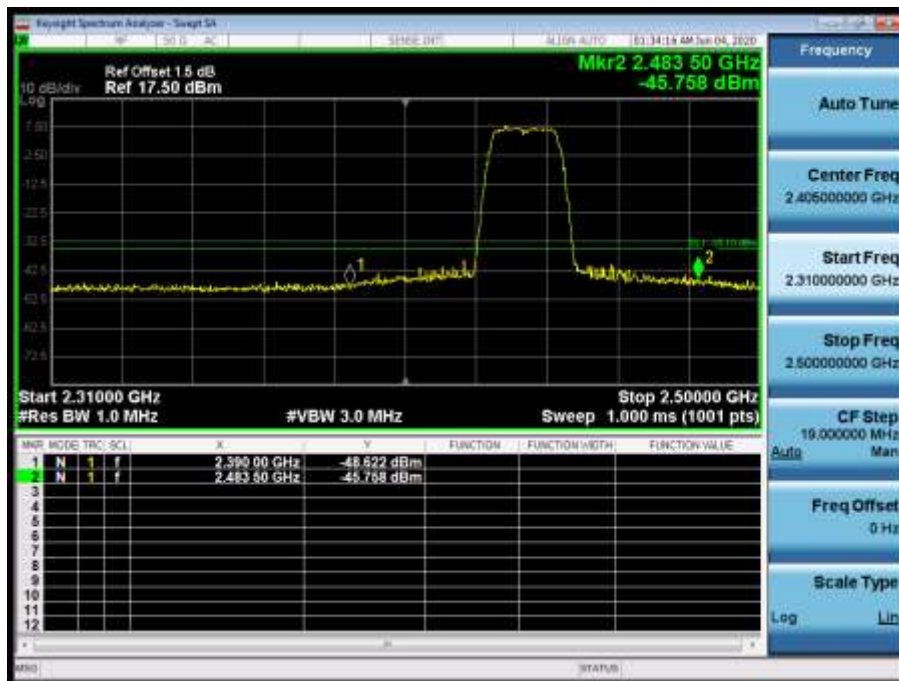


2457MHz by 802.11n(20MHz):

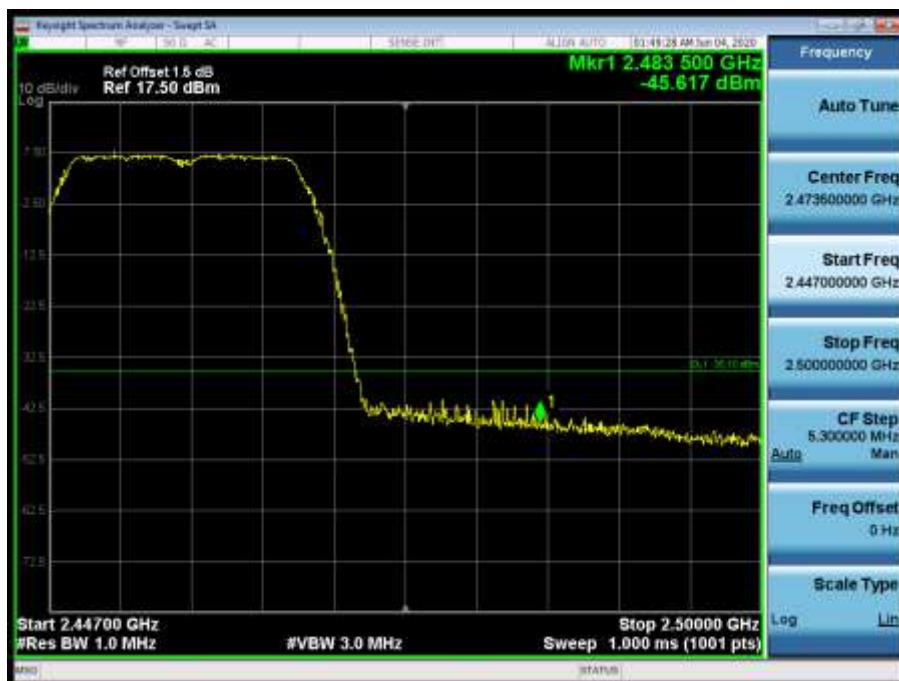


2462MHz by 802.11n(20MHz):

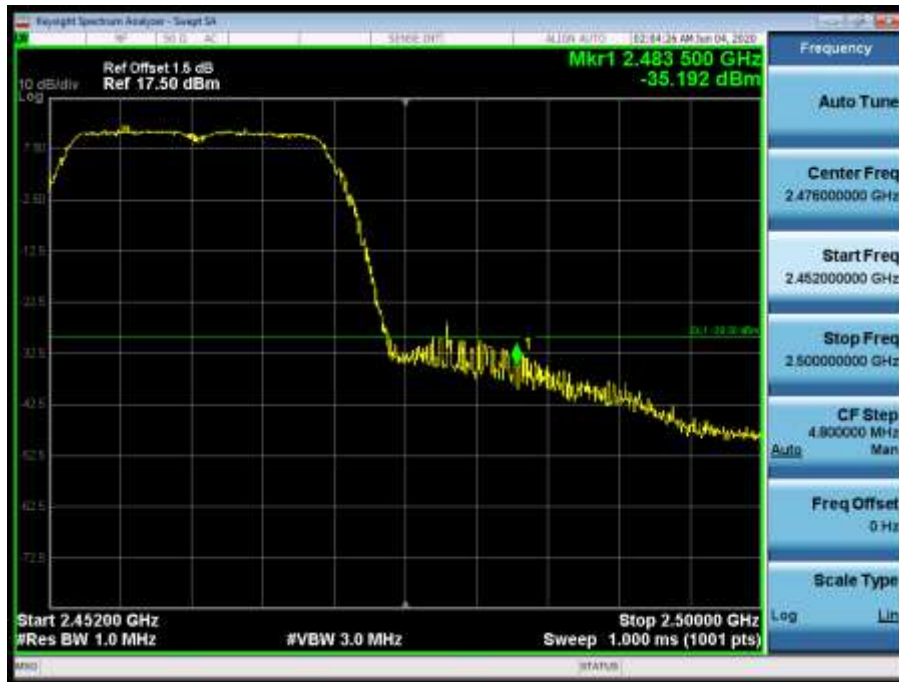


2412MHz by 802.11ax(20MHz):

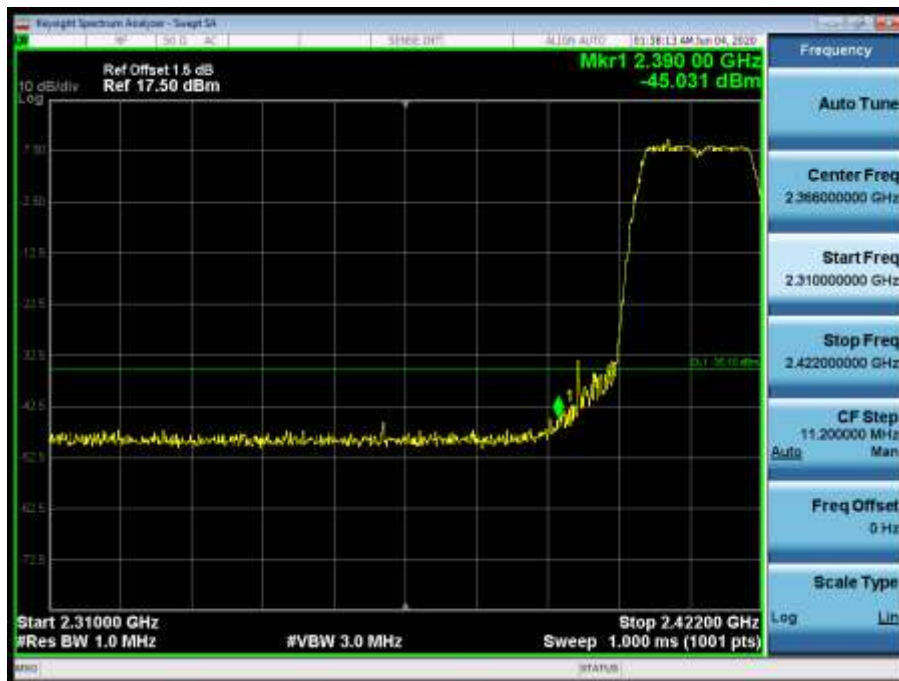


2417MHz by 802.11ax(20MHz):

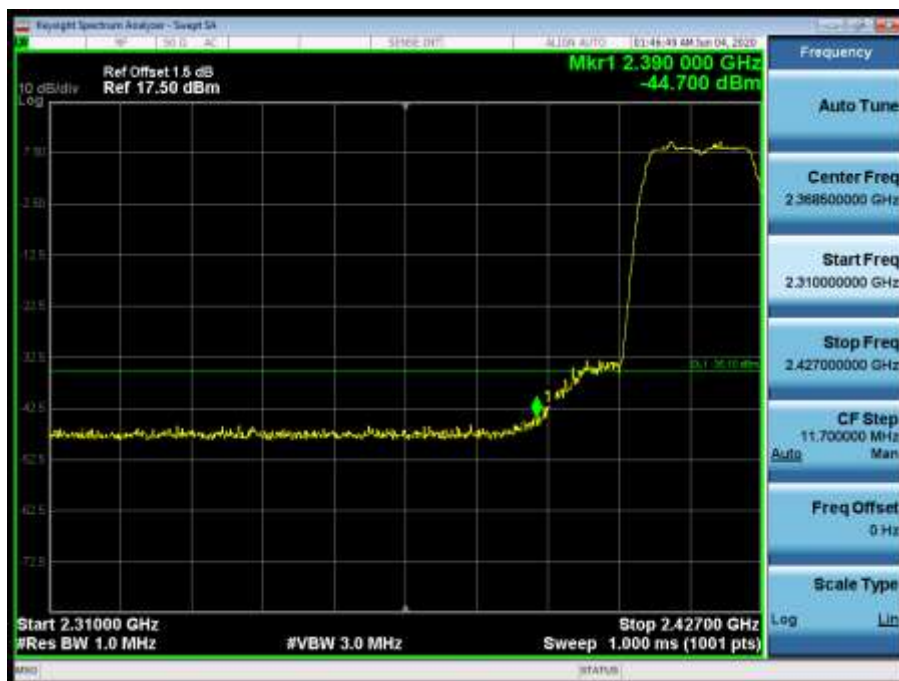

2437MHz by 802.11ax(20MHz):

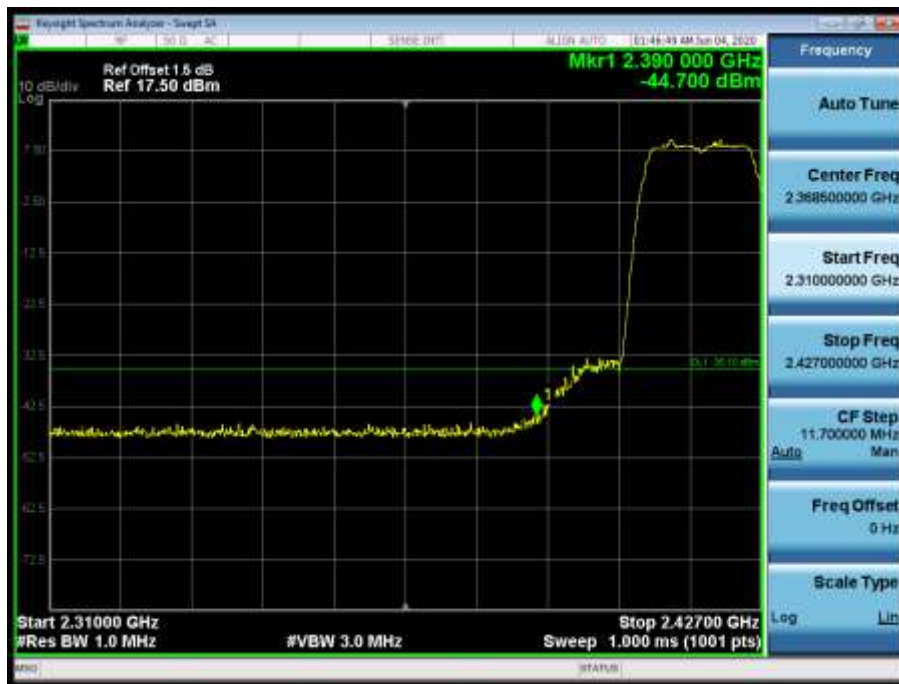

2457MHz by 802.11ax(20MHz):

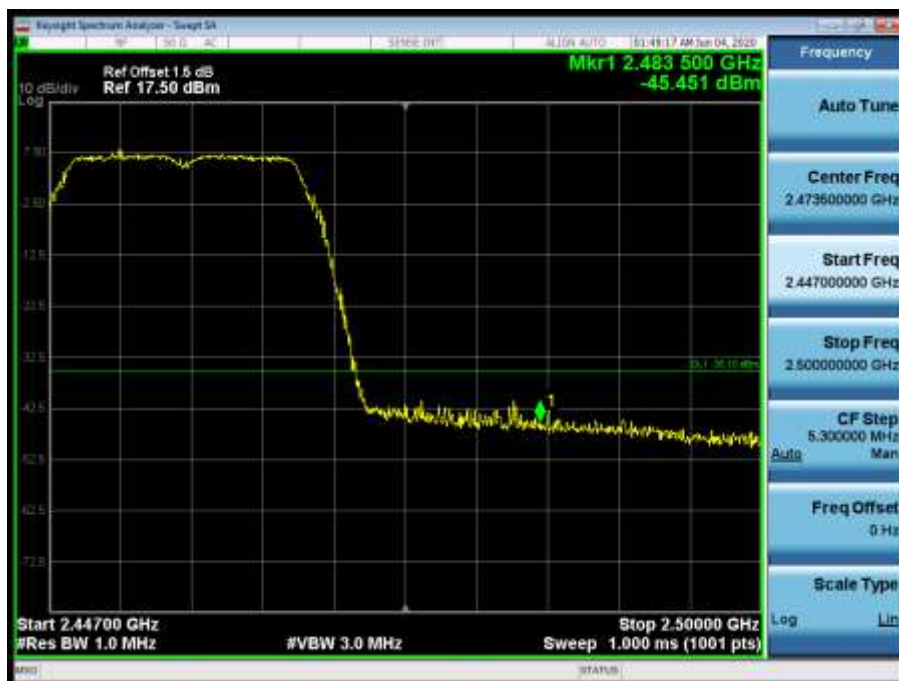

2462MHz by 802.11ax(20MHz):




7. Occupied Bandwidth

7.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Temperature/Humidity Meter	Zhichen	ZC1-2	TR8-TH	2019.09.02	2020.09.01
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

7.2. Test Setup

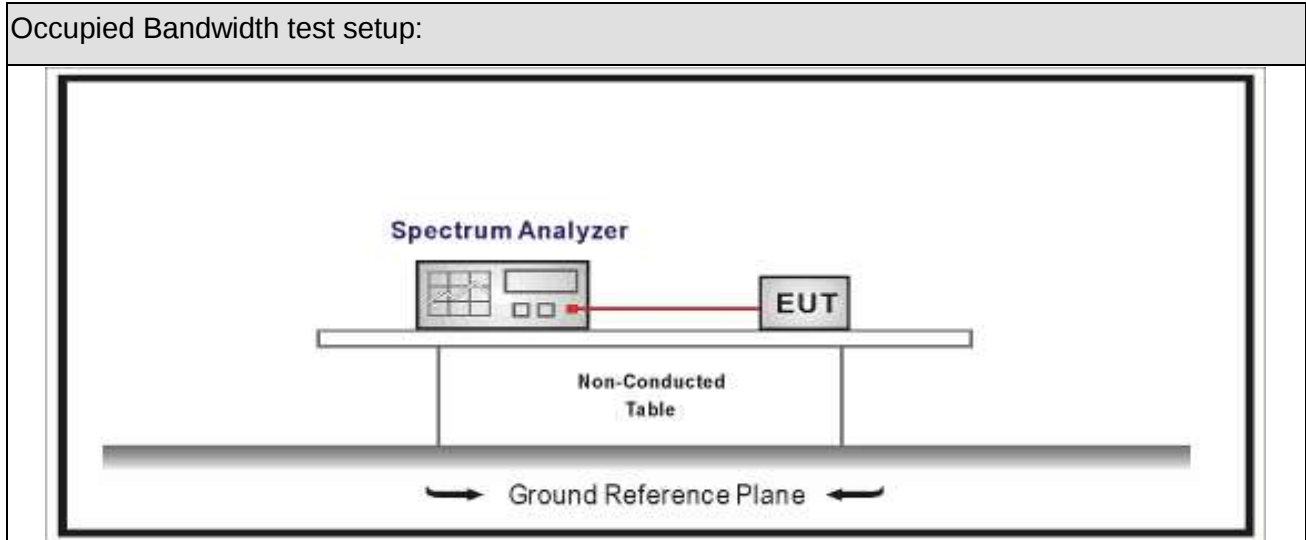

7.3. Limit




Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

7.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

7.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1~4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☒	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

7.6. Test Result

Product Name	: Wireless Access Point	Power	: AC 120V/60Hz
Test Mode	: Mode 1~4	Test Site	: TR8
Test Date	: 2019.11.19	Test Engineer	: Eric

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	01	2412	13.265	7.583	>500	Pass
1	06	2437	13.569	7.555	>500	Pass
1	11	2462	13.583	7.087	>500	Pass
2	01	2412	17.551	16.35	>500	Pass
2	06	2437	17.439	16.39	>500	Pass
2	11	2462	17.393	16.39	>500	Pass
3	01	2412	18.517	17.57	>500	Pass
3	06	2437	18.539	17.64	>500	Pass
3	11	2462	18.446	17.59	>500	Pass
4	01	2412	19.193	18.83	>500	Pass
4	06	2437	19.194	19.02	>500	Pass
4	11	2462	19.171	18.97	>500	Pass

Note : The worst case of Occupied Bandwidth as below in next page:

Mode 1 CH11 (2462MHz)




8. Fundamental emission output power

8.1. Test Equipment

Fundamental Emission output power / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Wideband Peak Power Meter	Anritsu	ML2495A	1613005	2019.10.28	2020.10.27
Power Sensor	Anritsu	MA2411B	1531092	2019.10.14	2020.10.13
Temperature/Humidity Meter	Zhichen	ZC1-2	TR8-TH	2019.09.02	2020.09.01

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

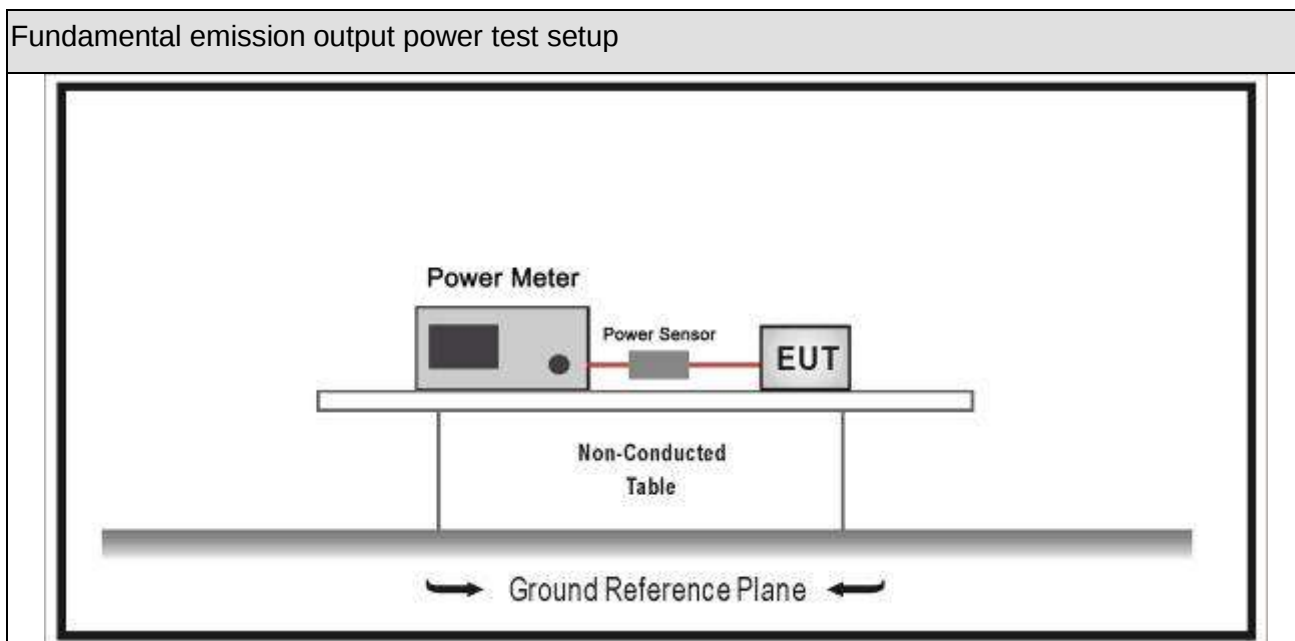

8.3. Limit




Fundamental emission output power Limit			
☒	$G_{TX} < 6\text{dBi}$		$P_{out} \leq 30\text{dBm}$
☒	$G_{TX} > 6\text{dBi}$		
	☒	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas.			
Note 2 : P_{out} is maximum peak conducted output power .			

8.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☐	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☐	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☒	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle ≥ 98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle ≥ 98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle ≤ 98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle ≤ 98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☒	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☒	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

Directional Gain Calculations for In-Band test method				
	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☒	KDB 662911		F2)e)	Spatial Multiplexing
	☐	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☒	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☒	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☒	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

8.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1~4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☒	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

8.6. Test Result

Pass

The test data please refer to the files attached.


Appendix 1: 2.4GHz FCC&ISED RF output power

9. Power Spectral Density

9.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Temperature/Humidity Meter	Zhichen	ZC1-2	TR8-TH	2019.09.02	2020.09.01
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

9.2. Test Setup

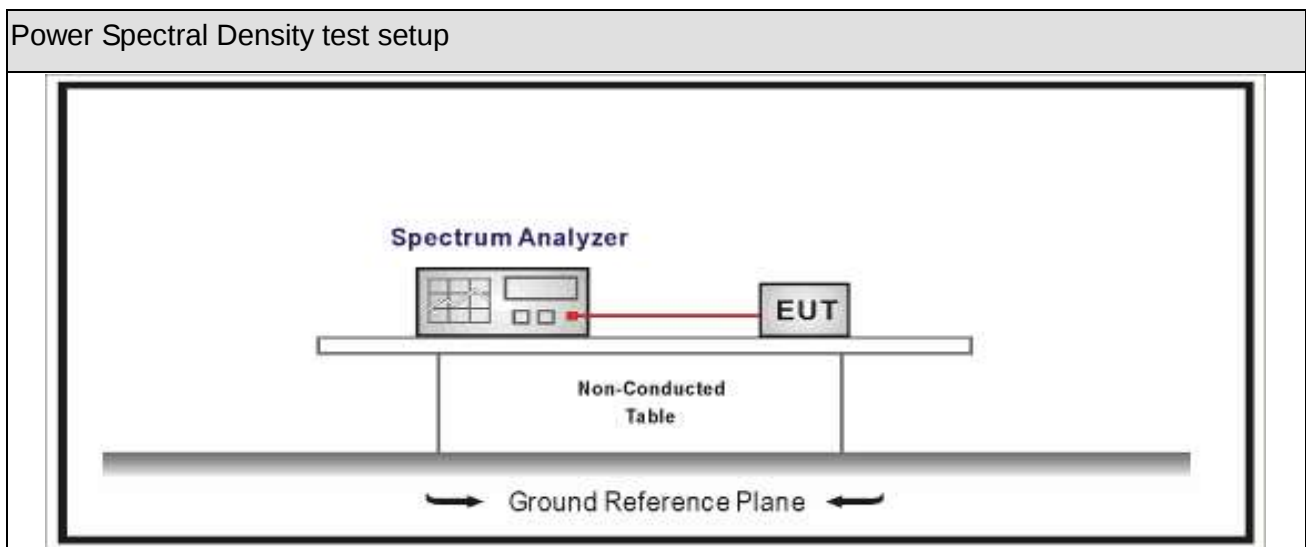

9.3. Limit





Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

9.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

Directional Gain Calculations for In-Band test method				
	Referred Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☒	KDB 662911		F2)e)	Spatial Multiplexing
	☐	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☒	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☒	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☒	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

9.5. EUT test definition

Item	Power Spectral Density			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1~4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☒	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

9.6. Test Result

Product Name	:	Wireless Access Point	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1~4	Test Site	:	TR8
Test Date	:	2020.06.10	Test Engineer	:	Eric

Radio 1:

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
			Worst Chain		
1	01	2412	-5.847	6.17	Pass
1	06	2437	-5.573	6.17	Pass
1	11	2462	-6.703	6.17	Pass
2	01	2412	-6.713	6.17	Pass
2	06	2437	-5.886	6.17	Pass
2	11	2462	-5.975	6.17	Pass
3	01	2412	-7.304	6.17	Pass
3	06	2437	-6.713	6.17	Pass
3	11	2462	-7.668	6.17	Pass
4	01	2412	-6.827	6.17	Pass
4	06	2437	-5.372	6.17	Pass
4	11	2462	-7.189	6.17	Pass

Note1: Both of two chains are tested and only the worst chain of the PSD was showed.

Radio 2 SISO:

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
			Worst Chain		
1	01	2412	-5.167	6.12	Pass
1	06	2437	-5.153	6.12	Pass
1	11	2462	-6.827	6.12	Pass
2	01	2412	-7.457	6.12	Pass
2	06	2437	-6.354	6.12	Pass
2	11	2462	-7.458	6.12	Pass
3	01	2412	-7.739	6.12	Pass
3	06	2437	-6.194	6.12	Pass
3	11	2462	-7.733	6.12	Pass
4	01	2412	-7.288	6.12	Pass
4	06	2437	-6.649	6.12	Pass
4	11	2462	-7.308	6.12	Pass

Note1: Both of two chains are tested and only the worst chain of the PSD was showed.

Radio 2 CDD:

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
			Worst Chain		
1	01	2412	-5.915	0.1	Pass
1	06	2437	-5.264	0.1	Pass
1	11	2462	-5.784	0.1	Pass
2	01	2412	-7.162	0.1	Pass
2	06	2437	-6.549	0.1	Pass
2	11	2462	-7.654	0.1	Pass
3	01	2412	-8.127	0.1	Pass
3	06	2437	-7.082	0.1	Pass
3	11	2462	-7.922	0.1	Pass
4	01	2412	-6.302	0.1	Pass
4	06	2437	-6.585	0.1	Pass
4	11	2462	-8.375	0.1	Pass

Note1: Both of two chains are tested and only the worst chain of the PSD was showed.

2: PSD limit = 8dBm/3kHz – 10Log(2) – (directional gain- 6)

Radio 2 Beamforming:

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
			Worst Chain		
3	01	2412	-8.146	0.1	Pass
3	06	2437	-6.445	0.1	Pass
3	11	2462	-7.705	0.1	Pass
4	01	2412	-7.420	0.1	Pass
4	06	2437	-5.509	0.1	Pass
4	11	2462	-6.902	0.1	Pass

Note1: Both of two chains are tested and only the worst chain of the PSD was showed.

2: $\text{PSD limit} = 8\text{dBm/3kHz} - 10\text{Log}(2) - (\text{directional gain} - 6)$

10. Antenna Requirement

10.1. Limit

Antenna Requirement Limit	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

10.2. Antenna Connector Construction

Antenna Connector Construction	
☐	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☒	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____

Appendix 1: 2.4GHz FCC&ISED RF output power

FCC&ISED 2.4GHz Power Table-Radio 1											
Standard:	FCC Part 15.247&RSS-247	Test Date:	2020.5.29	Temperature:	25℃	Humidity:	55%RH				
Project No. :	2032034R			Product Name:	Wireless Access Point	Model Name:	AP460SC	Test Site:	TR8		
Antenna Gain(dBi)		Ant 4	7.83								
Antenna Technology:	SISO										
Mode:	802.11b	Data Rate:	1Mbps	Power							
				SISO mode							
Test Conditions		Channel	Frequency	Conducted Power		EIRP		Conducted Power Limit		EIRP Limit	
			(MHz)	Ant 4	Ant 4						
				Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail	
Tnom (25℃)	Vnom (120V)	1	2412	22.02	29.85		28.17	Pass	36	Pass	
		2	2417	22.35	30.18		28.17	Pass	36	Pass	
		6	2437	22.65	30.48		28.17	Pass	36	Pass	
		10	2457	22.76	30.59		28.17	Pass	36	Pass	
		11	2462	22.23	30.06		28.17	Pass	36	Pass	
Mode:	802.11g	Data Rate:	6Mbps	Power							
				SISO mode							
Test Conditions		Channel	Frequency	Conducted Power		EIRP		Conducted Power Limit		EIRP Limit	
			(MHz)	Ant 4	Ant 4						
				Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail	
Tnom (25℃)	Vnom (120V)	1	2412	19.57	27.40		28.17	Pass	36	Pass	
		2	2417	20.97	28.80		28.17	Pass	36	Pass	
		6	2437	21.23	29.06		28.17	Pass	36	Pass	
		10	2457	19.98	27.81		28.17	Pass	36	Pass	
		11	2462	18.91	26.74		28.17	Pass	36	Pass	
Mode:	802.11n(20MHz)	Data Rate:	MCS0	Power							
				SISO mode							
Test Conditions		Channel	Frequency	Conducted Power		EIRP		Conducted Power Limit		EIRP Limit	
			(MHz)	Ant 4	Ant 4						
				Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail	
Tnom (25℃)	Vnom (120V)	1	2412	18.96	26.79		28.17	Pass	36	Pass	
		2	2417	20.43	28.26		28.17	Pass	36	Pass	
		6	2437	21.29	29.12		28.17	Pass	36	Pass	
		10	2457	19.92	27.75		28.17	Pass	36	Pass	
		11	2462	18.82	26.65		28.17	Pass	36	Pass	
Mode:	802.11ax(20MHz)	Data Rate:	HE0NSS1	Power							
				SISO mode							
Test Conditions		Channel	Frequency	Conducted Power		EIRP		Conducted Power Limit		EIRP Limit	
			(MHz)	Ant 4	Ant 4						
				Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail	
Tnom (25℃)	Vnom (120V)	1	2412	18.73	26.56		28.17	Pass	36	Pass	
		2	2417	20.42	28.25		28.17	Pass	36	Pass	
		6	2437	21.20	29.03		28.17	Pass	36	Pass	
		10	2457	19.67	27.50		28.17	Pass	36	Pass	
		11	2462	18.58	26.41		28.17	Pass	36	Pass	





FCC&ISED 2.4GHz Power Table-Radio 2



Standard:	FCC Part 15.247&RSS-247	Test Date:	2020.5.29	Temperature:	25℃		Humidity:	55%RH		
Project No. :	2032034R			Product Name:	Wireless Access Point		Model Name:	AP460SC	Test Site:	TR8
Antenna Gain(dBi)		Ant 1	7.88	Ant 2	7.88					
CDD-Directional Gain-Power(dBi)		7.88								
BF-Directional Gain-Power(dBi)		10.89								

Antenna Technology:	SISO												
Mode:	802.11b	Data Rate:	1Mbps	Power									
				SISO mode									
				Conducted power		Conducted power		EIRP		EIRP		Conducted Power Limit	
Test Conditions		Channel	Frequency	Ant1	Ant2	Ant1	Ant 2						
			(MHz)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail		
Tnom (25 °C)	Vnom (120V)	1	2412	21.56	21.26	29.44	29.14	28.12	Pass	36	Pass		
		2	2417	21.72	21.50	29.60	29.38	28.12	Pass	36	Pass		
		6	2437	21.55	21.38	29.43	29.26	28.12	Pass	36	Pass		
		10	2457	21.93	21.66	29.81	29.54	28.12	Pass	36	Pass		
		11	2462	21.63	21.06	29.51	28.94	28.12	Pass	36	Pass		
Mode:	802.11g	Data Rate:	6Mbps	Power									
				SISO mode									
				Conducted power		Conducted power		EIRP		EIRP		Conducted Power Limit	
Test Conditions		Channel	Frequency	Ant1	Ant2	Ant1	Ant 2						
			(MHz)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail		
Tnom (25 °C)	Vnom (120V)	1	2412	18.81	18.28	26.69	26.16	28.12	Pass	36	Pass		
		2	2417	19.65	19.23	27.53	27.11	28.12	Pass	36	Pass		
		6	2437	19.93	19.35	27.81	27.23	28.12	Pass	36	Pass		
		10	2457	18.91	18.63	26.79	26.51	28.12	Pass	36	Pass		
		11	2462	18.09	17.59	25.97	25.47	28.12	Pass	36	Pass		
Mode:	802.11n(20MHz)	Data Rate:	MCS0	Power									
				SISO mode									
				Conducted power		Conducted power		EIRP		EIRP		Conducted Power Limit	
Test Conditions		Channel	Frequency	Ant1	Ant2	Ant1	Ant 2						
			(MHz)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail		
Tnom (25 °C)	Vnom (120V)	1	2412	18.03	17.56	25.91	25.44	28.12	Pass	36	Pass		
		2	2417	19.41	18.98	27.29	26.86	28.12	Pass	36	Pass		
		6	2437	19.89	19.32	27.77	27.20	28.12	Pass	36	Pass		
		10	2457	19.13	18.52	27.01	26.40	28.12	Pass	36	Pass		
		11	2462	17.56	17.02	25.44	24.90	28.12	Pass	36	Pass		
Mode:	802.11ax(20MHz)	Data Rate:	HE0NSS1	Power									
				SISO mode									
				Conducted power		Conducted power		EIRP		EIRP		Conducted Power Limit	
Test Conditions		Channel	Frequency	Ant1	Ant2	Ant1	Ant 2						
			(MHz)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail		
Tnom (25 °C)	Vnom (120V)	1	2412	17.95	17.38	25.83	25.26	28.12	Pass	36	Pass		
		2	2417	19.21	18.94	27.09	26.82	28.12	Pass	36	Pass		
		6	2437	19.87	19.32	27.75	27.20	28.12	Pass	36	Pass		
		10	2457	19.07	18.50	26.95	26.38	28.12	Pass	36	Pass		
		11	2462	17.53	16.91	25.41	24.79	28.12	Pass	36	Pass		

			(MHz)	Ant1	Ant2	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail
Tnom (25 °C)	Vnom (120V)	1	2412	17.64	17.12	20.40	31.29	25.11	Pass	36	Pass
		2	2417	19.25	18.82	22.05	32.94	25.11	Pass	36	Pass
		6	2437	20.01	19.53	22.79	33.68	25.11	Pass	36	Pass
		10	2457	17.97	17.51	20.76	31.65	25.11	Pass	36	Pass
		11	2462	17.23	16.72	19.99	30.88	25.11	Pass	36	Pass
Mode:	802.11ax(20MHz)	Data Rate:	HE0NSS1	Power							
				MIMO Mode(2TX+2RX)							
Test Conditions		Channel	Frequency	Conducted power		Conducted Power	EIRP	Conducted Power Limit	EIRP Limit		
				Ant 1+2							
					Avg. (dBm)						
			(MHz)	Ant1	Ant2	Avg. (dBm)		Avg. (dBm)	Pass/Fail	Avg. (dBm)	Pass/Fail
Tnom (25 °C)	Vnom (120V)	1	2412	17.66	17.13	20.41	31.30	25.11	Pass	36	Pass
		2	2417	19.24	18.94	22.10	32.99	25.11	Pass	36	Pass
		6	2437	19.92	19.47	22.71	33.60	25.11	Pass	36	Pass
		10	2457	18.02	17.47	20.76	31.65	25.11	Pass	36	Pass
		11	2462	17.21	16.72	19.98	30.87	25.11	Pass	36	Pass