



RADIO TEST REPORT

FCC ID : QXO-AP5050
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP5050D
Applicant : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Manufacturer : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Standard : 47 CFR FCC Part 15.247

The product was received on May 16, 2022, and testing was started from May 30, 2022 and completed on Sep. 12, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sportun International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information.....	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration.....	14
2.3 EUT Operation during Test	15
2.4 Accessories	16
2.5 Support Equipment.....	16
2.6 Test Setup Diagram	17
3 Transmitter Test Result	20
3.1 AC Power-line Conducted Emissions	20
3.2 DTS Bandwidth.....	22
3.3 Maximum Conducted Output Power	23
3.4 Power Spectral Density	26
3.5 Emissions in Non-restricted Frequency Bands	28
3.6 Emissions in Restricted Frequency Bands.....	29
4 Test Equipment and Calibration Data	33

Appendix A. Test Results of AC Power-line Conducted Emissions**Appendix B. Test Results of DTS Bandwidth****Appendix C. Test Results of Maximum Conducted Output Power****Appendix D. Test Results of Power Spectral Density****Appendix E. Test Results of Emissions in Non-restricted Frequency Bands****Appendix F. Test Results of Emissions in Restricted Frequency Bands****Appendix G. Test Photos****Photographs of EUT v01**



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen**Report Producer: Viola Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

For Radio 3

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1
2.4-2.4835GHz	BT-LE(500Kb/s)	1	1
2.4-2.4835GHz	BT-LE(125Kb/s)	1	1
2.4-2.4835GHz	BT-LE(2Mbps)	2	1

Note:

- Bluetooth LE uses a GFSK modulation.
- BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Set	Ant.	Port					Brand Name	Model Name	Antenna Type	Connector	Gain (dBi)
		WLAN 2.4GHz (Radio 1) (Scanning Radio 1)	WLAN 5GHz (Radio 2)	WLAN 5GHz (Scanning Radio 1)	BT / IEEE802.15.4 (Radio 3)	GPS (Radio 4)					
1	1	1	-	-	-	-	WNC	95XEAJ15.G62	Patch	I-PEX	Note 1
	2	2	-	-	-	-	WNC	95XEAJ15.G62	Patch	I-PEX	
	3	3	-	-	-	-	WNC	95XEAJ15.G63	Patch	I-PEX	
	4	4	-	-	-	-	WNC	95XEAJ15.G63	Patch	I-PEX	
2	5	1	-	-	-	-	WNC	95XEAJ15.G64	Patch	I-PEX	Note 1
		2	-	-	-	-	WNC	95XEAJ15.G64	Patch	I-PEX	
	6	3	-	-	-	-	WNC	95XEAJ15.G65	Patch	I-PEX	
		4	-	-	-	-	WNC	95XEAJ15.G65	Patch	I-PEX	
3	7	-	1	-	-	-	WNC	95XEAJ15.G70	Patch	I-PEX	Note 1
	8	-	2	-	-	-	WNC	95XEAJ15.G70	Patch	I-PEX	
	9	-	3	-	-	-	WNC	95XEAJ15.G71	Patch	I-PEX	
	10	-	4	-	-	-	WNC	95XEAJ15.G71	Patch	I-PEX	
4	11	-	1	-	-	-	WNC	95XEAJ15.G67	Patch	I-PEX	Note 1
		-	2	-	-	-	WNC	95XEAJ15.G67	Patch	I-PEX	
	12	-	3	-	-	-	WNC	95XEAJ15.G68	Patch	I-PEX	
		-	4	-	-	-	WNC	95XEAJ15.G68	Patch	I-PEX	
5	13	-	-	1	-	-	WNC	95XEAJ15.G69	Patch	I-PEX	Note 1
		-	-	2	-	-	WNC	95XEAJ15.G69	Patch	I-PEX	
6	14	-	-	-	-	-	WNC	95XEAJ15.G72	Patch	I-PEX	Note 1
	15	-	-	-	-	-	WNC	95XEAJ15.G72	Patch	I-PEX	
	16	-	-	-	-	-	WNC	95XEAJ15.G73	Patch	I-PEX	
	17	-	-	-	-	-	WNC	95XEAJ15.G73	Patch	I-PEX	
7	18	-	-	-	-	-	WNC	95XEAJ15.G61	Patch	I-PEX	Note 1
		-	-	-	-	-	WNC	95XEAJ15.G61	Patch	I-PEX	
	19	-	-	-	-	-	WNC	95XEAJ15.G66	Patch	I-PEX	
		-	-	-	-	-	WNC	95XEAJ15.G66	Patch	I-PEX	
8	20	-	-	-	-	-	WNC	95XEAJ15.GA8	Patch	I-PEX	Note 1
		-	-	-	-	-	WNC	95XEAJ15.GA8	Patch	I-PEX	
9	21	-	-	-	1	-	WNC	95XEAJ15.G74	PCB	I-PEX	
10	22	-	-	-	-	1	WNC	95XEAJ15.G75	PCB	I-PEX	



Note 1:

Set	Ant.	Port	Antenna Gain (dBi)						Cable loss (dB)			Net Gain (dBi)		
			WLAN 2.4GHz (Radio 1)			WLAN 2.4GHz (Scanning Radio 1)			WLAN 2.4GHz (Radio 1) (Scanning Radio 1)			WLAN 2.4GHz (Radio 1) (Scanning Radio 1)		
			2412MHz	2442MHz	2472MHz	2412MHz	2442MHz	2472MHz	2412MHz	2442MHz	2472MHz	2412MHz	2442MHz	2472MHz
1	1	1	8.8	8.8	8.8	-	-	-	2.6	2.6	2.6	6.2	6.2	6.2
	2	2	8.8	8.8	8.8	-	-	-	3.0	3.0	3.0	5.8	5.8	5.8
	3	3	8.8	8.8	8.8	-	-	-	3.1	3.2	3.2	5.7	5.7	5.7
	4	4	8.8	8.8	8.8	-	-	-	4.3	4.3	4.4	4.5	4.5	4.4
2	5	1	6.2	6.2	6.2	6.2	6.2	6.2	2.6	2.6	2.6	3.6	3.6	3.6
		2	6.2	6.2	6.2	6.2	6.2	6.2	3.0	3.0	3.0	3.2	3.2	3.2
	6	3	6.2	6.2	6.2	6.2	6.2	6.2	4.0	4.0	4.0	2.2	2.2	2.2
		4	6.2	6.2	6.2	6.2	6.2	6.2	4.3	4.3	4.4	1.9	1.9	1.8

Set	Ant.	Port	Antenna Gain (dBi)						Cable loss (dB)						Net Gain (dBi)						
			WLAN 5GHz (Radio 2)			WLAN 5GHz (Scanning Radio 1)			WLAN 5GHz (Radio 2)			WLAN 5GHz (Scanning Radio 1)			WLAN 5GHz (Radio 2)			WLAN 5GHz (Scanning Radio 1)			
			UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-1	UNII-2A	UNII-2C
3	7	1	7.5	8.0	8.1	8.0	-	-	-	-	4.7	4.7	5.1	5.7	-	-	-	-	2.8	3.3	3.0
	8	2	7.5	8.0	8.1	8.0	-	-	-	-	4.3	4.3	5.2	4.7	-	-	-	-	3.2	3.7	2.9
	9	3	7.5	8.0	8.1	8.0	-	-	-	-	4.7	4.7	5.0	4.9	-	-	-	-	2.8	3.3	3.1
	10	4	7.5	8.0	8.1	8.0	-	-	-	-	4.7	4.7	5.6	5.4	-	-	-	-	2.8	3.3	2.5
4	11	1	5.8	6.2	6.3	6.7	-	-	-	-	4.6	4.6	5.6	6.2	-	-	-	-	1.2	1.6	0.7
		2	5.8	6.2	6.3	6.7	-	-	-	-	5.8	5.8	6.2	6.4	-	-	-	-	0	0.4	0.1
	12	3	5.8	6.2	6.3	6.7	-	-	-	-	4.8	4.8	4.9	5.0	-	-	-	-	1.0	1.4	1.4
		4	5.8	6.2	6.3	6.7	-	-	-	-	4.7	4.7	5.5	5.4	-	-	-	-	1.1	1.5	0.8
5	13	1	-	-	-	-	5.8	6.2	6.3	6.7	-	-	-	-	3.9	3.9	3.7	3.5	-	-	-
		2	-	-	-	-	5.8	6.2	6.3	6.7	-	-	-	-	5.0	5.0	3.9	3.9	-	-	-

Set	Ant.	Antenna Gain (dBi)											
		BT / IEEE802.15.4 (Radio 3)						GPS (Radio 4)					
9	21	2.7						-					
10	22	-						3					

Note 2: The EUT has ten sets of antennas.

Note 3:

The antenna set 1, set 3, set 6 are used for 3dB Beam width (azimuth/elevation)-Narrow Beam: 30/70 degree.

The antenna set 2, set 4, set 7 are used for 3dB Beam width (azimuth/elevation)-Wide Beam: 70/70 degree.

Note 4: The EUT doesn't enable the DFS and 6GHz band.

Note 5: The antenna set 6~8 is 6GHz's antenna. Thus, the set 6~8 function doesn't enable it at this time.



Note 6: Directional gain information.

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{\text{ANT}}} \left(\sum_{k=1}^{N_{\text{ANT}}} E_{j,k} \right)^2}{N_{\text{ANT}}} \right]$
BF	$\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{\text{ANT}}} \left(\sum_{k=1}^{N_{\text{ANT}}} E_{j,k} \right)^2}{N_{\text{ANT}}} \right]$	$\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{\text{ANT}}} \left(\sum_{k=1}^{N_{\text{ANT}}} E_{j,k} \right)^2}{N_{\text{ANT}}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$\text{Directional Gain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{\text{ANT}}} \left(\sum_{k=1}^{N_{\text{ANT}}} E_{j,k} \right)^2}{N_{\text{ANT}}} \right]$$

$$\text{NSS1}(g1,1) = 10^{G1/20}; \text{NSS1}(g1,2) = 10^{G2/20}; \text{NSS1}(g1,3) = 10^{G3/20}; \text{NSS1}(g1,4) = 10^{G4/20}$$

$$gj,k = (\text{NSS1}(g1,1) + \text{NSS1}(g1,2) + \text{NSS1}(g1,3) + \text{NSS1}(g1,4))^2$$

$$\text{DG} = 10 \cdot \log [(\text{NSS1}(g1,1) + \text{NSS1}(g1,2) + \text{NSS1}(g1,3) + \text{NSS1}(g1,4))^2 / N_{\text{ANT}}] \Rightarrow 10$$

$$\log [(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{\text{ANT}}]$$

Where ;

$$G1 = 10; G2 = 10; G3 = 10; G4 = 10;$$

Set 1 and Set 3 antenna narrow band 30 degree

$$2.4G G1 = 6.2 \text{ dB}; G2 = 5.8 \text{ dB}; G3 = 5.7 \text{ dB}; G4 = 4.5 \text{ dB}$$

$$2.4G 2T1S \text{ DG} = 9.01 \text{ dB}; 2T2S \text{ DG} = 6 \text{ dB}; 4T1S \text{ DG} = 11.55 \text{ dB}; 4T4S \text{ DG} = 5.55 \text{ dB};$$

$$5G \text{ Band1 } G1 = 2.8 \text{ dB}; G2 = 3.2 \text{ dB}; G3 = 2.8 \text{ dB}; G4 = 2.8 \text{ dB}$$

$$5G \text{ Band1 } 2T1S \text{ DG} = 6.01 \text{ dB}; 2T2S \text{ DG} = 3 \text{ dB}; 4T1S \text{ DG} = 8.92 \text{ dB}; 4T4S \text{ DG} = 2.90 \text{ dB};$$

$$5G \text{ Band2 } G1 = 3.3 \text{ dB}; G2 = 3.7 \text{ dB}; G3 = 3.3 \text{ dB}; G4 = 3.3$$

$$5G \text{ Band2 } 2T1S \text{ DG} = 6.46 \text{ dB}; 2T2S \text{ DG} = 3.46 \text{ dB}; 4T1S \text{ DG} = 9.30 \text{ dB}; 4T4S \text{ DG} = 3.28 \text{ dB};$$

$$5G \text{ Band3 } G1 = 3 \text{ dB}; G2 = 2.9 \text{ dB}; G3 = 3.1 \text{ dB}; G4 = 2.5$$

$$5G \text{ Band3 } 2T1S \text{ DG} = 6.06 \text{ dB}; 2T2S \text{ DG} = 3.06 \text{ dB}; 4T1S \text{ DG} = 9.10 \text{ dB}; 4T4S \text{ DG} = 3.08 \text{ dB};$$

$$5G \text{ Band4 } G1 = 2.3 \text{ dB}; G2 = 3.3 \text{ dB}; G3 = 3.1 \text{ dB}; G4 = 2.6$$

$$5G \text{ Band4 } 2T1S \text{ DG} = 5.82 \text{ dB}; 2T2S \text{ DG} = 2.83 \text{ dB}; 4T1S \text{ DG} = 8.85 \text{ dB}; 4T4S \text{ DG} = 2.84 \text{ dB};$$

**Set 2 and Set 4 antenna wide band 70 degree**

2.4G G1 = 3.6 dBi; G2 = 3.2 dBi; G3 = 2.2 dBi; G4 = 1.9 dBi

2.4G 2T1S DG= 9.01 dBi; 2T2S DG= 6 dBi; 4T1S DG= 11.55 dBi; 4T4S DG= 5.55 dBi;

5G Band1 G1 = 1.2 dBi; G2 = 0 dBi; G3 = 1 dBi; G4 = 1.1 dBi

5G Band1 2T1S DG= 3.63 dBi; 2T2S DG= 0.64 dBi; 4T1S DG= 6.86 dBi; 4T4S DG= 0.85 dBi;

5G Band2 G1 = 1.6 dBi; G2 = 0.4 dBi; G3 = 1.4 dBi; G4 = 1.5 dBi

5G Band2 2T1S DG= 4.03 dBi; 2T2S DG= 1.04 dBi; 4T1S DG= 7.26 dBi; 4T4S DG= 1.25 dBi;

5G Band3 G1 = 0.7 dBi; G2 = 0.1 dBi; G3 = 1.4 dBi; G4 = 0.8 dBi

5G Band3 2T1S DG= 3.42 dBi; 2T2S DG= 0.41 dBi; 4T1S DG= 6.78 dBi; 4T4S DG= 0.77 dBi;

5G Band4 G1 = 0.5 dBi; G2 = 0.3 dBi; G3 = 1.7 dBi; G4 = 1.3 dBi

5G Band4 2T1S DG= 3.41 dBi; 2T2S DG= 0.40 dBi; 4T1S DG= 6.99 dBi; 4T4S DG= 0.99 dBi;

Set 5 antenna scanning radio

5G Band1 G1 = 1.9 dBi; G2 = 0.8 dBi

5G Band1 2T1S DG= 4.38 dBi; 2T2S DG= 1.38 dBi

5G Band2 G1 = 2.3 dBi; G2 = 1.2 dBi

5G Band2 2T1S DG= 4.78 dBi; 2T2S DG= 1.78 dBi

5G Band3 G1 = 2.6 dBi; G2 = 2.4 dBi

5G Band3 2T1S DG= 5.51 dBi; 2T2S DG= 2.50 dBi

5G Band4 G1 = 3.2 dBi; G2 = 2.8 dBi

5G Band4 2T1S DG= 6.01 dBi; 2T2S DG= 3.00 dBi

**For Radio 1****For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.

Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For Scanning Radio 1**For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz UNII 1, 3:**For IEEE 802.11a/n/ac/ax mode (2TX/2RX):**

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For Radio 2**For 5GHz UNII 1, 3:****For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.

Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For Radio 3**Bluetooth / IEEE802.15.4 (1TX):**

Only Port 1 can be used as transmitting antenna.

For Radio 4**GPS (1RX):**

Only Port 1 can be used as receiving antenna.



1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.636	1.97	397.5u	3k
BT-LE(2Mbps)	0.34	4.69	212.5u	10k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
Test Software Version	DOS [ver 6.1.7601]			
Support Mode	<input checked="" type="checkbox"/>	LE 1M PHY: 1 Mb/s		
	<input checked="" type="checkbox"/>	LE Coded PHY (S=2): 500 Kb/s		
	<input checked="" type="checkbox"/>	LE Coded PHY (S=8): 125 Kb/s		
	<input checked="" type="checkbox"/>	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT support function

Function
AP
Bridge
Mesh

Note1: For above table list, only AP mode was tested and recorded in this test.

Note2: The above information was declared by manufacturer.

1.1.6 Table for Radio function

Radio (R)	WLAN 2.4GHz	5GHz	Scanning radio (WLAN 2.4GHz 4TX / 5GHz 2TX)	Bluetooth / IEEE802.15.4	GPS
R1	V (AP, Bridge, Mesh)	-	V (AP, Bridge, Mesh for 2.4GHz, AP for 5GHz UNII 1, 3)	-	-
R2	-	V (AP for UNII 1, 3 / Bridge, Mesh for UNII 1, 3)	-	-	-
R3	-	-	-	V	-
R4	-	-	-	-	V

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)	TEL: 886-3-656-9065	FAX: 886-3-656-9085	
	Test site Designation No. TW3787 with FCC.			
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.			

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Caster Chang	25.6~26.1 / 65~69	Jun. 06, 2022~Aug. 15, 2022
Radiated below 1GHz	10CH01-CB	Joe Chu	22~23 / 57~58	May 30, 2022~Sep. 12, 2022
Radiated above 1GHz	03CH02-CB	RJ Huang	25.2~26.2 / 63~65	May 31, 2022~Jul. 01, 2022
AC Conduction	CO01-CB	Allen Chung	23~24 / 56~57	May 30, 2022



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Date : After Mar. 10, 2022

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	5.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.9 dB	Confidence levels of 95%

Test Date : Before Nov. 04, 2022

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%

Test Date : Before Jun. 01, 2022

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%

Test Date : After May 31, 2022

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.2 dB	Confidence levels of 95%
Bandwidth Measurement	2.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	0E
2440MHz	0E
2480MHz	0E
BT-LE(2Mbps)	-
2402MHz	0E
2440MHz	0E
2480MHz	0E

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link(WLAN, GPS), CTX(Bluetooth, IEEE802.15.4)
1	R1 (2.4GHz+Set 1)+R2 (5GHz+Set 3)+R3 (BT)+R4 (GPS)+PoE 1
2	R1 (2.4GHz+Set 1)+R2 (5GHz+Set 3)+R3 (802.15.4)+R4 (GPS)+PoE 1
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	Scanning R1 (5GHz + Set 5)+R2 (5GHz+Set 3)+R3 (BT)+R4 (GPS)+PoE 1
4	R1 (2.4GHz+Set 2)+R2 (5GHz+Set 4)+R3 (BT)+R4 (GPS)+PoE 1
5	R1 (2.4GHz+Set 2)+R2 (5GHz+Set 4)+R3 (802.15.1)+R4 (GPS)+PoE 1
Mode 4 has been evaluated to be the worst case between Mode 4~5, thus measurement for Mode 6 will follow this same test mode.	
6	Scanning R1 (5GHz + Set 5)+R2 (5GHz+Set 4)+R3 (BT)+R4 (GPS)+PoE 1
For operating mode 4 is the worst case and it was recorded in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link, CTX The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis_R1 (2.4GHz+Set 1)+R2 (5GHz+Set 3)+R3 (BT)+R4 (GPS)+PoE 1
2	EUT in Y axis_R1 (2.4GHz+Set 1)+R2 (5GHz+Set 3)+R3 (802.15.4)+R4 (GPS)+PoE 1
3	EUT in Y axis_Scaning R1 (5GHz + Set 5)+R2 (5GHz+Set 3)+R3 (BT)+R4 (GPS)+PoE 1
4	EUT in Y axis_Scaning R1 (5GHz + Set 5)+R2 (5GHz+Set 3)+R3 (802.15.4)+R4 (GPS)+PoE 1
5	EUT in Y axis_R1 (2.4GHz+Set 2)+R2 (5GHz+Set 4)+R3 (BT)+R4 (GPS)+PoE 1
6	EUT in Y axis_R1 (2.4GHz+Set 2)+R2 (5GHz+Set 4)+R3 (802.15.4)+R4 (GPS)+PoE 1
7	EUT in Y axis_Scaning R1 (5GHz + Set 5)+R2 (5GHz+Set 4)+R3 (BT)+R4 (GPS)+PoE 1
8	EUT in Y axis_Scaning R1 (5GHz + Set 5)+R2 (5GHz+Set 4)+R3 (802.15.4)+R4 (GPS)+PoE 1
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX The EUT was performed at X axis, Y axis and Z axis and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis_Set 9 antenna_R3_1T1S

Note 1: The PoE is for measurement only, would not be marketed.

Their information as below:

Power	Brand	Model
PoE 1	Microsemi	PD-9501-10GC/AC
PoE 2	Microsemi	PD-9001GR/AT/AC

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories	
Bracket*1	
Sealing Collar*2	

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 1	Microsemi	PD-9501-10GC/AC	N/A
B	PD Load	JUNIPER	RXRB-MIB	N/A
C	5G LAN PC	DELL	T3400	N/A
D	2.5G LAN NB	DELL	E6430	N/A
E	WiFi (R2) 5G NB	DELL	E6430	N/A
F	WiFi (R1) 2.4G / 5G SCAN NB	DELL	E6430	N/A
G	GPS Simulator	WELNAVIGATE	GS-100	N/A

For Radiated (above 1GHz):

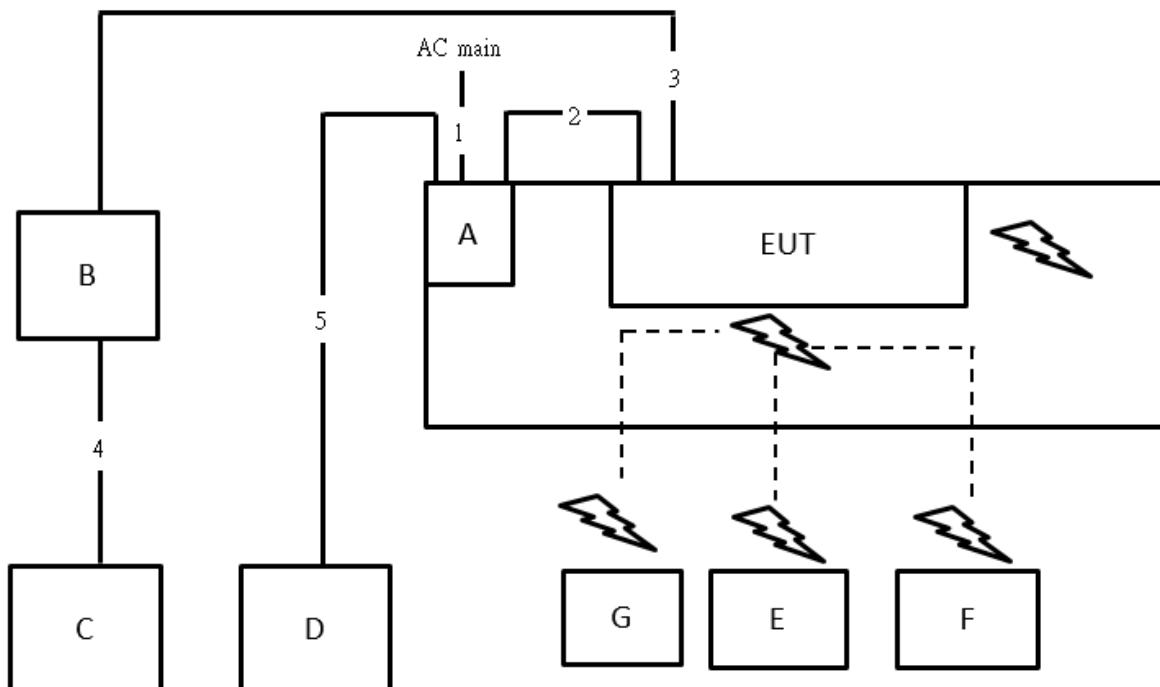
Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE 1	Microsemi	PD-9501-10GC/AC	N/A

For RF Conducted:

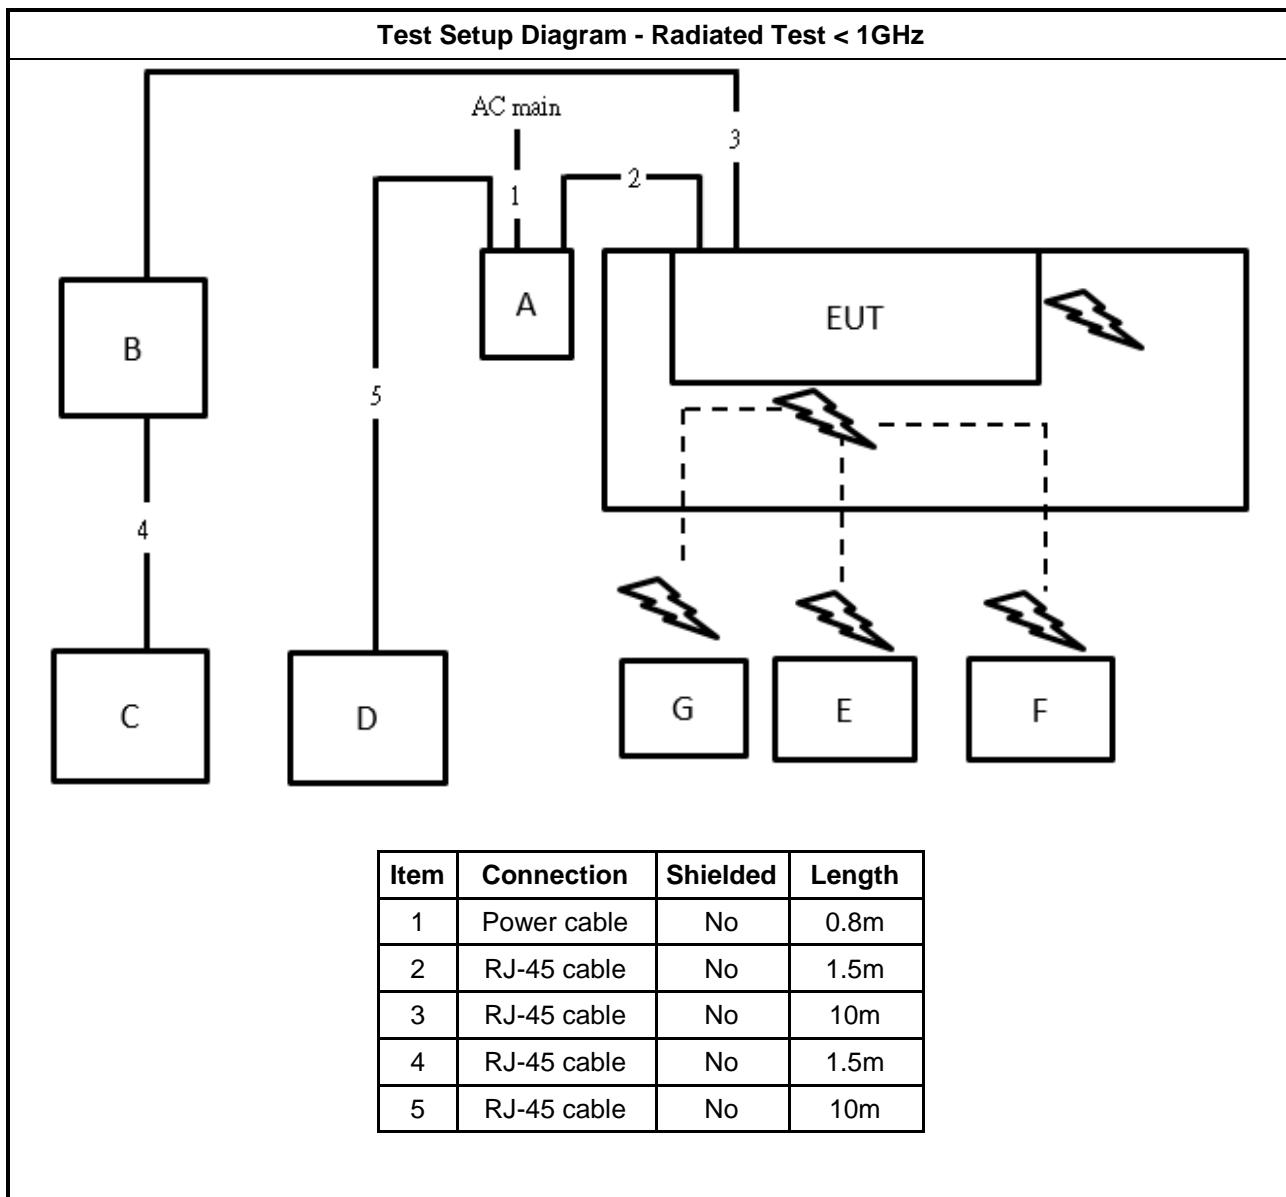
Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE 2	Microsemi	PD-9001GR/AT/AC	N/A

2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

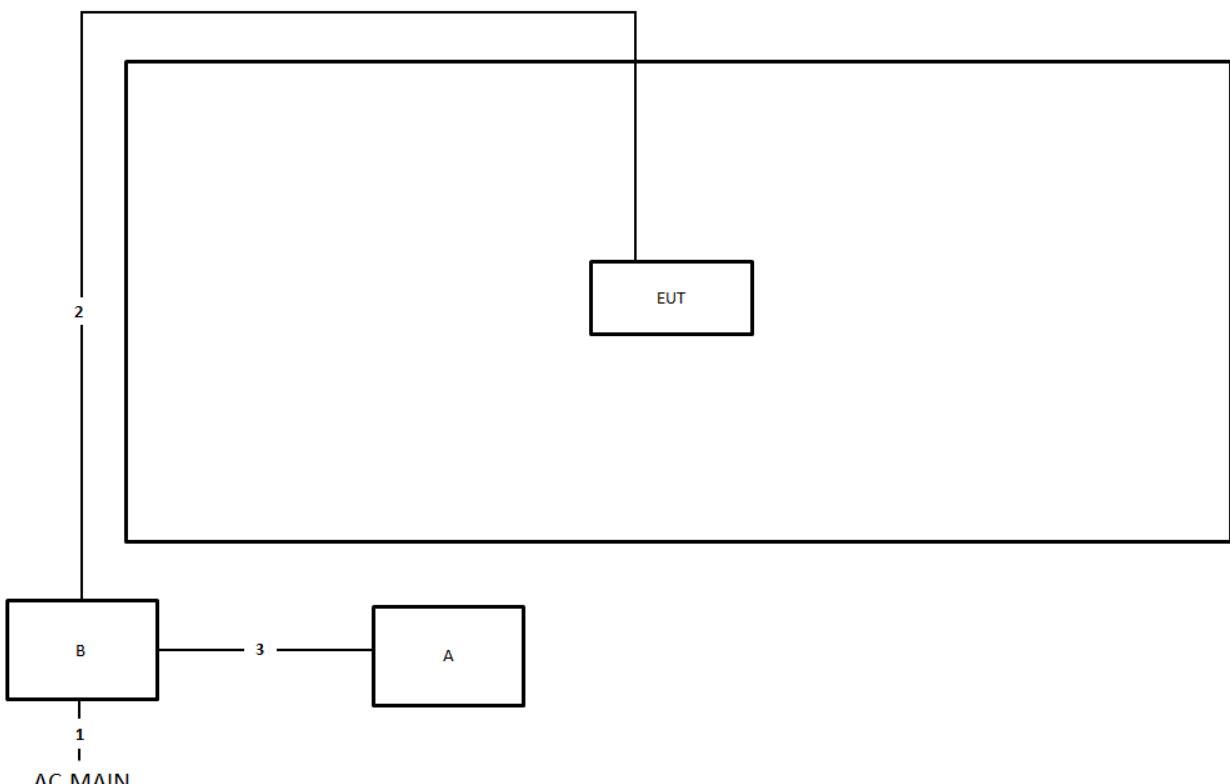


Item	Connection	Shielded	Length
1	Power cable	No	0.8m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.5m
5	RJ-45 cable	No	10m





Test Setup Diagram - Radiated Test > 1GHz



Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

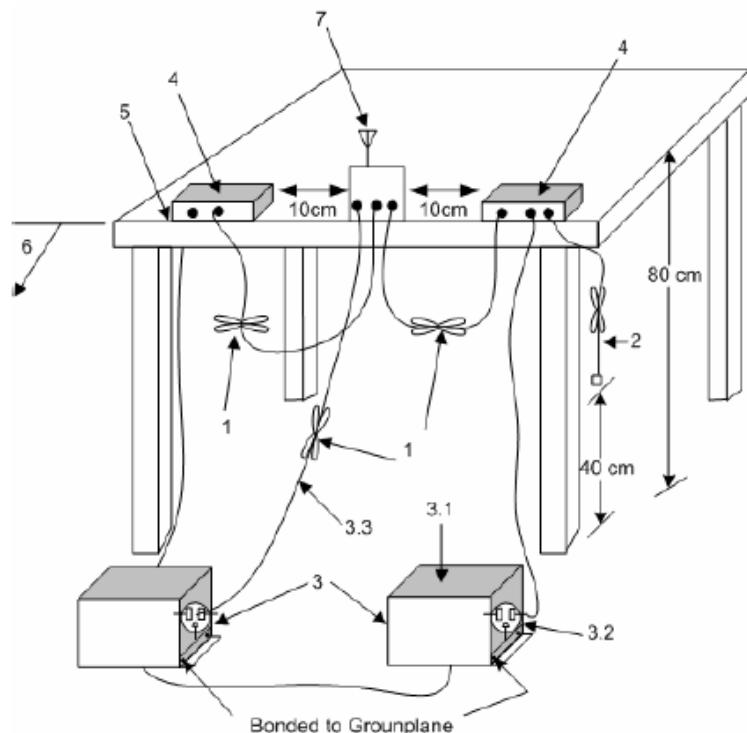
Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

AC Power-line Conducted Emissions



1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in $50\ \Omega$ loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.

3.3—LISN at least 80 cm from nearest part of EUT chassis.

4—Non-EUT components of EUT system being tested.

5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.

6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
▪ 6 dB bandwidth \geq 500 kHz.

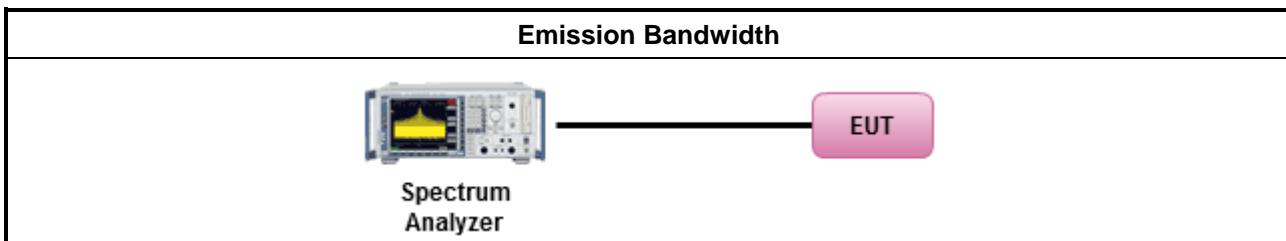
3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup



3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none">▪ If $G_{TX} \leq 6 \text{ dBi}$, then $P_{Out} \leq 30 \text{ dBm}$ (1 W)
	<ul style="list-style-type: none">▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6) \text{ dBm}$
	<ul style="list-style-type: none">▪ Point-to-point systems (P2P): If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$
	<ul style="list-style-type: none">▪ Smart antenna system (SAS):<ul style="list-style-type: none">- Single beam: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$- Overlap beam: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$- Aggregate power on all beams: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8\text{dB dBm}$

P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm,

G_{TX} = the maximum transmitting antenna directional gain in dBi.

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none">▪ Maximum Peak Conducted Output Power	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW \geq EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none">▪ Maximum Conducted Output Power	
[duty cycle \geq 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle $<$ 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none">▪ For conducted measurement.	
<input type="checkbox"/>	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	<ul style="list-style-type: none">▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$



3.3.4 Test Setup

Maximum Conducted Output Power (Power Meter)



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD)≤8 dBm/3kHz

3.4.2 Measuring Instruments

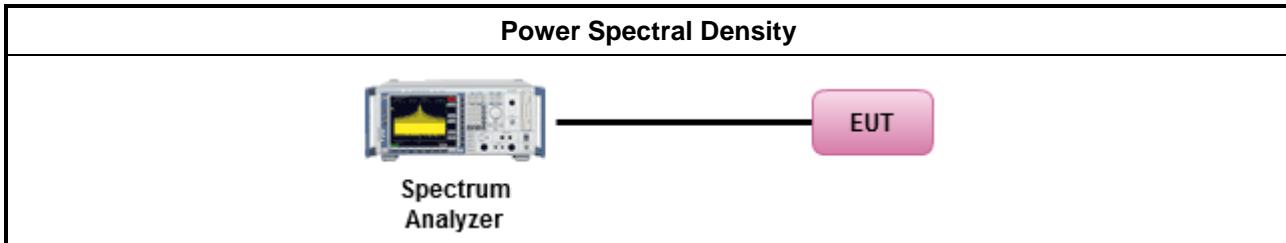
Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle ≥ 98% or external video / power trigger]
▪ For conducted measurement.
▪ If The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/> Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.



3.4.4 Test Setup



3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

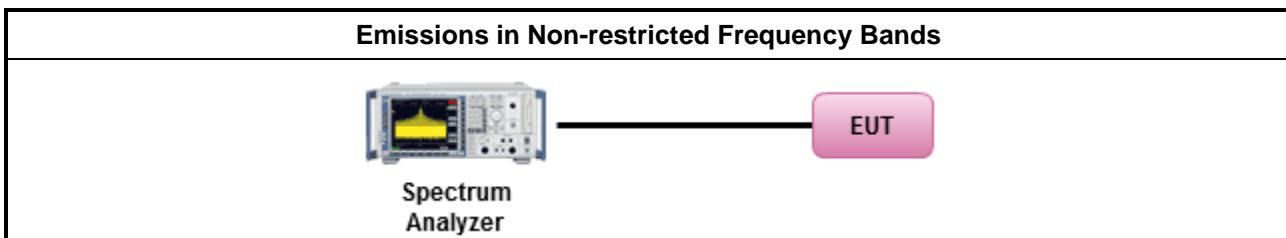
3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
▪ Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup



3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

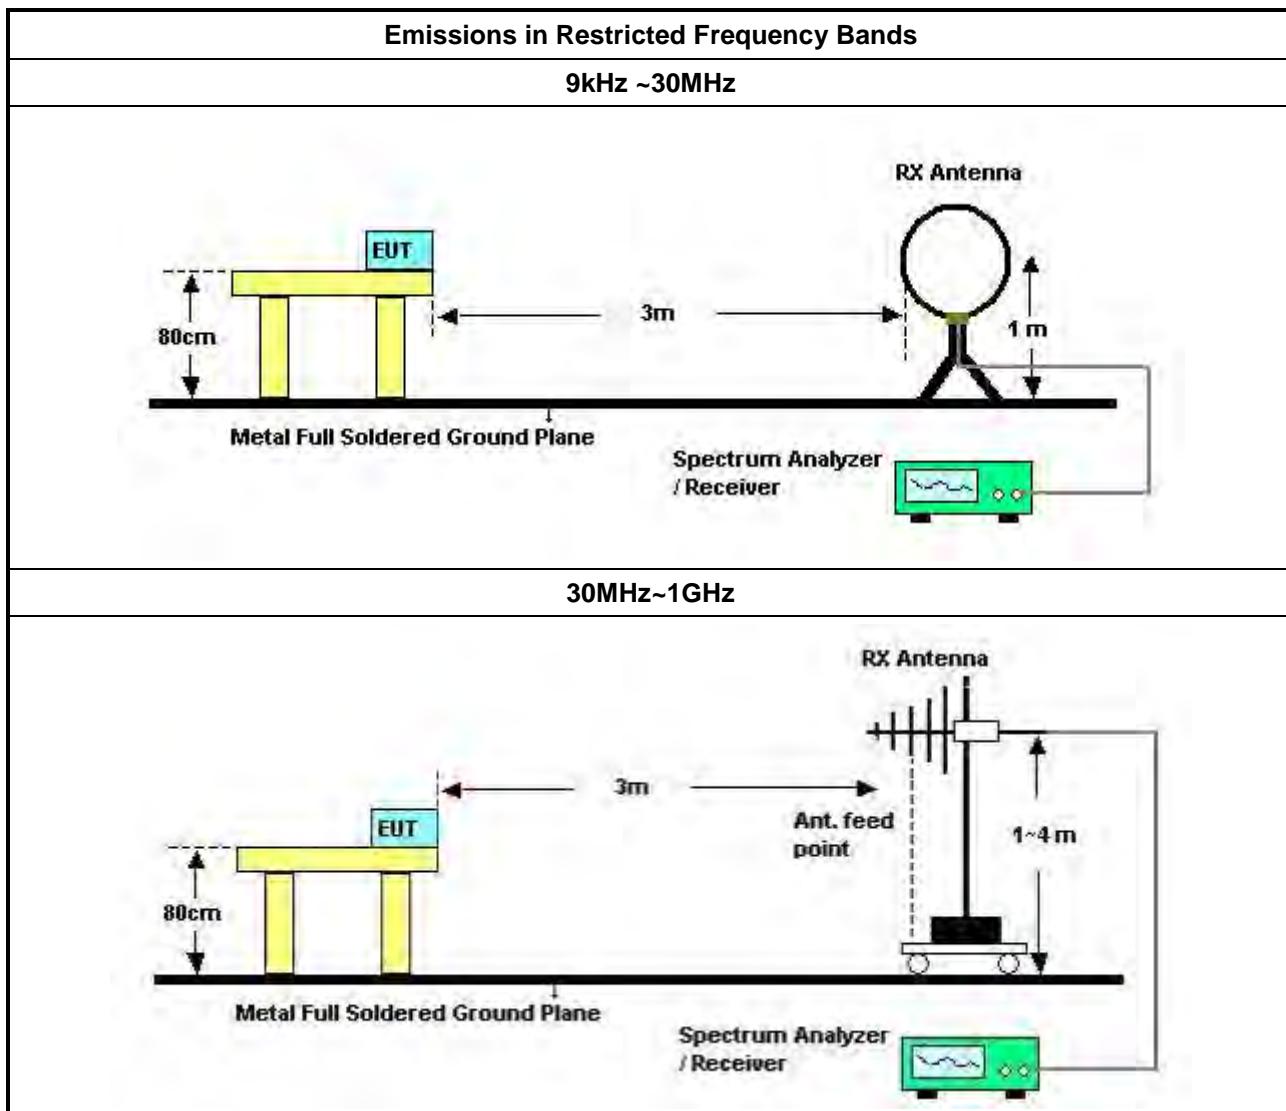
Refer a test equipment and calibration data table in this test report.

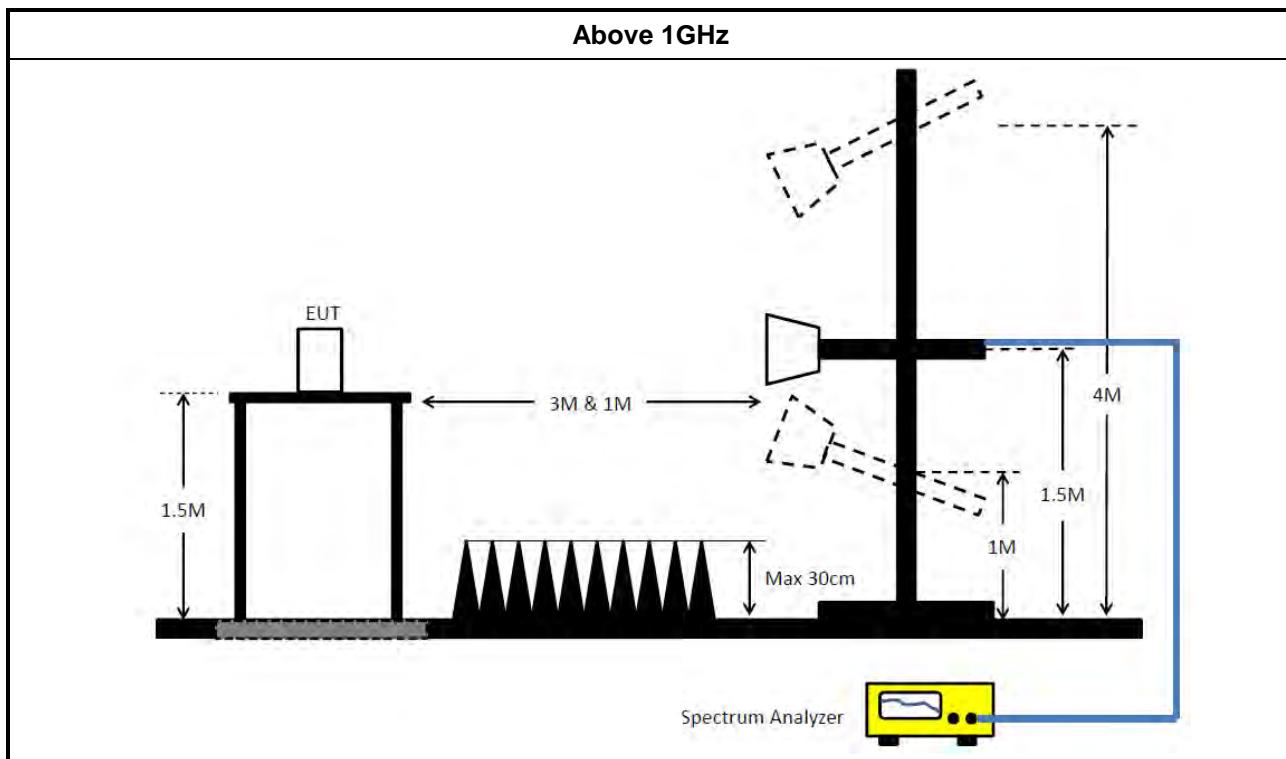


3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none">▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].	
<ul style="list-style-type: none">▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
<ul style="list-style-type: none">▪ For the transmitter unwanted emissions shall be measured using following options below:	
<ul style="list-style-type: none">▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.	<ul style="list-style-type: none"><input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle \geq98%).
	<ul style="list-style-type: none"><input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<ul style="list-style-type: none"><input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW\geq1/T).
	<ul style="list-style-type: none"><input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
	<ul style="list-style-type: none"><input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<ul style="list-style-type: none"><input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
	<ul style="list-style-type: none">▪ For the transmitter band-edge emissions shall be measured using following options below:
<ul style="list-style-type: none">▪ Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.	<ul style="list-style-type: none">▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none">▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	<ul style="list-style-type: none">▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB
<ul style="list-style-type: none">▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.	

3.6.4 Test Setup





3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 22, 2022	Feb. 21, 2023	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-1 6-2	04083	150kHz ~ 100MHz	Feb. 09, 2022	Feb. 08, 2023	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 12, 2022	Apr. 11, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 10, 2022	Feb. 09, 2023	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 18, 2022	May 17, 2023	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 27, 2022	Jan. 26, 2023	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 11, 2022	Mar. 10, 2023	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 11, 2022	Mar. 10, 2023	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde& Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde& Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 11, 2022	Jul. 10, 2023	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde& Schwarz	FSV30	101026	9kHz ~ 30GHz	Apr. 22, 2022	Apr. 21, 2023	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jul. 01, 2021	Jun. 30, 2022	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jun. 25, 2022	Jun. 24, 2023	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 20, 2021	Oct. 19, 2022	Radiation (10CH01-CB)
Low Cable	TITAN	T318E	low cable-03	30MHz ~ 1GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (10CH01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 26, 2022	Mar. 25, 2023	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 19, 2022	Apr. 18, 2023	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 19, 2022	May 18, 2023	Radiation (03CH02-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 25, 2021	Oct. 24, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 07, 2022	Jan. 06, 2023	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-11	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-12	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-13	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P1	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P2	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P3	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P4	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	SWI-03-P5	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

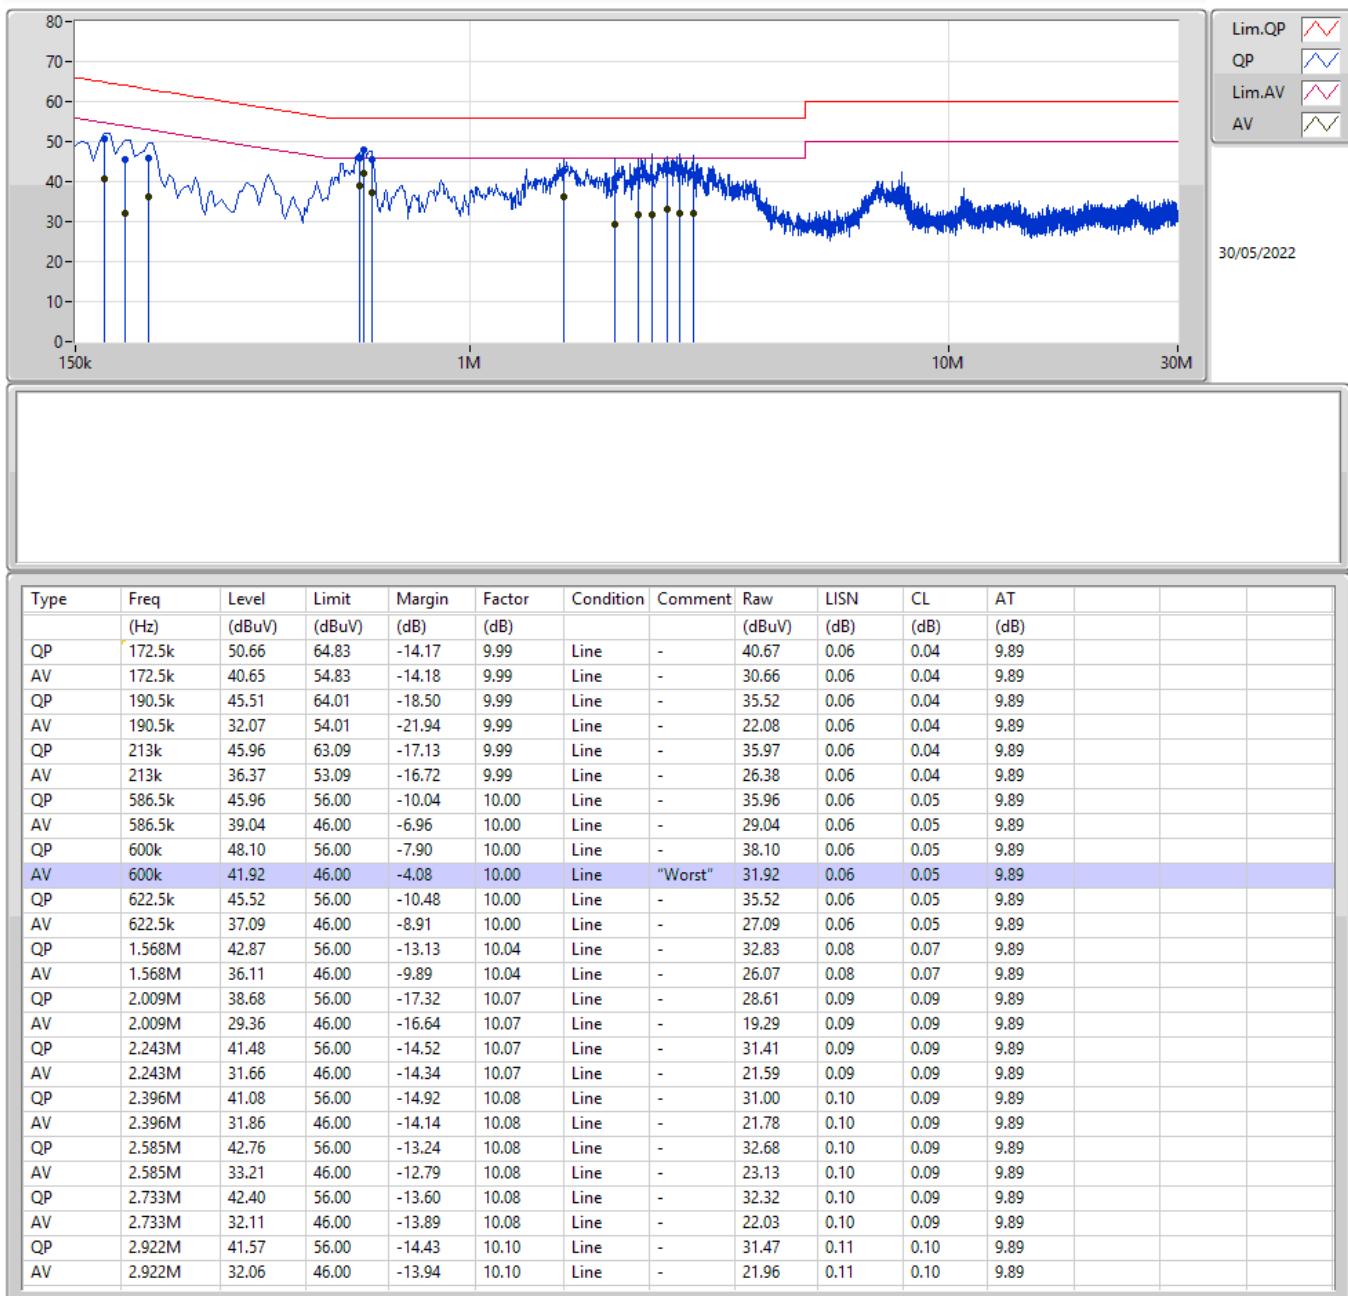


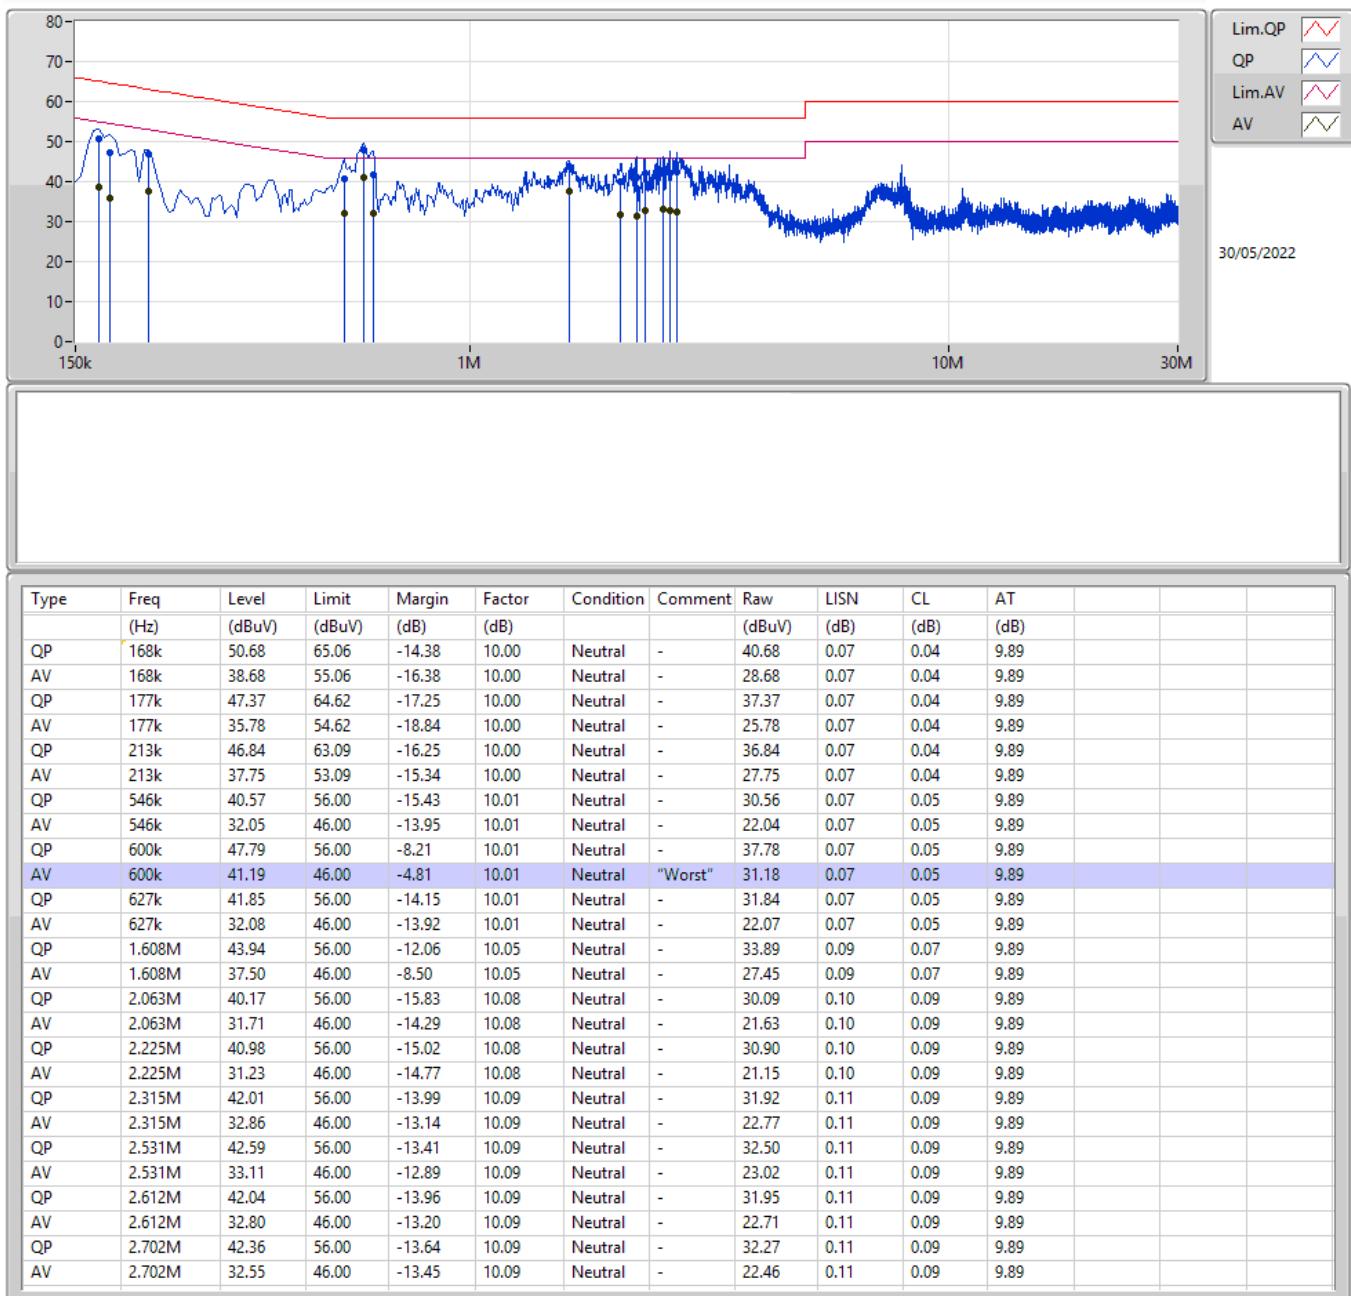
Conducted Emissions at Powerline

Appendix A.

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 4	Pass	AV	600k	41.92	46.00	-4.08	Line

Mode 4


Mode 4


**Summary**

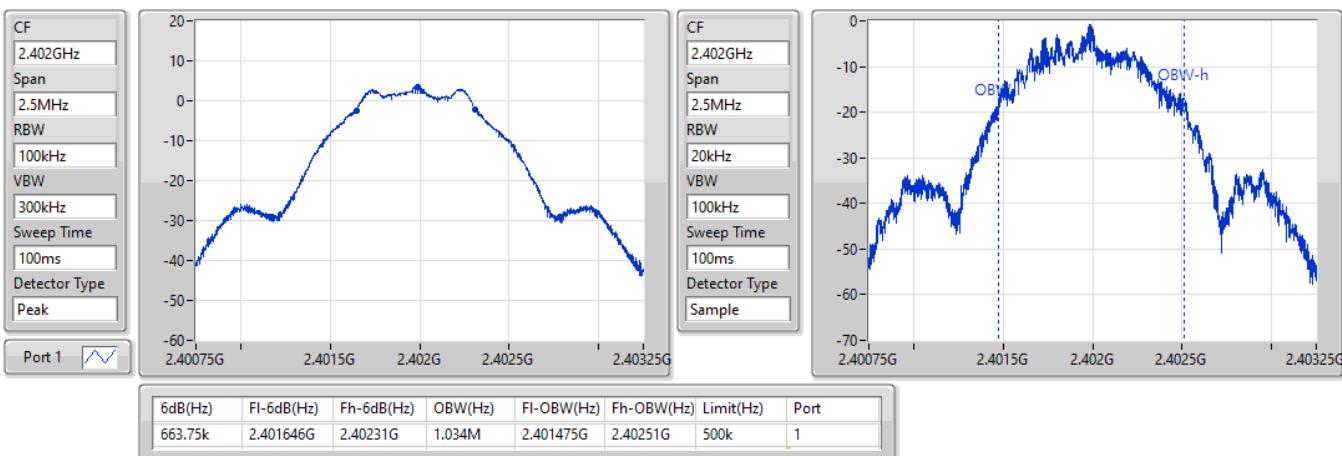
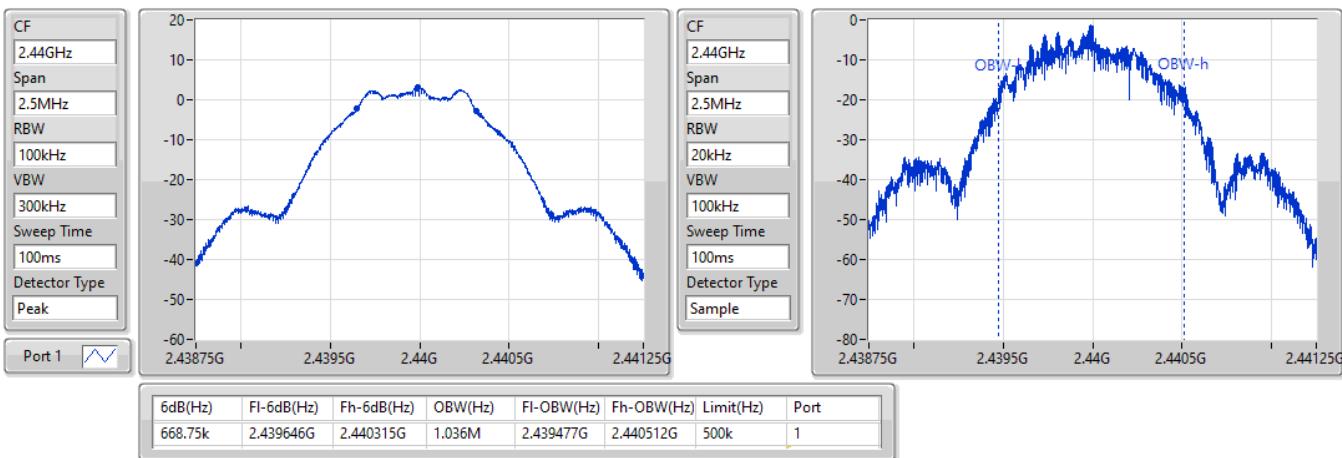
Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	668.75k	1.038M	1M04F1D	663.75k	1.034M
BT-LE(2Mbps)	1.17M	2.051M	2M05F1D	1.158M	2.041M

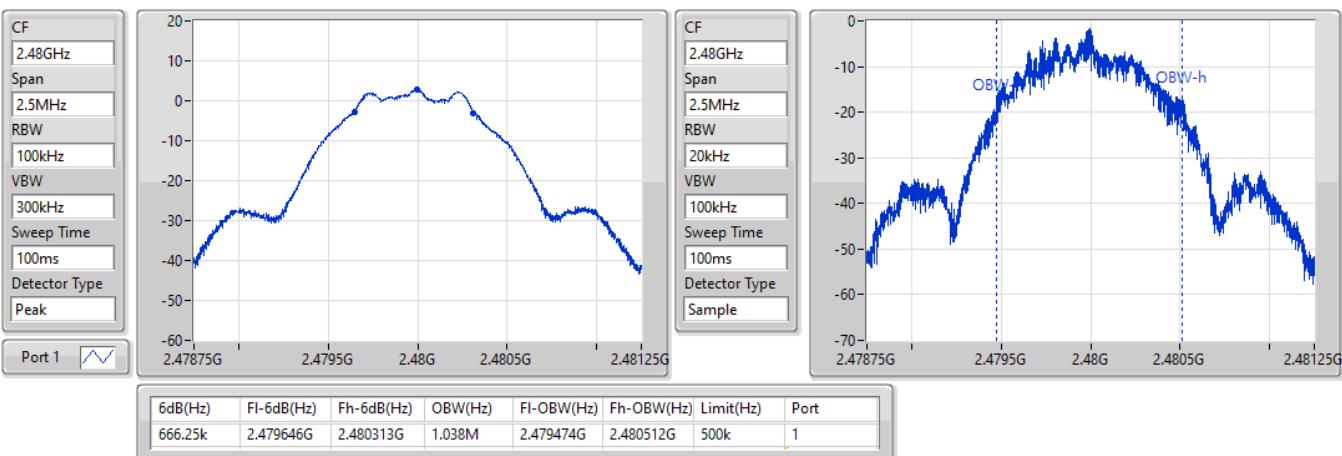
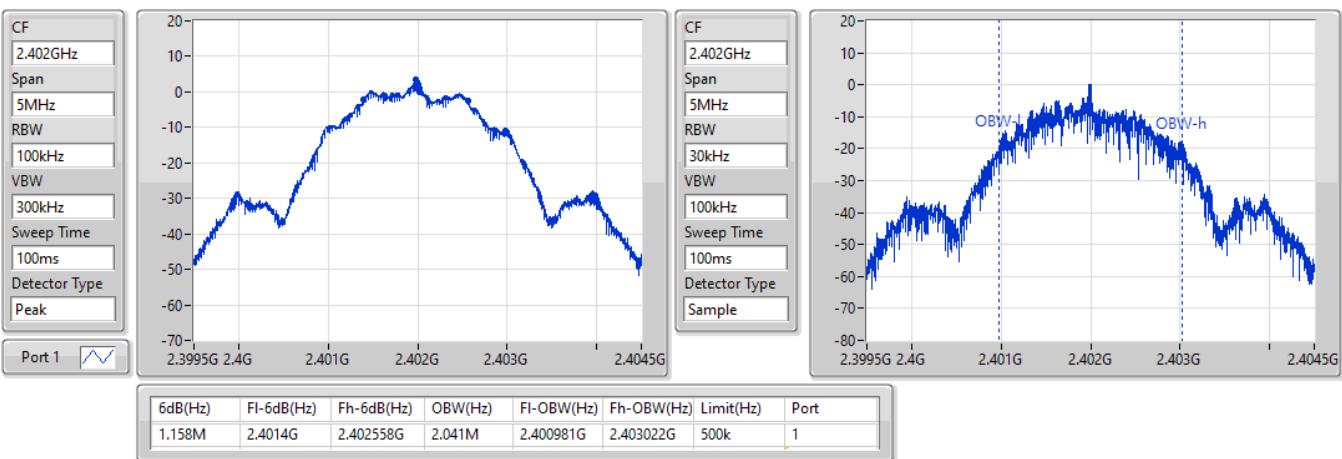
Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

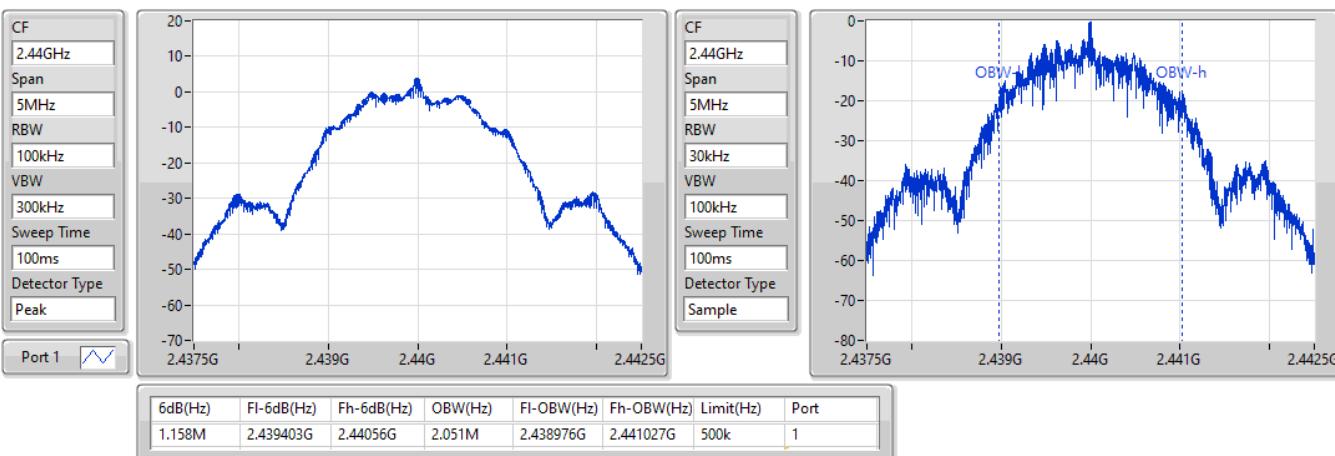
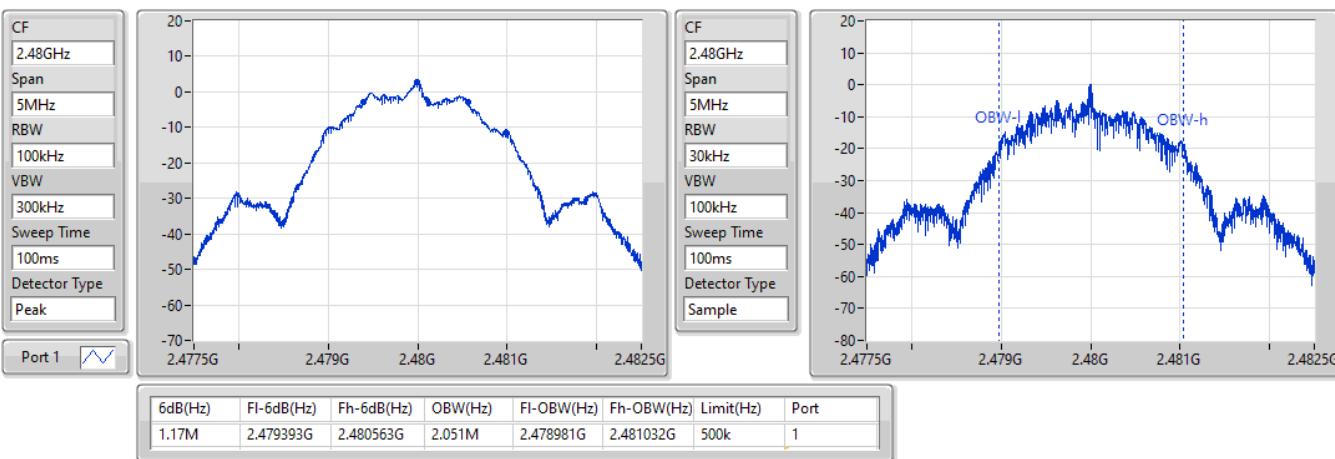
**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	663.75k	1.034M
2440MHz	Pass	500k	668.75k	1.036M
2480MHz	Pass	500k	666.25k	1.038M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.158M	2.041M
2440MHz	Pass	500k	1.158M	2.051M
2480MHz	Pass	500k	1.17M	2.051M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-LE(1Mbps)
2402MHz

BT-LE(1Mbps)
2440MHz


BT-LE(1Mbps)
2480MHz

BT-LE(2Mbps)
2402MHz


BT-LE(2Mbps)
2440MHz

BT-LE(2Mbps)
2480MHz




Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.02	0.00252
BT-LE(2Mbps)	3.78	0.00239

**Result**

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	4.02	30.00
2440MHz	Pass	2.70	3.62	30.00
2480MHz	Pass	2.70	3.33	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.78	30.00
2440MHz	Pass	2.70	3.53	30.00
2480MHz	Pass	2.70	3.16	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-12.51
BT-LE(2Mbps)	-14.43

RBW = 3kHz;

**Result**

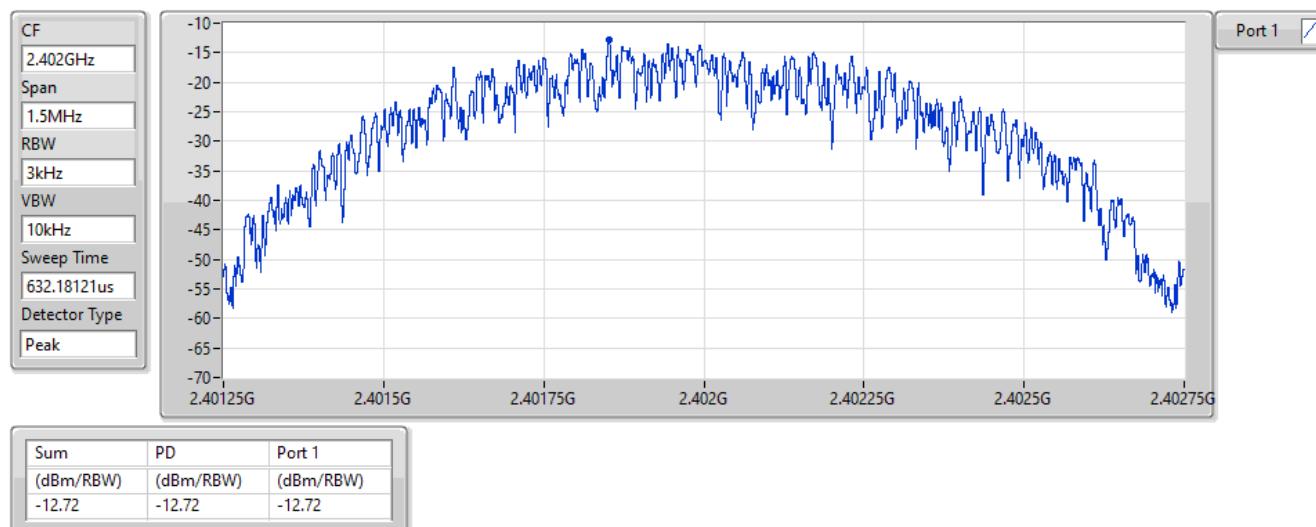
Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	-12.72	8.00
2440MHz	Pass	2.70	-12.51	8.00
2480MHz	Pass	2.70	-13.05	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	-14.43	8.00
2440MHz	Pass	2.70	-15.65	8.00
2480MHz	Pass	2.70	-17.54	8.00

DG = Directional Gain; RBW = 3kHz;

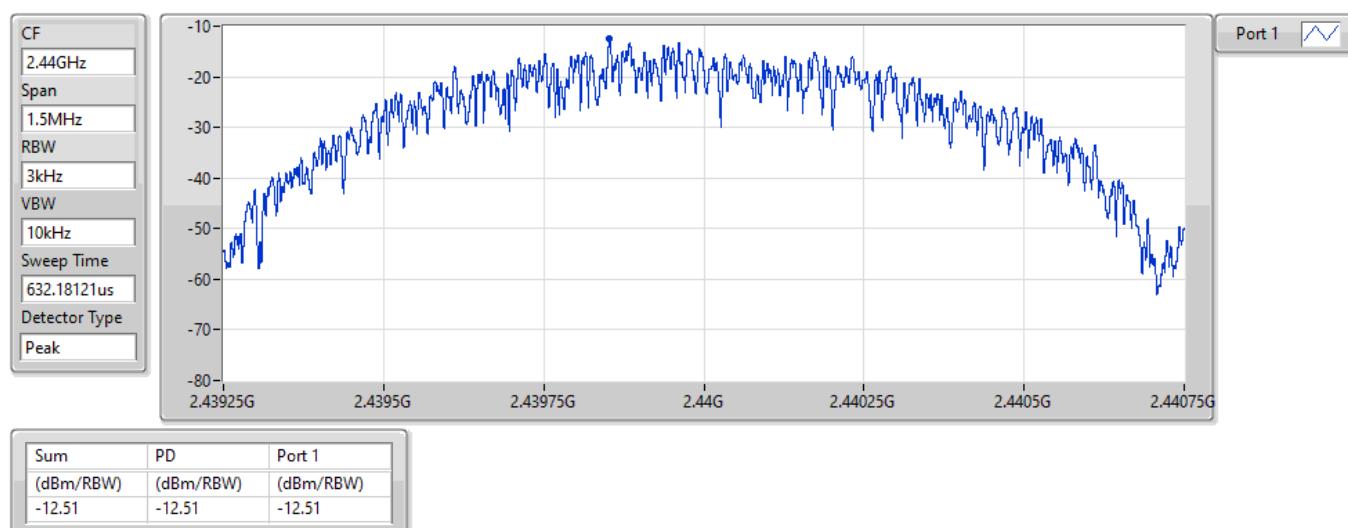
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

BT-LE(1Mbps)
2402MHz
PSD

07/06/2022

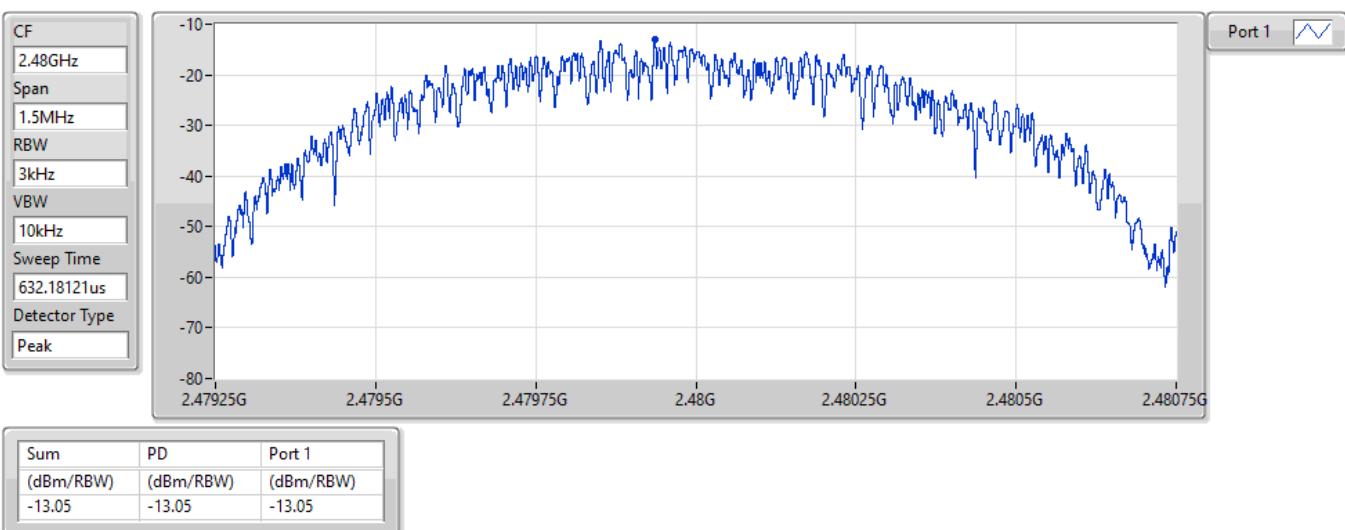

BT-LE(1Mbps)
2440MHz
PSD

07/06/2022

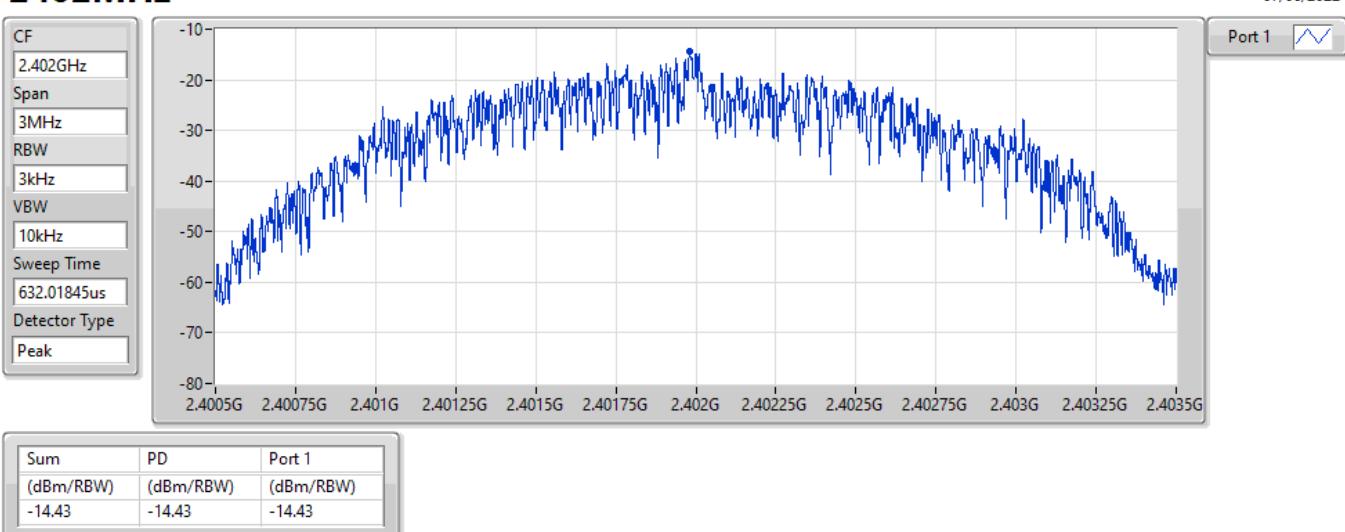


BT-LE(1Mbps)
2480MHz
PSD

07/06/2022

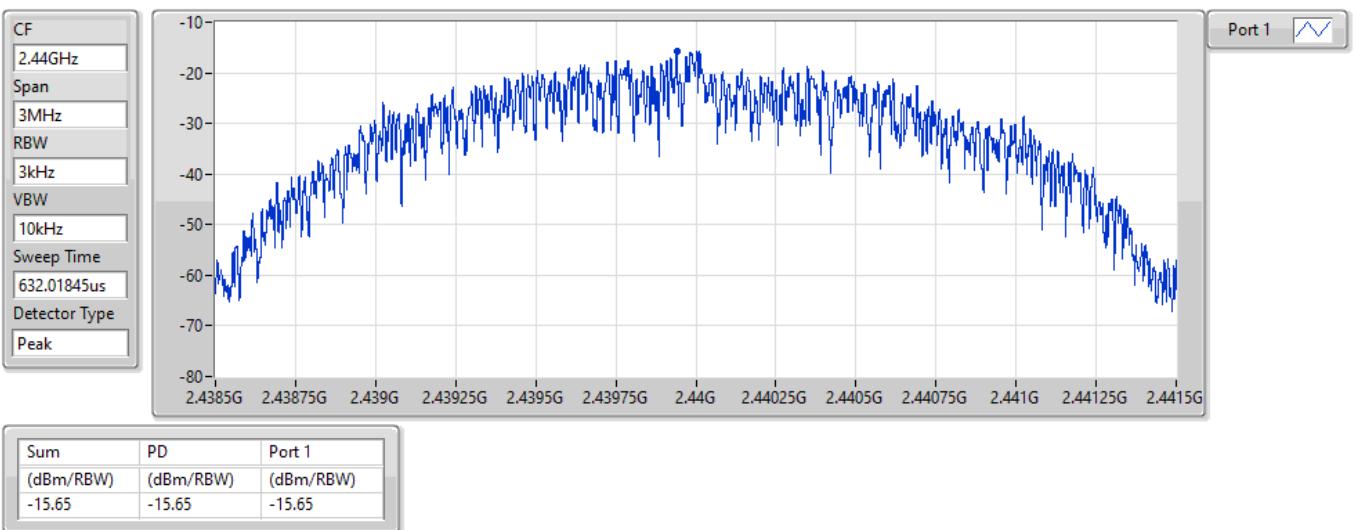

BT-LE(2Mbps)
2402MHz
PSD

07/06/2022

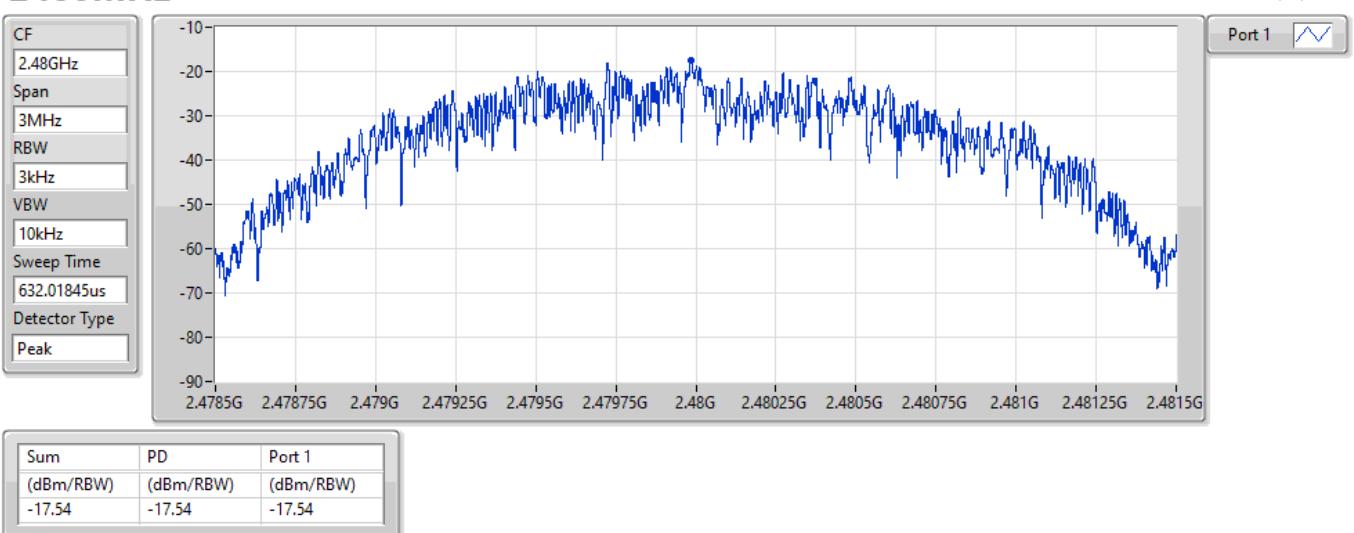


BT-LE(2Mbps)
2440MHz
PSD

07/06/2022


BT-LE(2Mbps)
2480MHz
PSD

07/06/2022



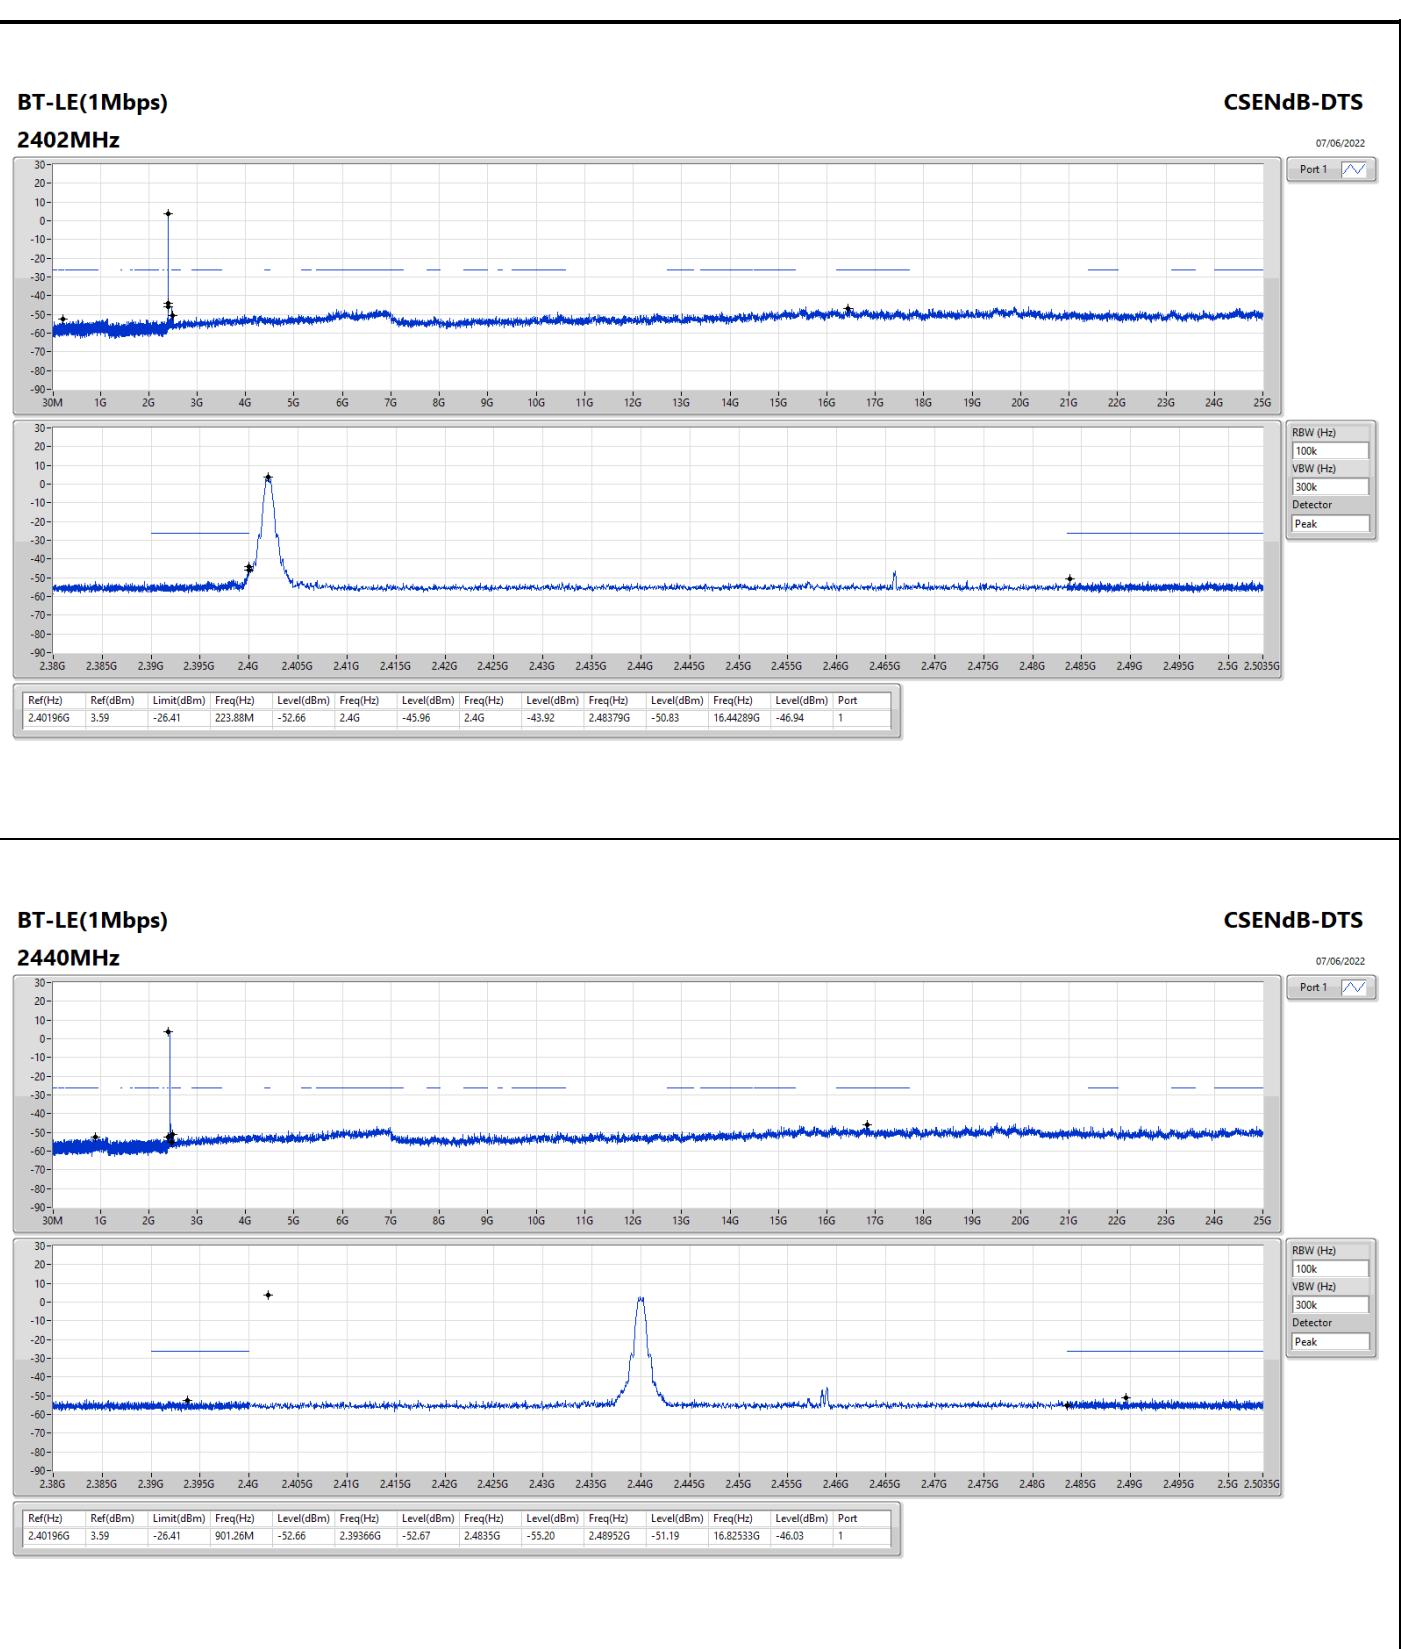
**Summary**

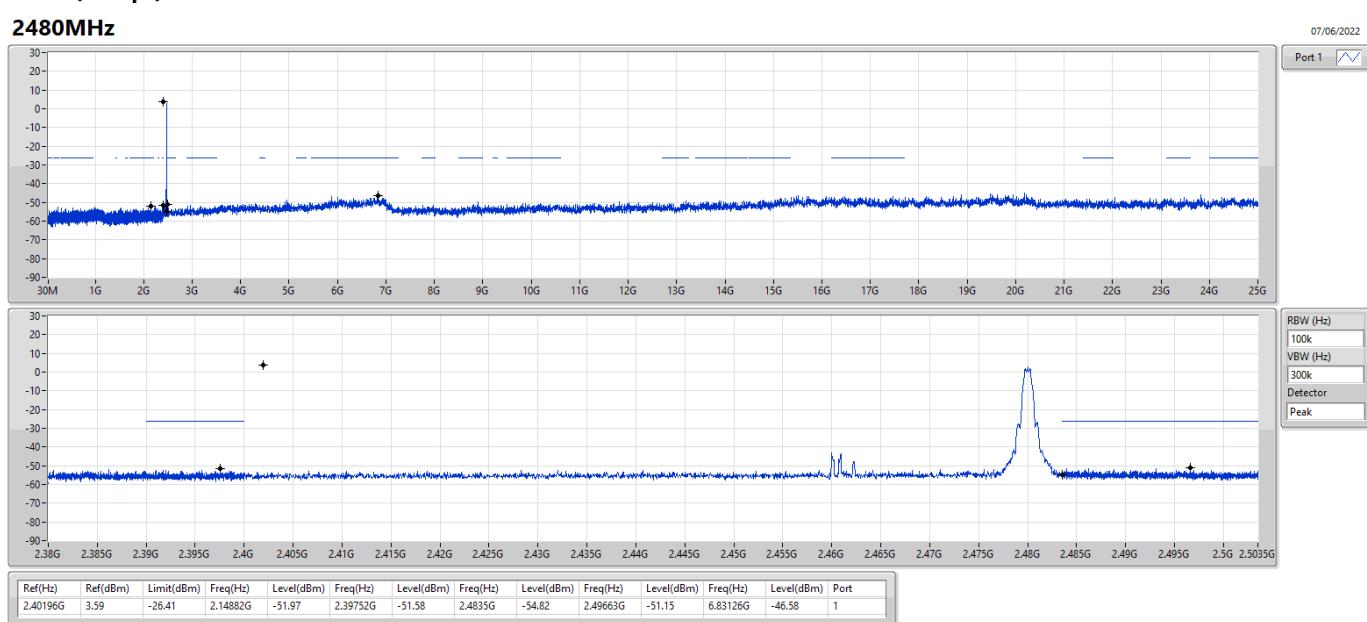
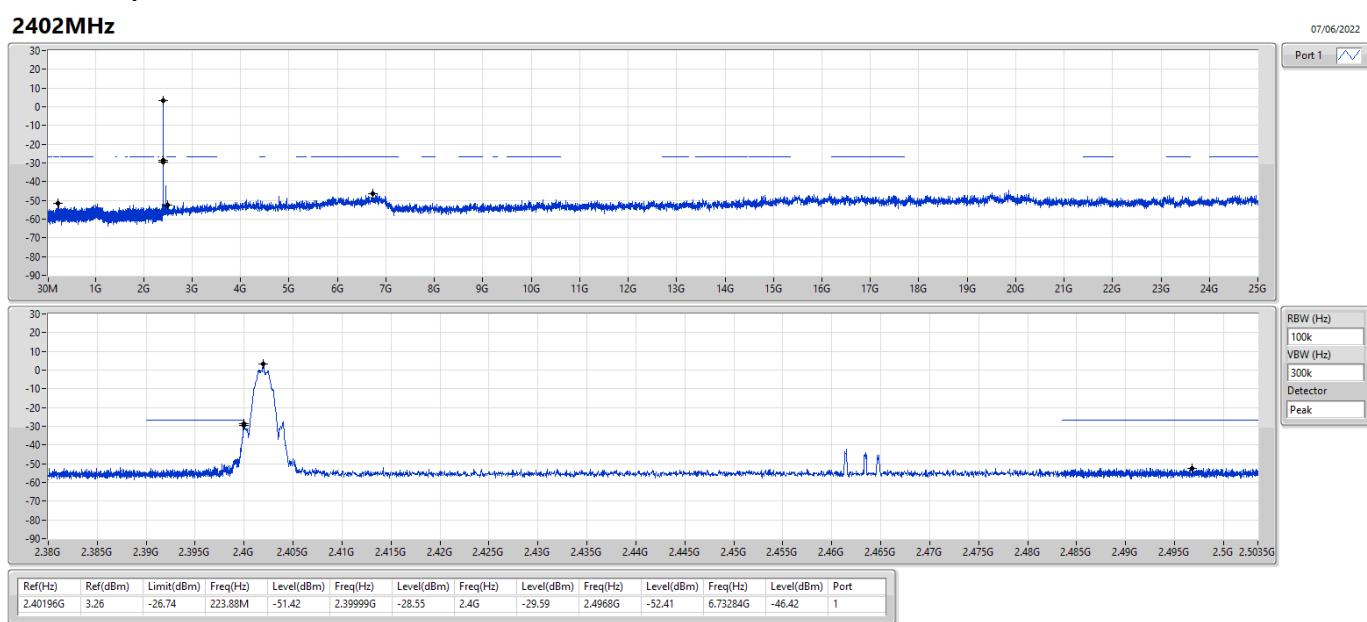
Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port								
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40196G	3.59	-26.41	223.88M	-52.66	2.4G	-45.96	2.4G	-43.92	2.48379G	-50.83	16.44289G	-46.94	1
BT-LE(2Mbps)	Pass	2.40196G	3.26	-26.74	223.88M	-51.42	2.39999G	-28.55	2.4G	-29.59	2.4968G	-52.41	6.73284G	-46.42	1

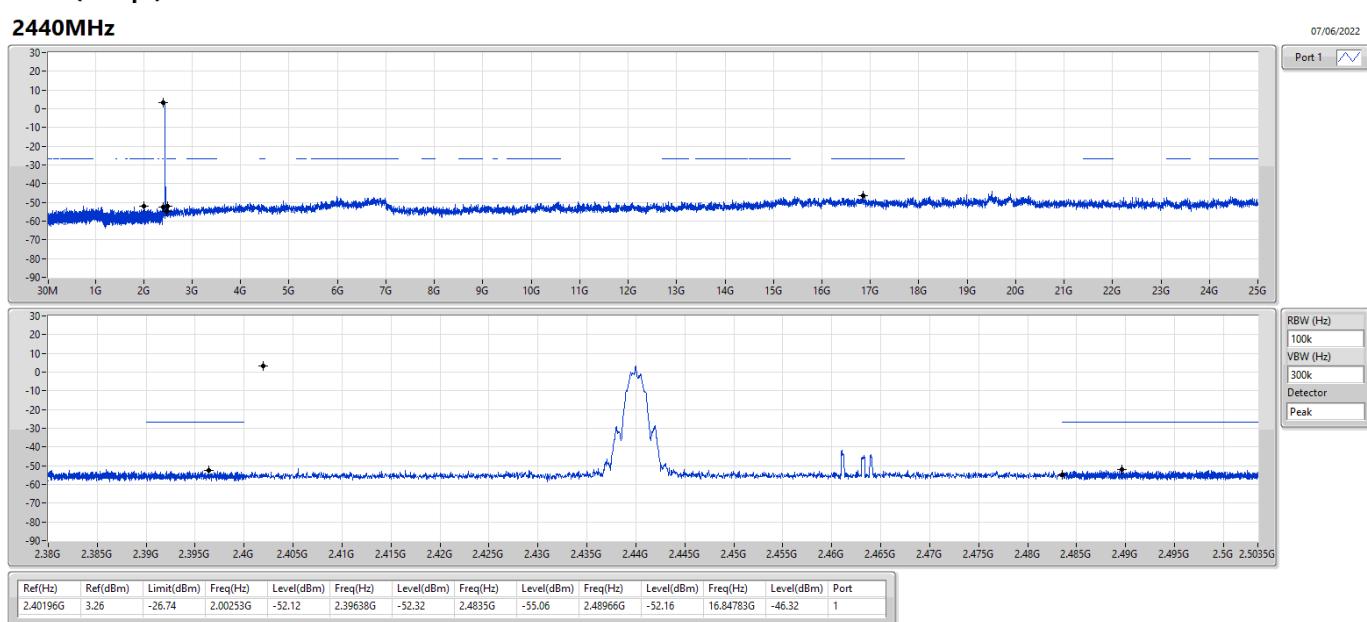
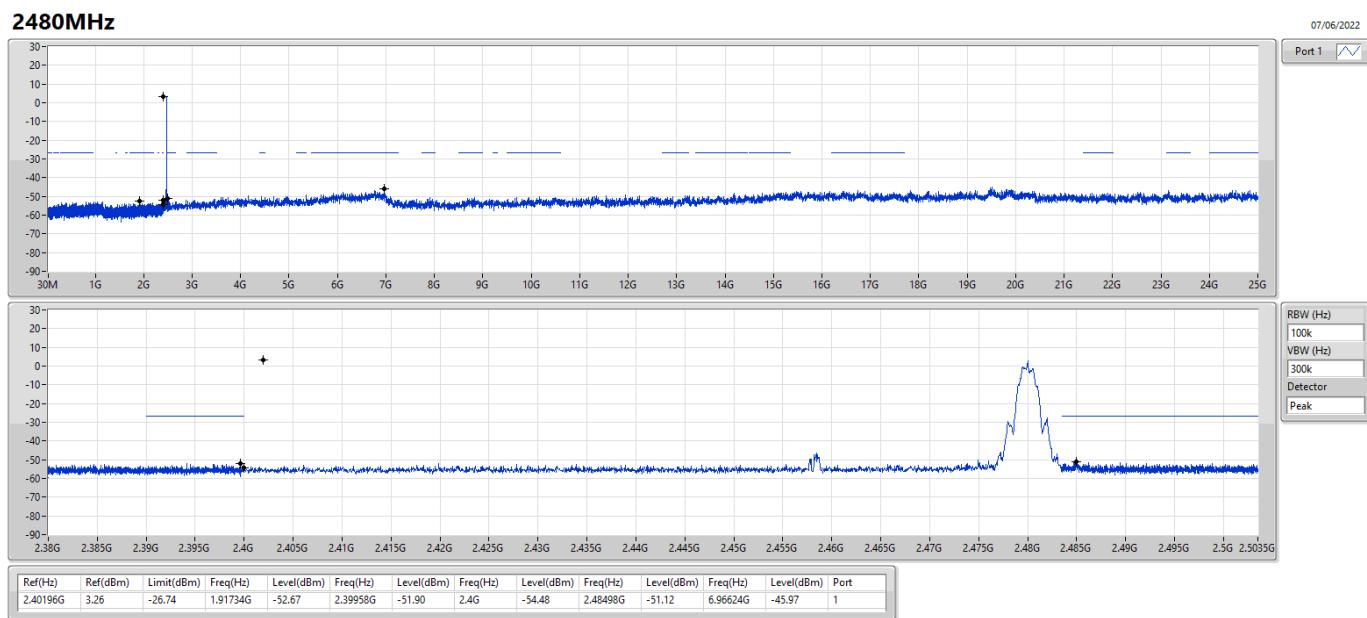


Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Port								
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40196G	3.59	-26.41	223.88M	-52.66	2.4G	-45.96	2.4G	-43.92	2.48379G	-50.83	16.44289G	-46.94	1
2440MHz	Pass	2.40196G	3.59	-26.41	901.26M	-52.66	2.39366G	-52.67	2.4835G	-55.20	2.48952G	-51.19	16.82533G	-46.03	1
2480MHz	Pass	2.40196G	3.59	-26.41	2.14882G	-51.97	2.39752G	-51.58	2.4835G	-54.82	2.49663G	-51.15	6.83126G	-46.58	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40196G	3.26	-26.74	223.88M	-51.42	2.39999G	-28.55	2.4G	-29.59	2.4968G	-52.41	6.73284G	-46.42	1
2440MHz	Pass	2.40196G	3.26	-26.74	2.00253G	-52.12	2.39638G	-52.32	2.4835G	-55.06	2.48966G	-52.16	16.84783G	-46.32	1
2480MHz	Pass	2.40196G	3.26	-26.74	1.91734G	-52.67	2.39958G	-51.90	2.4G	-54.48	2.48498G	-51.12	6.96624G	-45.97	1

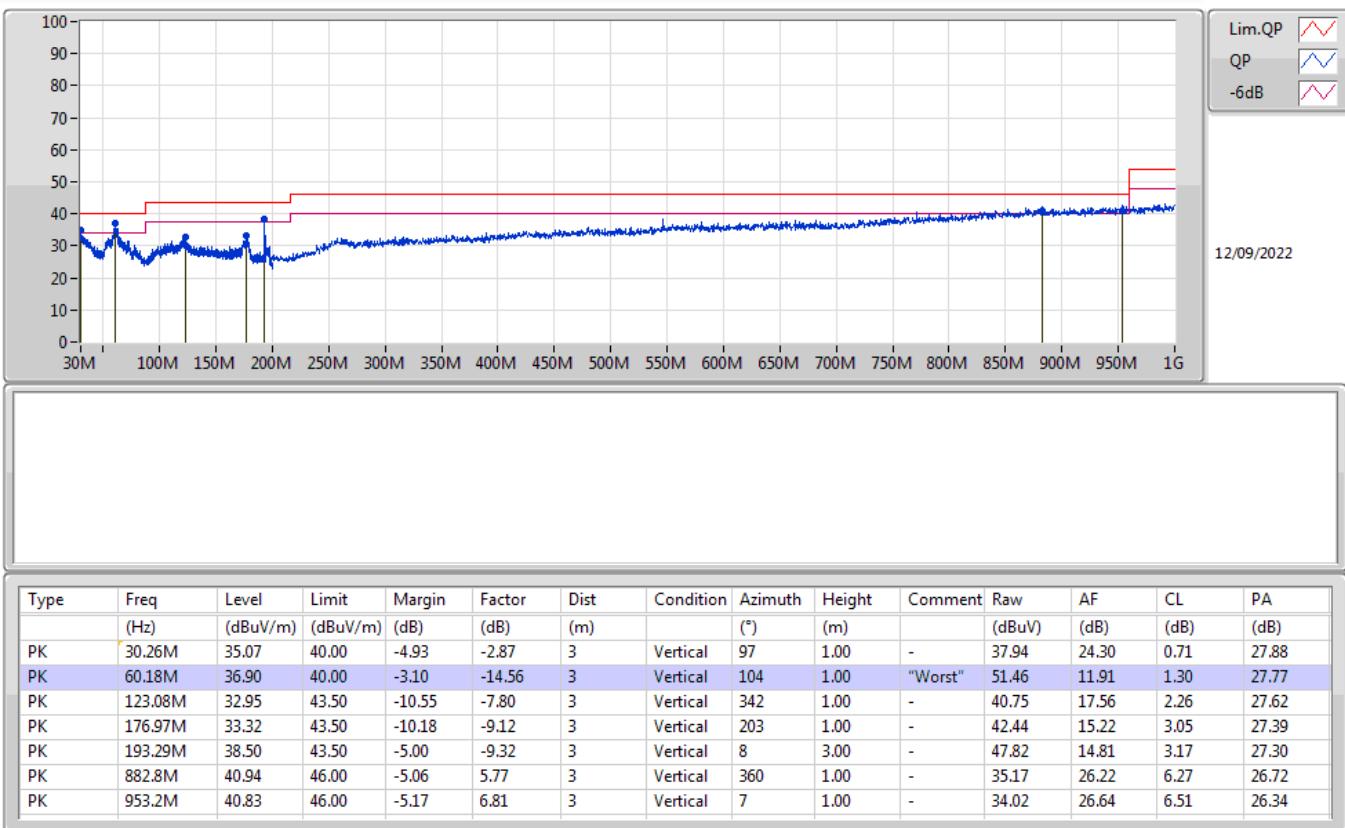


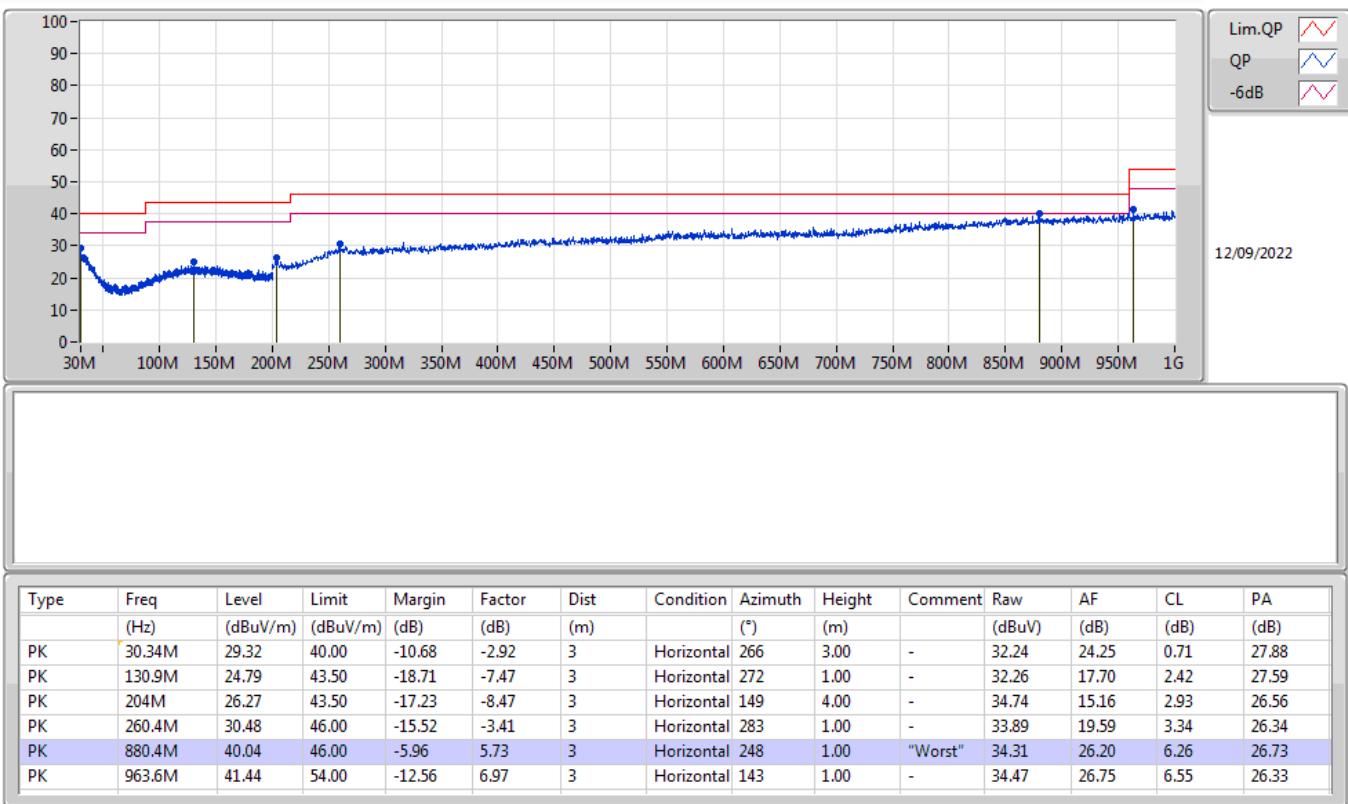
BT-LE(1Mbps)
2480MHz

BT-LE(2Mbps)
2402MHz


BT-LE(2Mbps)
2440MHz

BT-LE(2Mbps)
2480MHz


**Summary**

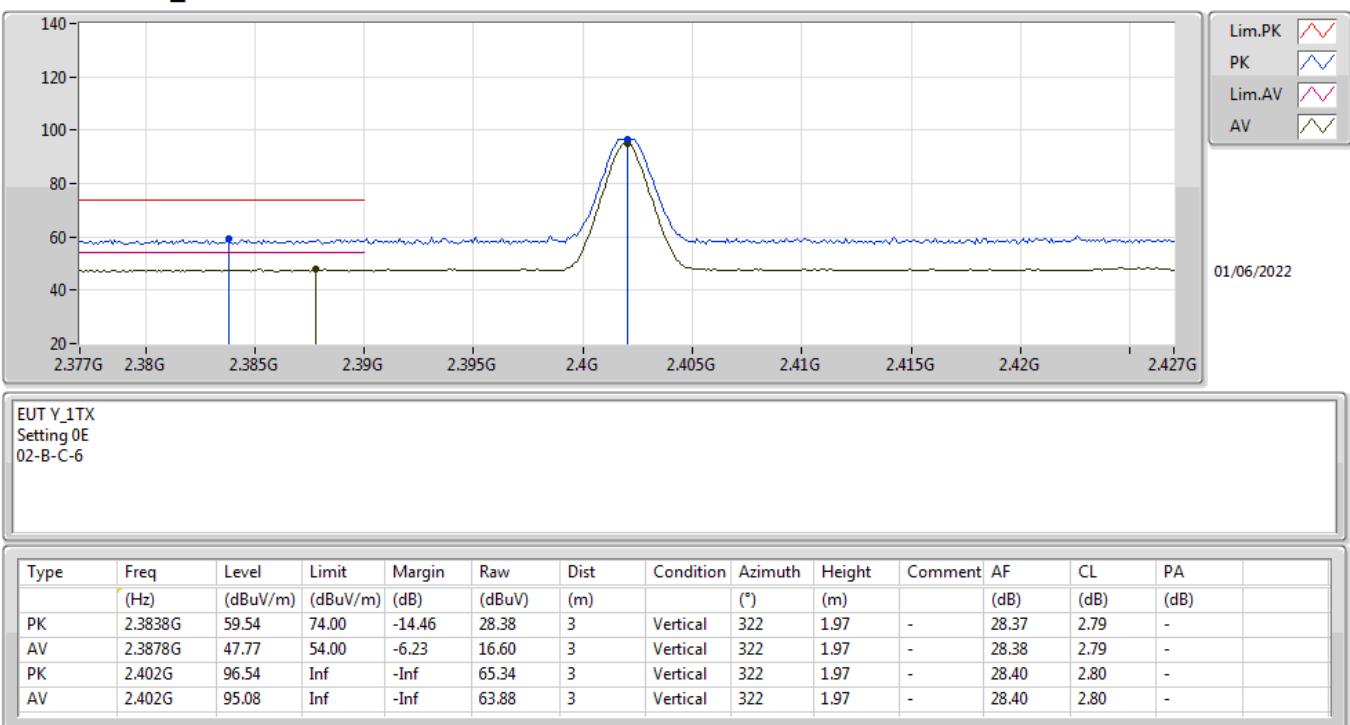
Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	60.18M	36.90	40.00	-3.10	Vertical

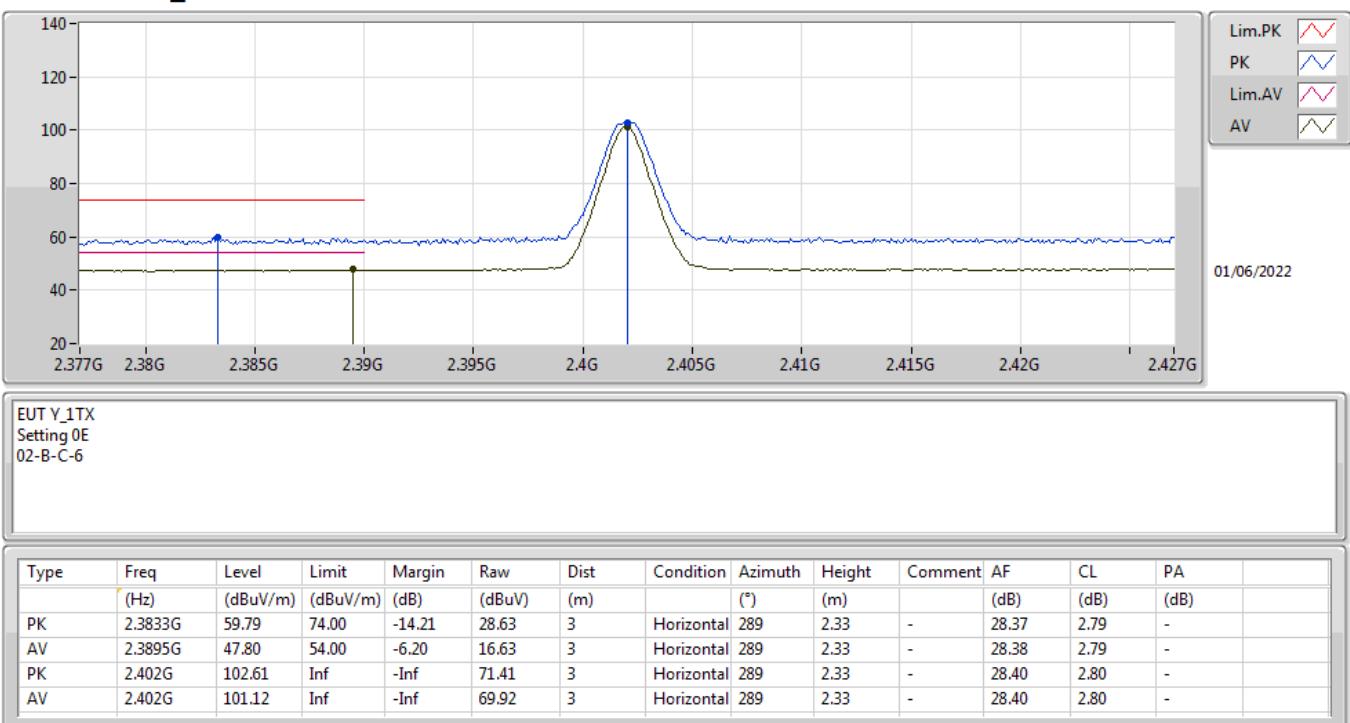
Mode 1


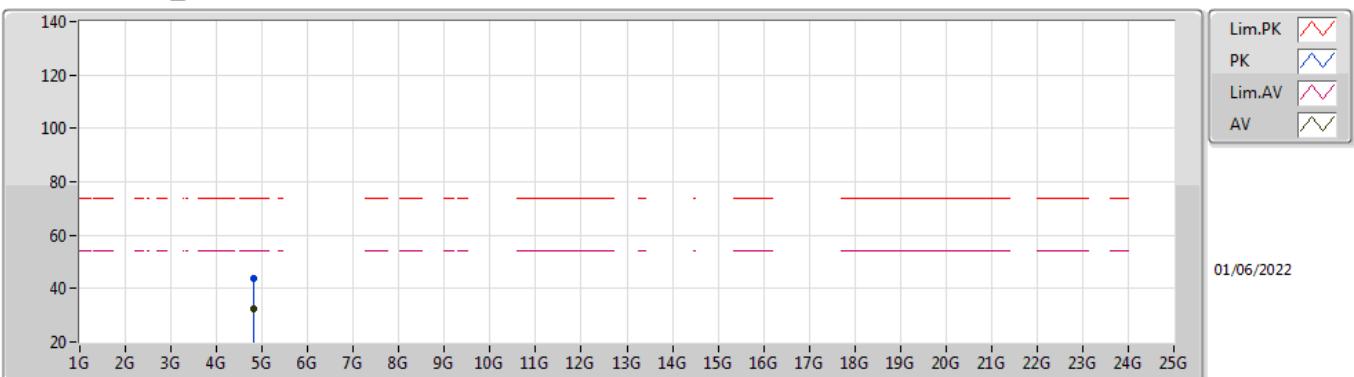
Mode 1


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(2Mbps)	Pass	AV	2.494G	49.49	54.00	-4.51	3	Horizontal	320	2.95	-

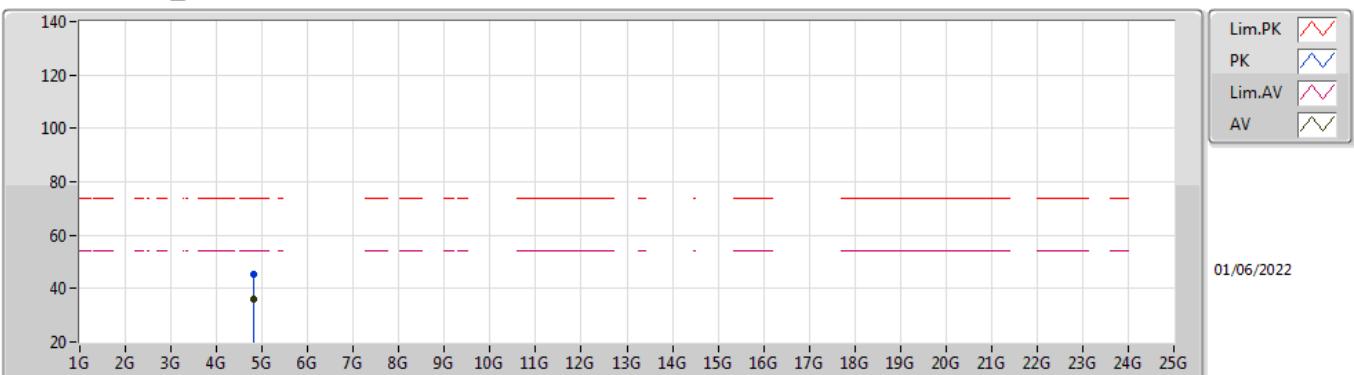
BT-LE(1Mbps)
2402MHz_TX


BT-LE(1Mbps)
2402MHz_TX


BT-LE(1Mbps)
2402MHz_TX


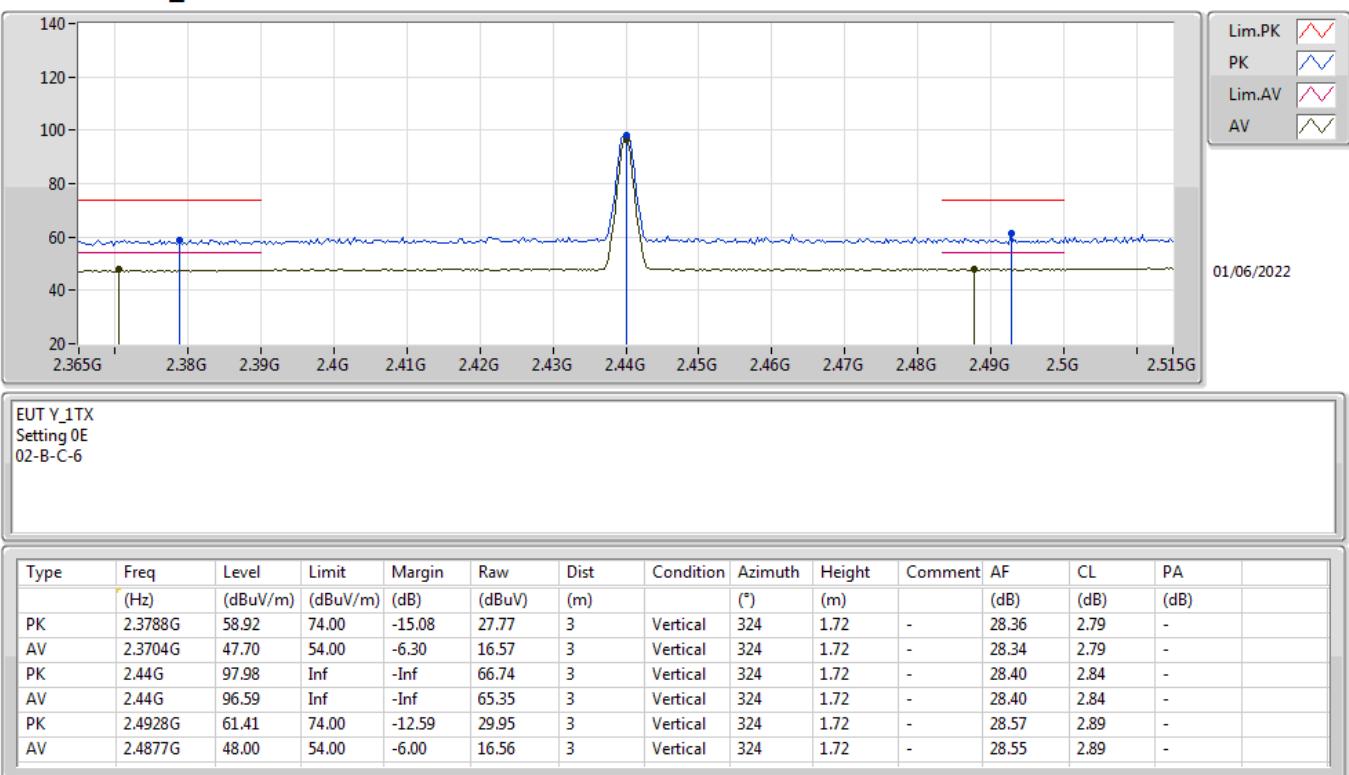
EUT Y_1TX
Setting 0E
02-B-C-6

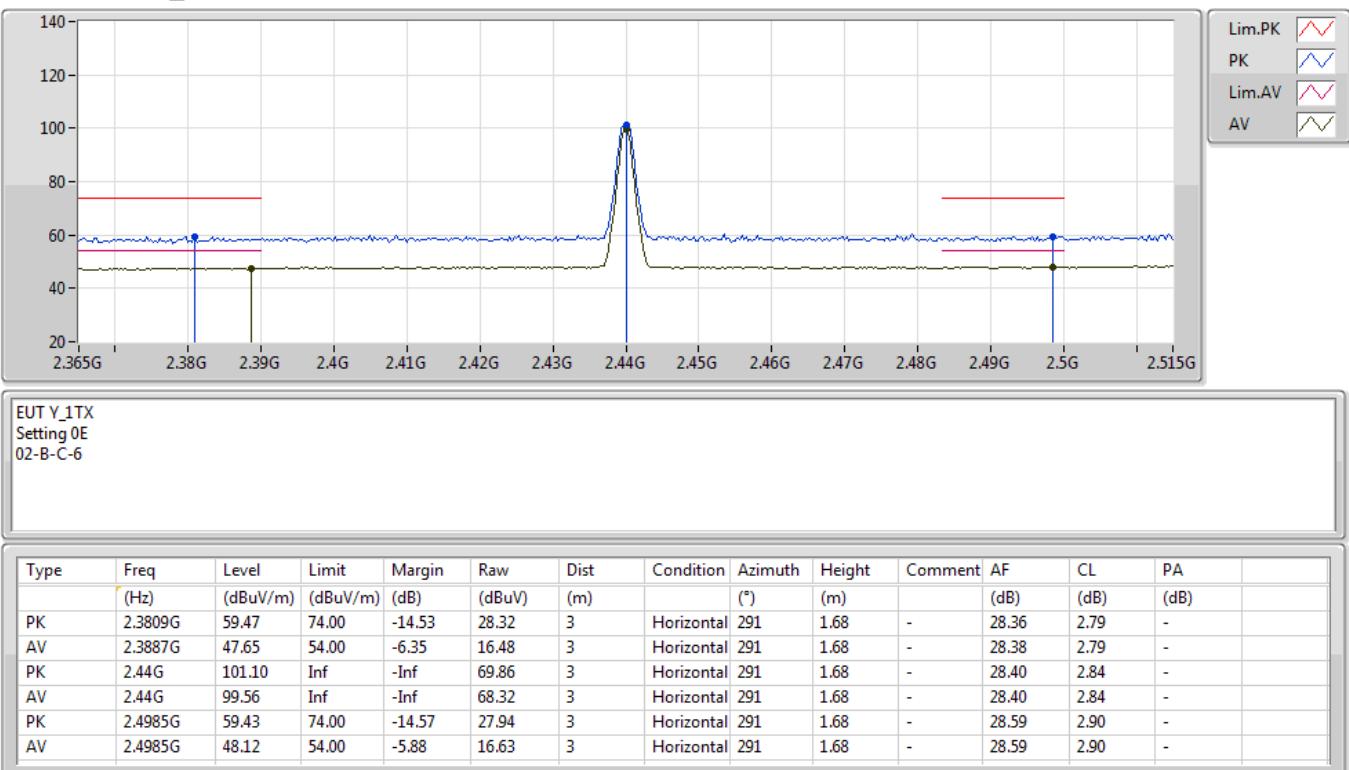
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.81348G	43.73	74.00	-30.27	37.98	3	Vertical	123	1.41	-	32.88	5.10	32.23	
AV	4.804G	32.35	54.00	-21.65	26.66	3	Vertical	123	1.41	-	32.82	5.10	32.23	

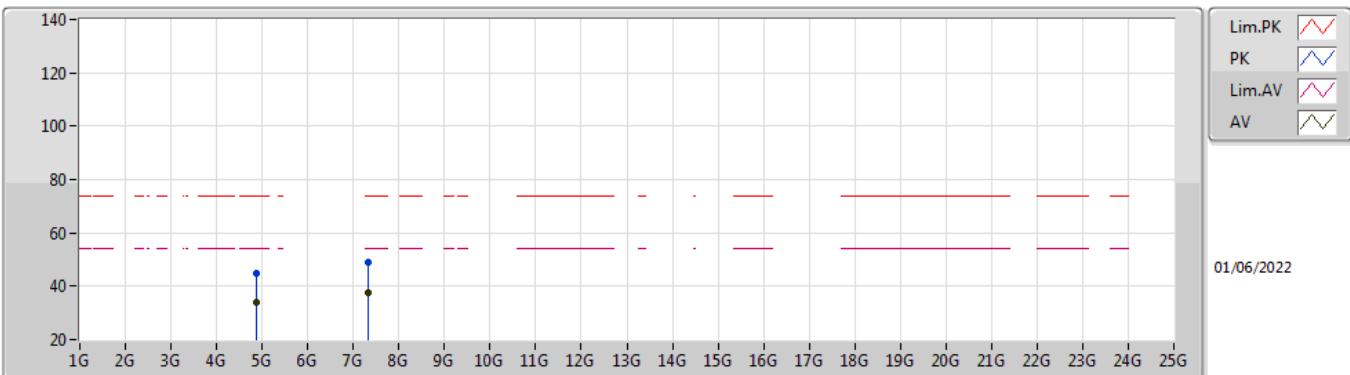
BT-LE(1Mbps)
2402MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.804G	45.52	74.00	-28.48	39.83	3	Horizontal	189	1.20	-	32.82	5.10	32.23	
AV	4.80382G	35.88	54.00	-18.12	30.19	3	Horizontal	189	1.20	-	32.82	5.10	32.23	

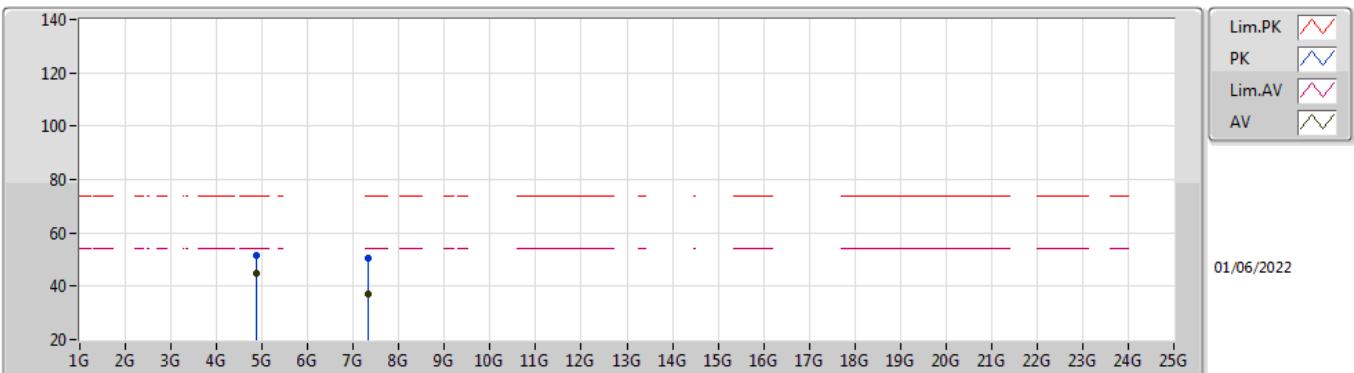
BT-LE(1Mbps)
2440MHz_TX


BT-LE(1Mbps)
2440MHz_TX


BT-LE(1Mbps)
2440MHz_TX


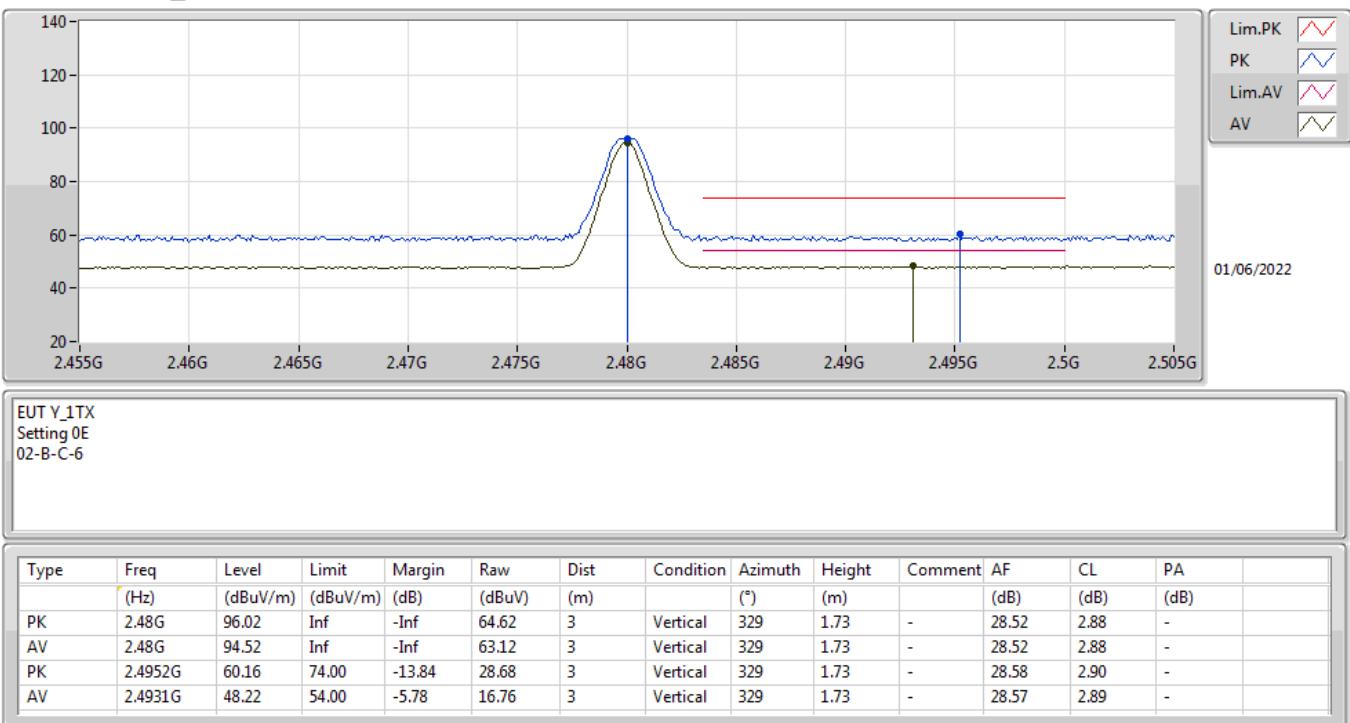
EUT Y_1TX
Setting 0E
02-B-C-6

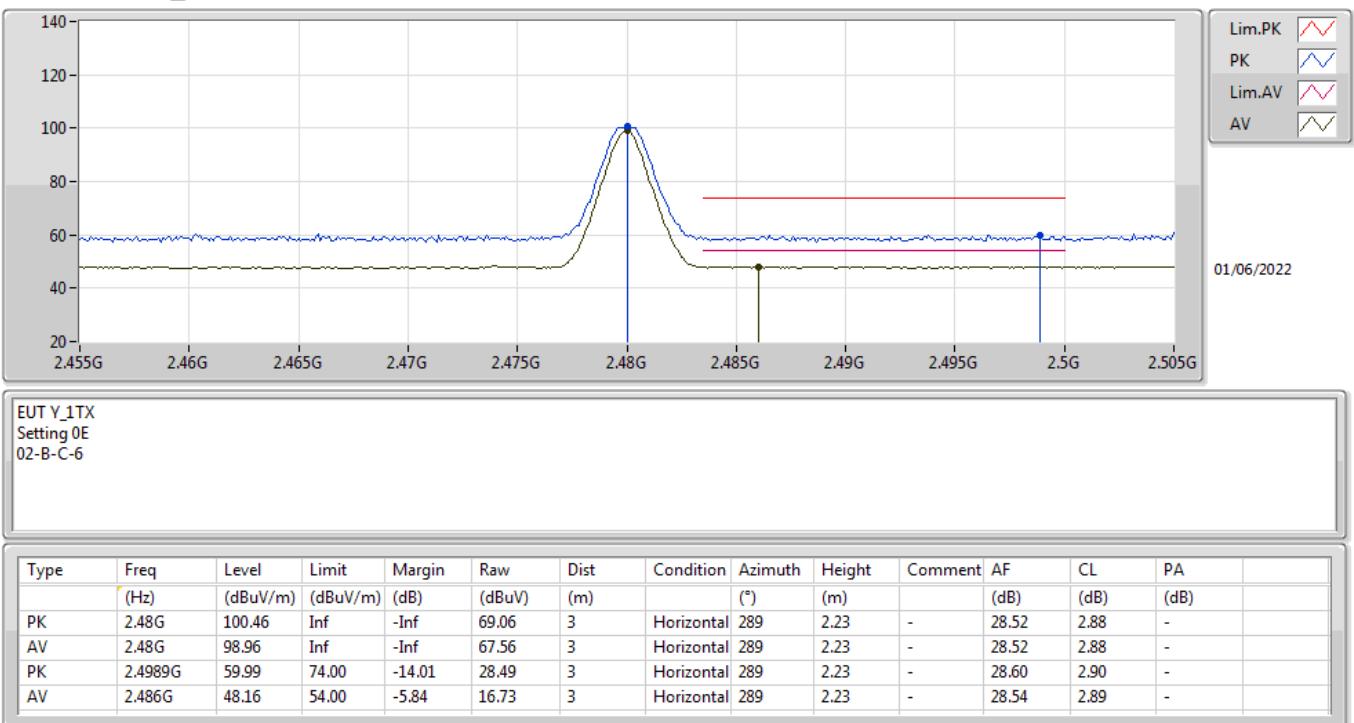
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.88042G	44.59	74.00	-29.41	38.53	3	Vertical	207	1.99	-	33.16	5.10	32.20	
AV	4.87994G	34.22	54.00	-19.78	28.16	3	Vertical	207	1.99	-	33.16	5.10	32.20	
PK	7.33224G	49.17	74.00	-24.83	39.40	3	Vertical	100	2.26	-	36.46	6.17	32.86	
AV	7.31922G	37.53	54.00	-16.47	27.77	3	Vertical	100	2.26	-	36.44	6.16	32.84	

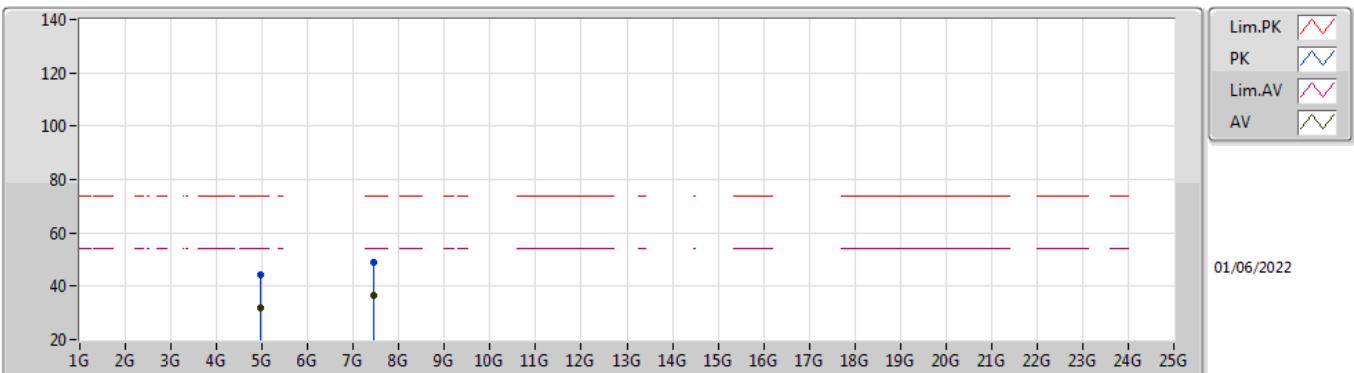
BT-LE(1Mbps)
2440MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.8794G	51.70	74.00	-22.30	45.64	3	Horizontal	354	1.68	-	33.16	5.10	32.20	
AV	4.87994G	45.08	54.00	-8.92	39.02	3	Horizontal	354	1.68	-	33.16	5.10	32.20	
PK	7.31976G	50.55	74.00	-23.45	40.79	3	Horizontal	38	2.84	-	36.44	6.16	32.84	
AV	7.32264G	37.14	54.00	-16.86	27.37	3	Horizontal	38	2.84	-	36.45	6.16	32.84	

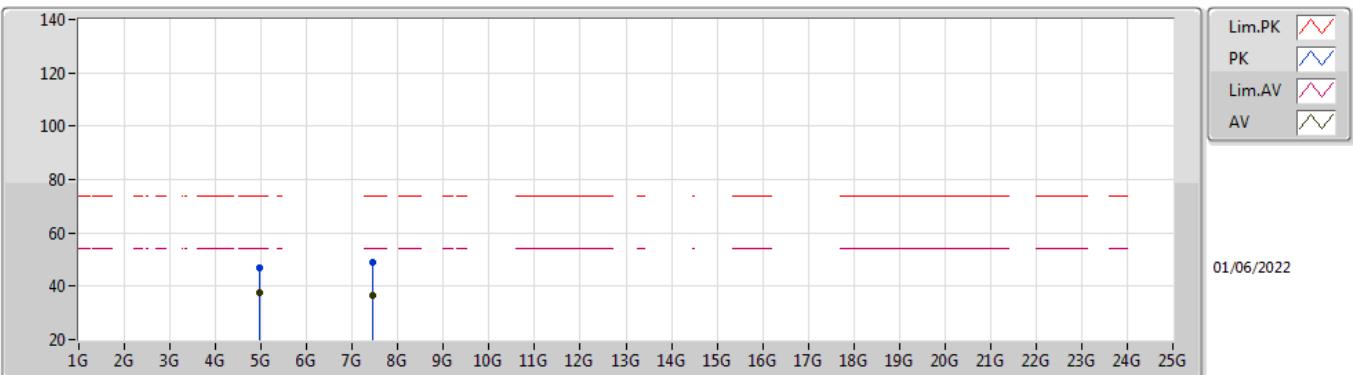
BT-LE(1Mbps)
2480MHz_TX


BT-LE(1Mbps)
2480MHz_TX


BT-LE(1Mbps)
2480MHz_TX


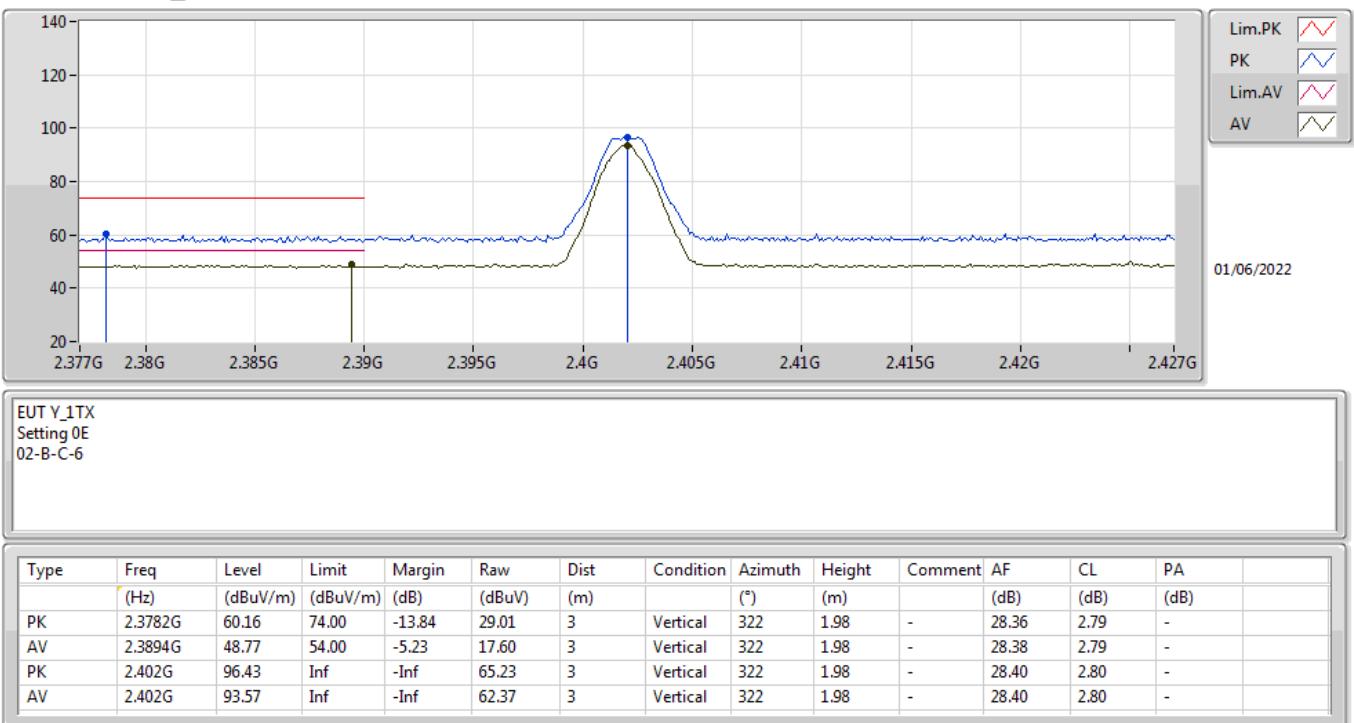
EUT Y_1TX
Setting 0E
02-B-C-6

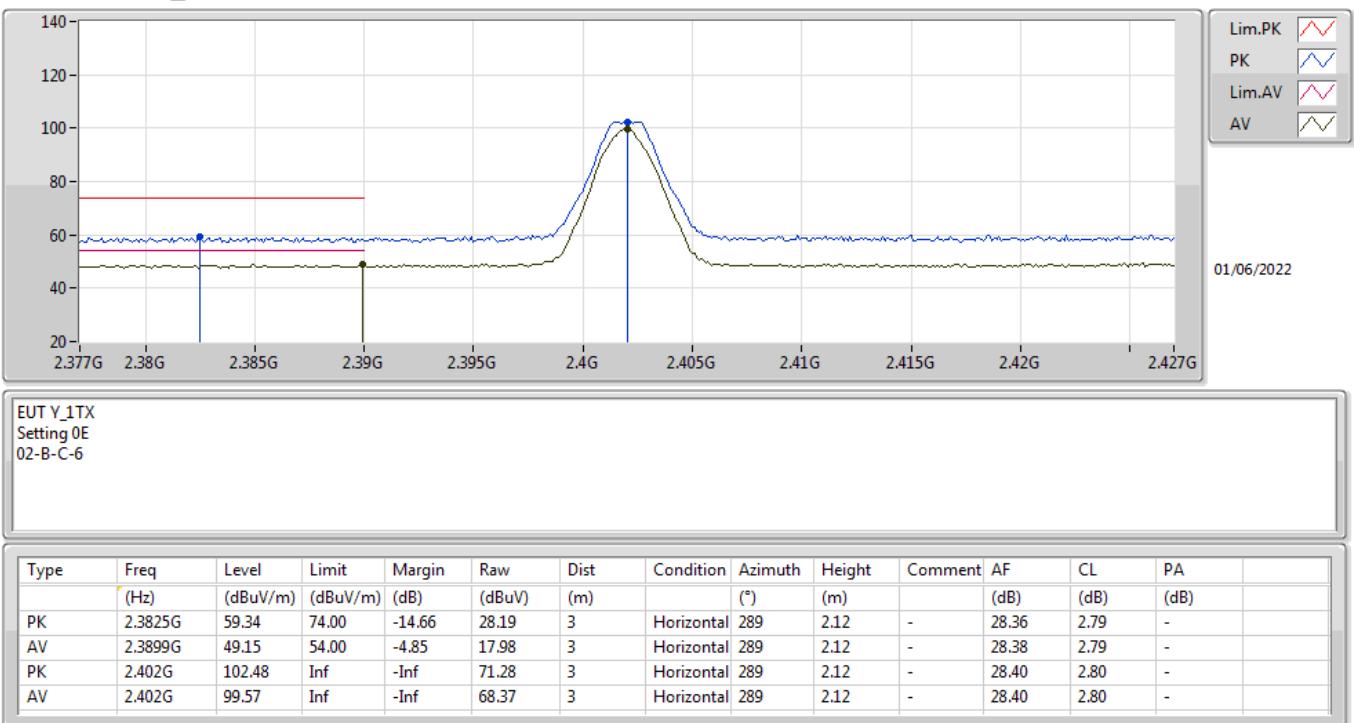
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.9603G	44.18	74.00	-29.82	37.93	3	Vertical	116	2.42	-	33.32	5.10	32.17	
AV	4.95994G	32.12	54.00	-21.88	25.87	3	Vertical	116	2.42	-	33.32	5.10	32.17	
PK	7.44102G	49.07	74.00	-24.93	39.42	3	Vertical	58	2.33	-	36.50	6.20	33.05	
AV	7.44018G	36.79	54.00	-17.21	27.14	3	Vertical	58	2.33	-	36.50	6.20	33.05	

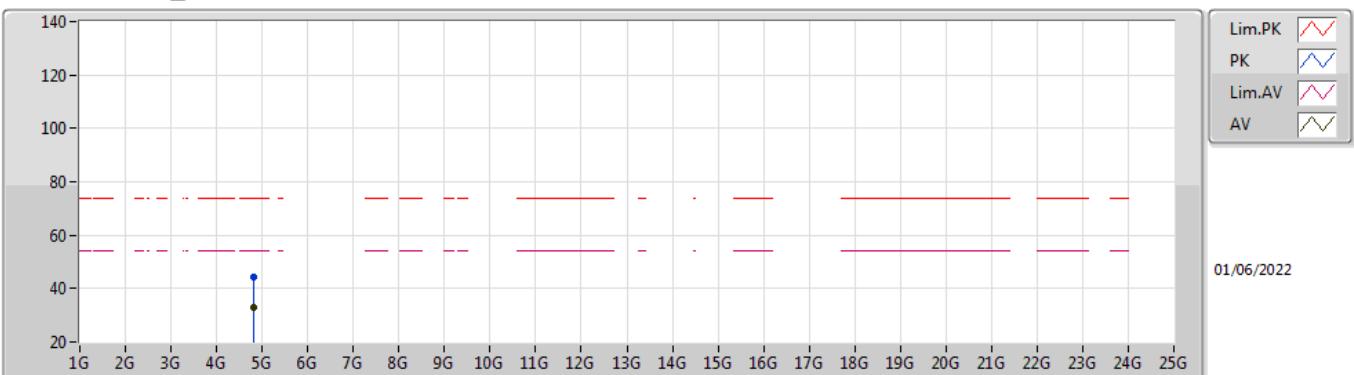
BT-LE(1Mbps)
2480MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.9603G	46.67	74.00	-27.33	40.42	3	Horizontal	160	1.45	-	33.32	5.10	32.17	
AV	4.95982G	37.54	54.00	-16.46	31.29	3	Horizontal	160	1.45	-	33.32	5.10	32.17	
PK	7.45224G	49.19	74.00	-24.81	39.56	3	Horizontal	262	2.08	-	36.50	6.20	33.07	
AV	7.43844G	36.80	54.00	-17.20	27.14	3	Horizontal	262	2.08	-	36.50	6.20	33.04	

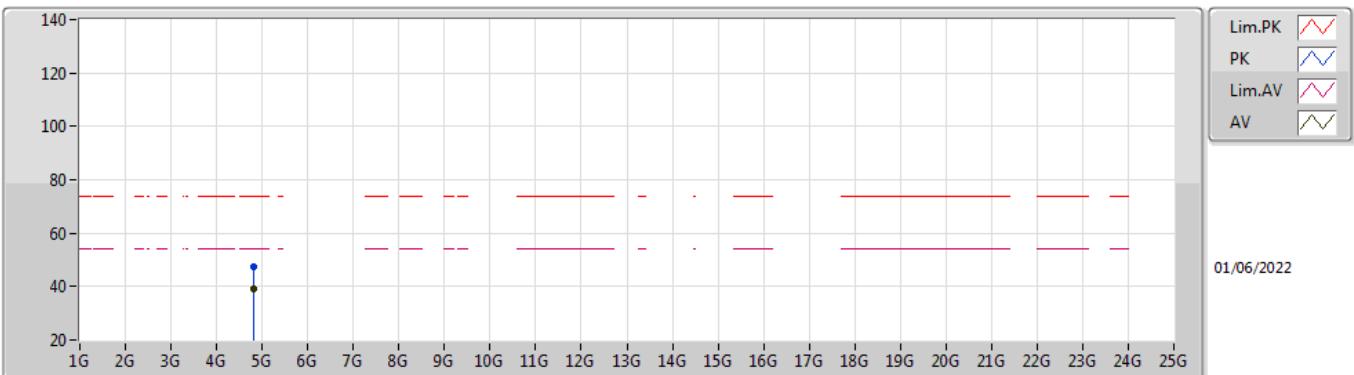
BT-LE(2Mbps)
2402MHz_TX


BT-LE(2Mbps)
2402MHz_TX


BT-LE(2Mbps)
2402MHz_TX


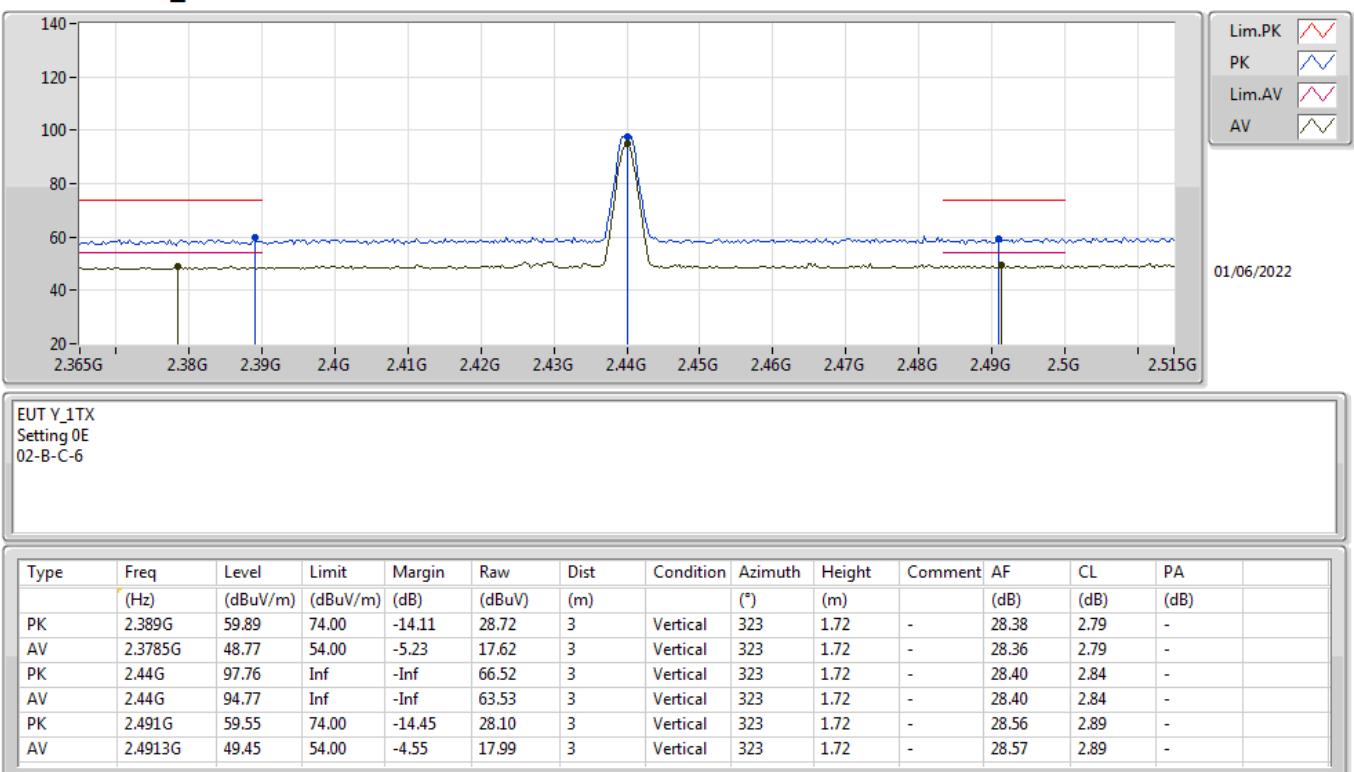
EUT Y_1TX
Setting 0E
02-B-C-6

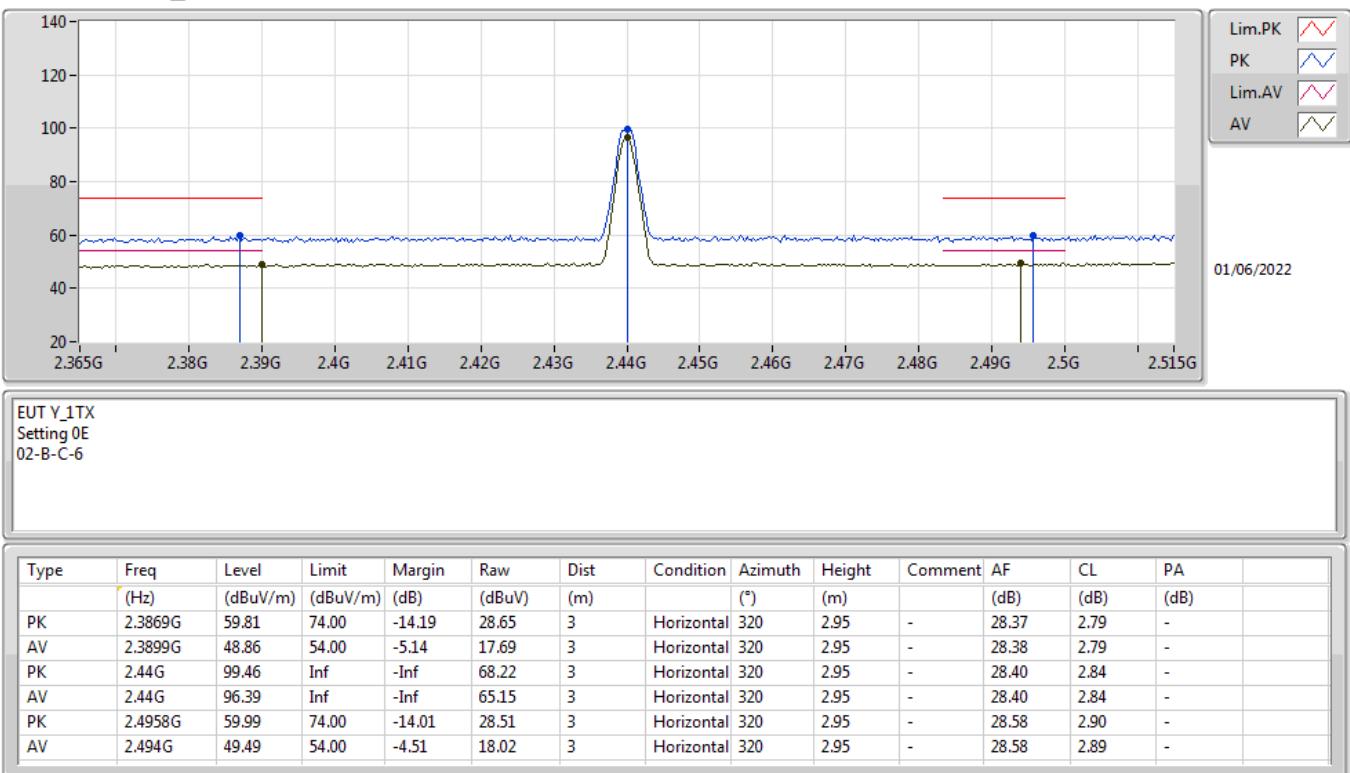
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8106G	44.29	74.00	-29.71	38.56	3	Vertical	244	1.55	-	32.86	5.10	32.23
AV	4.81696G	33.03	54.00	-20.97	27.26	3	Vertical	244	1.55	-	32.90	5.10	32.23

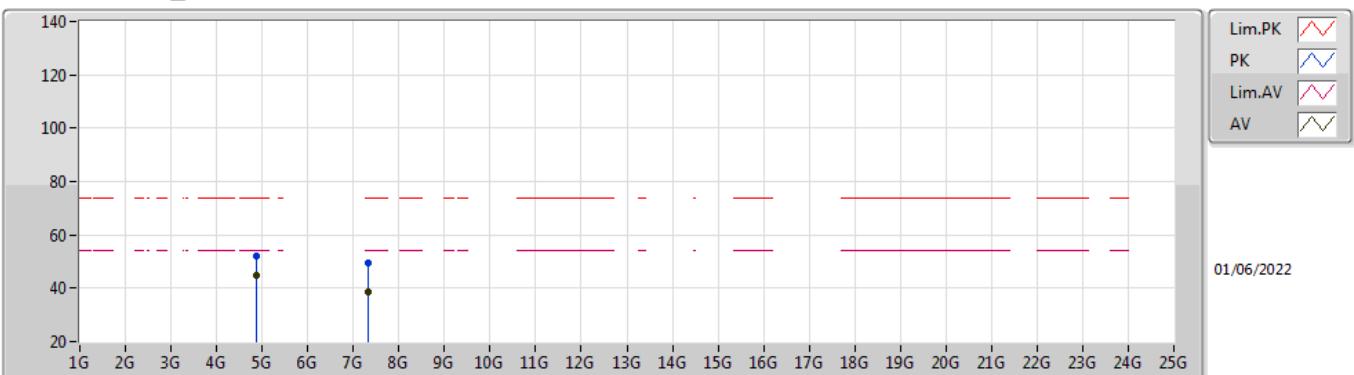
BT-LE(2Mbps)
2402MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.804G	47.27	74.00	-26.73	41.58	3	Horizontal	352	2.38	-	32.82	5.10	32.23	
AV	4.804G	38.93	54.00	-15.07	33.24	3	Horizontal	352	2.38	-	32.82	5.10	32.23	

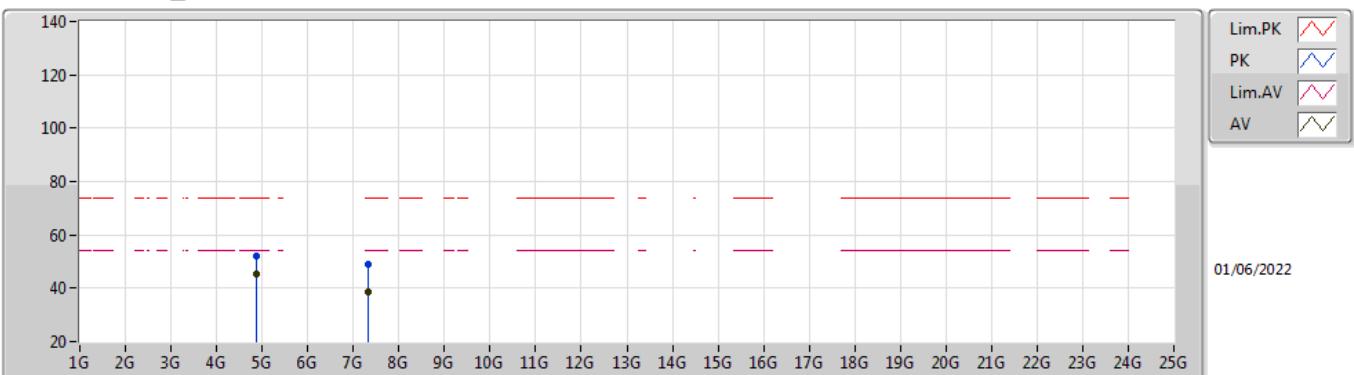
BT-LE(2Mbps)
2440MHz_TX


BT-LE(2Mbps)
2440MHz_TX


BT-LE(2Mbps)
2440MHz_TX


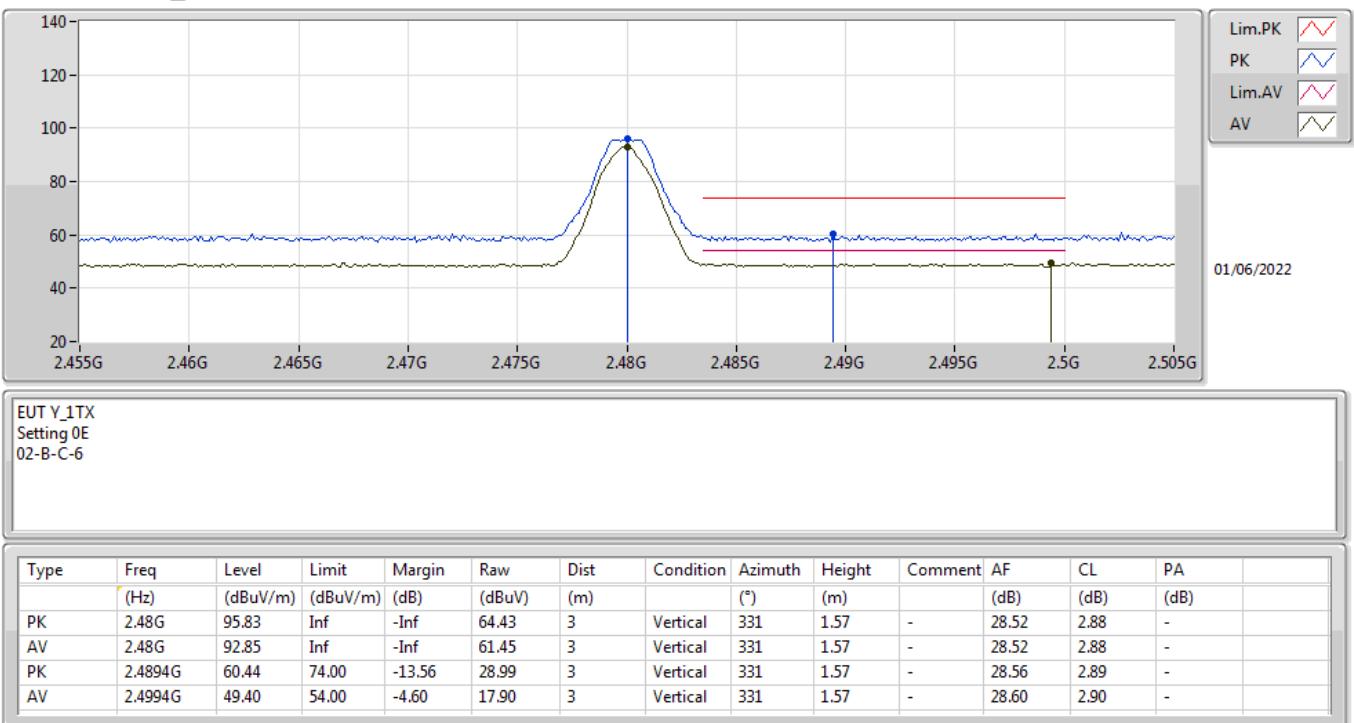
EUT Y_1TX
Setting 0E
02-B-C-6

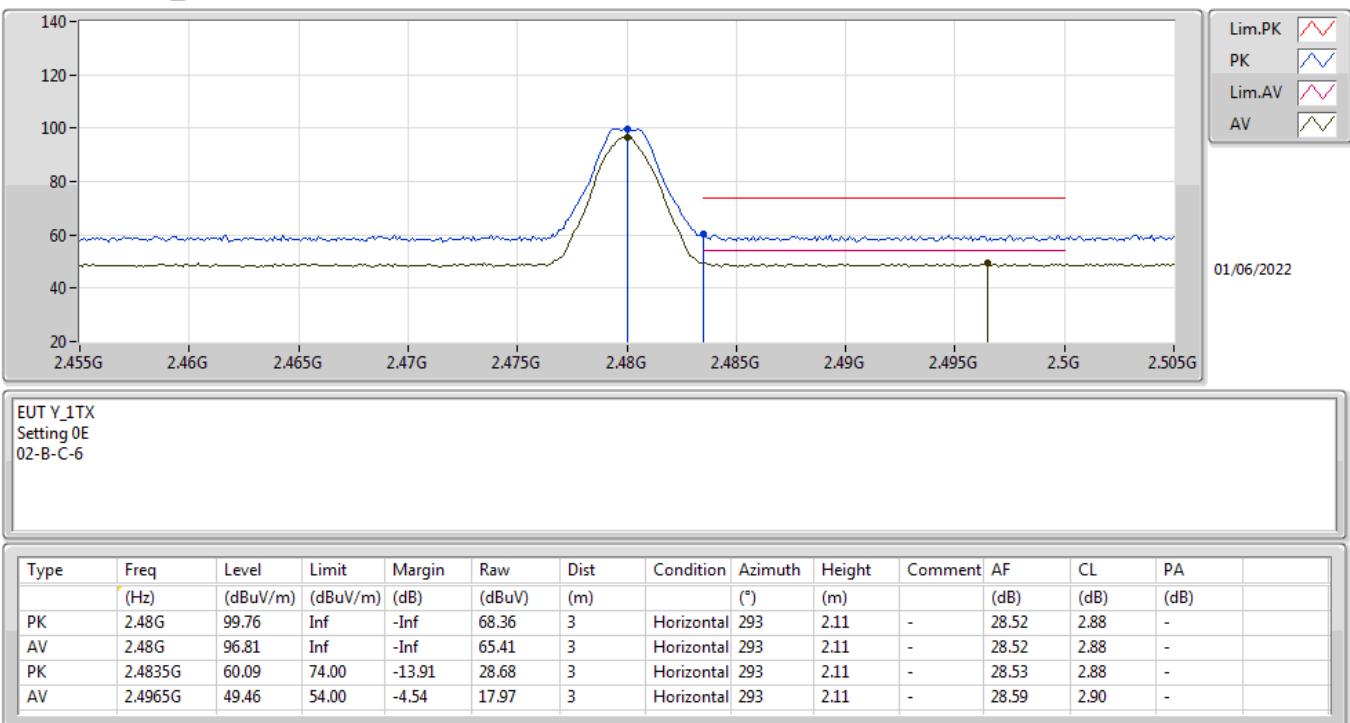
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.88G	52.11	74.00	-21.89	46.05	3	Vertical	327	2.87	-	33.16	5.10	32.20	
AV	4.87892G	44.94	54.00	-9.06	38.88	3	Vertical	327	2.87	-	33.16	5.10	32.20	
PK	7.32432G	49.66	74.00	-24.34	39.89	3	Vertical	317	2.77	-	36.45	6.16	32.84	
AV	7.32906G	38.68	54.00	-15.32	28.91	3	Vertical	317	2.77	-	36.46	6.16	32.85	

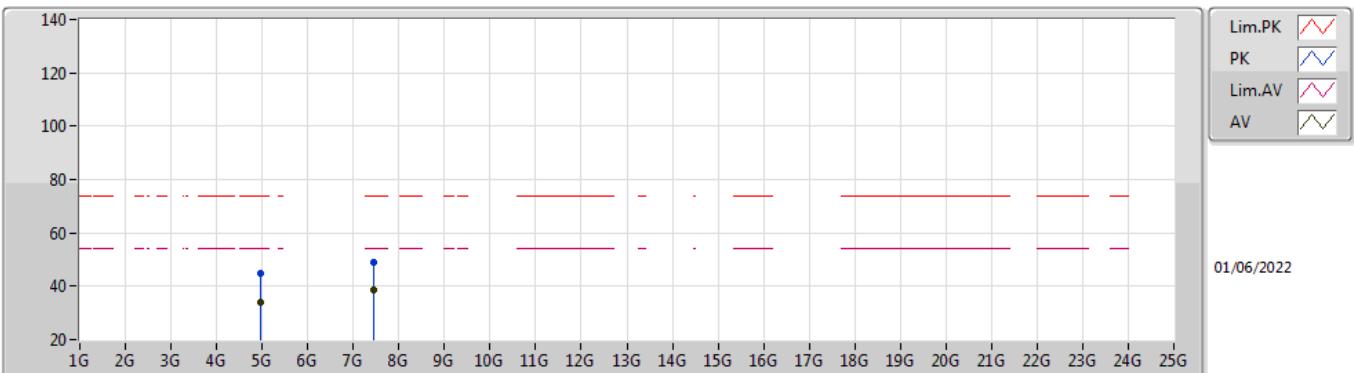
BT-LE(2Mbps)
2440MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.88012G	52.12	74.00	-21.88	46.06	3	Horizontal	0	1.80	-	33.16	5.10	32.20	
AV	4.87892G	45.43	54.00	-8.57	39.37	3	Horizontal	0	1.80	-	33.16	5.10	32.20	
PK	7.33422G	49.15	74.00	-24.85	39.37	3	Horizontal	226	1.50	-	36.47	6.17	32.86	
AV	7.32264G	38.38	54.00	-15.62	28.61	3	Horizontal	226	1.50	-	36.45	6.16	32.84	

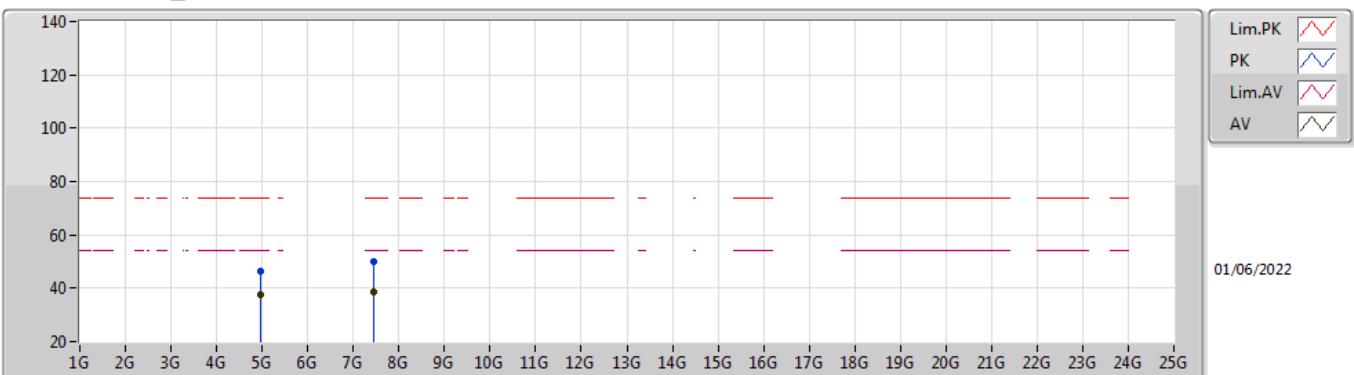
BT-LE(2Mbps)
2480MHz_TX


BT-LE(2Mbps)
2480MHz_TX


BT-LE(2Mbps)
2480MHz_TX


EUT Y_1TX
 Setting 0E
 02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.96882G	44.77	74.00	-29.23	38.50	3	Vertical	226	1.62	-	33.34	5.10	32.17	
AV	4.95946G	33.78	54.00	-20.22	27.53	3	Vertical	226	1.62	-	33.32	5.10	32.17	
PK	7.44432G	49.05	74.00	-24.95	39.40	3	Vertical	180	1.31	-	36.50	6.20	33.05	
AV	7.43706G	38.55	54.00	-15.45	28.89	3	Vertical	180	1.31	-	36.50	6.20	33.04	

BT-LE(2Mbps)
2480MHz_TX


EUT Y_1TX
Setting 0E
02-B-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.9591G	46.56	74.00	-27.44	40.31	3	Horizontal	141	1.56	-	33.32	5.10	32.17	
AV	4.96G	37.72	54.00	-16.28	31.47	3	Horizontal	141	1.56	-	33.32	5.10	32.17	
PK	7.45326G	49.79	74.00	-24.21	40.16	3	Horizontal	112	2.38	-	36.50	6.20	33.07	
AV	7.43844G	38.77	54.00	-15.23	29.11	3	Horizontal	112	2.38	-	36.50	6.20	33.04	