


FCC RADIO TEST REPORT

FCC ID : QXO-AP510E
Equipment : 802.11ax Access Point
Brand Name : Extreme Networks
Model Name : AP510e
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Standard : 47 CFR FCC Part 15.247

The product was received on Nov. 09, 2018, and testing was started from Nov. 22, 2018 and completed on Mar. 04, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

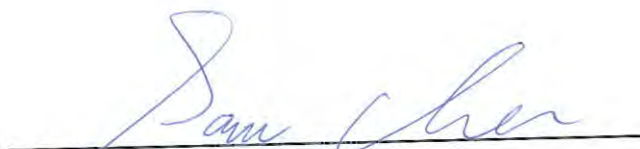
Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	11
2.3 EUT Operation during Test	13
2.4 Accessories	13
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	16
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 DTS Bandwidth	21
3.3 Maximum Conducted Output Power	22
3.4 Power Spectral Density	25
3.5 Emissions in Non-restricted Frequency Bands	27
3.6 Emissions in Restricted Frequency Bands.....	28
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0

Page Number : 3 of 33
Issued Date : Apr. 10, 2019
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Vicky Huang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4G	BT-LE(1Mbps)	1	1

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.



1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Radio	Elevation angle above 30 degree Max Gain (dBi)
1	Extreme Networks	ML-2452-APA2-01	Omni	RP SMA male	1, 2	-
2	Extreme Networks	ML-2452-APA2-02	Omni	RP SMA male	1, 2	-
3	Extreme Networks	ML-2452-HPA5-036	Omni	RP SMA male	1, 2	-
4	Extreme Networks	ML-2452-HPAG4A6-01	Omni	N Male	1, 2	5.7
5	Extreme Networks	ML-2452-PNA5-01R	Panel	N Male	1, 2	5.26
6	Extreme Networks	ML-2452-HPAG5A8-01	Omni	N Male	1, 2	-6.05
7	Extreme Networks	ML-2452-PTA4M4-036	Omni	RP SMA male	1, 2	-
8	Extreme Networks	WS-AO-DQ04360N	Omni	N Male	1, 2	-
9	Extreme Networks	ML-2452-SEC6M4-036	Panel	RP SMA male	1, 2	-
10	Extreme Networks	WS-AI-DQ05120	Panel	RP SMA male	1, 2	-
11	Extreme Networks	ML-2452-PNA7-01R	Panel	RP SMA male	1, 2, 3	7.9
12	Extreme Networks	ML-2499-HPA8-01	Omni	N Male	3	-
13	Extreme Networks	AI-DQ04360S	Omni	RP SMA male	1, 2	-

Note1:

Ant.	Antenna Gain(dBi)				Cable loss(dB)				True Gain(dBi)			
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth	Thread	WLAN 2.4GHz	WLAN 5GHz	Bluetooth	Thread	WLAN 2.4GHz	WLAN 5GHz	Bluetooth	Thread
1	3.17	4.85	-	-	1	2	-	-	2.17	2.85	-	-
2	3.17	4.85	-	-	1	2	-	-	2.17	2.85	-	-
3	3.9	5.7	-	-	1	2	-	-	2.9	3.7	-	-
4	4	7.3	-	-	1	2	-	-	3	5.3	-	-
5	4.5	5	-	-	1	2	-	-	3.5	3	-	-
6	5	8	-	-	1	2	-	-	4	6	-	-
7	5	6.6	-	-	1	2	-	-	4	4.6	-	-
8	5.5	6	-	-	1	2	-	-	4.5	4	-	-
9	6.92	7.23	-	-	1	2	-	-	5.92	5.23	-	-
10	6.92	7.23	-	-	1	2	-	-	5.92	5.23	-	-
11	7.8	10.7	7.8	7.8	1	2	1	1	6.8	8.7	6.8	6.8
12	-	-	8	8	-	-	1	1	-	-	7	7
13	5.5	6	-	-	1	2	-	-	4.5	4	-	-

Note2: The above information was declared by manufacturer.

Note3:

For 2.4GHz function:**For IEEE 802.11b/g/n/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Bluetooth and Thread mode (1TX/1RX):

Only Port 1 can be use as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.64	1.938	400u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power adapter or PoE		
Function	☒ Point-to-multipoint	☐ Point-to-point	
Test Software Version	Telnet (V1.28.3)		
Support Mode	☒	LE 1M PHY: 1 Mb/s	
	☐	LE Coded PHY (S=2): 500 Kb/s	
	☐	LE Coded PHY (S=8): 125 Kb/s	
	☐	LE 2M PHY: 2 Mb/s	

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT support function

The EUT has three radios, the information as following table:

Radio	Function		
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth/Thread
1	V	V	-
2	-	V	-
3	-	-	V

Function	Radio	Support Type	Support Band
AP	1,2,3	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1~4
Client	1	Slave without Radar Detection (Sensor Mode)	WLAN 2.4GHz/WLAN 5GHz Band 1+4
Bridge	1,2,3	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Mesh	1,2,3	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4

Note: The above information was declared by manufacturer.

**1.1.6 Table for EUT operation function**

Mode	Radio 1	Radio 2	Radio 3
1	2.4G(Master-AP)	5G-Full Band(Master-AP)	Bluetooth/Thread
2	5G Band 1+4 / 2.4G Slave without Radar Detection (Sensor Mode)	5G-Full Band(Master-AP)	Bluetooth/Thread
3	5G-Low Band(Master-AP)	5G-High Band(Master-AP)	Bluetooth/Thread

Note: 1. The above information was declared by manufacturer.

2. The Mode 2 was same as client function of section 1.1.5.



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05r01

1.3 Testing Location Information

Testing Location		
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Jay Luo	20~23°C / 55~60%	Feb. 14, 2019
Radiated (Below 1GHz)	03CH01-CB	Stim Sung	22~24°C / 54~58%	Nov. 22, 2018~Mar. 04, 2019
Radiated (Above 1GHz for Co-location)	03CH01-CB	Stim Sung	22~24°C / 54~58%	Nov. 22, 2018
Radiated (Above 1GHz for other tests)	03CH01-CB	Jay Luo	20~22°C / 55~60%	Feb. 11, 2019~Feb. 18, 2019
AC Conduction	CO02-CB	Deven Huang	23°C / 60%	Nov. 26, 2018

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests											
Tests Item	AC power-line conducted emissions										
Condition	AC power-line conducted measurement for line and neutral										
Operating Mode	Normal Link										
	There are 13 antennas in the antenna table list, antenna 11 for WLAN and antenna 12 for Bluetooth, Thread were selected for EUT respectively to perform the test and recorded in this report.										
	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	Ant.	EUT GE1	EUT GE2	Adapter	PoE connect with EUT GE1	PoE connect with EUT GE2
1	●	-	●	●	-	Ant.11-12	●	●	●	-	-
2	-	●	●	●	-	Ant.11-12	●	●	●	-	-
3	●	-	●	-	●	Ant.11-12	●	●	●	-	-
4	-	●	●	-	●	Ant.11-12	●	●	●	-	-
5 Note	●	-	●	-	●	Ant.11-12	●	●	-	●	-
6 Note	●	-	●	-	●	Ant.11-12	●	●	-	-	●
Note: Mode 3 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 ~6 will follow this same test mode.											
Mode 5 generated the worst test result, so it was recorded in this report.											

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
Operating Mode	CTX
1	EUT + Ant. 11 Panel antenna / 6.8 dBi
2	EUT + Ant. 12 Omni antenna / 7 dBi

The Worst Case Mode for Following Conformance Tests												
Tests Item	Emissions in Restricted Frequency Bands											
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.											
Operating Mode < 1GHz	Normal Link											
	There are 13 antennas in the antenna table list, antenna 11 for WLAN and antenna 12 for Bluetooth, Thread were selected for EUT respectively to perform the test and recorded in this report.											
	Axis	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	Ant.	EUT GE1	EUT GE2	Adapter	PoE connect with EUT GE1	PoE connect with EUT GE2
1	● Z axis	●	-	●	●	-	● Ant.11-12	●	●	●	-	-
2	● Y axis	●	-	●	●	-	● Ant.11-12	●	●	●	-	-
3	● X axis	●	-	●	●	-	● Ant.11-12	●	●	●	-	-
4 Note1	● Z axis	-	●	●	●	-	● Ant.11-12	●	●	●	-	-
5 Note1	● Z axis	●	-	●	-	●	● Ant.11-12	●	●	●	-	-
6 Note1	● Z axis	-	●	●	-	●	● Ant.11-12	●	●	●	-	-
7 Note2	● Z axis	●	-	●	●	-	● Ant.11-12	●	●	-	●	-
8 Note2	● Z axis	●	-	●	●	-	● Ant.11-12	●	●	-	-	●
Note1: Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4~6 will follow this same test mode.												
Note2: Mode 1 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7~8 will follow this same test mode												
Mode 7 generated the worst test result, so it was recorded in this report.												
Operating Mode > 1GHz		CTX										
For Ant. 11 Panel antenna / 6.8 dBi: The EUT was performed at X axis 、Y axis and Z axis position and the worst case was found at X axis. So the measurement will follow this same test configuration. For Ant. 12 Omni antenna / 7 dBi: The EUT was performed at X axis 、Y axis and Z axis position and the worst case was found at Y axis. So the measurement will follow this same test configuration.												
1		EUT in X axis + Ant. 11 Panel antenna / 6.8 dBi										
2		EUT in Y axis + Ant. 12 Omni antenna / 7 dBi										



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
2	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
3	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
4	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
Refer to Sporton Test Report No.: FA8O1739-03 for Co-location RF Exposure Evaluation.	

Note: The Adapter and PoE was for measurement only, would not be marketed.

The detail information as below:

Power	Brand	Model
Adapter	Powertron Electronics Corp	PA1045-120HIB300
PoE	Microsemi	PD-9001GR/AT/AC

2.3 EUT Operation during Test

For Normal Link:

During the test, the EUT operation to normal function.

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

N/A



2.5 Support Equipment

For Test Site No: CO02-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk3.0	Transcend	JetFlash-700	N/A
B	GE1 PC	DELL	T3400	N/A
C	GE2 NB	DELL	E6430	N/A
D	2.4G/5G NB	DELL	E6430	N/A
E	5G NB	DELL	E6430	N/A
F	802.11ax Access Point (Device)	Extreme Networks	AP-510e	N/A
G	Device NB	DELL	E6430	N/A
H	PoE	Microsemi	PD-9001GR/AT/AC	N/A

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	CE1 PC	ASUS	N/A	N/A
B	GE2 NB	DELL	E4300	N/A
C	2.4G/5G NB	DELL	E4300	N/A
D	5G NB	DELL	E4300	N/A
E	802.11ax Access Point (Device)	Extreme Networks	AP-510e	N/A
F	Device NB	DELL	E4300	N/A
G	Flash disk3.0	Transcend	JetFlash-700	N/A
H	PoE	Microsemi	PD-9001GR/AT/AC	N/A


For Test Site No: 03CH01-CB (above 1GHz)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
E	Adapter	Powertron Electronics Corp	PA1045-120HIB300	N/A

**For Test Site No: TH01-CB**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Adapter	Powertron Electronics Corp	PA1045-120HIB300	N/A

2.6 Test Setup Diagram

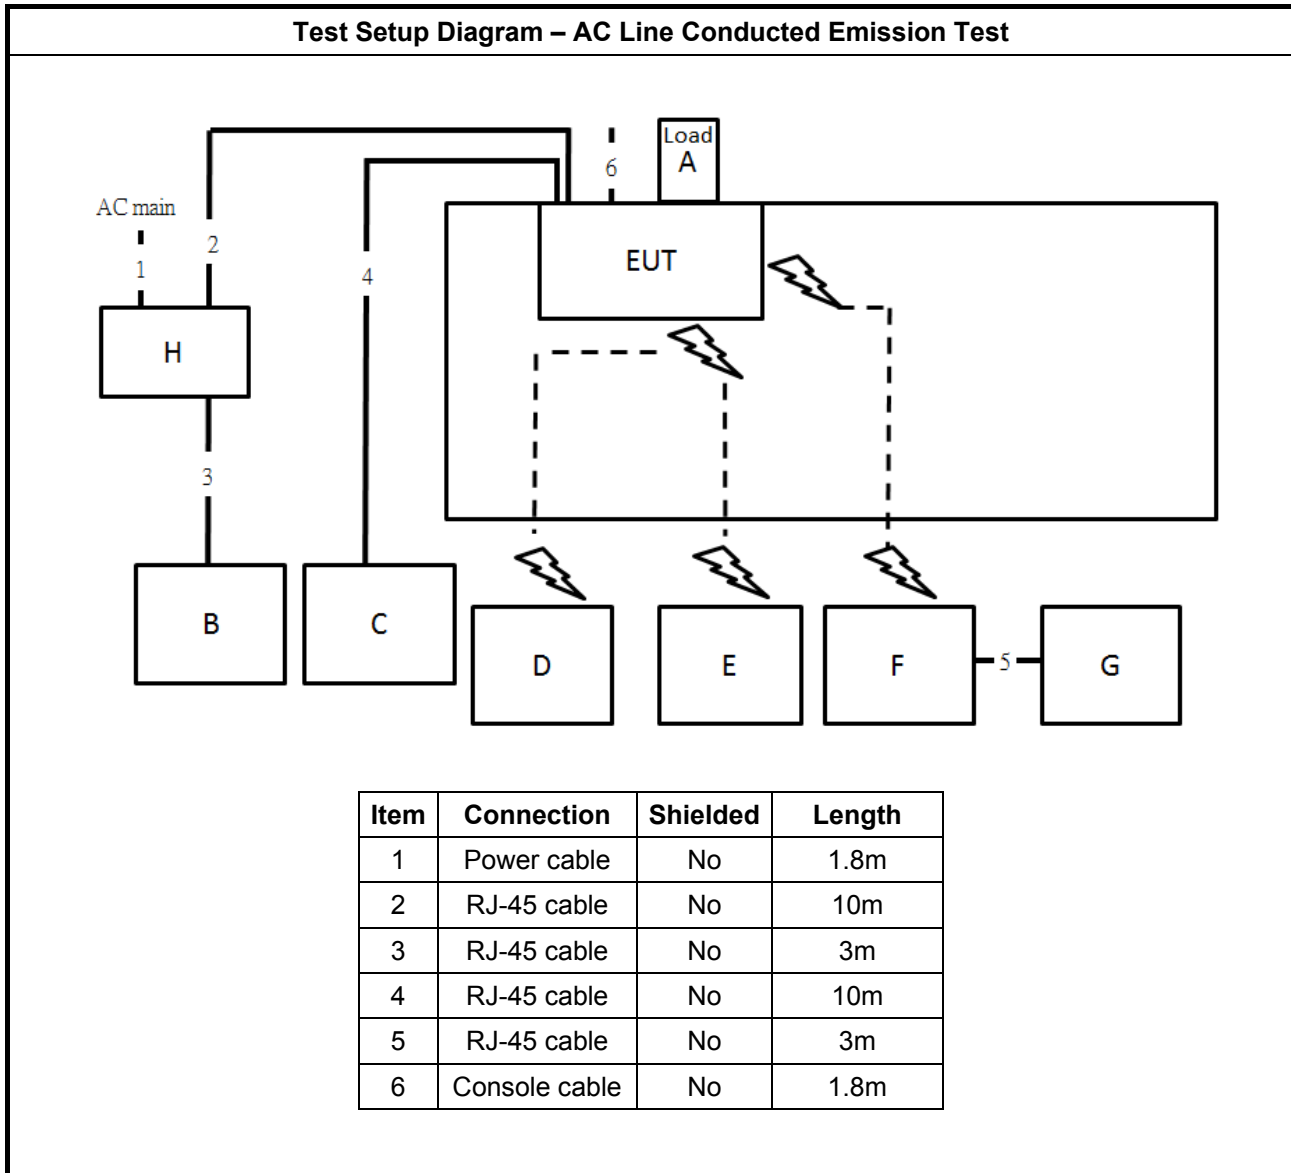

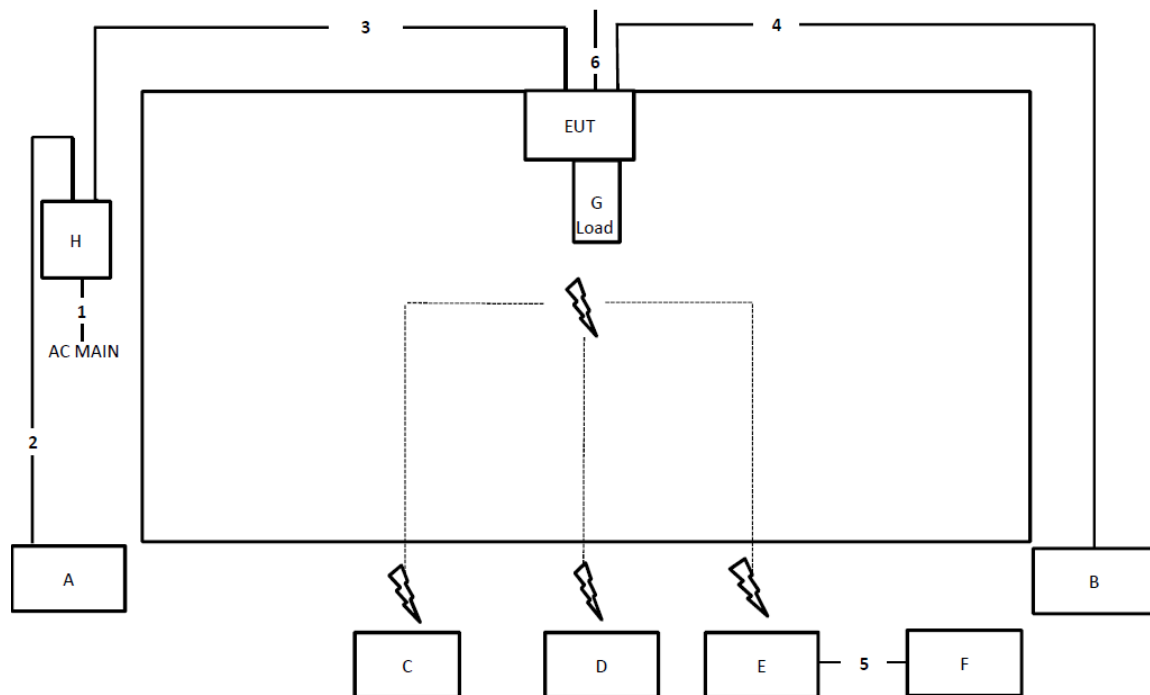

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	10m
6	Console cable	No	1.5m

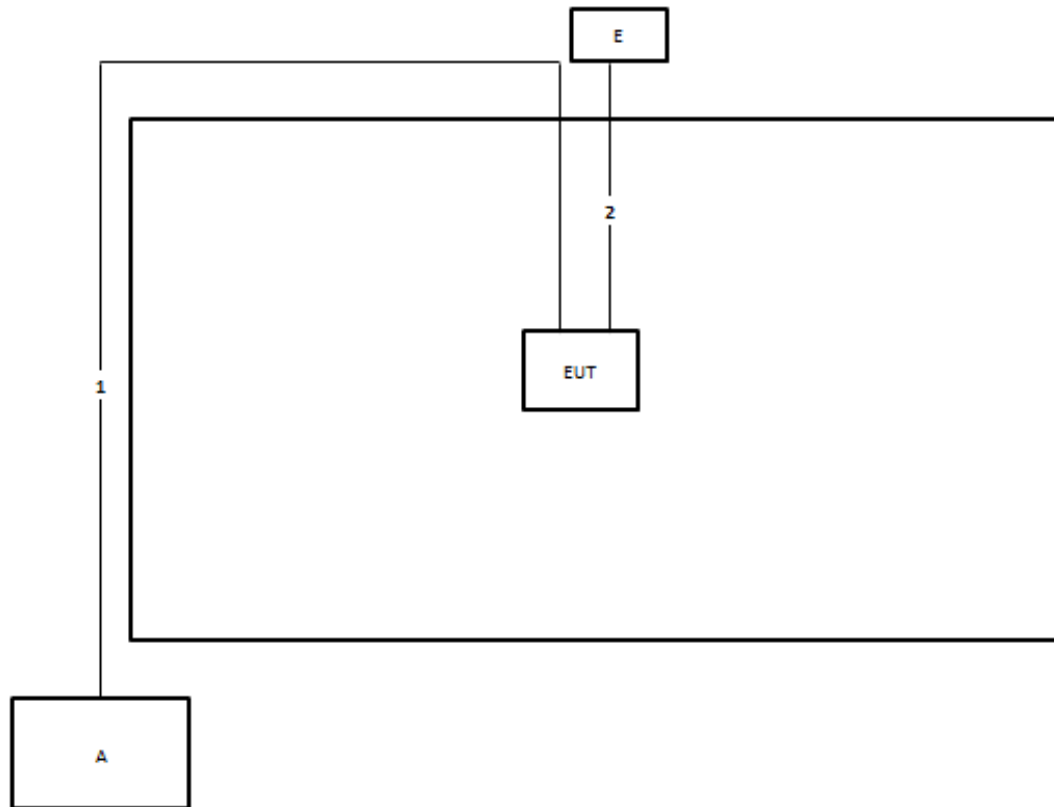Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013 , clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

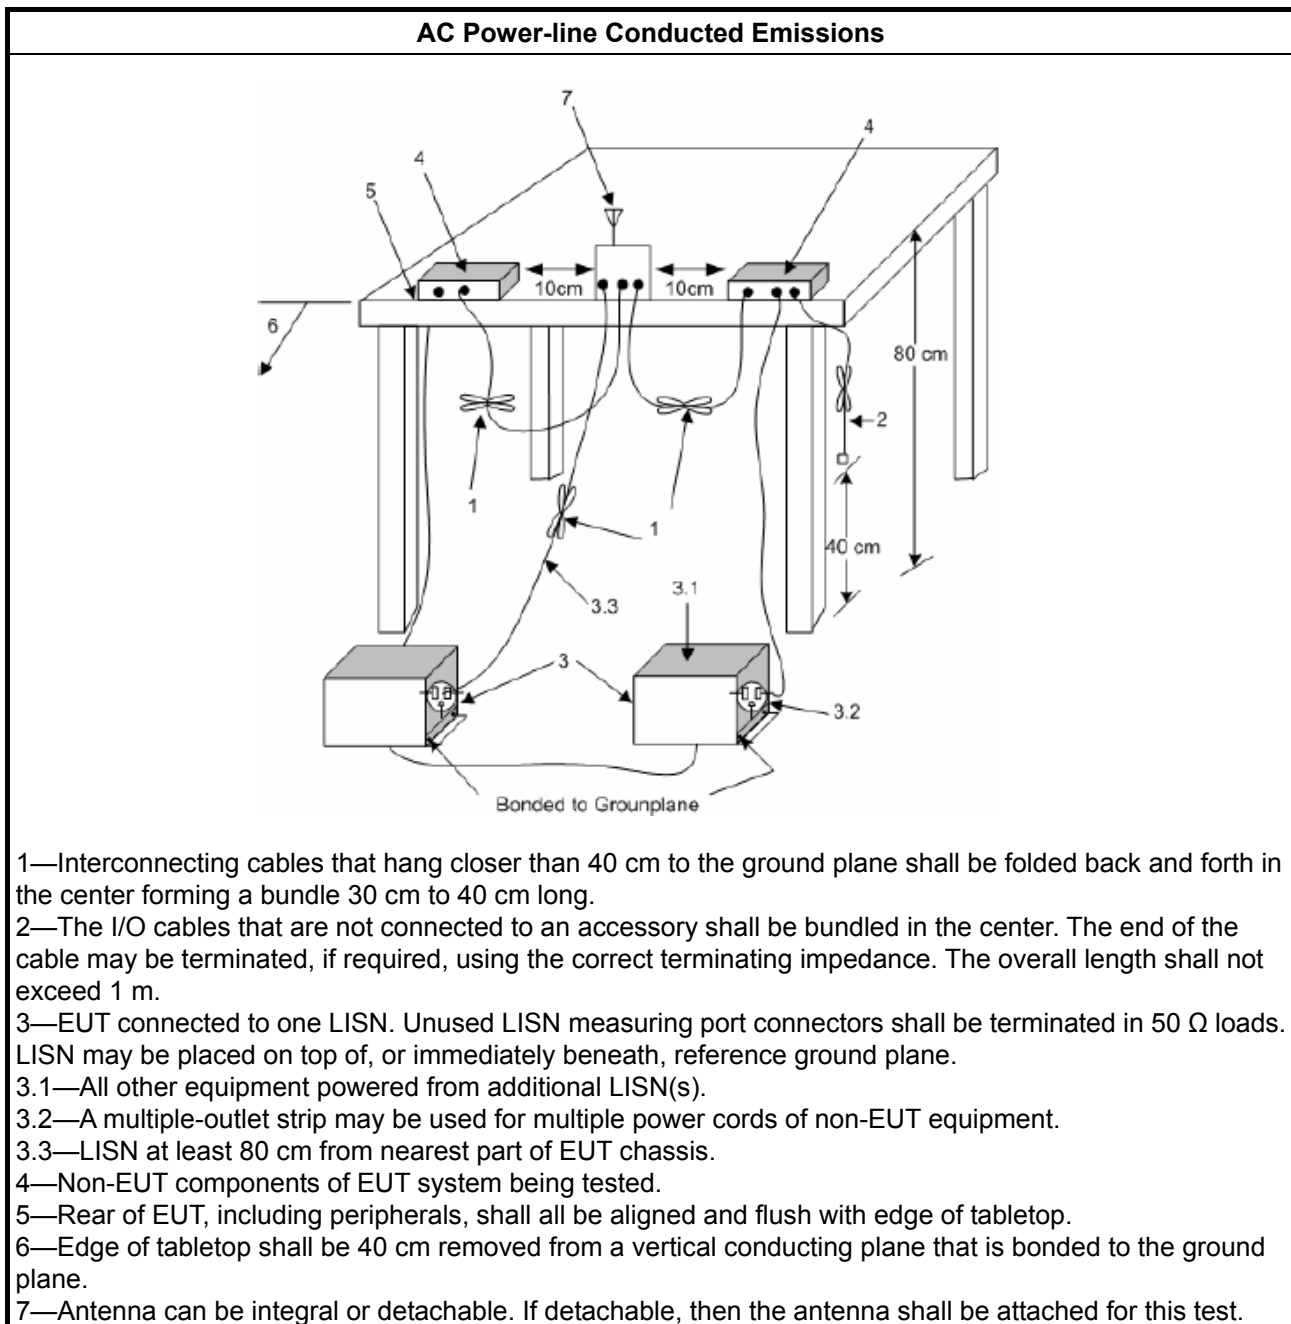

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

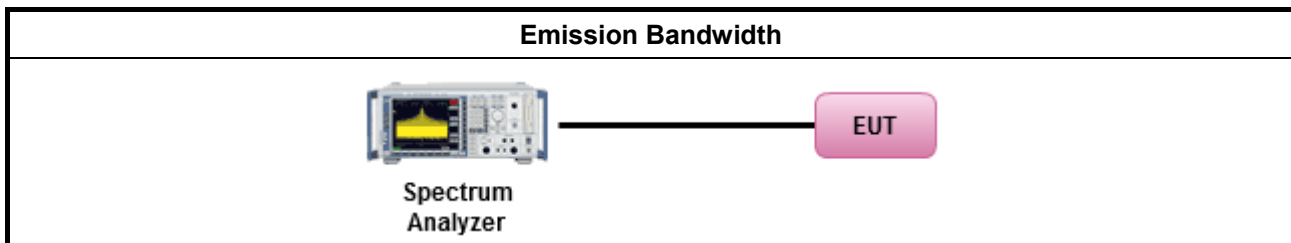

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

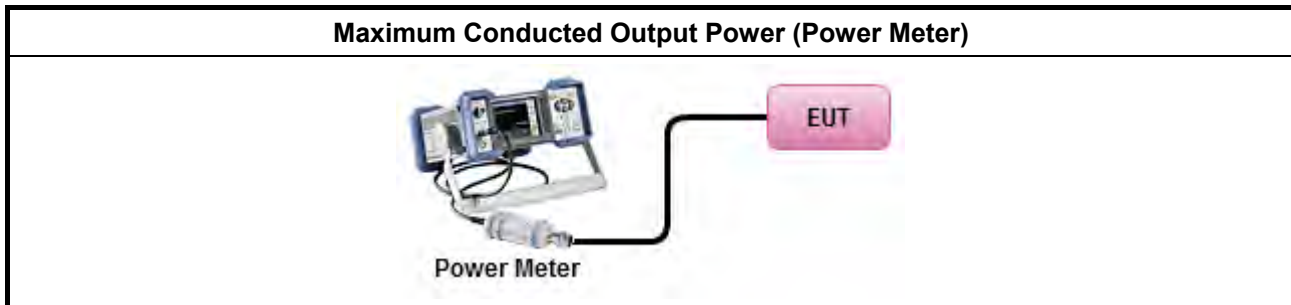

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD. [duty cycle $\geq 98\%$ or external video / power trigger]
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPS-1.
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPS-2.
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPS-3.
duty cycle $< 98\%$ and average over on/off periods with duty factor
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPS-1A. (alternative).
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPS-2A. (alternative)
☐ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPS-3A. (alternative)
For conducted measurement.
If The EUT supports multiple transmit chains using options given below:
☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,

- ☐ Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

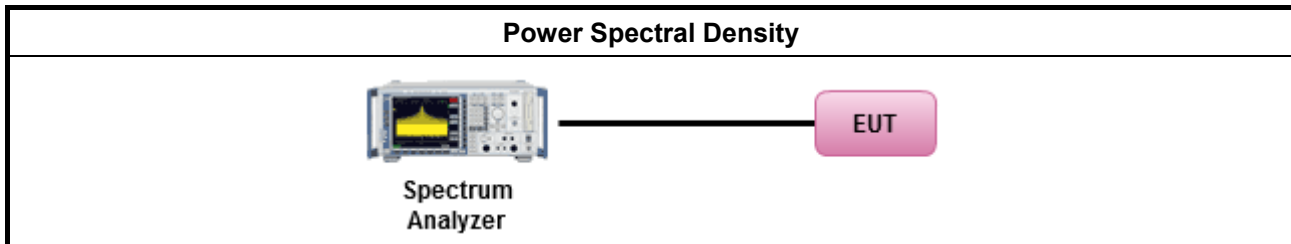

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

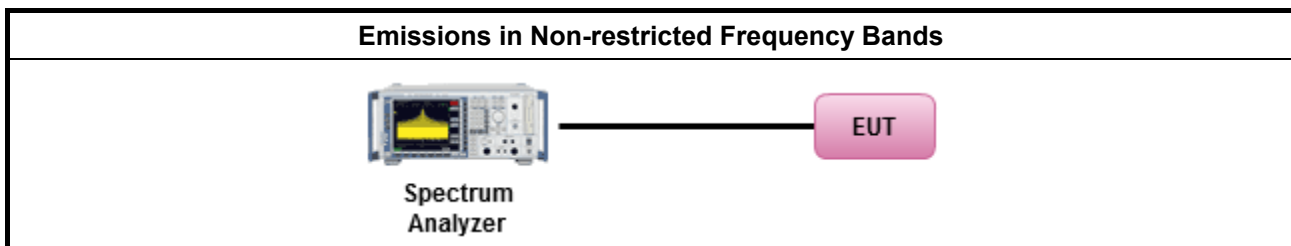

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

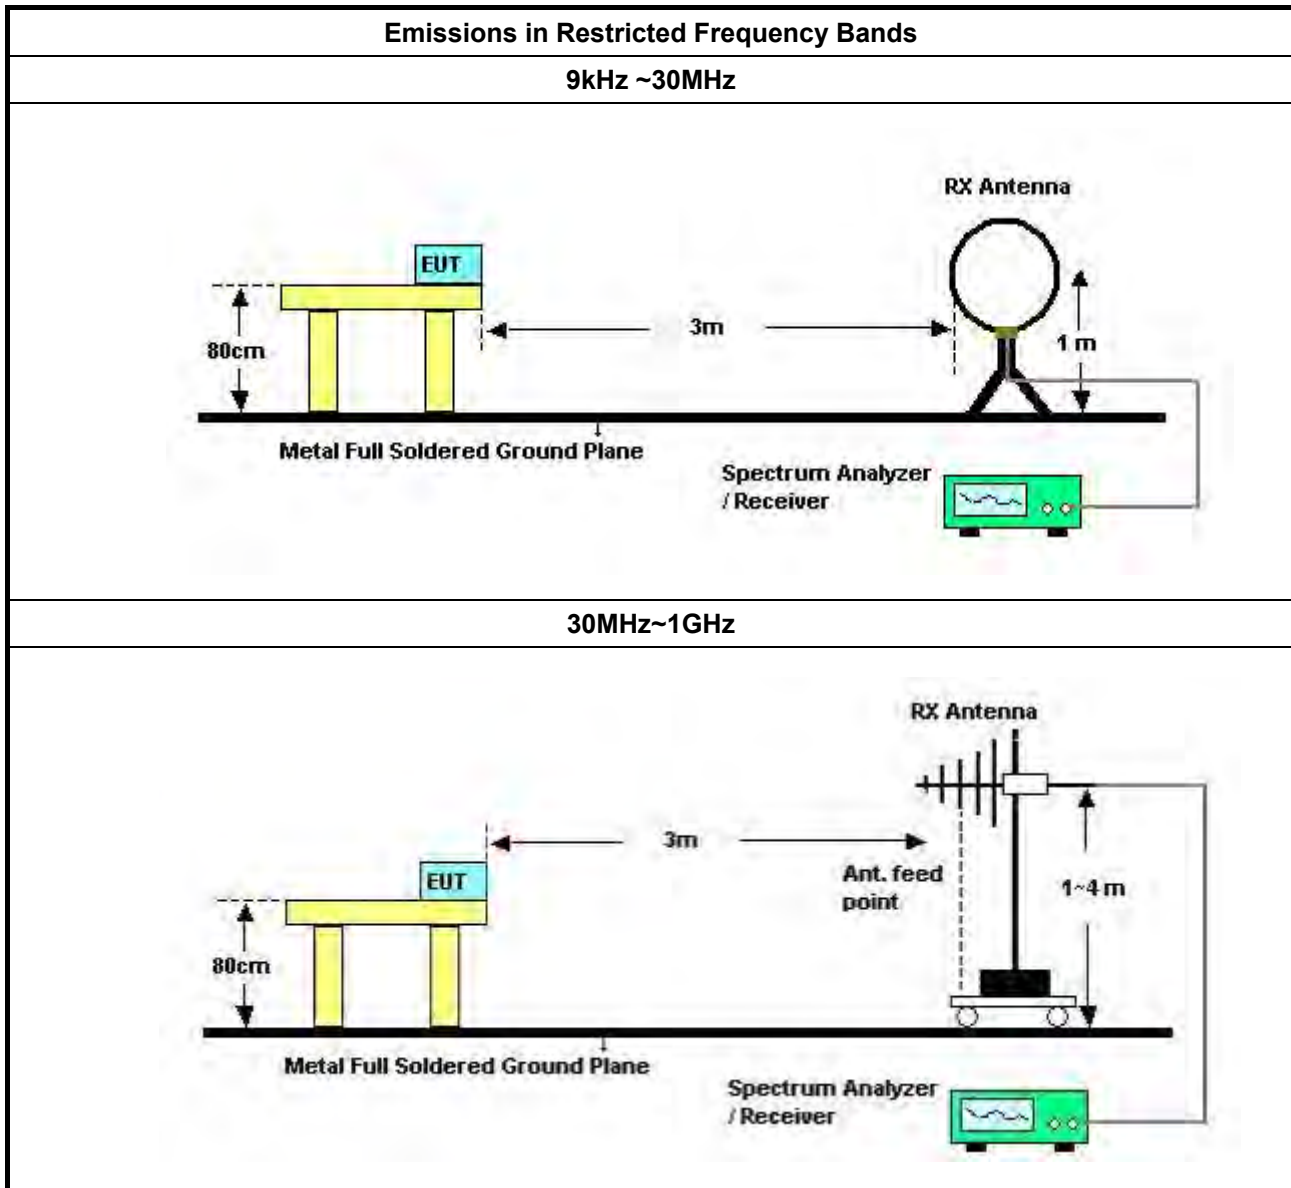

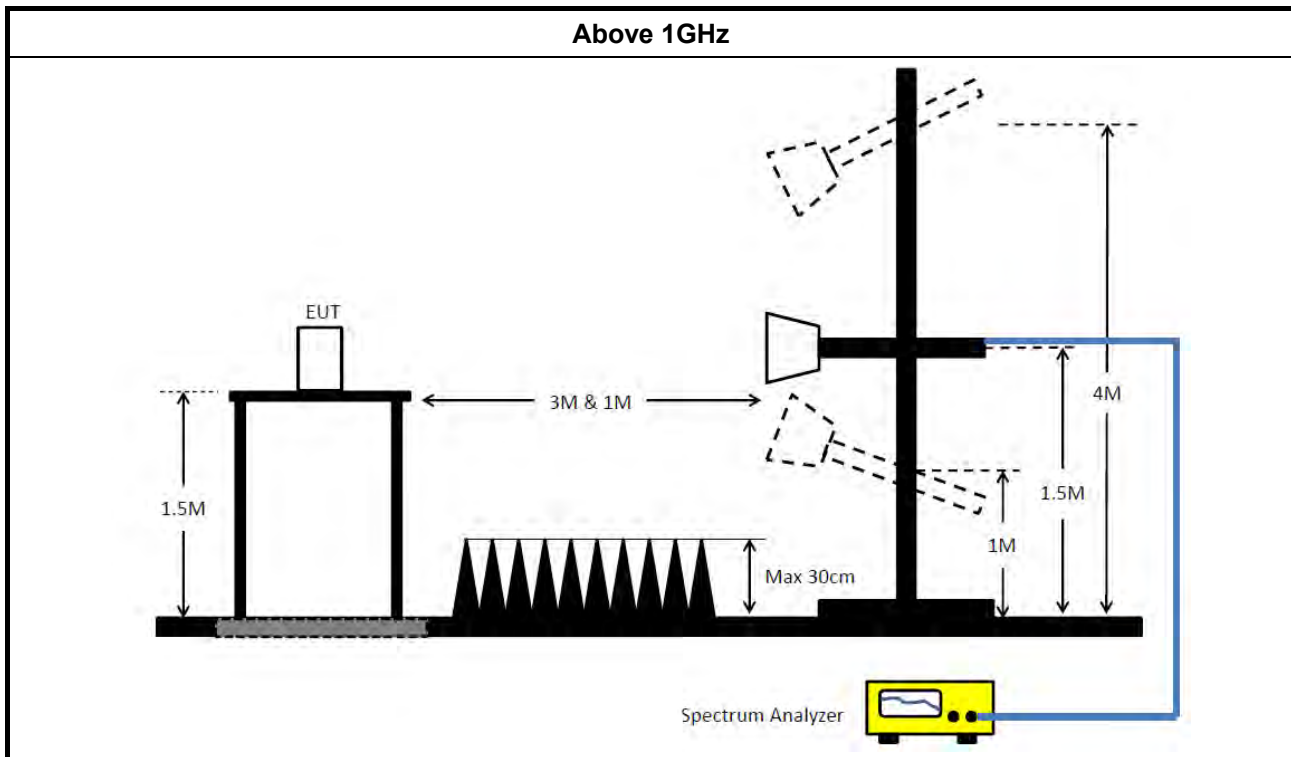

3.6.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2018	Nov. 20, 2019	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 05, 2018	Nov. 04, 2019	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 17, 2018	Jan. 16, 2019	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 06, 2018	Nov. 05, 2019	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 03, 2018	Oct. 02, 2019	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz –26.5 GHz	Nov. 19, 2018	Nov. 18, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 05, 2018	Nov. 04, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




AC Power Port Conducted Emission Result

Appendix A



Test Mode	Mode 5	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Line

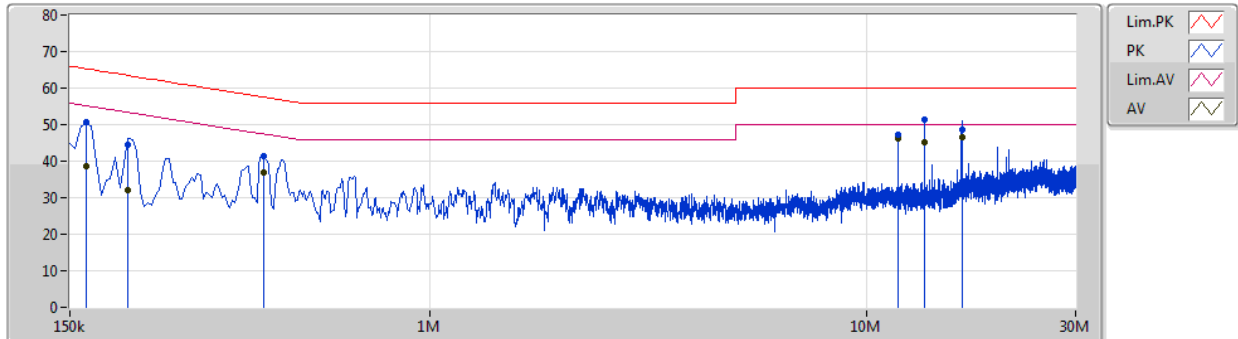

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	163.5k	50.57	65.27	-14.70	10.18	Line	-	40.39	10.16	0.02	-			
AV	163.5k	38.48	55.27	-16.79	10.18	Line	-	28.30	10.16	0.02	-			
QP	204k	44.47	63.44	-18.97	10.18	Line	-	34.29	10.16	0.02	-			
AV	204k	32.09	53.44	-21.35	10.18	Line	-	21.91	10.16	0.02	-			
QP	415.5k	41.28	57.53	-16.25	10.18	Line	-	31.10	10.16	0.02	-			
AV	415.5k	36.85	47.53	-10.68	10.18	Line	-	26.67	10.16	0.02	-			
QP	11.76M	47.14	60.00	-12.86	10.43	Line	-	36.71	10.34	0.09	-			
AV	11.76M	46.28	50.00	-3.72	10.43	Line	-	35.85	10.34	0.09	-			
QP	13.56M	51.50	60.00	-8.50	10.46	Line	-	41.04	10.36	0.10	-			
AV	13.56M	45.23	50.00	-4.77	10.46	Line	-	34.77	10.36	0.10	-			
QP	16.467M	48.54	60.00	-11.46	10.49	Line	-	38.05	10.38	0.11	-			
AV	16.467M	46.51	50.00	-3.49	10.49	Line	"Worst"	36.02	10.38	0.11	-			

Neutral

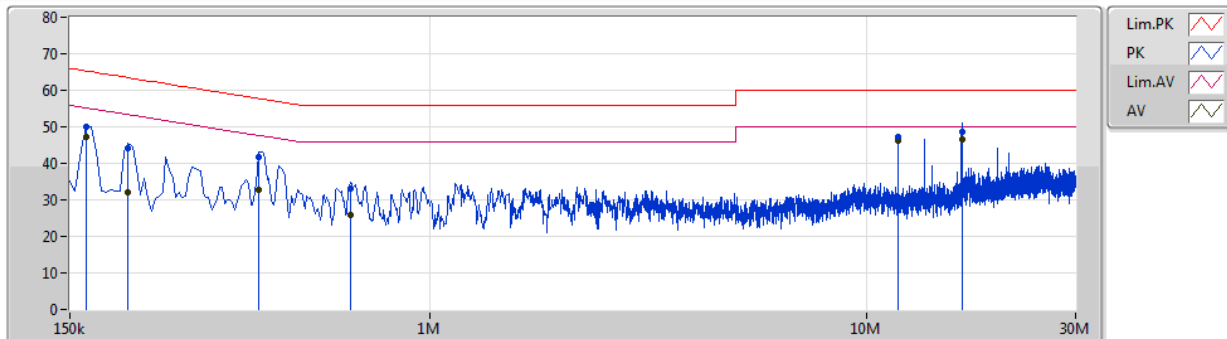

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	163.5k	50.12	65.27	-15.15	10.19	Neutral	-	39.93	10.17	0.02	-			
AV	163.5k	47.23	55.27	-8.04	10.19	Neutral	-	37.04	10.17	0.02	-			
QP	204k	44.04	63.44	-19.40	10.19	Neutral	-	33.85	10.17	0.02	-			
AV	204k	32.15	53.44	-21.29	10.19	Neutral	-	21.96	10.17	0.02	-			
QP	406.5k	41.68	57.72	-16.04	10.19	Neutral	-	31.49	10.17	0.02	-			
AV	406.5k	32.86	47.72	-14.86	10.19	Neutral	-	22.67	10.17	0.02	-			
QP	658.5k	33.03	56.00	-22.97	10.20	Neutral	-	22.83	10.18	0.02	-			
AV	658.5k	25.83	46.00	-20.17	10.20	Neutral	-	15.63	10.18	0.02	-			
QP	11.76M	47.17	60.00	-12.83	10.43	Neutral	-	36.74	10.34	0.09	-			
AV	11.76M	46.29	50.00	-3.71	10.43	Neutral	-	35.86	10.34	0.09	-			
QP	16.467M	48.60	60.00	-11.40	10.48	Neutral	-	38.12	10.37	0.11	-			
AV	16.467M	46.59	50.00	-3.41	10.48	Neutral	"Worst"	36.11	10.37	0.11	-			

For Mode 1: (Ant. 11 Panel antenna / 6.8 dBi)

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	696.25k	1.032M	1M03F1D	682.5k	1.027M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	682.5k	1.027M
2440MHz	Pass	500k	691.25k	1.031M
2480MHz	Pass	500k	696.25k	1.032M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)

2402MHz

EBW

14/02/2019

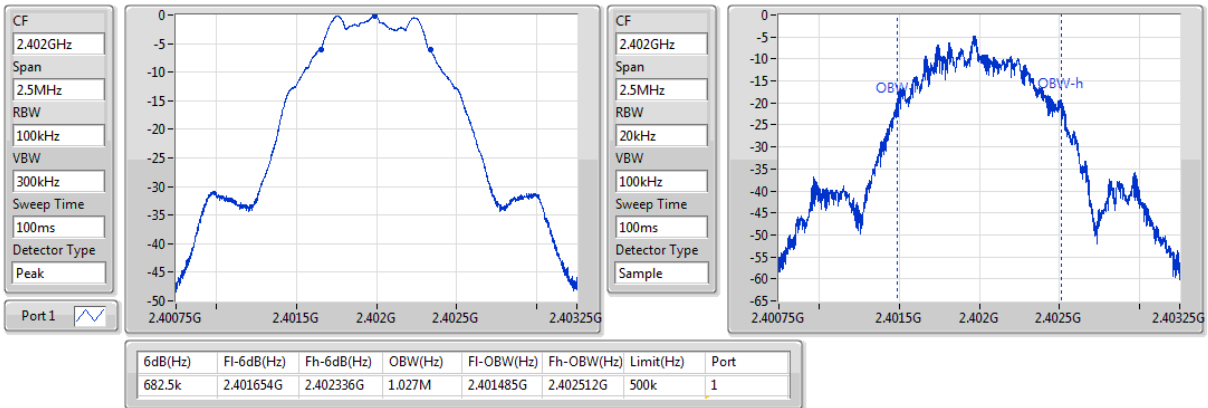


BT-LE(1Mbps)

2440MHz

EBW

14/02/2019

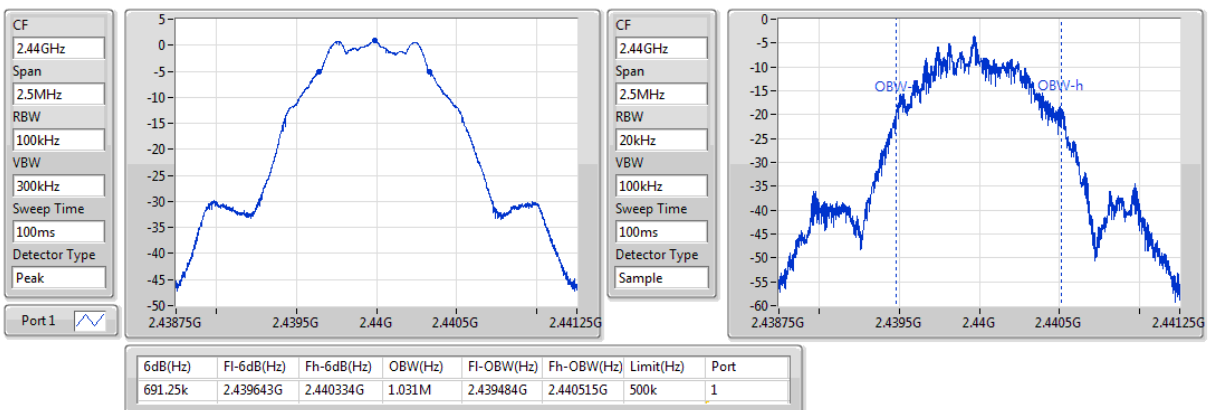


BT-LE(1Mbps)

2480MHz

EBW

14/02/2019

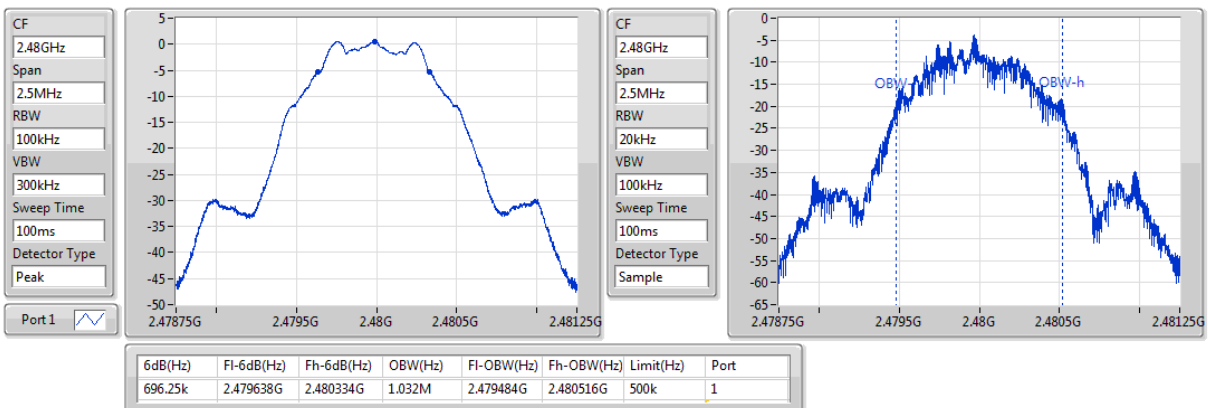



EBW Result

Appendix B.2

For Mode 2: (Ant. 12 Omni antenna / 7 dBi)

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	696.25k	1.032M	1M03F1D	682.5k	1.027M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	682.5k	1.027M
2440MHz	Pass	500k	691.25k	1.031M
2480MHz	Pass	500k	696.25k	1.032M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)

2402MHz

EBW

14/02/2019

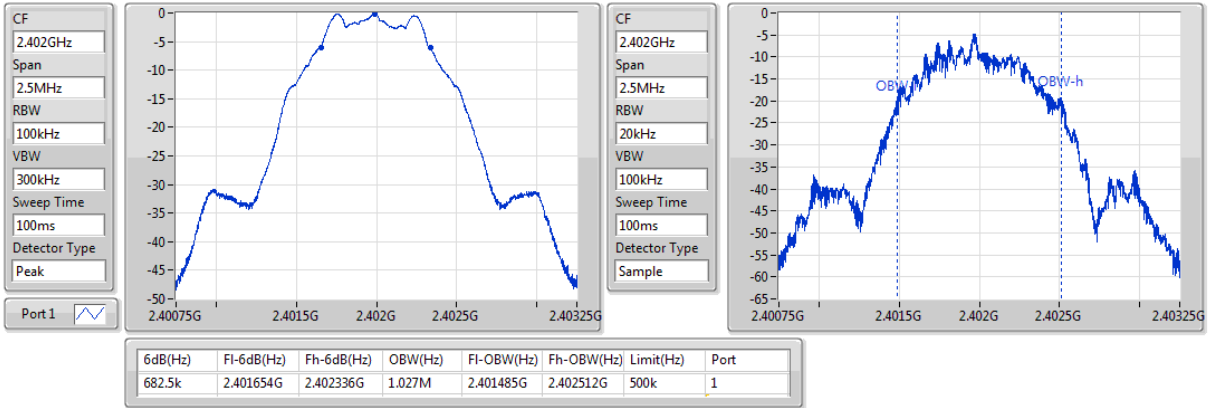


BT-LE(1Mbps)

2440MHz

EBW

14/02/2019

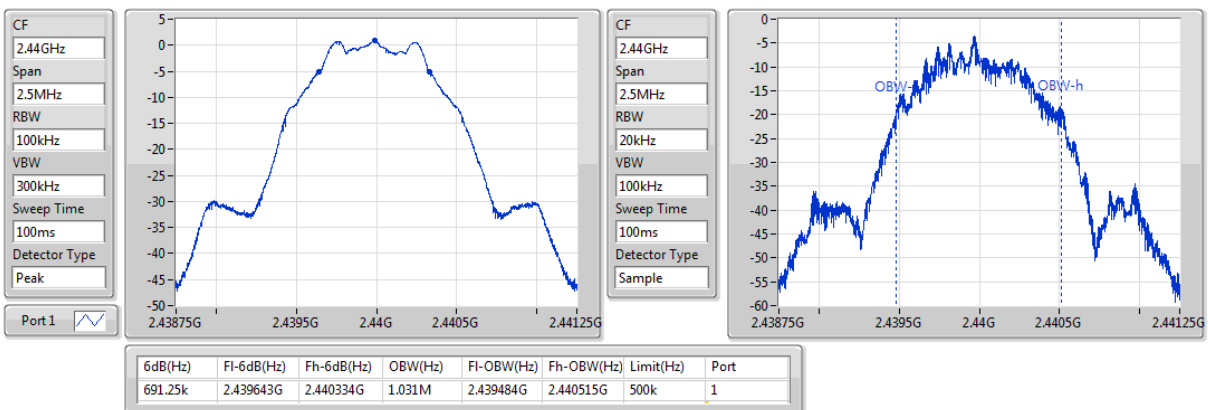


BT-LE(1Mbps)

2480MHz

EBW

14/02/2019

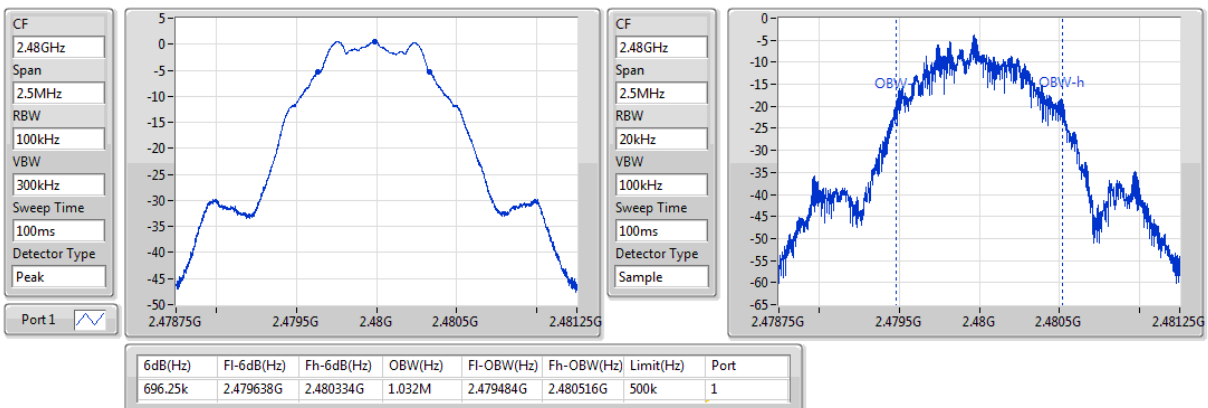

For Mode 1: (Ant. 11 Panel antenna / 6.8 dBi)

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	1.33	0.00136

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-	-
2402MHz	Pass	6.80	0.94	0.94	29.20
2440MHz	Pass	6.80	1.12	1.12	29.20
2480MHz	Pass	6.80	1.33	1.33	29.20

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

For Mode 2: (Ant. 12 Omni antenna / 7 dBi)

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	1.33	0.00136

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-	-
2402MHz	Pass	7.00	0.94	0.94	29.00
2440MHz	Pass	7.00	1.12	1.12	29.00
2480MHz	Pass	7.00	1.33	1.33	29.00

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only



PSD Result

Appendix D.1

For Mode 1: (Ant. 11 Panel antenna / 6.8 dBi)

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-13.18

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-	-
2402MHz	Pass	6.80	-14.14	-14.14	7.20
2440MHz	Pass	6.80	-13.18	-13.18	7.20
2480MHz	Pass	6.80	-14.00	-14.00	7.20

DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

BT-LE(1Mbps)

PSD

2402MHz

14/02/2019

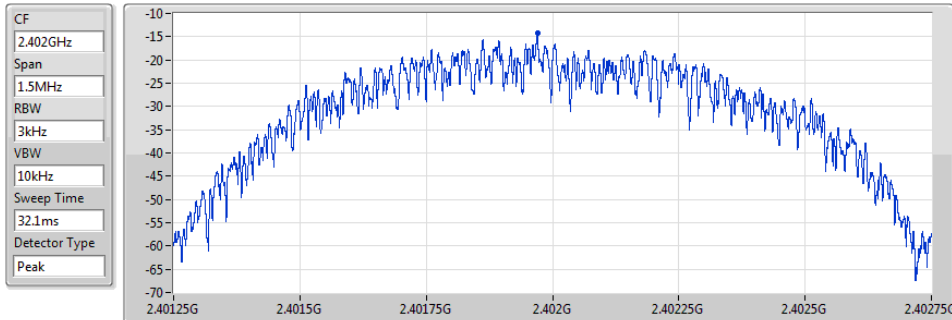


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-14.14	-14.14	-14.14

BT-LE(1Mbps)

PSD

2440MHz

14/02/2019

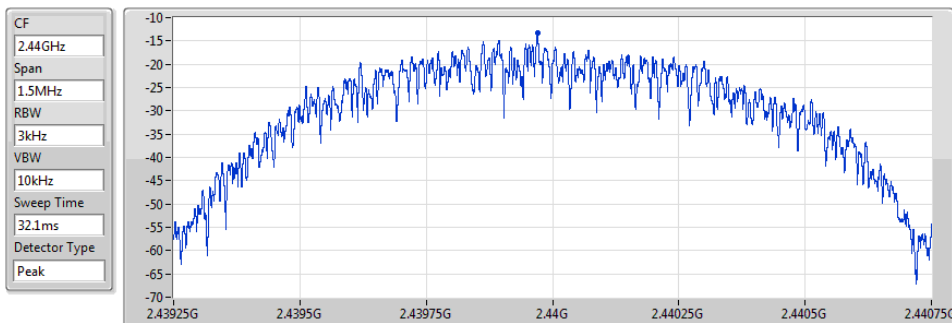


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-13.18	-13.18	-13.18

BT-LE(1Mbps)

PSD

2480MHz

14/02/2019

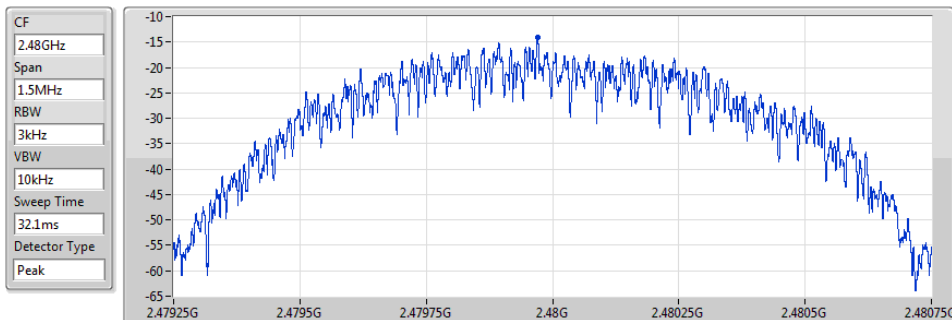

Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-14.00	-14.00	-14.00



PSD Result

Appendix D.2

For Mode 2: (Ant. 12 Omni antenna / 7 dBi)

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-13.18

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-	-
2402MHz	Pass	7.00	-14.14	-14.14	7.00
2440MHz	Pass	7.00	-13.18	-13.18	7.00
2480MHz	Pass	7.00	-14.00	-14.00	7.00

DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

BT-LE(1Mbps)

PSD

2402MHz

14/02/2019

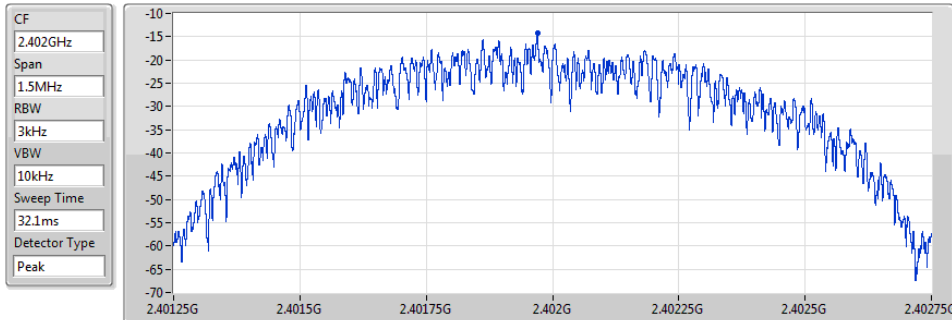


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-14.14	-14.14	-14.14

BT-LE(1Mbps)

PSD

2440MHz

14/02/2019

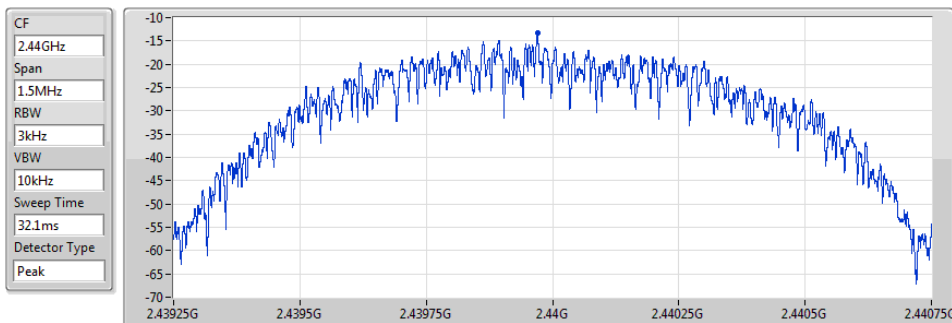


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-13.18	-13.18	-13.18

BT-LE(1Mbps)

PSD

2480MHz

14/02/2019

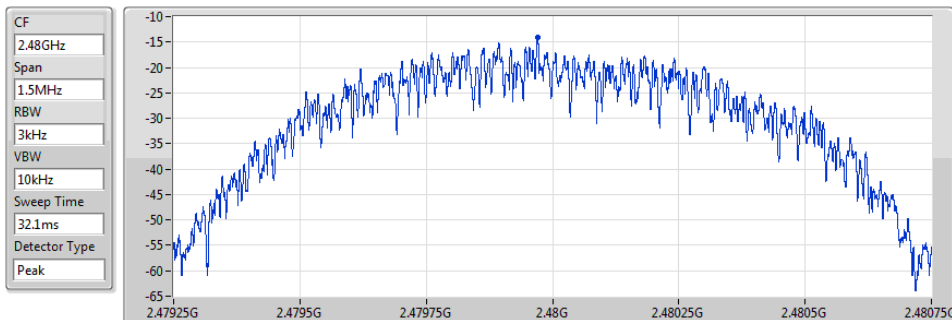

Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-14.00	-14.00	-14.00



CSE Non-restricted Band Result

Appendix E.1

For Mode 1: (Ant. 11 Panel antenna / 6.8 dBi)

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.47978G	0.50	-29.50	933.98M	-57.75	2.39969G	-58.02	2.48371G	-43.26	16.59365G	-50.33	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.47978G	0.50	-29.50	2.398G	-45.41	2.39803G	-45.99	2.48444G	-57.46	16.94262G	-49.93	1
2440MHz	Pass	2.47978G	0.50	-29.50	2.1683G	-58.03	2.39892G	-57.21	2.48353G	-57.46	15.22308G	-50.11	1
2480MHz	Pass	2.47978G	0.50	-29.50	933.98M	-57.75	2.39969G	-58.02	2.48371G	-43.26	16.59365G	-50.33	1


BT-LE(1Mbps)

2402MHz

CSE NdB

14/02/2019

Port 1

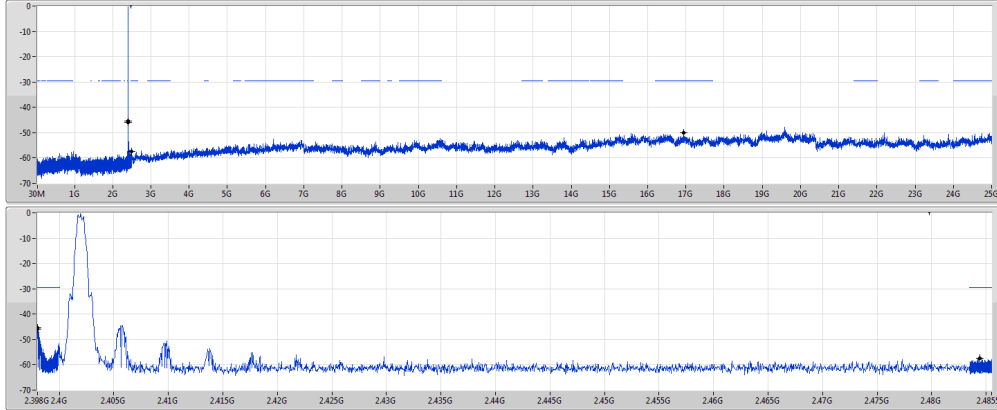


BT-LE(1Mbps)

2440MHz

CSE NdB

14/02/2019

Port 1

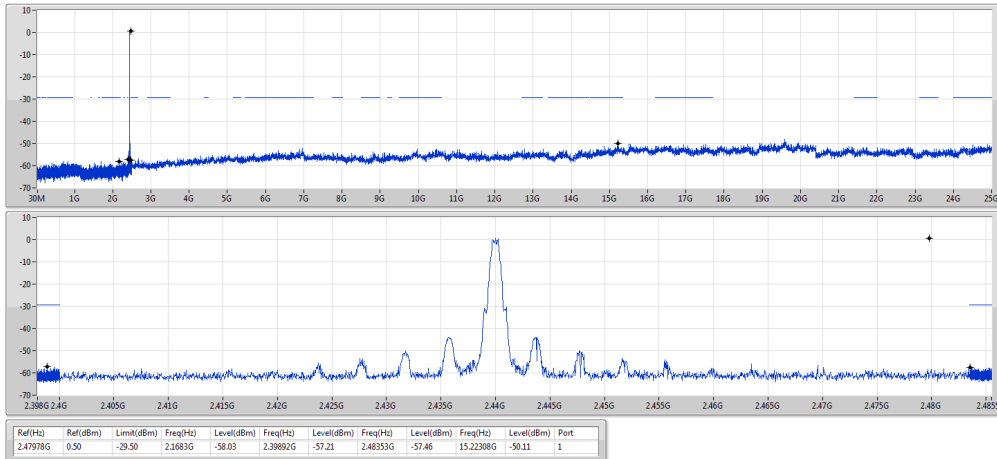


BT-LE(1Mbps)

2480MHz

CSE NdB

14/02/2019

Port 1

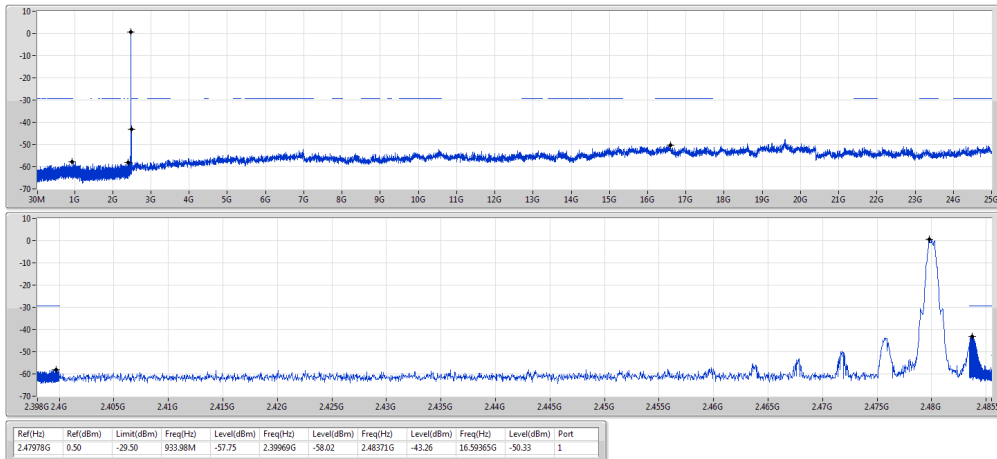



CSE Non-restricted Band Result

Appendix E.2

For Mode 2: (Ant. 12 Omni antenna / 7 dBi)

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.47978G	0.50	-29.50	933.98M	-57.75	2.39969G	-58.02	2.48371G	-43.26	16.59365G	-50.33	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.47978G	0.50	-29.50	2.398G	-45.41	2.39803G	-45.99	2.48444G	-57.46	16.94262G	-49.93	1
2440MHz	Pass	2.47978G	0.50	-29.50	2.1683G	-58.03	2.39892G	-57.21	2.48353G	-57.46	15.22308G	-50.11	1
2480MHz	Pass	2.47978G	0.50	-29.50	933.98M	-57.75	2.39969G	-58.02	2.48371G	-43.26	16.59365G	-50.33	1


BT-LE(1Mbps)

2402MHz

CSE NdB

14/02/2019

Port 1

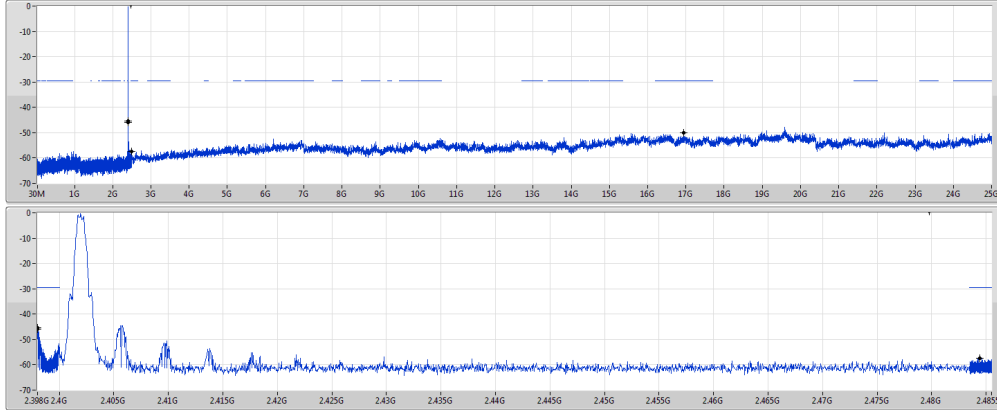


BT-LE(1Mbps)

2440MHz

CSE NdB

14/02/2019

Port 1

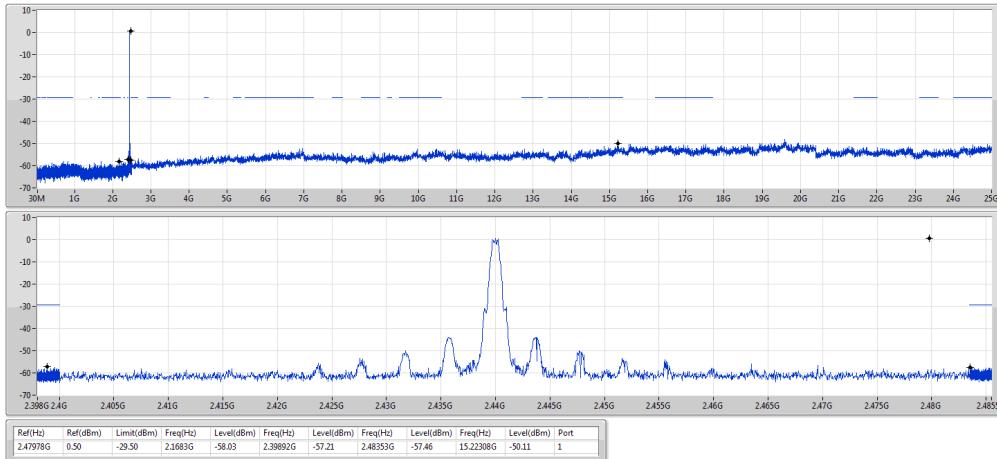


BT-LE(1Mbps)

2480MHz

CSE NdB

14/02/2019

Port 1

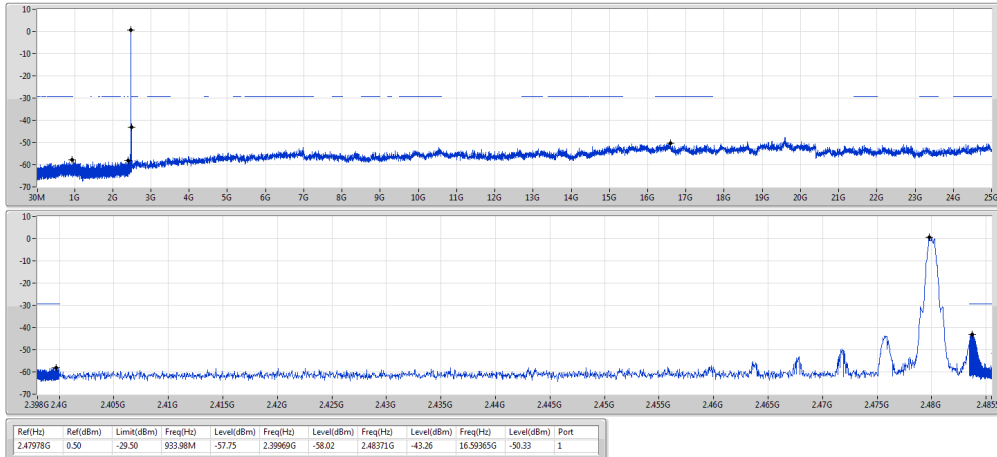




Radiated Emission below 1GHz Result

Appendix F.1


Test Mode	Mode 7	Frequency Range	30 MHz to 1,000 MHz
-----------	--------	-----------------	---------------------

Vertical 30 MHz to 1,000 MHz

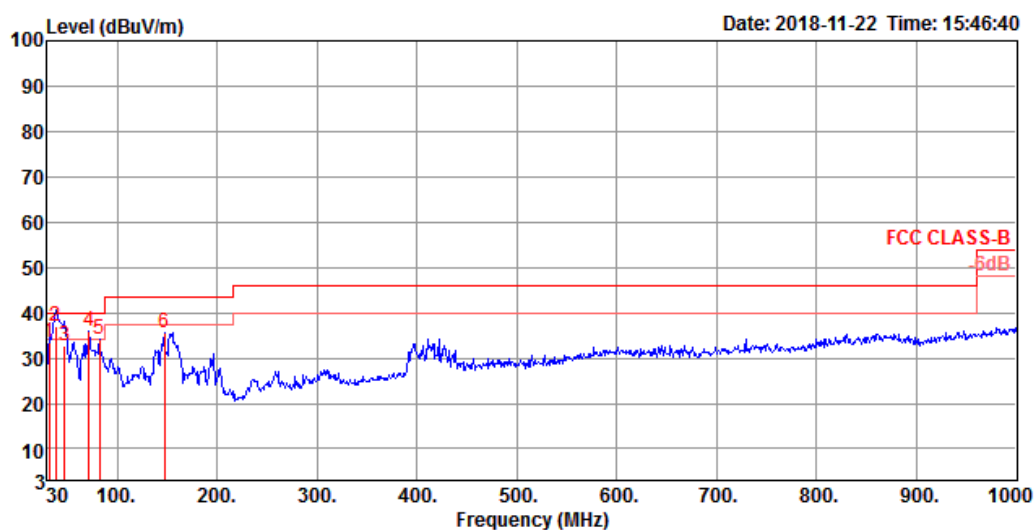

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	33.45	40.00	-6.55	42.29	0.67	23.09	32.60	100	53 QP	VERTICAL
2	38.73	36.93	40.00	-3.07	49.50	0.88	19.15	32.60	100	2 QP	VERTICAL
3	47.46	32.60	40.00	-7.40	49.20	0.98	15.01	32.59	112	21 QP	VERTICAL
4	71.71	35.89	40.00	-4.11	55.23	1.18	12.05	32.57	200	71 Peak	VERTICAL
5	82.38	34.00	40.00	-6.00	52.20	1.30	13.06	32.56	125	144 Peak	VERTICAL
6	147.37	35.60	43.50	-7.90	49.68	1.89	16.54	32.51	125	218 Peak	VERTICAL

Horizontal 30 MHz to 1,000 MHz

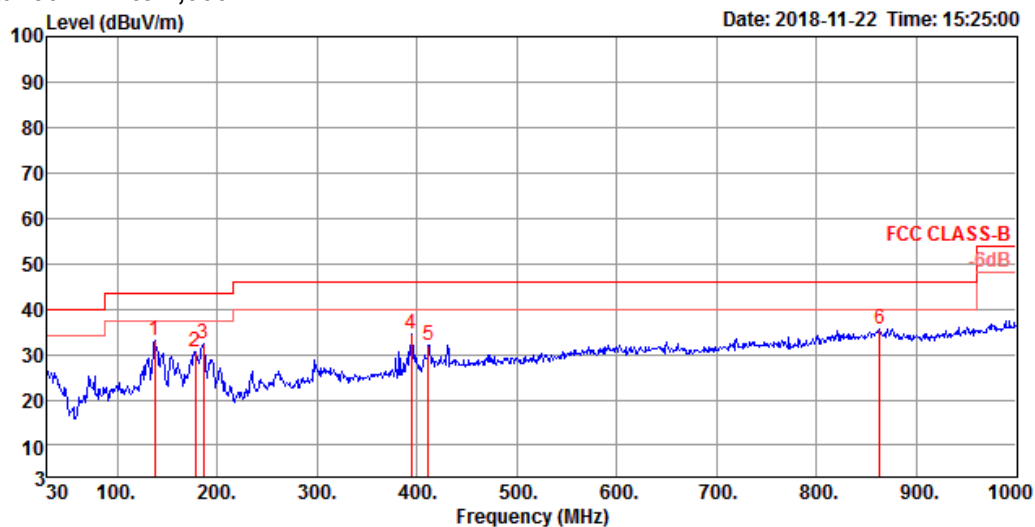

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	137.67	33.10	43.50	-10.40	46.51	1.87	17.24	32.52	300	272 Peak	HORIZONTAL
2	178.41	30.71	43.50	-12.79	46.07	2.04	15.09	32.49	200	210 Peak	HORIZONTAL
3	186.17	32.24	43.50	-11.26	47.76	2.11	14.86	32.49	200	193 Peak	HORIZONTAL
4	394.72	34.53	46.00	-11.47	42.23	3.51	21.23	32.44	125	287 Peak	HORIZONTAL
5	411.21	32.09	46.00	-13.91	38.97	3.59	21.97	32.44	125	271 Peak	HORIZONTAL
6	863.23	35.74	46.00	-10.26	35.73	5.95	26.07	32.01	100	34 Peak	HORIZONTAL



RSE TX above 1GHz Result

Appendix F.2

For Mode 1: (Ant. 11 Panel antenna / 6.8 dBi)


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	48.71	54.00	-5.29	32.41	3	Vertical	334	2.04	-

BT-LE(1Mbps)

2402MHz_TX

18/02/2019

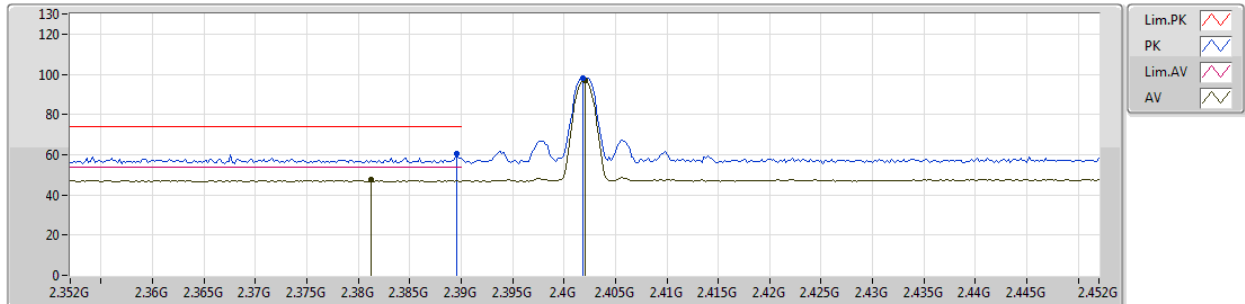


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments							
PK	2.3896G	60.31	74.00	-13.69	32.13	3	Vertical	355	1.01	-							
AV	2.3812G	47.48	54.00	-6.52	32.10	3	Vertical	355	1.01	-							
PK	2.4018G	97.87	Inf	-Inf	32.16	3	Vertical	355	1.01	-							
AV	2.402G	97.00	Inf	-Inf	32.16	3	Vertical	355	1.01	-							

BT-LE(1Mbps)

2402MHz_TX

18/02/2019

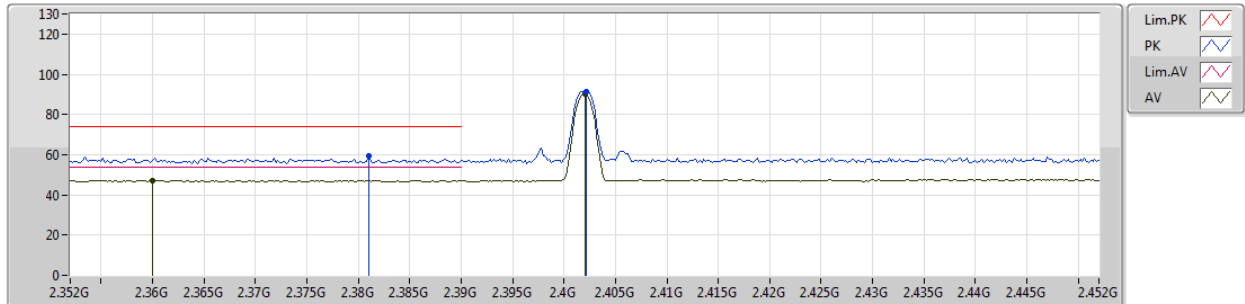


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.381G	59.24	74.00	-14.76	32.10	3	Horizontal	76	2.43	-
AV	2.36G	47.29	54.00	-6.71	32.02	3	Horizontal	76	2.43	-
PK	2.4022G	91.21	Inf	-Inf	32.16	3	Horizontal	76	2.43	-
AV	2.402G	90.31	Inf	-Inf	32.16	3	Horizontal	76	2.43	-

BT-LE(1Mbps)

2402MHz_TX

18/02/2019

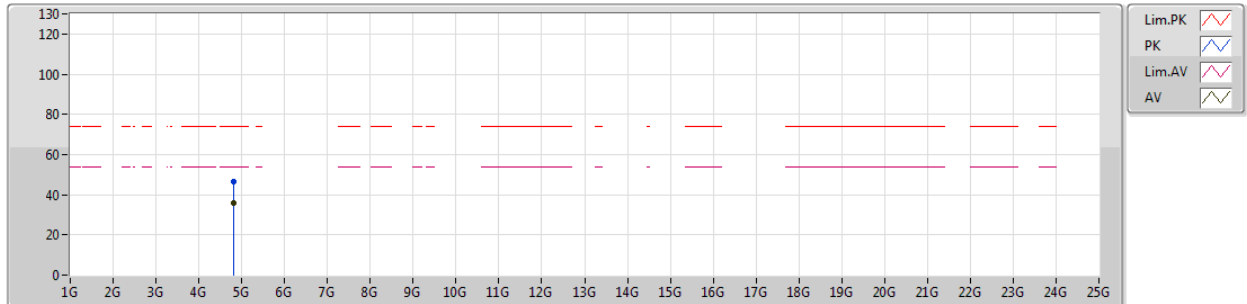


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.81852G	46.75	74.00	-27.25	6.58	3	Vertical	126	1.50	-						
AV	4.80292G	35.69	54.00	-18.31	6.53	3	Vertical	126	1.50	-						

BT-LE(1Mbps)

2402MHz_TX

18/02/2019

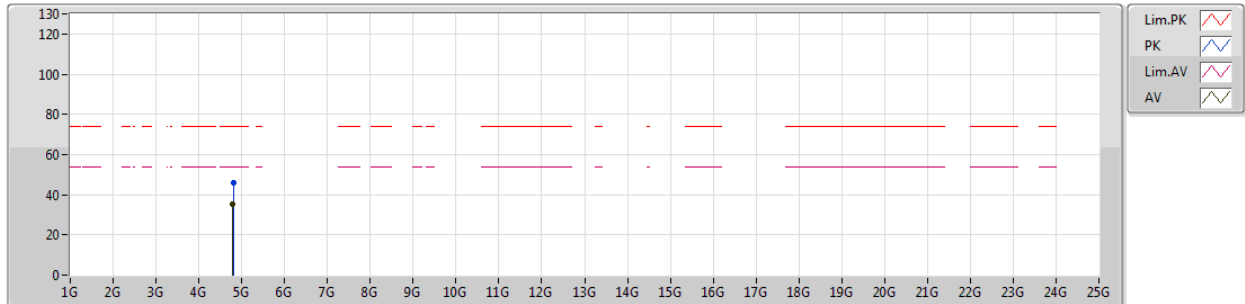


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.80724G	46.16	74.00	-27.84	6.54	3	Horizontal	308	1.50	-						
AV	4.79794G	35.45	54.00	-18.55	6.53	3	Horizontal	308	1.50	-						

BT-LE(1Mbps)

2440MHz_TX

18/02/2019

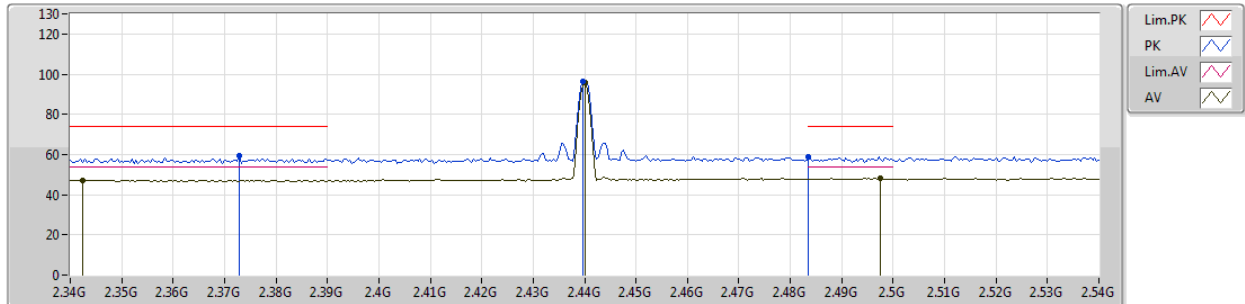


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments								
PK	2.3728G	59.62	74.00	-14.38	32.06	3	Vertical	342	2.90	-								
AV	2.3424G	47.32	54.00	-6.68	31.96	3	Vertical	342	2.90	-								
PK	2.4396G	96.46	Inf	-Inf	32.28	3	Vertical	342	2.90	-								
AV	2.44G	95.59	Inf	-Inf	32.28	3	Vertical	342	2.90	-								
PK	2.4835G	58.94	74.00	-15.06	32.41	3	Vertical	342	2.90	-								
AV	2.4976G	48.26	54.00	-5.74	32.45	3	Vertical	342	2.90	-								

BT-LE(1Mbps)

2440MHz_TX

18/02/2019

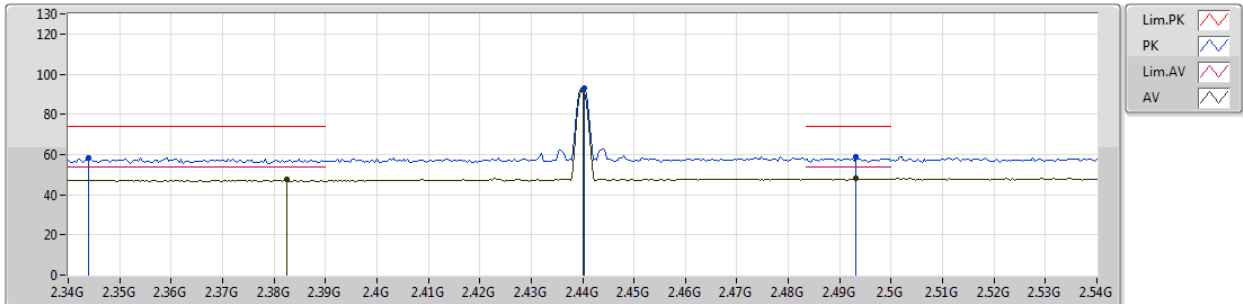


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.344G	58.19	74.00	-15.81	31.96	3	Horizontal	70	2.99	-
AV	2.3824G	47.47	54.00	-6.53	32.10	3	Horizontal	70	2.99	-
PK	2.4404G	93.26	Inf	-Inf	32.28	3	Horizontal	70	2.99	-
AV	2.44G	92.39	Inf	-Inf	32.28	3	Horizontal	70	2.99	-
PK	2.4932G	58.60	74.00	-15.40	32.44	3	Horizontal	70	2.99	-
AV	2.4932G	48.26	54.00	-5.74	32.44	3	Horizontal	70	2.99	-

BT-LE(1Mbps)

2440MHz_TX

18/02/2019

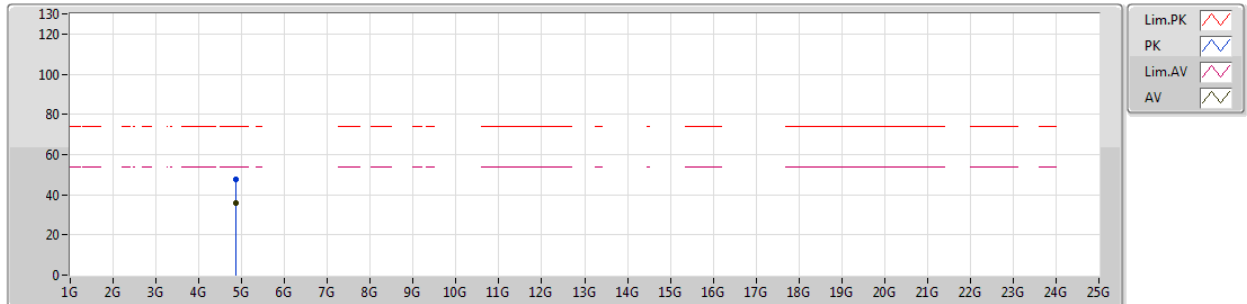


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.87214G	47.89	74.00	-26.11	6.71	3	Vertical	109	1.50	-						
AV	4.87724G	35.69	54.00	-18.31	6.72	3	Vertical	109	1.50	-						

BT-LE(1Mbps)

2440MHz_TX

18/02/2019

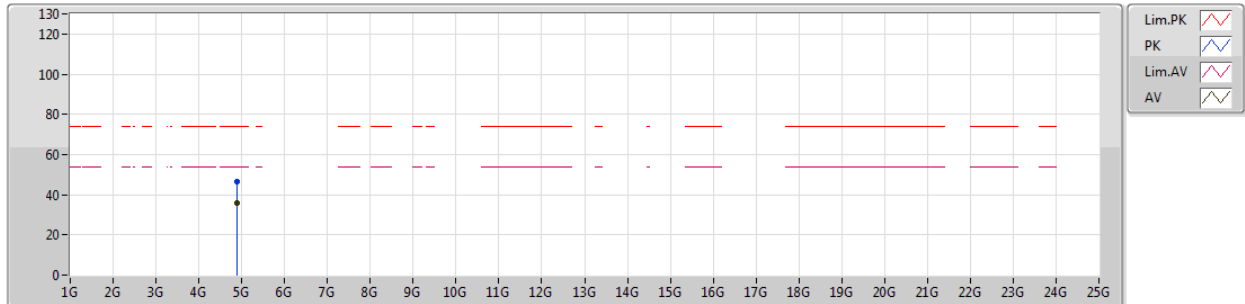


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.89476G	46.72	74.00	-27.28	6.76	3	Horizontal	322	1.46	-						
AV	4.8869G	35.63	54.00	-18.37	6.73	3	Horizontal	322	1.46	-						

BT-LE(1Mbps)

2480MHz_TX

18/02/2019

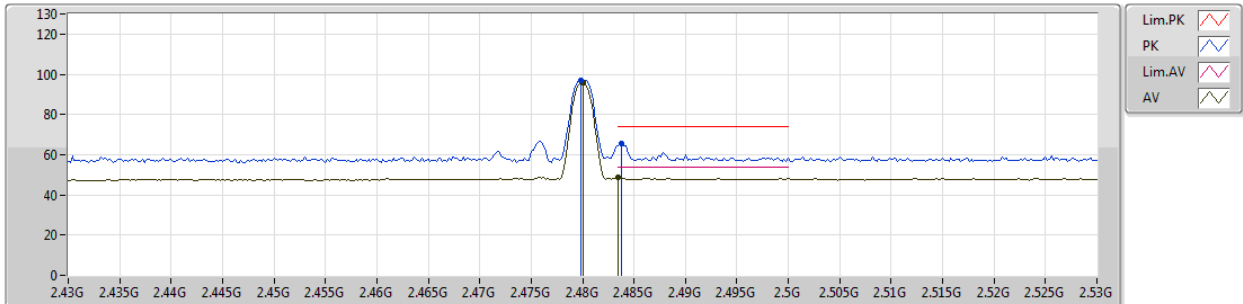


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4798G	96.86	Inf	-Inf	32.40	3	Vertical	334	2.04	-
AV	2.48G	95.98	Inf	-Inf	32.40	3	Vertical	334	2.04	-
PK	2.4838G	65.47	74.00	-8.53	32.41	3	Vertical	334	2.04	-
AV	2.4835G	48.71	54.00	-5.29	32.41	3	Vertical	334	2.04	-

BT-LE(1Mbps)

2480MHz_TX

18/02/2019

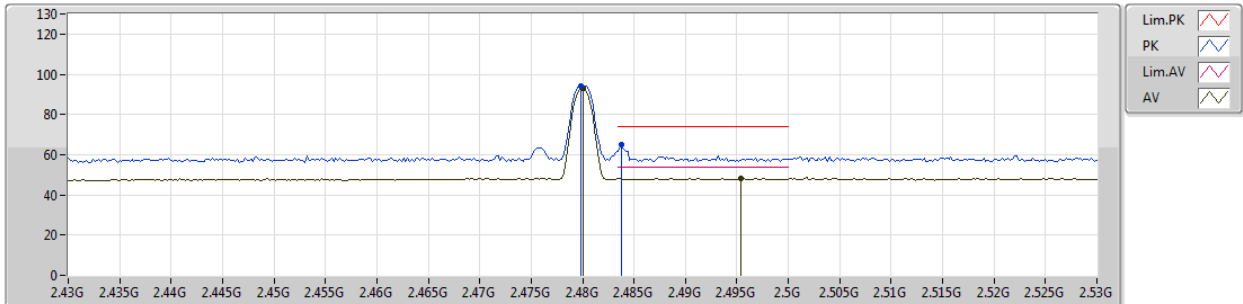


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4798G	94.09	Inf	-Inf	32.40	3	Horizontal	298	1.16	-
AV	2.48G	93.22	Inf	-Inf	32.40	3	Horizontal	298	1.16	-
PK	2.4838G	64.75	74.00	-9.25	32.41	3	Horizontal	298	1.16	-
AV	2.4954G	48.26	54.00	-5.74	32.45	3	Horizontal	298	1.16	-

BT-LE(1Mbps)

2480MHz_TX

18/02/2019

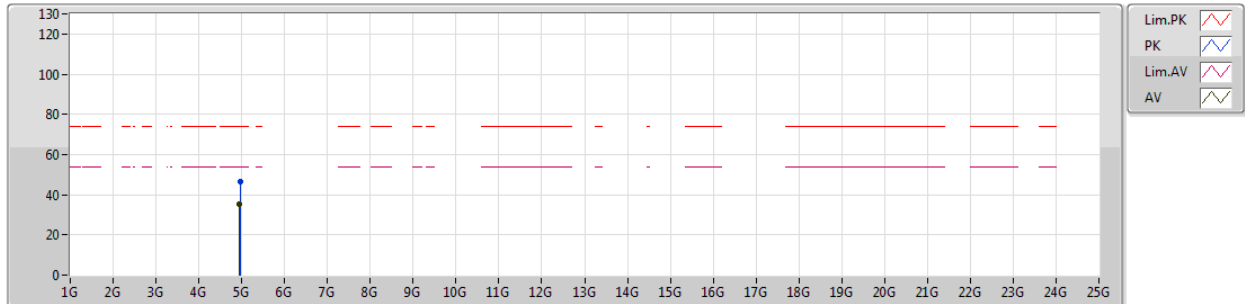


EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.97062G	46.60	74.00	-27.40	6.96	3	Vertical	351	1.63	-						
AV	4.9474G	35.42	54.00	-18.58	6.89	3	Vertical	351	1.63	-						

BT-LE(1Mbps)

2480MHz_TX

18/02/2019

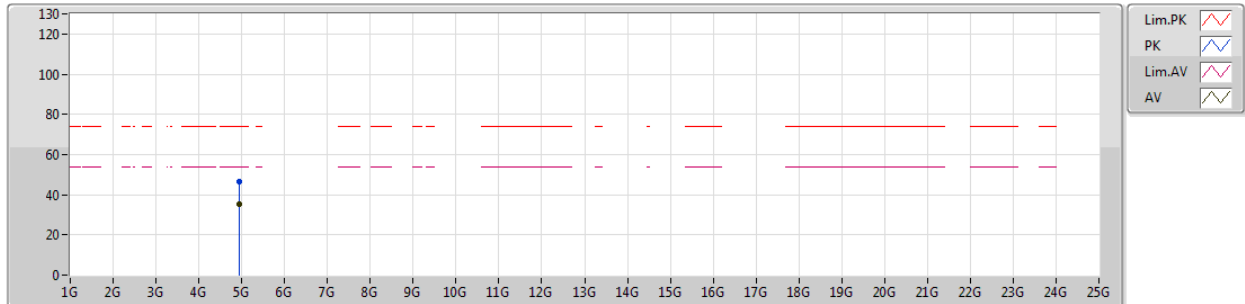

EUT_X_1TX
Setting Default
06-K-3
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.95016G	46.33	74.00	-27.67	6.91	3	Horizontal	137	2.41	-						
AV	4.94692G	35.42	54.00	-18.58	6.89	3	Horizontal	137	2.41	-						



RSE TX above 1GHz Result

Appendix F.3

For Mode 2: (Ant. 12 Omni antenna / 7 dBi)


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	2.4836G	73.32	74.00	-0.68	32.41	3	Vertical	18	1.71	-

BT-LE(1Mbps)

2402MHz_TX

11/02/2019

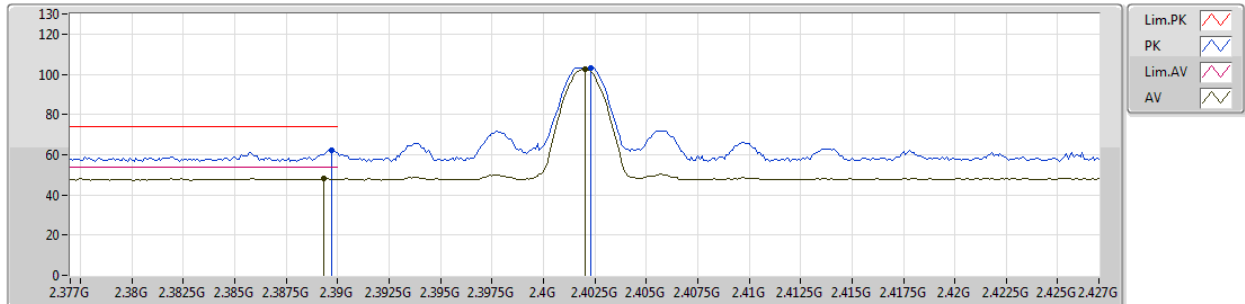


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3897G	62.35	74.00	-11.65	32.13	3	Vertical	359	1.64	-
AV	2.3893G	48.22	54.00	-5.78	32.13	3	Vertical	359	1.64	-
PK	2.4023G	103.29	Inf	-Inf	32.17	3	Vertical	359	1.64	-
AV	2.402G	102.46	Inf	-Inf	32.16	3	Vertical	359	1.64	-

BT-LE(1Mbps)

2402MHz_TX

11/02/2019

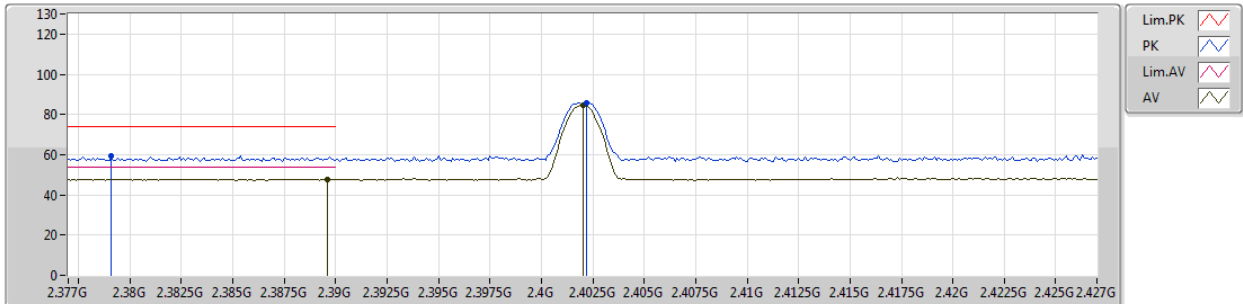


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3791G	59.60	74.00	-14.40	32.08	3	Horizontal	65	1.50	-
AV	2.3896G	47.74	54.00	-6.26	32.13	3	Horizontal	65	1.50	-
PK	2.4022G	85.52	Inf	-Inf	32.16	3	Horizontal	65	1.50	-
AV	2.402G	84.48	Inf	-Inf	32.16	3	Horizontal	65	1.50	-

BT-LE(1Mbps)

2402MHz_TX

11/02/2019

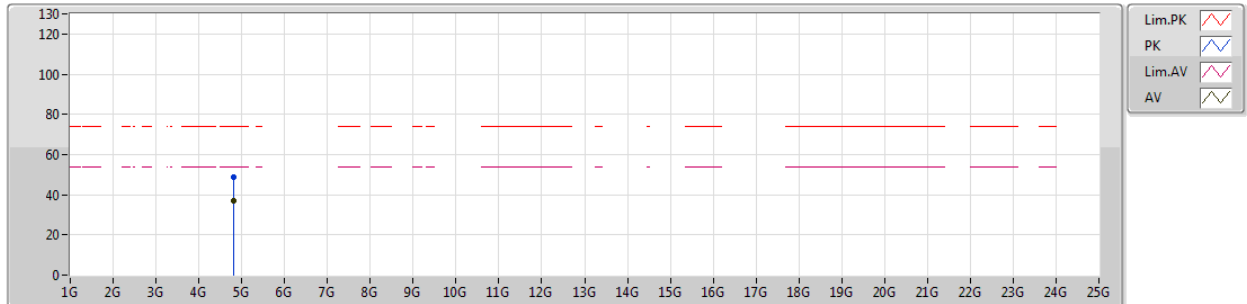


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.80176G	48.85	74.00	-25.15	6.53	3	Vertical	9	1.50	-						
AV	4.80602G	36.95	54.00	-17.05	6.54	3	Vertical	9	1.50	-						

BT-LE(1Mbps)

2402MHz_TX

11/02/2019

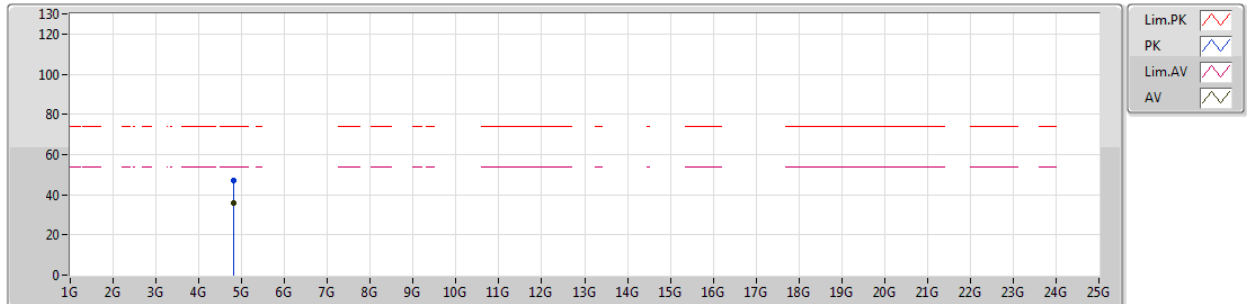


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.80572G	47.27	74.00	-26.73	6.54	3	Horizontal	83	1.50	-						
AV	4.80212G	35.91	54.00	-18.09	6.53	3	Horizontal	83	1.50	-						

BT-LE(1Mbps)

2440MHz_TX

11/02/2019

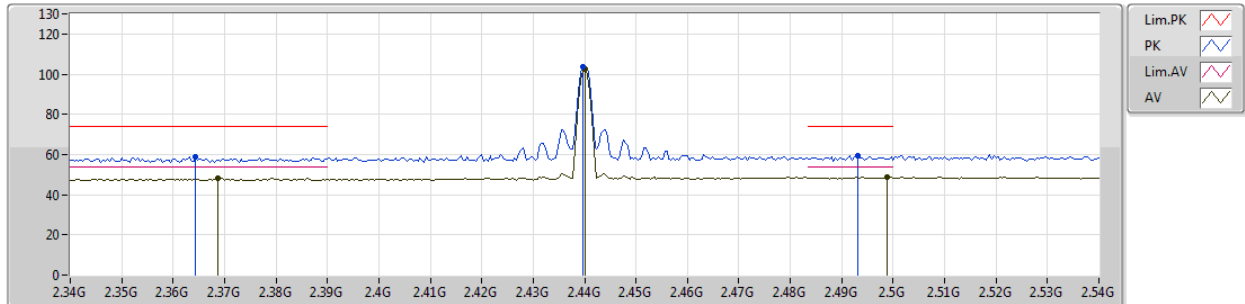


EUT_Y_1TX
Setting Default
06-5-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments								
PK	2.3644G	58.71	74.00	-15.29	32.03	3	Vertical	353	1.54	-								
AV	2.3688G	47.99	54.00	-6.01	32.05	3	Vertical	353	1.54	-								
PK	2.4396G	103.59	Inf	-Inf	32.28	3	Vertical	353	1.54	-								
AV	2.44G	102.74	Inf	-Inf	32.28	3	Vertical	353	1.54	-								
PK	2.4932G	59.45	74.00	-14.55	32.44	3	Vertical	353	1.54	-								
AV	2.4988G	48.75	54.00	-5.25	32.46	3	Vertical	353	1.54	-								

BT-LE(1Mbps)

2440MHz_TX

11/02/2019

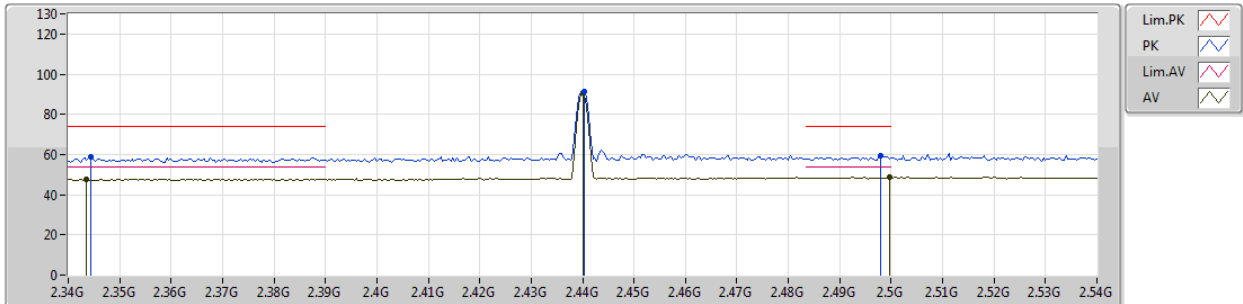


EUT_Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3444G	58.60	74.00	-15.40	31.96	3	Horizontal	299	2.80	-
AV	2.3436G	47.80	54.00	-6.20	31.96	3	Horizontal	299	2.80	-
PK	2.4404G	91.58	Inf	-Inf	32.28	3	Horizontal	299	2.80	-
AV	2.44G	90.70	Inf	-Inf	32.28	3	Horizontal	299	2.80	-
PK	2.498G	59.39	74.00	-14.61	32.46	3	Horizontal	299	2.80	-
AV	2.4996G	48.51	54.00	-5.49	32.46	3	Horizontal	299	2.80	-

BT-LE(1Mbps)

2440MHz_TX

11/02/2019

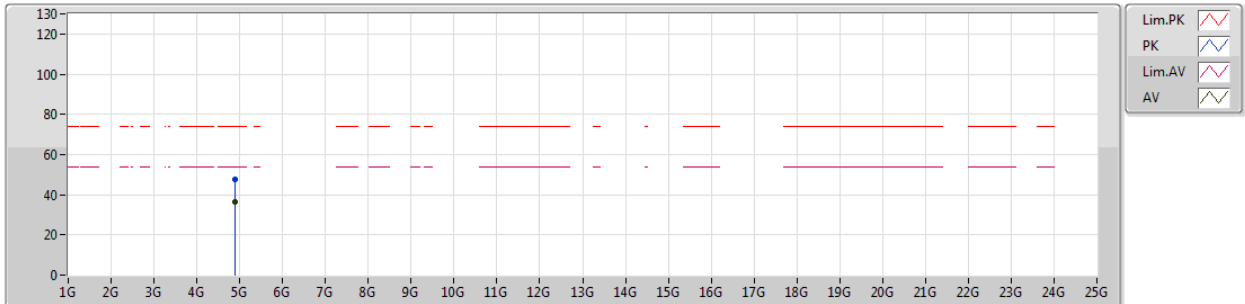


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments							
PK	4.87802G	47.75	74.00	-26.25	6.72	3	Vertical	150	1.13	-							
AV	4.8788G	36.45	54.00	-17.55	6.72	3	Vertical	150	1.13	-							

BT-LE(1Mbps)

2440MHz_TX

11/02/2019

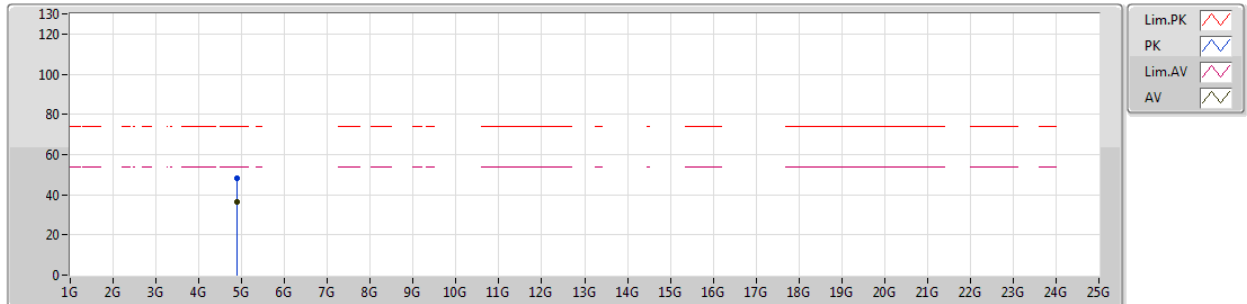


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.88292G	48.18	74.00	-25.82	6.72	3	Horizontal	295	1.34	-						
AV	4.88108G	36.48	54.00	-17.52	6.72	3	Horizontal	295	1.34	-						

BT-LE(1Mbps)

2480MHz_TX

11/02/2019

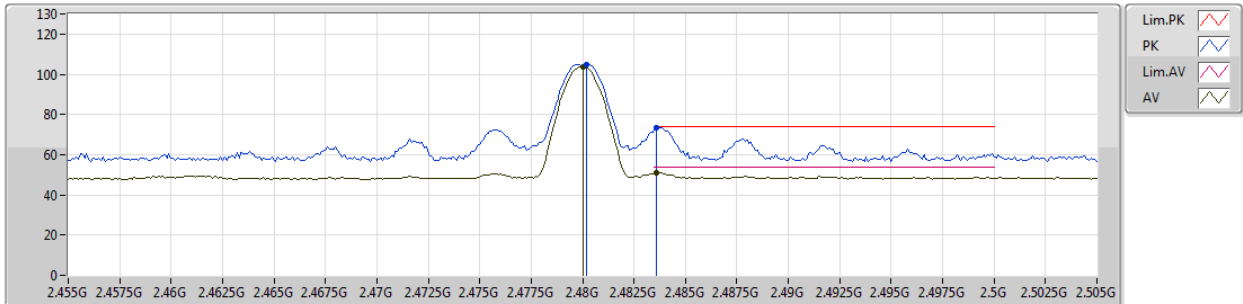


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4802G	104.59	Inf	-Inf	32.40	3	Vertical	18	1.71	-
AV	2.48G	103.74	Inf	-Inf	32.40	3	Vertical	18	1.71	-
PK	2.4836G	73.32	74.00	-0.68	32.41	3	Vertical	18	1.71	-
AV	2.4836G	50.85	54.00	-3.15	32.41	3	Vertical	18	1.71	-

BT-LE(1Mbps)

2480MHz_TX

11/02/2019

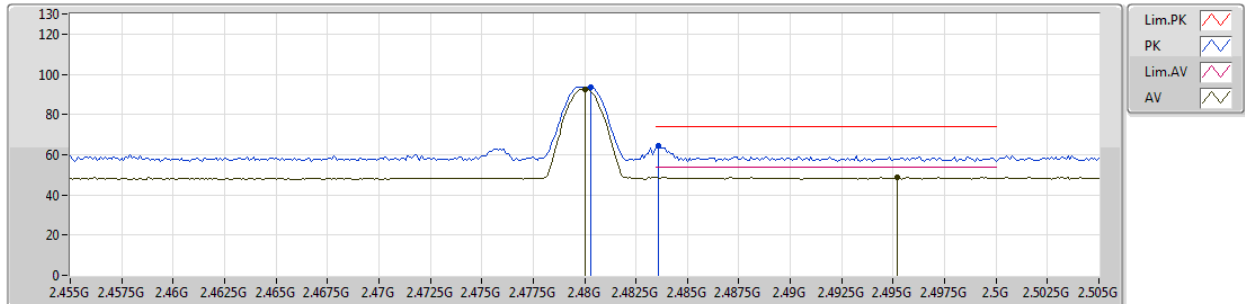


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4803G	93.57	Inf	-Inf	32.40	3	Horizontal	294	1.63	-
AV	2.48G	92.66	Inf	-Inf	32.40	3	Horizontal	294	1.63	-
PK	2.4836G	64.29	74.00	-9.71	32.41	3	Horizontal	294	1.63	-
AV	2.4952G	48.75	54.00	-5.25	32.45	3	Horizontal	294	1.63	-

BT-LE(1Mbps)

2480MHz_TX

11/02/2019

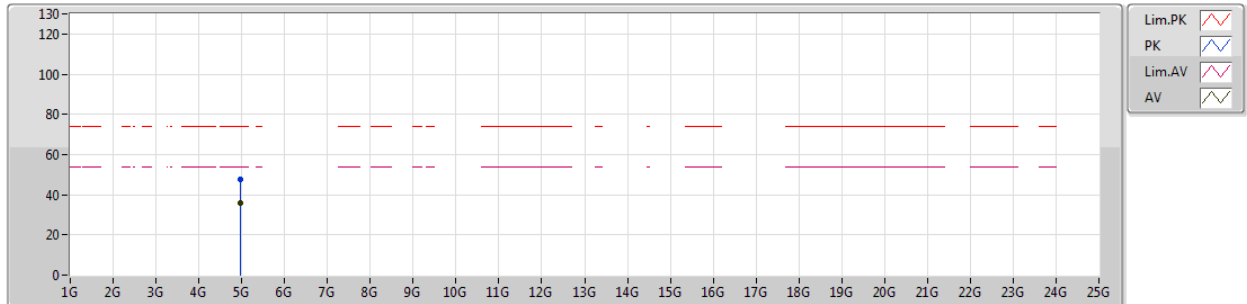


EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.96086G	47.36	74.00	-26.64	6.93	3	Vertical	120	1.65	-						
AV	4.95882G	35.77	54.00	-18.23	6.93	3	Vertical	120	1.65	-						

BT-LE(1Mbps)

2480MHz_TX

11/02/2019

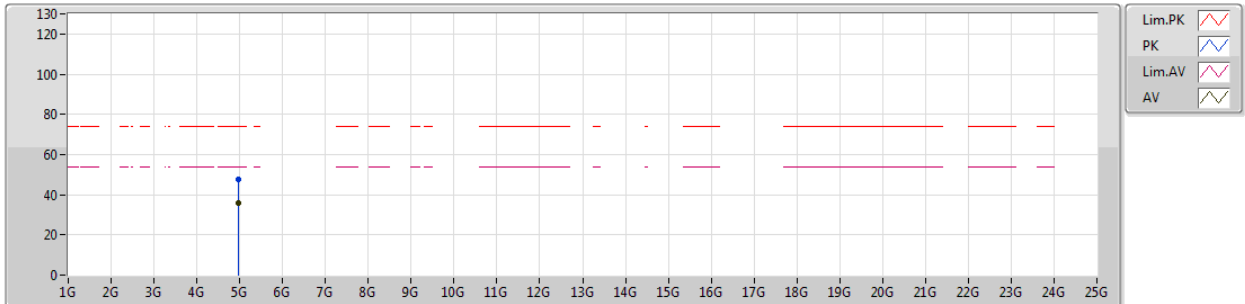

EUT Y_1TX
Setting Default
06-S-5
FSV

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.9588G	47.41	74.00	-26.59	6.93	3	Horizontal	71	1.35	-						
AV	4.9604G	36.01	54.00	-17.99	6.93	3	Horizontal	71	1.35	-						