

*FCC PART 15, SUBPART C
TEST REPORT*

for

AUDIO/VIDEO TRANSMITTER
Model: AVT900-3
FCC ID: QY4AVT9003A

Prepared for

APPLIED WIRELESS, INC.
1250 AVENIDA ACASO, UNIT F
CAMARILLO, CA 93012

Prepared by: _____

REYNALD O. RAMIREZ

Approved by: _____

RUBY A. HALL

COMPATIBLE ELECTRONICS INC.
2337 TROUTDALE DRIVE
AGOURA, CALIFORNIA 91301
(818) 597-0600

DATE: DECEMBER 12, 2006

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	17	2	2	2	13	19	55

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCRIPTION OF TEST CONFIGURATION	8
4.1 Description of Test Configuration - EMI	8
4.1.1 Photograph of Test Configuration – EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TEST PROCEDURES	13
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions Test	14
7.1.3 RF Emissions Test Results	15
7.1.4 Sample Calculations	16
7.1.5 Video Averaging	16
8. TEST PROCEDURE DEVIATIONS	17
9. CONCLUSIONS	17

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts and Photos • Test Setup Diagrams • Antenna and Preamplifier Gain Factors • Radiated and Conducted Emissions Photos
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Test Setup
2	Plot Map And Layout of Test Site

GENERAL REPORT SUMMARY

This electromagnetic emission report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form except in full, without the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Device Tested: Audio/Video Transmitter
Model: AVT900-3
S/N: None

Product Description: This is a "900 MHz" Audio/Video Transmitter designed to broadcast standard NTSC or PAL video signals and line level audio signals to an appropriate receiver over distances up to 750 feet.

Modifications: The EUT was not modified during the testing.

Manufacturer: Applied Wireless, Inc.
1250 Avenida Acaso, Unit F
Camarillo, CA 93012

Test Dates: Dec. 4 & 5, 2006

Test Specifications: EMI requirements
FCC CFR Title 47, Part 15 Subpart C
Test Procedure: ANSI C63.4: 2003.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Radiated RF Emissions, 9 kHz to 9230 MHz	Complies with the limits of FCC CFR Title 47, Part 15 Subpart C 15.205, 15.209 & 15.249, and the requirements of 15.31(e).
2	Conducted Emissions 150 KHz to 30 MHz	Complies with the limits of FCC CFR Title 47, Part 15 Subpart C 15.207.

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Audio/Video Transmitter Model: **AVT900-3**. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2003. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits and requirements defined in FCC CFR Title 47, Part 15 Subpart A (15.31e), Subpart B and Subpart C (15.205, 15.209 and 15.249).

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 2337 Troutdale Drive, Agoura, California 91301.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Applied Wireless, Inc.

Lee Fleishman	Director of Marketing
Mark Simon	V. P. of Engineering

Compatible Electronics Inc.

Reynald O. Ramirez	Sr. Test Engineer
Andre D. Khan	Test Technician
Ruby A. Hall	Lab Manager

2.4 Date Test Sample was Received

The test sample was received on Dec. 4, 2006.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC CFR Title 47, Part 15 Subpart A	FCC Rules – General
FCC CFR Title 47, Part 15 Subpart B	FCC Rules – Unintentional Radiators
FCC CFR Title 47, Part 15 Subpart C	FCC Rules – Intentional Radiators.
CISPR 16 1993	Specification for radio disturbance and immunity measuring apparatus and methods.
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

The EUT was set-up in a tabletop configuration with the attached antenna positioned vertically. Line level audio and composite video signals were connected to the respective RCA input jacks from the DVD Player which was placed on the ground plane below the turntable. The EUT was checked with the RCA cable option with separate DC input as well as the Round 6 pin plug cable assembly which incorporates the DC/Audio and Video connections. The movie “Serendipity” was playing on the DVD player. The EUT was transmitting to a remotely located receiver and DVD player setup. The video and audio was monitored through the remotely located setup throughout the test.

The highest emissions were found when the EUT was running in the above configuration with the RCA cable option and separate DC input. The final radiated and conducted data was taken in this mode of operation. All initial investigations were performed with the spectrum analyzer in manual mode scanning the frequency range continuously. The EUT was setup and tested as shown in the photographs in Appendix D.

4.1.1 Photograph of Test Configuration – EMI



4.1.1 Cable Construction and Termination

Cable 1 This is a 1.5 meter, unshielded, round cable that connects the DVD player (Audio and Video ports) to the EUT. The cable has an RCA connector at each end.

Note: The cable below was used to check the alternate mode of operation but cable 1 was used for the final test.

Cable 2 This is a 1.5 meter, PVC jacketed, round cable which connects the EUT (DC/Video/Audio port) to the DVD player. It has a round 6 pin plug Hirose P/N: RPC1-12P-6S at the EUT end and standard male Phono plugs at the opposite end.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER
1	AUDIO/VIDEO TRANSMITTER (EUT)	APPLIED WIRELESS, INC.	AVT900-3	S/N: NONE FCC ID: QY4AVT9003A
	POWER SUPPLY (EUT)	APPLIED WIRELESS, INC.	P/N: D35W090200-0211	S/N: 0215YW
2	DVD PLAYER	CYBER HOME	CH-DVD320ZS1	S/N: 375BB78003829

REMOTELY LOCATED EQUIPMENT

#	EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER
	RECEIVER	APPLIED WIRELESS, INC.	AVR900-3	S/N: NONE FCC ID: NONE
	DVD PLAYER	POLAROID	PDM-0742	S/N: D0601011970059076

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Spectrum Analyzer	Hewlett Packard	8566B	2729A04566	Jan. 10, 2006	Jan. 10, 2007
Quasi-Peak Adapter	Hewlett Packard	85650A	2521A00682	Jan. 10, 2006	Jan. 10, 2007
Preamplifier	Com Power	PA-103	1629	Nov. 15, 2006	Nov. 15, 2007
LISN	Com Power	LI-215	12037	Oct. 13, 2006	Oct. 13, 2007
LISN (Accessory)	Com Power	LI-115	02030	Oct. 13, 2006	Oct. 13, 2007
Transient Limiter	Com Power	HZ560	3549	Dec. 05, 2005	Dec. 05, 2006
Active Loop Antenna	Com Power	AL-130	17067	Aug. 01, 2006	Aug. 01, 2007
Biconical Antenna	Com Power	AB-900	2819	Dec. 29, 2005	Dec. 29, 2006
Log Periodic Antenna	Com Power	AL-100	01116	Dec. 28, 2005	Dec. 28, 2006
Horn Antenna	A. R. A.	DRG 118/A	1015	Jul. 26, 2006	Jul. 26, 2008
Microwave Amplifier	Com Power	PA-122	181915	Mar. 22, 2006	Mar. 22, 2007
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TTW-595	N/A	N/A	N/A
Computer	Hewlett Packard	Pavilion 4530	US91912022	N/A	N/A
Printer	Hewlett Packard	C6427B	MY066160TW	N/A	N/A
(Software) Radiated Emissions Transmitter Data Program	Compatible Electronics	DOC No: EMI_PART15 TX-B-0-50	Rev. A	N/A	N/A
Conducted Emissions Test Software	Compatible Electronics	SR21	N/A	N/A	N/A
Radiated Emissions Test Software	Compatible Electronics	Vcap1A	2.3	N/A	N/A
Harmonic Flicker Meter	Hewlett Packard	6842A	3531A00180	Mar. 03, 2006	Mar. 03, 2007

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1.2 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The Spectrum Analyzer was used as a measuring meter along with the quasi-peak adapter. The data was collected with the Spectrum Analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the Spectrum Analyzer input stage, and the Spectrum Analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the Spectrum Analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2003. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.15 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the computer in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The test data is located in Appendix E.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and Subpart C, section 15.207 for conducted emissions.

7.1.2 Radiated Emissions Test

The spectrum analyzer was used as a measuring meter along with a quasi-peak adapter. A Preamplifier was used to increase the sensitivity of the instrument. The Spectrum Analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. This final reading is then recorded into the a Computer data recording program, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The quasi-peak measurement was used only for those readings, which are marked accordingly on the data sheets. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured (200 Hz for 10kHz-150kHz, 9 kHz for 0.150kHz-30MHz, 120 kHz for 30-1000MHz and 1 MHz for 1000 MHz and above).

Broadband loop, biconical, log periodic and horn antennas were used as transducers during the measurement. The loop antenna was used from 10 kHz to 30 MHz, the biconical antenna was used from 30 MHz to 300 MHz, the log periodic antenna was used from 300 MHz to 1 GHz and the horn antenna was used above 1 GHz. The final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a test distance of 3 meters to obtain final test data. The test data is located in Appendix E.

Preliminary Testing and Monitoring:

Preliminary testing was done at a distance of 1 meter instead of 3 meters to determine the predominant harmonics and spurious emission frequencies. An open field test site was used for the preliminary investigations. Broadband antennas were used to scan large frequency bands while manipulating the X, Y and Z azimuth of the unit. All significant frequencies were further examined carefully at a frequency span on the spectrum analyzer while changing the antenna height and EUT orientation. The EUT was tested again at a test distance of 3 meters to obtain the final test data. The bandwidth of the spectrum analyzer was varied to ensure that pulse desensitization did not occur.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.249.

7.1.3 RF Emissions Test Results

The fundamental and up to the 10th harmonic emissions are within the specifications.

RADIATED EMISSIONS – SPURIOUS

The Frequency Band from 9 kHz to 1 GHz was specifically scanned. Please see data in Appendix E.

RADIATED EMISSION – BAND EDGE 15.249 (d)

The emission radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emissions limits in subsection 15.209, whichever is the lesser attenuation. See Appendix E for the plots.

7.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. For greater efficiency and convenience, instead of using these correction factors for each meter reading, the specification limit was modified to reflect these correction factors at each frequency, so that the meter readings can be compared directly to the modified specification limit, referred to henceforth as the corrected meter reading limit (CML).

The equation can be derived in the following manner:

Specification limit ($\mu\text{V}/\text{m}$) $\log \times 20$ = Specification Limit in dBuV

(Specification distance / test distance) $\log \times 40$ = distance factor

(Specification Limit dBuV + distance factor) + Antenna factor – effective gain = Corrected Meter Limit

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss. At lower frequencies the cable loss is negligible.

OR

Corrected Meter Reading = meter reading + F – A + C

where: F = antenna factor
A = amplifier gain
C = cable loss

Therefore, the equation for determining the corrected meter reading is:

CMR = spec. limit - F - A + C

A table of corrected meter reading limits was used to permit immediate comparison of the meter reading and determine if the emission level exceeded the specification limit at that frequency. The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

7.1.5 Video Averaging

Video averaging was achieved manually for frequencies above 1 GHz. The Quasi-Peak detector on the spectrum analyzer was set to “Bypass”. The frequency span on the spectrum analyzer was reduced to 100 kHz. The signal was measured in a linear scale after narrowing the video filter to 10 Hz and setting the sweep time to Auto in order to keep the amplitude reading calibrated.

8. TEST PROCEDURE DEVIATIONS

There were no deviations from the test procedures.

9. CONCLUSIONS

The Audio/Video Transmitter Model: **AVT900-3** meets all of the requirements of the FCC CFR, Title 47, Part 15, Subpart A, B and C (15.205, 15.207, 15.209, 15.31e and 15.249).

APPENDIX A

LABORATORY ACCREDITATIONS

LABORATORY ACCREDITATIONS AND RECOGNITIONS

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP CODES 200063-0,
200528-0, 200527-0

Silverado/Lake Forest Division: <http://ts.nist.gov/ts/htdocs/210/214/scopes/2005270.htm>
Brea Division: <http://ts.nist.gov/ts/htdocs/210/214/scopes/2005280.htm>
Agoura Division: <http://ts.nist.gov/ts/htdocs/210/214/scopes/2000630.htm>



Compatible Electronics has been accredited by ANSI and appointed by the FCC to serve as a Telecommunications Certification Body (TCB). Compatible Electronics ANSI TCB listing can be found at: http://www.ansi.org/public/ca/ansi_cp.html



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA). Compatible Electronics NIST US/EU CAB listing can be found at: <http://ts.nist.gov/ts/htdocs/210/gsig/emc-cabs-mar02.pdf>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA). Compatible Electronics NIST US/APEC CAB listing can be found at: <http://ts.nist.gov/ts/htdocs/210/gsig/apec/bsmi-cabs-may02.pdf>



Compatible Electronics has been validated by NEMKO against ISO/IEC 17025 under the NEMKO EMC Laboratory Authorization (ELA) program to all EN standards required by the European Union (EU) EMC Directive 89/336/EEC. Please follow the link to the Compatible Electronics' web site for each of our facilities NEMKO ELA certificate and scope of accreditation. <http://www.celectronics.com/certs.htm>

We are also certified/listed for IT products by the following country/agency:



Compatible Electronics VCCI listing can be found at:
http://www.vcci.or.jp/vcci_e/member/tekigo/setsubi_index_id.html

Just type "Compatible Electronics" into the Keyword search box.

Compatible Electronics FCC listing can be found at:
https://gulfoss2.fcc.gov/prod/oet/index_ie.html

Just type "Compatible Electronics" into the Test Firms search box.



Compatible Electronics IC listing can be found at:
http://spectrum.ic.gc.ca/~cert/labs/oats_lab_c_e.html

APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

There were no modifications made to the EUT during the test.

APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

AUDIO/VIDEO TRANSMITTER
Model: AVT900-3

There were no additional models covered under this report.

APPENDIX D

DIAGRAMS, CHARTS AND PHOTOS

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP
(LAB F)**


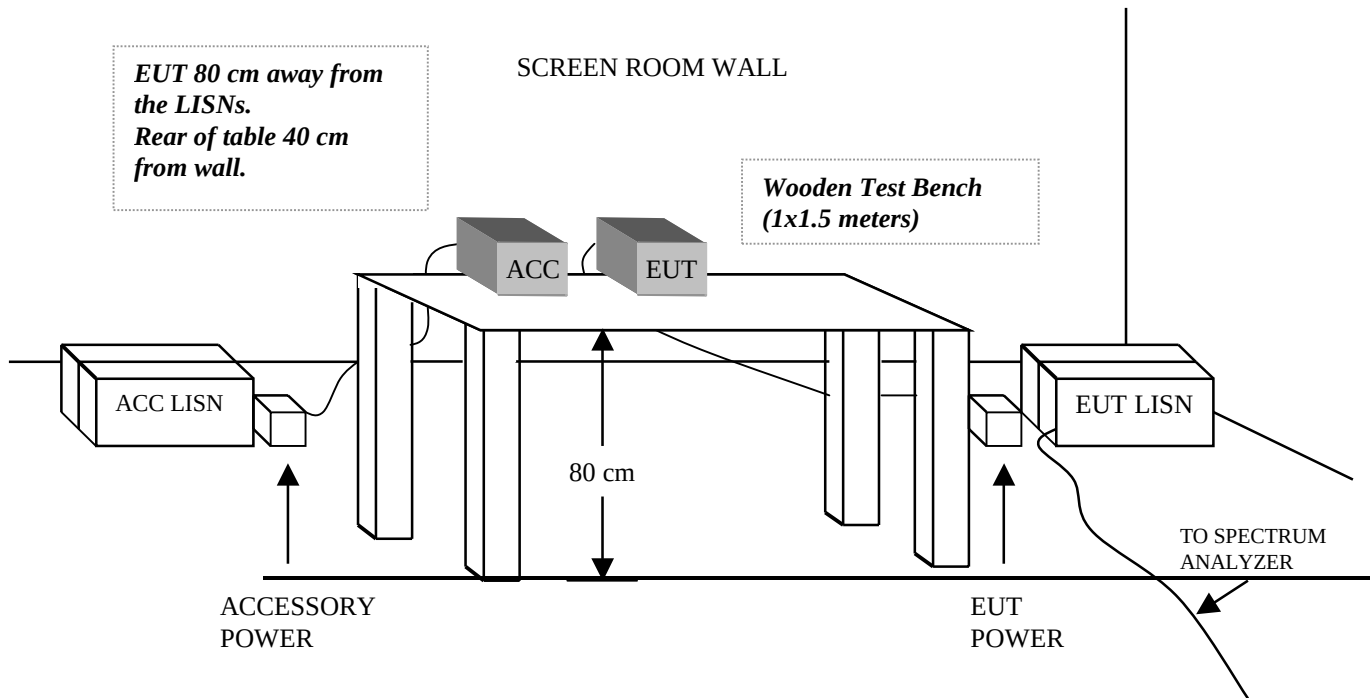


FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

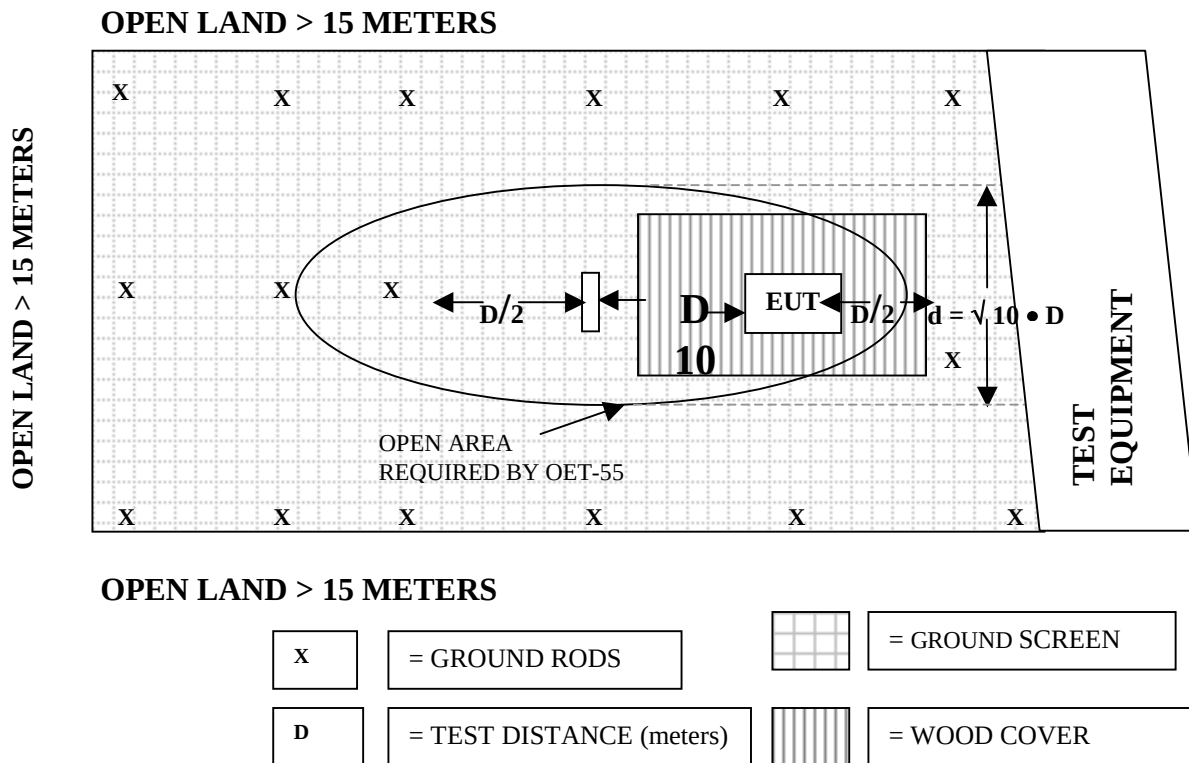

COM-POWER AL-130

ACTIVE LOOP ANTENNA

S/N: 17067

CALIBRATION DATE: AUGUST 1, 2006

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
0.009	11.8	1	11.0
0.01	11.2	2	11.4
0.02	10.5	3	11.2
0.03	12.2	4	11.1
0.04	11.6	5	11.7
0.05	10.3	6	11.7
0.06	10.7	7	11.3
0.07	10.5	8	11.3
0.08	10.4	9	11.6
0.09	10.7	10	11.3
0.1	10.7	15	10.2
0.2	7.9	20	10.4
0.3	10.4	25	9.8
0.4	10.4	30	10.4
0.5	10.4		
0.6	11.0		
0.7	10.8		
0.8	10.6		
0.9	10.7		

COM-POWER AB-900
BICONICAL ANTENNA

S/N: 2819

CALIBRATION DATE: DEC. 29, 2005

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	11.51	120	13.31
35	10.59	125	13.59
40	10.46	140	11.58
45	11.77	150	11.87
50	11.64	160	12.61
55	10.86	175	14.79
60	9.88	180	15.92
65	8.71	200	16.81
70	7.67	225	14.51
80	6.21	250	15.21
90	8.38	275	19.08
100	10.71	300	19.54

COM-POWER AL-100
LOG PERIODIC ANTENNA

S/N: 01116

CALIBRATION DATE: DEC. 28, 2005

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	14.80	650	17.37
330	19.70	700	19.33
340	15.03	725	19.22
350	16.47	750	22.96
360	15.12	800	20.17
370	14.65	850	21.91
400	13.75	900	22.02
425	15.51	925	22.67
450	15.54	950	23.38
500	17.20	975	23.45
550	15.28	1000	23.58
600	18.12		

COM-POWER PA-103**PREAMPLIFIER****S/N: 1629****CALIBRATION DATE: NOV. 15, 2006**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	30.8	300	30.1
40	31.0	350	29.9
50	30.7	400	30.6
60	30.5	450	28.9
70	30.1	500	30.4
80	30.9	550	29.4
90	30.4	600	29.5
100	30.6	650	28.7
125	29.9	700	28.3
150	30.5	750	27.3
175	30.2	800	27.7
200	29.9	850	27.0
225	29.7	900	27.1
250	30.4	950	26.1
275	30.0	1000	28.0

COM-POWER PA-122**PREAMPLIFIER****S/N: 181915****CALIBRATION DATE: MARCH 22, 2006**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	31.9	7000	27.5
1100	31.7	7500	29.1
1200	31.5	8000	29.6
1300	31.5	8500	28.6
1400	31.3	9000	25.2
1500	31.5	9500	28.8
1600	31.1	10000	25.6
1700	31.3	11000	21.7
1800	31.3	12000	28.2
1900	31.7	13000	27.2
2000	31.0	14000	27.2
2500	30.6	15000	25.3
3000	30.8	16000	23.3
3500	31.1	17000	24.4
4000	29.3	18000	28.5
4500	30.8		
5000	30.2		
5500	30.4		
6000	29.1		
6500	28.6		

DRG-118/A

DOUBLE RIDGE HORN ANTENNA

S/N: 1015

CALIBRATION DATE: JULY 26, 2006

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	24.6	10000	39.2
1500	25.4	10500	40.2
2000	27.9	11000	39.4
2500	28.6	11500	40.0
3000	30.1	12000	40.7
3500	30.7	12500	40.6
4000	30.8	13000	40.0
4500	31.6	13500	41.1
5000	33.5	14000	42.7
5500	33.6	14500	43.1
6000	34.1	15000	41.9
6500	35.1	15500	38.8
7000	37.4	16000	39.6
7500	39.5	16500	39.0
8000	38.2	17000	41.6
8500	37.5	17500	43.5
9000	38.0	18000	45.5
9500	38.6		



FRONT VIEW

APPLIED WIRELESS, INC.
AUDIO/VIDEO TRANSMITTER
Model: AVT900-3

FCC PART 15 SUBPART C - RADIATED EMISSIONS – 12-4-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

APPLIED WIRELESS, INC.
AUDIO/VIDEO TRANSMITTER
Model: AVT900-3

FCC PART 15 SUBPART C - RADIATED EMISSIONS – 12-4-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



FRONT VIEW

APPLIED WIRELESS, INC.
AUDIO/VIDEO TRANSMITTER

Model: AVT900-3

FCC PART 15 SUBPART C - CONDUCTED EMISSIONS – 12-4-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

APPLIED WIRELESS, INC.
AUDIO/VIDEO TRANSMITTER
Model: AVT900-3

FCC PART 15 SUBPART C - CONDUCTED EMISSIONS – 12-4-06

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

APPENDIX E

DATA SHEETS

COMPATIBLE ELECTRONICS

Test Location	: Compatible Electronics	Page	: 1/1
Customer	: Mark Simon	Date	: 12/04/2006
Manufacturer	: Applied Wireless, Inc.	Time	: 02:29:23 PM
Eut name	: 900 MHz Audio/Video Transmitter	Lab	: F
Model	: AVT900-3	Test Distance	: 3.00 Meters
Serial #	: N/A		
Specification	: FCC Pt. 15- Class B		
Distance correction factor (20 * log(test/spec))			: 0.00
Test Mode	: Clocks: 4, 10MHz		

A. KHAN

Pol	Freq MHz	Reading dBuV	Cable loss dB	Antenna factor dB	Amplifier gain dB	Corr'd rdg = R dBuV/m	Limit = L dBuV/m	Delta R-L dB
1V	36.012	45.90	2.26	10.56	30.93	27.80	40.00	-12.20
2V	56.012	54.20	2.52	10.65	30.58	36.80	40.00	-3.20
3V	72.012	49.90	2.74	7.36	30.27	29.73	40.00	-10.27
4V	88.012	50.40	2.98	7.97	30.49	30.85	43.50	-12.65
5V	100.058	48.20	3.10	10.72	30.60	31.42	43.50	-12.08
6V	112.058	39.20	3.15	12.33	30.24	24.44	43.50	-19.06
7V	144.058	41.70	3.28	11.70	30.37	26.31	43.50	-17.19
8V	216.058	38.20	3.93	15.30	29.77	27.67	46.00	-18.33
9V	220.058	38.10	3.92	14.94	29.74	27.22	46.00	-18.78
10V	230.058	34.40	4.07	14.66	29.85	23.28	46.00	-22.72
11H	36.058	42.40	2.26	10.56	30.93	24.30	40.00	-15.70
12H	40.058	45.20	2.30	10.48	31.00	26.98	40.00	-13.02
13H	50.058	37.90	2.40	11.63	30.70	21.23	40.00	-18.77
14H	56.058	42.40	2.53	10.65	30.57	25.00	40.00	-15.00
15H	70.058	40.80	2.70	7.66	30.10	21.06	40.00	-18.94
16H	72.058	45.00	2.74	7.35	30.27	24.82	40.00	-15.18
17H	80.058	45.20	2.90	6.22	30.90	23.43	40.00	-16.57
18H	88.058	50.00	2.98	7.98	30.49	30.47	43.50	-13.03
19H	100.058	45.10	3.10	10.72	30.60	28.32	43.50	-15.18
20H	112.058	41.20	3.15	12.33	30.24	26.44	43.50	-17.06
21H	144.058	42.30	3.28	11.70	30.37	26.91	43.50	-16.59
22H	216.058	39.80	3.93	15.30	29.77	29.27	46.00	-16.73
23H	220.058	34.90	3.92	14.94	29.74	24.02	46.00	-21.98
24H	230.058	36.80	4.07	14.66	29.85	25.68	46.00	-20.32
25V	300.058	38.20	4.60	14.81	30.10	27.51	46.00	-18.49
26V	360.058	34.60	4.91	15.12	30.05	24.57	46.00	-21.43
27V	400.058	36.10	5.30	13.75	30.60	24.56	46.00	-21.44
28V	450.058	34.50	6.00	15.54	28.90	27.14	46.00	-18.86
29V	539.982	50.40	5.50	15.65	29.59	41.95	46.00	-4.05
30H	300.000	48.40	4.60	14.80	30.10	37.70	46.00	-8.30
31H	360.006	38.50	4.91	15.12	30.05	28.48	46.00	-17.52
32H	399.994	42.50	5.30	13.75	30.60	30.95	46.00	-15.05
33H	449.994	38.40	6.00	15.54	28.90	31.04	46.00	-14.96
34H	539.967	49.60	5.50	15.65	29.59	41.15	46.00	-4.85

The EUT was tested to 1 GHz.

**COMPATIBLE
ELECTRONICS**

12/04/2006 16:14:35

FCC Conducted Emissions
Applied Wireless, Inc.
Audio / Video Tx
AVT900-3
Line 120V
Line LI-215 Due 10-13-07
TEST ENGINEER : A. KHAN


6 highest peaks above -50.00 dB of New FCC Class B (Avg) limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.826	37.09	46.00	-8.91
2	0.595	36.29	46.00	-9.71
3	0.624	36.29	46.00	-9.71
4	0.679	36.29	46.00	-9.71
5	2.948	36.15	46.00	-9.85
6	0.929	36.08	46.00	-9.92

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak**

12/04/2006 16:14:35

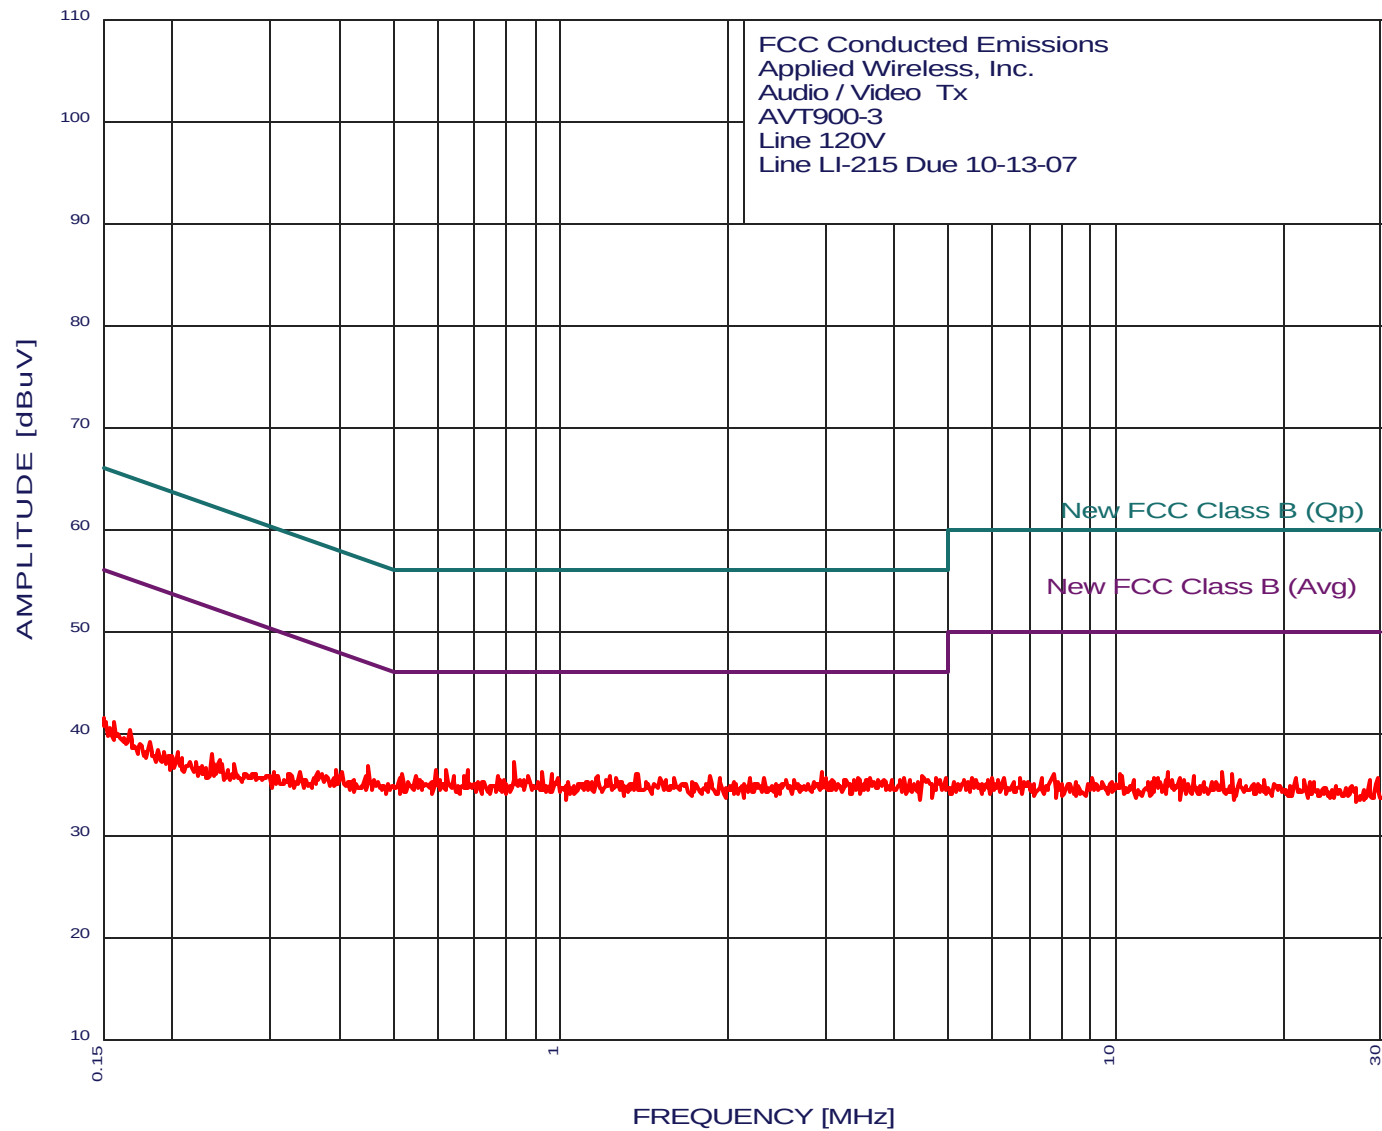

COMPATIBLE
ELECTRONICS

**COMPATIBLE
ELECTRONICS**

12/04/2006 16:19:15

FCC Conducted Emissions
Applied Wireless, Inc.
Audio / Video Tx
AVT900-3
Neutral 120V
Neut LI-215 Due 10-13-07
TEST ENGINEER : A. KHAN


6 highest peaks above -50.00 dB of New FCC Class B (Avg) limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.934	36.76	46.00	-9.24
2	1.000	36.66	46.00	-9.34
3	1.100	36.36	46.00	-9.64
4	2.322	36.34	46.00	-9.66
5	0.589	36.27	46.00	-9.73
6	0.844	36.17	46.00	-9.83

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak**

12/04/2006 16:19:15

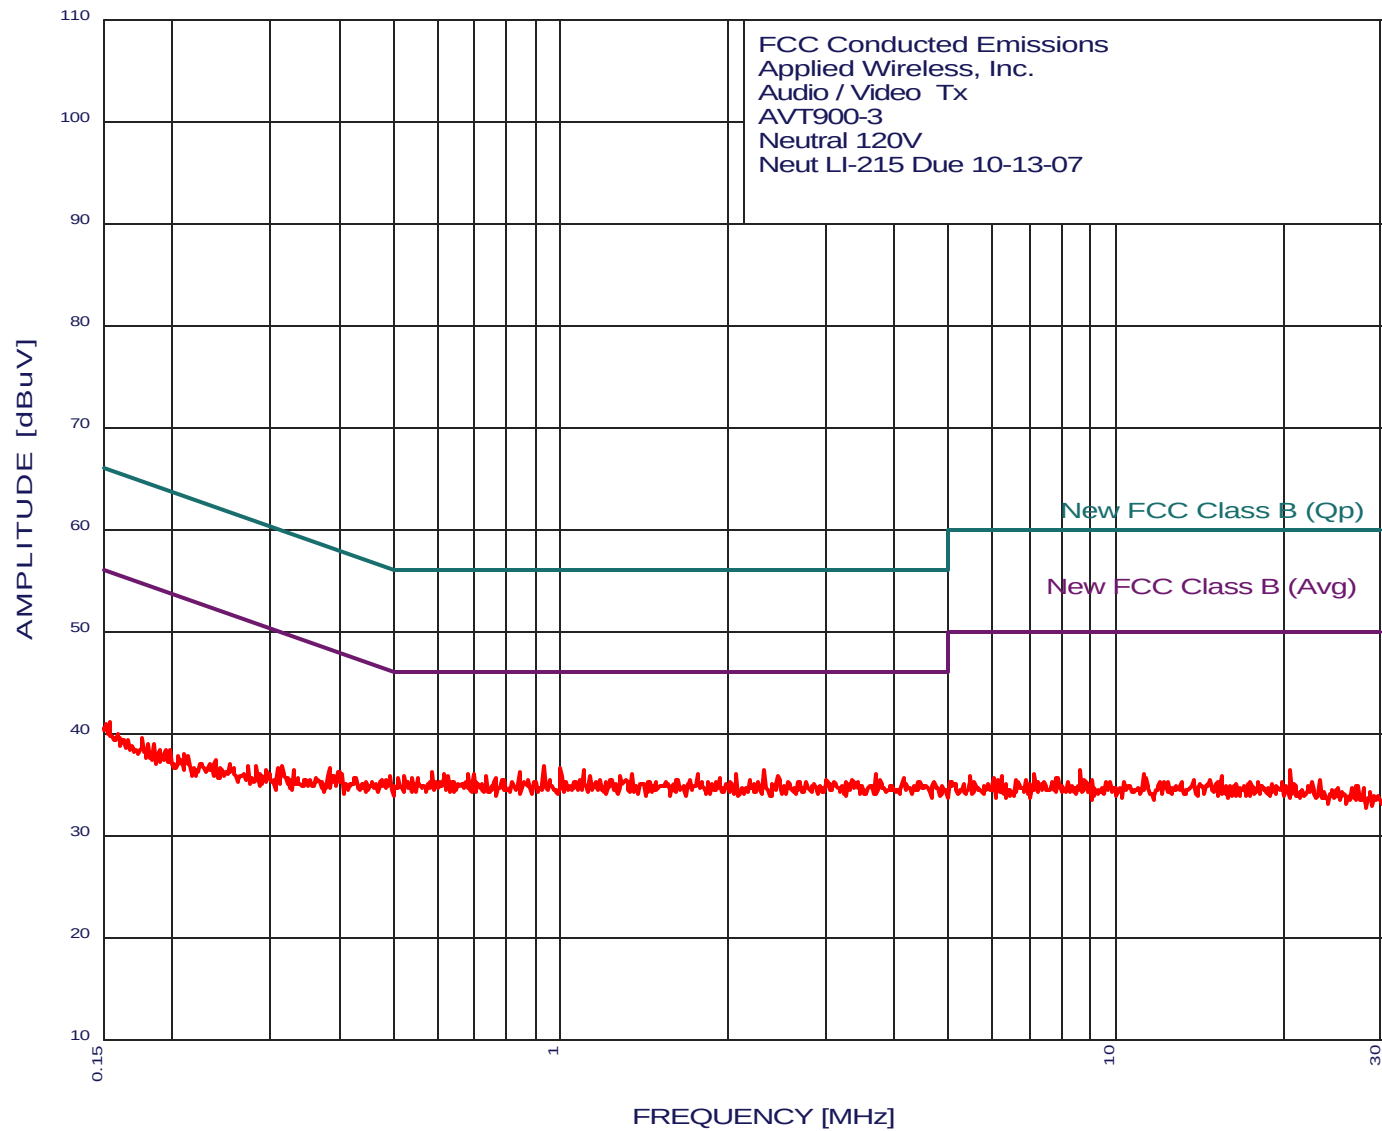

COMPATIBLE
ELECTRONICS

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
907.0000	62.0	59.9 QP	H	2.0	160			22.2	7.9	0.0	0.0	0.0	90.0	-4.0	94.0	
										0.0						
										0.0						
907.0000	65.5	53.8 QP	V	1.0	180			22.2	7.9	0.0	0.0	0.0	83.9	-10.1	94.0	
										0.0						
										0.0						
915.0000	61.2	60.6 QP	H	2.5	140			22.4	7.9	0.0	0.0	0.0	90.9	-3.1	94.0	
										0.0						
										0.0						
915.0000	66.5	60.3 QP	V	1.0	120			22.4	7.9	0.0	0.0	0.0	90.6	-3.4	94.0	
										0.0						
										0.0						
923.0000	63.2	61.6 QP	H	2.0	140			22.6	7.9	0.0	0.0	0.0	92.1	-1.9	94.0	
										0.0						
										0.0						
923.0000	68.3	56.4 QP	V	1.0	180			22.6	7.9	0.0	0.0	0.0	86.9	-7.1	94.0	
										0.0						
										0.0						

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 1 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
1814.0000	48.7	A	H	2.5	90			27.0	5.2	31.4	0.0	0.0	49.5	-4.5	54.0	
1814.0000	56.1	50.4 A	V	1.0	180			27.0	5.2	31.4	0.0	0.0	51.2	-2.8	54.0	
1830.0000	46.8	A	H	2.5	180			27.1	5.3	31.4	0.0	0.0	47.7	-6.3	54.0	
1830.0000	54.2	52.5 A	V	1.0	0			27.1	5.3	31.4	0.0	0.0	53.4	-0.6	54.0	
1846.0000	46.5	A	H	2.0	90			27.1	5.3	31.5	0.0	0.0	47.4	-6.6	54.0	
1846.0000	53.6	42.3 A	V	1.0	180			27.1	5.3	31.5	0.0	0.0	43.2	-10.8	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 2 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2721.0000	43.2	A	H	2.5	120			29.3	5.6	30.7	0.0	0.0	47.4	-6.6	54.0	
2721.0000	43.1	A	V	1.0	90			29.3	5.6	30.7	0.0	0.0	47.3	-6.7	54.0	
2745.0000	43.0	A	H	3.0	90			29.3	5.6	30.7	0.0	0.0	47.2	-6.8	54.0	
2745.0000	42.7	A	V	2.5	0			29.3	5.6	30.7	0.0	0.0	46.9	-7.1	54.0	
2769.0000	44.6	A	H	2.5	180			29.4	5.8	30.7	0.0	0.0	49.1	-4.9	54.0	
2769.0000	43.7	A	V	2.0	90			29.4	5.8	30.7	0.0	0.0	48.2	-5.8	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 3 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
3628.0000	42.0	38.4 A	H	2.0	0			30.7	9.0	30.6	0.0	0.0	47.5	-6.5	54.0	
3628.0000	43.7	39.6 A	V	1.0	90			30.7	9.0	30.6	0.0	0.0	48.7	-5.3	54.0	
3660.0000	41.9	36.3 A	H	2.5	270			30.7	8.9	30.5	0.0	0.0	45.5	-8.5	54.0	
3660.0000	42.7	38.4 A	V	1.5	100			30.7	8.9	30.5	0.0	0.0	47.6	-6.4	54.0	
3692.0000	42.0	36.6 A	H	2.0	180			30.7	8.9	30.4	0.0	0.0	45.8	-8.2	54.0	
3692.0000	41.4	A	V	1.0	45			30.7	8.9	30.4	0.0	0.0	50.6	-3.4	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 4 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
4535.0000	41.9	36.8 A	H	2.0	180			31.7	9.4	30.8	0.0	0.0	47.2	-6.8	54.0	
4535.0000	39.9	A	V	1.0	0			31.7	9.4	30.8	0.0	0.0	50.3	-3.7	54.0	
4575.0000		A	H					31.9	9.4	30.7	0.0				54.0	
	42.4	35.5		1.5	45											
4575.0000	41.3	35.9 A	V	1.0	0			31.9	9.4	30.7	0.0	0.0	46.5	-7.5	54.0	
4615.0000	42.0	36.5 A	H	2.5	180			32.0	9.4	30.7	0.0	0.0	47.3	-6.7	54.0	
4615.0000	40.1	A	V	1.0	90			32.0	9.4	30.7	0.0	0.0	50.9	-3.1	54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 5 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
5442.0000		A	H					33.6	9.3	30.4	0.0				54.0	No Reading found
5442.0000		A	V					33.6	9.3	30.4	0.0				54.0	
5490.0000		A	H					33.6	8.8	30.4	0.0				54.0	
																no reading found
5490.0000		A	V					33.6	8.8	30.4	0.0				54.0	
5538.0000		A	H					33.6	8.8	30.3	0.0				54.0	no reading found
5538.0000		A	V					33.6	8.8	30.3	0.0				54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 6 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
6349.0000		A	H					29.9	11.5	28.8	0.0				54.0	no reading found
6349.0000		A	V					29.9	11.5	28.8	0.0				54.0	
6405.0000		A	H					30.0	11.9	28.7	0.0				54.0	
																no reading found
6405.0000		A	V					30.0	11.9	28.7	0.0				54.0	
6461.0000		A	H					30.0	12.4	28.6	0.0				54.0	no reading found
6461.0000		A	V					30.0	12.4	28.6	0.0				54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 7 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
7256.0000		A	H					30.0	12.2	28.3	0.0				54.0	no reading found
7256.0000		A	V					30.0	12.2	28.3	0.0				54.0	
7320.0000		A	H					30.0	12.3	28.5	0.0				54.0	no reading found
7320.0000		A	V					30.0	12.3	28.5	0.0				54.0	
7384.0000		A	H					30.0	12.4	28.7	0.0				54.0	no reading found
7384.0000		A	V					30.0	12.4	28.7	0.0				54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 8 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
8163.0000		A	H					29.9	18.3	29.3	0.0				54.0	no reading found
8163.0000		A	V					29.9	18.3	29.3	0.0				54.0	
8235.0000		A	H					33.5	18.8	29.1	0.0				54.0	no reading found
8235.0000		A	V					33.5	18.8	29.1	0.0				54.0	
8307.0000		A	H					33.5	20.9	29.0	0.0				54.0	no reading found
8307.0000		A	V					33.5	20.9	29.0	0.0				54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 9 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.249)

COMPANY	Applied Wireless	DATE	12/4/2006
EUT	Transmitter	DUTY CYCLE	N/A %
MODEL	AVT900-3	PEAK TO AVG	N/A dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	A. KHAN	LAB	F

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
9070.0000		A	H					33.6	13.9	25.7	0.0				54.0	no reading found
9070.0000		A	V					33.6	13.9	25.7	0.0				54.0	
																no reading found
9150.0000		A	H					33.6	14.4	26.3	0.0				54.0	
9150.0000		A	V					33.6	14.4	26.3	0.0				54.0	
9230.0000		A	H					33.6	14.9	26.9	0.0				54.0	no reading found
9230.0000		A	V					33.6	14.9	26.9	0.0				54.0	

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 10 of PAGE 10

COMPATIBLE ELECTRONICS


Test Location : Compatible Electronics
Customer : Mark Simon
Manufacturer : Applied Wireless, Inc.
Eut name : 900 MHz Audio/Video Transmitter
Model : AVT900-3
Serial # : N/A
Specification : FCC Pt. 15- Class B
Distance correction factor ($20 * \log(\text{test}/\text{spec})$)
Test Mode : Clocks: 4, 10MHz

Page : 1/1
Date : 12/05/2006
Time : 12:39:33 PM
Lab : F
Test Distance : 3.00 Meters

A. KHAN


Pol	Freq MHz	Reading dBuV	Cable loss dB	Antenna factor dB	Amplifier gain dB	Corr'd rdg = R dBuV/m	Limit = L dBuV/m	Delta R-L dB
1V	902.054	35.60	7.90	22.07	27.06	38.51	46.00	-7.49
2V	928.088	35.30	7.84	22.76	26.53	39.37	46.00	-6.63

BAND EDGE PLOTS

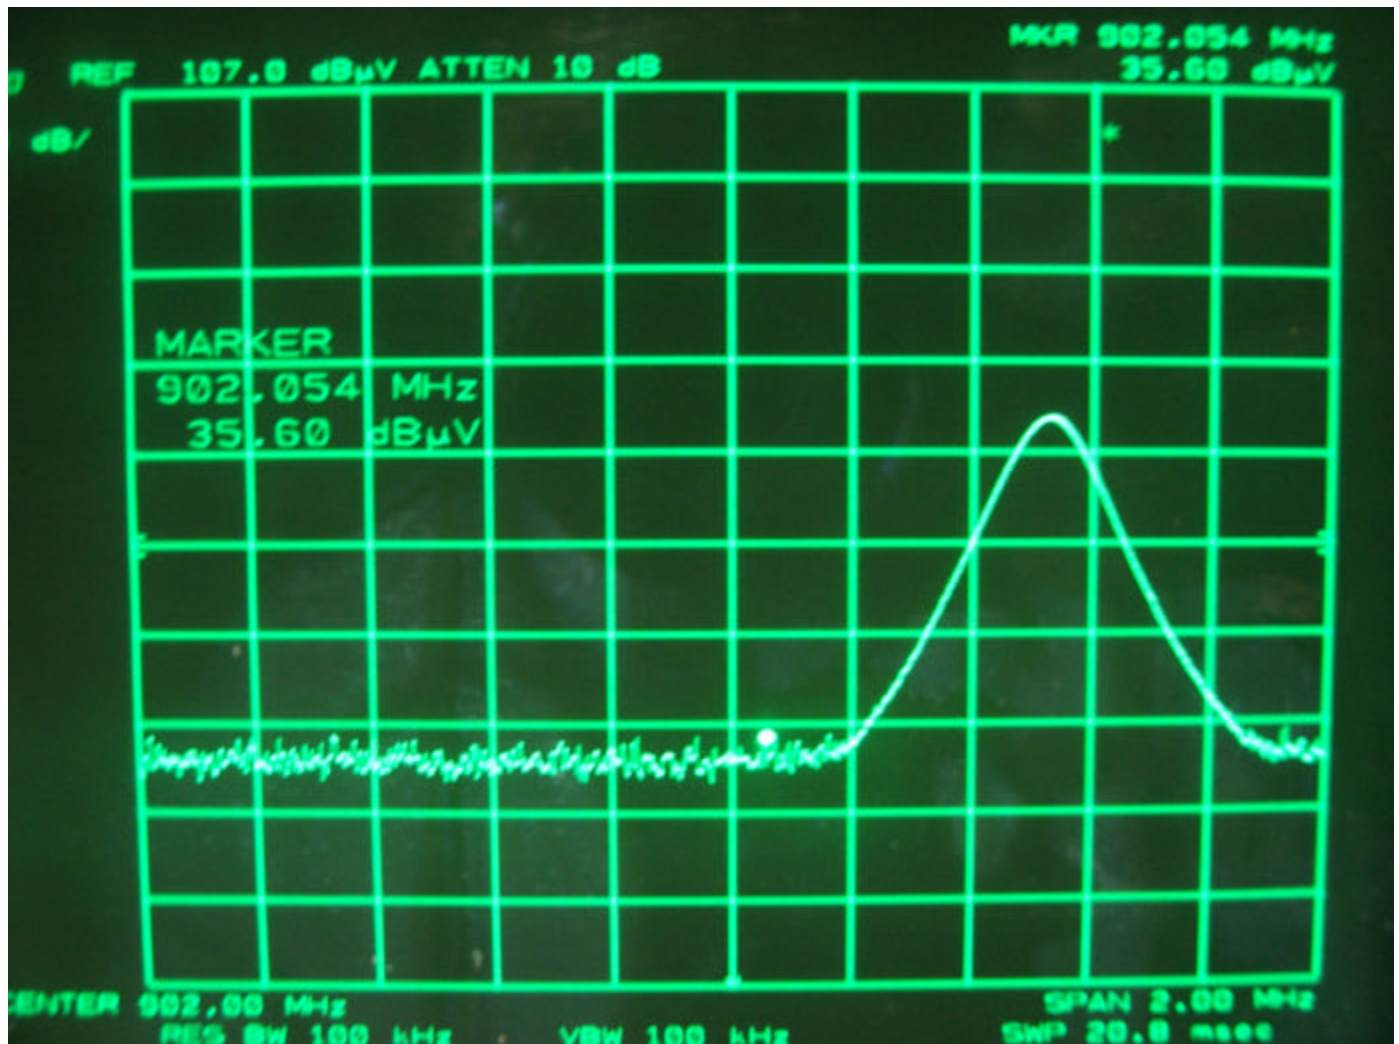

FCC ID: QY4AVT9003A

Band Edge 902 MHz
TX set at low frequency

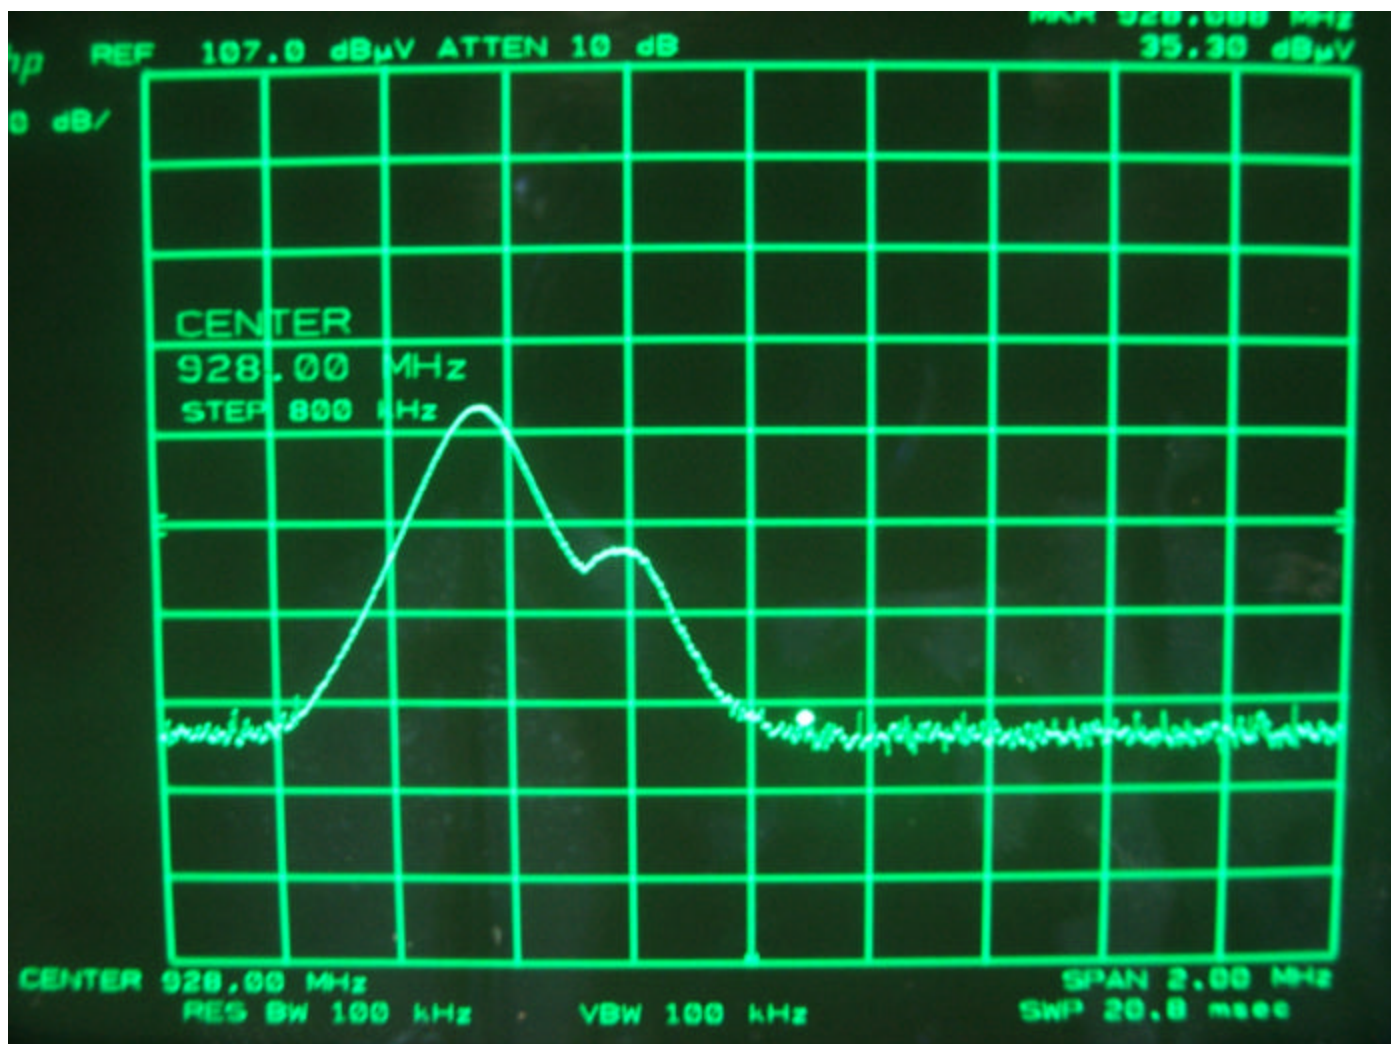

FCC ID: QY4AVT9003A

Band Edge 928 MHz
TX set to high frequency