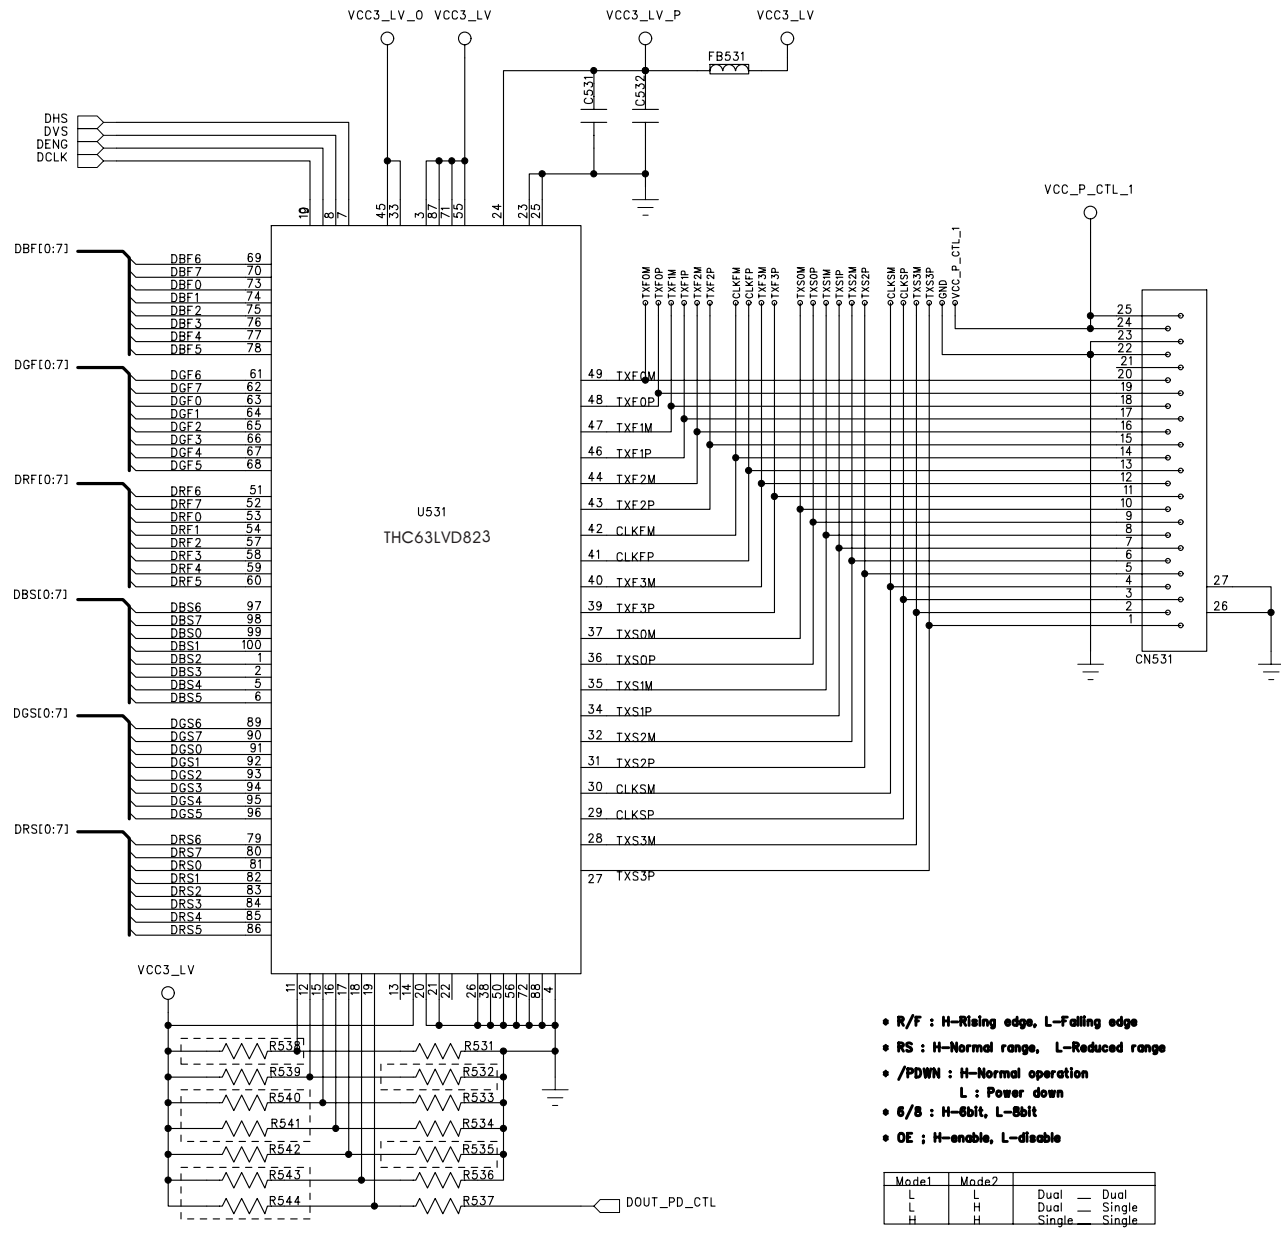


- R/F : H-Rising edge, L-Falling edge
- RS : H-Normal range, L-Reduced range
- /PDWN : H-Normal operation
L : Power down
- 6/S : H-6bit, L-8bit
- OE : H-enable, L-disable

Mode1	Mode2	Dual	Dual
L	L	Dual	Dual
L	H	Dual	Single
H	H	Single	Single

1

2

3

4

5

6

D

D

C

C

B

B

A

A

VCC_P_CTL VCC_P_CTL_1

DENG
DVS
DCLK

FB502

CN501

DHS

DRF[0:7]

DGF[0:7]

DBF[0:7]

DRF1
DRF2
DRF3
DRF4
DRF5
DRF6
DRF7
DGF1
DGF2
DGF3
DGF4
DGF5
DGF6
DGF7
DBF1
DBF2
DBF3
DBF4
DBF5
DBF6
DBF7

DRF0
DRF3
DRF5
DRF7
DGF0
DGF3
DGF5
DGF7
DBF0
DBF3
DBF5
DBF7

DRF[0:7]

DGF[0:7]

DBF[0:7]

DOUT_PD_CTL

for TTL output

DRS[0:7]

DGS[0:7]

DBS[0:7]

DRS1
DRS3
DRS6
DGS1
DGS3
DGS6
DBS1
DBS3
DBS6

CN502

DRS[0:7]

DGS[0:7]



DBS[0:7]

VCC3


FB501

C502

DOUT_PD_CTL

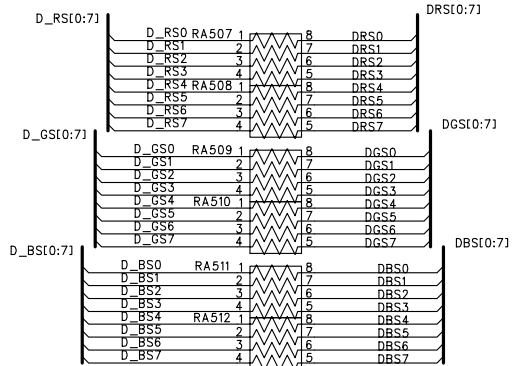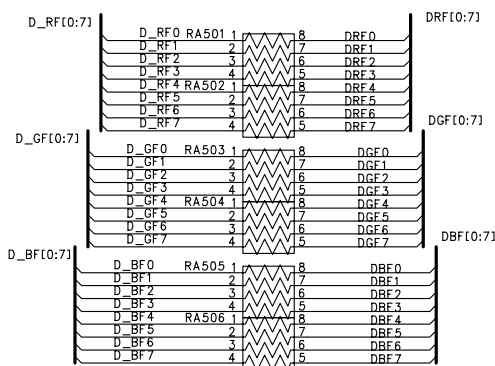

LG.SS 17" OPTION

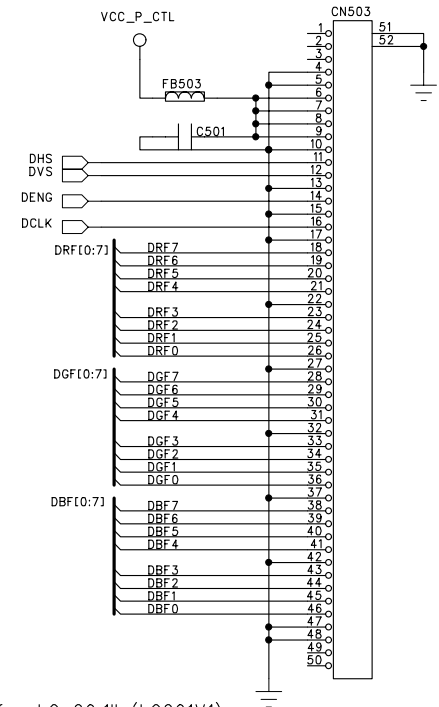



for LG 20.1" (LC201V1)



ESTO

Easy and Simple Technology

Project:	CALLA-JR	Rev:	1.3
Title:	TTL PANEL INTERFACE		
Date:	FEB. 5, 2001	Sheet:	07 of 11

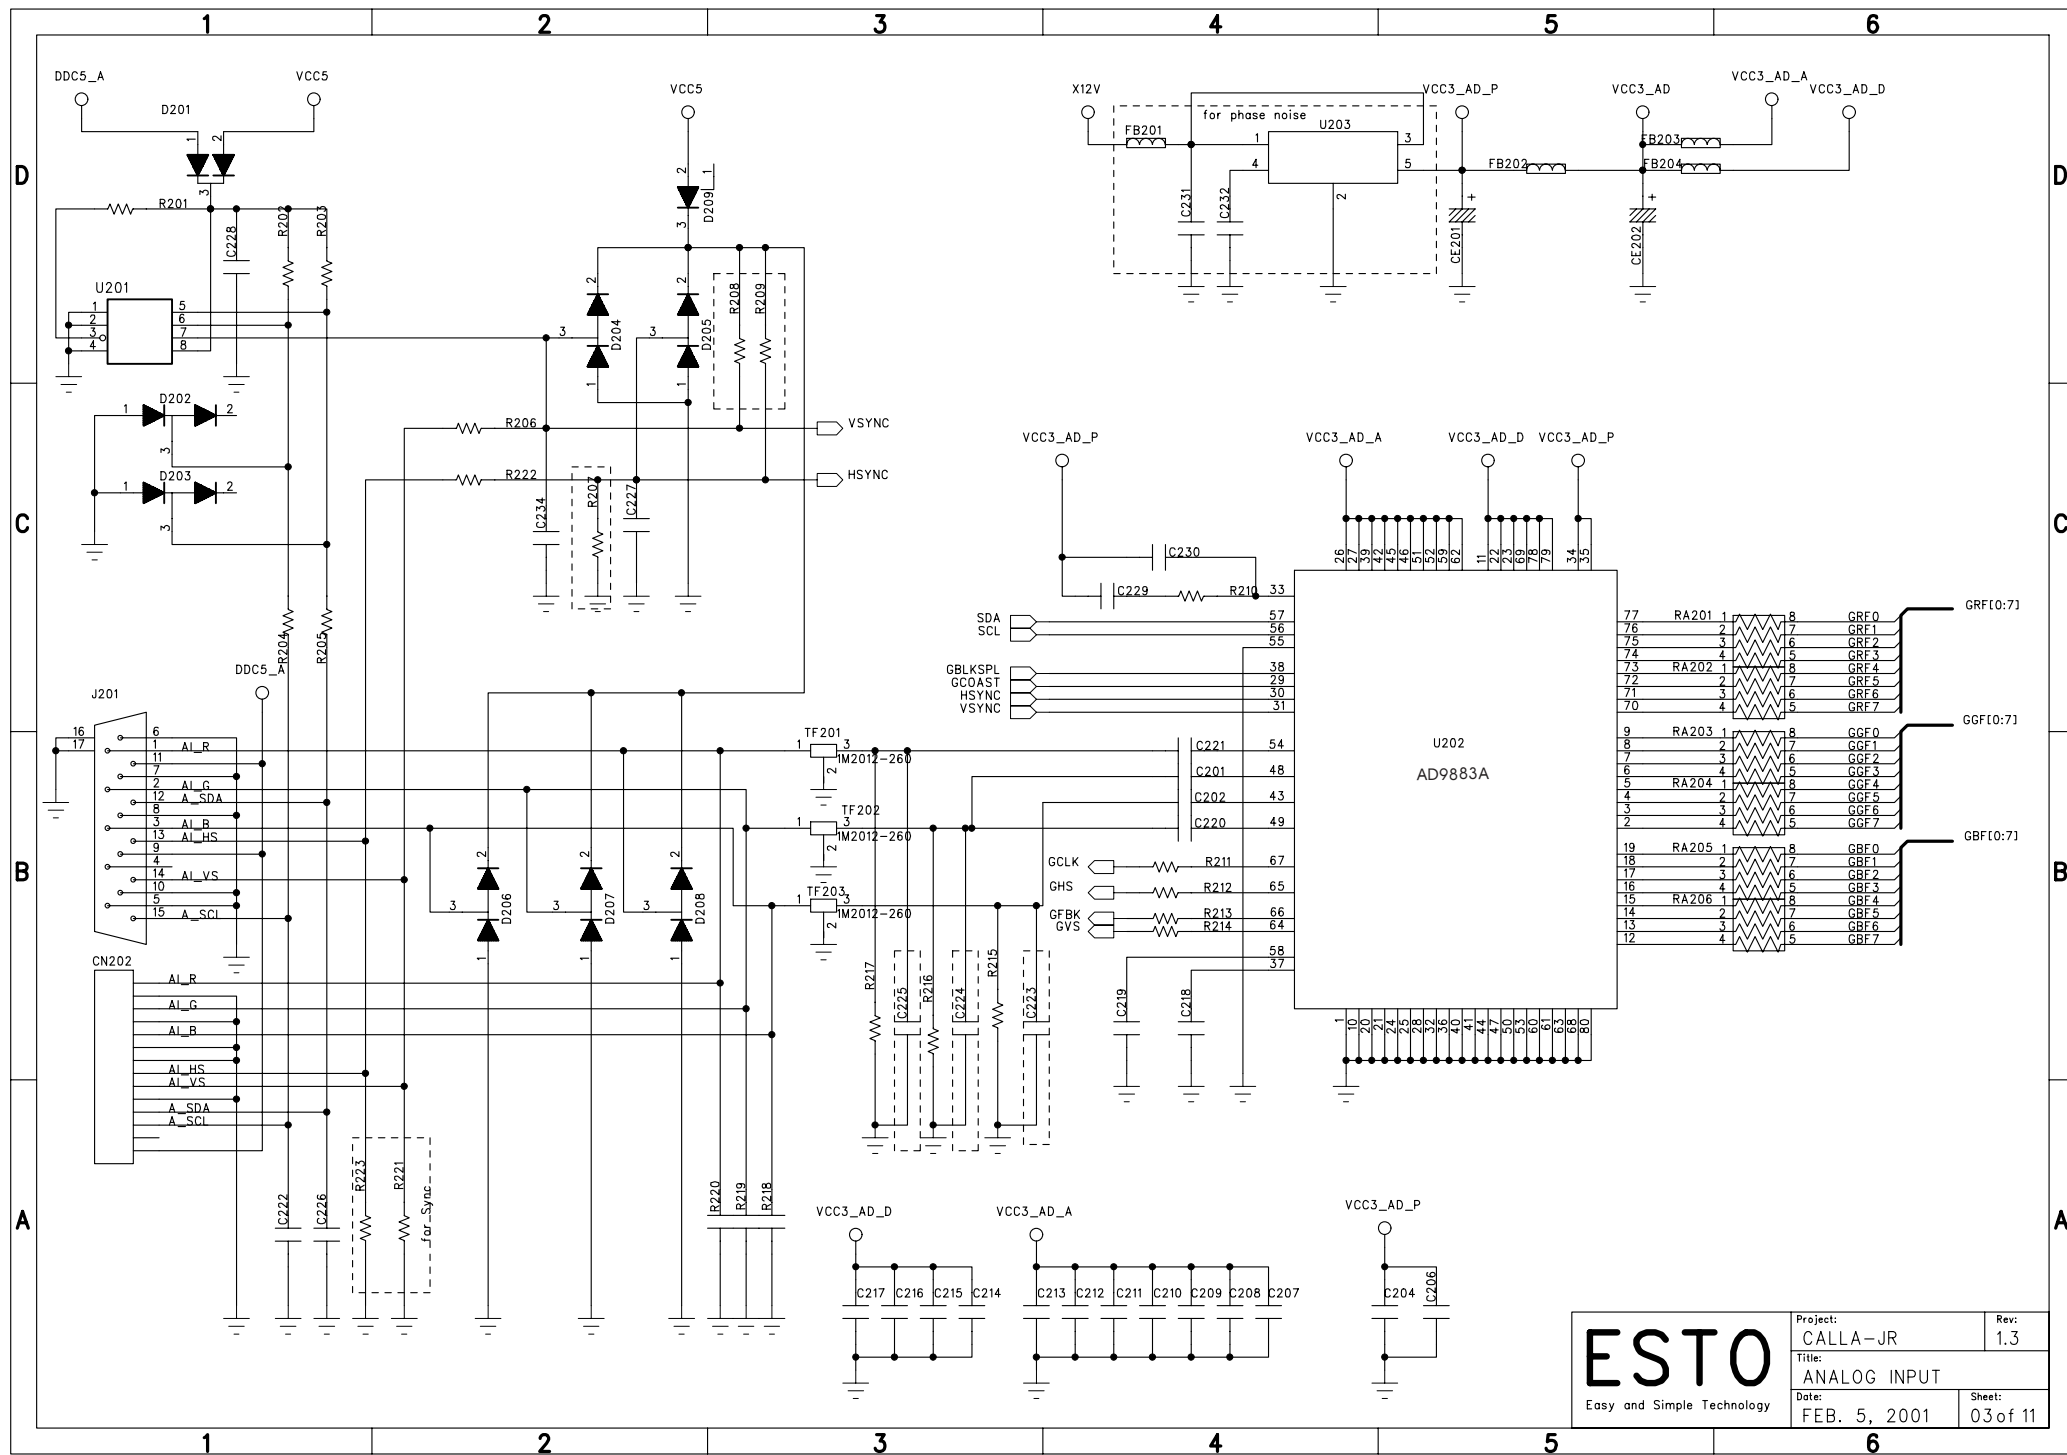


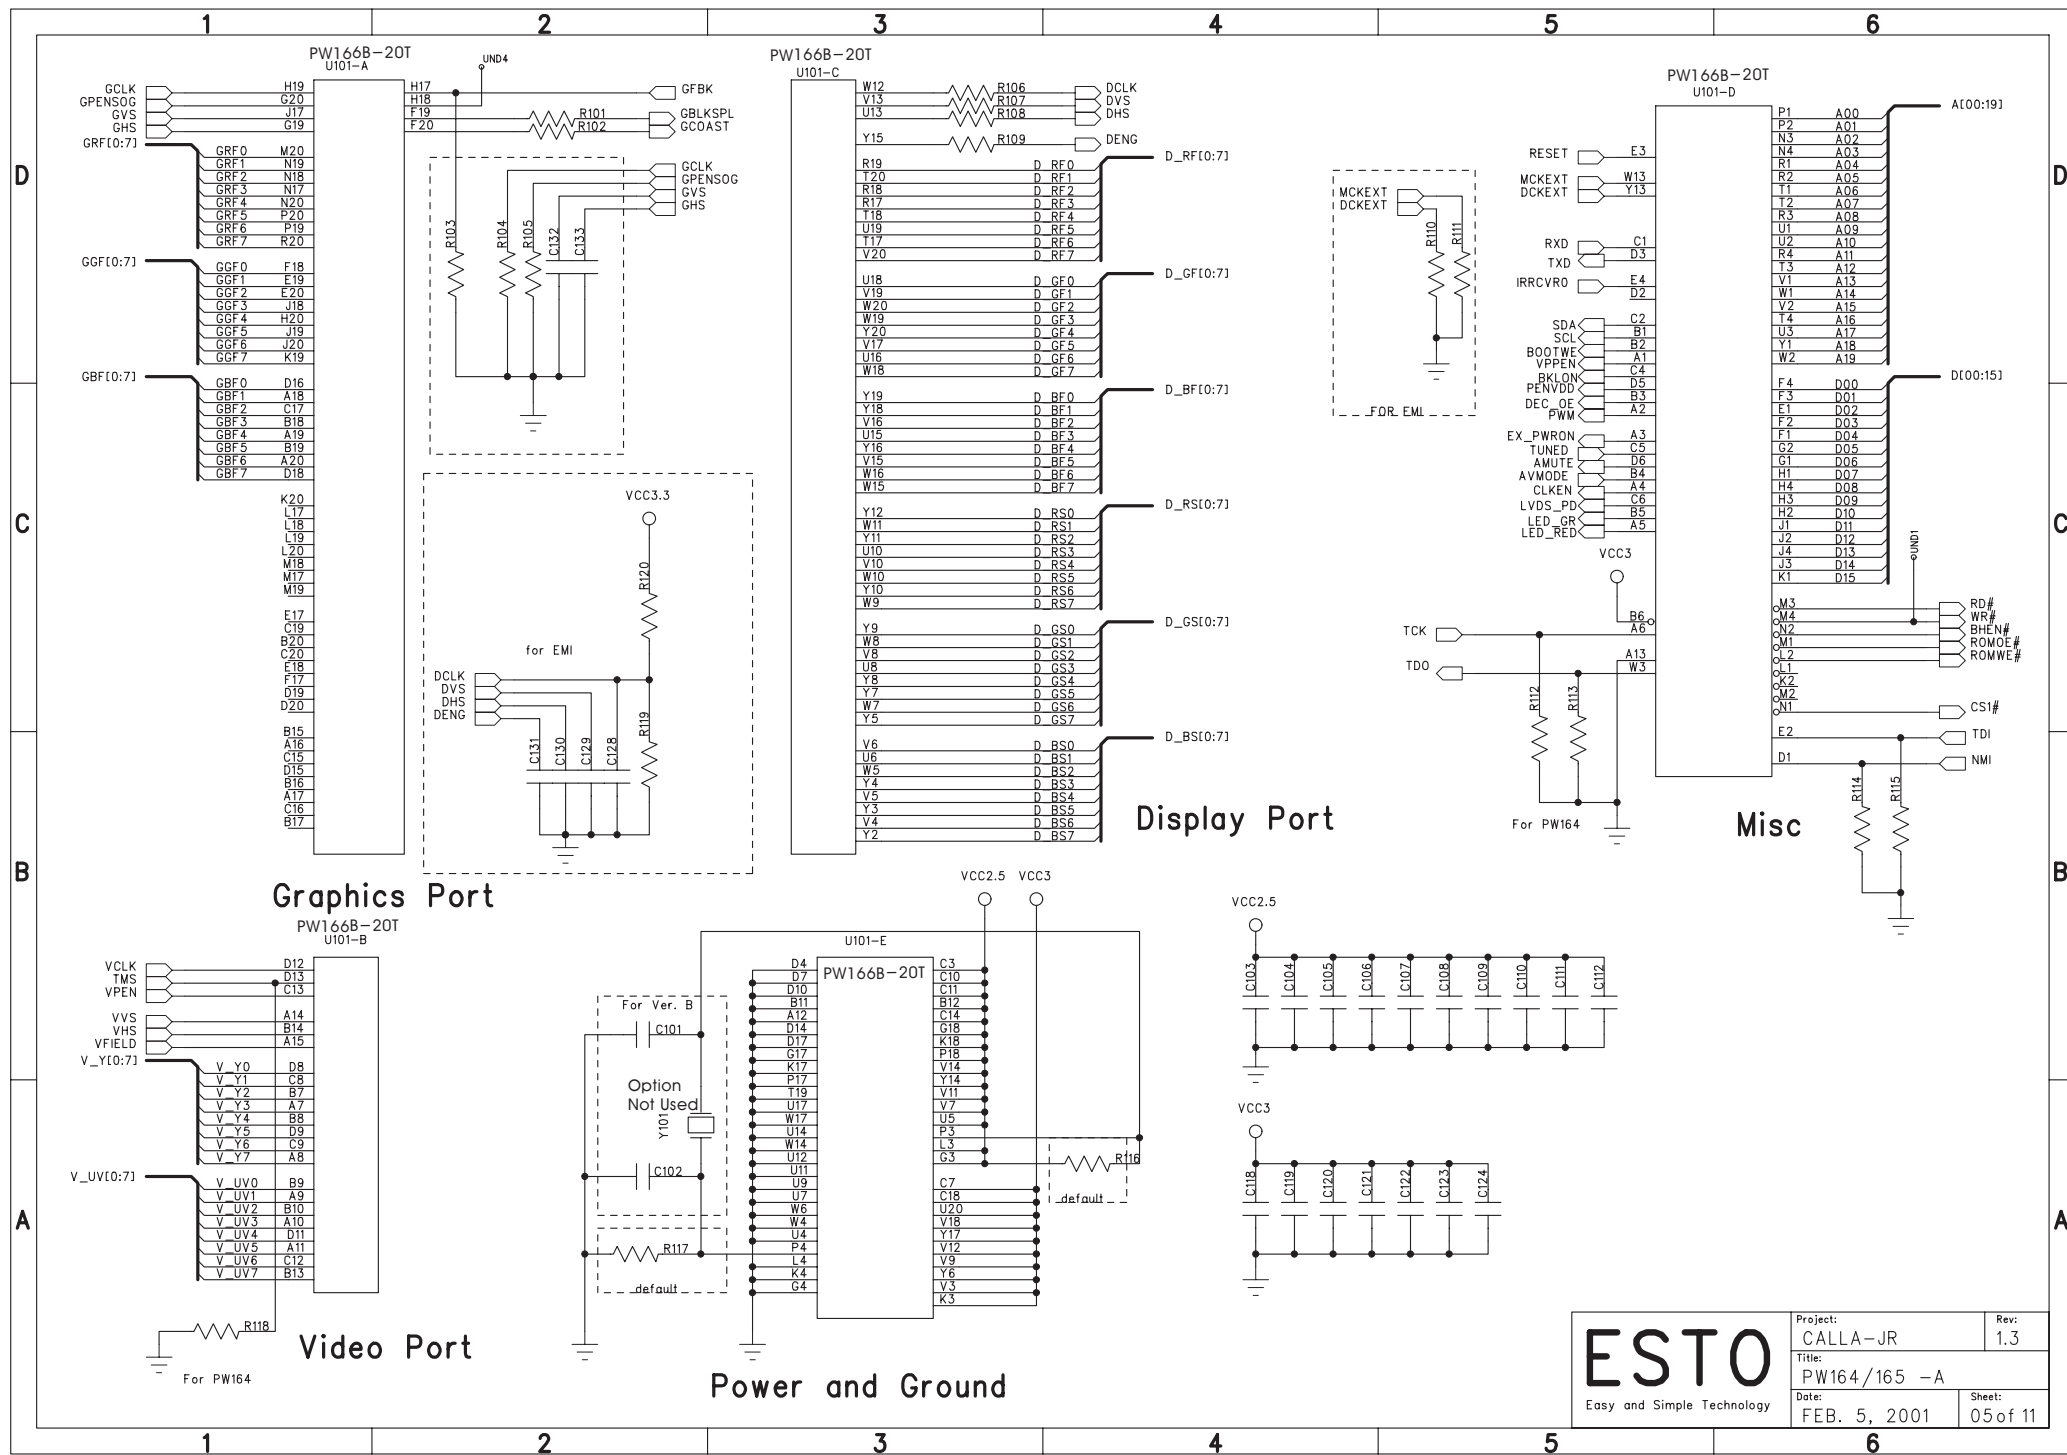

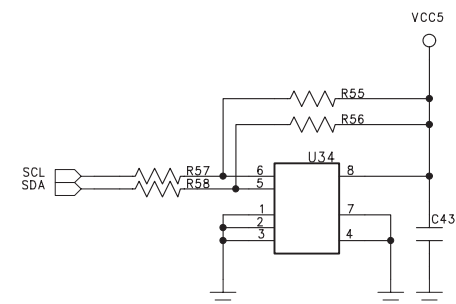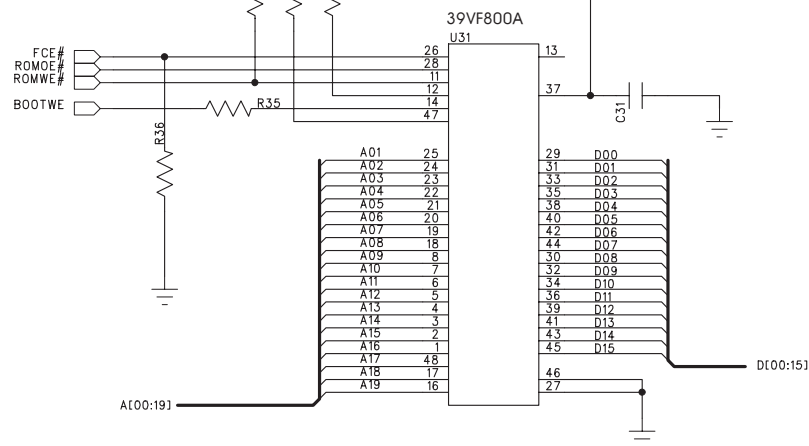


S1 : S0


0	0	* 4
0	M	* 5.325
0	1	* 5
M	0	* 6.25
M	M	* 2
M	1	* 3.125
1	0	* 6
1	M	* 3
1	1	* 8

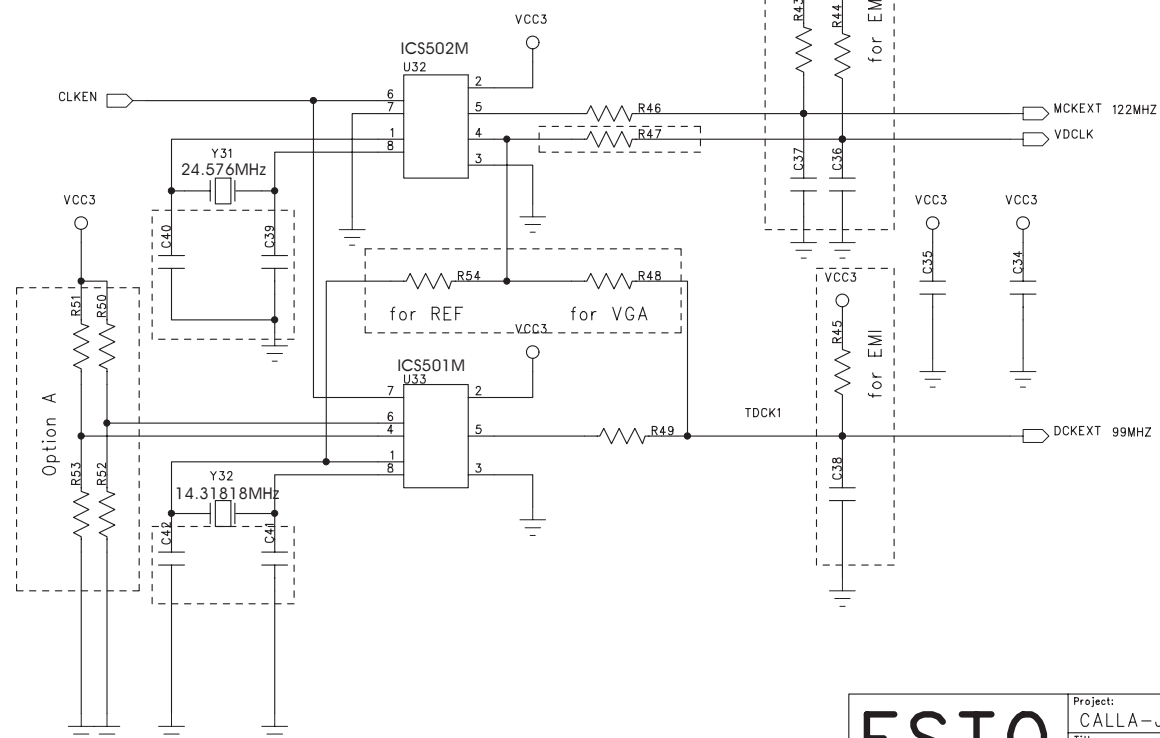


ESTO
Easy and Simple Technology

Project:	CALLA-JR	Rev:	1.3
Title:	MEMORY & CLOCK		
Date:	FEB. 5, 2001	Sheet:	06 of 11

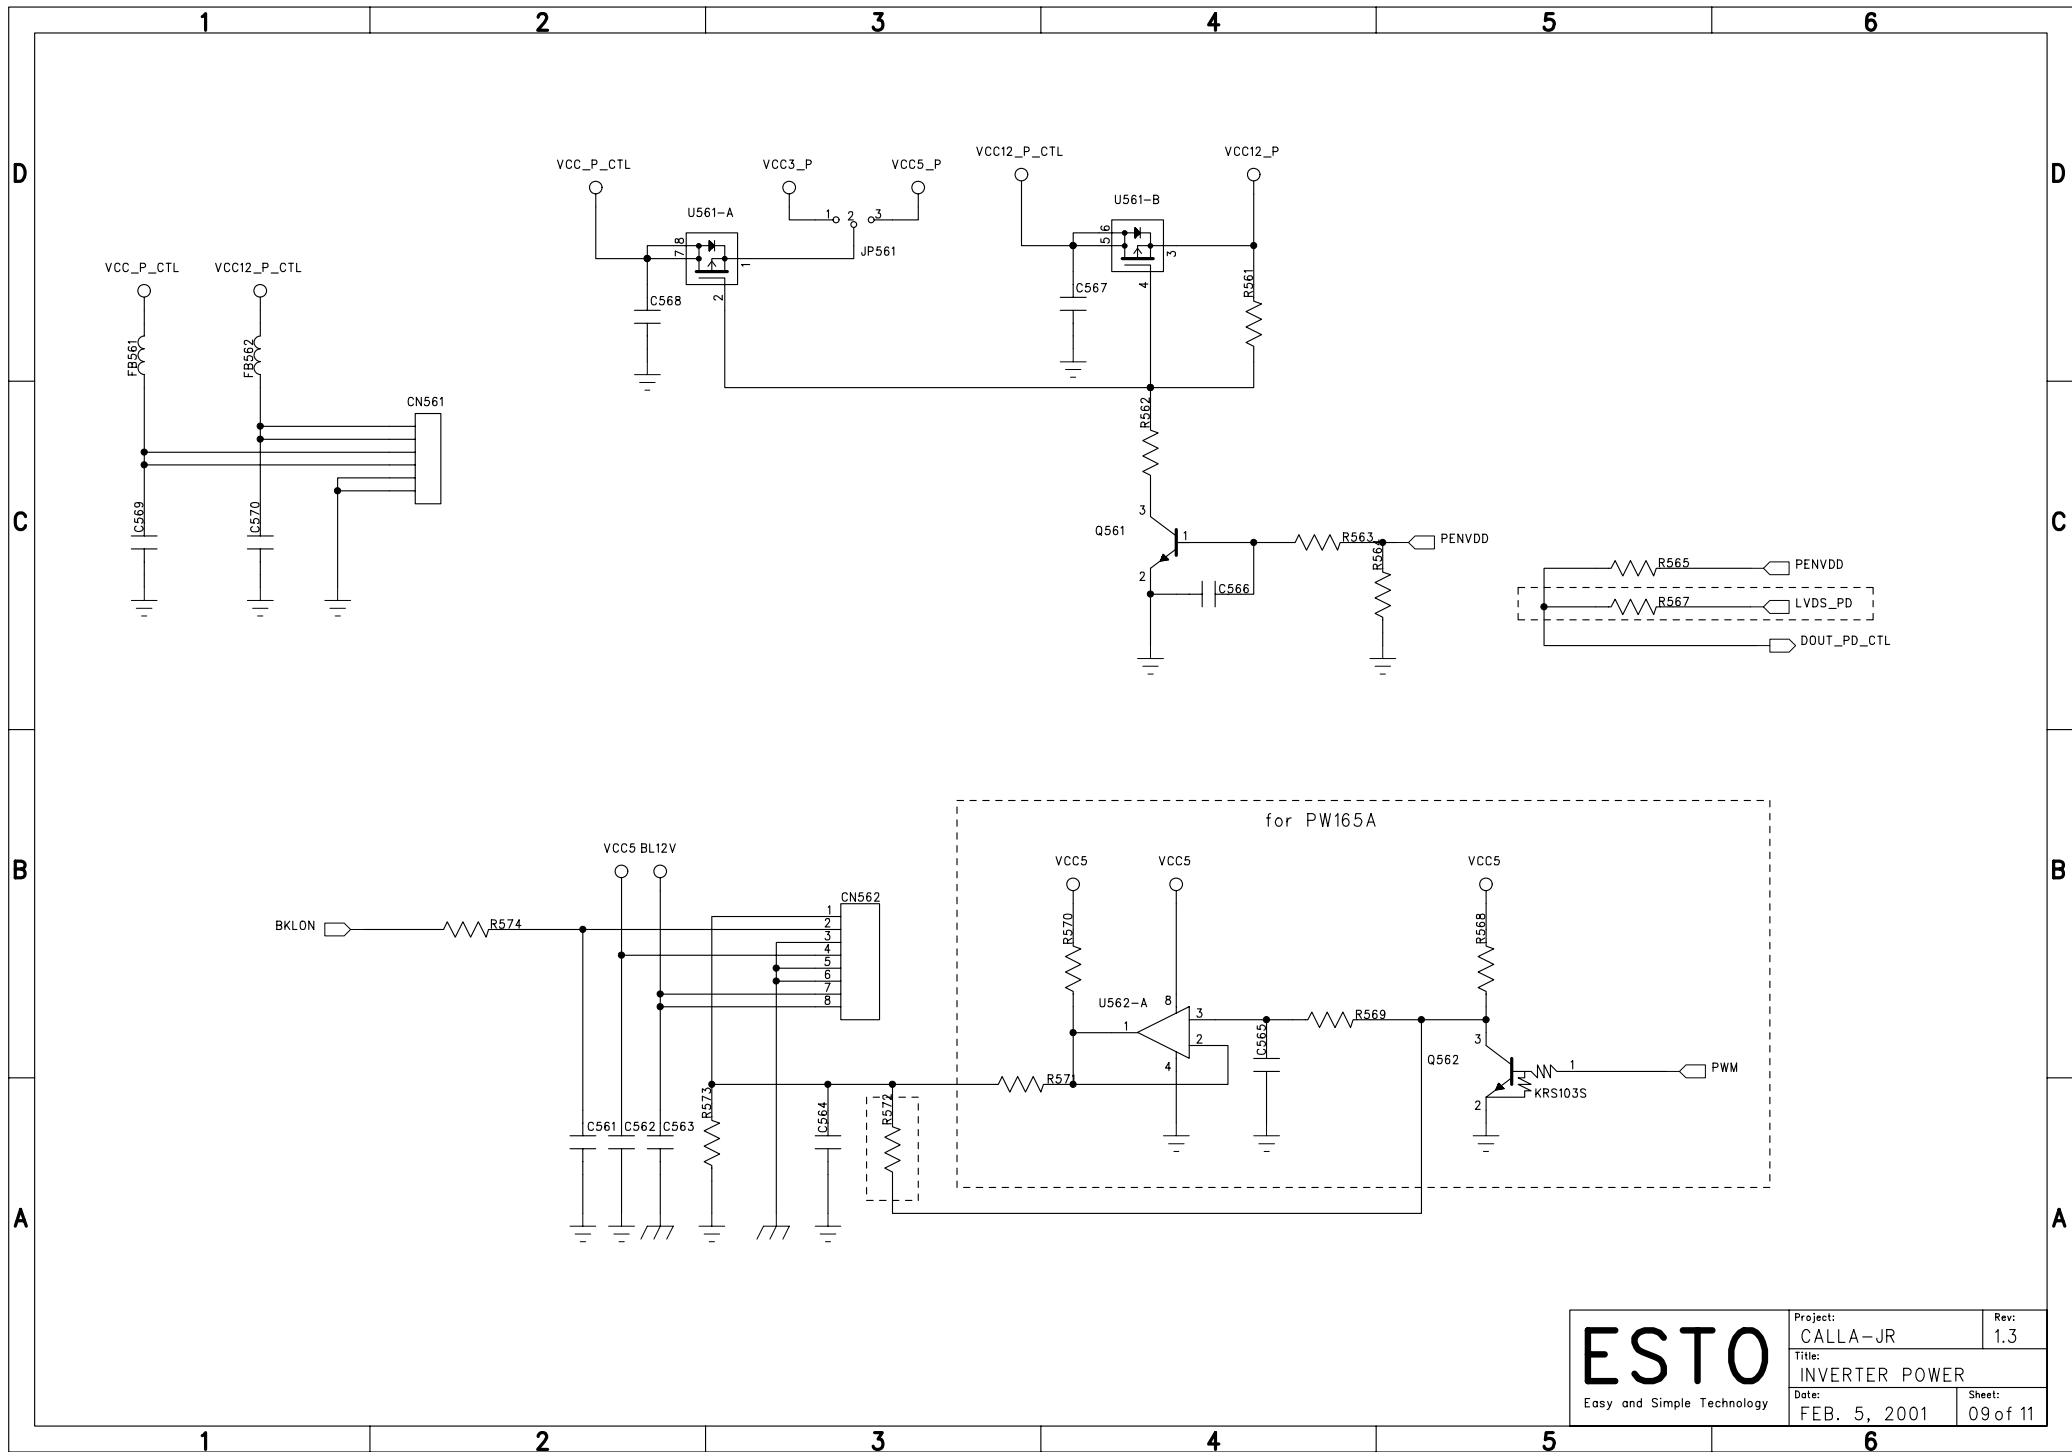

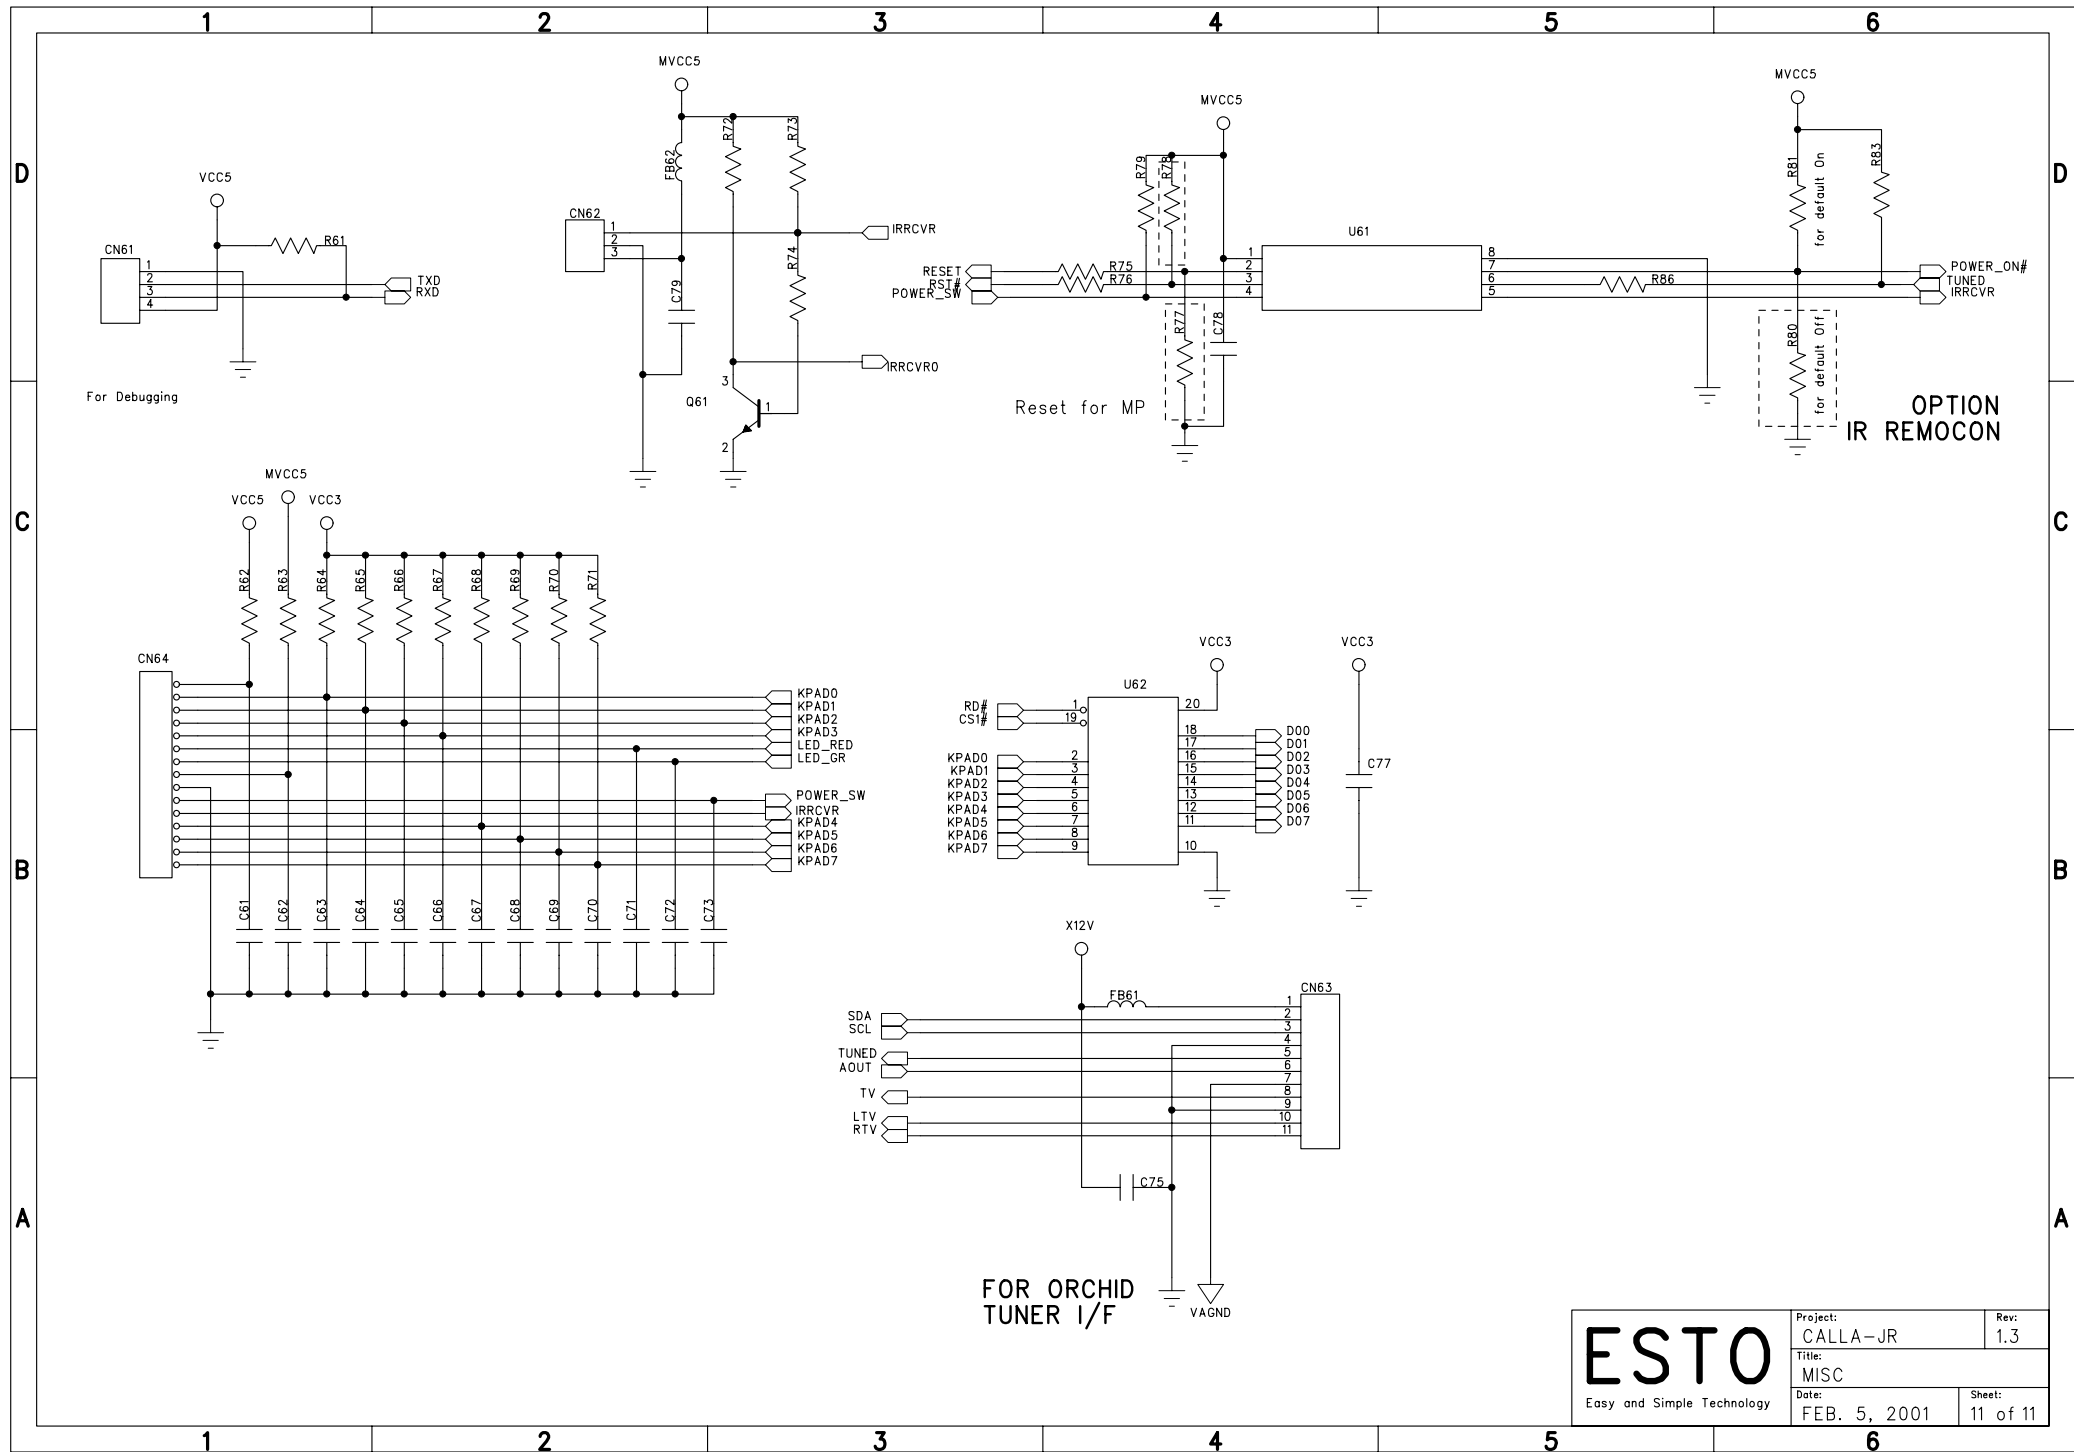

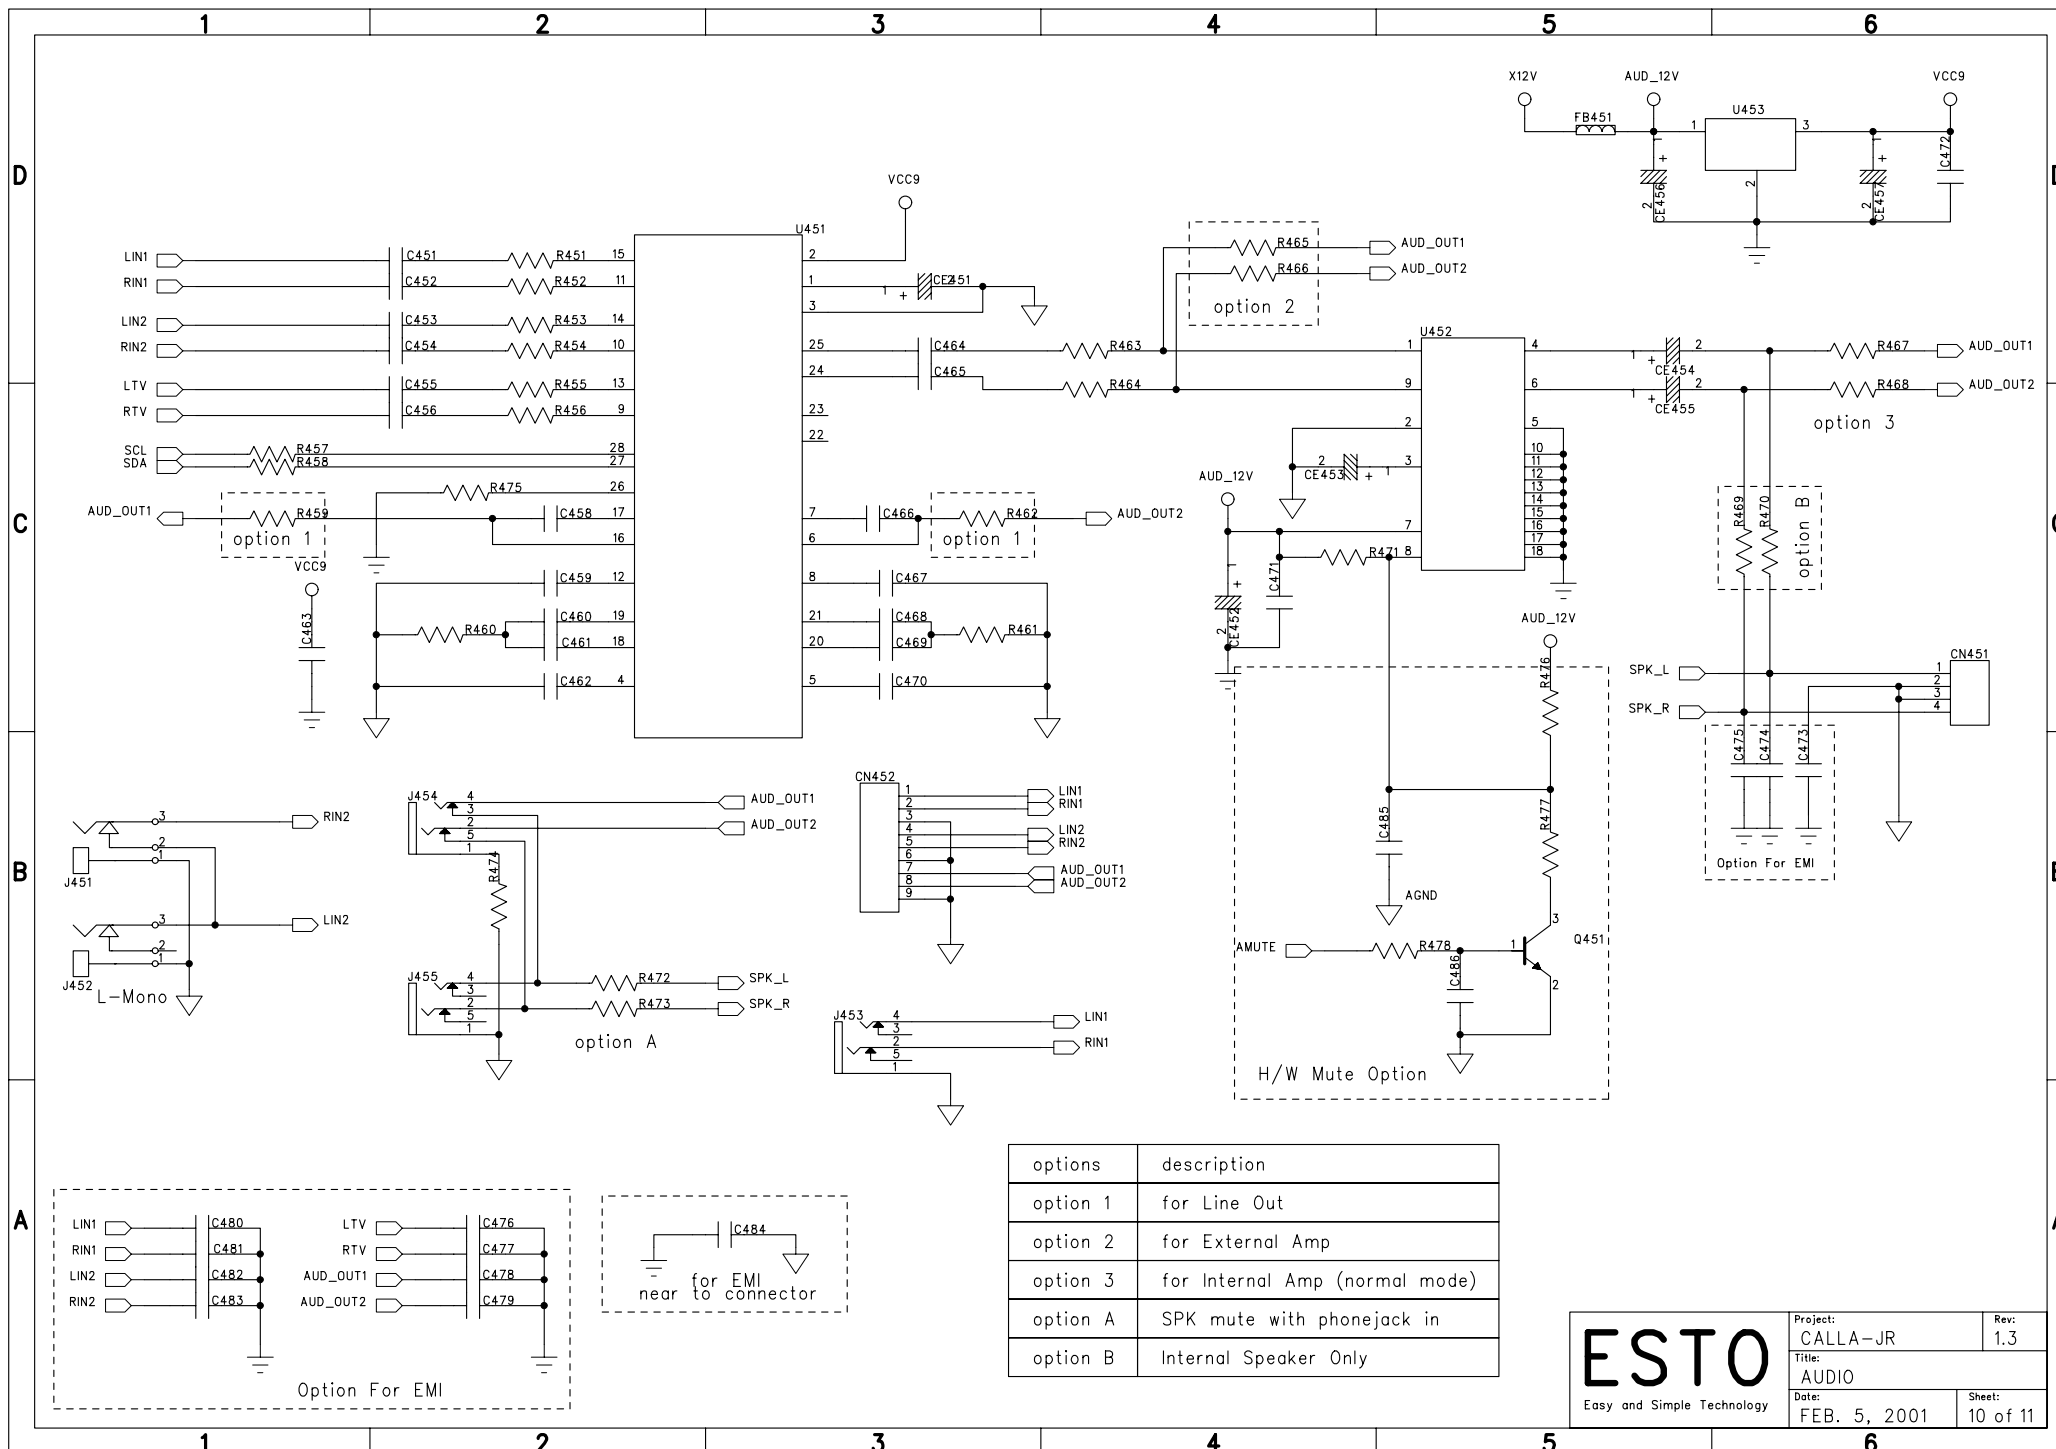

options	description
option 1	for Line Out
option 2	for External Amp
option 3	for Internal Amp (normal mode)
option A	SPK mute with phonejack in
option B	Internal Speaker Only

