


PHOTOGRAPHS OF THE TEST CONFIGURATION

DFS

Set UUT as Client without radar detection mode (Radar injected into Master)

For HT20 / HT40 / VHT80 Setup

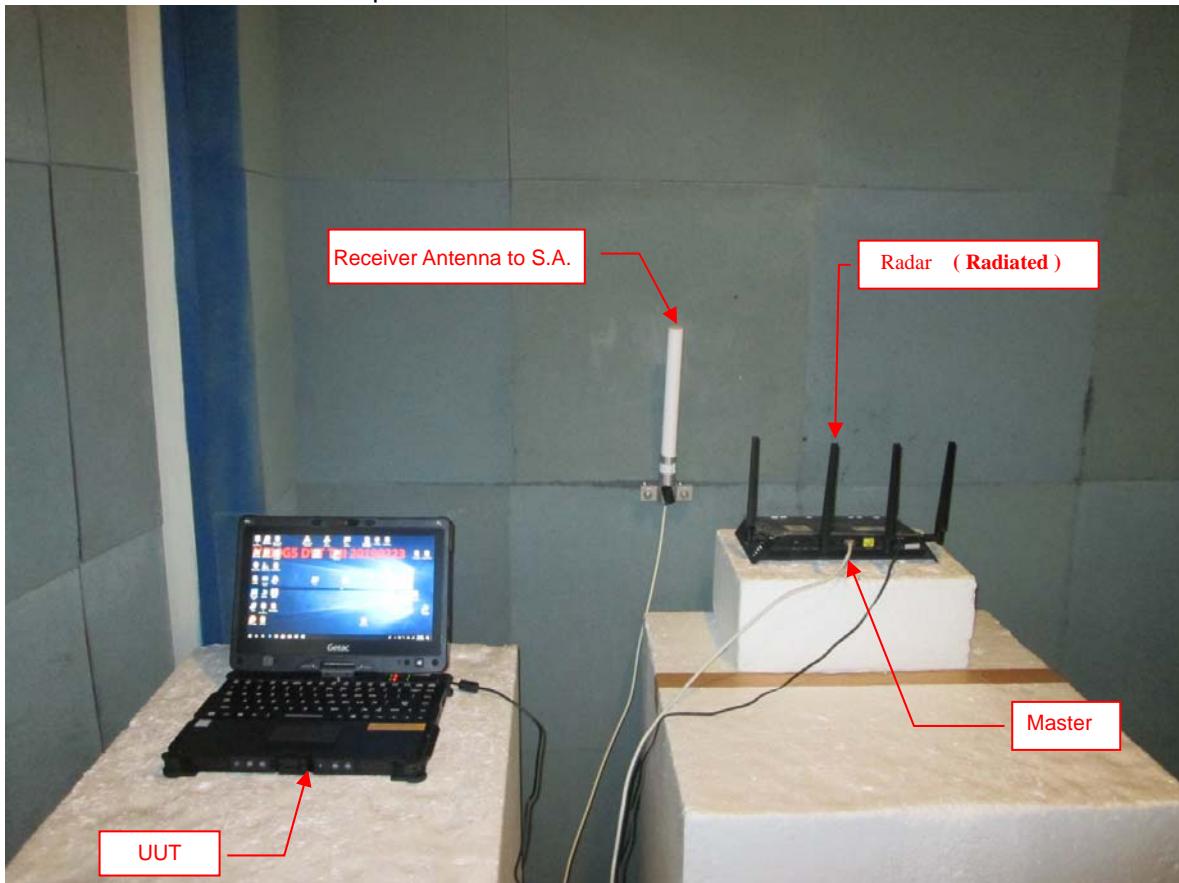

For VHT160 Setup

